



July 25, 1995

Susan Hugo
Alameda County Department of
Environmental Health
Hazardous Materials Division
1131 Harbor Bay Parkway,
Suite 250
Alameda, CA 94502-6577

Lab 36 18

10/13/95

Re: **Second Quarter 1995**
Shell Service Station
WIC #204-5510-0303
5755 Broadway
Oakland, California 94606
WA Job #81-0619-205

Dear Ms. Hugo:

This status report satisfies the quarterly reporting requirements prescribed by California Administrative Code Title 23 Waters, Division 3, Chapter 16, Article 5, Section 2652.d

Hydrocarbon and Ground Water Removal Summary		
<i>Fluid</i>	<i>Removed this Quarter</i>	<i>Total Removed</i>
Separate Phase	0.0 (lbs)	0.55 (lbs)
Ground Water with Dissolved Hydrocarbons	10,000 (gals)	275,238 (gals)

Second Quarter 1995 Activities:

- Weiss Associates (WA) supervised the removal of 10,000 gallons of ground water from the tank pit backfill, which intersects the shallow water table. Ground water was pumped using a vacuum truck and taken to the Shell Oil Refinery in Martinez, California for disposal. To date, Shell has pumped a total of 275,238 gallons of ground water from the tank pit.


- Blaine Tech Services, Inc. (BTS) of San Jose, California measured ground water depths and collected ground water samples from the site wells. BTS' report describing these activities and the analytic report for the ground water samples are included as Attachment A.
- WA calculated ground water elevations, compiled the analytic data (Tables 1 through 3) and prepared a ground water elevation contour and benzene concentrations in ground water map (Figure 2).


Anticipated Third Quarter 1995 Activities:

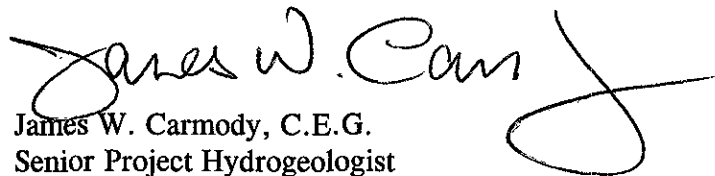
- WA will remove separate phase hydrocarbons, if detected, and estimate and report its mass. If necessary, ground water will be pumped from the tank pit and its volume reported.
- WA will submit a report presenting the results of the third quarter 1995 ground water sampling and ground water depth measurements. The report will include tabulated chemical analytic results, ground water elevations and a ground water elevation contour map.

Please call Tom Howard at 510-450-6000 if you have any questions.

Sincerely,
Weiss Associates




Grady S. Glasser
Technical Assistant


James W. Carmody, C.E.G.
Senior Project Hydrogeologist

Attachments: A - Blaine Tech's Ground Water Monitoring Report

cc: Dan Kirk, Shell Oil Products Company, P.O. Box 4023, Concord, California 94524

GSG/JDP:all

J:\SITE\ELL\0619\Q6195Q2195Q2R.DOC

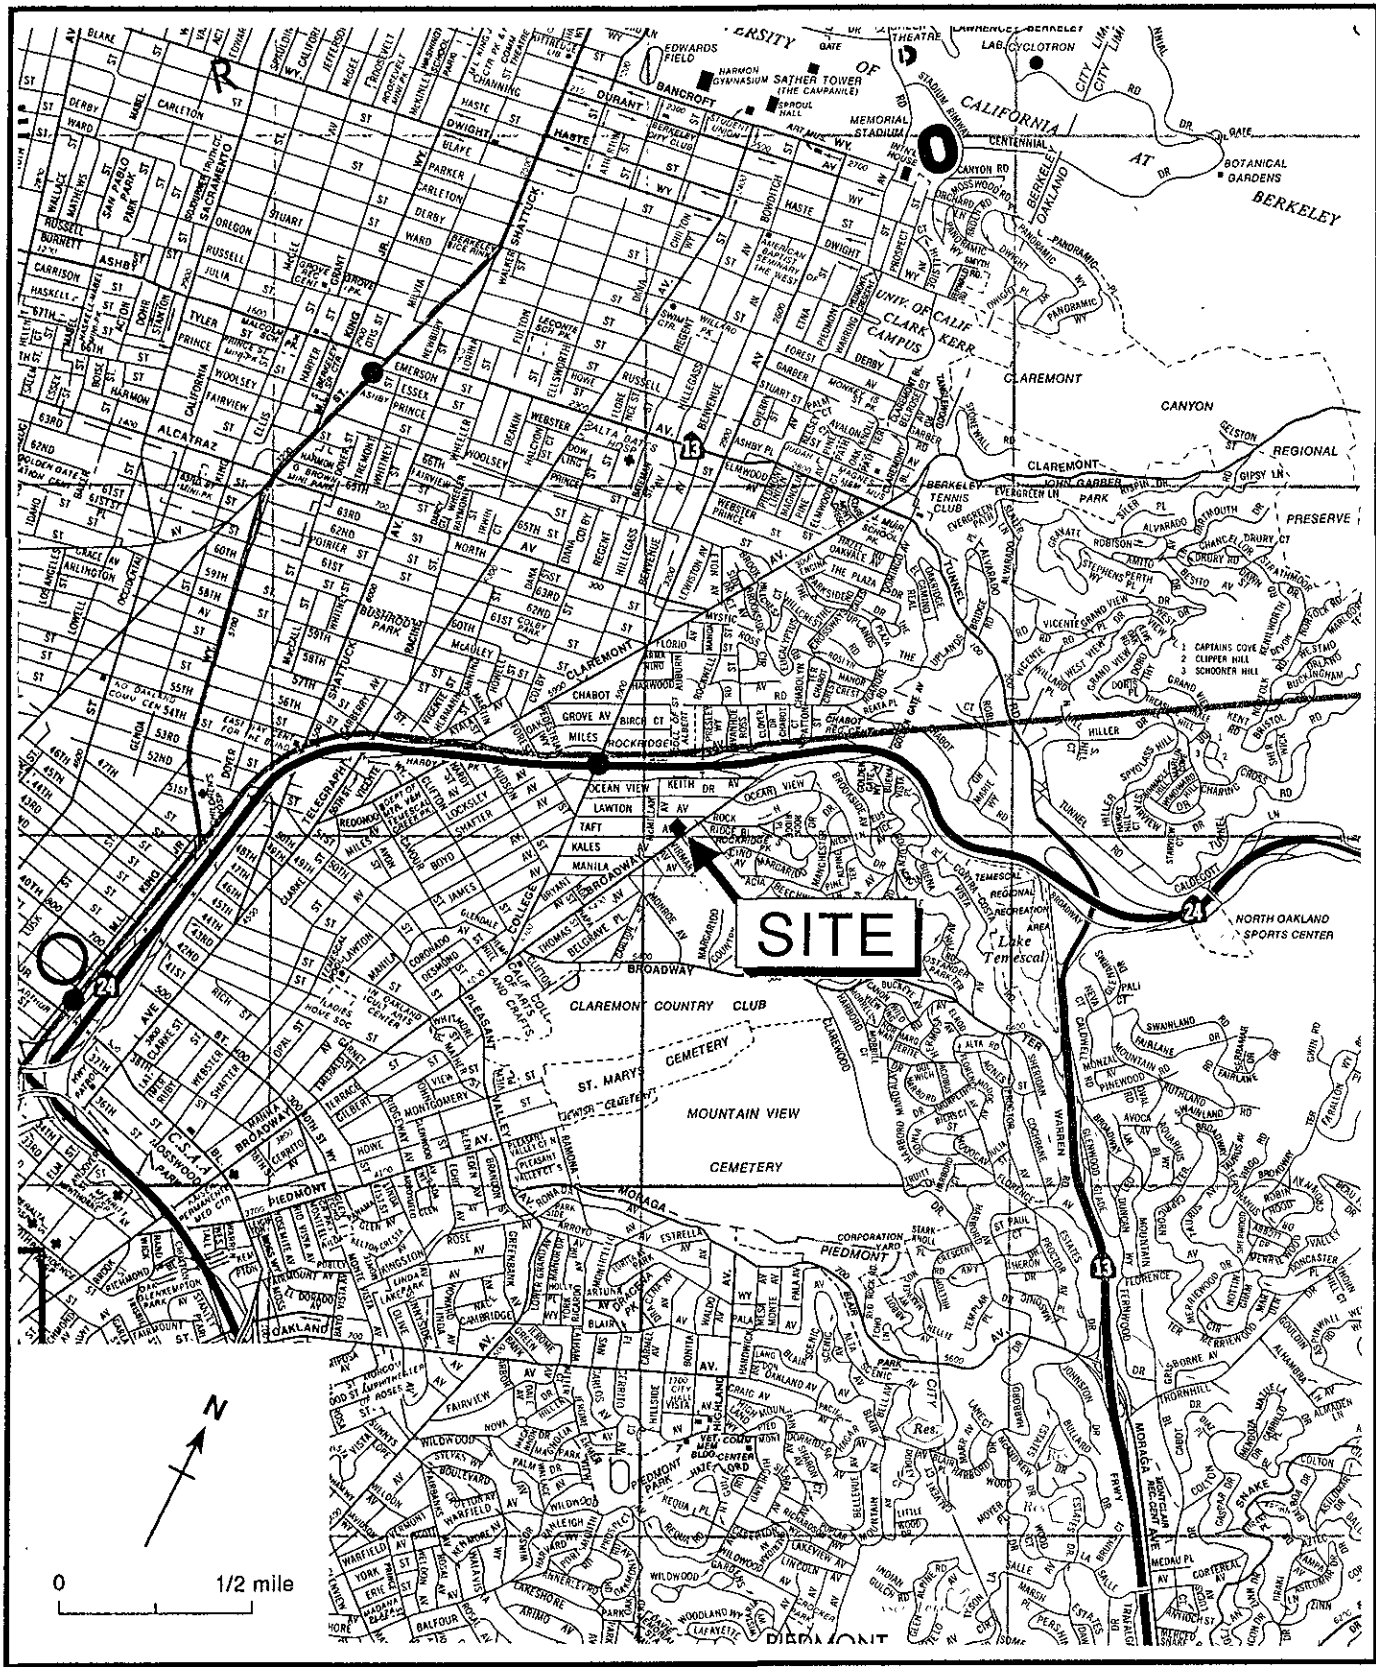


Figure 1. Site Location Map - Shell Service Station WIC #204-5510-0303, 5755 Broadway, Oakland, California

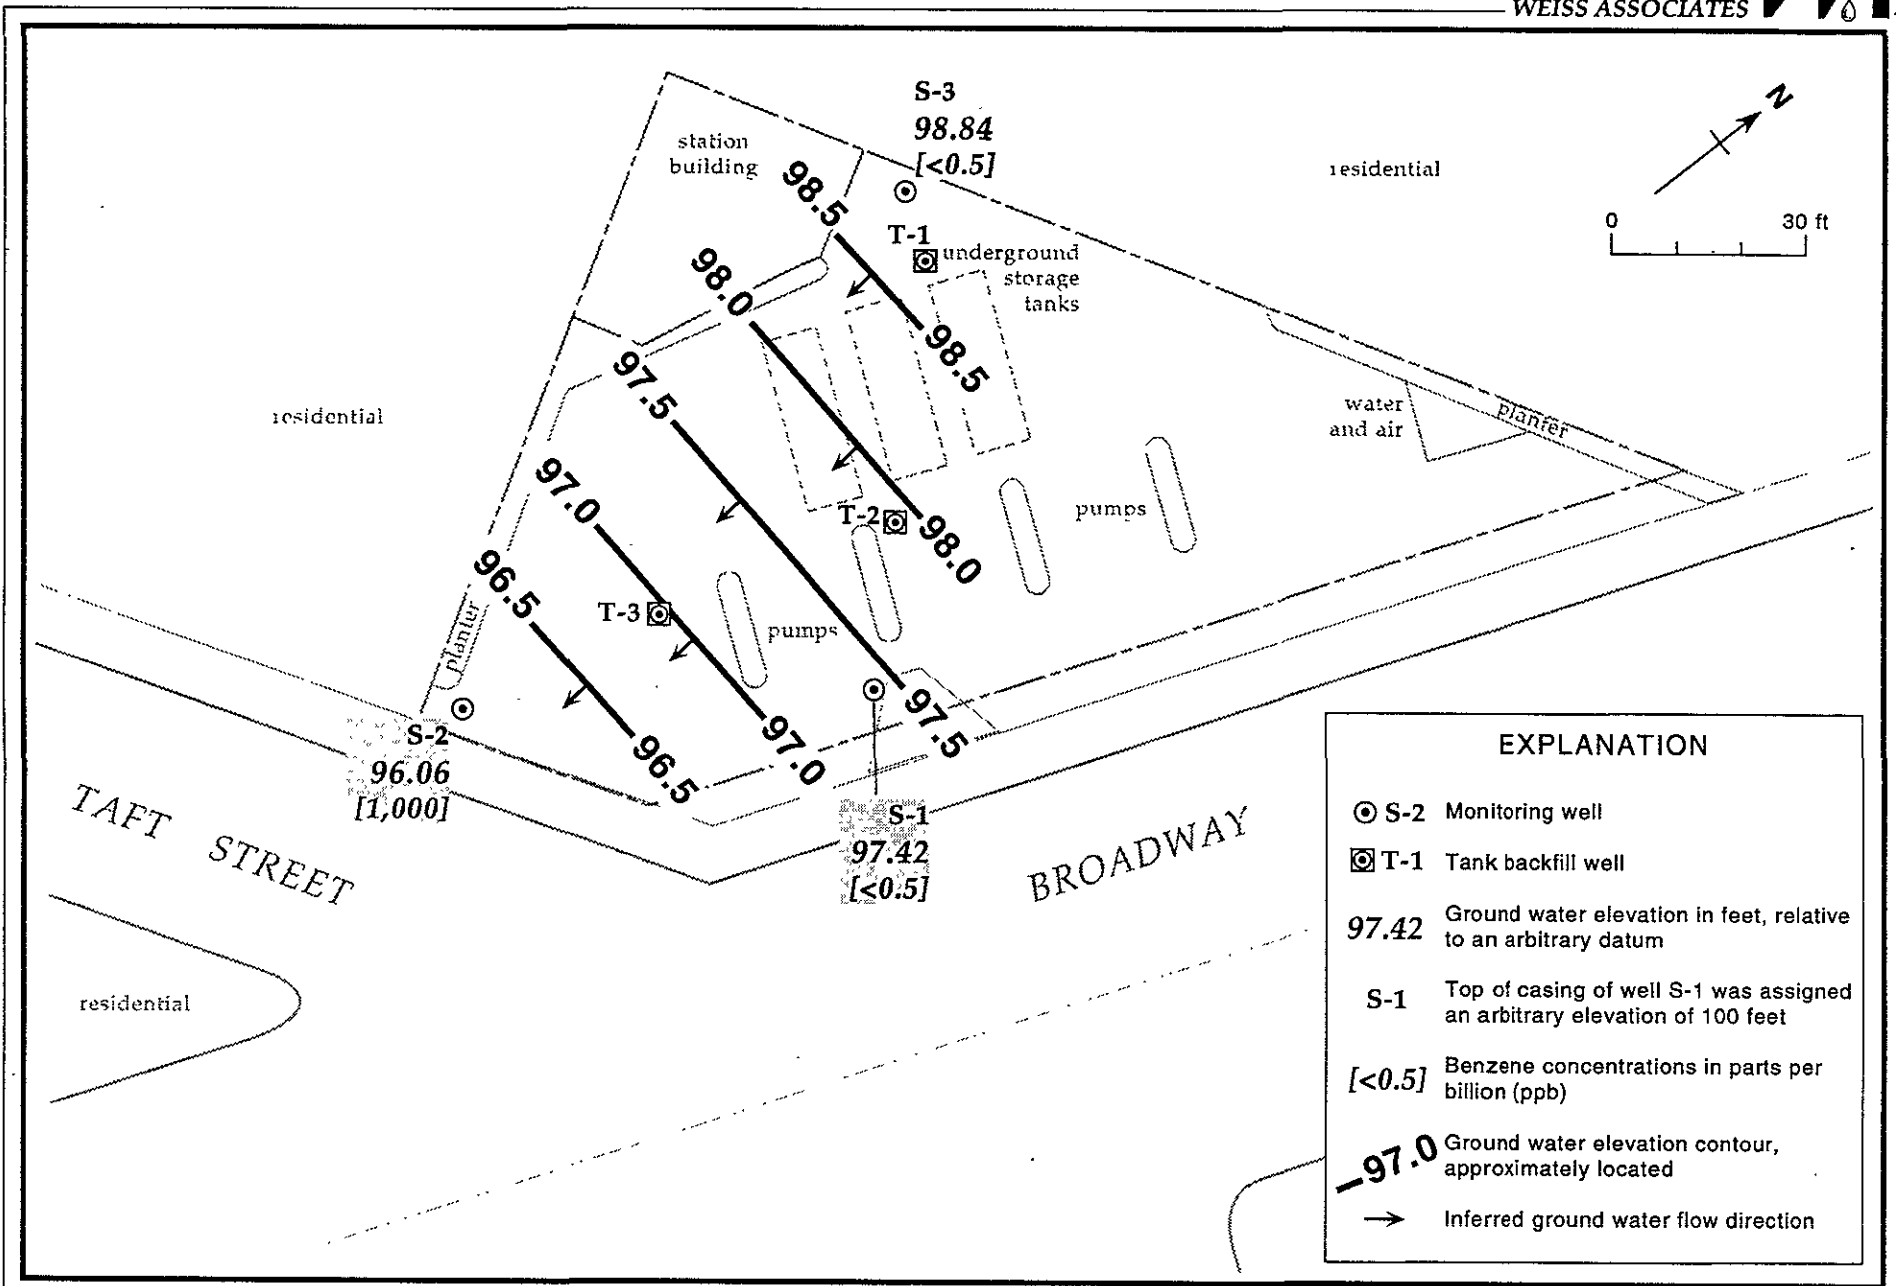


Figure 2. Monitoring Well Locations, Ground Water Elevation Contours, and Benzene Concentrations in Ground Water - May 2, 1995 - Shell Service Station WIC#204-2004-0204, 5755 Broadway, Oakland, California

Table 1. Ground Water Elevations - Shell Service Station WIC #504-5510-0303, 5755 Broadway, Oakland, California

Well ID	Date	Top-of-Casing Elevation *	Depth to Water (ft)	Ground Water Elevation (ft)
S-1	01/25/91	100.00	3.88	96.12
	06/03/91		3.51	96.49
	08/30/91		4.24	95.76
	11/22/91		4.29	95.71
	03/13/92		2.87	97.13
	05/28/92		3.79	96.21
	08/19/92		4.43	95.57
	11/18/92		4.34	95.66
	02/10/93		4.20	95.80
	06/11/93		3.39	96.61
	08/03/93		3.69	96.31
	11/02/93		4.26	95.74
	12/16/93		2.73	97.27
	02/01/94		3.38	96.62
	05/04/94		3.00	97.00
	08/18/94		3.70	96.30
	11/09/94		2.52	97.48
	02/22/95		4.08	95.92
05/02/95	2.58	97.42		
S-2	01/25/91	98.92	4.52	94.40
	06/03/91		4.02	94.90
	08/30/91		4.70	94.22
	11/22/91		4.72	94.20
	03/13/92		3.47	95.45
	05/28/92		4.45	94.45
	08/19/92		4.84	94.08
	11/18/92		4.73	94.19
	02/10/93		4.83	94.09
	06/11/93		3.74	95.18
	08/03/93		4.23	94.69
	11/02/93		4.72	94.20
	12/16/93		3.00	95.92
	02/01/94		3.48	95.44
	05/04/94		3.26	95.66
	08/18/94		3.98	94.94
	11/09/94		3.10	95.82
	02/22/95		4.02	94.90
05/02/95	2.86	96.06		
S-3	01/25/91	101.67	3.84	97.83
	06/03/91		3.25	98.42
	08/03/91		4.73	96.94

Table 1. Ground Water Elevations - Shell Service Station WIC #504-5510-0303, 5755 Broadway, Oakland, California (continued)

Well ID	Date	Top-of-Casing Elevation*	Depth to Water (ft)	Ground Water Elevation (ft)
	11/22/91		4.81	96.86
	03/13/92		2.29	99.38
	05/28/92		3.62	98.05
	08/19/92		4.66	97.01
	11/18/92		4.51	97.16
	02/10/93		4.36	97.31
	06/11/93		2.91	98.76
	08/03/93		3.70	97.97
	11/02/93 ^a		---	---
	12/16/93		2.12	99.55
	02/01/94		2.90	98.77
	05/04/94		2.54	99.13
	08/18/94		3.51	98.16
	11/09/94		2.44	99.23
	02/22/95		4.12	97.55
	05/02/95		2.83	98.84

Note:

- * = Top of casing elevations referenced to arbitrary elevation of 100 ft
- a = Well inaccessible
- NA = Not available

Table 2. Analytic Results for Ground Water, Shell Service Station, WIC #204-5510-0303, 5755 Broadway, Oakland, California

Sample ID	Date	Depth to Water (ft)	parts per billion (µg/L)				
			TPH-G	B	E	T	X
S-1	01/25/91	3.88	<30	<0.3	<0.3	<0.3	<0.3
	06/03/91	3.51	<30	<0.3	<0.3	<0.3	<0.3
	08/30/91	4.24	<30	<0.3	<0.3	<0.3	<0.3
	11/22/91	4.29	<30	2.3	0.3	<0.46	<0.65
	03/13/92	2.87	<30	<0.52	<0.3	<0.3	<0.3
	05/28/92	3.79	<50	<0.5	<0.5	<0.5	<0.5
	08/19/92	4.43	<50	<0.5	<0.5	<0.5	<0.5
	11/18/92	4.34	<50	<0.5	<0.5	<0.5	<0.5
	02/10/93	4.20	51	1.4	<0.5	<0.5	<0.5
	02/10/93 ^{dup}	4.20	<50	1.2	<0.5	<0.5	<0.5
	06/11/93	3.39	<50	<0.5	<0.5	<0.5	<0.5
	08/03/93	3.69	<50	<0.5	<0.5	<0.5	<0.5
	11/02/93	4.26	70 ^a	<0.5	<0.5	<0.5	<0.5
	02/01/94	3.38	60 ^a	<0.5	<0.5	<0.5	<0.5
	05/04/94	3.00	<50	1.1	<0.5	<0.5	<0.5
	08/18/94	3.70	<50	0.6	<0.5	<0.5	<0.5
	08/18/94 ^{dup}	3.70	60 ^b	0.5	<0.5	<0.5	<0.5
	11/09/94	2.52	<50	4.0	<0.5	<0.5	<0.5
	02/22/95	4.08	50	0.8	<0.5	0.7	1.3
	05/02/95	2.58	<50	<0.5	<0.5	<0.5	<0.5
S-2	01/25/91	4.52	450	140	6.2	1.8	15
	06/03/91	4.02	490	150	8.2	2.7	7
	08/30/91	4.70	70	0.37	<0.3	<0.3	<0.3
	11/22/91	4.72	1,600	110	29	9.3	150
	03/13/92	3.47	1,300	210	34	5.7	79
	05/28/92	4.45	100	28	<0.5	<0.5	<0.5
	08/19/92	4.84	470	42	8.3	<0.5	4.0
	11/18/92	4.73	490	43	17	39	29
	02/10/93	4.83	19,000	710	80	760	370



Table 2. Analytic Results for Ground Water, Shell Service Station, WIC #204-5510-0303, 5755 Broadway, Oakland, California (continued)

Sample ID	Date	Depth to Water (ft)	TPH-G	B	E			T	X
					parts per billion (µg/L)				
	06/11/93	3.74	33,000	3,100	370	1,600	1,100		
	08/03/93	4.23	18,000	1,400	81	130	130		
	08/03/93 ^{dup}	4.23	19,000	1,400	86	140	150		
	11/02/93	4.72	12,000 ^a	470	31	47	92		
	11/02/93 ^{dup}	4.72	13,000 ^a	530	35	47	96		
	02/01/94	3.48	31,000 ^a	430	50	46	130		
	02/01/94 ^{dup}	3.48	31,000 ^a	300	30	33	100		
	05/04/94	3.26	3,900	1,200	53	31	71		
	05/04/94 ^{dup}	3.26	4,500	1,200	57	37	110		
	08/18/94	3.98	24,000	600	15	8.3	27		
	11/09/94	3.10	1,400 ^a	240	13	9.3	20		
	11/09/94 ^{dup}	3.10	1,800	260	13	8.5	21		
	02/22/95	4.02	29,000	550	12	18	63		
	02/22/95 ^{dup}	4.02	28,000	530	10	17	60		
	05/02/95	2.86	4,400	1,000	38	25	77		
	05/02/95 ^{dup}	2.86	4,400	1,000	41	26	83		
S-3	01/25/91	NA	<30	<0.3	<0.3	<0.3	<0.3		
	06/03/91	3.25	<30	<0.3	0.3	0.3	0.3		
	08/30/91	4.73	<30	<0.3	<0.3	<0.3	<0.3		
	11/22/91	4.81	<30	<0.3	<0.3	<0.3	<0.3		
	03/13/92	2.29	<30	<0.3	0.3	0.3	0.3		
	05/28/92	3.62	<50	<0.5	<0.5	<0.5	<0.5		
	08/19/92	4.66	<50	<0.5	<0.5	<0.5	0.5		
	11/18/92	4.51	<50	<0.5	<0.5	<0.5	<0.5		
	02/10/93	4.36	30	1.9	2.4	3.2	5.6		
	06/11/93	2.91	<50	<0.5	<0.5	<0.5	<0.5		
	06/11/93 ^{dup}	2.91	<50	<0.5	<0.5	<0.5	<0.5		
	08/03/93	3.70	<50	<0.5	<0.5	<0.5	<0.5		
	11/02/93 ^c	---	---	---	---	---	---		



Table 2. Analytic Results for Ground Water, Shell Service Station, WIC #204-5510-0303, 5755 Broadway, Oakland, California (continued)

Sample ID	Date	Depth to Water (ft)	TPH-G ←	B	E parts per billion (µg/L)	T	X →
	02/01/94	2.90	<50	<0.5	<0.5	<0.5	<0.5
	05/04/94	2.54	<50	<0.5	<0.5	<0.5	<0.5
	08/18/94	3.51	<50	<0.5	<0.5	<0.5	<0.5
	11/09/94	2.44	<50	<0.5	<0.5	<0.5	<0.5
	02/22/95	4.12	80	<0.5	<0.5	0.5	0.5
	05/02/95	2.83	<50	<0.5	<0.5	<0.5	<0.5
Bailer	08/19/92		<50	<0.5	<0.5	<0.5	<0.5
Blank	11/22/91		<50	<0.5	<0.5	<0.5	<0.5
	02/22/95		<50	<0.5	<0.5	<0.5	<0.5
Trip	03/13/92		<50	<0.3	<0.3	<0.3	<0.3
Blank	05/28/92		<50	<0.5	<0.5	<0.5	<0.5
	08/19/92		<50	<0.5	<0.5	<0.5	<0.5
	11/18/92		<50	<0.5	<0.5	<0.5	<0.5
	02/10/93		<50	<0.5	<0.5	<0.5	<0.5
	08/03/93		<50	<0.5	<0.5	<0.5	<0.5
	11/02/93		<50	<0.5	<0.5	<0.5	<0.5
	02/01/94		<50	<0.5	<0.5	<0.5	<0.5
	05/04/94		<50	<0.5	<0.5	<0.5	<0.5
	11/09/94		<50	<0.5	<0.5	<0.5	<0.5
	02/22/95		<50	<0.5	1.0 ^e	<0.5	<0.5
	05/02/95		<50	<0.5	<0.5	<0.5	<0.5
DTSC MCLs			NE	1	680	100 ^d	1,750



Table 2. Analytic Results for Ground Water, Shell Service Station, WIC #204-5510-0303, 5755 Broadway, Oakland, California (continued)

Abbreviations:

TPH-G = Total petroleum hydrocarbons as gasoline by Modified EPA Method 8015
B = Benzene by EPA Method 8020
E = Ethylbenzene by EPA Method 8020
T = Toluene by EPA Method 8020
X = Xylenes by EPA Method 602 or 8020
--- = Not analyzed
DTSC MCLs = California Department of Toxic Substances Control maximum
contaminant levels for drinking water
NA = Not available
NE = Not established
<n = Not detected at detection limits of n ppb
dup = Duplicate sample

Notes:

a = Concentrations reported as gasoline are primarily due to presence of a discrete peak not indicative of gasoline.
b = This positive result has an atypical pattern for gasoline
c = Well inaccessible.
d = DTSC recommended action level for drinking water; MCL not established
e = Positive result confirmed by secondary column or GC/MS analysis.

Table 3. Separate Phase Hydrocarbon Removal - Shell Service Station WIC #204-5510-0303, 5755 Broadway, Oakland, California

Well ID	Date	Separate Phase Hydrocarbon Thickness (ft)	Hydrocarbons Removed (lbs)	Cumulative Hydrocarbons Removed (lbs)
T-1	02/10/93	<0.01	0.01	0.01
	06/11/93	<0.01	0.01	0.02
	08/03/93	0.01	0.01	0.03
	11/02/93	0.02	0.03	0.06
	02/01/94	0.00	0.01	0.07
	05/04/94	0.00	0.00	0.07
	08/18/94	0.00	0.00	0.07
	02/22/95	0.00	0.00	0.07
	05/02/95	0.00	0.00	0.07
T-2	02/10/93	0.43	0.40	0.40
	06/11/93	<0.01	0.01	0.41
	08/03/93	0.01	0.01	0.41
	11/02/93	0.02	0.02	0.43
	02/01/94	0.00	0.01	0.44
	05/04/94	0.00	0.00	0.44
	08/18/94	0.00	0.00	0.44
	02/22/95	0.00	0.00	0.44
	05/02/95	0.00	0.00	0.44
T-3	08/03/93	0.03	0.02	0.02
	11/02/93	0.02	0.01	0.03
	02/01/94	0.03	0.01	0.04
	05/04/94	0.00	0.00	0.04
	08/18/94	0.00	0.00	0.04
	02/22/95	0.00	0.00	0.04
	05/02/95	0.00	0.00	0.04
			Total Mass of Hydrocarbons Removed:	0.55

ATTACHMENT A

GROUND WATER MONITORING REPORT AND ANALYTIC REPORT

May 23, 1995

Shell Oil Company
P.O. Box 4023
Concord, CA 94524

Attn: Daniel T. Kirk

SITE:
Shell WIC #204-5510-0303
5755 Broadway
Oakland, California

QUARTER:
2nd quarter of 1995

QUARTERLY GROUNDWATER SAMPLING REPORT 950502-K-1

This report contains data collected during routine inspection, gauging and sampling of groundwater monitoring wells performed by Blaine Tech Services, Inc. in response to the request of the consultant who is overseeing work at this site on behalf of our mutual client, Shell Oil Company. Data collected in the course of our field work is presented in a TABLE OF WELL GAUGING DATA. The field information was collected during our preliminary gauging and inspection of the wells, the subsequent evacuation of each well prior to sampling, and at the time of sampling.

Measurements taken include the total depth of the well and the depth to water. The surface of water was further inspected for the presence of immiscibles which may be present as a thin film (a sheen on the surface of the water) or as a measurable free product zone (FPZ). At intervals during the evacuation phase, the purge water was monitored with instruments that measure electrical conductivity (EC), potential hydrogen (pH), temperature (degrees Fahrenheit), and turbidity (NTU). In the interest of simplicity, fundamental information is tabulated here, while the bulk of the information is turned over directly to the consultant who is making professional interpretations and evaluations of the conditions at the site.

STANDARD PROCEDURES

Evacuation

Groundwater wells are thoroughly purged before sampling to insure that the sample is collected from water that has been newly drawn into the well from the surrounding geologic formation. The selection of equipment to evacuate each well is based on the physical characteristics of the well and what is known about the performance of the formation in which the well has been installed. There are several suitable devices which can be used for evacuation. The most commonly employed devices are air or gas actuated pumps, electric submersible pumps, and hand or mechanically actuated bailers. Our personnel frequently employ USGS/Middleburg positive displacement pumps or similar air actuated pumps which do not agitate the water standing in the well.

Normal evacuation removes three case volumes of water from the well. More than three case volumes of water are in cases where more evacuation is needed to achieve stabilization of water parameters when requested by the local implementing agency. Less water may be removed in cases where the well dewateres and does not recharge to 80% of its original volume within two hours and any additional time our personnel have reason to remain at the site. In such cases, our personnel return to the site within twenty four hours and collect sample material from the water which has recharged into the well case.

Decontamination

All apparatus is brought to the site in clean and serviceable condition. The equipment is decontaminated after each use and before leaving the site. Effluent water from purging and on-site cleaning is collected and transported to Shell's Martinez Manufacturing Complex in Martinez, California.

Free Product Skimmer

The column headed, VOLUME OF IMMISCIBLES REMOVED (ml) is included in the TABLE OF WELL GAUGING DATA to cover situations where a free product skimming device must be removed from the well prior to gauging. Skimmers are installed in wells with a free product zone on the surface of the water. The skimmer is a free product recovery device which often prevents normal well gauging and free product zone measurements. The 2.0" and 3.0" PetroTraps fall into the category of devices that obstruct normal gauging. In cases where the consultant elects to have our personnel pull the skimmers out of the well and gauge the well, our personnel perform the additional task of draining the accumulated free product out of the PetroTrap before putting it back in the well. This

recovered free product is measured and logged in the *VOLUME OF IMMISCIBLES REMOVED* column. Gauging at such sites is performed in accordance with specific directions from the professional consulting firm overseeing work at the site on Shell's behalf.

Sample Containers

Sample material is collected in specially prepared containers which are provided by the laboratory that performs the analyses.

Sampling

Sample material is collected in stainless steel bailer type devices normally fitted with both a top and a bottom check valve. Water is promptly decanted into new sample containers in a manner which reduces the loss of volatile constituents and follows the applicable EPA standard for handling volatile organic and semi-volatile compounds.

Following collection, samples are promptly placed in an ice chest containing prefrozen blocks of an inert ice substitute such as Blue Ice or Super Ice. The samples are maintained in either an ice chest or a refrigerator until delivered into the custody of the laboratory.

Sample Designations

All sample containers are identified with a site designation and a discrete sample identification number specific to that particular groundwater well. Additional standard notations (e.g. time, date, sampler) are also made on the label.

Chain of Custody

Samples are continuously maintained in an appropriate cooled container while in our custody and until delivered to the laboratory under a standard Shell Oil Company chain of custody. If the samples are taken charge of by a different party (such as another person from our office, a courier, etc.) prior to being delivered to the laboratory, appropriate release and acceptance records are made on the chain of custody (time, date, and signature of the person releasing the samples followed by the time, date and signature of the person accepting custody of the samples).

Hazardous Materials Testing Laboratory

The samples obtained at this site were delivered to National Environmental Testing, Inc. in Santa Rosa, California. NET is a California Department of Health Services certified Hazardous Materials Testing Laboratory and is listed as DOHS HMTL #1386.

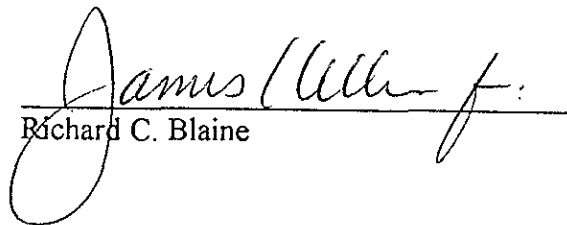
Objective Information Collection

Blaine Tech Services, Inc. performs specialized environmental sampling and documentation as an independent third party. In order to avoid compromising the objectivity necessary for the proper and disinterested performance of this work, Blaine Tech Services, Inc. performs no consulting and does not become involved in the marketing or installation of remedial systems of any kind. Blaine Tech Services, Inc. is concerned only with the generation of objective information, not with the use of that information to support evaluations and recommendations concerning the environmental condition of the site. Even the straightforward interpretation of objective analytical data is better performed by interested regulatory agencies, and those engineers and geologists who are engaged in the work of providing professional opinions about the site and proposals to perform additional investigation or design remedial systems.

Reportage

Submission of this report and the attached laboratory report to interested regulatory agencies is handled by the consultant in charge of the project. Any professional evaluations or recommendations will be made by the consultant under separate cover.

Please call if we can be of any further assistance.


Richard C. Blaine

RCB/lp

attachments: table of well gauging data
chain of custody
certified analytical report

cc: Weiss Associates
5500 Shellmound Street
Emeryville, CA 94608-2411
ATTN: Grady Glasser

TABLE OF WELL GAUGING DATA

WELL I.D.	DATA COLLECTION DATE	MEASUREMENT REFERENCED TO	QUALITATIVE OBSERVATIONS (sheen)	DEPTH TO FIRST IMMISCIBLES LIQUID (FPZ) (feet)	THICKNESS OF IMMISCIBLES LIQUID ZONE (feet)	VOLUME OF IMMISCIBLES REMOVED (ml)	DEPTH TO WATER (feet)	DEPTH TO WELL BOTTOM (feet)
S-1	5/2/95	TOC	ODOR	NONE	--	--	2.58	11.51
S-2 *	5/2/95	TOC	ODOR	NONE	--	--	2.86	9.43
S-3	5/2/95	TOC	--	NONE	--	--	2.83	9.54
T-1	5/2/95	TOC	--	NONE	--	--	2.19	13.26
T-2	5/2/95	TOC	--	NONE	--	--	1.30	12.98
T-3	5/2/95	TOC	--	NONE	--	--	0.99	9.49

* Sample DUP was a duplicate sample taken from well S-2.



SHELL OIL COMPANY
RETAIL ENVIRONMENTAL ENGINEERING - WEST

CHAIN OF CUSTODY RECORD

Serial No: 950502-1C1

Date: 5/2/95

Page 1 of 1

Site Address:

5755 Broadway, Oakland

WIC#:

204-5510-0303

Shell Engineer:

Dan Kirk

Phone No.: (510)

675-6168

Fax #: 675-6160

Consultant Name & Address:

Blaine Tech Services, Inc.

985 Timothy Drive San Jose, CA 95133

Consultant Contact:

Jim Keller

Phone No.: (408)

995-5535

Fax #: 293-8773

Comments:

Sampled by: KCB

Printed Name: Keith Brown

Analysis Required

LAB: Net

CHECK ONE (1) BOX ONLY

CT/DI

TURN AROUND TIME

Quarterly Monitoring

6441

24 hours

Site Investigation

6441

48 hours

Soil Classify/Disposal

6442

16 days (Normal)

Water

Classify/Disposal

6443

Other

Soil/Air Rem. or Sys. O & M

6462

Water Rem. or Sys. O & M

6463

NOTE: Notify Lab as soon as possible of 24/48 hrs. TAT.

Other

MATERIAL DESCRIPTION

SAMPLE CONDITION/ COMMENTS

Sample ID	Date	Sludge	Soil	Water	Air	No. of conls.	TPH (EPA 8015 Mod. Gas)	TPH (EPA 8015 Mod. Diesel)	BTEX (EPA 8020/602)	Volatile Organics (EPA 8240)	Test for Disposal	Combination TPH 8015 & BTEX 8020	Asbestos	Container Size	Preparation Used	Composite Y/N	
S-1	5/2			X		3						X					
S-2	↓			↓		↓						X					
S-3	↓			↓		↓						X					
DUP	↓			↓		↓						X					
EB	↓			↓		↓						X					
TD	↓			↓		2						X					

5/3/95
Net
Real subject

Relinquished By (signature):

Printed Name:

Date: 5/3

Time: 11:00

Received (signature):

Printed Name:

Date: 5/3

Relinquished By (signature):

Printed Name:

Date: 5/3

Time: 16:00

Received (signature):

Printed Name:

Date: 5-4-95

Relinquished By (signature):

Printed Name:

Date:

Time:

Received (signature):

Printed Name:

Date: 08:00

Time:

THE LABORATORY MUST PROVIDE A COPY OF THIS CHAIN-OF-CUSTODY WITH INVOICE AND RESULTS

VIA: NCS

Shell Oil Co. of California



NATIONAL
ENVIRONMENTAL
TESTING, INC.

Santa Rosa Division
3636 North Laughlin Road
Suite 110
Santa Rosa, CA 95403-8226
Tel: (707) 526-7200
Fax: (707) 541-2333

Jim Keller
Blaine Tech Services
985 Timothy Dr.
San Jose, CA 95133

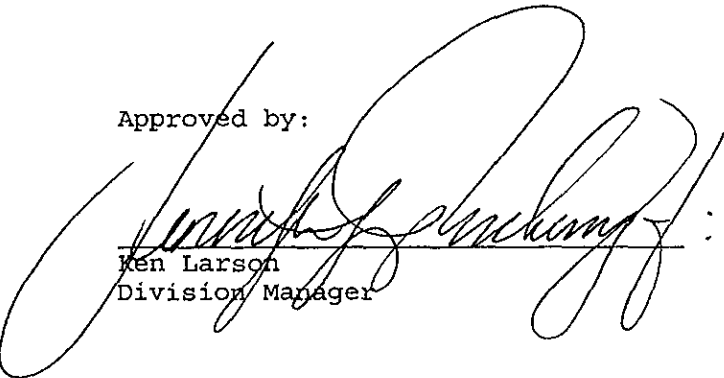
Date: 05/15/1995
NET Client Acct. No: 1821
NET Pacific Job No: 95.01786
Received: 05/04/1995

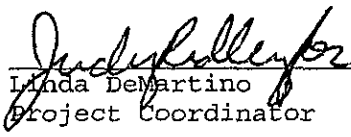
Client Reference Information

Shell 5755 Broadway, Oakland, CA/950502-K1

Sample analysis in support of the project referenced above has been completed and results are presented on following pages. Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety. Please refer to the enclosed "Key to Abbreviations" for definition of terms. Should you have questions regarding procedures or results, please feel welcome to contact Client Services.

Approved by:


Ken Larson
Division Manager


Linda DeMartino
Project Coordinator

Enclosure (s)





Client Name: Elaine Tech Services
 Client Acct: 1821
 NET Job No: 95.01786

Date: 05/15/1995
 ELAP Cert: 1386
 Page: 2

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

SAMPLE DESCRIPTION: S-1
 Date Taken: 05/02/1995
 Time Taken:
 NET Sample No: 241109

Parameter	Results	Flags	Reporting Limit	Units	Method	Date Extracted	Date Analyzed	Run Batch No.
METHOD 5030/8015-M (Shell)								
DILUTION FACTOR*	1						05/06/1995	2820
Purgeable TPH	ND		50	ug/L	5030/M8015		05/06/1995	2820
Carbon Range: C6 to C12	--						05/06/1995	2820
METHOD 8020 (GC, Liquid)	--						05/06/1995	2820
Benzene	ND		0.5	ug/L	8020		05/06/1995	2820
Toluene	ND		0.5	ug/L	8020		05/06/1995	2820
Ethylbenzene	ND		0.5	ug/L	8020		05/06/1995	2820
Xylenes (Total)	ND		0.5	ug/L	8020		05/06/1995	2820
SURROGATE RESULTS	--						05/06/1995	2820
Bromofluorobenzene (SURR)	74			% Rec.	8020		05/06/1995	2820

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
Client Acct: 1821
NET Job No: 95.01786

Date: 05/15/1995
ELAP Cert: 1386
Page: 3

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

SAMPLE DESCRIPTION: S-2

Date Taken: 05/02/1995

Time Taken:

NET Sample No: 241110

Parameter	Results	Flags	Reporting Limit	Units	Method	Date Extracted	Date Analyzed	Run Batch No.
METHOD 5030/8015-M (Shell)								
DILUTION FACTOR*	10						05/06/1995	2820
Purgeable TPH	4,400		500	ug/L	5030/M8015		05/06/1995	2820
Carbon Range: C6 to C12	--						05/06/1995	2820
METHOD 8020 (GC, Liquid)	--						05/06/1995	2820
Benzene	1,000	FF	5	ug/L	8020		05/08/1995	2817
Toluene	25		5	ug/L	8020		05/06/1995	2825
Ethylbenzene	38		5	ug/L	8020		05/06/1995	2820
Xylenes (Total)	77		5	ug/L	8020		05/06/1995	2820
SURROGATE RESULTS	--						05/06/1995	2820
Bromofluorobenzene (SURR)	71			% Rec.	8020		05/06/1995	2820

FF : Compound quantitated at a 100X dilution factor.

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
Client Acct: 1821
© NET Job No: 95.01786

Date: 05/15/1995
ELAP Cert: 1386
Page: 4

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

SAMPLE DESCRIPTION: S-3

Date Taken: 05/02/1995

Time Taken:

NET Sample No: 241111

Parameter	Results	Flags	Reporting Limit	Units	Method	Date Extracted	Date Analyzed	Run Batch No.
METHOD 5030/8015-M (Shell)								
DILUTION FACTOR*	1						05/06/1995	2820
Purgeable TPH	ND		50	ug/L	5030/M8015		05/06/1995	2820
Carbon Range: C6 to C12	--						05/06/1995	2820
METHOD 8020 (GC, Liquid)							05/06/1995	2820
Benzene	ND		0.5	ug/L	8020		05/06/1995	2820
Toluene	ND		0.5	ug/L	8020		05/06/1995	2820
Ethylbenzene	ND		0.5	ug/L	8020		05/06/1995	2820
Xylenes (Total)	ND		0.5	ug/L	8020		05/06/1995	2820
SURROGATE RESULTS	--						05/06/1995	2820
Bromofluorobenzene (SURR)	75			% Rec.	8020		05/06/1995	2820

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
Client Acct: 1821
NET Job No: 95.01786

Date: 05/15/1995
ELAP Cert: 1386
Page: 5

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

SAMPLE DESCRIPTION: DUP

Date Taken: 05/02/1995

Time Taken:

NET Sample No: 241112

Parameter	Results	Flags	Reporting Limit	Units	Method	Date Extracted	Date Analyzed	Run Batch No.
METHOD 5030/8015-M (Shell)								
DILUTION FACTOR*	10						05/06/1995	2820
Purgeable TPH	4,400		500	ug/L	5030/M8015		05/06/1995	2820
Carbon Range: C6 to C12	--						05/06/1995	2820
METHOD 8020 (GC, Liquid)	--						05/06/1995	2820
Benzene	1,000	FF	5	ug/L	8020		05/08/1995	2817
Toluene	26		5	ug/L	8020		05/06/1995	2820
Ethylbenzene	41		5	ug/L	8020		05/06/1995	2820
Xylenes (Total)	83		5	ug/L	8020		05/06/1995	2820
SURROGATE RESULTS	--						05/06/1995	2820
Bromofluorobenzene (SURR)	71			† Rec.	8020		05/06/1995	2820

FF : Compound quantitated at a 100X dilution factor.

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
 Client Acct: 1821
 NET Job No: 95.01786

Date: 05/15/1995
 ELAP Cert: 1386
 Page: 6

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

SAMPLE DESCRIPTION: EB
 Date Taken: 05/02/1995
 Time Taken:
 NET Sample No: 241113

Parameter	Results	Flags	Reporting Limit	Units	Method	Date Extracted	Date Analyzed	Run Batch No.
METHOD 5030/8015-M (Shell)								
DILUTION FACTOR*	1						05/06/1995	2820
Purgeable TPH	ND		50	ug/L	5030/M8015		05/06/1995	2820
Carbon Range: C6 to C12	--						05/06/1995	2820
METHOD 8020 (GC, Liquid)								
Benzene	ND		0.5	ug/L	8020		05/06/1995	2820
Toluene	ND		0.5	ug/L	8020		05/06/1995	2820
Ethylbenzene	ND		0.5	ug/L	8020		05/06/1995	2820
Xylenes (Total)	ND		0.5	ug/L	8020		05/06/1995	2820
SURROGATE RESULTS								
Bromofluorobenzene (SURRE)	80			% Rec.	8020		05/06/1995	2820

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
 Client Acct: 1821
 NET Job No: 95.01786

Date: 05/15/1995
 ELAP Cert: 1386
 Page: 7

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

SAMPLE DESCRIPTION: TB

Date Taken: 05/02/1995

Time Taken:

NET Sample No: 241114

Parameter	Results	Flags	Reporting		Method	Date	Date	Run
			Limit	Units		Extracted	Analyzed	Batch
METHOD 5030/8015-M (Shell)								
DILUTION FACTOR*	1						05/08/1995	2817
Purgeable TPH	ND		50	ug/L	5030/M8015		05/08/1995	2817
Carbon Range: C6 to C12	--						05/08/1995	2817
METHOD 8020 (GC, Liquid)	--						05/08/1995	2817
Benzene	ND		0.5	ug/L	8020		05/08/1995	2817
Toluene	ND		0.5	ug/L	8020		05/08/1995	2817
Ethylbenzene	ND		0.5	ug/L	8020		05/08/1995	2817
Xylenes (Total)	ND		0.5	ug/L	8020		05/08/1995	2817
SURROGATE RESULTS	--						05/08/1995	2817
Bromofluorobenzene (SURR)	76			% Rec.	8020		05/08/1995	2817

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
Client Acct: 1821
NET Job No: 95.01786

Date: 05/15/1995
ELAP Cert: 1386
Page: 8

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

CONTINUING CALIBRATION VERIFICATION STANDARD REPORT

Parameter	CCV	CCV	CCV	Units	Date Analyzed	Analyst Initials	Run Batch Number
	Standard % Recovery	Standard Amount Found	Standard Amount Expected				
METHOD 5030/8015-M (Shell)							
Purgeable TPH	95.8	0.479	0.50	mg/L	05/08/1995	pbg	2817
Benzene	96.0	4.80	5.00	ug/L	05/08/1995	pbg	2817
Toluene	91.2	4.56	5.00	ug/L	05/08/1995	pbg	2817
Ethylbenzene	95.8	4.79	5.00	ug/L	05/08/1995	pbg	2817
Xylenes (Total)	87.3	13.09	15.0	ug/L	05/08/1995	pbg	2817
Bromofluorobenzene (SURR)	83.7	83.7	100	% Rec.	05/08/1995	pbg	2817
METHOD 5030/8015-M (Shell)							
Purgeable TPH	94.0	0.47	0.50	mg/L	05/06/1995	aal	2820
Benzene	100.0	5.00	5.00	ug/L	05/06/1995	aal	2820
Toluene	94.0	4.70	5.00	ug/L	05/06/1995	aal	2820
Ethylbenzene	100.0	5.00	5.00	ug/L	05/06/1995	aal	2820
Xylenes (Total)	94.7	14.2	15.0	ug/L	05/06/1995	aal	2820
Bromofluorobenzene (SURR)	78.0	78	100	% Rec.	05/06/1995	aal	2820
METHOD 5030/8015-M (Shell)							
Purgeable TPH	95.4	0.477	0.50	mg/L	05/10/1995	lss	2825
Benzene	95.0	4.75	5.00	ug/L	05/10/1995	lss	2825
Toluene	87.2	4.36	5.00	ug/L	05/10/1995	lss	2825
Ethylbenzene	94.8	4.74	5.00	ug/L	05/10/1995	lss	2825
Xylenes (Total)	87.3	13.1	15.0	ug/L	05/10/1995	lss	2825
Bromofluorobenzene (SURR)	78.0	78	100	% Rec.	05/10/1995	lss	2825

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
Client Acct: 1821
NET Job No: 95.01786

Date: 05/15/1995
ELAP Cert: 1386
Page: 9

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

METHOD BLANK REPORT

Parameter	Method			Date Analyzed	Analyst Initials	Run Batch Number
	Blank Amount Found	Reporting Limit	Units			
METHOD 5030/8015-M (Shell)						
Purgeable TPH	ND	0.05	mg/L	05/08/1995	pbg	2817
Benzene	ND	0.5	ug/L	05/08/1995	pbg	2817
Toluene	ND	0.5	ug/L	05/08/1995	pbg	2817
Ethylbenzene	ND	0.5	ug/L	05/08/1995	pbg	2817
Xylenes (Total)	ND	0.5	ug/L	05/08/1995	pbg	2817
Bromofluorobenzene (SURR)	78		% Rec.	05/08/1995	pbg	2817
METHOD 5030/8015-M (Shell)						
Purgeable TPH	ND	0.05	mg/L	05/06/1995	aal	2820
Benzene	ND	0.5	ug/L	05/06/1995	aal	2820
Toluene	ND	0.5	ug/L	05/06/1995	aal	2820
Ethylbenzene	ND	0.5	ug/L	05/06/1995	aal	2820
Xylenes (Total)	ND	0.5	ug/L	05/06/1995	aal	2820
Bromofluorobenzene (SURR)	71		% Rec.	05/06/1995	aal	2820
METHOD 5030/8015-M (Shell)						
Purgeable TPH	ND	0.05	mg/L	05/10/1995	lss	2825
Benzene	ND	0.5	ug/L	05/10/1995	lss	2825
Toluene	ND	0.5	ug/L	05/10/1995	lss	2825
Ethylbenzene	ND	0.5	ug/L	05/10/1995	lss	2825
Xylenes (Total)	ND	0.5	ug/L	05/10/1995	lss	2825
Bromofluorobenzene (SURR)	77		% Rec.	05/10/1995	lss	2825

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Name: Blaine Tech Services
 Client Acct: 1821
 NET Job No: 95.01786

Date: 05/15/1995
 ELAP Cert: 1386
 Page: 10

Ref: Shell 5755 Broadway, Oakland, CA/950502-K1

MATRIX SPIKE / MATRIX SPIKE DUPLICATE

Parameter	Matrix Spike		RPD	Spike Amount	Sample Conc.	Matrix Spike		Units	Date Analyzed	Run Batch	Sample Spiked
	% Rec.	% Rec.				Conc.	Conc.				
METHOD 5030/8015-M (Shell)											241248
Purgeable TPH	91.8	95.0	3.4	0.50	ND	0.459	0.475	mg/L	05/08/1995	2817	241248
Benzene	92.0	93.6	1.7	7.77	ND	7.15	7.27	ug/L	05/08/1995	2817	241248
Toluene	95.2	99.3	4.2	27.2	ND	25.9	27.0	ug/L	05/08/1995	2817	241248
METHOD 5030/8015-M (Shell)											241103
Purgeable TPH	102.0	96.0	6.0	0.50	ND	0.51	0.48	mg/L	05/06/1995	2820	241103
Benzene	98.7	96.1	2.7	7.7	ND	7.6	7.3	ug/L	05/06/1995	2820	241103
Toluene	103.5	99.6	3.7	25.8	ND	26.7	25.7	ug/L	05/06/1995	2820	241103

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



KEY TO ABBREVIATIONS and METHOD REFERENCES

- < : Less than; When appearing in results column indicates analyte not detected at the value following. This datum supercedes the listed Reporting Limit.
- * : Reporting Limits are a function of the dilution factor for any given sample. To obtain the actual reporting limits for this sample, multiply the stated Reporting Limits by the dilution factor (but do not multiply reported values).
- ICVS : Initial Calibration Verification Standard (External Standard).
- mean : Average; sum of measurements divided by number of measurements.
- mg/Kg (ppm) : Concentration in units of milligrams of analyte per kilogram of sample, wet-weight basis (parts per million).
- mg/L : Concentration in units of milligrams of analyte per liter of sample.
- mL/L/hr : Milliliters per liter per hour.
- MPN/100 mL : Most probable number of bacteria per one hundred milliliters of sample.
- N/A : Not applicable.
- NA : Not analyzed.
- ND : Not detected; the analyte concentration is less than applicable listed reporting limit.
- NTU : Nephelometric turbidity units.
- RPD : Relative percent difference, $100 \text{ [Value 1 - Value 2]}/\text{mean value}$.
- SNA : Standard not available.
- ug/Kg (ppb) : Concentration in units of micrograms of analyte per kilogram of sample, wet-weight basis (parts per billion).
- ug/L : Concentration in units of micrograms of analyte per liter of sample.
- umhos/cm : Micromhos per centimeter.

Method References

Methods 100 through 493: see "Methods for Chemical Analysis of Water & Wastes", U.S. EPA, 600/4-79-020, rev. 1983.

Methods 601 through 625: see "Guidelines Establishing Test Procedures for the Analysis of Pollutants" U.S. EPA, 40 CFR, Part 136, rev. 1988.

Methods 1000 through 9999: see "Test Methods for Evaluating Solid Waste", U.S. EPA SW-846, 3rd edition, 1986.

SM: see "Standard Methods for the Examination of Water & Wastewater, 17th Edition, APHA, 1989.

COOLER RECEIPT FORM

Project: 950502-K1 Log No: 10017
Cooler received on: 5-4-95 and checked on 5-4-95 by [Signature]
(signature)

- Were custody papers present?.....YES NO
- Were custody papers properly filled out?.....YES NO
- Were the custody papers signed?.....YES NO
- Was sufficient ice used?.....YES NO *TEMP.: 0.50c*
- Did all bottles arrive in good condition (unbroken)?.....YES NO
- Did bottle labels match COC?.....YES NO
- Were proper bottles used for analysis indicated?.....YES NO
- Correct preservatives used?.....YES NO
- VOA vials checked for headspace bubbles?.....YES NO

Note which voas (if any) had bubbles:*

Sample descriptor:

Number of vials:

53

1

*All VOAs with headspace bubbles have been set aside so they will not be used for analysis.....YES NO

List here all other jobs received in the same cooler:

Client Job #

NET log #

(coolerrec)