Mr. Keith Nowell Alameda County Environmental Health Department of Environmental Health 1131 Harbor Bay Parkway, 2nd Floor Alameda, CA 94502-6577

Re: Former Exxon Station 5175 Broadway Oakland, California ACEH File No. 139 SFRWQCB Site No. 01-0958 UST Fund Claim No. 3406

RECEIVED

11:24 am, Oct 04, 2012

Alameda County Environmental Health

Dear Mr. Nowell:

I, Mr. Ernie Nadel, have retained Pangea Environmental Services, Inc. (Pangea) as the environmental consultant for the project referenced above. Pangea is submitting the attached report on my behalf.

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached report are true and correct to the best of my knowledge.

Sincerely,

Ernie Nadel Rockridge Heights, LLC



September 28, 2012

VIA ALAMEDA COUNTY FTP SITE

Mr. Keith Nowell Alameda County Environmental Health 1131 Harbor Bay Parkway, Suite 250 Alameda, CA 94502-6577

Re: **Post Remediation Soil Gas Sampling Report** Former Exxon Station 5175 Broadway Street Oakland, California ACEH Fuel Leak Case No. RO0000139

Dear Mr. Nowell:

On behalf of Rockridge Heights, LLC, Pangea Environmental Services, Inc. has prepared this *Post Remediation Soil Gas Sampling Report* for the subject site. This report describes onsite soil gas and subslab gas sampling, and offsite subslab gas sampling performed in response to ACEH correspondence, including ACEH letter dated September 21, 2012.

If you have any questions or comments, please call me at (510) 435-8664 or email briddell@pangeaenv.com.

Sincerely, Pangea Environmental Services, Inc.

Bober Leffell

Bob Clark-Riddell, P.E. Principal Engineer

Attachment: Post Remediation Soil Gas Sampling Report

cc: Rockridge Heights, LLC, C/O Ernie Nadel, 6100 Pinewood Road, Oakland, California 94611 Vera Stanovich, 1956 Stratton Circle, Walnut Creek, California 94598 SWRCB Geotracker (Electronic copy)

PANGEA Environmental Services, Inc.



POST REMEDIATION SOIL GAS SAMPLING REPORT

Former Exxon Station 5175 Broadway Oakland, California

September 28, 2012

Prepared for:

Rockridge Heights, LLC C/O Ernie Nadel 6100 Pinewood Road Oakland, California 94611

Prepared by:

Pangea Environmental Services, Inc. 1710 Franklin Street, Suite 200 Oakland, California 94612

Written by:



Bob Clark-Riddell, P.E. Principal Engineer

Morgan Gillies

Project Scientist

PANGEA Environmental Services, Inc.

1710 Franklin Street, Suite 200, Oakland, CA 94612 Telephone 510.836.3700 Facsimile 510.836.3709 www.pangeaenv.com

Post Remediation Soil Gas Sampling Report 5175 Broadway Oakland, California September 28, 2012

INTRODUCTION

On behalf of Rockridge Heights, LLC, Pangea Environmental Services, Inc. (Pangea) prepared this *Post Remediation Soil Gas Sampling Report* (report) for the subject site. The work was recommended in Pangea's *Revised Soil Gas Sampling Workplan* (workplan) dated July 16, 2012 and Pangea's *Revised Soil Gas Sampling Workplan* (addendum) dated August 6, 2012. The soil gas and subslab gas sampling was performed in response to ACEH correspondence, including ACEH letter dated September 21, 2012. The site background, soil/subslab gas sampling, and our conclusions and recommendations are described below.

SITE BACKGROUND

Site Location and Description

The subject property is located at 5175 Broadway Street, at the southwest corner of the intersection of Broadway and Coronado Avenue in Oakland, California in Alameda County (Figure 1). The site is approximately 0.6 miles south-southeast of Highway 24 and approximately 2.3 miles east of Interstate 80 and the San Francisco Bay. The property is relatively flat lying, with a slight slope to the south-southwest, and lies at an elevation of approximately 160 feet above mean sea level. Topographic relief in the area surrounding the site also slopes generally towards the south-southwest. The western site boundary is the top of an approximately 10 foot high retaining wall that separates the site from an adjacent apartment complex.

The property has been vacant since 1979 and was formerly occupied by an Exxon Service Station used for fuel sales and automobile repair. The site is approximately 13,200 square feet in area with about 10% of the area occupied by a vacant station/garage structure. The majority of the ground surface is paved with concrete and/or asphalt. Land use to the west and northwest is residential, including apartment buildings and single family homes. Properties to the northeast, east and south of the site are commercial. The site and adjacent properties are shown on Figure 2.

Summary of Previous Environmental Investigations

Environmental compliance work commenced when the site USTs were removed in January 1990. Three 8,000gallon steel single-walled USTs, associated piping, and a 500-gallon steel single-walled waste oil tank were removed. Tank Project Engineering, Inc. (TPE) conducted the tank removal and observed holes in all four tanks. Approximately 700 tons of contaminated soil was excavated during tank removal and was subsequently remediated and reused for onsite backfill by TPE. In April 1990, TPE installed and sampled monitoring wells MW-1, MW-2 and MW-3. In June 1991, Soil Tech Engineering (STE), subsequently renamed Environmental Soil Tech Consultants (ESTC), installed monitoring wells STMW-4 and STMW-5. Groundwater monitoring was conducted on the site intermittently until October 2002. Golden Gate Tank Removal (GGTR) performed additional assessment in January and February 2006. In June 2006, the property was purchased by Rockridge Heights, LLC. Pangea commenced quarterly groundwater monitoring at the site in July 2006. MTBE is not considered to be a contaminant of concern because use of the site for fuel sales predates widespread use of MTBE in gasoline and because analytical results have not shown significant detections of MTBE.

In January and March 2007, Pangea installed twelve wells (MW-2C, MW-3A, MW-3C, MW-4A, MW-5A, MW-5B, MW-5C, MW-6A, MW-7B, MW-7C, MW-8A and MW-8C) and three offsite soil borings to help define the vertical and lateral extent of groundwater contamination. Pangea also abandoned four monitoring wells (MW-2, MW-3, STMW-4 and STMW-5) to reduce the risk of vertical contaminant migration and improve the quality of monitoring data. New wells installed at the site were categorized according to the depths of their screen intervals. Shallow (A-zone) wells have screen intervals of approximately 10 to 15 feet bgs, which generally straddle the top of the water table and are generally screened in surficial fill and alluvium. Intermediate-depth (B-zone) wells are screened at approximately 15 to 20 feet bgs, either in surficial strata or underlying fractured bedrock, while deep (C-zone) wells are generally screened at approximately 20 to 25 feet bgs and into fractured bedrock. Well MW-1 is screened across both the A-zone and B-zone.

In April 2007, Pangea performed a dual-phase extraction (DPE) pilot test to evaluate whether DPE is an appropriate remedial technology to remove residual hydrocarbons from beneath the site. In July 2007, Pangea submitted an Interim Remedial Action Plan for site corrective action.

In August 2007, Pangea installed three offsite monitoring wells (MW-9A, MW-9C and MW-10A) and conducted subslab vapor sampling in the commercial building located immediately south of the site. The purpose of the offsite well installation was to determine the downgradient extent of contaminant migration, and to help evaluate downgradient effects of any future onsite remediation. The purpose of the subslab vapor sampling was to determine whether vapor migrating from underlying groundwater had impacted soil vapor. Soil gas sampling was also conducted near the southern and western edge of the property. Soil gas sampling and offsite monitoring well installation is described in Pangea's *Soil Gas Sampling and Well Installation Report* dated October 23, 2007. Further subslab/soil gas sampling was conducted at the two adjacent properties in June 2008 and reported in Pangea's *Additional Soil Gas Sampling Report* dated July 14, 2008.

In a June 2009 letter, ACEH approved insitu site remediation using dual-phase extraction (DPE) and air sparging (AS) techniques. Operation of the DPE system began on December 8, 2010 and operation of the AS system began on March 16, 2011. The DPE/AS system has been very effective for site remediation. The DPE/AS system was shutdown for rebound testing and post-remediation monitoring on January 31, 2012.

Post-remediation soil gas sampling was proposed in Pangea's *Revised Soil Gas Sampling Workplan* dated July 16, 2012 and *Addendum* dated August 6, 2012. As required, the Revised Workplan included an evaluation of potential vapor migration pathways between 5175 Broadway and the adjacent residential building at 5230 Coronado Avenue. Results of the soil gas sampling are summarized below.

SOIL/SUBSLAB GAS SAMPLING

Overview and Sampling Protocol

To evaluate shallow subsurface gas conditions beneath the site and beneath offsite buildings, Pangea conducted subslab gas and soil gas sampling from seven subslab gas probes (SS-1 through SS-7) and four shallow soil gas wells (SG-8 through SG-11) between September 6 and September 12, 2012. The probe locations are shown on Figure 2. Sample depth intervals and soil gas analytical results are summarized on Table 1. The sampling procedures are described below. Subslab gas and soil gas sampling was conducted in general accordance with procedures described in the following documents:

- Pangea's Standard Operating Procedures (SOPs) for Subslab and Soil Gas Sampling (Appendix A),
- FINAL Guidance for the Evaluation and Mitigation of Subsurface Vapor Intrusion to Indoor Air (Vapor Intrusion Guidance) prepared by California Environmental Protection Agency, Department of Toxic Substance Control (Cal/EPA) dated October 2011, and
- Advisory-Active Soil Gas Investigations prepared by Cal/EPA, LARWQCB, and San Francisco RWQCB dated April 2012.

Deviations from these procedures are described in the following subsections.

Pangea retained Vapor Tech Services (VTS) of Berkeley, California to install all *onsite* soil gas wells and two of the seven subslab probes (the two onsite probes). VTS specializes in soil gas sampling in the San Francisco Bay Area, performing sampling for a range of customers from individual property owners to major oil companies. Prior to the start of sampling activities, access agreements were obtained from the owners of the offsite private properties to allow site assessment activity, and a site safety plan (SSP) was prepared to protect site workers. Fieldwork was performed by VTS, Pangea project manager Morgan Gillies, and staff scientist Tina de la Fuente under the supervision of Bob Clark-Riddell, a California Registered Professional Civil Engineer.

Subslab Gas Probe Installation

On July 17, 2012, Pangea project manager Morgan Gillies installed subslab probes SS-3 through SS-5 at the adjacent *offsite* residential location of 5230 Coronado Avenue. Subslab probe SS-3 was installed in the ground floor laundry room at 5230 Coronado (to evaluate potential hydrocarbon along identified subsurface conduits), and SS-4 and SS-5 were installed in the ground floor crawl space/storage room at 5230 Coronado. On August 31, 2012, VTS installed SS-6 and SS-7 within the existing concrete building slab onsite. Pre-existing subslab gas probe (SS) sampling locations SS-1 and SS-2 are located inside the commercial building at 5151 Broadway, on the northern side of this offsite building near impacted onsite wells MW-7B and MW-7C.

The subslab gas probe installation procedures for SS-3 through SS-5 involved using a rotohammer to drill a 1 ¹/₂-inch diameter hole part way through the approximately 2.5-inch to 3-inch thick concrete slab of the building, drilling a ¹/₂-inch diameter hole through the remaining concrete, installing a rubber stopper with stainless steel tubing (capped on one end with a Swagelok fitting), and placing a bentonite/cement seal from the top of the stopper to the surface. The probes were allowed to equilibrate for two weeks prior to sampling.

Probes SS-6 and SS-7 were installed by VTS using a rotohammer to drill a ¹/₂-inch diameter hole through the 4inch concrete slab onsite and a 1 ¹/₂-inch diameter rotohammer bit was used to widen the top of the hole to facilitate probe sampling. Stainless steel tubing with a screened tip on one end was placed in the hole surrounded by filter pack sand to the bottom of the slab, and bentonite and anchoring cement were added to seal the probe. The probes were allowed to equilibrate for at least one week prior to sampling.

Soil Gas Well Installation

On August 31, 2012, VTS installed onsite soil gas wells SG-8 through SG-11. SG-8 is located in the western central portion of the site, near formerly impacted wells MW-8A/8C. SG-9 is located in the central southern portion of the site, between wells MW-3A and DPE-3. SG-10 is located in the eastern portion of the site, where groundwater concentrations rebounded during the most recent groundwater monitoring of well DPE-2. SG-11 is located in the northeastern corner of the site, near formerly impacted well MW-4A.

The overall soil gas well installation procedure involved jack hammering the asphalt surface and hand augering a 3.25-inch diameter hole to approximately 5 ft depth. A six-inch stainless-steel vapor implant with Teflon tubing was installed and surrounded by filter pack sand to a depth of approximately 4 to 5 ft, with the six-inch vapor implant screening a depth of approximately 4.25 to 4.75 ft. The probes were completed by adding dry bentonite from approximately 3 to 4 ft depth, hydrated bentonite from 3 ft depth to a few inches from the surface, and a concrete seal to the surface. The depth of the soil gas wells is slightly shallower than the 5 foot well depth recommended in the current DTSC *Advisory-Active Soil Gas Investigations* (Cal/EPA 2012). This slight deviation is considered unlikely to significantly affect the representativeness of samples. A traffic-rated well box (six-inch diameter) was then installed over each probe with an approximate 18-inch diameter concrete apron (which likely provides additional surface sealing), and the Teflon tubing was capped with a stainless steel Swagelok fitting.

Subslab Gas and Soil Gas Sample Collection and Analysis

Pangea sampled three offsite subslab gas probes (at 5230 Coronado) on September 6 and sampled the other soil gas probes/wells on September 12, 2012. McCampbell Analytical provided sampling manifolds and certified Summa canisters for purging and sampling. A fresh manifold was used for each sample probe. A schematic diagram of the sampling manifold is shown in Appendix A. The Summa canisters were supplied with an initial vacuum of approximately 30 inches of mercury. Prior to sample collection from each probe, a

shut-in test was conducted on the sampling manifold. All shut-in tests confirmed no leakage of the sampling manifolds.

After each shut-in test, a 6-liter Summa canister was used to purge the manifold/probe assembly. The subslab probes were calculated to have a single purge volume of approximately 30 ml. Each subslab probe was purged of approximately 5 purge volumes (150 ml) prior to collecting a sample in a 1L Summa canister. The soil gas wells were calculated to have a single purge volume of approximately 1,550 ml, which includes a tubing + sampling manifold volume of approximately 100 ml. For large-volume relatively shallow wells such as these there is a concern that overpurging can result in ambient air breakthrough. Therefore, only approximately 530 ml was purged from each well prior to sampling. This is approximately 5.5 tubing volumes but less than the 3 full purge volumes recommended for shallow wells in Cal/EPA 2012. However, sampling was conducted following two weeks of equilibration time for soil gas wells that are subject to frequent sampling. Sampling of these soil gas wells was conducted after two weeks of equilibration and the total purge/sample volume (1,530 ml) of the SG wells represents 1 full purge volume (or about 15 tubing volumes).

A pre-set flow regulator regulated the vapor flow during purging and sampling to approximately 150 milliliters of air per minute. After approximately 5 or more minutes of sample collection, the vacuum within each Summa canister decreased to between 3 and 5 inches of mercury and the canister valve was closed.

To evaluate potential leakage within the sampling system or ambient air breakthrough from the surface, an air tight leak-check enclosure was placed over each sampling point and sampling assembly (Summa canisters and manifold). Isopropyl alcohol was applied to gauze placed inside the leak-check. The enclosure was monitored for isopropyl alcohol concentrations with a photo ionization detector (PID) to ensure that there was a sufficient concentration of isopropyl alcohol(>1 ppmv) in the air inside the enclosure. In addition, a second Summa canister and sampling manifold was used to collect air from within the leak-check enclosure at the same time that the soil gas sample was collected, in order to facilitate comparison to any isopropyl alcohol concentrations that might be detected in the sampling Summa canister. The air flow regulators for the sample and leak check summa canisters were calibrated identically. These leak-check Summa canisters were designated for analysis only if a significant concentration of isopropyl alcohol was detected in the soil gas samples with which they were associated.

After sample collection, SGP locations SG-8 through SG-11 and subslab probes SS-1 through SS-7 were capped and left for future sampling, if merited.

Post Remediation Soil Gas Sampling Report 5175 Broadway Oakland, California September 28, 2012

Soil/Subslab Gas Analytical Results

The Summa canisters containing the soil gas, subslab gas, and leak-check enclosure samples were submitted for analysis to McCampbell Analytical, Inc., of Pittsburg, California, a State-certified laboratory. Soil gas and subslab samples were analyzed by Total Organics Method 15 (TO-15) for total petroleum hydrocarbons as gasoline (TPHg) benzene, toluene, ethylbenzene, xylenes (BTEX), naphthalene, and isopropyl alcohol; and by ASTM D-1946 for total percent oxygen. Soil gas samples SG-8 through SG-11 were collected from approximately 4 to 5 ft bgs, and subslab samples SS-1 through SS-7 were collected from approximately 0.5 - 0.7 ft bgs. Soil gas and subslab analytical results and sample depth intervals are summarized on Table 1 and Figure 2. The laboratory analytical report is included in Appendix B.

The maximum detected soil gas concentrations were 7,200 μ g/m³ TPHg and 18 μ g/m³ benzene, in shallow onsite soil gas probe SG-8 (adjacent well MW-8A). Trace hydrocarbons were detected in two other onsite soil gas probes as follows: 4,000 μ g/m³ TPHg and 8.9 μ g/m³ benzene in SG-11 (adjacent well MW-4A), and 8.9 μ g/m³ benzene in SG-10. No hydrocarbons (including TPHg, benzene, ethylbenzene, and naphthalene) were detected in any of the seven subslab soil gas samples (SS-1 through SS-7) or in onsite shallow soil gas probe SG-9.

Isopropanol was only detected in SG-10 at a concentration of $54 \mu g/m^3$, which is a very low detection for leak check compound and likely represents a negligible amount of the sample.

The percentage of oxygen in soil gas ranged from 17 to 20% for all subslab probes and soil gas probes SG-10 and SG-11. The percentage of oxygen was 4.5% in probe SG-9 and 5.1% oxygen in probe SG-8.

Comparison to RWQCB Environmental Screening Levels

Contaminant concentrations detected in the *soil gas* probes were compared to the shallow soil gas Environmental Screening Levels (ESLs) established by the San Francisco Regional Water Quality Control Board (RWQCB). According to the RWQCB ESL guidance, residential ESLs are protective of land use for residences, hospitals, day care centers and other sensitive uses. As shown on Table 1, the maximum detected soil gas concentrations were 7,200 μ g/m³ TPHg and 18 μ g/m³ benzene (SG-8), while lower hydrocarbons were detected in SG-11 (4,000 μ g/m³ TPHg and 8.9 μ g/m³ benzene) and in SG-10 (8.9 μ g/m³ benzene). <u>All detected concentrations are below residential ESLs established by the RWQCB of 10,000 μ g/m³ TPHg and 84 μ g/m³ benzene.</u>

Post Remediation Soil Gas Sampling Report 5175 Broadway Oakland, California September 28, 2012

Comparison to Vapor Intrusion Criteria of New Low Threat Closure Policy

The SWRCB's Low Threat Closure Policy, adopted in August 2012, describes conditions, including bioattenuation zone, which if met will assure that exposure to petroleum vapors in indoor air will not pose unacceptable health risks. In many petroleum release cases, potential human exposures to vapors are mitigated by bioattenuation processes as vapors migrate toward the ground surface. The policy introduces the term 'bioattenuation zone' that refers to an area of soil with conditions that support biodegradation of petroleum hydrocarbon vapors.

The policy presents four scenarios involving existing or planned buildings to apply low-threat vapor intrusion criteria. Sites shall be considered a low threat for vapor intrusion into indoor air if site-specific conditions satisfy all of the characteristics and criteria of applicable Scenarios 1 through 3 (which do not require direct hydrocarbon soil gas data) or Scenario 4 (which does require direct soil gas data). Note that oxygen data is beneficial for application of Scenarios 3 and 4. In addition, a site shall also be considered a low threat for vapor intrusion into indoor air if (1) a site-specific risk assessment demonstrates that human health is protected to the satisfaction of the regulatory agency, or (2) as a result of controlling exposure through the use of mitigation measures or through the used of institutional or engineering controls, the regulatory agency determines that petroleum vapor migrating from soil or groundwater will have no significant risk of adversely affecting human health.

Scenarios 1 through 4 of the SWRCB's Low Threat Closure Policy pertaining to vapor intrusion into indoor air are included within Appendix C of this report. The characteristics and applicability of each scenario is summarized below in Table A. As shown below, Scenarios 1 and 2 pertain to sites with 'free product', Scenario 3 pertains to sites with benzene dissolved in groundwater, and Scenario 4 addresses sites with actual direct measurement (e.g., laboratory analytical results) of soil gas hydrocarbon concentrations. As shown below on Table A, site data suggests that the subject site satisfies low-threat criteria of each potentially applicable scenario.

Scenario	Characteristics of Bioattenuation Zone	Applicability to Subject Site			
Scenario 1 Free Product in Groundwater	1. 30 ft from building foundation to free product on groundwater.	Not applicable. No free product at site.			
Scenario 2 Free Product in Soil	 2. TPH <100 mg/kg in zone. 30 ft from building foundation to free product in soil. 2. TPH <100 mg/kg in zone. 	Not applicable. No free product at site.			
Scenario 3 Benzene in Groundwater (1 of 2: No Oxygen data or Oxygen <4%)	 1. No oxygen data or oxygen <4%. 2. TPH <100 mg/kg in zone. 3. If benzene in groundwater <100 ug/L, minimum 5 ft clearance from building foundation to groundwater. 4. If benzene in groundwater >100 ug/L but <1,000 ug/L, minimum 10 ft clearance from building foundation to groundwater. 	Not applicable since oxygen data is ≥4%. Even if this Scenario 3 (1 of 2) were deemed applicable, there is approximately 10 ft clearance from surface to groundwater where maximum dissolved benzene has been well below 1,000 ug/L and was only 100 ug/L in Sept 2012. Applicable. Site data satisfies criteria. Oxygen ≥4% per below. Max benzene in water was 100 ug/L in Sept 2012. Water depth in key wells is 9 to 14 ft. TPH impact was <100 mg/kg to <9 ft depth.			
Scenario 3 Benzene in Groundwater (2 of 2: Oxygen >4%)	 Oxygen ≥4%. TPH <100 mg/kg in zone. Benzene in groundwater <1,000 ug/L, minimum 5 ft clearance from building foundation to groundwater. 				
Scenario 4 Direct Measurement of Soil Gas Concentrations (1 of 2: No Bioattenuation Zone)	 No bioattenuation zone. Soil gas sampling from at least 5 ft below surface (future construction) or 5 ft below bottom of building foundation. Soil gas criteria for benzene <85 ug/m³ (residential) or <280 ug/m³ (commercial). Ethylbenzene and naphthalene criteria also, but not TPHg. 	Not applicable: site data suggests bioattenuation zone is present. Even if this Scenario 4 (1 of 2) were deemed applicable, the maximum benzene concentration of 18 ug/m ³ is <i>below</i> the 85 ug/m ³ criteria. Also, no benzene or TPH impact was detected in all subslab gas samples.			
Scenario 4 Direct Measurement of Soil Gas Concentrations (2 of 2: <i>Bioattenuation Zone</i>)	 Soil gas sampling from at least 5 ft below surface (future construction) or 5 ft below bottom of building foundation. TPH <100 mg/kg in zone, measured at two depths. Oxygen ≥4% at lower end of 5 ft zone. Soil gas criteria for benzene <85,000 ug/m³ (residential) or <280,000 ug/m³ (commercial). Ethylbenzene and naphthalene criteria also, but not TPHg. 	Applicable. Direct soil gas data satisfies criteria. Maximum benzene in soil gas of 18 ug/m ³ is several orders of magnitude below 85,000 ug/m ³ . Oxygen is ≥4% for all four soil gas probes screened at 4.25 to 4.75 ft depth, and oxygen is between 17 and 20% for all subslab probes. Also, no benzene or TPH impact was detected in all subslab gas samples. TPH soil impact previously detected slightly above 100 mg/kg at 9 ft and deeper has likely been remediated to below 100 mg/kg.			

Table A – Evaluation of Vapor Intrusion Scenarios in Low Threat Closure Policy

CONCLUSIONS

Based on the results of our post-remediation soil/subslab gas sampling, Pangea offers the following conclusions:

- No petroleum hydrocarbons were detected in *subslab* gas probes from onsite *or* offsite sampling locations for this post-remediation sampling event. The lack of hydrocarbons in these probes suggests that residual impact to soil and groundwater does not pose a threat to human health via vapor intrusion into indoor air for (1) planned future development at the 5175 Broadway property, (2) residents at the adjacent 5230 Coronado Avenue building, or (3) future occupants at adjacent 5151 Broadway.
- Hydrocarbon concentrations in shallow soil gas (about 5 ft depth) this sampling event were well below applicable RWQCB ESLs (both residential and commercial) for the site proper (5175 Broadway). This shallow soil gas data (and the subslab soil gas data) indicates that the completed DPE/AS remediation significantly improved site conditions, and that no additional remediation is merited to address potential vapor intrusion concerns. According to the RWQCB ESL guidance, residential ESLs are protective of land use for residences, hospitals, day care centers and other sensitive uses.
- Our comparison of site data to SWRCB's Low Threat Closure Policy (LTCP) suggests that the subject site satisfies low-threat criteria of each potentially applicable scenario regarding vapor intrusion (Table A). The following information suggests a significant bioattenuation zone is present at the site: (1) the presence of oxygen in shallow soil and subslab gas exceeding >4% in all samples, (2) the limited TPH impact down to <9 ft depth, (3) deeper soil TPH impact has been remediated by DPE/AS, (4) the depth to groundwater has ranged from approximately 9 to 14 ft bgs, and (5) benzene concentrations in groundwater were a maximum of 100 ug/L during the most recent September 2012 monitoring event (and given extensive site remediation benzene concentrations are not expected to rebound above the 1,000 ug/L criteria of LTCP Scenario 3). Direct soil gas measurement data indicates that site data satisfies LTCP Scenario 4. Even absent direct soil gas data, other site data (including the recent oxygen data in soil gas) indicates that site data satisfies LTCP Scenario 3. Having satisfied all of the characteristics and criteria of Scenario 3 and 4, this site should be considered a low threat for vapor intrusion into indoor air in accordance with the Low Threat Closure Policy.
- Institutional controls (e.g., deed restrictions) or engineering controls (e.g., vapor barrier/passive vapor collection) can be used at the subject site to control potential exposure to petroleum vapor migrating from soil or groundwater.

RECOMMENDATIONS

Based on the above conclusions and recent groundwater monitoring data, Pangea offers the following recommendations:


- Pangea recommends that the ACEH evaluate this case for No Further Action (NFA). With the current property transaction contingent upon case closure issues, Pangea respectfully requests discontinuance of post-remediation groundwater monitoring and issuance of an NFA letter. Case closure at this time will help facilitate the pending property transaction and planned site redevelopment.
- Pangea has separately requested a meeting very soon with the ACEH to discuss requirements for case closure, and to address the prospective site development. The Baseline Environmental Project Schedule document requested by ACEH to facilitate a meeting has been provided to ACEH. If the ACEH feels additional groundwater and/or soil gas monitoring would be beneficial to further characterize site conditions, Pangea respectfully requests discussing the need for such monitoring during a meeting of stakeholders with your agency. We could also discuss the use of institutional and/or engineering controls to help facilitate case closure and safeguard human health.

ATTACHMENTS

Figure 1 – Site Location Map Figure 2 – Soil Gas and Subslab Gas Concentration Map

Table 1 – Soil Gas Analytical Results


Appendix A – Standard Operating Procedures Appendix B – Vapor Intrusion Scenarios of the Low Threat Closure Policy Appendix C – Laboratory Analytical Reports

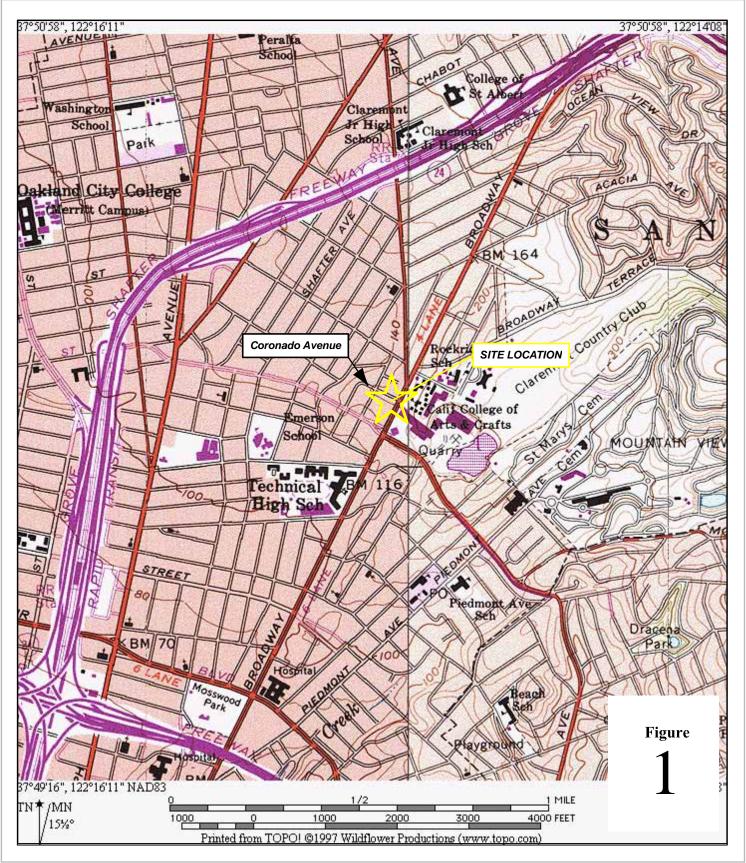

Former Exxon Station 5175 Broadway Oakland, California



Site Location Map

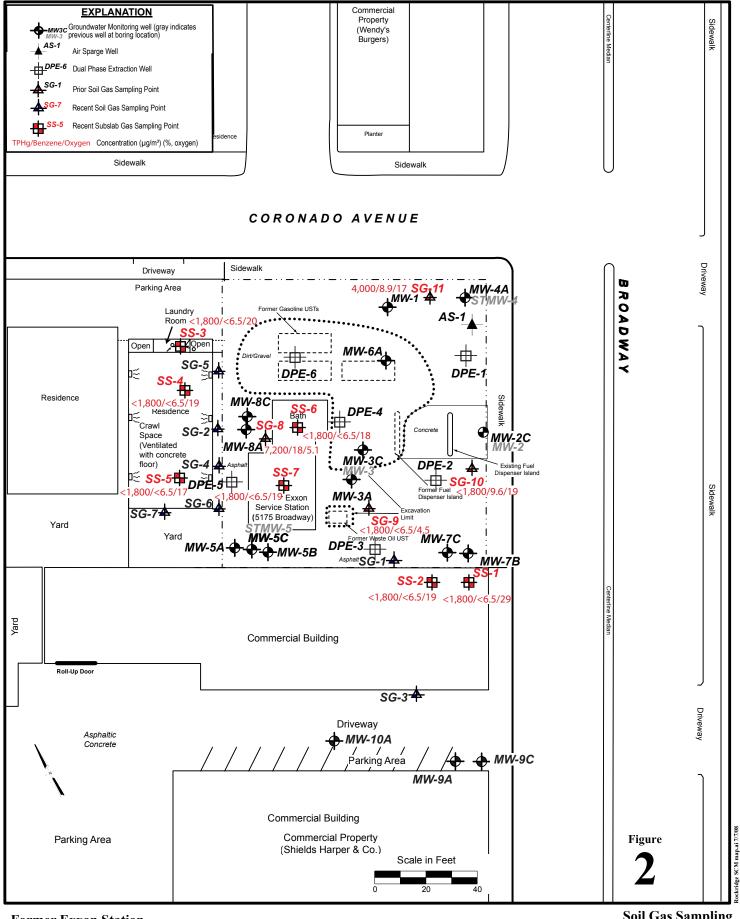

Former Exxon Station 5175 Broadway Oakland, California



Soil Gas Sampling September 2012

Pangea

Table 1. Soil Gas Analytical Data - Rockridge Heights, 5175 Broadway, Oakland, California

			Beneric	Toluene	Edi Maria	Allene (Ja	(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(TPH Gooding	Namilanen, CC(I)	International Action	Other and a see	
Boring/ Sample ID	Date	Sample Depth (ft - ft bgs)	<u>∠ ∛</u>	1 1/07		<u>/</u> 4 ³ . − ug/m ³ -	4	1 &				Notes
Residential ESL for	Sampled shallow soil gas:	(IT - IT bgs)	84	63,000	980	21,000	21,000	10,000	72			
Commercial ESL fo	-		280	180,000	3,300	58,000	58,000	29,000	240			
No Bio-Attenuation Zone, Residential (Low Threat) No Bio-Attenuation Zone, Commercial (Low Threat) With Bio-Attenuation Zone, Residential (Low Threat)		85 280 85,000	1,10	1,100	,100			93				
								310				
				1,100,000				93,000				
	n Zone, Commercial		280,000		3,600,000				310,000			
			,		-,							
Soil Gas Probe	Samples											
SG-1	9/12/2007	3.8-4.0	16.0	294	6.21	19.6	5.91	<2000		85.4		
SG-2	9/12/2007	3.8-4.0	174	200	93.6	77.2	<21.7	14,000		70.1		
SG-3	9/12/2007	2.5-2.7	<128	151	<174	<174	<174	<2000		21,300		$Is oproponal = 0.7\% \ of \ sample \ volume *$
SG-4	6/17/2008	4.0-4.5	5,930	<754	17,200	15,600	<868	830,000		<983		
SG-5	6/17/2008	4.5-5.0	12.9	7.08	61.4	57.2	<4.34	<10,000		<492		
SG-6	6/17/2008	3.5-4.0	<63.9	<75.4	97.9	<86.8	<86.8	13,000		<490		
SG-7	6/17/2008	3.5-4.0	25.6	10.8	<4.34	4.78	<4.34	<10,000		<492		
SG-8	9/12/2012	0.5-0.7	18	<7.7	<8.8	<27	<27	7,200	<11	<50	5.1	
SG-9	9/12/2012	0.5-0.7	<6.5	<7.7	<8.8	<27	<27	<1,800	<11	<50	4.5	
SG-10	9/12/2012	0.5-0.7	9.6	<7.7	<8.8	<27	<27	<1,800	<11	54	19	
SG-11	9/12/2012	0.5-0.7	8.9	<7.7	<8.8	<27	<27	4,000	<11	<50	17	
Subslab Gas S	amples											
SS-1	9/12/2007	0.5-0.7	24.1	187	5.38	16.8	5.91	<2000		11.2		
SS-2	9/12/2007	0.5-0.7	<3.19	5.24	<4.34	<4.34	<4.34	<2000		<4.92		
33=2	9/12/2007	0.5-0.7	<3.19	3.24	<4.54	<4.34	<4.34	<2000		<4.92		
SS-1	6/17/2008	0.5-0.7	<3.19	<3.77	<4.34	<4.34	<4.34	<700		<492		
SS-2	6/17/2008	0.5-0.7	<3.19	<3.77	<4.34	<4.34	<4.34	<700		<492		
SS-1	9/12/2012	0.5-0.7	<6.5	<7.7	<8.8	<27	<27	<1800	<11	<50	20	
SS-2	9/12/2012	0.5-0.7	<6.5	<7.7	<8.8	<27	<27	<1800	<11	<50	19	
SS-3	01//2012	05.07			.0.0			.1000		.50	20	
55-3 55-4	9/6/2012	0.5-0.7	<6.5	<7.7	<8.8	<27	<27	<1800	<11	<50	20	
55-4 SS-5	9/6/2012 9/6/2012	0.5-0.7 0.5-0.7	<6.5 <6.5	<7.7 <7.7	<8.8 <8.8	<27 <27	<27 <27	<1800 <1800	<11 <11	<50 <50	19 17	
55-5 SS-6	9/6/2012 9/12/2012	0.5-0.7	<0.5 <6.5	<1.1 <7.7	<8.8 <8.8	<27	<27	<1800	<11 <11	<50	17	
SS-0 SS-7	9/12/2012 9/12/2012	0.5-0.7	<0.5 <6.5	<1.1 <7.7	<8.8 <8.8	<27	<27	<1800	<11 <11	<50	18	
		0.2-0.1	~0.5	~/./	-0.0	-27	~=/		.11	-00	.,	
Leak Check Sa	mples											
SS-1 Check	9/12/2007									622,000		
SG-1 Check	9/12/2007									5,900,000		
SG-2 Check	9/12/2007									1,070,000		
SG-3 Check	9/12/2007									3,020,000		

Abbreviations:

SG-1 = Soil Gas Sample

SS-1 = Subslab Sample

ug/m3 = Micrograms per cubic meter of air results calculated by laboratory from parts per billion results using normal temperature and pressure (NPT).

ft - ft bgs = Depth interval below ground surface (bgs) in feet.

Volatile organic compounds by EPA Method TO-15 (partial list), uses GC/MS scan.

< n = Chemical not present at a concentration in excess of detection limit shown.

MRL = Method reporting limit. Laboratory reporting limit based on parts per billion on volume to volume basis (ppbv/v) and converted to ug/m3.

ESL = Environmental Screening Level for Shallow Soil Gas with Residential and Commercial/Industrial Land Use, for samples less than five feet below a building foundation or ground surface (Table E).

ESL established by the SFBRWQCB, Interim Final - February 2005, and amended in November 2006.

Low Threat = Low Threat Closure Policy, Adopted by State Water Resources Control Board, August 2012, Appendix 3 and 4.

DPE = Dual phase extraction.

Bold = Concentrations above ESLs for Residential Land Use for shallow soil gas (SS and SG samples) BEFORE remediation are shown in bold.

* = Since the air flow regulators on the sampling and leak check summa canisters were setup identically, the percentage of sample that leaked from ambient air within the leak-check enclosure into the sample probe can be determined by dividing the concentration of isopropanol in the leak-check canister.

APPENDIX A

Standard Operating Procedures

APPENDIX A

STANDARD OPERATING PROCEDURE FOR SOIL VAPOR SAMPLING

1.0 PURPOSE

This standard operating procedure (SOP) describes the procedures for collecting soil vapor samples using temporary and semi-permanent soil gas probes/wells and evacuated, stainless-steel Summa canisters. The SOP is modified from procedures and information presented in Cal/EPA 2011; Cal/EPA 2012; DiGiulio and others, 2006; DiGiulio, 2003; and discussions with laboratory director with K-Prime of Santa Rosa, California (September 2006). For any conflicts between procedures described in the SOP and guidance documents, the *Advisory-Active Soil Investigations* (Cal/EPA 2012) supercedes the SOP.

2.0 REQUIRED EQUIPMENT

- Hammer drill with fittings for installing and removing vapor probes (for direct push vapor probes)
- Vapor probes with retractable or dedicated drop-off tips (e.g. AMS SGVP) (for direct push vapor probes).
- Hand auger (for soil vapor wells)
- Tubing with Swagelok or similar threaded compression-fittings and vapor-tight caps
- Screens (for soil vapor wells)
- Filter-pack sand (for dedicated tips and soil vapor wells)
- Powdered or granular bentonite
- VOA vials
- 6-Liter Summa canister (evacuated with approximately 30" Hg vacuum) with vacuum gauge for purging and leak testing
- 1-Liter Summa canister with vacuum gauge for each sample
- Stainless-steel sampling manifold with vacuum gauges and critical orifice flow restrictor (Figure 1)
- Leak-check compound (e.g. isopropyl alcohol)
- Sampling jar and absorbent material (e.g. gauze) for leak-check compound
- Calibrated photoionization detector (PID)
- Leak-check enclosure(s) (large plastic tub with flexible weather stripping and openings for sampling enclosure atmosphere).
- Record-keeping materials
- Latex or nitrile gloves

3.0 PROCEDURES

3.1 Boring Clearance

Prior to installing soil vapor probes, ensure that a utility clearance has been conducted.

3.2 Semi-permanent Direct-Push Vapor Probe Installation

- 1. Use a rotary hammer drill or concrete-coring equipment to core any paved surfaces.
- 2. The drive rod is driven to a predetermined depth and then removed, leaving a disposable drop-off tip in the hole. The hole should be sufficiently deep that there is a minimum of 5 feet between the surface and the top of the dry bentonite overlying the sand pack (see below for details). If possible, remove the drive rod and place 3" of sand in the hole before placing the drop-off tip.
- 3. The inner soil gas pathway from probe tip to the surface should be continuously sealed (e.g., a sampling tube attached to the probe tip with a barbed fitting or a screw adapter with an o-ring) to prevent leakage. If a screw adapter with o-ring is used, inspect the o-ring to ensure that it is not flawed and use rigid tubing that can be tightened from the surface. The volume of the sampling

apparatus should be minimized. DTSC guidance requires that tubing should be no greater than ¹/₄" nominal diameter.

- 4. Cover the probe tip with at least 3" of sand (resulting in a minimum 6" sand pack), followed by at least 6" of dry granular bentonite. Fill the remainder of the boring with hydrated bentonite. VOA vials are useful for measuring and placing these materials because they have approximately the same inside diameter as the drive rod outer diameter.
- 5. Equilibration Time: After probe installation, tightly cap the tubing, record probe installation time/date, and wait at least 2 hours before conducting purge volume tests, leak tests, or soil gas sampling -- if the there is a minimum of 5 feet between the surface and the top of the dry bentonite overlying the sand pack. If there is less than 5 feet between the surface and the top of the dry bentonite overlying the sand pack, wait at least 48 hours after probe installation and capping before conducting purge volume tests, leak tests, or soil gas sampling. If hand augering was performed to clear the probe location and there is less than 5 feet between the bottom of the auger depth and the top of the dry bentonite overlying the sand pack, wait at least 48 hours after solve tests, leak tests, or soil gas sampling.
- 6. Decontamination: Decontaminate drive rods and other reusable components between sample locations by washing equipment with a non-phosphate detergent and rinsing with tap water and/or by steam-cleaning. Use new flexible tubing for each sample point (do not reuse).

3.3 Semi-permanent Augered Vapor Well Installation

- 1. Use a rotary hammer drill or concrete-coring equipment to core any paved surfaces.
- 2. Auger to a depth sufficient to allow a minimum of 5 feet between the surface and the top of the dry bentonite overlying the sand pack (see below for details). It is recommended to use the smallest diameter auger feasible to minimize future purging volumes and optimize representativeness of soil gas data.
- 3. Install small diameter tubing with a short (<6" long) screened section close to the bottom of the hole. The soil gas pathway from screen to the surface should be continuously sealed (e.g., a sampling tube attached to the probe tip with a barbed fitting or a screw adapter with an o-ring) to prevent leakage. If a screw adapter with o-ring is used, inspect the o-ring to ensure that it is now flawed and use rigid tubing that can be tightened from the surface. The volume of the sampling apparatus should be minimized. DTSC guidance requires that tubing should be no greater than ¹/4" nominal diameter.
- 4. For deep wells (>10 feet) install a down-hole rod or other support to ensure that the screened section remains at the proper depth.
- 5. Cover the screened section with at least 6" of sand, followed by at least 6" of dry granular bentonite. Ensure that the screened section is near the center of the sand pack. Fill the remainder of the boring with hydrated bentonite. The bentonite should be hydrated at the surface and poured into the borehole.
- 6. Equilibration Time: After probe installation, tightly cap the tubing, record probe installation time/date, and wait at least **48 hours** before conducting purge volume tests, leak tests, or soil gas sampling:
- 7. Decontamination: Decontaminate drive rods and other reusable components between sample locations by washing equipment with a non-phosphate detergent and rinsing with tap water and/or by steam-cleaning. Use new flexible tubing for each sample point (do not reuse).

3.4 Temporary Vapor Probe Installation Using Post Run Tubing Method

- 1. This method should only be used for qualitative assessments due to the possibility of vapor leaks along the drive rods. This method should not be used when sampling in coarse granular materials due to potential leakage along the probe.
- 2. Use a rotary hammer drill or concrete-coring equipment to core any paved surfaces.
- 3. The drive rod is driven to a predetermined depth (generally 5.5 feet minimum) and then pulled back to expose the inlets of the soil gas probe by exposing a short screened section.
- 4. The inner soil gas pathway from probe tip to the surface should be continuously sealed (e.g., a sampling tube attached to the probe tip with either a barbed fitting or a screw adapter with an oring) to prevent leakage. If a screw adapter with oring is used, replace orings daily and inspect them for flaws before installing each probe. Use rigid tubing that can be tightened from the surface to ensure that the oring is properly sealed. The volume of the sampling apparatus should be minimized. DTSC guidance requires that tubing should be no greater than ¹/₄" nominal diameter.
- 5. Hydrated bentonite should be used to seal around the drive rod at the ground surface to prevent ambient air intrusion
- 6. Equilibration Time: After probe installation, tightly cap the tubing, record probe installation time/date, wait at least **2 hours** before conducting purge volume tests, leak tests, or soil gas sampling.

3.5 Vapor Sample Collection

During vapor sampling, record all valve open/close times and canister/manifold vacuum readings at each step. Do not conduct sampling within **5 days following a significant rain event** (0.5 inches of rainfall during any 24-hour period).

<u>Setup</u>

1. Calculate volume of probe and sampling setup. Calculate and record the volume of the sampling assembly, tubing, vapor probe, and any permeable air-, sand-, or dry bentonite-filled annular space around the vapor probe tip.

One Purge Volume = $\prod * r^2 * L = 3.14 \text{ x} (1/2*ID) \text{ x} (1/2*ID) * L$,

where ID = tubing or manifold inside diameter and L = length of tubing/manifold/borehole segment.

- 1/8" ID tubing volume = 2.4 ml/ft,
- 1/4" ID tubing volume = 9.7 ml/ft,
- 1/4" OD (0.17" ID) tubing volume = 4.5 ml/ft
- 2-1/8" auger boring volume = 697 ml/ft * 0.4 = 278 ml/ft (sand) minus tubing volume
- 2-1/8" auger boring volume = 697 ml/ft * 0.5 = 349 ml/ft (dry bentonite) minus tubing volume
- 3-1/4" auger boring volume = 1631 ml/ft * 0.4 = 652 ml/ft (sand) minus tubing volume
- 3-1/4" auger boring volume = 1631 ml/ft * 0.5 = 816 ml/ft (dry bentonite) minus tubing volume

Sample Purge Volumes

Item	One Purge Volume (approx)	Three Purge Volumes	Ten Purge Volumes
¹ /4" ID tubing (10 ft)	100 ml	300 ml	1,000 ml
¹ / ₄ " ID tubing (10 ft) with 6" dry bentonite and 6" sand, inside 3-1/4" diameter auger boring	830 ml	2,500 ml	8,300 ml
¹ /4" ID tubing (10 ft) with 1 ft dry bentonite and 1 ft sand, inside 3-1/4" diameter auger boring	1,550 ml	4,650 ml	15,550 ml

- 2. Wear latex or nitrile gloves while handling sampling equipment. Change gloves whenever a new sample is collected and after handling leak-check compound.
- 3. Replace the vapor probe cap with a closed Swagelok valve. Connect the sampling manifold to the vapor probe, *sample* Summa canister *and purge* Summa canister using Swagelok fittings and stainless-steel, nylon, or Teflon tubing. Check all fittings for tightness (do not over-tighten).
- 4. Close all valves. Record pre-test vacuum readings on both canisters.

Manifold Shut-In Leak Check

- 1. Open both manifold valves and valve on purge Summa canister. Do *not* open valve on sample port. Allow manifold/tubing vacuum to stabilize at approximately 30" Hg.
- 2. Close purge canister valve and conduct a shut-in test by waiting at least 5 minutes. Monitor manifold vacuum gauge to test for leaks. If the vacuum decreases, rectify the leak before proceeding.

Purge, Sample and Leak Check

1. **Calculate purge volume and duration**. Determine the desired total purge volume and purging duration for the equipment setup. As shown on Figure 1, a critical orifice flow restrictor is intended to limit the maximum purge and sampling flow rate (approximately 120 ml/min). Purge volumes should be determined in one of the following ways:

a) For vapor sampling in support of risk-assessments for regulatory review, a step-purge test should be conducted at a "worst case" sampling point, using 1, 3 and 10 purge volumes (including tubing, sampling assembly and annular space) to determine the appropriate volume that yields the highest target compound concentration.

b) For collecting samples from depths of 5 feet or less, or if step purge tests yield no detectable target compounds, use a default purge of approximately 3 purge volumes (including tubing, sampling assembly and annular space).

c) For semi-permanent wells subject to frequent sampling, purge 1 volume only of the tubing and manifold volume (not including the dry bentonite or sand pack section) after waiting at least 2 weeks following the previous sampling event.

Example purge time calculation: Assume 1 purge volume of 831 ml (¹/₄" ID tubing (10 ft) with 6" dry bentonite and 6" sand, inside 3-1/4" diameter auger boring). To purge 3 purge volumes of initial 831 ml purge volume, total purge volume is 3 x 831 ml = approx. 2,500 ml. 2,500 ml divided by 120 ml/min = 21 minutes.

- 2. **Conduct purging.** Open purge-canister valve and vapor probe valve. Do *not* over-purge. Monitor the vacuum on the probe-side and purge canister-side vacuum gauges. If the probe-side vacuum remains below approximately 7" Hg, then sufficient flow is present to collect a representative sample (Cal/EPA 2012) and continue purging for the planned purge duration.
- 3. If the probe-side vacuum exceeds approximately 7" Hg, then insufficient flow is present to collect a representative sample and this condition should be noted (Cal/EPA 2012). Refer to Cal/EPA 2012 for guidance regarding collecting samples under low flow conditions. A sample may be collected for qualitative screening purposes only. For more representative sampling, conduct additional purging and allow two weeks of re-equilibration before then purging 1 tubing volume and collecting a soil gas sample.
- 4. Optional flow check. If the probe-side vacuum exceeds approximately 7" Hg, temporarily close the canister valve and record the elapsed time after valve closure for the manifold vacuum to drop to 5" Hg vacuum. This information can be used to estimate the probe vacuum and flow rate. Also, if no significant flow is attained, either the sampling line is plugged or the vapor probe is positioned in an impermeable or saturated layer. If the probe cap is opened for probe inspection, record the inspection procedures and duration. If purging and sampling is resumed after opening the probe cap this information will help determine the representativeness of the sample. This flow check can be performed at the beginning, middle and/or end of the purging process.
- 5. When purge duration complete and ready to discontinue purging, close purge canister valve.
- 6. **Leak-check enclosure.** Place absorbent materials (e.g., gauze) moistened with leak-check compound (isopropyl alcohol) in an open container (i.e.uncapped sampling jar) adjacent to the vapor probe. Do not allow liquid to come in direct contact with tubing or sampling assembly.
- 7. Place leak-check enclosure over vapor probe, floor/ground penetration, Summa canister/manifold assembly, and leak check container, and seal to floor using weatherstripping or duct tape or weight so that perimeter is sealed to ground surface.
- 8. Measure and record the observed PID reading for the leak-check vapor through a small hole in the leak-check enclosure. If the PID reading is below 2 ppm, reapply leak-check compound. Note that the isopropyl alcohol response factor is approximately 5.6 (i.e. a reading of 2 ppm on a PID calibrated with isobutylene indicates $5.6 \ge 2 = 11.2$ ppm of isopropyl alcohol in the sample).
- 9. **Sample collection.** Once at least a 2 ppm PID reading has been reached, open sample canister valve. Sampling should take approximately 5 minutes for a 1-liter Summa canister and 30 minutes for a 6-liter canister.
- 10. Record PID reading for leak-check enclosure approximately every 5 minutes during purging and sampling. Slowly reapply leak-check compound if PID reading drops more than 20% below initial readings.
- 11. Close sampling canister valve when vacuum decreases to between 3" and 5" mercury. Do *not* allow vacuum to fall below this range.
- 12. If quantitative leak information is desired, use a 1-liter Summa canister and sampling manifold to collect a sample from the leak-check enclosure during the same period that sampling is conducted. Submit canister for analysis of leak-check compound only.
- 13. Disassemble sampling assembly, and cap (or remove and restore) vapor sampling point.
- 14. Fill out chain-of-custody form, including analysis for chemicals of concern and leak-check compound. Also analyze for oxygen. Include final vacuum reading and serial numbers of canister and flow restrictor.

15. For vapor sampling in support of risk-assessments for regulatory review, collect at least one duplicate sample per site per sampling event from the sampling point with the anticipated highest vapor concentrations. The duplicate sample should be collected by attaching a fresh sample canister following collection of the initial sample. If a new manifold is used, follow the same purging and sampling procedures used for the original sample. If the same manifold is used, collect a sample without further purging, using the same sampling procedures used for the original sample.

Decontamination and Decommissioning

- 16. Use a decontaminated sampling manifold and new tubing for each sample location. Return equipment to laboratory for decontamination.
- 17. Backfill any open soil vapor probe holes with bentonite slurry.

REFERENCES

- Cal/EPA, 2011, Guidance for the evaluation and mitigation of subsurface vapor intrusion to indoor air (vapor intrusion guidance), California Environmental Protection Agency, Department of Toxic Substances Control, October).
- Cal/EPA, 2012, Advisory-Active Soil Gas Investigation, California Environmental Protection Agency, Department of Toxic Substances Control, Los Angeles Regional Water Quality Control Board, San Francisco Regional Water Quality Control Board, April.
- Dominic DiGiulio, 2003, Standard Operating Procedure (SOP) for installation of sub-slab vapor probes and sampling using EPA Method TO-15 to support vapor intrusion investigations, U.S.
 Environmental Protection Agency, Office of Research and Development, National Risk Management Research Laboratory, Ground-Water and Ecosystem Restoration Division, Ada, Oklahoma (included as Appendix C of Colorado Department of Public Health and Environment, 2004, Draft Indoor Air Guidance, Hazardous Materials and Waste Division), September
- DiGiulio, D.C., and Cynthia J. Pau, C., Cody, R., Willey, R., Clifford, S., Kahn, P., Mosley R., Lee, A., and Christensen, K., 2006, Assessment of vapor intrusion in homes near the Raymark Superfund Site using basement and sub-slab air samples, U.S. Environmental Protection Agency, Office Of Research and Development, National Risk Management Research Laboratory, Cincinnati, OH 45268, March.

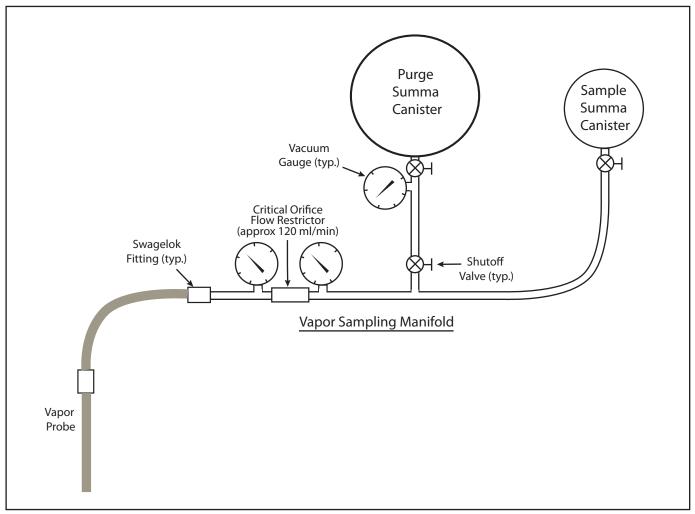


Figure 1. Soil Vapor Sampling Manifold Schematic

STANDARD OPERATING PROCEDURE FOR SUBSLAB VAPOR SAMPLING

1.0 PURPOSE

This standard operating procedure (SOP) describes the procedures for collecting subslab vapor samples using evacuated, stainless-steel Summa canisters for the purpose of assessing risk to building occupants. The SOP is modified from procedures and information presented in Cal/EPA 2011; Cal/EPA 2012; DiGiulio and others, 2006; DiGiulio, 2003; and discussions with laboratory director with K-Prime of Santa Rosa, California (September 2006).

2.0 REQUIRED EQUIPMENT

- Hammer drill with 1" bit and smaller bits (slightly larger than vapor probe tubing)
- Tubing for cleaning boring
- Stainless-steel or Teflon vapor probe tubing with Swagelok threaded compression fitting and vapor-tight cap.
- Rubber stopper or Teflon disk
- Granulated bentonite and cement
- 6-Liter Summa canister (evacuated with approximately 30" Hg vacuum) with vacuum gauge for purging and leak testing
- 1-Liter Summa canister for each sample
- 1-Liter Summa canister for leak-check compound for each sample
- Stainless-steel sampling manifold with vacuum gauges and critical orifice flow restrictor (Figure 1)(request that laboratory leak-check sampling manifold prior to mobilization)
- Leak-check compound (e.g. isopropyl alcohol) and absorbent material (e.g. gauze)
- Photoionization detector (PID)
- Isobutylene for PID calibration
- Tedlar bags for sampling leak-check compound
- Leak-check enclosure (plastic container with flexible weatherstripping and openings for vapor probe tubing and for sampling enclosure atmosphere)
- Record-keeping materials
- Latex or nitrile gloves

3.0 PROCEDURES

3.1 Boring Clearance

Prior to installing subslab vapor probes, ensure that a utility clearance has been conducted to ensure that potential subsurface utility and rebar locations have been identified and marked.

3.2 Vapor Probe Construction

- 1. To protect interior surfaces, lay plastic sheeting around the probe location.
- 2. Use a rotary hammer drill to create an approximately 2-inch deep, 1 1/2 -inch diameter hole that *partially* penetrates the slab. Use a piece of flexible tubing to blow or vacuum concrete debris and dust from the hole. Do not blow or vacuum after the slab has been completely penetrated.

- 3. Drill a smaller diameter *inner hole* in the center of the outer hole, periodically blowing dust and debris from the hole until the slab is penetrated. The diameter of the inner hole should exceed the diameter of the vapor probe tubing by the minimum amount practicable. The inner hole should be drilled completely through the slab and 3 to 4 inches into the subslab material (baserock or soil) to form a cavity (see Figure 1).
- 4. Insert the capped vapor probe tubing through a tightly fitting rubber stopper or a Teflon disk and insert the stopper or disk into the bottom of the outer hole. The purpose of the stopper is to stop moisture from the annular seal from leaking into subslab materials. The fitting may either be constructed flush, or may protrude above the slab, depending on location and susceptibility to damage. If a lubricant is needed, use only high-vacuum silicone grease.
- 5. Clean the concrete surfaces in the borehole with a dampened towel to increase the potential of a good seal. Fill the remainder of the hole with hydrated bentonite (temporary probe) or hydrated bentonite topped with expanding cement (semi-permanent probe). Place a tightly fitting rubber stopper over the probe to protect it from damage.

3.3 Vapor Sampling

During vapor sampling, record all valve open/close times and canister/manifold vacuum readings at each step.

<u>Setup</u>

- 1. Ensure that at least two hours have elapsed since installation of the subslab vapor probe(s) and that at least 5 days have elapsed since significant (1/2-inch or more in 24 hours) precipitation or irrigation of areas adjacent to the building.
- 2. Calculate and record the volume of the sampling assembly, tubing and vapor probe.

Volume = $\prod * r^2 * L = 3.14 \text{ x} (1/2*ID) \text{ x} (1/2*ID) *L$,

where ID = tubing or manifold inside diameter and L = length of tubing/manifold segment.

- 3. Wear latex or nitrile gloves while handling sampling equipment. Change gloves whenever a new sample is collected and after handling leak-check compound.
- 4. Replace the vapor probe cap with a closed Swagelok valve. Connect the sampling manifold to the vapor probe, sample Summa canister and purge Summa canister using Swagelok fittings and stainless-steel, Teflon or Tygon tubing. Check all fittings for tightness (do not overtighten).
- 5. Close all valves. Record pre-test vacuum readings on both canisters.

Manifold Shut-In Check

- 1. Open both manifold valves and valve on purge Summa canister. Do *not* open valve on sample port. Allow manifold/tubing vacuum to stabilize at approximately 30" Hg.
- 2. Close purge canister valve and conduct a shut-in test by waiting at least 5 minutes. Monitor manifold vacuum gauge to test for leaks. If the vacuum decreases, rectify the leak before proceeding.

Purge and Leak Check

- 1. Calculate purge volume and duration. Determine the desired total purge volume and purging duration for the equipment setup. As shown on Figure 1, a critical orifice flow restrictor is intended to limit the maximum purge and sampling flow rate (approximately 120 ml/min). If step testing is not required to better determine optimal purge volume, purge approximately 3 times the volume of the sampling assembly, tubing and vapor probe.
- 2. Conduct purging. Open purge-canister valve and vapor probe valve. Do *not* over-purge. Monitor the vacuum on the probe-side and purge canister-side vacuum gauges. If the probe-side vacuum remains below approximately 7" Hg, then sufficient flow is present to collect a representative sample (Cal/EPA 2012) and continue purging for the planned purge duration.
- **3.** If the probe-side vacuum exceeds approximately 7" Hg, then insufficient flow is present to collect a representative sample and this condition should be noted (Cal/EPA 2012). Refer to Cal/EPA 2012 for guidance regarding collecting samples under low flow conditions. A sample may be collected for qualitative screening purposes only. For more representative sampling, conduct additional purging and allow two weeks of re-equilibration before then purging 1 tubing volume and collecting a soil gas sample.
- **4.** Optional flow check. If the probe-side vacuum exceeds approximately 7" Hg, temporarily close the canister valve and record the elapsed time after valve closure for the manifold vacuum to drop to 5" Hg vacuum. This information can be used to estimate the probe vacuum and flow rate. Also, if no significant flow is attained, either the sampling line is plugged or the vapor probe is positioned in an impermeable or saturated layer. If the probe cap is opened for probe inspection, record the inspection procedures and duration. If purging and sampling is resumed after opening the probe cap this information will help determine the representativeness of the sample. This flow check can be performed at the beginning, middle and/or end of the purging process.
- 5. When purge duration complete and ready to discontinue purging, close purge canister valve.
- 6. Leak-check enclosure. Place absorbent materials (e.g., gauze) moistened with leakcheck compound (isopropyl alcohol) in an open container (i.e.uncapped sampling jar) adjacent to the vapor probe. Do not allow liquid to come in direct contact with tubing or sampling assembly.
- Place leak-check enclosure over vapor probe, Summa canister/manifold assembly and leak-check Summa canister and seal to floor using weatherstripping or duct tape. Ensure that PID has been calibrated with isobutylene gas. Note that the isopropyl alcohol response factor is approximately 5.6 (i.e. a reading of 2 ppm on the PID indicates 5.6 x 2 = 11.2 ppm of isopropyl alcohol in the sample).
- **8.** Record PID reading for leak-check enclosure at least once every 2 minutes during purging and sampling.

Sample Collection

- 1. Once a PID reading of at least 2 ppm has been reached, open sample canister valve. Sampling should take approximately 6 minutes for a 1-liter Summa canister.
- 2. Close sampling canister valve when vacuum decreases to between 3" and 5" mercury. Do *not* allow vacuum to fall below this range.
- 3. If quantitative leak information is desired, use a 1-liter Summa canister and sampling manifold to collect a sample from the leak-check enclosure during the same period that

sampling is conducted. Submit this canister to laboratory 'on hold'. If significant leak check compound detected by laboratory in the sampling canister, request laboratory analysis for leak-check compound only within this leak-check canister.


- 4. Disassemble sampling assembly, and cap (or remove and restore) vapor sampling point.
- 5. Fill out chain-of-custody form, including analysis for chemicals of concern and leakcheck compound. Also analyze for percent oxygen. Include final vacuum reading and serial numbers of canister and flow restrictor.
- 6. For vapor sampling in support of risk-assessments for regulatory review, collect at least one duplicate sample per site per sampling event from the sampling point with the anticipated highest vapor concentrations. The duplicate sample should be attached to the manifold prior to equipment vacuum testing so its connections can be tested. Collect a sample without further purging, using the same sampling procedures used for the original sample.

Decontamination and Decommissioning

- 1. Use a decontaminated sampling manifold and new tubing for each sample location. Return equipment to laboratory for decontamination.
- 2. Backfill any open soil vapor probe holes with bentonite slurry.
- 3. To retain the subslab probe for future sampling, cap the Swagelock fitting and cover the probe with a small vault or other protective device.

REFERENCES

- Cal/EPA, 2011, Guidance for the evaluation and mitigation of subsurface vapor intrusion to indoor air (vapor intrusion guidance), California Environmental Protection Agency, Department of Toxic Substances Control, October).
- Cal/EPA, 2012, Advisory-Active Soil Gas Investigation, California Environmental Protection Agency, Department of Toxic Substances Control, Los Angeles Regional Water Quality Control Board, San Francisco Regional Water Quality Control Board, April.
- Cal/EPA, 2004, Interim final guidance for the evaluation and mitigation of subsurface vapor intrusion to indoor air, California Environmental Protection Agency, Department of Toxic Substances Control,December 15 (revised February 7, 2005).
- Dominic DiGiulio, 2003, Standard Operating Procedure (SOP) for installation of sub-slab vapor probes and sampling using EPA Method TO-15 to support vapor intrusion investigations, U.S. Environmental Protection Agency, Office of Research and Development, National Risk Management Research Laboratory, Ground-Water and Ecosystem Restoration Division, Ada, Oklahoma (included as Appendix C of Colorado Department of Public Health and Environment, 2004, Draft Indoor Air Guidance, Hazardous Materials and Waste Division), September
- DiGiulio, D.C., and Cynthia J. Pau, C., Cody, R., Willey, R., Clifford, S., Kahn, P., Mosley R., Lee, A., and Christensen, K., 2006, Assessment of vapor intrusion in homes near the Raymark Superfund Site using basement and sub-slab air samples, U.S. Environmental Protection Agency, Office Of Research and Development, National Risk Management Research Laboratory, Cincinnati, OH 45268, March.

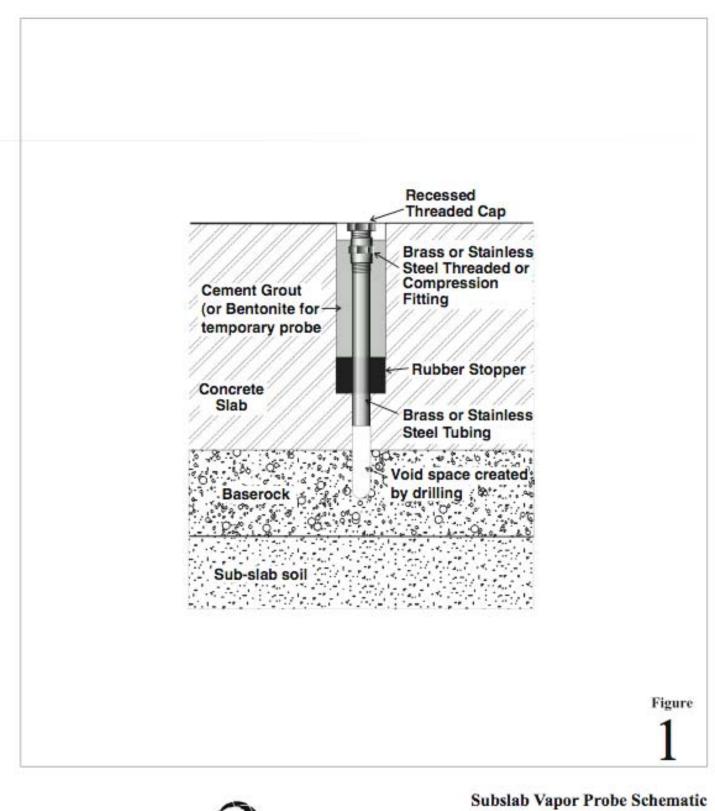




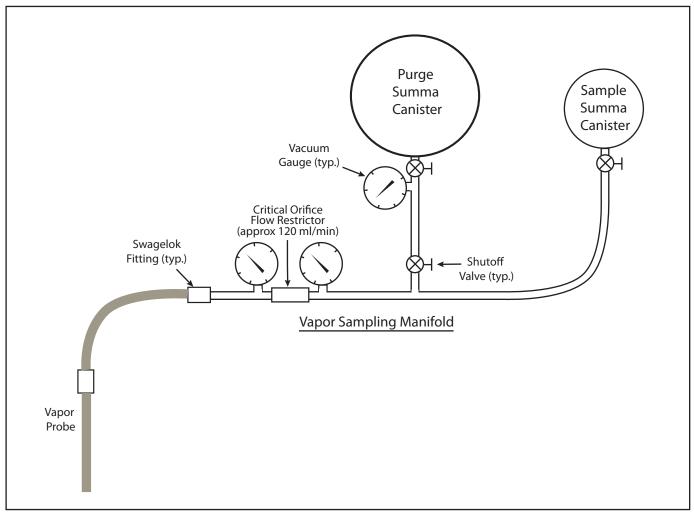


Figure 2. Soil Vapor Sampling Manifold Schematic

APPENDIX B

Vapor Intrusion Scenarios of the Low Threat Closure Policy

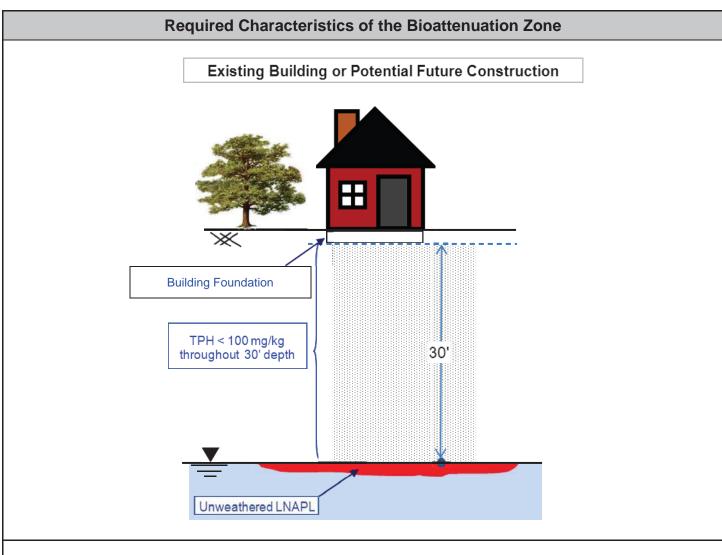


Appendix 1 Scenario 1: Unweathered* LNAPL in Groundwater

Required Characteristics of the Bioattenuation Zone:

 The bioattenuation zone shall be a continuous zone that provides a separation of at least 30 feet vertically between the LNAPL in groundwater and the foundation of existing or potential buildings; and
 Total TPH (TPH-g and TPH-d combined) are less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

TPH = total petroleum hydrocarbons TPH-g = total petroleum hydrocarbons as gasoline TPH-d = total petroleum hydrocarbons as diesel

*As used in this context, unweathered LNAPL is generally understood to mean petroleum product that has not been subjected to significant volatilization or solubilization, and therefore has not lost a significant portion of its volatile or soluble constituents (e.g., comparable to recently dispensed fuel).

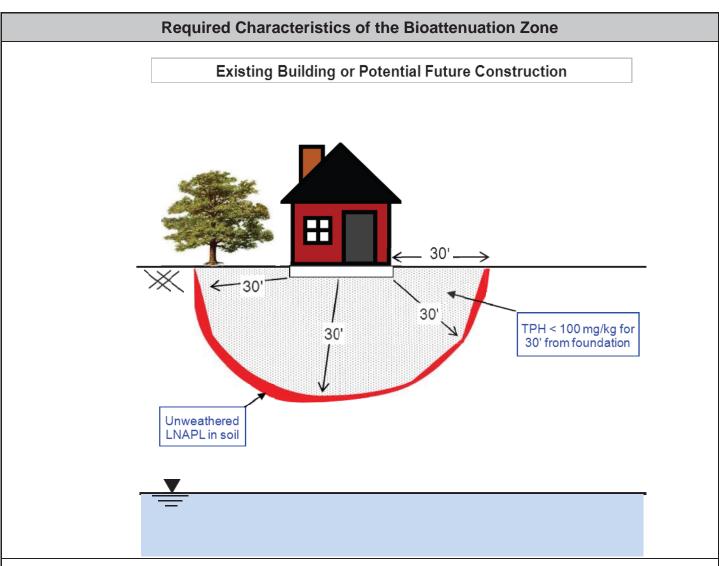

Appendix 2 Scenario 2: Unweathered* LNAPL in Soil

Required Characteristics of the Bioattenuation Zone:


 The bioattenuation zone shall be a continuous zone that provides a separation of at least 30 feet both laterally and vertically between the LNAPL in soil and the foundation of existing or potential buildings, and
 Total TPH (TPH-g and TPH-d combined) are less than 100 mg/kg throughout the entire lateral and vertical extent of the bioattenuation zone.

*As used in this context, unweathered LNAPL is generally understood to mean petroleum product that has not been subjected to significant volatilization or solubilization, and therefore has not lost a significant portion of its volatile or soluble constituents (e.g., comparable to recently dispensed fuel).

Appendix 3 Scenario 3 - Dissolved Phase Benzene Concentrations in Groundwater

(Low concentration groundwater scenarios with or without oxygen data)

(1 of 2)

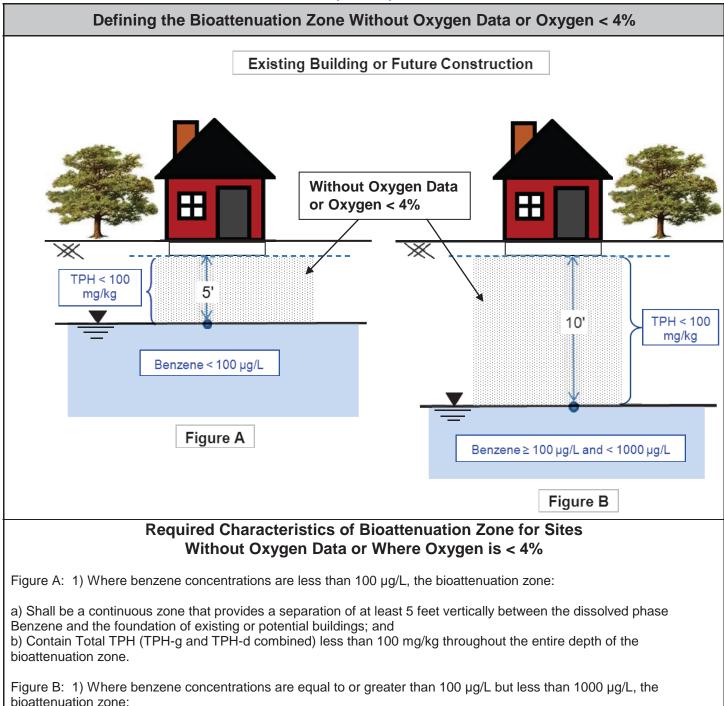


a) Shall be a continuous zone that provides a separation of at least 10 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and b) Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

Appendix 3 Scenario 3 - Dissolved Phase Benzene Concentrations in Groundwater

(Low concentration groundwater scenarios with or without oxygen data)


(2 of 2)

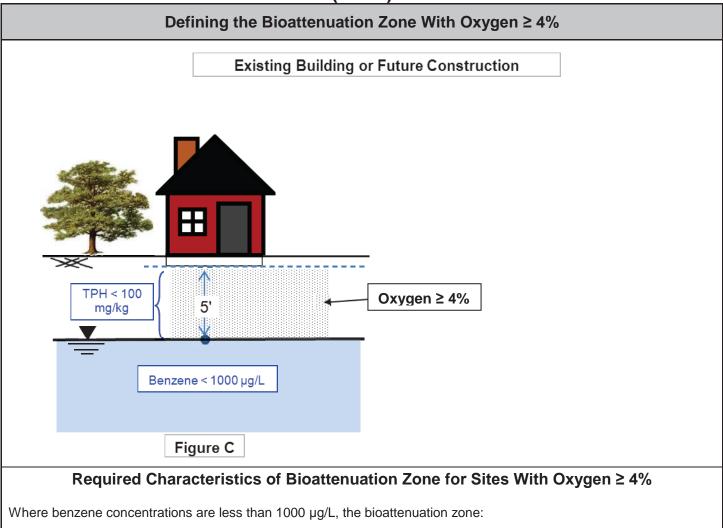

1. Shall be a continuous zone that provides a separation of least 5 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and


2. Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

Appendix 4 Scenario 4 - Direct Measurement of Soil Gas Concentrations (1 of 2)

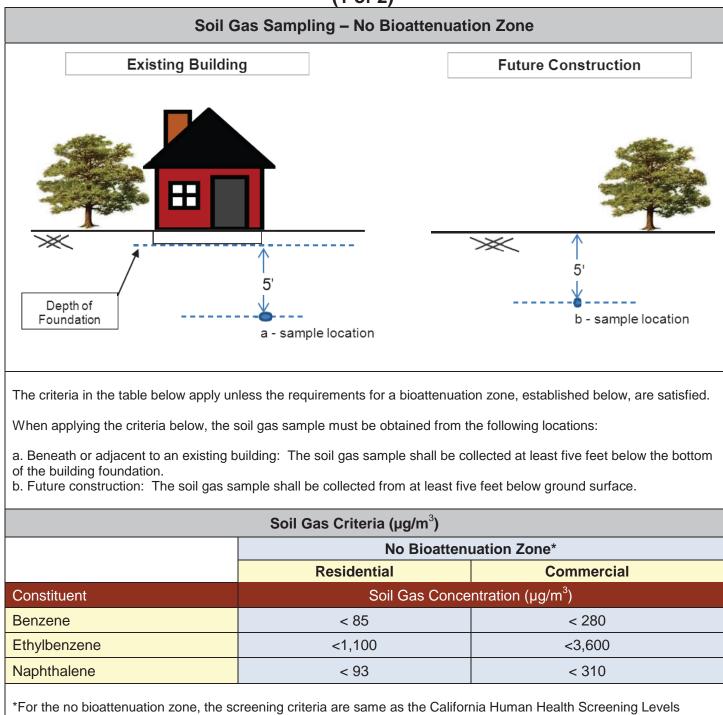

(CHHSLs) with engineered fill below sub-slab.

Appendix 4 Scenario 4 - Direct Measurement of Soil Gas Concentrations (2 of 2)

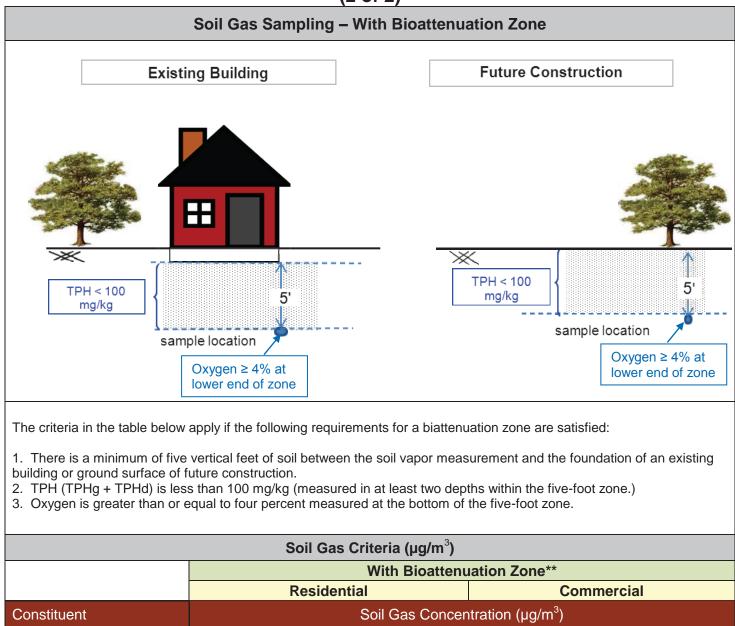

Ethylbenzene	<1,100,000	<3,600,000
Naphthalene	< 93,000	< 310,000
**A 1000-fold bioattenuation o	f petroleum vapors is assumed for the bioattenu	ation zone.

< 85,000

Benzene

< 280.000

APPENDIX C

Laboratory Analytical Reports



McCampbell Analytical, Inc. "When Quality Counts"

Analytical Report

Pangea Environmental Svcs., Inc.	Client Project ID: 5175 Broadway, Rockridge Heights	Date Sampled:	09/12/12
1710 Franklin Street, Ste. 200		Date Received:	09/13/12
1710 Frankin Subot, Sto. 200	Client Contact: Tina De La Fuente	Date Reported:	09/18/12
Oakland, CA 94612	Client P.O.:	Date Completed:	09/18/12

WorkOrder: 1209315

September 18, 2012

Dear Tina:

Enclosed within are:

- 1) The results of the 7 analyzed samples from your project: **5175 Broadway, Rockridge Heights,**
- 2) QC data for the above samples, and
- 3) A copy of the chain of custody.

All analyses were completed satisfactorily and all QC samples were found to be within our control limits. If you have any questions or concerns, please feel free to give me a call. Thank you for choosing McCampbell Analytical Laboratories for your analytical needs.

Best regards,

Angela Rydelius Laboratory Manager McCampbell Analytical, Inc.

The analytical results relate only to the items tested.

N	AcCAMP	NAME AND POST OFFICE ADDRESS OF	200	and the Real Property lies of	and the owner where the local division of the local division of the local division of the local division of the	the survey of the local division of the	IN	IC	4	-		_			_			-	TI.	AT	N	OF	C	IIS			V	DI	FC	OR	D	
	ICCAIMI .		Willow Pa		IIC.	AL	9 11	ic						1	TIT	TAT .	D							US	1		1					X
		Pitts	burg, CA 9	94565										1	UR	IN Z	IK	00	ND	11	VII	5	RI	JSH		24 H	ID	100	■ 8 HR		72 HR	
Telepho	bsite: <u>www.mc</u> one: (925) 252				F	ax:	(925			269				EI	OF F	tequ	irea	1?	oelt	(N	orn	1al)	No					(DW		No	12 mix	SDAT
Report To: Tina					o: Pa	ngea	a		1		_								Analysis Req			quest					Ot	ther	Comments			
Company: Pange		and the second se								_											1							-				Filter
1710 Franklin Str	eet, Suite 200), Oakla										-		BE								1										Samples
T. I. (510) 03(3)	203				: tdel		The second design of the secon		inge	eaen	v.co	m	-	8015J/MTBE		- 1															for Metals	
Tele: (510) 836-3					(510)						1.4	-	_	3015)	dn	Ш.															1	analysis:
Project #: 5175 Bi		on Only			et Nar	ne:	Rock	ric	Ige	Heiş	ghts		-	+	CBD	by TO-15																Yes / No
Project Location: Sampler Signatur											(602/8020	gel clean																				
Sampler Signatur	e:			-		T		-		-	ME	CHO	D		C3 B	alen																
SAMPLING				2	ners		MA	FR	IX		RES			s Gas	w/silica §	Naphthalene		hol				530										
SAMPLE ID (Field Point Name)	LOCATION	Date	Time	# Containers	Type Containers	Water	Soil	AIF	Sludge	Other	HCL	HNO ₃	Other	BTEX & TPH a	TPHd (8015) v	TPHg, BTEX, N	Percent Oxygen	Isopropyl Alcohol														
SS-7	SS-7	9/12	1042	1	Su			x	+	+	+					Х	Х	X	-	-	_			+		-		+	+	-		
SS-7 Leak Check	SS-7	9/12	1042	1	Su	\vdash		x	+	+	+								-									-	+			HOLD
SG-8	SG-8	9/12	1141	1	Su			x	-	+	-			-		X	Х	X		-								-	+			
SG-8 Leak Check	SG-8	9/12	1143	1	Su			x	-	+	+							-		-	-							-	+	-		HOLD
SG-11-16	SG-11 M	9/12	1226	1.	Su	\vdash		x	+	+	+					Х	Х	X		-				-				-	-	-		
SG- Leak Check	SG-1/	9/12	1228	1	Su			x		+	-																	-		-	-	HOLD
SG-10	SG-10	9/12	1311	1	Su		-	x	+	+	+					X	X	X		-			-				-	+	+	-	-	
SG-10 Leak Check	SG-10	9/12	1311	1	Su			x		t												-							-			HOLD
SG-9	SG-9	9/12	1351	1	Su			x		+						X	X	X	-						-			-	+			
SG-9 Leak Check	SG-9	9/12	1349	1	Su			x		+														+				1	-			HOLD
SS-2	SS-2	9/12	1608	1	Su			x		+	1					X	X	X						-					1	-		
SS-2 Leak Check	SS-2	9/12	1601	1	Su			x	-	t	-												-	+			-	-	+			HOLD
SS-1	SS-1	9/12	1627	1	Su			x		t						X	Х	X												-		
SS-1 Leak Check	SS-1	9/12	1626	1	Su			x	-	t							1.							1								HOLD
Relinquished By:						1	ICE GO	OD C	P		ON_	-		*	Sal	mp	ole	5	L	ab	omm ele	HENT	S:	36-	7''							
Relinquished By:		Date:	Time:	Rece	ived B	Vi /	1.	n	il	u	10	2/	2	DEC	ROI	PRIA	TE C	ED IN	N LAI	B		/	. (G	
Relinquished By: Date: Time: Received By:							PRESERVED IN LAB VOAS O&G METALS OTHER PRESERVATION pH<2																									

Page 2 of 12

McCampbell Analytical, Inc.



1534 Willow Pass Rd Pittsburg, CA 94565-1701

CHAIN-OF-CUSTODY RECORD

Page 1 of 1

(925) 252-9262				WorkOr	rder: 1209315	Clier	ntCode: PEO		
	WaterTrax	WriteOn	✓ EDF	Excel	EQuIS	Email	HardCopy	ThirdParty	J-flag
Report to:				Bil	ll to:		Reques	ted TAT:	5 days
Tina De La Fuente	Email:	tdelafuente@par	igeaenv.com		Bob Clark-Ride	dell			
Pangea Environmental Svcs., Inc. 1710 Franklin Street, Ste. 200 Oakland, CA 94612 (415) 218-7247 FAX: (510) 836-3709	cc: PO: ProjectNo:	5175 Broadway,	Rockridge Heights		Pangea Enviro 1710 Franklin Oakland, CA 9	Street, Ste. 20		eceived: rinted:	09/13/2012 09/13/2012

					Requested Tests (See legend below)												
Lab ID	Client ID	Matrix	Collection Date	Hold	1	2	3	4	5	6	7	8	9	10	11	12	
1209315-001	SS-7	Soil Gas	9/12/2012 10:42		А	А	Α										
1209315-003	SG-8	Soil Gas	9/12/2012 11:41		А		А										
1209315-005	SG-11	Soil Gas	9/12/2012 12:26		А		А										
1209315-007	SG-10	Soil Gas	9/12/2012 13:11		А		А										
1209315-009	SG-9	Soil Gas	9/12/2012 13:51		А		А										
1209315-011	SS-2	Soil Gas	9/12/2012 16:08		А		А										
1209315-013	SS-1	Soil Gas	9/12/2012 16:27		А		Α										

Test Legend:

1	LG_SUMMA_SOILGAS(%)	
6		
11		

2	PREDF REPORT	
7		
12		

3	TO15+GAS_SOIL(UG/M3)
8	

4 9

5	
10	

The following SampIDs: 001A, 003A, 005A, 007A, 009A, 011A, 013A contain testgroup.

Comments:

NOTE: Soil samples are discarded 60 days after results are reported unless other arrangements are made (Water samples are 30 days). Hazardous samples will be returned to client or disposed of at client expense.

Prepared by: Maria Venegas



Sample Receipt Checklist

Client Name:	Pangea Environmer	ntal Svcs., Inc.			Date an	d Time Received:	9/13/2012 5	13:23 PM
Project Name:	5175 Broadway, Ro	ckridge Heights			LogIn R	eviewed by:		Maria Venegas
WorkOrder N°:	1209315	Matrix: Soil Gas			Carrier:	<u>Rob Pringle (M</u>	AI Courier)	
		<u>Cha</u>	in of Cu	ustody (COC) Informatio	<u>on</u>		
Chain of custody	present?		Yes	✓	No 🗌			
Chain of custody	signed when relinquis	shed and received?	Yes	✓	No			
Chain of custody	agrees with sample la	abels?	Yes	✓	No 🗌			
Sample IDs note	d by Client on COC?		Yes	✓	No 🗌			
Date and Time of	f collection noted by C	lient on COC?	Yes	✓	No 🗌			
Sampler's name	noted on COC?		Yes	✓	No 🗌			
			Sample	e Receipt Infe	ormation			
Custody seals int	tact on shipping conta	iner/cooler?	Yes		No 🗌		NA 🗹	
Shipping contain	er/cooler in good cond	lition?	Yes	\checkmark	No 🗌			
Samples in prope	er containers/bottles?		Yes	✓	No 🗌			
Sample containe	rs intact?		Yes	✓	No 🗌			
Sufficient sample	e volume for indicated	test?	Yes	✓	No 🗌			
		Sample Pres	servatio	n and Hold]	<u> Fime (HT) Ir</u>	nformation		
All samples recei	ived within holding tim	e?	Yes	✓	No 🗌			
Container/Temp	Blank temperature		Coole	er Temp:			NA 🖌	
Water - VOA vial	s have zero headspac	e / no bubbles?	Yes		No 🗌 🛛	No VOA vials submi	itted 🗹	
Sample labels ch	necked for correct pres	servation?	Yes	✓	No			
Metal - pH accep	table upon receipt (p⊦	l<2)?	Yes		No 🗌		NA 🗹	
Samples Receive	ed on Ice?		Yes		No 🗸			

* NOTE: If the "No" box is checked, see comments below.

Comments:

		al <u>, Inc.</u>	Toll F	Free Telepho	one: (877) 252-9262 / Fax: (925) 252	-9269				
a Environmental Svcs., Inc.			5175 Broadwa	ay,	Date Sampled: 09/12	/12				
Franklin Street Ste 200	Rockri	idge Heights			Date Received: 09/13	: (925) 252-9269 @mccampbell.com 09/12/12 09/13/12 09/14/12 09/14/12 09/14/12 09/14/12 1 1 1 1 1 1 1 1 1 1 1 1				
Tankini Succi, Stc. 200	Client	Contact: Tina	a De La Fuen	te	Date Extracted: 09/14	/12				
nd, CA 94612	Client	P.O.:			Date Analyzed: 09/14/12					
		Li	ight Gases*	•						
n method: ASTM D 1946-90				Work Order: 1209315						
Client ID	Matrix	Initial Pressure	Final Pressure		Oxygen	DF	% SS	Comments		
SS-7	Soil Gas	13.26	26.44		19	1	N/A			
SG-8	Soil Gas	12.46	24.82		5.1	1	N/A			
SG-11	Soil Gas	11.88	23.67		17	1	N/A			
SG-10	Soil Gas	12.29	24.48		19	1	N/A			
SG-9	Soil Gas	11.75	23.41		4.5	1	N/A			
SS-2	Soil Gas	12.36	24.62		19	1	N/A			
SS-1	Soil Gas	12.67	25.24		20	1	N/A			
Reporting Limit for $DE -1$.	W 7				NT A			NIA		
ND means not detected at or	W SoilGas	psia psia	-		0.4			NA %		
			-							
	"When Quality • Environmental Svcs., Inc. ranklin Street, Ste. 200 d, CA 94612 • method: ASTM D 1946-90 Client ID SS-7 SG-8 SG-10 SG-9 SS-2 SS-1 SS-1 Reporting Limit for DF =1; ND means not detected at or above the reporting limit or samples are reported in %.	When Quality Counts'' Environmental Svcs., Inc. Client Rockri anklin Street, Ste. 200 Imethod: ASTM D 1946-90 Client ID Matrix SS-7 Soil Gas SG-8 Soil Gas SG-10 Soil Gas SG-9 Soil Gas SS-7 Soil Gas SG-10 Soil Gas SG-10 Soil Gas SS-1 Soil Gas Soi	Image: series of the series	MCCCMPDDell Analy Counts" Total F When Quality Counts" Total F Environmental Sves., Inc. Client Project ID: \$175 Broadw ranklin Street, Ste. 200 Client Contact: Tina De La Fuen d, CA 94612 Client P.O.: method: ASTM D 1946-90 Matrix Initial Pressure SS-7 Soil Gas 13.26 26.44 SG-8 Soil Gas 12.46 24.82 SG-11 Soil Gas 11.88 23.67 SG-10 Soil Gas 11.29 24.48 SG-9 Soil Gas 12.36 24.62 SG-10 Soil Gas 12.36 24.62 SS-2 Soil Gas 12.67 25.24 SS-1 Soil Gas <t< td=""><td>MCCCINPOPEILANCLYINCAL, INC. "When Quality Counts" Toll Prec Teleph http://www.nccar Environmental Sves., Inc. Client Project ID: 5175 Broadway, Rockridge Heights ranklin Street, Ste. 200 Client Contact: Tina De La Fuente d, CA 94612 Client P.O.: Light Cases* analytical methods: ASTM D 1946-90 Client D Matrix Client ID Matrix Client ID Matrix Client ID Matrix Sid Gas Soil Gas Client ID <td c<="" td=""><td>The Clipping Strategy Part (25) 322 When Quality Counts " Toll the Clipping Strategy 25) 322 Improvemental Sves., Inc. Client Project ID: 5175 Broadway, Rockridge Heights Date Sampled: 09/12 Tole Strategy Part (26) 322 Part Sampled: 09/12 Date Received: 09/14 Light Gases* Total mathematicants Light Gases* Matrix Initial Pressure Final Pressure Oxygen SS-7 Soil Gas 13.26 26.44 19 SG-8 Soil Gas 11.88 23.67 177 SG-10 Soil Gas 11.88 23.67 177 SG-610 Soil Gas 12.67 2.24 20 Soil Gas 12.67 2.24 20 SG-1 Soil Gas 12.67 2.24 20 So</td><td>When Quality Counts" bitp://www.mecampbell.com/ E-mail: maine mecampbell.com Environmental Sves., Inc. Client Project ID: \$175 Broadway. Date Sampled: $09/12/12$ ranklin Street, Ste. 200 Client Contact: Tina De La Fuente Date Extracted: $09/14/12$ d. CA 94612 Client P.O.: Date Sampled: $09/14/12$ Interface Street Str</td><td>Number of the section of the sectin section of the sectin section the section of the sec</td></td></td></t<>	MCCCINPOPEILANCLYINCAL, INC. "When Quality Counts" Toll Prec Teleph http://www.nccar Environmental Sves., Inc. Client Project ID: 5175 Broadway, Rockridge Heights ranklin Street, Ste. 200 Client Contact: Tina De La Fuente d, CA 94612 Client P.O.: Light Cases* analytical methods: ASTM D 1946-90 Client D Matrix Client ID Matrix Client ID Matrix Client ID Matrix Sid Gas Soil Gas Client ID <td c<="" td=""><td>The Clipping Strategy Part (25) 322 When Quality Counts " Toll the Clipping Strategy 25) 322 Improvemental Sves., Inc. Client Project ID: 5175 Broadway, Rockridge Heights Date Sampled: 09/12 Tole Strategy Part (26) 322 Part Sampled: 09/12 Date Received: 09/14 Light Gases* Total mathematicants Light Gases* Matrix Initial Pressure Final Pressure Oxygen SS-7 Soil Gas 13.26 26.44 19 SG-8 Soil Gas 11.88 23.67 177 SG-10 Soil Gas 11.88 23.67 177 SG-610 Soil Gas 12.67 2.24 20 Soil Gas 12.67 2.24 20 SG-1 Soil Gas 12.67 2.24 20 So</td><td>When Quality Counts" bitp://www.mecampbell.com/ E-mail: maine mecampbell.com Environmental Sves., Inc. Client Project ID: \$175 Broadway. Date Sampled: $09/12/12$ ranklin Street, Ste. 200 Client Contact: Tina De La Fuente Date Extracted: $09/14/12$ d. CA 94612 Client P.O.: Date Sampled: $09/14/12$ Interface Street Str</td><td>Number of the section of the sectin section of the sectin section the section of the sec</td></td>	<td>The Clipping Strategy Part (25) 322 When Quality Counts " Toll the Clipping Strategy 25) 322 Improvemental Sves., Inc. Client Project ID: 5175 Broadway, Rockridge Heights Date Sampled: 09/12 Tole Strategy Part (26) 322 Part Sampled: 09/12 Date Received: 09/14 Light Gases* Total mathematicants Light Gases* Matrix Initial Pressure Final Pressure Oxygen SS-7 Soil Gas 13.26 26.44 19 SG-8 Soil Gas 11.88 23.67 177 SG-10 Soil Gas 11.88 23.67 177 SG-610 Soil Gas 12.67 2.24 20 Soil Gas 12.67 2.24 20 SG-1 Soil Gas 12.67 2.24 20 So</td> <td>When Quality Counts" bitp://www.mecampbell.com/ E-mail: maine mecampbell.com Environmental Sves., Inc. Client Project ID: \$175 Broadway. Date Sampled: $09/12/12$ ranklin Street, Ste. 200 Client Contact: Tina De La Fuente Date Extracted: $09/14/12$ d. CA 94612 Client P.O.: Date Sampled: $09/14/12$ Interface Street Str</td> <td>Number of the section of the sectin section of the sectin section the section of the sec</td>	The Clipping Strategy Part (25) 322 When Quality Counts " Toll the Clipping Strategy 25) 322 Improvemental Sves., Inc. Client Project ID: 5175 Broadway, Rockridge Heights Date Sampled: 09/12 Tole Strategy Part (26) 322 Part Sampled: 09/12 Date Received: 09/14 Light Gases* Total mathematicants Light Gases* Matrix Initial Pressure Final Pressure Oxygen SS-7 Soil Gas 13.26 26.44 19 SG-8 Soil Gas 11.88 23.67 177 SG-10 Soil Gas 11.88 23.67 177 SG-610 Soil Gas 12.67 2.24 20 Soil Gas 12.67 2.24 20 SG-1 Soil Gas 12.67 2.24 20 So	When Quality Counts" bitp://www.mecampbell.com/ E-mail: maine mecampbell.com Environmental Sves., Inc. Client Project ID: \$175 Broadway. Date Sampled: $09/12/12$ ranklin Street, Ste. 200 Client Contact: Tina De La Fuente Date Extracted: $09/14/12$ d. CA 94612 Client P.O.: Date Sampled: $09/14/12$ Interface Street Str	Number of the section of the sectin section of the sectin section the section of the sec	

Angela Rydelius, Lab Manager

() ()	McCampbell Ar "When Quality		al, Inc.	Toll F	ee Telephor	Pass Road, Pittsburg, CA 94565-1 ne: (877) 252-9262 / Fax: (925) 25 pbell.com / E-mail: main@mccamp	2-9269		
Pange	ea Environmental Svcs., Inc.			5175 Broadwa	ıy,	Date Sampled: 09/1	2/12		
1710	Franklin Street, Ste. 200	KOCKT	idge Heights			Date Received: 09/1	3/12		
		Client	Contact: Tin	a De La Fuent	e	Date Extracted: 09/1	4/12-09/1	7/12	
Oakla	und, CA 94612	Client	P.O.:			Date Analyzed: 09/1-	4/12-09/1	7/12	
Extractio	on method: TO15			heck Compou			Work	Order: 1	209315
Lab ID	Client ID	Matrix	Initial Pressure	Final Pressure		Isopropyl Alcohol	DF	% SS	Comments
001A	SS-7	Soil Gas	13.26	26.44		ND	1	N/A	
003A	SG-8	Soil Gas	12.46	24.82		ND	1	N/A	
005A	SG-11	Soil Gas	11.88	23.67		ND	1	N/A	
007A	SG-10	Soil Gas	12.29	24.48		54	1	N/A	
009A	SG-9	Soil Gas	11.75	23.41		ND	1	N/A	
011A	SS-2	Soil Gas	12.36	24.62		ND	1	N/A	
013A	SS-1	Soil Gas	12.67	25.24		ND	1	N/A	
	Reporting Limit for DF =1; ND means not detected at or	W	psia	psia	NA		NA		
	above the reporting limit	SoilGas	psia	psia		50		I	ug/m³

ND means not detected above the reporting limit/method detection limit; N/A means analyte not applicable to this analysis.

The (liquid) Leak Check reference is:

DTSC, Advisory-Active Soil Gas Investigations, April 2012, page 17, section 4.2.2.1:

"The laboratory reports should quantify and annotate all detections of the leak check compound at the reporting limit of the target analytes."

%SS = Percent Recovery of Surrogate Standard DF = Dilution Factor



			Inc.		Toll Free Telepho	Pass Road, Pittsburg, CA ne: (877) 252-9262 / Fax: bbell.com / E-mail: main@	(925) 252-9269	
Pangea Environmental Svcs., Inc.				5175	Broadway,	Date Sampled:	09/12/12	
1710 Franklin Street, Ste. 200		Rockridg	ge Heights			Date Received:	09/13/12	
1, 10 1 minin 2 4 6 6 , 2 6 6 2 6 6		Client Co	ontact: Ti	na De I	La Fuente	Date Extracted:	09/14/12-0	9/17/12
Oakland, CA 94612		Client P.	0.:			Date Analyzed:	09/14/12-0	9/17/12
Extraction Method: TO15	ГРН д		tile Organ		npounds in µg/ı	n ^{3*}	Work Order:	1209315
Lab ID	12093	15-001A	1209315-	003A	1209315-005A	1209315-007A		
Client ID	S	SS-7	SG-8	3	SG-11	SG-10	-	
Matrix	So	il Gas	Soil C	as	Soil Gas	Soil Gas	Reporting DF and Press	=1
Initial Pressure (psia)	1	3.26	12.4	5	11.88	12.29	(Final/In	
Final Pressure (psia)	2	6.44	24.8	2	23.67	24.48	-	
DF		1	1		1	1	Soil Gas W	
Compound				Conce	entration		µg/m³	ug/L
Benzene		ND	1	8	8.9	9.6	6.5	NA
Ethylbenzene		ND	ND		ND	ND	8.8	NA
Naphthalene		ND	ND		ND	ND	11	NA
Toluene		ND	ND		ND	ND	7.7	NA
TPH(g)		ND	72	200	4000	ND	1800	NA
Xylenes, Total		ND	ND		ND	ND	27	NA
		Surro	ogate Reco	overies	(%)			
%SS1:		93	96		94	91		
%SS2:		113	83		93	85		
%SS3:		112	102		90	87		
Comments								
*vapor samples are reported in µg/m ³ .								
ND means not detected above the reporting h	imit/met	hod detection	n limit; N/A	means ai	nalyte not applicable	to this analysis.		
# surrogate diluted out of range or surrogate	coelutes	with another	peak.					
%SS = Percent Recovery of Surrogate Standa DF = Dilution Factor	ard							

DF = Dilution Factor

Angela Rydelius, Lab Manager

			<u>Inc.</u>		Toll Free Telepho	Pass Road, Pittsburg, CA ne: (877) 252-9262 / Fax: pbell.com / E-mail: main@	(925) 252-9269	
Pangea Environmental Svcs., Inc.					Broadway,	Date Sampled:	09/12/12	
1710 Franklin Street, Ste. 200		Rockridg	ge Heights			Date Received:	09/13/12	
1, 10 1 minin 2 a con, 200 200		Client Co	ontact: Ti	na De I	La Fuente	Date Extracted:	09/14/12-0	9/17/12
Oakland, CA 94612		Client P.	0.:			Date Analyzed:	09/14/12-0	9/17/12
Extraction Method: TO15	TPH g		tile Organ		npounds in µg/ı	n ^{3*}	Work Order:	1209315
Lab ID	12093	15-009A	1209315-	-011A	1209315-013A			
Client ID	S	SG-9	SS-2	2	SS-1			
Matrix	So	il Gas	Soil C	las	Soil Gas		Reporting DF and Press	=1
Initial Pressure (psia)	1	1.75	12.3	6	12.67		(Final/In	
Final Pressure (psia)	2	3.41	24.6	2	25.24		-	
DF		1	1		1		Soil Gas	W
Compound				Conce	entration		µg/m³	ug/L
Benzene		ND	ND		ND		6.5	NA
Ethylbenzene		ND	ND		ND		8.8	NA
Naphthalene		ND	ND		ND		11	NA
Toluene		ND	ND		ND		7.7	NA
TPH(g)		ND	ND		ND		1800	NA
Xylenes, Total		ND	ND		ND		27	NA
		Surro	ogate Rec	overies	s (%)			
%SS1:		92	93		89			
%SS2:		102	73		120			
%SS3:		85	89		97			
Comments								
*vapor samples are reported in μg/m ³ .								
ND means not detected above the reporting l	imit/met	hod detection	n limit; N/A	means ai	nalyte not applicable	to this analysis.		
# surrogate diluted out of range or surrogate	coelutes	with another	peak.					
%SS = Percent Recovery of Surrogate Stands DF = Dilution Factor	ard							

Angela Rydelius, Lab Manager



QC SUMMARY REPORT FOR ASTM D 1946-90

ction: ASTM D 1946	-90				\$	Spiked Sam	ple ID:	N/A
Sample	Spiked	MS	MSD	MS-MSD	LCS	Acce	eptance	Criteria (%)
µL/L	μL/L	% Rec.	% Rec.	% RPD	% Rec.	MS / MSD	RPD	LCS
N/A	7000	N/A	N/A	N/A	92.9	N/A	N/A	70 - 130
	Sample µL/L	Sample Spiked µL/L µL/L	Sample Spiked MS µL/L µL/L % Rec.	Sample Spiked MS MSD μL/L μL/L % Rec. % Rec.	Sample Spiked MS MSD MS-MSD µL/L µL/L % Rec. % Rec. % RPD	Sample Spiked MS MSD MS-MSD LCS μL/L μL/L % Rec. % Rec. % RPD % Rec.	Sample Spiked MS MSD MS-MSD LCS According µL/L µL/L % Rec. % Rec. % RPD % Rec. MS / MSD	Sample Spiked MS MSD MS-MSD LCS Acceptance μL/L μL/L % Rec. % Rec. % RPD % Rec. MS / MSD RPD

BATCH 70796 SUMMARY

Lab ID	Date Sampled	Date Extracted	Date Analyzed	Lab ID	Date Sampled	Date Extracted	Date Analyzed
1209315-001A	09/12/12 10:42 AM	09/14/12	09/14/12 1:47 PM	1209315-003A	09/12/12 11:41 AM	09/14/12	09/14/12 1:58 PM
1209315-005A	09/12/12 12:26 PM	09/14/12	09/14/12 2:08 PM	1209315-007A	09/12/12 1:11 PM	09/14/12	09/14/12 2:19 PM
1209315-009A	09/12/12 1:51 PM	09/14/12	09/14/12 2:30 PM	1209315-011A	09/12/12 4:08 PM	09/14/12	09/14/12 2:40 PM
1209315-013A	09/12/12 4:27 PM	09/14/12	09/14/12 2:51 PM				

LCS = Laboratory Control Sample





QC SUMMARY REPORT FOR TO15 QC Matrix: Soilgas BatchID: 70768

WorkOrder: 1209315 W.O. Sample Matrix: Soilgas EPA Method: TO15 Extraction: TO15 Spiked Sample ID: N/A Sample Spiked MS MSD MS-MSD LCS Acceptance Criteria (%) Analyte nL/L nL/L % Rec. % Rec. % RPD % Rec. MS / MSD RPD LCS N/A 25 N/A N/A 60 - 140 Acrylonitrile N/A N/A N/A 115 tert-Amyl methyl ether (TAME) N/A 25 N/A N/A N/A 133 N/A N/A 60 - 140 N/A 25 N/A N/A N/A 116 N/A N/A 60 - 140 Benzene Benzyl chloride N/A 25 N/A N/A N/A 89.2 N/A N/A 60 - 140 Bromodichloromethane N/A 25 N/A N/A N/A 116 N/A N/A 60 - 140 N/A 25 N/A N/A 88.4 N/A N/A 60 - 140 Bromoform N/A t-Butyl alcohol (TBA) N/A 25 N/A N/A N/A 89.4 N/A N/A 60 - 140 Carbon Disulfide N/A 25 N/A N/A N/A 97.8 N/A N/A 60 - 140 25 N/A Carbon Tetrachloride N/A N/A N/A N/A 94.8 N/A 60 - 140 Chlorobenzene N/A 25 N/A N/A N/A 100 N/A N/A 60 - 140 Chloroethane N/A 25 N/A N/A N/A 93.9 N/A N/A 60 - 140 N/A N/A Chloroform 25 N/A N/A N/A 94 4 N/A 60 - 140 Chloromethane N/A 25 N/A N/A N/A 107 N/A N/A 60 - 140 N/A 25 N/A N/A N/A N/A 60 - 140 Dibromochloromethane N/A 113 1,2-Dibromo-3-chloropropane N/A 25 N/A N/A N/A 92.2 N/A N/A 60 - 140 N/A 25 N/A N/A 106 N/A N/A 60 - 140 1,2-Dibromoethane (EDB) N/A 1,3-Dichlorobenzene N/A 25 N/A N/A N/A 81.1 N/A N/A 60 - 140 N/A N/A 1,4-Dichlorobenzene N/A 25 N/A N/A N/A 78.5 60 - 140 Dichlorodifluoromethane N/A 25 N/A 80.3 N/A N/A N/A N/A 60 - 140 1,1-Dichloroethane N/A 25 N/A N/A N/A 95.7 N/A N/A 60 - 140 1,2-Dichloroethane (1,2-DCA) N/A 25 N/A N/A N/A 96.3 N/A N/A 60 - 140 cis-1,2-Dichloroethene N/A 25 N/A N/A N/A 98.8 N/A N/A 60 - 140 trans-1,2-Dichloroethene N/A 25 N/A N/A 95.9 N/A N/A N/A 60 - 140 1,2-Dichloropropane N/A 25 N/A N/A N/A 127 N/A N/A 60 - 140 cis-1,3-Dichloropropene N/A 25 N/A N/A N/A 119 N/A N/A 60 - 140 trans-1,3-Dichloropropene N/A 25 N/A N/A N/A 120 N/A N/A 60 - 140 1,2-Dichloro-1,1,2,2-tetrafluoroethane N/A 25 N/A N/A N/A 94.1 N/A N/A 60 - 140 Diisopropyl ether (DIPE) N/A 25 N/A N/A N/A 128 N/A N/A 60 - 140 1,4-Dioxane N/A 25 N/A N/A N/A 129 N/A N/A 60 - 140 Ethyl acetate N/A 25 N/A N/A N/A 132 N/A N/A 60 - 140 25 134 N/A Ethyl tert-butyl ether (ETBE) N/A N/A N/A N/A N/A 60 - 140

LCS = Laboratory Control Sample

Laboratory extraction solvents such as methylene chloride and acetone may occasionally appear in the method blank at low levels.

JR QA/QC Officer



OC SUMMARY REPORT FOR TO15 QC Matrix: Soilgas BatchID: 70768


W.O. Sample Matrix: Soilgas Spiked Sample ID: N/A EPA Method: TO15 Extraction: TO15 Sample Spiked MS MSD MS-MSD LCS Acceptance Criteria (%) Analyte nL/L nL/L % Rec. % Rec. % RPD % Rec. MS / MSD RPD LCS Ethylbenzene N/A 25 N/A N/A N/A 93.6 N/A N/A 60 - 140 Freon 113 N/A 25 N/A N/A N/A 87.5 N/A N/A 60 - 140 Hexachlorobutadiene N/A 25 N/A N/A N/A 78.6 N/A N/A 60 - 140 4-Methyl-2-pentanone (MIBK) N/A 25 N/A N/A N/A 106 N/A N/A 60 - 140 Methyl-t-butyl ether (MTBE) N/A 25 N/A N/A N/A 113 N/A N/A 60 - 140 Methylene chloride N/A 25 N/A N/A N/A 85.2 N/A N/A 60 - 140 N/A Naphthalene N/A 25 N/A N/A N/A 81.9 N/A 60 - 140 Styrene 93.3 N/A 25 N/A N/A N/A N/A N/A 60 - 140 25 N/A 1,1,1,2-Tetrachloroethane N/A N/A N/A N/A 89 N/A 60 - 140 1.1.2.2-Tetrachloroethane N/A 25 N/A N/A N/A 93.8 N/A N/A 60 - 140 Tetrachloroethene N/A 25 N/A N/A N/A 99.5 N/A N/A 60 - 140 N/A 25 N/A Tetrahydrofuran N/A N/A N/A 131 N/A 60 - 140 Toluene N/A 25 N/A N/A N/A 116 N/A N/A 60 - 140 1,2,4-Trichlorobenzene N/A 25 N/A N/A N/A 89.7 N/A N/A 60 - 140 1,1,1-Trichloroethane N/A 25 N/A N/A N/A 97.5 N/A N/A 60 - 140 1,1,2-Trichloroethane N/A 25 N/A N/A 115 N/A N/A 60 - 140 N/A Trichloroethene N/A 25 N/A N/A N/A 107 N/A N/A 60 - 140 1,2,4-Trimethylbenzene N/A N/A N/A N/A N/A N/A 60 - 140 25 86 1,3,5-Trimethylbenzene N/A 25 N/A N/A N/A 80.4 N/A N/A 60 - 140 Vinyl Chloride N/A 25 N/A N/A N/A 108 N/A N/A 60 - 140 %SS1: N/A 500 N/A 95 N/A N/A 60 - 140 N/A N/A %SS2: N/A 500 N/A N/A N/A 107 N/A N/A 60 - 140 N/A 500 82 N/A N/A 60 - 140 %SS3: N/A N/A N/A All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:

LCS = Laboratory Control Sample

NONE

Laboratory extraction solvents such as methylene chloride and acetone may occasionally appear in the method blank at low levels.

DHS ELAP Certification 1644



WorkOrder: 1209315




y Counts'' nup.//www.inccampoen.com/ E-mail: m

QC SUMMARY REPORT FOR TO15

QC Matrix: Soilgas BatchID: 70768 WorkOrder: 1209315 W.O. Sample Matrix: Soilgas Spiked Sample ID: N/A EPA Method: TO15 Extraction: TO15 Sample Spiked MS MSD MS-MSD LCS Acceptance Criteria (%) Analyte MS/MSD RPD LCS nL/L nL/L % Rec. % Rec. % RPD % Rec. BATCH 70768 SUMMARY Lab ID Date Sampled Date Extracted Date Analyzed Lab ID **Date Sampled** Date Extracted Date Analyzed 1209315-001A 09/12/12 10:42 AM 09/14/1209/14/12 9:37 PM 1209315-003A 09/12/12 11:41 AM 09/14/12 09/14/12 10:18 PM 1209315-005A 1209315-007A 09/14/12 09/14/12 11:39 PM 09/12/12 12:26 PM 09/14/12 09/14/12 10:59 PM 09/12/12 1:11 PM 1209315-009A 1209315-011A 09/12/12 4:08 PM 09/15/12 09/15/12 1:01 AM 09/12/12 1:51 PM 09/15/12 09/15/12 12:20 AM 1209315-013A 09/12/12 4:27 PM 09/17/12 09/17/12 7:23 PM

LCS = Laboratory Control Sample

Laboratory extraction solvents such as methylene chloride and acetone may occasionally appear in the method blank at low levels.





McCampbell Analytical, Inc. "When Quality Counts"

Analytical Report

Pangea Environmental Svcs., Inc.	Client Project ID: 5175 Broadway, Rockridge Heights	Date Sampled:	09/06/12
1710 Franklin Street, Ste. 200		Date Received:	09/10/12
1710 Frankin Subot, Sto. 200	Client Contact: Tina De La Fuente	Date Reported:	09/14/12
Oakland, CA 94612	Client P.O.:	Date Completed:	09/14/12

WorkOrder: 1209184

September 14, 2012

Dear Tina:

Enclosed within are:

- 1) The results of the **4** analyzed samples from your project: **5175 Broadway, Rockridge Heights,**
- 2) QC data for the above samples, and
- 3) A copy of the chain of custody.

All analyses were completed satisfactorily and all QC samples were found to be within our control limits. If you have any questions or concerns, please feel free to give me a call. Thank you for choosing McCampbell Analytical Laboratories for your analytical needs.

Best regards,

Angela Rydelius Laboratory Manager McCampbell Analytical, Inc.

The analytical results relate only to the items tested.

				12	20	9	18	31	1																											
We	IcCAMP osite: <u>www.mc</u> ne: (925) 252	1534 Pitts campbell	Willow Pas burg, CA 9	ss Rd. 4565	ain@n	ncca		ell.c	om	269	9									ND	TI	MI	2	R		4	24 H		- C 4		R No	72	D 2 HR	5 D.	AY	*
Report To: Tina	the second s	7404	I	Sill To	p: Pa	and the second se	and the second distance	1							-				-	A	naly	vsis	Rec	nues	t					-	(Oth	er	Con	ment	-
Company: Pange		ntal Ser			. 14	uge	14		192						-							313		u.c.							È	T		Con	ment	-
1710 Franklin Str								_	-						1.2							•				- 64								Filte	r	
17TO FIGHAMIN SU	cet, oune 200	, ouniu			: tdela	afue	nte(na	noe	aei	nv.	com	1	-	TBF																			Sam		
Tele: (510) 836-3'	702				(510)			-	1.5.			con			8015)/MTBE																				Metals	ł I
Project #: 5175 Bi					t Nar				ge	Hei	ight	ts				dn t	lene		-															anal Yes		1
Project Location:		vav. Oak							B		B				20+	lear	htha		collo															105	140	
Sampler Signatur		- 4	a	F				-		_					2/80	gel c	Nap		2																	
		SAM	PLING		iers		MA	TR	x			ETI			as Gas (602/8020	//silica	BTEX,		H							2										
SAMPLE ID (Field Point Name)	LOCATION	Date	Time	# Containers	Type Containers	Water	Soil	Air	Sludge	Uther	ICE	HCL	HNO ₃	Other	BTEX & TPH as	TPHd (8015) w/silica gel clean up	TO-15 for TPHg, BTEX, Naphthalene	Percent Oxygen	TSOPOPY																	
SS-3	SS-3	9/6	1146	1	Su			X		T							Х	X	X											\square		+				-
SS-3 Leak Check	SS-3	9/6	1147	1	Su	T		x																										HOI	D	
SS-4	SS-4	9/6	1239	1	Su			X		T							Х	X	X									-								
SS-4 Leak Check	SS-4	9/6	1238	1	Su			x		1							-													\square				HOI	D	
SS-5 *	SS-5	9/6	1336	1	Su			X		T							Х	X	×																	
SS-5 Leak Check	SS-5	9/6	1338	1	Su			x		T																						T		HOI	D	
SS-6	SS-6	9/6	1453	1	Su			X		T							Х	Х	X																	1
SS-6 Leak Check	SS-6	9/6	1454	1	Su			x													2													HOI	D	
																			1																	
											-	1									_															_
Relinquished By:	ad	Dete:	Time:	-	ived By	2	2	<	-	_	7	F	1	4	HE.	OD O	PAC	EA	BSEN			16	av	иP	lea	5 1	ecc	enve	om 2	a	TS: u/	12				
Relinquished By:	- j	Date:	Time: 1400,		Fred B	a	N	a	1	1	2	2	5		API	PRO	PRI	TE	ED IN CON LAB	TAIN		_	-													
Relinquished By:		Date:	Time:	Rece	ived By	:									PRI	ESEI	RVA	LION	VOA	s	0&0		MET H<2		6 0	THE	R					1				

McCampbell Analytical, Inc.

Pittsburg, CA 94565-1701



Page 1 of 1

(925) 252-9262				WorkO	rder: 1209184	Clie	ntCode: PEC)	
	WaterTrax	WriteOn	✓ EDF	Excel	EQuIS	🖌 Email	✓ HardCo	by ThirdParty	☐ J-flag
Report to:				Bi	II to:		F	Requested TAT:	5 days
Tina De La Fuente	Email: t	tdelafuente@par	ngeaenv.com		Bob Clark-Ride	dell			
Pangea Environmental Svcs., Inc.	CC:				Pangea Enviro	nmental Svcs	s., Inc.		
1710 Franklin Street, Ste. 200	PO:				1710 Franklin	Street, Ste. 2	₀₀ 1	Date Received:	09/10/2012
Oakland, CA 94612 (415) 218-7247 FAX: (510) 836-3709		5175 Broadway,	Rockridge Height	8	Oakland, CA 9	4612	1	Date Printed:	09/12/2012

								Re	quested	l Tests (See leg	end bel	ow)			
Lab ID	Client ID	Matrix	Collection Date	Hold	1	2	3	4	5	6	7	8	9	10	11	12
1209184-001	SS-3	Soil Gas	9/6/2012 11:46		A	А	A									
1209184-003	SS-4	Soil Gas	9/6/2012 12:39		А		А									
1209184-005	SS-5	Soil Gas	9/6/2012 13:36		А		А	-								
1209184-007	SS-6	Soil Gas	9/6/2012 14:53		А		А									

Test Legend:

1	LG_SUMMA_SOILGAS(%)
6	
11	

2	PREDF REPORT
7	
12	

3	TO15+GAS_SOIL(UG/M3)
8	

4	
9	

5	
10	

The following SampIDs: 001A, 003A, 005A, 007A contain testgroup.

Comments:

NOTE: Soil samples are discarded 60 days after results are reported unless other arrangements are made (Water samples are 30 days). Hazardous samples will be returned to client or disposed of at client expense.

Prepared by: Maria Venegas



Sample Receipt Checklist

Client Name:	Pangea Environmer	ntal Svcs., Inc.			Date a	nd Time Received:	:27:52 AM	
Project Name:	5175 Broadway, Ro	ckridge Heights			LogIn F	Reviewed by:		Maria Venegas
WorkOrder N°:	1209184	Matrix: Soil Gas			Carrier	: <u>Rob Pringle (M</u>	AI Courier)	
		<u>Cha</u>	in of Cu	ustody (COC	:) Informati	ion		
Chain of custody	present?		Yes	✓	No			
Chain of custody	signed when relinquis	shed and received?	Yes	✓	No 🗌			
Chain of custody	agrees with sample la	abels?	Yes	✓	No 🗌			
Sample IDs note	d by Client on COC?		Yes	✓	No			
Date and Time of	f collection noted by C	Client on COC?	Yes	✓	No 🗌			
Sampler's name	noted on COC?		Yes	✓	No 🗌			
			Sample	e Receipt Inf	ormation			
Custody seals int	tact on shipping conta	iner/cooler?	Yes		No 🗌		NA 🗹	
Shipping contain	er/cooler in good cond	dition?	Yes		No			
Samples in prope	er containers/bottles?		Yes		No 🗌			
Sample containe	rs intact?		Yes	✓	No			
Sufficient sample	e volume for indicated	test?	Yes	✓	No 🗌			
		Sample Pres	servatio	n and Hold	<u>Time (HT) l</u>	Information		
All samples recei	ived within holding tim	ie?	Yes	✓	No 🗌			
Container/Temp	Blank temperature		Coole	er Temp:			NA 🖌	
Water - VOA vial	s have zero headspac	ce / no bubbles?	Yes		No 🗌	No VOA vials submi	itted 🗹	
Sample labels ch	necked for correct pres	servation?	Yes		No			
Metal - pH accep	table upon receipt (p⊦	H<2)?	Yes		No 🗌		NA 🗹	
Samples Receive	ed on Ice?		Yes		No 🗹			

* NOTE: If the "No" box is checked, see comments below.

Comments:

	Analytical, Inc. htty Counts''	1534 Willow Pass Road, Pittsburg, CA 94565-1701 Toll Free Telephone: (877) 252-9262 / Fax: (925) 252-9269 http://www.mccampbell.com / E-mail: main@mccampbell.com					
Pangea Environmental Svcs., Inc.	5	Broadway,	Date Sampled:	09/06/12			
1710 Franklin Street, Ste. 200	Rockridge Heights		Date Received:	09/10/12			
Oakland, CA 94612	Client Contact: Tina De L	La Fuente	Date Reported: 09/14/12				
Oukland, CAY 94012	Client P.O.:		Date Completed: 09/14/12				

Work Order: 1209184

September 14, 2012

CASE NARRATIVE REGARDING TO-15 ANALYSIS

All summa canisters are EVACUATED 5 days after the reporting of the results. Please call or email if a longer retention time is required.

In an effort to attain the lowest reporting limits possible for the majority of the TO-15 target list, high level compounds may be analyzed using EPA Method 8260B.

Polymer (Tedlar) bags are not recommended for TO15 samples. The dissadvantages are listed in Appendix B of the DTSC Advisory of April 2012.



	McCampbell Ar		al <u>, Inc.</u>	Toll F	Free Telepho	Pass Road, Pittsburg, CA 94565-17 ne: (877) 252-9262 / Fax: (925) 253 pbell.com / E-mail: main@mccamp	2-9269					
Pangea	Environmental Svcs., Inc.		Project ID:	5175 Broadwa	ay,	Date Sampled: 09/06	5/12					
1710 F	ranklin Street, Ste. 200	Rockri	idge Heights		Date Received: 09/10/12							
1/101	Talikili Street, Ste. 200	Client	Contact: Tina	a De La Fuen	te	Date Extracted: 09/10)/12-09/1	2/12				
Oaklan	d, CA 94612	Client	P.O.:			Date Analyzed: 09/10)/12-09/12	2/12				
Extraction	method: ASTM D 1946-90			ght Gases* ical methods: AS	STM D 1946	5-90	Work	Order: 12	209184			
Lab ID	Client ID	Matrix	Initial Pressure			Oxygen	DF	% SS	Comments			
001A	SS- 3	Soil Gas	13.06	26.06		20	1	N/A				
003A	SS-4	Soil Gas	12.68	25.26		19	1	N/A				
005A	SS-5	Soil Gas	12.81	25.52		17	1	N/A				
007A	SS-6	Soil Gas	12.80	25.50		18	1	N/A				
	Reporting Limit for DF =1; ND means not detected at or	W	psia	psia		NA			NA			
	above the reporting limit	SoilGas	psia	psia		0.4			%			
%SS = Pe	or samples are reported in %. rcent Recovery of Surrogate Standard tion Factor											
L												

DHS ELAP Certification 1644

Angela Rydelius, Lab Manager

	McCampbell A "When Qualit		al, Inc.	1534 Willow Pass Road, Pittsburg, CA 94565-1701 Toll Free Telephone: (877) 252-9262 / Fax: (925) 252-9269 http://www.mccampbell.com / E-mail: main@mccampbell.com							
Pangea En	vironmental Svcs., Inc.			5175 Broadway,	Date Sampled: 09/0	6/12					
1710 Franl	klin Street, Ste. 200	Rockr	idge Heights		0/12						
1,10114	ann 54000, 500. 200	Client	Contact: Tin	a De La Fuente	La Fuente Date Extracted: 09/12/12-09/14/12						
Oakland, C	CA 94612	Client	P.O.:		Date Analyzed: 09/12	2/12-09/14	4/12				
Extraction meth	nod: TO15			neck Compound* ical methods: TO15		Work	Order: 1	209184			
Lab ID	Client ID	Matrix		Final Pressure	Isopropyl Alcohol	DF	% SS	Comments			
001A	SS-3	Soil Gas	13.06	26.06	ND	1	N/A				
003A	SS-4	Soil Gas	12.68	25.26	ND	1	N/A				
005A	SS-5	Soil Gas	12.81	25.52	ND	1	N/A				
007A	SS-6	Soil Gas	12.80	25.50	ND	1	N/A				
ND	porting Limit for DF =1; means not detected at or	W	psia	psia	NA			NA			
	pove the reporting limit	SoilGas	psia	psia	50		ŀ	ug/m³			

DTSC, Advisory-Active Soil Gas Investigations, April 2012, page 17, section 4.2.2.1:

"The laboratory reports should quantify and annotate all detections of the leak check compound at the reporting limit of the target analytes."

%SS = Percent Recovery of Surrogate Standard DF = Dilution Factor

			<u>Inc.</u>	1534 Willow Pass Road, Pittsburg, CA 94565-1701 Toll Free Telephone: (877) 252-9262 / Fax: (925) 252-9269 http://www.mccampbell.com / E-mail: main@mccampbell.com								
Pangea Environmental Svcs., Inc.					Broadway,	Date Sampled: 09/06/12						
1710 Franklin Street, Ste. 200	I	Rockridg	e Heights			Date Received:	: 09/10/12					
1710 Franklin Street, Ste. 200	(Client Co	ontact: Ti	na De I	La Fuente	Date Extracted:	09/12/12-0	09/14/12				
Oakland, CA 94612		Date Analyzed:	09/12/12-0	09/14/12								
Extraction Method: TO15		1	lytical Method				Work Order:	1209184				
Lab ID	1209184	4-001A	1209184-	-003A	1209184-005A	1209184-007A						
Client ID	SS	-3	SS-4	4	SS-5	SS-6	-					
Matrix	Soil	Gas	Soil C	las	Soil Gas	Soil Gas	Reporting DF and Press	=1				
Initial Pressure (psia)	13.	.06	12.6	8	12.81	12.80	(Final/In					
Final Pressure (psia)	26.	.06	25.2	6	25.52	25.50	-					
DF	1				1	1	Soil Gas	W				
Compound				Conce	entration		µg/m³	ug/L				
Benzene	NI	D	ND		ND	ND	6.5	NA				
Ethylbenzene	NI	D	ND		ND	ND	8.8	NA				
Naphthalene	NI	D	ND		ND	ND	11	NA				
Toluene	NI	D	ND		ND	ND	7.7	NA				
TPH(g)	NI	D	ND		ND	ND	1800	NA				
Xylenes, Total	NI	D	ND		ND	ND	27	NA				
		Surro	gate Reco	overies	(%)							
%SS1:	10)7	97		86	96						
%SS2:	13	39	79		83	118						
%SS3:	11	17	112		80	121						
Comments	c	1										
*vapor samples are reported in µg/m ³ .												
ND means not detected above the reporting l	imit/metho	d detection	n limit; N/A	means ar	alyte not applicable	to this analysis.						
# surrogate diluted out of range or surrogate	coelutes wi	ith another	peak.									
%SS = Percent Recovery of Surrogate Stands DF = Dilution Factor	ard											
c1) surrogate recovery outside of the control	limits due 1	to dilution	/ matrix inte	erference	/ coelution / presenc	e of surrogate compou	ind in the sam	ple				



QC SUMMARY REPORT FOR ASTM D 1946-90

W.O. Sample Matrix: SoilGas QC Matrix: SoilGas					BatchID	: 70712	WorkOrder: 1209184			
EPA Method: ASTM D 1946-90	Extraction: ASTM D 1	946-90				÷	Spiked Sam	ple ID:	N/A	
Analyte	Samp	le Spiked	MS	MSD	MS-MSD	LCS	Acc	eptance	Criteria (%)	
	μL/L	μL/L	% Rec.	% Rec.	% RPD	% Rec.	MS / MSD	RPD	LCS	
Oxygen	N/A	7000	N/A	N/A	N/A	91.9	N/A	N/A	70 - 130	
All target compounds in the Method Blank NONE	t of this extraction batch were	ND less than t	he method	RL with t	ne following	g exceptior	IS:			

BATCH 70712 SUMMARY

Lab ID	Date Sampled	Date Extracted	Date Analyzed	Lab ID	Date Sampled	Date Extracted	Date Analyzed
1209184-001A	09/06/12 11:46 AM	09/10/12	09/10/12 1:48 PM	1209184-003A	09/06/12 12:39 PM	09/10/12	09/10/12 1:58 PM
1209184-005A	09/06/12 1:36 PM	09/12/12	09/12/12 2:00 PM	1209184-007A	09/06/12 2:53 PM	09/10/12	09/10/12 2:09 PM

LCS = Laboratory Control Sample





W.O. Sample Matrix: Soilgas

QC SUMMARY REPORT FOR TO15 QC Matrix: Soilgas BatchID: 70684

WorkOrder: 1209184

EPA Method: TO15	Extraction: TO15					ę	Spiked Sam	ple ID:	N/A
Analyte	Sample	Spiked	MS	MSD	MS-MSD	LCS	Acc	eptance	Criteria (%)
/ thuyto	nL/L	nL/L	% Rec.	% Rec.	% RPD	% Rec.	MS / MSD	RPD	LCS
Acrylonitrile	N/A	25	N/A	N/A	N/A	129	N/A	N/A	60 - 140
tert-Amyl methyl ether (TAME)	N/A	25	N/A	N/A	N/A	91.6	N/A	N/A	60 - 140
Benzene	N/A	25	N/A	N/A	N/A	111	N/A	N/A	60 - 140
Benzyl chloride	N/A	25	N/A	N/A	N/A	103	N/A	N/A	60 - 140
Bromodichloromethane	N/A	25	N/A	N/A	N/A	89.7	N/A	N/A	60 - 140
Bromoform	N/A	25	N/A	N/A	N/A	112	N/A	N/A	60 - 140
t-Butyl alcohol (TBA)	N/A	25	N/A	N/A	N/A	71.1	N/A	N/A	60 - 140
Carbon Disulfide	N/A	25	N/A	N/A	N/A	69.8	N/A	N/A	60 - 140
Carbon Tetrachloride	N/A	25	N/A	N/A	N/A	91.7	N/A	N/A	60 - 140
Chlorobenzene	N/A	25	N/A	N/A	N/A	106	N/A	N/A	60 - 140
Chloroethane	N/A	25	N/A	N/A	N/A	82.4	N/A	N/A	60 - 140
Chloroform	N/A	25	N/A	N/A	N/A	94.9	N/A	N/A	60 - 140
Chloromethane	N/A	25	N/A	N/A	N/A	89.3	N/A	N/A	60 - 140
Dibromochloromethane	N/A	25	N/A	N/A	N/A	111	N/A	N/A	60 - 140
1,2-Dibromo-3-chloropropane	N/A	25	N/A	N/A	N/A	88.2	N/A	N/A	60 - 140
1,2-Dibromoethane (EDB)	N/A	25	N/A	N/A	N/A	110	N/A	N/A	60 - 140
1,3-Dichlorobenzene	N/A	25	N/A	N/A	N/A	103	N/A	N/A	60 - 140
1,4-Dichlorobenzene	N/A	25	N/A	N/A	N/A	100	N/A	N/A	60 - 140
Dichlorodifluoromethane	N/A	25	N/A	N/A	N/A	77.7	N/A	N/A	60 - 140
1,1-Dichloroethane	N/A	25	N/A	N/A	N/A	92.4	N/A	N/A	60 - 140
1,2-Dichloroethane (1,2-DCA)	N/A	25	N/A	N/A	N/A	90.3	N/A	N/A	60 - 140
cis-1,2-Dichloroethene	N/A	25	N/A	N/A	N/A	101	N/A	N/A	60 - 140
trans-1,2-Dichloroethene	N/A	25	N/A	N/A	N/A	96.1	N/A	N/A	60 - 140
1,2-Dichloropropane	N/A	25	N/A	N/A	N/A	107	N/A	N/A	60 - 140
cis-1,3-Dichloropropene	N/A	25	N/A	N/A	N/A	101	N/A	N/A	60 - 140
trans-1,3-Dichloropropene	N/A	25	N/A	N/A	N/A	97.3	N/A	N/A	60 - 140
1,2-Dichloro-1,1,2,2-tetrafluoroethane	N/A	25	N/A	N/A	N/A	92.7	N/A	N/A	60 - 140
Diisopropyl ether (DIPE)	N/A	25	N/A	N/A	N/A	131	N/A	N/A	60 - 140
1,4-Dioxane	N/A	25	N/A	N/A	N/A	133	N/A	N/A	60 - 140
Ethyl acetate	N/A	25	N/A	N/A	N/A	76.6	N/A	N/A	60 - 140
Ethyl tert-butyl ether (ETBE)	N/A	25	N/A	N/A	N/A	124	N/A	N/A	60 - 140

LCS = Laboratory Control Sample

Laboratory extraction solvents such as methylene chloride and acetone may occasionally appear in the method blank at low levels.

DHS ELAP Certification 1644

R

QA/QC Officer



W.O. Sample Matrix: Soilgas

QC SUMMARY REPORT FOR TO15 QC Matrix: Soilgas BatchID: 70684


WorkOrder: 1209184

EPA Method: TO15	Extraction: TO15			Spiked Sample ID: N/A					
Analyte	Sample	Spiked	MS	MSD	MS-MSD	LCS	Acc	Criteria (%)	
, and yes	nL/L	nL/L	% Rec.	% Rec.	% RPD	% Rec.	MS / MSD	RPD	LCS
Ethylbenzene	N/A	25	N/A	N/A	N/A	98.4	N/A	N/A	60 - 140
Freon 113	N/A	25	N/A	N/A	N/A	86.1	N/A	N/A	60 - 140
Hexachlorobutadiene	N/A	25	N/A	N/A	N/A	106	N/A	N/A	60 - 140
4-Methyl-2-pentanone (MIBK)	N/A	25	N/A	N/A	N/A	110	N/A	N/A	60 - 140
Methyl-t-butyl ether (MTBE)	N/A	25	N/A	N/A	N/A	108	N/A	N/A	60 - 140
Methylene chloride	N/A	25	N/A	N/A	N/A	77.5	N/A	N/A	60 - 140
Naphthalene	N/A	25	N/A	N/A	N/A	96.1	N/A	N/A	60 - 140
Styrene	N/A	25	N/A	N/A	N/A	109	N/A	N/A	60 - 140
1,1,1,2-Tetrachloroethane	N/A	25	N/A	N/A	N/A	89.1	N/A	N/A	60 - 140
1,1,2,2-Tetrachloroethane	N/A	25	N/A	N/A	N/A	115	N/A	N/A	60 - 140
Tetrachloroethene	N/A	25	N/A	N/A	N/A	93.4	N/A	N/A	60 - 140
Tetrahydrofuran	N/A	25	N/A	N/A	N/A	91.4	N/A	N/A	60 - 140
Toluene	N/A	25	N/A	N/A	N/A	97.6	N/A	N/A	60 - 140
1,2,4-Trichlorobenzene	N/A	25	N/A	N/A	N/A	127	N/A	N/A	60 - 140
1,1,1-Trichloroethane	N/A	25	N/A	N/A	N/A	92.7	N/A	N/A	60 - 140
1,1,2-Trichloroethane	N/A	25	N/A	N/A	N/A	107	N/A	N/A	60 - 140
Trichloroethene	N/A	25	N/A	N/A	N/A	104	N/A	N/A	60 - 140
1,2,4-Trimethylbenzene	N/A	25	N/A	N/A	N/A	99.9	N/A	N/A	60 - 140
1,3,5-Trimethylbenzene	N/A	25	N/A	N/A	N/A	91.4	N/A	N/A	60 - 140
Vinyl Chloride	N/A	25	N/A	N/A	N/A	91	N/A	N/A	60 - 140
%SS1:	N/A	500	N/A	N/A	N/A	103	N/A	N/A	60 - 140
%SS2:	N/A	500	N/A	N/A	N/A	86	N/A	N/A	60 - 140
%SS3:	N/A	500	N/A	N/A	N/A	103	N/A	N/A	60 - 140

LCS = Laboratory Control Sample

NONE

Laboratory extraction solvents such as methylene chloride and acetone may occasionally appear in the method blank at low levels.





QC SUMMARY REPORT FOR TO15

W.O. Sample Mat		QC Matrix: Soilgas BatchID: 70684					: 70684	WorkOrder: 1209184			
EPA Method: TC	015	D15					5	Spiked Sam	ple ID:	N/A	
	Sample	Spiked	MS	MSD	ASD MS-MSD LCS Acceptance Criteria			Criteria (%)			
	Analyte		nL/L	nL/L	% Rec.	% Rec.	% RPD	% Rec.	MS / MSD	RPD	LCS
			BATCH 7	'0684 SU	MMARY						
Lab ID	Date Sampled	Date Extracted	Date Analy	yzed	Lab ID		Date S	Sampled	Date Ext	racted	Date Analyzed
1209184-001A	09/06/12 11:46 AM	09/12/12	09/12/12 5:	18 AM	1209184-0	001A	09/06/	12 11:46 A	M 09/1	2/12	09/12/12 5:18 AM
1209184-003A	09/06/12 12:39 PM	09/12/12	09/12/12 6:	00 AM	1209184-0	003A	09/06/	12 12:39 P	M 09/1	2/12	09/12/12 6:00 AM
1209184-005A	09/06/12 1:36 PM	09/14/12	09/14/12 1	:09 PM	1209184-0	005A	09/06	5/12 1:36 P	M 09/1	4/12	09/14/12 1:09 PM
1209184-007A	09/06/12 2:53 PM	09/12/12	09/12/12 6:	41 AM	1209184-0	007A	09/06	5/12 2:53 P	M 09/1	2/12	09/12/12 6:41 AM

LCS = Laboratory Control Sample

Laboratory extraction solvents such as methylene chloride and acetone may occasionally appear in the method blank at low levels.

