



2078

July 14, 1999
Project 20805-190.002

Mr. Paul Supple
ARCO Products Company
PO Box 6549
Moraga, California 94570

Re: Quarterly Groundwater Monitoring Report, Second Quarter 1999, for ARCO Service Station No. 0374, located at 6407 Telegraph Avenue, Oakland, California

Dear Mr. Supple:

Pinnacle Environmental Solutions, a division of EMCON (Pinnacle), is submitting the attached report which presents the results of the second quarter 1999 groundwater monitoring program at ARCO Products Company (ARCO) Service Station No. 0374, located at 6407 Telegraph Avenue, Oakland, California. The monitoring program complies with the Regional Water Quality Control Board, San Francisco Bay Region, requirements regarding underground tank investigations.


LIMITATIONS


No monitoring event is thorough enough to describe all geologic and hydrogeologic conditions of interest at a given site. If conditions have not been identified during the monitoring event, results should not be construed as a guarantee of the absence of such conditions at the site, but rather as the product of the scope and limitations of work performed during the monitoring event.

Please call if you have questions.

Sincerely,

Pinnacle


Glen VanderVeen
Project Manager

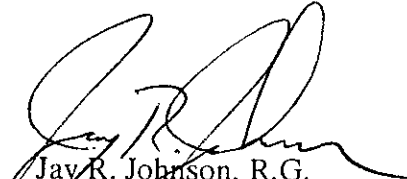
Jay R. Johnson, R.G.
Senior Project Supervisor

99 JUL 15 PM 3:49
ENVIRONMENTAL
PROTECTION

Attachment: Quarterly Groundwater Monitoring Report, Second Quarter 1999

cc: Ms. Susan Hugo, Alameda County Health Care Services Agency
Mr. John Kaiser, Regional Water Quality Control Board - S.F. Bay Region



Date: July 14, 1999

ARCO QUARTERLY GROUNDWATER MONITORING REPORT

Facility No.: 0374 Address: 6407 Telegraph Avenue, Oakland, California
 ARCO Environmental Engineer: Paul Supple
 Consulting Co./Contact Person: Pinnacle Environmental Solutions/Glen VanderVeen
 Consultant Project No.: 20805-190.002
 Primary Agency/Regulatory ID No.: Regional Water Quality Control Board - S.F. Bay Region

WORK PERFORMED THIS QUARTER (SECOND - 1999):

1. Prepared and submitted quarterly groundwater monitoring report for first quarter 1999.
2. Performed quarterly groundwater monitoring and sampling for second quarter 1999.
3. Continued intrinsic bioremediation enhancement at wells MW-3 and MW-4 using oxygen release compound socks.

WORK PROPOSED FOR NEXT QUARTER (THIRD - 1999):

1. Prepare and submit quarterly groundwater monitoring report for second quarter 1999.
2. Perform quarterly groundwater monitoring and sampling for third quarter 1999.
3. Continue intrinsic bioremediation enhancement at wells MW-3 and MW-4.

QUARTERLY MONITORING:

Current Phase of Project: Monitoring/Remediation
 Frequency of Groundwater Sampling: Annual (2nd Quarter): MW-1, MW-2, MW-6
Semi-annual (2nd/4th Quarter): MW-3, MW-4
Quarterly: MW-5
 Frequency of Groundwater Monitoring: Quarterly
 Is Free Product (FP) Present On-Site: No
 FP Recovered this Quarter: None
 Cumulative FP Recovered to Date: None
 Bulk Soil Removed This Quarter: None
 Bulk Soil Removed to Date: None
 Current Remediation Techniques: Bioremediation Enhancement
 Average Depth to Groundwater: 6.7 feet
 Groundwater Flow Direction and Gradient
 (Average): 0.03 ft/ft toward southwest

DISCUSSION:

- TPH-g and benzene concentrations at downgradient perimeter Well MW-5 remained below detection limits this quarter.
- The occurrence of intrinsic bioremediation at the site was documented during third quarter 1996.
- Intrinsic bioremediation enhancement at the off-site wells MW-3 and MW-4 is in progress. Please refer to Attachment D for details.

ATTACHMENTS:

- Table 1 - Groundwater Elevation and Analytical Data
- Table 2 - Groundwater Flow Direction and Gradient
- Figure 1 - Groundwater Analytical Summary Map
- Figure 2 - Groundwater Elevation Contour Map
- Appendix A - Sampling and Analysis Procedures
- Appendix B - Certified Analytical Reports and Chain-of-Custody Documentation
- Appendix C - Field Data Sheets
- Appendix D - Remedial System Performance Summary

Table 1
Groundwater Elevation and Analytical Data
Total Purgeable Petroleum Hydrocarbons
(TPPH as Gasoline, BTEX Compounds, and MTBE)

ARCO Service Station 0374
6407 Telegraph Avenue, Oakland, California

Well Number	Date Gauged/ Sampled	Well Elevation (feet, MSL)	Depth to Water (feet, TOC)	Groundwater Elevation (feet, MSL)	TPPH as Gasoline (ppb)	Benzene (ppb)	Toluene (ppb)	Ethyl- benzene (ppb)	Xylenes (ppb)	MTBE (ppb)	Dissolved Oxygen (ppm)	Purged/ Not Purged (P/NP)	
MW-1	01/31/96	158.91	6.34	152.57	----- Well Sampled Annually -----								
MW-1	04/10/96	158.91	5.82	153.09	----- Well Sampled Annually -----								
MW-1	07/16/96	158.91	7.23	151.68	<50	<0.5	<0.5	<0.5	<0.5	340	NM		
MW-1	10/14/96	158.91	8.34	150.57	----- Well Sampled Annually -----								
MW-1	03/27/97	158.91	6.37	152.54	----- Well Sampled Annually -----								
MW-1	05/27/97	158.91	7.30	151.61	----- Well Sampled Annually -----								
MW-1	08/12/97	158.91	8.22	150.69	<50	<0.5	<0.5	<0.5	<0.5	620	NM		
MW-1	11/17/97	158.91	7.98	150.93	----- Well Sampled Annually -----								
MW-1	03/16/98	158.91	4.94	153.97	----- Well Sampled Annually -----								
MW-1	05/12/98	158.91	5.28	153.63	----- Well Sampled Annually -----								
MW-1	07/27/98	158.91	6.84	152.07	<500	<5	<5	<5	<5	580	0.6	P	
MW-1	10/15/98	158.91	7.32	151.59	----- Well Sampled Annually -----								
MW-1	02/18/99	158.91	6.28	152.63	----- Well Sampled Annually -----								
MW-1	05/24/99	158.91	6.45	152.46	<50	<0.5	<0.5	<0.5	<0.5	1,300	2.0	NP	
MW-2	01/31/96	157.92	6.51	151.41	----- Well Sampled Annually -----								
MW-2	04/10/96	157.92	6.94	150.98	----- Well Sampled Annually -----								
MW-2	07/16/96	157.92	7.73	150.19	<50	1.2	<0.5	<0.5	<0.5	33	NM		
MW-2	10/14/96	157.92	8.35	149.57	----- Well Sampled Annually -----								
MW-2	03/27/97	157.92	7.40	150.52	----- Well Sampled Annually -----								
MW-2	05/27/97	157.92	7.82	150.10	----- Well Sampled Annually -----								
MW-2	08/12/97	157.92	8.29	149.63	<50	<0.5	<0.5	<0.5	<0.5	23	NM		
MW-2	11/17/97	157.92	8.05	149.87	----- Well Sampled Annually -----								
MW-2	03/16/98	157.92	6.45	151.47	----- Well Sampled Annually -----								
MW-2	05/12/98	157.92	6.93	150.99	----- Well Sampled Annually -----								
MW-2	07/27/98	157.92	7.39	150.53	<50	<0.5	<0.5	<0.5	<0.5	<3	0.85	NP	

Table 1
Groundwater Elevation and Analytical Data
Total Purgeable Petroleum Hydrocarbons
(TPPH as Gasoline, BTEX Compounds, and MTBE)

ARCO Service Station 0374
6407 Telegraph Avenue, Oakland, California

Well Number	Date Gauged/ Sampled	Well Elevation (feet, MSL)	Depth to Water (feet, TOC)	Groundwater Elevation (feet, MSL)	TPPH as Gasoline (ppb)	Benzene (ppb)	Toluene (ppb)	Ethyl- benzene (ppb)	Xylenes (ppb)	MTBE (ppb)	Dissolved Oxygen (ppm)	Purged/ Not Purged (P/NP)	
MW-2	10/15/98	157.92	7.67	150.25	----- Well Sampled Annually -----								
MW-2	02/18/99	157.92	6.63	151.29	----- Well Sampled Annually -----								
MW-2	05/24/99	157.92	7.43	150.49	<50	6.3	<0.5	0.7	<0.5	29	3.0	P	
MW-3*	01/31/96	153.64	7.02	146.62	140	20	0.87	11	14	NA	NM		
MW-3*	04/10/96	153.64	7.82	145.82	84	2.4	<0.5	1.9	1.1	NA	NM		
MW-3*	07/16/96	153.64	6.80	146.84	<50	2.2	<0.5	<0.5	<0.5	<2.5	NM		
MW-3*	10/14/96	153.64	7.67	145.97	<50	1.2	<0.5	<0.5	0.81	2.9	NM		
MW-3*	03/27/97	153.64	7.62	146.02	<50	0.94	<0.5	0.9	0.63	<2.5	NM		
MW-3*	05/27/97	153.64	6.72	146.92	----- Well Sampled Semiannually -----								
MW-3*	08/12/97	153.64	8.20	145.44	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NM		
MW-3*	11/17/97	153.64	7.64	146.00	----- Well Sampled Semiannually -----							12.0	
MW-3*	03/18/98	153.64	5.14	148.50	<50	<0.5	<0.5	<0.5	<0.5	<3	4.0	P	
MW-3*	05/12/98	153.64	5.53	148.11	----- Well Sampled Semiannually -----								
MW-3*	07/27/98	153.64	7.63	146.01	74	<0.5	<0.5	<0.5	<0.5	<3	1.7	NP	
MW-3*	10/15/98	153.64	7.46	146.18	----- Well Sampled Semiannually -----								
MW-3*	02/18/99	153.64	5.85	147.79	----- Well Not Sampled -----								
MW-3*	05/24/99	153.64	7.00	146.64	<50	<0.5	<0.5	<0.5	<0.5	4	6.0	NP	
MW-4	01/31/96	156.53	5.64	150.89	230	23	2.2	3.7	32	NA	NM		
MW-4	04/10/96	156.53	6.66	149.87	7,300	1,600	350	350	830	NA	NM		
MW-4	07/16/96	156.53	7.73	148.80	5,600	1,100	160	240	520	150	NM		
MW-4	10/14/96	156.53	8.55	147.98	4,500	860	72	160	340	<62	NM		
MW-4	03/27/97	156.53	7.15	149.38	25,000	5,200	760	850	2,600	<250	NM		
MW-4	05/27/97	156.53	7.75	148.78	----- Well Sampled Semiannually -----								
MW-4	08/12/97	156.53	8.46	148.07	4,800	950	40	140	210	170	NM		

Table 1
Groundwater Elevation and Analytical Data
Total Purgeable Petroleum Hydrocarbons
(TPPH as Gasoline, BTEX Compounds, and MTBE)

ARCO Service Station 0374
6407 Telegraph Avenue, Oakland, California

Well Number	Date Gauged/ Sampled	Well Elevation (feet, MSL)	Depth to Water (feet, TOC)	Groundwater Elevation (feet, MSL)	TPPH as Gasoline (ppb)	Benzene (ppb)	Toluene (ppb)	Ethyl- benzene (ppb)	Xylenes (ppb)	MTBE (ppb)	Dissolved Oxygen (ppm)	Purged/ Not Purged (P/NP)	
MW-4	11/17/97	156.53	8.24	148.29	----- Well Sampled Semiannually -----								
MW-4	03/16/98	156.53	5.32	151.21	<50	<0.5	<0.5	<0.5	<0.5	<3	1.5	P	
MW-4	05/12/98	156.53	6.38	150.15	----- Well Sampled Semiannually -----								
MW-4	07/27/98	156.53	7.36	149.17	21,000	6,100	390	810	1,600	<300	0.5	NP	
MW-4	10/15/98	156.53	8.30	148.23	----- Well Sampled Semiannually -----								
MW-4	02/18/99	156.53	4.39	152.14	----- Well Not Sampled -----								
MW-4	05/24/99	156.53	7.45	149.08	18,000	5,600	350	410	1,300	<300	1.0	NP	
MW-5	01/31/96	151.33	8.64	142.69	<50	<0.5	<0.5	<0.5	<0.5	NA	NM		
MW-5	04/10/96	151.33	N/A	--	<50	<0.5	<0.5	<0.5	<0.5	NA	NM		
MW-5	07/16/96	151.33	8.15	143.18	<50	0.79	1.3	<0.5	<0.5	<2.5	NM		
MW-5	10/14/96	151.33	7.92	143.41	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NM		
MW-5	03/27/97	151.33	7.75	143.58	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NM		
MW-5	05/27/97	151.33	8.16	143.17	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NM		
MW-5	08/12/97	151.33	----- Well Inaccessible -----										
MW-5	11/17/97	151.33	8.75	142.58	<50	<0.5	<0.5	<0.5	<0.5	<2.5	4.0	NP	
MW-5	03/16/98	151.33	6.90	144.43	<50	<0.5	<0.5	<0.5	<0.5	<3	1.5	P	
MW-5	05/12/98	151.33	7.24	144.09	<50	<0.5	<0.5	<0.5	<0.5	<3	2.2	P	
MW-5	07/27/98	151.33	7.91	143.42	<50	<0.5	<0.5	<0.5	<0.5	<3	1.3	P	
MW-5	10/15/98	151.33	8.31	143.02	<50	<0.5	<0.5	<0.5	0.6	<3	3.0	P	
MW-5	02/18/99	151.33	7.25	144.08	<50	<0.5	<0.5	<0.5	<0.5	<3	2.0	P	
MW-5	05/24/99	151.33	7.52	143.81	<50	<0.5	<0.5	<0.5	<0.5	<3	2.0	NP	
MW-6	01/31/96	153.84	5.15	148.69	----- Well Sampled Annually -----								
MW-6	04/10/96	153.84	4.58	149.26	----- Well Sampled Annually -----								
MW-6	07/16/96	153.84	4.96	148.88	<50	<0.5	<0.5	<0.5	<0.5	150	NM		

Table 1
Groundwater Elevation and Analytical Data
Total Purgeable Petroleum Hydrocarbons
(TPPH as Gasoline, BTEX Compounds, and MTBE)

ARCO Service Station 0374
6407 Telegraph Avenue, Oakland, California

Well Number	Date Gauged/ Sampled	Well Elevation (feet, MSL)	Depth to Water (feet, TOC)	Groundwater Elevation (feet, MSL)	TPPH as Gasoline (ppb)	Benzene (ppb)	Toluene (ppb)	Ethyl- benzene (ppb)	Xylenes (ppb)	MTBE (ppb)	Dissolved Oxygen (ppm)	Purged/ Not Purged (P/NP)
MW-6	10/14/96	153.84	6.15	147.69	----- Well Sampled Annually -----							
MW-6	03/27/97	153.84	4.40	149.44	----- Well Sampled Annually -----							
MW-6	05/27/97	153.84	4.90	148.94	----- Well Sampled Annually -----							
MW-6	08/12/97	153.84	5.43	148.41	<50	<0.5	<0.5	<0.5	<0.5	39	NM	
MW-6	11/17/97	153.84	5.87	147.97	----- Well Sampled Annually -----							
MW-6	03/16/98	153.84	4.52	149.32	----- Well Sampled Annually -----							
MW-6	05/12/98	153.84	4.42	149.42	----- Well Sampled Annually -----							
MW-6	07/27/98	153.84	4.75	149.09	<50	<0.5	<0.5	<0.5	<0.5	18	0.9	P
MW-6	10/15/98	153.84	5.75	148.09	----- Well Sampled Annually -----							
MW-6	02/18/99	153.84	3.93	149.91	----- Well Sampled Annually -----							
MW-6	05/24/99	153.84	4.32	149.52	<50	<0.5	<0.5	<0.5	<0.5	6	2.0	NP

MTBE = Methyl tert-butyl ether.
MSL = Mean sea level
TOC = Top of casing.
ppb = Parts per billion.
ppm = Parts per million.
< = Less than laboratory detection limit stated to the right.
NA = Not analyzed
NM = Not measured.
N/A = Not available.
* = ORCs installed in well beginning 11/14/95. Please refer to Appendix D for details.

Table 2
Groundwater Flow Direction and Gradient

ARCO Service Station 0374
6407 Telegraph Avenue, Oakland, California

Date Measured	Average Flow Direction	Average Hydraulic Gradient
01-31-96	Southwest	0.04
04-10-96	Southwest	0.04
07-16-96	Southwest	0.03
10-14-96	Southwest	0.03
03-27-97	Southwest	0.04
05-27-97	Southwest	0.03
08-12-97	Southwest	0.04
11-17-97	Southwest	0.03
03-16-98	Southwest	0.03
05-12-98	Southwest	0.04
07-27-98	Southwest	0.04
10-15-98	Southwest	0.02
02-18-99	Southwest	0.05
05-24-99	Southwest	0.03







IMAGE Files: <No Images>
 XREF Files: <No Xrefs>
 Dimstyle: 30 Ltscale: 30 Psitscale: 1
 SANJOSE/CADD: N:\DWG\PINACL\374\374CHEM.DWG Tue, 15/Jun/99 11:03am Kblack

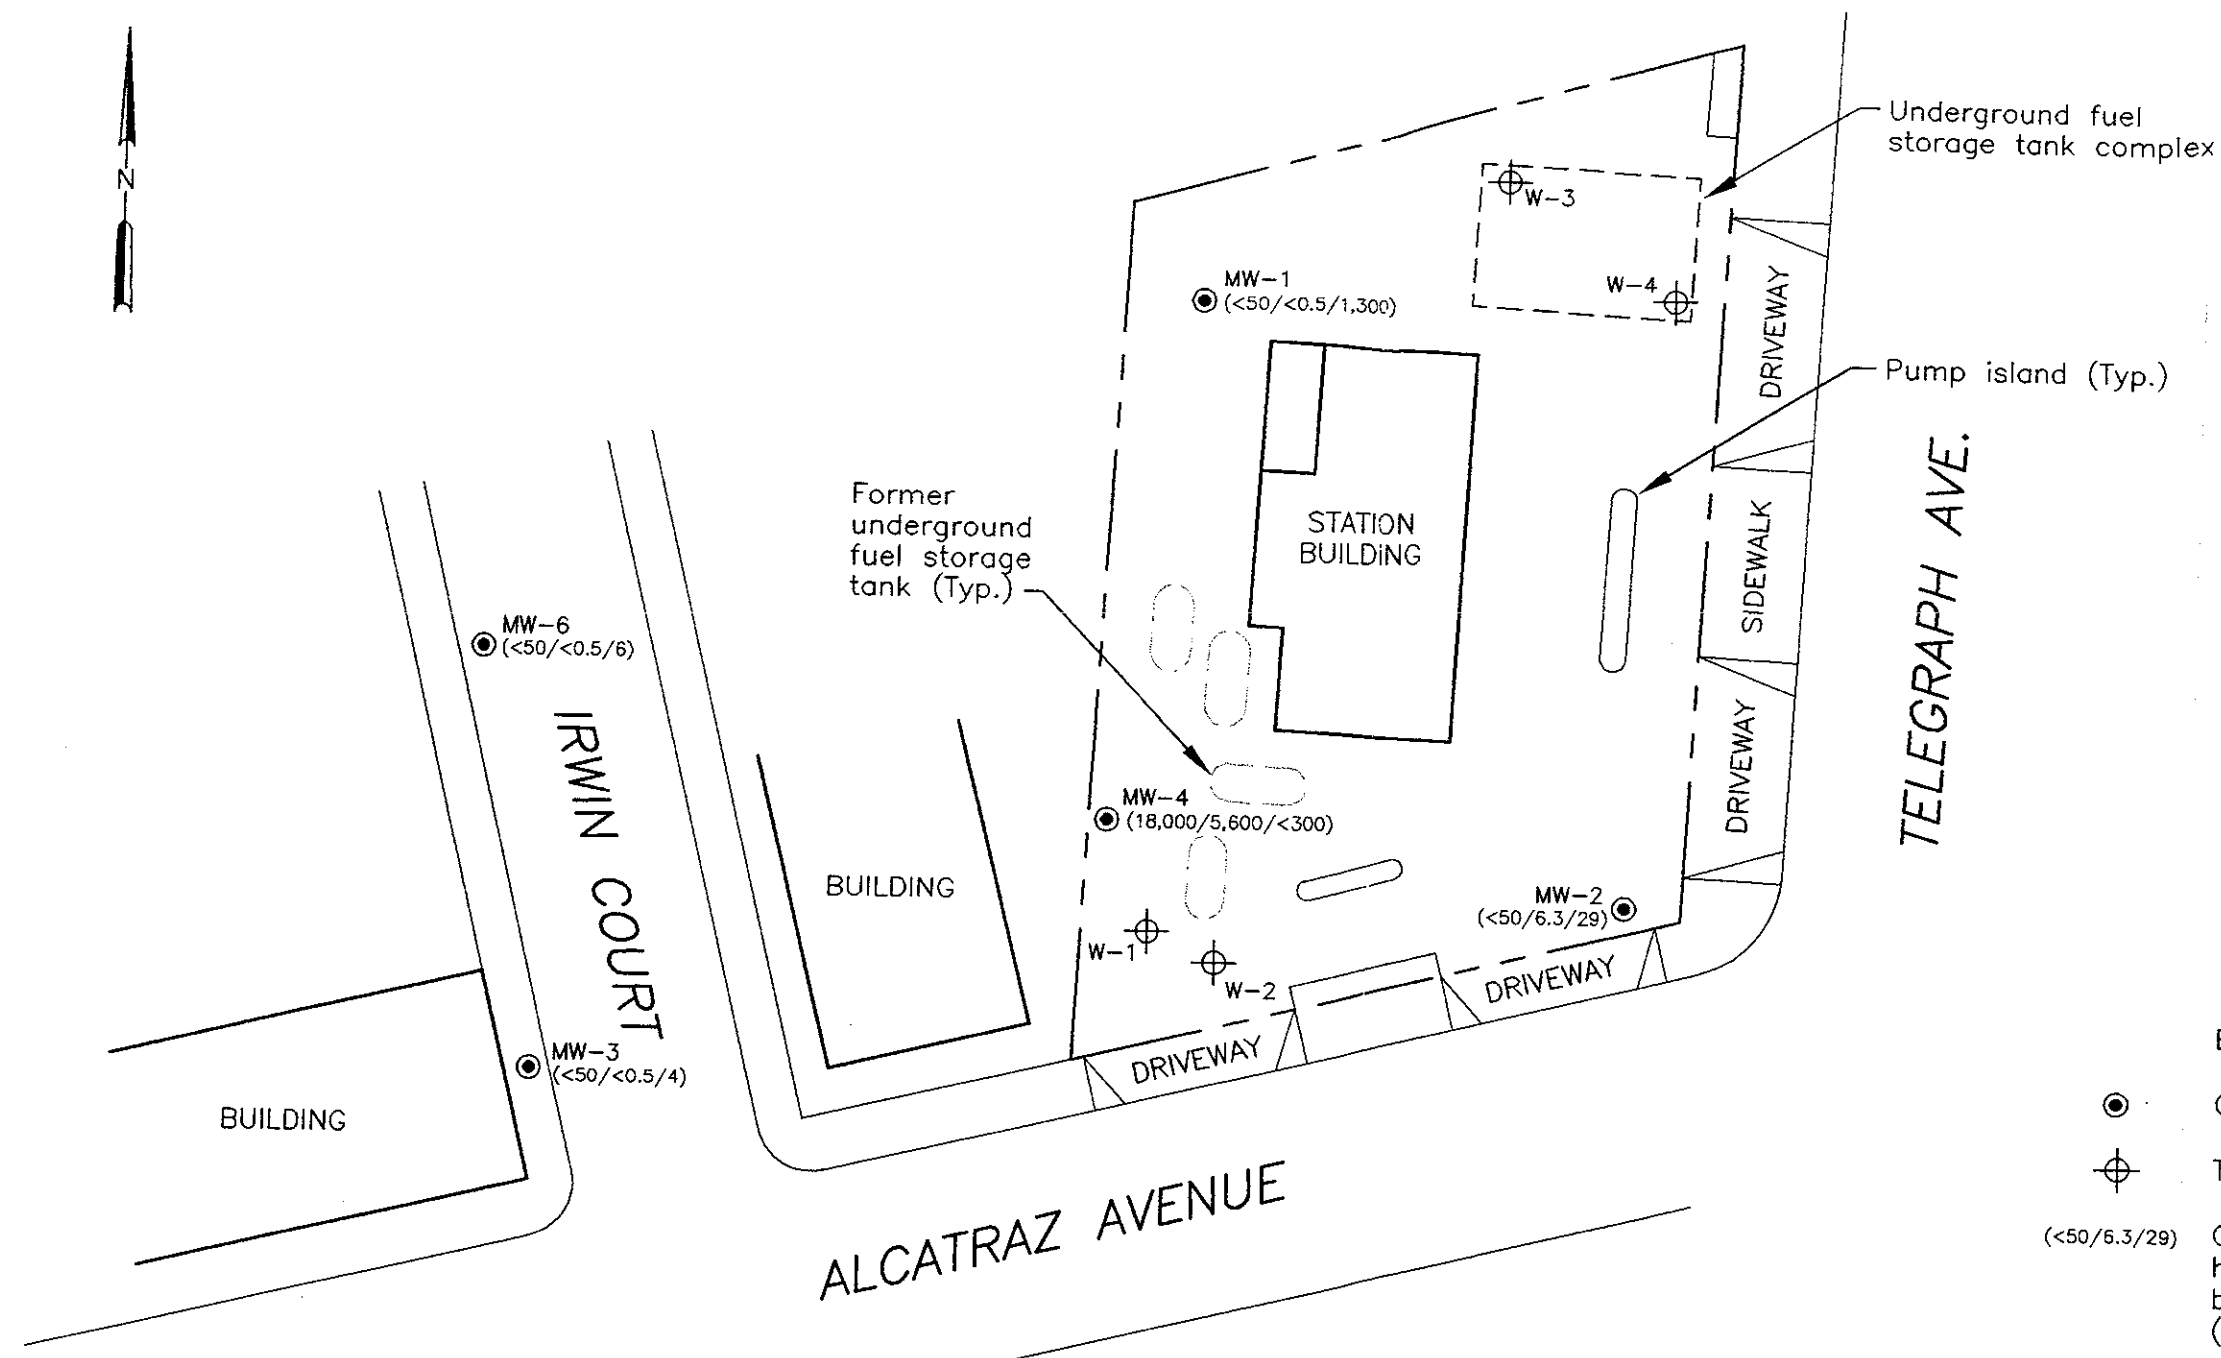



Pinnacle
 ENVIRONMENTAL SOLUTIONS
 A DIVISION OF EMCON



- ELEVATION
- Groundwater monitoring well
 - ⊕ Tank pit groundwater monitoring well
 - (<50/6.3/29) Concentration of total petroleum hydrocarbons as gasoline (TPHG), benzene, and MTBE in groundwater (ug/L); samples collected 5/24/99
 - < Not detected at or above the indicated laboratory detection limit


DATE JUNE 1999
 DWN KAB
 APP _____
 REV 0
 PROJECT NO.
 20805-190.002

FIGURE 1
 ARCO PRODUCTS COMPANY
 SERVICE STATION 374, 6407 TELEGRAPH AVE.
 OAKLAND, CALIFORNIA
GROUNDWATER ANALYTICAL SUMMARY
SECOND QUARTER 1999

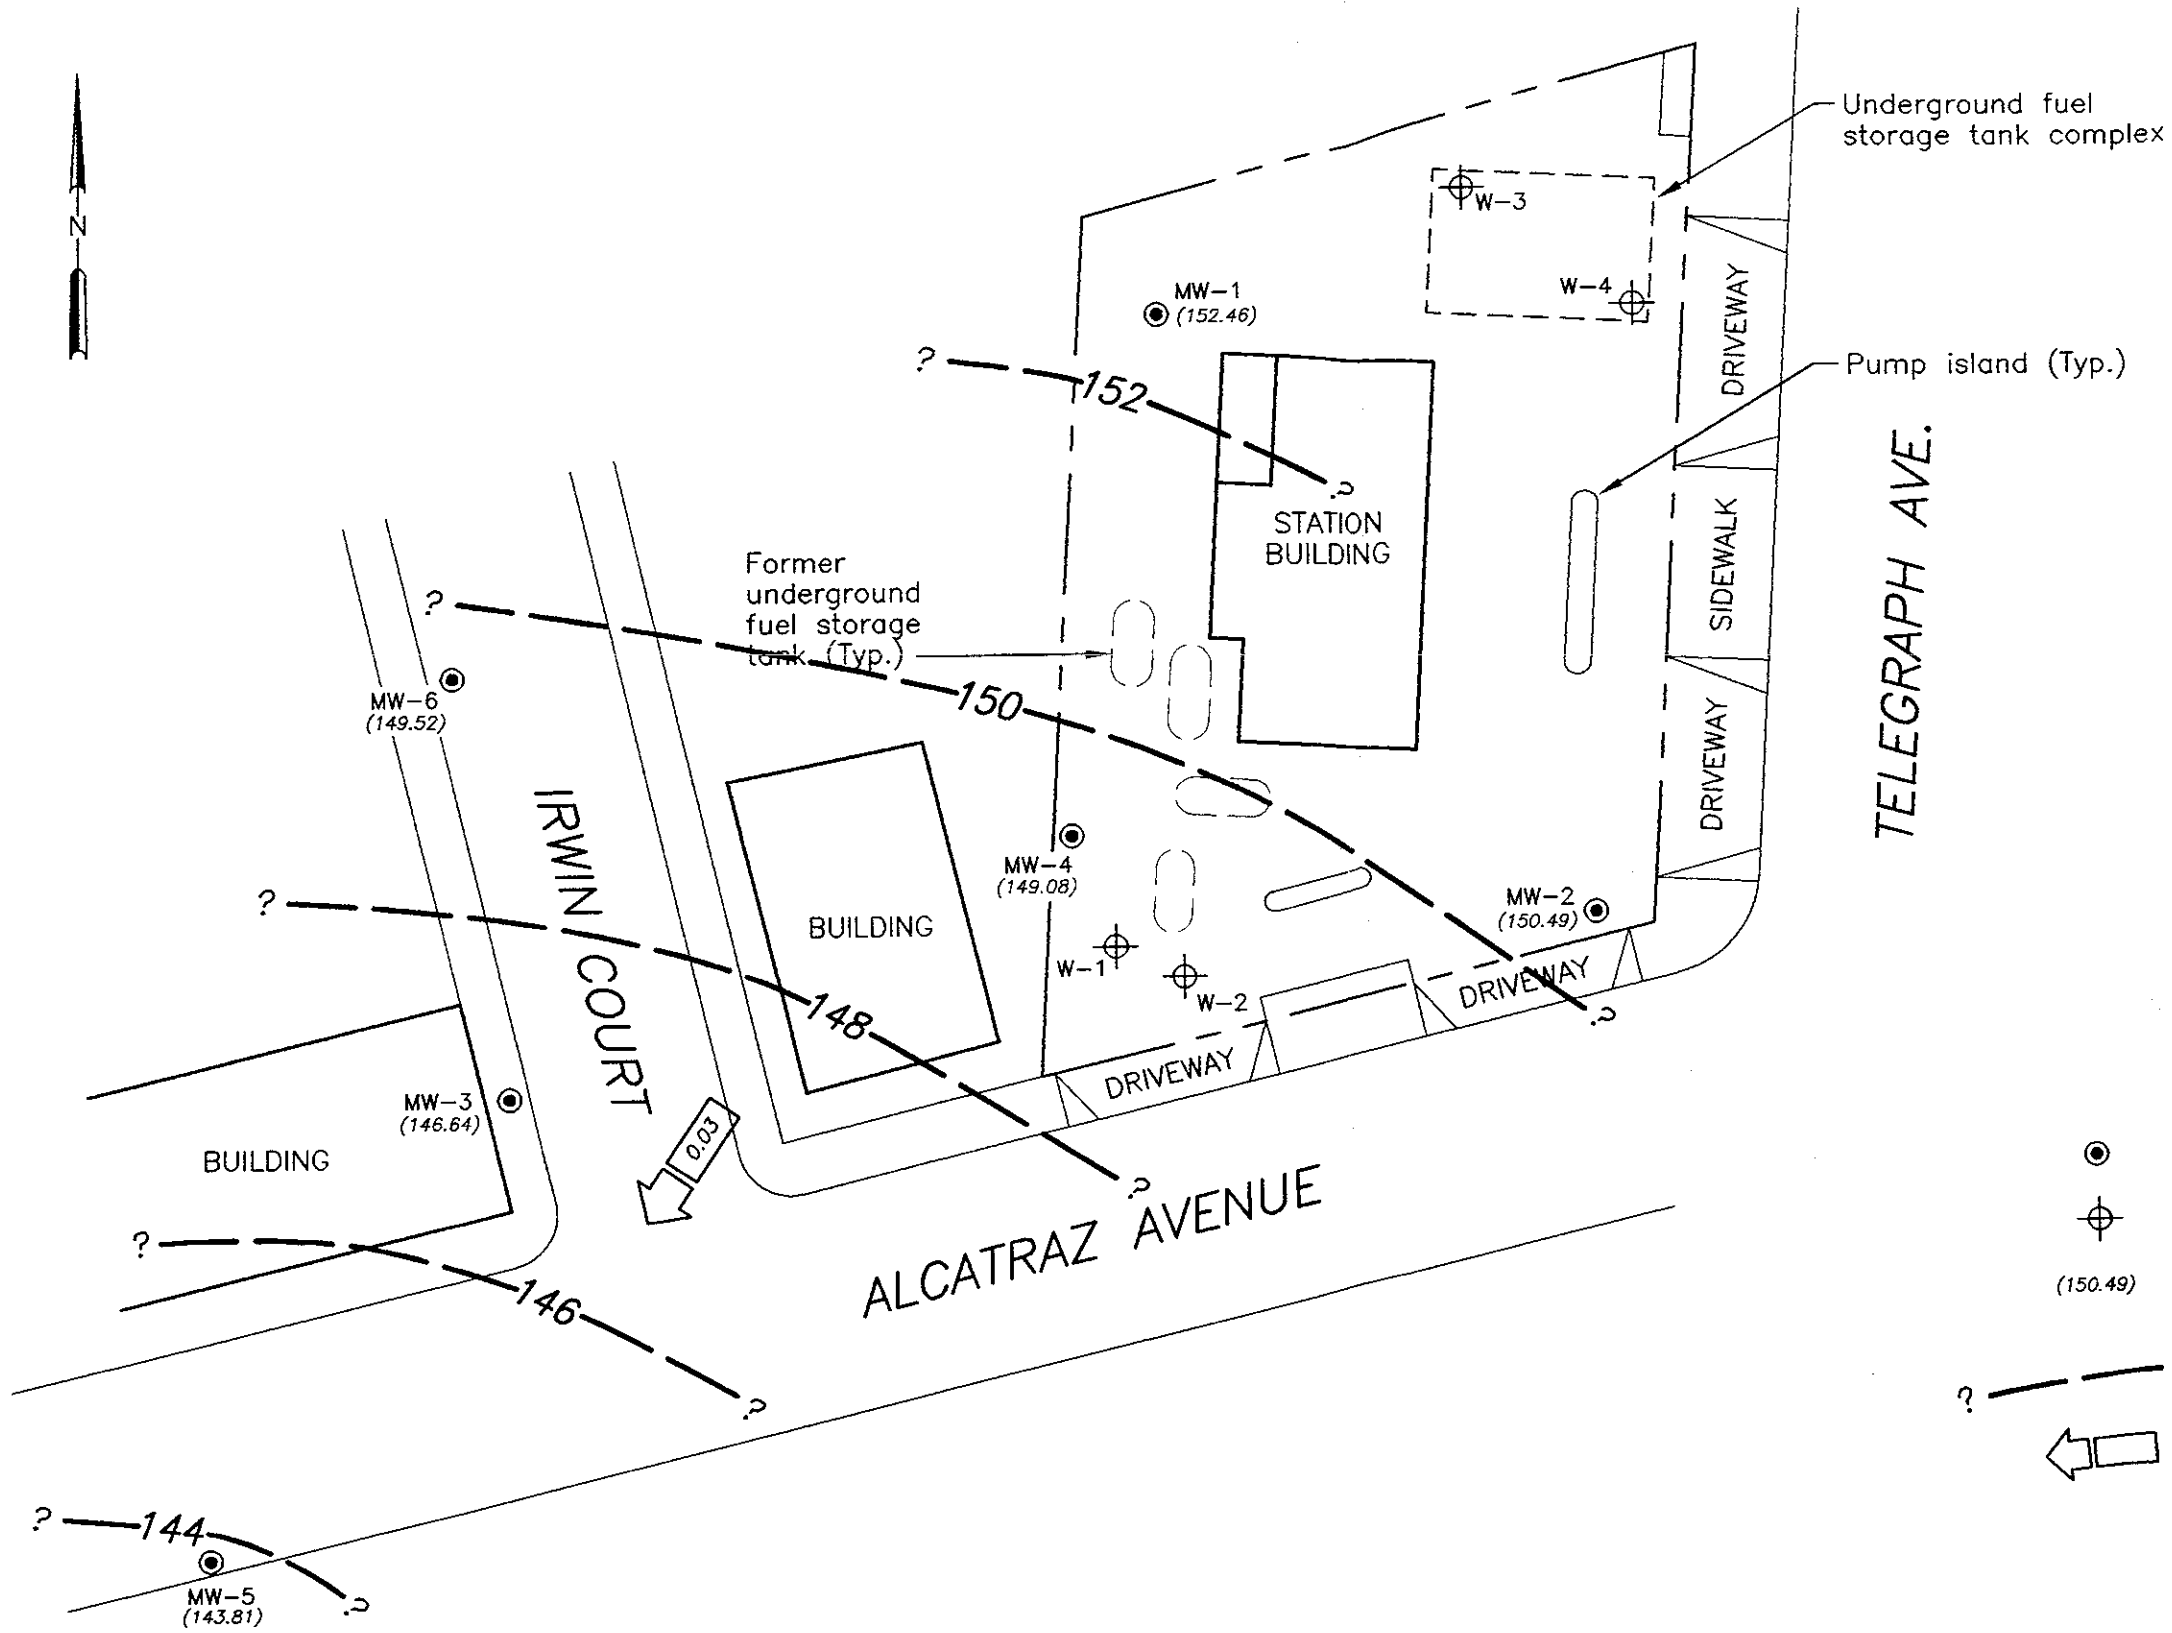


- ELEVATION
- Groundwater monitoring well
 - ⊕ Tank pit groundwater monitoring well
 - (150.49) Groundwater elevation (Ft.-MSL); measured 5/24/99
 - ? - - - Groundwater elevation contour (Ft.-MSL)
 - ? ← Approximate direction of groundwater flow showing gradient

IMAGE Files: <No Images>
 XREF Files: <No Xrefs>
 Dimstyle: 30 Ltstyle: 30 Plotstyle: 1
 SANJOSE/CADD: N:\DWG\PINACL\374\374CWC.DWG Wed, 23/Jun/99 08:41am kblack



Pinnacle
 ENVIRONMENTAL SOLUTIONS
 A DIVISION OF EMCON



DATE	JUNE 1999
DWN	KAB
APP	
REV	0
PROJECT NO.	20805-190.002

FIGURE 2
 ARCO PRODUCTS COMPANY
 SERVICE STATION 374, 6407 TELEGRAPH AVE.
 OAKLAND, CALIFORNIA
GROUNDWATER ELEVATION CONTOURS
SECOND QUARTER 1999

APPENDIX A
SAMPLING AND ANALYSIS PROCEDURES

APPENDIX A

SAMPLING AND ANALYSIS PROCEDURES

The sampling and analysis procedures for water quality monitoring programs are contained in this appendix. The procedures provided for consistent and reproducible sampling methods, proper application of analytical methods, and accurate and precise analytical results. Finally, these procedures provided guidelines so that the overall objectives of the monitoring program were achieved.

The following documents have been used as guidelines for developing these procedures:

- Procedures Manual for Groundwater Monitoring at Solid Waste Disposal Facilities, Environmental Protection Agency (EPA)-530/SW-611, August 1977
- Resource Conservation and Recovery Act (RCRA) Groundwater Monitoring Technical Enforcement Guidance Document, Office of Solid Waste and Emergency Response (OSWER) 9950.1, September 1986
- Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, EPA SW-846, 3rd edition, November 1986
- Methods for Organic Chemical Analysis of Municipal and Industrial Waste Water, EPA-600/4-82-057, July 1982
- Methods for Organic Chemical Analysis of Water and Wastes, EPA-600/4-79-020, revised March 1983
- Leaking Underground Fuel Tank (LUFT) Field Manual, California State Water Resources Control Board, revised October 1989

Sample Collection

Sample collection procedures include equipment cleaning, water level and total well depth measurements, and well purging and sampling.

Equipment Cleaning

Before the sampling event was started, equipment that was used to sample groundwater was disassembled and cleaned with detergent water and then rinsed with deionized water. During field sampling, equipment surfaces that were placed in the well or came into contact with groundwater during field sampling were steam cleaned with deionized water before the next well was purged or sampled.

Water Level, Floating Hydrocarbon, and Total Well Depth Measurements

Before purging and sampling occurred, the depth to water, floating hydrocarbon thickness, and total well depth were measured using an oil/water interface measuring system. The oil/water interface measuring system consists of a probe that emits a continuous audible tone when immersed in a nonconductive fluid, such as oil or gasoline, and an intermittent tone when immersed in a conductive fluid, such as water. The floating hydrocarbon thickness and water level were measured by lowering the probe into the well. Liquid levels were recorded relative to the tone emitted at the groundwater surface. The sonic probe was decontaminated by being rinsed with deionized water or steam cleaned after each use. A bottom-filling, clear Teflon[®] bailer was used to verify floating hydrocarbon thickness measurements of less than 0.02 foot. Alternatively, an electric sounder and a bottom-filling Teflon bailer may have been used to record floating hydrocarbon thickness and depth to water.

The electric sounder is a transistorized instrument that uses a reel-mounted, two-conductor, coaxial cable that connects the control panel to the sensor. Cable markings are stamped at 1-foot intervals. The water level was measured by lowering the sensor into the monitoring well. A low-current circuit was completed when the sensor contacted the water, which served as an electrolyte. The current was amplified and fed into an indicator light and audible buzzer, signaling when water had been contacted. A sensitivity control compensated for highly saline or conductive water. The electric sounder was decontaminated by being rinsed with deionized water after each use. The bailer was lowered to a point just below the liquid level, retrieved, and observed for floating hydrocarbon.

Liquid measurements were recorded to the nearest 0.01 foot on the depth to water/floating product survey form. The groundwater elevation at each monitoring well was calculated by subtracting the measured depth to water from the surveyed elevation of the top of the well casing. (Every attempt was made to measure depth to water for all wells on the same day.) Total well depth was then measured by lowering the sensor to the bottom of the well. Total well depth, used to calculate purge volumes and to determine whether the well screen was partially obstructed by silt, was recorded to the nearest 0.1 foot on the depth to water/floating product survey form.

Well Purging

If the depth to groundwater was above the top of screens of the monitoring wells, then the wells were purged. Before sampling occurred, a polyvinyl chloride (PVC) bailer, centrifugal pump, low-flow submersible pump, or Teflon bailer was used to purge standing water in the casing and gravel pack from the monitoring well. Monitoring wells were purged according to the protocol presented in Figure A-1. In most monitoring wells, the amount of water purged before sampling was greater than or equal to three casing volumes. Some monitoring wells were expected to be evacuated to dryness after removing fewer than three casing volumes. These low-yield monitoring wells were allowed to recharge for up to 24 hours. Samples were obtained as soon as the monitoring wells recharged to a level sufficient for sample collection. If insufficient water recharged after 24 hours, the monitoring well was recorded as dry for the sampling event.

Groundwater purged from the monitoring wells was transported in a 500-gallon water trailer, 55-gallon drum, or a 325-gallon truck-mounted tank to EMCON's San Jose or Sacramento office location for temporary storage. EMCON arranged for transport and disposal of the purged groundwater through Integrated Waste Stream Management, Inc.

Field measurements of pH, specific conductance, and temperature were recorded in a waterproof field logbook. Figure A-2 shows an example of the water sample field data sheet on which field data are recorded. Field data sheets were reviewed for completeness by the sampling coordinator after the sampling event was completed.

The pH, specific conductance, and temperature meter were calibrated each day before field activities were begun. The calibration was checked once each day to verify meter performance. Field meter calibrations were recorded on the water sample field data sheet.

Well Sampling

A Teflon bailer was the only equipment acceptable for well sampling. When samples for volatile organic analysis were being collected, the flow of groundwater from the bailer was regulated to minimize turbulence and aeration. Glass bottles of at least 40-milliliters volume and fitted with Teflon-lined septa were used in sampling for volatile organics. These bottles were filled completely to prevent air from remaining in the bottle. A positive meniscus formed when the bottle was completely full. A convex Teflon septum was placed over the positive meniscus to eliminate air. After the bottle was capped, it was inverted and tapped to verify that it contained no air bubbles. The sample containers for other parameters were filled, filtered as required, and capped.

When required, dissolved concentrations of metals were determined using appropriate field filtration techniques. The sample was filtered by emptying the contents of the Teflon bailer into a pressure transfer vessel. A disposable 0.45-micron acrylic copolymer filter was threaded onto the transfer vessel at the discharge point, and the vessel was sealed. Pressure was applied to the vessel with a hand pump and the filtrate directed into the appropriate containers. Each filter was used once and discarded.

Sample Preservation and Handling

The following section specifies sample containers, preservation methods, and sample handling procedures.

Sample Containers and Preservation

Sample containers vary with each type of analytical parameter. Container types and materials were selected to be nonreactive with the particular analytical parameter tested.

Sample Handling

Sample containers were labeled immediately prior to sample collection. Samples were kept cool with cold packs until received by the laboratory. At the time of sampling, each sample was logged on an ARCO chain-of-custody record that accompanied the sample to the laboratory.

Samples that required overnight storage prior to shipping to the laboratory were kept cool (4° C) in a refrigerator. The refrigerator was kept in a warehouse, which was locked when not occupied by an EMCON employee. A sample/refrigerator log was kept to record the date and time that samples were placed into and removed from the refrigerator.

Samples were transferred from EMCON to an ARCO-approved laboratory by courier or taken directly to the laboratory by the environmental sampler. Sample shipments from EMCON to laboratories performing the selected analyses routinely occurred within 24 hours of sample collection.

Sample Documentation

The following procedures were used during sampling and analysis to provide chain-of-custody control during sample handling from collection through storage. Sample documentation included the use of the following:

- Water sample field data sheets to document sampling activities in the field
- Labels to identify individual samples
- Chain-of-custody record sheets for documenting possession and transfer of samples
- Laboratory analysis request sheets for documenting analyses to be performed

Field Logbook

In the field, the sampler recorded the following information on the water sample field data sheet (see Figure A-2) for each sample collected:

- Project number
- Client's name
- Location
- Name of sampler
- Date and time
- Well accessibility and integrity
- Pertinent well data (e.g., casing diameter, depth to water, well depth)
- Calculated and actual purge volumes
- Purging equipment used
- Sampling equipment used
- Appearance of each sample (e.g., color, turbidity, sediment)
- Results of field analyses (temperature, pH, specific conductance)
- General comments

The water sample field data sheet was signed by the sampler and reviewed by the sampling coordinator.

Labels

Sample labels contained the following information:

- Project number
- Sample number (i.e., well designation)
- Sample depth
- Sampler's initials
- Date and time of collection
- Type of preservation used (if any)

Sampling and Analysis Chain-of-Custody Record

The ARCO chain-of-custody record initiated at the time of sampling contained, at a minimum, the sample designation (including the depth at which the sample was collected), sample type, analytical request, date of sampling, and the name of the sampler. The record sheet was signed, timed, and dated by the sampler when transferring the samples. The number of custodians in the chain of possession was minimized. A copy of the ARCO chain-of-custody record was returned to EMCON with the analytical results.

Groundwater Sampling and Analysis Request Form

A groundwater sampling and analysis request form (see Figure A-3) was used to communicate to the environmental sampler the requirements of the monitoring event. At a minimum, the groundwater sampling and analysis request form included the following information:

- Date scheduled
- Site-specific instructions
- Specific analytical parameters
- Well number
- Well specifications (expected total depth, depth of water, and product thickness)



OWT

MONITORING WELL PURGING PROTOCOL

MEASURE AND RECORD DEPTH TO WATER AND WELL TOTAL DEPTH

CHECK FOR FLOATING PRODUCT

YES

MEASURE AND DOCUMENT FLOATING PRODUCT THICKNESS. DO NOT SAMPLE WELL FOR DISSOLVED CONSTITUENTS.

NO

CALCULATE PURGE VOLUME BY USING THE FOLLOWING EQUATION:
$$P = \pi r^2 h \times 7.48 \times 3$$
where:
P = calculated purge volume (gallons)
 $\pi = 3.14$
r = radius of well casing in feet
h = height of water column in feet

WELL EVACUATED TO PRACTICAL LIMITS OF DRYNESS BEFORE REMOVING CALCULATED PURGE VOLUME

EVACUATE WATER FROM WELL EQUAL TO THE CALCULATED PURGE VOLUME WHILE MONITORING GROUNDWATER STABILIZATION INDICATOR PARAMETERS (pH, CONDUCTIVITY, TEMPERATURE) AT INTERVALS OF ONE CASING VOLUME.

NO

YES

FINAL TWO SETS OF GROUNDWATER STABILIZATION INDICATOR PARAMETER MEASUREMENTS MEET THE FOLLOWING CRITERIA:
pH = ± 0.1 pH units
COND. = $\pm 10\%$
TEMP. = ± 1.0 °F

WELL RECHARGES TO A LEVEL SUFFICIENT FOR SAMPLE COLLECTION WITHIN 24 HOURS OF EVACUATION TO DRYNESS.

YES

NO

YES

NO

WELL PURGING CRITERIA MET; PROCEED TO WELL SAMPLING.

CONTINUE PURGING; EVACUATE ADDITIONAL CASING VOLUME OF WATER, MONITORING INDICATOR PARAMETERS FOR STABILITY.

FIELD TEST FIRST RECHARGE WATER FOR INDICATOR PARAMETERS, THEN PROCEED TO WELL SAMPLING.

RECORD WELL AS DRY FOR PURPOSES OF SAMPLING.



EMCON

MONITORING WELL PURGING PROTOCOL

FIGURE

A-1

WATER SAMPLE FIELD DATA SHEET

Rev. 5/96



OWT

PROJECT NO : _____ SAMPLE ID : _____
 PURGED BY : _____ CLIENT NAME : _____
 SAMPLED BY : _____ LOCATION : _____

TYPE: Groundwater _____ Surface Water _____ Leachate _____ Other _____
 CASING DIAMETER (inches): 2 _____ 3 _____ 4 _____ 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL) : _____ VOLUME IN CASING (gal.) : _____
 DEPTH OF WELL (feet) : _____ CALCULATED PURGE (gal.) : _____
 DEPTH OF WATER (feet) : _____ ACTUAL PURGE VOL. (gal.) : _____

DATE PURGED : _____ END PURGE : _____
 DATE SAMPLED : _____ SAMPLING TIME : _____

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	TURBIDITY (visual/NTU)	TIME (2400 HR)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

OTHER: _____ ODOR: _____
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1) : _____

PURGING EQUIPMENT

SAMPLING EQUIPMENT

_____ 2" Bladder Pump	_____ Bailer (Teflon)	_____ 2" Bladder Pump	_____ Bailer (Teflon)
_____ Centrifugal Pump	_____ Bailer (PVC)	_____ Bomb Sampler	_____ Bailer (Stainless Steel)
_____ Submersible Pump	_____ Bailer (Stainless Steel)	_____ Dipper	_____ Submersible Pump
_____ Well Wizard™	_____ Dedicated	_____ Well Wizard™	_____ Dedicated
Other: _____		Other: _____	

WELL INTEGRITY: _____ LOCK: _____

REMARKS: _____

pH, E.C., Temp. Meter Calibration. Date: _____ Time: _____ Meter Serial No.: _____
 E.C. 1000 _____ / _____ pH 7 _____ / _____ pH 10 _____ / _____ pH 4 _____ / _____
 Temperature °F _____

SIGNATURE: _____ REVIEWED BY: _____ PAGE _____ OF _____



EMCON

WATER SAMPLE FIELD DATA SHEET

FIGURE
A-2



OWT

**EMCON - SACRAMENTO
GROUNDWATER SAMPLING AND ANALYSIS REQUEST FORM**

PROJECT NAME :

SCHEDULED DATE :

SPECIAL INSTRUCTIONS / CONSIDERATIONS :

[Empty box for special instructions]

Project Authorization: _____
EMCON Project No.: _____
OWT Project No.: _____
Task Code: _____
Originals To: _____
cc: _____

Well Lock Number (s)

CHECK BOX TO AUTHORIZE DATA ENTRY

Site Contact: _____
Name Phone #

Well Number or Source	Casing Diameter (inches)	Casing Length (feet)	Depth to Water (feet)	ANAYSES REQUESTED

Laboratory and Lab QC Istructions:



EMCON

SAMPLING AND ANALYSIS REQUEST FORM

FIGURE

A-3

APPENDIX B

**CERTIFIED ANALYTICAL REPORTS,
AND CHAIN-OF-CUSTODY DOCUMENTATION**



June 8, 1999

Service Request No.: S9901596

Mr. Glen Vanderveen
EMCON-Pinnacle
2201 Broadway, Suite 101
Oakland, CA 94612

RE: TO#24118.00/RAT#8/374 OAKLAND

Dear Mr. Vanderveen:

Enclosed are the results of the sample (s) submitted to our laboratory on May 24, 1999. All analyses were performed in accordance with our laboratory's quality assurance program. Results are intended to be considered in their entirety and apply to the sample (s) analyzed. Columbia Analytical Services is not responsible for use of less than the complete report. Signature of this CAS Analytical Report confirms that pages 2 through 12, following, have been thoroughly reviewed and approved for release.

Columbia Analytical Services is certified for environmental analyses by the California Department of Health Services (certificate number: 1496, expiration: January 31, 2001).


If you have any question, please call me at (408) 748-9700.

Respectfully submitted,

Columbia Analytical Services, Inc.

Bernadette Troncales
Project Chemist

Greg Jordan
Laboratory Director



COLUMBIA ANALYTICAL SERVICES, Inc.

Acronyms

A2LA	American Association for Laboratory Accreditation
ASTM	American Society for Testing and Materials
BOD	Biochemical Oxygen Demand
BTEX	Benzene, Toluene, Ethylbenzene, Xylenes
CAM	California Assessment Metals
CARB	California Air Resources Board
CAS Number	Chemical Abstract Service registry Number
CFC	Chlorofluorocarbon
CFU	Colony-Forming Unit
COD	Chemical Oxygen Demand
DEC	Department of Environmental Conservation
DEQ	Department of Environmental Quality
DHS	Department of Health Services
DLCS	Duplicate Laboratory Control Sample
DMS	Duplicate Matrix Spike
DOE	Department of Ecology
DOH	Department of Health
EPA	U. S. Environmental Protection Agency
ELAP	Environmental Laboratory Accreditation Program
GC	Gas Chromatography
GC/MS	Gas Chromatography/Mass Spectrometry
IC	Ion Chromatography
ICB	Initial Calibration Blank sample
ICP	Inductively Coupled Plasma atomic emission spectrometry
ICV	Initial Calibration Verification sample
J	Estimated concentration. The value is less than the MRL, but greater than or equal to the MDL. If the value is equal to the MRL, the result is actually <MRL before rounding.
LCS	Laboratory Control Sample
LUFT	Leaking Underground Fuel Tank
M	Modified
MBAS	Methylene Blue Active Substances
MCL	Maximum Contaminant Level. The highest permissible concentration of a substance allowed in drinking water as established by the U. S. EPA.
MDL	Method Detection Limit
MPN	Most Probable Number
MRL	Method Reporting Limit
MS	Matrix Spike
MTBE	Methyl tert-Butyl Ether
NA	Not Applicable
NAN	Not Analyzed
NC	Not Calculated
NCASI	National Council of the paper industry for Air and Stream Improvement
ND	Not Detected at or above the method reporting/detection limit (MRL/MDL)
NIOSH	National Institute for Occupational Safety and Health
NTU	Nephelometric Turbidity Units
ppb	Parts Per Billion
ppm	Parts Per Million
PQL	Practical Quantitation Limit
QA/QC	Quality Assurance/Quality Control
RCRA	Resource Conservation and Recovery Act
RPD	Relative Percent Difference
SIM	Selected Ion Monitoring
SM	Standard Methods for the Examination of Water and Wastewater, 18th Ed., 1992
STLC	Solubility Threshold Limit Concentration
SW	Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, SW-846, 3rd Ed., 1986 and as amended by Updates I, II, IIA, and IIB.
TCLP	Toxicity Characteristic Leaching Procedure
TDS	Total Dissolved Solids
TPH	Total Petroleum Hydrocarbons
tr	Trace level. The concentration of an analyte that is less than the PQL but greater than or equal to the MDL. If the value is equal to the PQL, the result is actually <PQL before rounding.
TRPH	Total Recoverable Petroleum Hydrocarbons
TSS	Total Suspended Solids
TTLC	Total Threshold Limit Concentration
VOA	Volatile Organic Analyte(s)

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT#8/374 OAKLAND
Sample Matrix: Water

Service Request: S9901596
Date Collected: 5/24/99
Date Received: 5/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-1(26)
Lab Code: S9901596-001
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/2/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/2/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/2/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/2/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/2/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	20	NA	6/1/99	1300	

Approved By: _____

PN

Date: _____

06/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT#8/374 OAKLAND
Sample Matrix: Water

Service Request: S9901596
Date Collected: 5/24/99
Date Received: 5/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-6(14)
Lab Code: S9901596-002
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/1/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/1/99	6	

Approved By: _____



Date: _____

06/01/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT#8/374 OAKLAND
Sample Matrix: Water


Service Request: S9901596
Date Collected: 5/24/99
Date Received: 5/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-5(23)
Lab Code: S9901596-003
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/1/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/1/99	ND	

Approved By:  Date: 06/08/99

1S22/020597p

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
 Project: TO#24118.00/RAT#8/374 OAKLAND
 Sample Matrix: Water

Service Request: S9901596
 Date Collected: 5/24/99
 Date Received: 5/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-2(23)
 Lab Code: S9901596-004
 Test Notes:

Units: ug/L (ppb)
 Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/1/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/1/99	6.3	
Toluene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/1/99	0.7	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/1/99	29	

Approved By: _____

PT

Date: _____

06/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT#8/374 OAKLAND
Sample Matrix: Water

Service Request: S9901596
Date Collected: 5/24/99
Date Received: 5/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-3(26)
Lab Code: S9901596-005
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/1/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Ethylbenzenc	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/1/99	4	

Approved By: _____ *BT* Date: 06/08/99

IS22/020597p

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT#8/374 OAKLAND
Sample Matrix: Water

Service Request: S9901596
Date Collected: NA
Date Received: NA


BTEX, MTBE and TPH as Gasoline

Sample Name: Method Blank
Lab Code: S990601-WB1
Test Notes:


Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/1/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/1/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/1/99	ND	

Approved By: _____



Date: _____



COLUMBIA ANALYTICAL SERVICES, INC.

QA/QC Report

Client: ARCO Products Company
Project: TO#24118.00/RAT#8/374 OAKLAND
Sample Matrix: Water

Service Request: S9901596
Date Collected: NA
Date Received: NA
Date Extracted: NA
Date Analyzed: NA

Surrogate Recovery Summary
BTEX, MTBE and TPH as Gasoline

Prep Method: EPA 5030
Analysis Method: 8020 CA/LUFT

Units: PERCENT
Basis: NA

Sample Name	Lab Code	Test Notes	Percent Recovery	
			4-Bromofluorobenzene	a,a,a-Trifluorotoluene
MW-1(26)	S9901596-001		102	95
MW-6(14)	S9901596-002		107	91
MW-5(23)	S9901596-003		105	99
MW-2(23)	S9901596-004		101	99
MW-3(26)	S9901596-005		103	100
MW-4(26)	S9901596-006		101	92
MW-5(23)	S9901596-003MS		109	90
MW-5(23)	S9901596-003DMS		103	95
Method Blank	S990601-WB1		103	96

CAS Acceptance Limits: 69-116 69-116

Approved By: _____



Date: _____

06/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

QA/QC Report

Client: ARCO Products Company
Project: TO#24118.00/RAT#8/374 OAKLAND
Sample Matrix: Water

Service Request: S9901596
Date Collected: NA
Date Received: NA
Date Extracted: NA
Date Analyzed: 6/1/99

Matrix Spike/Duplicate Matrix Spike Summary
BTE

Sample Name: MW-5(23)
Lab Code: S9901596-003MS, S9901596-003DMS
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Spike Level			Sample Result	Spike Result		Percent Recovery		CAS Acceptance Limits	Relative Percent Difference
				MS	DMS	MS		DMS	MS	DMS			
Benzene	EPA 5030	8020	0.5	25	25	ND	28	26	112	104	75-135	7	
Toluene	EPA 5030	8020	0.5	25	25	ND	30	22	120	88	73-136	31	
Ethylbenzene	EPA 5030	8020	0.5	25	25	ND	31	21	124	84	69-142	38	

Approved By: *[Signature]* Date: *06/08/99*

DMS/020597p

COLUMBIA ANALYTICAL SERVICES, INC.

QA/QC Report

Client: ARCO Products Company
 Project: TO#24118.00/RAT#8/374 OAKLAND

Service Request: S9901596
 Date Analyzed: 6/1/99

Initial Calibration Verification (ICV) Summary
 BTEX, MTBE and TPH as Gasoline


Sample Name: ICV
 Lab Code: ICV1
 Test Notes:

Units: ug/L (ppb)
 Basis: NA

ICV Source:

Analyte	Prep Method	Analysis Method	True Value	Result	CAS Percent Recovery		Result Notes
					Acceptance Limits	Percent Recovery	
TPH as Gasoline	EPA 5030	CA/LUFT	250	250	90-110	100	
Benzene	EPA 5030	8020	25	25	85-115	100	
Toluene	EPA 5030	8020	25	26	85-115	104	
Ethylbenzene	EPA 5030	8020	25	27	85-115	108	
Xylenes, Total	EPA 5030	8020	75	81	85-115	108	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	25	24	85-115	96	

Approved By: _____



Date: _____

06/08/99

ICV/032196

ARCO Products Company

Division of Atlantic/Richfield Company

Task Order No. **24118.00 S990 1596**

Chain of Custody

ARCO Facility no. 0374	City (Facility) Oakland	Project manager (Consultant) Glen VanderVeen	Laboratory Name CAS
ARCO engineer Paul Supple	Telephone no. (ARCO)	Telephone no. (Consultant) (408)453-7300	Contract Number
Consultant name EMCON		Address (Consultant) 2201 Broadway Oakland, CA 94612	Method of shipment Sampler will deliver
		Fax no. (Consultant) (408)437-9526	Special Detection Limit/reporting Lowest Possible

Sample I.D.	Lab no.	Container no.	Matrix			Preservation		Sampling date	Sampling time	BTEX 602/EPA 8020	BTEX/PHENOL/MTBE EPA 1602/4020/8015	TPH Modified 8015 Gas <input type="checkbox"/> Diesel <input type="checkbox"/>	Oil and Grease 413.1 <input type="checkbox"/> 413.2 <input type="checkbox"/>	TPH EPA 418.1/SM 503E	EPA 601/8010	EPA 621/8240	EPA 625/8270	TCMP Metals <input type="checkbox"/> VOAC <input type="checkbox"/> VOAD <input type="checkbox"/>	CMM Metals EPA 601/7008 TLC <input type="checkbox"/> STLC <input type="checkbox"/>	Lead <input type="checkbox"/> Org/DHST <input type="checkbox"/>	Lead EPA 7420/7421 <input type="checkbox"/>	
			Soil	Water	Other	Ice	Acid															
MW-1 (26)		Z	①	X		X				X												
MW-6 (14)		Z	②	X		X				X												
MW-5 (23)		Z	③	X		X				X												
MW-2 (23)		Z	④	X		X				X												
MW-3 (26)		Z	⑤	X		X				X												
MW-4 (26)		Z	⑥	X		X				X												
BT 06/08/99 * sample I.D. depths filled in by B. Troncales according to revised COC forced on 05/25/99 BT 06/08/99																						

Special QA/QC As Normal	Remarks RAT 8 2-40ml HCL VOAs
Lab Number	#20805-123005
Turnaround Time:	Priority Rush 1 Business Day <input type="checkbox"/> Rush 2 Business Days <input type="checkbox"/> Expedited 5 Business Days <input type="checkbox"/> Standard 10 Business Days <input checked="" type="checkbox"/>

Condition of sample:		Temperature received: DUE: 6/8/99 R11 D3	
Relinquished by sampler <i>[Signature]</i>	Date 5/24/99	Time 1537	Received by Joseph Madrado CAS
Relinquished by	Date	Time	Received by
Relinquished by	Date	Time	Received by laboratory
	Date	Time	Received by

APPENDIX C
FIELD DATA SHEETS

**FIELD REPORT
DEPTH TO WATER / FLOATING PRODUCT SURVEY**

PROJECT # : 21775-261.004 STATION ADDRESS : 6407 Telegraph Ave, Oakland, CA DATE : 5/24/99

ARCO STATION # : 374 FIELD TECHNICIAN : Ronnie Perdue DAY : Monday

DTW Order	WELL ID	Well Box Seal	Type Of Well Lid	Gasket Present	Lock Number	Type Of Well Cap	FIRST DEPTH TO WATER (feet)	SECOND DEPTH TO WATER (feet)	DEPTH TO FLOATING PRODUCT (feet)	FLOATING PRODUCT THICKNESS (feet)	WELL TOTAL DEPTH (feet)	COMMENTS
1	MW-1		HEX	NO	ARCO	LWC	6.45	6.45	N/R	N/R	26.6	Needs new diversified bolts.
2	MW-6		15/16"	YES	ARCO	LWC	4.32	4.32			14.7	
3	^{MW-3} MW-5			YES	ARCO	LWC	7.0	7.0			26.7	ORC sock in well
4	MW-2		HEX	NO	ARCO	LWC	7.43	7.43			26.4	
5	^{MW-5} MW-3		HEX	NO	ARCO	LWC	7.52	7.52	↓	↓	23.1	ORC sock in well.
6	MW-4		3/4"	NO	ARCO	LWC	7.45	7.45	↑	↓	26.5	ORC sock in well

SURVEY POINTS ARE TOP OF WELL CASINGS

RECEIVED
JUN 07 1999
BY: _____

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO: 21775-261.004

SAMPLE ID: MW-1

PURGED BY: Ronnie Peedue

CLIENT NAME: ARCO # 0374

SAMPLED BY: ↓

LOCATION: Oakland

TYPE: Groundwater Surface Water _____ Leachate _____ Other _____

CASING DIAMETER (inches): 2 _____ 3 _____ 4 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): NR
 DEPTH OF WELL (feet): 26.6 CALCULATED PURGE (gal.): grab sample
 DEPTH OF WATER (feet): 6.45 ACTUAL PURGE VOL. (gal.): NR

DATE PURGED: 5-24-99 END PURGE: NR
 DATE SAMPLED: ↓ SAMPLING TIME: 1223

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>1223</u>	<u>Grab</u>	<u>6.26</u>	<u>1473</u>	<u>18.9°C</u>	<u>clear</u>	<u>clear</u>

OTHER: DO: 2 ODOR: none NR NR
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): _____

PURGING EQUIPMENT

SAMPLING EQUIPMENT

2" Bladder Pump Bailer (Teflon)
 Centrifugal Pump Bailer (PVC)
 Submersible Pump Bailer (Stainless Steel)
 Well Wizard[®] Dedicated
 Other: _____

2" Bladder Pump Bailer (Teflon)
 Bomb Sampler Bailer (Stainless Steel)
 Dipper Submersible Pump
 Well Wizard[®] Dedicated
 Other: _____

WELL INTEGRITY: OK LOCK: none

REMARKS: need bolt for lid

pH, E.C., Temp. Meter Calibration Date 5-24-99 Time 12:20 Meter Serial No. 87M
 E.C. 1000 993 | 1000 pH 7 704 | 700 pH 10 998 | 1000 pH 4 403 | 400
 Temperature °F 18.9

SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 1 OF 6

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO: 21775-261.004

SAMPLE ID: MW-2

PURGED BY: Ronnie Peedue

CLIENT NAME: ARCO # 0374

SAMPLED BY: ↓

LOCATION: Oakland

TYPE: Groundwater Surface Water _____ Leachate _____ Other _____

CASING DIAMETER (inches): 2 _____ 3 _____ 4 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): 10.23

DEPTH OF WELL (feet): 23.1 CALCULATED PURGE (gal.): 30.71

DEPTH OF WATER (feet): 7.43 ACTUAL PURGE VOL. (gal.): 31.0

DATE PURGED: 5-24-99

END PURGE: 1355

DATE SAMPLED: ↓

SAMPLING TIME: 1357

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>1343</u>	<u>10.</u>	<u>6.85</u>	<u>593</u>	<u>20.2°C</u>	<u>lt. Brown</u>	<u>Mudd</u>
<u>1350</u>	<u>20.</u>	<u>6.81</u>	<u>601</u>	<u>19.7°C</u>	<u>Brown</u>	<u>" "</u>
<u>1355</u>	<u>31.</u>	<u>6.83</u>	<u>602</u>	<u>19.4°C</u>	<u>lt. Brown</u>	<u>" "</u>

OTHER: DO: 3 ODOR: None NR NR
(COBALT 0-100) (NTU'0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT

SAMPLING EQUIPMENT

2" Bladder Pump Bailer (Teflon)
 Centrifugal Pump Bailer (PVC)
 Submersible Pump Bailer (Stainless Steel)
 Well Wizard[®] Dedicated
 Other: _____

2" Bladder Pump Bailer (Teflon)
 Bomb Sampler Bailer (Stainless Steel)
 Dipper Submersible Pump
 Well Wizard[®] Dedicated
 Other: _____

WELL INTEGRITY: _____ LOCK: _____

REMARKS: _____

pH, E.C., Temp Meter Calibration Date 5-24-99 Time _____ Meter Serial No 87M
 E.C. 1000 11000 pH 7 1700 pH 10 11000 pH 4 1400

Temperature °F _____
 SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 2 OF 6

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO. 21775-261.004

SAMPLE ID: MW-3

PURGED BY: Ronnie Poedue

CLIENT NAME: ARCO #0374

SAMPLED BY: ↓

LOCATION: Oakland

TYPE: Groundwater Surface Water Leachate Other

CASING DIAMETER (inches): 2 3 4 4.5 6 Other

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): NR

DEPTH OF WELL (feet): 26.7 CALCULATED PURGE (gal.): NR

DEPTH OF WATER (feet): 7.0 ACTUAL PURGE VOL. (gal.): Grab sample

DATE PURGED: 5-24-99

END PURGE: NR

DATE SAMPLED: ↓

SAMPLING TIME: 1414

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>1414</u>	<u>Grab</u>	<u>7.24</u>	<u>799</u>	<u>19.0°C</u>	<u>Clear</u>	<u>Clear</u>

OTHER: DO: 6 ODOR: None NR NR
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT

SAMPLING EQUIPMENT

2" Bladder Pump Bailer (Teflon)
 Centrifugal Pump Bailer (PVC)
 Submersible Pump Bailer (Stainless Steel)
 Well Wizard[®] Dedicated
Other: _____

2" Bladder Pump Bailer (Teflon)
 Bomb Sampler Bailer (Stainless Steel)
 Dipper Submersible Pump
 Well Wizard[®] Dedicated
Other: _____

WELL INTEGRITY: OK LOCK: _____

REMARKS: _____

pH, E.C., Temp Meter Calibration Date 5-24-99 Time: _____ Meter Serial No 87M
E.C. 1000 1000 pH 7 700 pH 10 1000 pH 4 400

Temperature °F: _____

SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 3 OF 6

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO: 21775-261-004

SAMPLE ID: MW-4

PURGED BY: Ronnie Poedue

CLIENT NAME: ARCO # 0374

SAMPLED BY: ↓

LOCATION: Oakland

TYPE: Groundwater Surface Water Leachate Other

CASING DIAMETER (inches): 2 3 4 4.5 6 Other

CASING ELEVATION (feet/MSL): NR

VOLUME IN CASING (gal.): NR

DEPTH OF WELL (feet): 26.5

CALCULATED PURGE (gal.): NR

DEPTH OF WATER (feet): 7.45

ACTUAL PURGE VOL. (gal.): Grab sample

DATE PURGED: 5-24-99

END PURGE: NR

DATE SAMPLED: ↓

SAMPLING TIME: 1429

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>1429</u>	<u>Grab</u>	<u>6.72</u>	<u>1509</u>	<u>19.8°C</u>	<u>Gray</u>	<u>mod</u>
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

OTHER: DO:1

ODOR: Strong NR NR
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT

SAMPLING EQUIPMENT

2" Bladder Pump Bailer (Teflon)
 Centrifugal Pump Bailer (PVC)
 Submersible Pump Bailer (Stainless Steel)
 Well Wizard[®] Dedicated
 Other: _____

2" Bladder Pump Bailer (Teflon)
 Bomb Sampler Bailer (Stainless Steel)
 Dipper Submersible Pump
 Well Wizard[®] Dedicated
 Other: _____

WELL INTEGRITY: OK LOCK: _____

REMARKS: _____

pH, E.C., Temp Meter Calibration Date 5-24-99 Time _____ Meter Serial No 87M
E.C. 1000 11000 pH 7 1.700 pH 10 11000 pH 4 1400

Temperature °F _____
SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 4 OF 6

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO: 21775-261.004

SAMPLE ID: MW-5

PURGED BY: Ronnie Poedue

CLIENT NAME: ARCO #0374

SAMPLED BY: ↓

LOCATION: Oakland

TYPE: Groundwater Surface Water Leachate Other

CASING DIAMETER (inches): 2 3 4 4.5 6 Other

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): NR
 DEPTH OF WELL (feet): 23.1 CALCULATED PURGE (gal.): Grab Sample
 DEPTH OF WATER (feet): 7.52 7.52 ACTUAL PURGE VOL. (gal.): NR

DATE PURGED: 5-24-99 END PURGE: NR
 DATE SAMPLED: ↓ SAMPLING TIME: 1256

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>12:56</u>	<u>Grab</u>	<u>6.70</u>	<u>591</u>	<u>19.3°C</u>	<u>Clear</u>	<u>clear</u>

OTHER: Do:d ODOR: none NR NR
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT

SAMPLING EQUIPMENT

<input type="checkbox"/> 2" Bladder Pump	<input type="checkbox"/> Bailer (Teflon)	<input type="checkbox"/> 2" Bladder Pump	<input checked="" type="checkbox"/> Bailer (Teflon)
<input type="checkbox"/> Centrifugal Pump	<input type="checkbox"/> Bailer (PVC)	<input type="checkbox"/> Bomb Sampler	<input type="checkbox"/> Bailer (Stainless Steel)
<input type="checkbox"/> Submersible Pump	<input type="checkbox"/> Bailer (Stainless Steel)	<input type="checkbox"/> Dipper	<input type="checkbox"/> Submersible Pump
<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated	<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated

Other: _____ Other: _____

WELL INTEGRITY: OK LOCK: _____

REMARKS: _____

pH, E.C., Temp Meter Calibration Date: 5-24-99 Time _____ Meter Serial No 87M
 E.C. 1000 11000 pH 7 1200 pH 10 11000 pH 4 1400

Temperature °F _____
 SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 5 OF 6

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



PROJECT NO: 21775-261-004
 PURGED BY: Ronnie Bedue
 SAMPLED BY: ↓

SAMPLE ID: MW-6
 CLIENT NAME: ARCO #0374
 LOCATION: Oakland

TYPE: Groundwater Surface Water _____ Leachate _____ Other _____
 CASING DIAMETER (inches): 2 _____ 3 _____ 4 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): NR
 DEPTH OF WELL (feet): 19.7 CALCULATED PURGE (gal.): Grab sample
 DEPTH OF WATER (feet): 4.32 ACTUAL PURGE VOL. (gal.): NR

DATE PURGED: 5-24-99 END PURGE: NR
 DATE SAMPLED: ↓ SAMPLING TIME: 1237

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>1237</u>	<u>Grab</u>	<u>6.62</u>	<u>713</u>	<u>18.6°C</u>	<u>Lt. Gray</u>	<u>mod</u>

OTHER: DO: 2 ODOR: none NR NR
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1). NR

<u>PURGING EQUIPMENT</u>			<u>SAMPLING EQUIPMENT</u>		
<input type="checkbox"/> 2" Bladder Pump	<input type="checkbox"/> Bailer (Teflon)		<input type="checkbox"/> 2" Bladder Pump	<input checked="" type="checkbox"/> Bailer (Teflon)	
<input type="checkbox"/> Centrifugal Pump	<input type="checkbox"/> Bailer (PVC)		<input type="checkbox"/> Bomb Sampler	<input type="checkbox"/> Bailer (Stainless Steel)	
<input type="checkbox"/> Submersible Pump	<input type="checkbox"/> Bailer (Stainless Steel)		<input type="checkbox"/> Dipper	<input type="checkbox"/> Submersible Pump	
<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated		<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated	
Other _____			Other _____		

WELL INTEGRITY: OK LOCK: _____

REMARKS: _____

pH, E.C., Temp Meter Calibration Date 5-24-99 Time _____ Meter Serial No 87M
 E.C. 1000 11000 pH 7 1700 pH 10 11000 pH 4 1400

Temperature °F _____
 SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 6 OF 6

1921 Ringwood Avenue
San Jose, California

1999

ARCO 0374
21775-261.004

Well ID	Quarter	Date	Purge Volume (gallons)	Did well dry	Well Contained Product	Gallons			
						First	Second	Third	Fourth
						23.00	31.00	90.00	26.00
MW-1	First	02/18/99	0.00	NA	NO				
	Second	05/24/99	0.00	GRAB	NO				
	Third	07/27/98	40.50	NO	NO				
	Fourth	10/15/98	0.00	NA	NO				
MW-2	First	02/18/99	0.00	NA	NO				
	Second	05/24/99	31.00	NO	NO				
	Third	07/27/98	0.00	GRAB	NO				
	Fourth	10/15/98	0.00	NA	NO				
MW-3	First	02/18/99	0.00	NA	NO				
	Second	05/24/99	0.00	GRAB	NO				
	Third	07/27/98	0.00	GRAB	NO				
	Fourth	10/15/98	0.00	NA	NO				
MW-4	First	02/18/99	0.00	NA	NO				
	Second	05/24/99	0.00	GRAB	NO				
	Third	07/27/98	0.00	GRAB	NO				
	Fourth	10/15/98	0.00	NA	NO				
MW-5	First	02/18/99	23.00	YES	NO				
	Second	05/24/99	0.00	GRAB	NO				
	Third	07/27/98	30.00	YES	NO				
	Fourth	10/15/98	26.00	YES	NO				
MW-6	First	02/18/99	0.00	NA	NO				
	Second	05/24/99	0.00	GRAB	NO				
	Third	07/27/98	19.50	NO	NO				
	Fourth	10/15/98	0.00	NA	NO				
	First								
	Second								
	Third								
	Fourth								
	First								
	Second								
	Third								
	Fourth								
	First					Steam water (gal) _____			
	Second								
	Third								
	Fourth								

APPENDIX D
REMEDIAL SYSTEM PERFORMANCE SUMMARY

APPENDIX D

REMEDIAL SYSTEM PERFORMANCE SUMMARY

GWE System

Groundwater extraction (GWE) was conducted between December 21, 1993, and October 13, 1995. No evidence of additional plume migration has been observed since system deactivation. The GWE system was comprised of a pneumatic pump in Well W-2 and three 200-pound granular activated carbon vessels arranged in series to treat the extracted groundwater. Extracted and treated groundwater was discharged into the East Bay Municipal Utility District (EBMUD) Permit Account Number 502-85611. Based on verbal approval from the ACHCSA, indicating that GWE would no longer be required at the site, the EBMUD permit was relinquished on June 14, 1996. Overall, approximately 0.1 million gallons of groundwater were extracted and less than 0.05 gallon of benzene was removed.

Please refer to the *Second Quarter 1997 Groundwater Monitoring Report*, for historical GWE system performance and analytical data.

Intrinsic Bioremediation Evaluation

Intrinsic bioremediation indicator parameters (bioparameters) were monitored during the third quarter 1996 groundwater monitoring event. Groundwater samples from Wells MW-3, MW-4, and MW-5 were analyzed for total alkalinity, dissolved oxygen (DO), ferrous iron, nitrate, sulfate, methane, biological oxygen demand (BOD), chemical oxygen demand (COD), and carbon dioxide (CO₂). Intrinsic bioremediation evaluation data are presented in Table D-1.

It is generally accepted that depleted concentrations of electron acceptors (DO, nitrate, and sulfate), and elevated concentrations of bioremediation byproducts (CO₂, methane, and ferrous iron) within the hydrocarbon-impacted plume compared to background levels indicate that intrinsic bioremediation is occurring. Collected data follow a trend that indicates the occurrence of intrinsic bioremediation.

Bioremediation Enhancement Program

On November 14, 1995, at the request of ARCO, twelve oxygen releasing compound (ORC) socks manufactured by Regensis Bioremediation Products, Inc. were installed below the groundwater surface in Well MW-3. ORC is a formulation of very fine, insoluble magnesium peroxide that releases oxygen at a slow, controlled rate when hydrated. ORC product literature was presented in PEG's fourth quarter 1995 report.

Data collected from Well MW-3 indicate that concentrations of TPPH-g and benzene have declined since ORC units were installed. On September 29, 1998 ORC socks were also installed in MW-4. ORC units are changed when dissolved oxygen data indicate that they have been depleted.

Conclusions

As indicated above, GWE at the site has been terminated with verbal approval from ACHCSA. Bioremediation enhancement program will continue.

Attachments: Table D-1 - Intrinsic Bioremediation Evaluation Data

Table D-1
Intrinsic Bioremediation Evaluation and Enhancement Data

ARCO Service Station 0374
6407 Telegraph Avenue, Oakland, California

Well	Date Sampled	Field Analyses					Laboratory Analyses										
		Groundwater Temperature (deg F)	pH (units)	Conductivity (µmhos)	D.O. (mg/L)	Ferrous Iron (mg/L)	Total Alkalinity (mg CaCO ₃ /L)	B.O.D. (mg/L)	Carbon Dioxide (mg/L)	C.O.D. (mg/L)	Methane (%)	Nitrate as Nitrate (mg/L)	Nitrite as Nitrite (mg/L)	Sulfate (mg/L)	TPH as Gasoline (µg/L)	Total BTEX (µg/L)	
MW-3	11/14/95 **	65.5*	6.76*	508*	7.17	N/A	NS	NS	NS	NS	NS	6.6	<1.0	NS	140	46	
	06/06/96 **	66.2	7.38	700	12.28	N/A	NS	NS	NS	NS	NS	NS	NS	NS	84†	5.4†	
	07/16/96	67.8	7.08	1,010	8.73	0.0	280	1.8	270	44	<0.020	<1.0	NS	78	<50	2.2	
	01/21/97 **	59	N/A	N/A	11.15	0.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	08/12/97 **	74.4	6.65	600	6.7	1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	11/17/97	N/A	N/A	N/A	12.0	0.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	03/16/98	68.5	7.75	806	4.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
	05/12/98	NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	
	07/27/98	68.1	6.81	904	1.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	74	ND	
	09/29/98 **	ORC installed															
	10/15/98	NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	02/18/99	NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	05/24/99	66.2	7.24	799	6.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
	MW-4	07/16/96	69.5	6.72	1,370	3.20	4.20	420	NS	470	NS	0.11	<1.0	NS	18	5,600	2,020
03/16/98		66.2	6.89	1,411	1.50	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
05/12/98		NM	NM	NM	NM	N/A	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	
07/27/98		70.5	6.34	1,434	0.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	21,000	8,900	
09/29/98 **		ORC installed															
10/15/98		NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
02/18/99		NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
05/24/99	67.6	6.72	1,509	1.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	18,000	7,660		

Table D-1
Intrinsic Bioremediation Evaluation and Enhancement Data

ARCO Service Station 0374
6407 Telegraph Avenue, Oakland, California

Well	Date Sampled	Field Analyses					Laboratory Analyses										
		Groundwater Temperature (deg F)	pH (units)	Conductivity (µmhos)	D.O. (mg/L)	Ferrous Iron (mg/L)	Total Alkalinity (mg CaCO ₃ /L)	B.O.D. (mg/L)	Carbon Dioxide (mg/L)	C.O.D. (mg/L)	Methane (%)	Nitrate as Nitrate (mg/L)	Nitrite as Nitrite (mg/L)	Sulfate (mg/L)	TPH as Gasoline (µg/L)	Total BTEX (µg/L)	
MW-5	07/16/96	70.4	6.85	690	6.80	0.0	170	NS	180	NS	<0.020	<1.0	NS	35	<50	1.1	
	03/16/98	69.5	7.19	584	1.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
	05/12/98	65.9	7.04	619	2.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
	07/27/98	73.6	7.39	569	1.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
	10/15/98	65.8	6.88	626	3.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	0.6	
	02/18/99	63.4	6.98	616	2.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
	05/24/99	66.7	6.70	591	2.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
MW-6	06/06/96	N/A	N/A	N/A	3.47	N/A	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	
	03/16/98	N/A	N/A	N/A	N/A	N/A	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	
	05/12/98	NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	
	07/27/98	70.3	6.67	638	0.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
	10/15/98	NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	
	02/18/99	NM	NM	NM	NM	NM	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	
	05/24/99	65.5	6.62	713	2.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND	ND	
D.O.		= Dissolved oxygen		µg/L		= Micrograms per liter											
B.O.D.		= Biochemical oxygen demand		NM		= not measured											
C.O.D.		= Chemical oxygen demand		NS		= Not sampled											
TPPH		= Total purgeable petroleum hydrocarbons		ND		= Not detected											
BTEX		= Benzene, toluene, ethylbenzene, and xylenes		N/A		= Not available											
deg F		= Degrees Fahrenheit		*		Field measurements collected on November 2, 1995.											
µmhos		= Micromhos		**		ORC installed											
mg/L		= Milligrams per liter		†		From April 10, 1996 groundwater monitoring event											