



David D. Bohannon Organization
Sixty 31st Avenue
San Mateo, CA 94403-3404
T 650.345.8222
F 650.573.5457
w ddbo.com

February 12, 2013

SUBMITTED ELECTRONICALLY

Mr. Mark E. Detterman, P.G., CEG
Hazardous Materials Specialist
Alameda County Health Care Services Agency
Department of Environmental Health
1131 Harbor Bay Parkway
Alameda, California 94502

RECEIVED

By Alameda County Environmental Health at 4:01 pm, Feb 26, 2013

Re: Fourth Quarter 2012 Groundwater Monitoring Report –
Former Petroleum Underground Storage Tank (UST) Site
David D. Bohannon Organization Property Located at
575 Paseo Grande - San Lorenzo, CA

Dear Mr. Detterman:

Enclosed for your review is the *Fourth Quarter 2012 Groundwater Monitoring Report* prepared by Stantec Consulting Services Inc. (Stantec) on behalf of David D. Bohannon Organization (Bohannon). The report summarizes recent groundwater monitoring and sampling conducted by Stantec at 575 Paseo Grande in San Lorenzo, California (the Site). Fourth quarter 2012 groundwater monitoring and sampling was conducted pursuant to the Alameda County Environmental Health (ACEH) letter to Bohannon dated August 31, 2012.

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge. If you have any questions regarding the enclosed report, please contact me at (650) 345-8222.

Sincerely,

A handwritten signature in blue ink that reads "Scott E. Bohannon".

Scott E. Bohannon, Senior Vice President

cc: Mr. Chris Maxwell, Stantec Consulting Services Inc.
Mr. Andrew A. Bassak, Manatt, Phelps, and Phillips LLP

**FOURTH QUARTER 2012
GROUNDWATER MONITORING REPORT
David D. Bohannon Organization**

575 Paseo Grande
San Lorenzo, California
PN: 185702534



February 19, 2013

Stantec

FOURTH QUARTER 2012

GROUNDWATER MONITORING REPORT

DAVID D. BOHANNON ORGANIZATION

Limitations and Certifications

February 19, 2013

Limitations and Certifications

This report was prepared in accordance with the scope of work outlined in Stantec's contract and with generally accepted professional engineering and environmental consulting practices existing at the time this report was prepared and applicable to the location of the site. It was prepared for the exclusive use of David D. Bohannon Organization for the express purpose stated above. Any re-use of this report for a different purpose or by others not identified above shall be at the user's sole risk without liability to Stantec. To the extent that this report is based on information provided to Stantec by third parties, Stantec may have made efforts to verify this third party information, but Stantec cannot guarantee the completeness or accuracy of this information. The opinions expressed and data collected are based on the conditions of the site existing at the time of the field investigation. No other warranties, expressed or implied are made by Stantec.

Prepared by:



Mason Albrecht, P.E. #C78130
Engineering Associate

Reviewed by:



Chris Maxwell, P.G.
Principal Geologist

Information, conclusions, and recommendations provided by Stantec in this document have been prepared under the supervision of and reviewed by the licensed professional whose signature appears below.

Licensed Reviewer:



Mason Albrecht, P.E. #C78130
Engineering Associate



Table of Contents

LIMITATIONS AND CERTIFICATIONS.....	L-1
TABLE OF CONTENTS	I
LIST OF ATTACHMENTS	II
LIST OF ABBREVIATIONS AND ACRONYMS.....	III
1.0 INTRODUCTION	1-1
2.0 GROUNDWATER MONITORING	2-1
2.1 WATER LEVEL GAUGING	2-1
2.2 GROUNDWATER SAMPLING.....	2-1
2.2.1 Quality Assurance/Quality Control Procedures.....	2-2
3.0 RESULTS	3-1
3.1 GROUNDWATER ANALYTICAL RESULTS	3-1
4.0 CONCLUSIONS	4-1

Stantec

FOURTH QUARTER 2012

GROUNDWATER MONITORING REPORT

DAVID D. BOHANNON ORGANIZATION

List of Attachments

February 19, 2013

List of Attachments

LIST OF TABLES

- | | |
|---------|---|
| Table 1 | Well Construction Details |
| Table 2 | Historical Groundwater Elevations |
| Table 3 | Groundwater Analytical Results – November 2012 and Historical |

LIST OF FIGURES

- | | |
|----------|--|
| Figure 1 | Site Location Map |
| Figure 2 | Site Plan |
| Figure 3 | Groundwater Potentiometric Surface Map, November 15, 2012 |
| Figure 4 | Petroleum Hydrocarbon Concentrations in Groundwater, November 15, 2012 |

Note: Tables and Figures appear at end of report.

LIST OF APPENDICES

- | | |
|------------|--|
| Appendix A | Summary of Previous Site Investigations and Remedial Actions |
| Appendix B | Field Data Sheets for the November 2012 Groundwater Monitoring Event |
| Appendix C | Laboratory Analytical Report and Chain-of-Custody for the November 2012 Groundwater Monitoring Event |
| Appendix D | Chemical Concentration Trends in Groundwater |

List of Abbreviations and Acronyms

ACEH	Alameda County Environmental Health
amsl	above mean sea level
Bohannon	David D. Bohannon Organization
BTEX	benzene, toluene, ethylbenzene, and total xylenes
DO	dissolved oxygen
ft/ft	feet per foot
LCS	laboratory control spike
MB	method blank
mL/min	milliliters per minute
MRL	method reporting limit
MS	matrix spike
ORP	oxidation/reduction potential
QA/QC	quality assurance and quality control
RPD	relative percent difference
SECOR	SECOR International Incorporated
Stantec	Stantec Consulting Services Inc.
TPHg	total petroleum hydrocarbons as gasoline
µg/L	micrograms per liter
U.S. EPA	United States Environmental Protection Agency
UST	underground storage tank

1.0 Introduction

Stantec Consulting Services Inc. (Stantec; formerly SECOR) presents this groundwater monitoring report for the fourth quarter of 2012 which describes results of groundwater monitoring and sampling conducted on November 15, 2012 and November 16, 2012, for the property located at 575 Paseo Grande, San Lorenzo, California (the Site; see Figure 1). This sampling event was conducted by Stantec pursuant to a letter from Alameda County Environmental Health (ACEH) to David D. Bohannon Organization (Bohannon), dated August 31, 2012, requesting quarterly groundwater monitoring and sampling to monitor post-remediation trends at the Site. The scope of work for the fourth quarter 2012 included measuring the depth-to-water and collecting groundwater samples in groundwater monitoring wells MW-1 through MW-7 and observation wells POBS-A1, POBS-B1, POBS-B2, and NOBS-B1 (see Figure 2). Groundwater samples were analyzed for total petroleum hydrocarbons as gasoline (TPHg) and benzene, toluene, ethylbenzene, and total xylenes, (collectively BTEX).

Site background information including a summary of previous Site investigations and remedial actions is included in Appendix A of this report.

2.0 Groundwater Monitoring

Site-wide groundwater monitoring and sampling was performed on November 15, 2012 and November 16, 2012, and consisted of sounding wells for depth-to-water and sampling monitoring wells MW-1 through MW-7 and observation wells POBS-A1, POBS-B1, POBS-B2, and NOBS-B1. Well gauging data is reported on Table 2. Field data sheets are provided in Appendix B. Laboratory analytical data is reported on Table 3 and included in Appendix C. The following summarizes the data collected by Stantec in November 2012.

2.1 WATER LEVEL GAUGING

Prior to purging and sampling, the depth-to-water was measured from the top of each well casing using a water-level indicator graduated to 0.01 foot. Depth-to-groundwater measurements and surveyed wellhead top-of-casing elevations were used to calculate groundwater surface elevations in wells MW-1 through MW-7. Table 2 presents historical monitoring well groundwater elevation data for the Site.

The average depth-to-water measured at the Site on November 15, 2012 was 6.53 feet below the top of well casing with an average water-table elevation of 22.29 feet above mean sea level (amsl). A potentiometric surface map illustrating the interpreted groundwater surface elevation and flow direction on November 15, 2012 is presented on Figure 3. The hydraulic gradient across the Site was approximately 0.002 feet per foot (ft/ft) toward the southwest.

2.2 GROUNDWATER SAMPLING

On November 15, 2012 and November 16, 2012, wells were purged and sampled using a low-flow purging method consisting of dedicated well tubing attached to a variable speed peristaltic pump set to extract groundwater at a rate of approximately 200 milliliters per minute (mL/min). Temperature, conductivity, pH, dissolved oxygen (DO) content, and oxidation/reduction potential (ORP) were monitored using a flow-through cell during purging to confirm stable water conditions prior to sampling. Copies of field data sheets are attached as Appendix B.

Samples were collected from each well using the dedicated tubing to limit the potential for cross-contamination between wells. Samples were placed in laboratory-supplied sample containers, labeled, and stored on ice pending delivery to TestAmerica, a California state accredited laboratory located in Pleasanton, California. The groundwater samples were analyzed for gasoline range organics (C5-C12) and BTEX by United States Environmental Protection Agency (U.S. EPA) Method 8260B.

2.2.1 Quality Assurance/Quality Control Procedures

Analytical data were evaluated for accuracy and precision based on field and laboratory quality assurance and quality control (QA/QC) performance.

Duplicate Sample

One duplicate sample was collected during the fourth quarter 2012 sampling event from observation well POBS-A1. The analysis of field duplicate samples is a measure of both field and analytical precision. The relative percent difference (RPD) between primary and duplicate sample concentrations for the November 2012 sampling event was less than 10 percent for all petroleum hydrocarbon analytes.

Holding Times

The laboratory QA/QC includes checking adherence to holding times. Holding times are established by the U.S. EPA and refer to the maximum allowable time to pass between sample collection and analysis by the laboratory. All analyses were performed within the holding times specified by the U.S. EPA.

Control Spikes and Method Blanks

The laboratory control spike (LCS) and matrix spike (MS) recovery results and method blank (MB) results were used to assess accuracy of the analytical data. The analytical program included eight LCS and LCS duplicate pairs, one MS and MS duplicate pair, and four MBs. The spike recovery results were within the prescribed range of acceptable limits for analytical accuracy in all cases. The data are included in Appendix C.

3.0 Results

The following presents a discussion of results of the November 2012 groundwater monitoring conducted at the Site.

3.1 GROUNDWATER ANALYTICAL RESULTS

Petroleum hydrocarbon chemical data for the November 2012 event are shown in Table 3 and illustrated on Figure 4. Laboratory analytical reports are included in Appendix C. Historical concentration trends for TPHg and benzene in select groundwater monitoring wells including MW-1, MW-2, MW-3, MW-4, and observation well POBS-A1 are included in Appendix D.

TPHg and BTEX concentrations continued to be below the laboratory method reporting limits (MRLs) in on-Site monitoring well MW-1 and in off-Site monitoring wells MW-5, MW-6, and MW-7.

Concentrations of TPHg and benzene in on-Site monitoring well MW-2 are consistent with previous sampling events for 2012 and remain well below historical concentrations for well MW-2. Toluene, ethylbenzene, and xylenes were not detected above the MRLs during the November 2012 sampling of monitoring well MW-2.

The concentrations of TPHg and benzene in off-Site monitoring well MW-4 were 4,000 micrograms per liter ($\mu\text{g}/\text{L}$) and 69 $\mu\text{g}/\text{L}$, respectively, and are consistent with previous sampling events for 2012. Toluene was detected at 6.4 $\mu\text{g}/\text{L}$ and ethylbenzene and xylenes were not detected above MRLs.

The concentrations of most petroleum hydrocarbons in the primary and duplicate samples from observation well POBS-A1 were similar to the September 2012 sampling event. TPHg and benzene were detected in the primary sample collected in November 2012 at 4,700 $\mu\text{g}/\text{L}$ and 1,600 $\mu\text{g}/\text{L}$, respectively, compared to 2,600 $\mu\text{g}/\text{L}$ and 1,100 $\mu\text{g}/\text{L}$, respectively, during the September 2012 sampling event.

The concentrations of TPHg and benzene in the sample from monitoring well MW-3, located approximately 14 feet downgradient of observation well POBS-A1, decreased from the September 2012 sampling event to near the MRLs. Toluene, ethylbenzene, and xylenes were not detected above the MRLs. Petroleum hydrocarbon concentrations in monitoring well MW-3 remain well below historical concentrations.

4.0 Conclusions

The following presents a discussion of the key results of the fourth quarter 2012 monitoring and sampling event conducted in November 2012:

- Concentrations of petroleum hydrocarbon constituents in off-Site and downgradient monitoring wells MW-5, MW-6, and MW-7 have been below laboratory MRLs for ten years following the beginning of groundwater monitoring at these well locations in December 2000, and continue to be below laboratory MRLs.
- As indicated by the sample analytical results for observation well POBS-A1, the concentrations of TPHg and BTEX in groundwater within the former underground storage tank (UST) area are similar to the September 2012 sampling event and continue to remain below pre-remediation levels. Concentrations of these constituents in monitoring well MW-3, located immediately downgradient of the former UST area, were near the laboratory MRLs in November 2012. The post-remediation trends for these wells indicate that residual concentrations in groundwater in the former UST area are localized and not significantly affecting groundwater immediately downgradient of the former UST area.
- Concentrations of petroleum hydrocarbons in off-Site monitoring well MW-4 are consistent with previous sampling events for 2012. The post-remediation trend for this well is considered to be stable.

Stantec

**FOURTH QUARTER 2012
GROUNDWATER MONITORING REPORT
DAVID D. BOHANNON ORGANIZATION**

TABLES

Fourth Quarter 2012 Groundwater Monitoring Report
David D. Bohannon Organization
575 Paseo Grande
San Lorenzo, California
Stantec PN: 185702534
February 19, 2013

TABLE 1
Well Construction Details
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Well	Date Installed	Top of Casing Elevation (ft amsl) ¹	Total Depth (ft bgs)	Casing Diameter (inches)	Screen Slot Size (inches)	Screen Length (feet)	Top of Screen (ft bgs)	Bottom of Screen (ft bgs)
MW-1	5/10/1996	29.77	15.5	2	0.02	9.75	5.5	15.25
MW-2	5/10/1996	29.54	15.5	2	0.02	9.75	5.5	15.25
MW-3	5/10/1996	29.34	14.5	2	0.02	9.75	4.5	14.25
MW-4	10/2/2000	28.64	15	2	0.02	9	6	15
MW-5	10/2/2000	28.56	15	2	0.02	9	6	15
MW-6	10/2/2000	27.70	15	2	0.02	9	6	15
MW-7	10/2/2000	28.22	15	2	0.02	9	6	15
PIW-A1	5/4/2004	32.46	18	4	0.02	10	8	18
PIW-A2	5/4/2004	32.57	18	4	0.02	10	8	18
PIW-A3	5/4/2004	31.74	18	4	0.02	10	8	18
PIW-A4	5/6/2004	32.35	18	4	0.02	10	8	18
PIW-B1	5/3/2004	32.11	25.5	4	0.02	6	19.5	25.5
PIW-B2	5/3/2004	32.37	26	4	0.02	6	20	26
PIW-B3	5/4/2004	31.91	26	4	0.02	6	20	26
PIW-B4	5/4/2004	32.18	26	4	0.02	6	20	26
POBS-A1	5/6/2004	29.84	18	1	0.02	10	8	18
POBS-B1	5/6/2004	29.95	26	1	0.02	6	20	26
POBS-B2	5/6/2004	29.21	26	2	0.02	6	20	26
NIW-A1	5/5/2004	31.53	18	4	0.02	10	8	18
NIW-A2	5/5/2004	30.80	18	4	0.02	10	8	18
NIW-B1	5/5/2004	29.91	26	4	0.02	6	20	26
NIW-B2	5/5/2004	31.04	26	4	0.02	6	20	26
NOBS-B1	5/7/2004	28.54	26	2	0.02	6	20	26
DP-1	9/30/2005	32.53	20.5	8	0.02	10	4.75	14.75
DP-2	9/29/2005	32.35	20	8	0.02	10	4.25	14.25
DP-3	9/29/2005	32.22	20	8	0.02	10	4.50	14.50
DP-4	9/28/2005	32.07	20	8	0.02	10	4.25	14.25
DP-5	9/28/2005	32.24	20.25	8	0.02	9.75	4.75	14.50
DP-6	9/29/2005	31.66	20.25	8	0.02	10	4.50	14.50
DP-7	9/29/2005	31.34	20.25	8	0.02	10	4.50	14.50

Abbreviations:

ft amsl = feet above mean sea level

ft bgs = feet below ground surface

in = inches

NA = Not Available or Not Known

Notes:

- 1) Top of casing elevations surveyed by Mid Coast Engineers on September 24, 2012;
North American Vertical Datum of 1988, NAVD 88.
- 2) Well construction information in Table 1 was updated in September 2012 for GeoTracker® compliance.

TABLE 2
Historical Groundwater Elevations
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TOC Elevation ¹ (ft amsl)	DTW (ft BTOC)	Groundwater Elevation (ft amsl)
MW-1	27.11	5.65	21.46
5/17/1996		7.47	19.64
10/8/1996		6.27	20.84
4/1/1997		6.90	20.21
6/12/1997		7.48	19.63
9/10/1997		6.44	20.67
6/8/1999		7.56	19.55
9/13/1999		7.41	19.70
12/21/1999		5.35	21.76
3/17/2000		6.99	19.99
12/5/2000		5.71	21.27
2/28/2001		7.39	19.59
8/22/2001		6.25	20.73
5/22/2002		7.23	19.75
8/29/2002		7.13	19.85
12/2/2002		5.77	21.21
3/4/2003		6.37	20.61
12/18/2003		6.13	20.85
4/13/2004		6.93	20.05
12/2/2004		5.90	21.08
5/27/2005		6.79	20.19
8/24/2006		6.59	20.39
1/13/2010		5.92	21.06
5/3/2012	29.77	7.32	22.45
9/18/2012		7.08	22.69
MW-2	26.73	5.56	21.17
5/17/1996		7.15	19.58
10/8/1996		6.61	20.12
4/1/1997		6.76	19.97
6/12/1997		7.19	19.54
9/10/1997		6.45	20.28
6/8/1999		7.46	19.27
9/13/1999		7.26	19.47
12/21/1999		5.56	21.17
3/17/2000		7.01	19.72
12/5/2000		5.81	20.92
2/28/2001		7.42	19.31
8/22/2001		6.40	20.33
5/22/2002		7.26	19.47
8/29/2002		7.02	19.71
12/2/2002		5.91	20.82
3/4/2003		6.47	20.26
12/18/2003		6.28	20.45
4/13/2004		6.80	19.93
12/2/2004		6.11	20.62
5/27/2005		6.90	19.83
8/24/2006		6.53	20.20
1/13/2010		6.17	20.56
5/3/2012	29.54	7.37	22.17
9/18/2012		7.12	22.42
11/15/2012			

TABLE 2
Historical Groundwater Elevations
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TOC Elevation ¹ (ft amsl)	DTW (ft BTOC)	Groundwater Elevation (ft amsl)
MW-3			
5/17/1996	26.15	4.39	21.76
10/8/1996		6.82	19.33
4/1/1997		5.53	20.62
6/12/1997		6.18	19.97
9/10/1997		6.81	19.34
6/8/1999		5.74	20.41
9/13/1999		6.88	19.27
12/21/1999		6.66	19.49
3/17/2000		4.51	21.64
12/5/2000	26.55	6.84	19.71
2/28/2001		5.44	21.11
8/22/2001		7.29	19.26
5/22/2002		6.22	20.33
8/29/2002		7.26	19.29
12/2/2002		6.85	19.70
3/4/2003		5.72	20.83
12/18/2003		6.15	20.40
4/13/2004		5.97	20.58
12/2/2004		6.64	19.91
5/27/2005		5.74	20.81
8/23/2006		6.69	19.86
1/13/2010		6.08	20.47
5/3/2012		5.72	20.83
9/18/2012	29.34	7.18	22.16
11/15/2012		6.90	22.44
MW-4			
12/5/2000	25.87	6.28	19.59
2/28/2001		4.99	20.88
8/22/2001		6.73	19.14
5/22/2002		5.50	20.37
8/29/2002		6.55	19.32
12/2/2002		6.28	19.59
3/4/2003		5.28	20.59
12/18/2003		5.85	20.02
4/13/2004		5.50	20.37
12/2/2004		6.05	19.82
5/27/2005		5.46	20.41
8/24/2006		6.15	19.72
1/13/2010		5.78	20.09
5/3/2012		5.38	20.49
6/8/2012		5.87	20.00
9/18/2012	28.64	6.65	21.99
11/15/2012		6.38	22.26

TABLE 2
Historical Groundwater Elevations
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TOC Elevation ¹ (ft amsl)	DTW (ft BTOC)	Groundwater Elevation (ft amsl)
MW-5	12/5/2000 2/28/2001 8/22/2001 5/22/2002 8/29/2002 12/2/2002 3/4/2003 12/18/2003 4/13/2004 12/2/2004 5/27/2005 8/24/2006 1/13/2010 5/3/2012 9/18/2012 11/15/2012	25.77 28.56	6.25 4.95 6.69 5.50 6.54 6.37 5.41 5.65 5.37 6.03 5.46 6.17 5.72 5.52 6.67 6.39
			19.52
			20.82
			19.08
			20.27
			19.23
			19.40
			20.36
			20.12
			20.40
			19.74
			20.31
			19.60
			20.05
			20.25
MW-6	12/5/2000 2/28/2001 8/22/2001 5/22/2002 8/29/2002 12/2/2002 3/4/2003 12/18/2003 4/13/2004 12/2/2004 5/27/2005 8/24/2006 1/13/2010 5/3/2012 9/18/2012 11/15/2012	24.89 27.70	5.68 4.35 6.15 4.91 5.96 5.70 4.69 5.05 4.87 5.42 4.75 5.57 5.17 4.82 6.10 5.79
			19.21
			20.54
			18.74
			19.98
			18.93
			19.19
			20.20
			19.84
			20.02
			19.47
			20.14
			19.32
			19.72
			20.07
MW-7	12/5/2000 2/28/2001 8/22/2001 5/22/2002 8/29/2002 12/2/2002 3/4/2003 12/18/2003 4/13/2004 12/2/2004 5/27/2005 8/24/2006 1/13/2010 5/4/2012 9/18/2012 11/15/2012	25.43 28.22	6.43 4.76 6.95 5.55 NM 6.43 5.10 5.65 5.27 6.15 5.12 6.28 5.97 5.20 6.60 6.07
			19.00
			20.67
			18.48
			19.88
			--
			19.00
			20.33
			19.78
			20.16
			19.28
			20.31
			19.15
			19.46
			20.23

TABLE 2
Historical Groundwater Elevations
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TOC Elevation ¹ (ft amsl)	DTW (ft BTOC)	Groundwater Elevation (ft amsl)
--------------	---	------------------	------------------------------------

Notes:

DTW = Depth to water
ft amsl = feet above mean sea level
ft BTOC = feet below top of casing
NM = Not measured
TOC = Top of casing

- 1) Top of casing elevations surveyed by Mid Coast Engineers on September 24, 2012; North American Vertical Datum of 1988, NAVD 88. Previous surveys in May 1996 and December 2000 referenced National Geodetic Vertical Datum, NGVD 29.

TABLE 3
Groundwater Analytical Results - November 2012 and Historical
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TPH-G (µg/L)	Benzene (µg/L)	Toluene (µg/L)	Ethylbenzene (µg/L)	Total Xylenes (µg/L)	MTBE (µg/L)	Chromium (µg/L)	Dissolved Inorganic Lead (µg/L)
Groundwater Monitoring Wells								
MW-1								
5/17/1996	1,100	<0.5	8.7	7.4	17	--	<10	<50
10/8/1996	120	<0.5	<0.5	2.7	<0.5	--	--	--
4/1/1997	550	<0.5	<0.5	7.6	6.6	--	--	--
6/12/1997	160	<0.5	<0.5	2.9	1.7	--	--	--
9/10/1997	640	2.2	3.8	7.4	16	--	--	--
6/8/1999	<50	<0.5	<0.5	<0.5	<0.5	<10	<10	<20
9/13/1999	<50	<0.5	<0.5	<0.5	1.1	--	--	<5
12/21/1999	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
3/17/2000	<50	<0.5	<0.5	<0.5	0.79	<5	--	<5
12/5/2000	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
2/28/2001	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
8/22/2001	<50	<0.5	<0.5	<0.5	<0.5	<5	--	<5
5/22/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
8/29/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/2/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
3/4/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/18/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
4/13/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
6/18/2004	150	1.5	<0.5	2.7	2.4	--	--	--
5/27/2005	<50	1.6	<0.5	<0.5	<0.5	--	--	--
8/24/2006	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
1/13/2010	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/3/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
11/15/2012	<50	<0.5	<0.5	<0.5	<0.5-1.0	--	--	--
MW-2								
5/17/1996	23,000	900	330	650	1,500	--	<10	<50
10/8/1996	8,400	530	<50	400	360	--	--	--
4/1/1997	7,600	470	64	210	250	--	--	--
6/12/1997	8,200	440	52	190	190	--	--	--
9/10/1997	8,500	390	51	220	240	--	--	--
6/8/1999	2,100	240	8	33	40	<10	<10	33
9/13/1999	1,300	120	<5	<5	15	--	--	--
12/21/1999	1,400	110	5.6	11	17	--	--	<5
3/17/2000	1,200	180	19	28	31	<50	--	<5
12/5/2000	800	75	1.8	11	14	--	--	--
2/28/2001	1,200	120	7.1	19	27	--	--	--
8/22/2001	990	75	3.5	8.9	8.1	<5	--	<5
5/22/2002	1,700	230	12	12	25	--	--	--
8/29/2002	1,000	66	2.6	12	12	--	--	--
12/2/2002	1,100	76	8.7	11	17	--	--	--
3/4/2003	1,100	130	4.5	22	24	--	--	--
12/18/2003	910	55	4.1	3.3	3.7	--	--	--
4/13/2004	2,700	350	15	18	24	--	--	--
10/5/2004	2,000	120	5.5	<2.5	8.3	--	--	--
5/27/2005	5,700	450	53	240	71	--	--	--
8/24/2006	1,400	90	4.7	16	21	--	--	--
1/13/2010	130 ^j	1.2	<0.5	<0.5	<1.0	--	--	--
5/3/2012	350	22	<0.5	2.1	<1.0	--	--	--
9/18/2012	410	4.7	<0.5	<0.5	<1.0	--	--	--
11/15/2012	350	3.2	<0.5	<0.5	<0.5-1.0	--	--	--

TABLE 3
Groundwater Analytical Results - November 2012 and Historical
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TPH-G (µg/L)	Benzene (µg/L)	Toluene (µg/L)	Ethylbenzene (µg/L)	Total Xylenes (µg/L)	MTBE (µg/L)	Chromium (µg/L)	Dissolved Inorganic Lead (µg/L)
MW-3								
5/17/1996	6,700	140	45	210	180	--	<10	<50
10/8/1996	1,800	2,700	240	910	970	--	--	--
4/1/1997	27,000	520	50	520	450	--	--	--
6/12/1997	29,000	2,700	160	940	500	--	--	--
9/10/1997	290,000	1,800	3,200	2,800	6,900	--	--	--
6/8/1999	1,700	320	6.4	15	<0.5	<10	<10	24
9/13/1999	5,400	1,000	<20	<20	<20	--	--	--
12/21/1999	8,800	1,400	63	17	23	--	--	<5
3/17/2000	1,500	190	<5	7.6	<5	<50	--	<5
12/5/2000	5,400	790	20	7.4	10	--	--	--
2/28/2001	3,600	850	15	25	10	--	--	--
8/22/2001	8,100	1,600	28	44	17	<50	--	<5
5/22/2002	5,400	1,000	32	13	21	--	--	--
8/29/2002	6,700	1,700	55	49	38	--	--	--
12/2/2002	5,700	650	17	37	33	--	--	--
3/4/2003	5,000	650	18	42	27	--	--	--
12/18/2003	5,200	910	25	20	21	--	--	--
4/13/2004	3,900	1,200	19	<5.0	<10	--	--	--
6/18/2004	4,300	1,600	40	81	26	--	--	--
8/27/2004	6,900	2,100	59	220	<50	--	--	--
10/5/2004	9,800	2,500	52	160	38	--	--	--
12/2/2004	8,300	2,400	41	200	29	--	--	--
12/14/2004	15,000	3,600	140	560	210	--	--	--
5/27/2005	5,500	840	36	210	41	--	--	--
8/23/2006	1,700	190	5.3	51	<10	--	--	--
1/13/2010	<50	2	<0.5	<0.5	<1.0	--	--	--
5/3/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
9/18/2012	480/440	110/100	2.6/2.4	0.66/0.62	1.2/1.1	--	--	--
11/16/2012	66	2.0	<0.5	<0.5	<0.5-1.0	--	--	--
MW-4								
12/5/2000	3,900	320	13	41	31	--	--	<5
2/28/2001	3,400	250	14	44	22	--	--	<5
8/22/2001	4,800	260	12	27	9	<50	--	<5
5/22/2002	5,100	320	29	74	50	--	--	--
8/29/2002	3,700	260	<5	30	28	--	--	--
12/2/2002	5,100	250	8.9	26	22	--	--	--
3/4/2003	4,500	170	18	63	47	--	--	--
12/18/2003	2,900	160	8.3	8	<5	--	--	--
4/13/2004	7,400	290	29	110	100	--	--	--
6/18/2004	2,700	140	12	36	16	--	--	--
8/27/2004	460	19	1.2	1.1	1.5	--	--	--
10/5/2004	460	19	<1.0	<1.0	<1.0	--	--	--
12/2/2004	2,800	120	5.4	8.3	5.3	--	--	--
5/27/2005	7,300	350	37	100	50	--	--	--
8/24/2006	2,400	59	8.2	19	14	--	--	--
1/14/2010	400	1.6	<0.5	<0.5	<1.0	--	--	--
5/3/2012	6,800	190	26	15	25	--	--	--
6/8/2012	3,400	83	11	7.1	11	<0.50	--	--
9/18/2012	1,400	25	4.2	1.2	3.6	--	--	--
11/15/2012	4,000	69	6.4	<2.5	<2.5-5.0	--	--	--

TABLE 3
Groundwater Analytical Results - November 2012 and Historical
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TPH-G (µg/L)	Benzene (µg/L)	Toluene (µg/L)	Ethylbenzene (µg/L)	Total Xylenes (µg/L)	MTBE (µg/L)	Chromium (µg/L)	Dissolved Inorganic Lead (µg/L)
MW-5								
12/5/2000	<50	<0.5	<0.5	<0.5	<0.5	--	--	<5
2/28/2001	<50	<0.5	<0.5	<0.5	<0.5	--	--	<5
8/22/2001	<50	<0.5	<0.5	<0.5	<0.5	<5	--	<5
5/22/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
8/29/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/2/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
3/4/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/18/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
4/13/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
12/2/2005	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/27/2005	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
8/24/2006	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
1/14/2010	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/3/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
11/15/2012	<50	<0.5	<0.5	<0.5	<0.5-1.0	--	--	--
MW-6								
12/5/2000	<50	<0.5	<0.5	<0.5	<0.5	--	--	<5
2/28/2001	<50	<0.5	<0.5	<0.5	<0.5	--	--	<5
8/22/2001	<50	<0.5	<0.5	<0.5	<0.5	<5	--	<5
5/22/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
8/29/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/2/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
3/4/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/18/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
4/13/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
12/2/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/27/2005	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
8/24/2006	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
1/13/2010	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/3/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
11/15/2012	<50	<0.5	<0.5	<0.5	<0.5-1.0	--	--	--
MW-7								
12/5/2000	<50	<0.5	<0.5	<0.5	1.5	--	--	<5
2/28/2001	<50	<0.5	<0.5	<0.5	6.7	--	--	<5
8/22/2001	<50	<0.5	<0.5	<0.5	<0.5	<5	--	<5
5/22/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/2/2002	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
3/4/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/18/2003	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
4/13/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
12/2/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/27/2005	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
8/24/2006	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
1/13/2010	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/4/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
11/15/2012	<50	<0.5	<0.5	<0.5	<0.5-1.0	--	--	--
Peroxide Treatment Area - A Zone Injection Wells								
PIW-A1								
5/13/2004	6,800	460	50	31	300	--	--	--
6/18/2004	240	10	2.1	4	11	--	--	--
8/27/2004	220	14	1.2	2	5	--	--	--
10/5/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
12/2/2004	640	63	12.0	15	29	--	--	--
PIW-A2								
5/13/2004	20,000	1,500	460	760	2,600	--	--	--
6/18/2004	2,800	150	14	6.5	90	--	--	--
8/27/2004	500	34	3	4.4	12	--	--	--
12/2/2004	350	6.1	1.2	2.4	5.4	--	--	--
PIW-A3								
12/14/2004	1,500	220	28	55	99	--	--	--

TABLE 3
Groundwater Analytical Results - November 2012 and Historical
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TPH-G (µg/L)	Benzene (µg/L)	Toluene (µg/L)	Ethylbenzene (µg/L)	Total Xylenes (µg/L)	MTBE (µg/L)	Chromium (µg/L)	Dissolved Inorganic Lead (µg/L)
Peroxide Treatment Area - B Zone Injection Wells								
PIW-B1								
5/13/2004	1,900	28	<5.0	11	51	--	--	--
6/18/2004	270	22	1	2.2	2.7	--	--	--
8/27/2004	230	11	0.85	1.7	4.3	--	--	--
12/2/2002	66	<0.5	<0.5	<0.5	<1.0	--	--	--
PIW-B3								
5/13/2004	3,300	420	17	7.8	44	--	--	--
6/18/2004	180	1.2	<0.5	<0.5	2.4	--	--	--
8/27/2004	230	20.0	0.93	3.3	2.9	--	--	--
12/2/2004	64	0.75	<0.5	<0.5	<1.0	--	--	--
Peroxide Treatment Area - A Zone Observation Wells								
POBS-A1								
5/13/2004	16,000	2,200	220	480	980	--	--	--
6/18/2004	11,000	2,200	150	120	820	--	--	--
8/27/2004	23,000	2,900	140	180	470	--	--	--
10/5/2004	13,000	2,400	83	130	94	--	--	--
12/2/2004	17,000	3,500	240	210	730	--	--	--
12/14/2004	13,000	2,700	200	220	510	--	--	--
5/27/2005	9,600	1,200	62	110	180	--	--	--
8/24/2006	8,500	1,700	58	120	100	--	--	--
1/13/2010	7,300^J	1,100	29	53	42	--	--	--
5/4/2012	540	110	2.0	1.4	<1.0	--	--	--
9/18/2012	2,600	1,100	27	8.3	18	--	--	--
11/16/2012	4,700/4,700	1,600/1,700	36/35	6.6/6.3	28.1/27.1	--	--	--
Peroxide Treatment Area - B Zone Observation Wells								
POBS-B1								
5/13/2004	11,000	250	71	160	590	--	--	--
6/18/2004	3,500	9.8	<0.5	0.8	13	--	--	--
8/27/2004	500	1.4	<0.5	<0.5	<1.0	--	--	--
12/2/2004	190	2.6	<0.5	<0.5	<1.0	--	--	--
5/27/2005	68	17.0	<0.5	1.6	0.52	--	--	--
8/24/2006	50	1.1	<0.5	<0.5	<1.0	--	--	--
5/4/2012	<50	0.80	<0.5	<0.5	<1.0	--	--	--
9/18/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
11/16/2012	<50	<0.5	<0.5	<0.5	<0.5-1.0	--	--	--
POBS-B2								
5/13/2004	4,500	150	23	11	120	--	--	--
6/18/2004	97	7.4	0.8	1.6	1.7	--	--	--
8/27/2004	240	36.0	1.6	6.7	4.2	--	--	--
12/2/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/27/2005	97	33.0	0.56	1.3	0.74	--	--	--
8/24/2006	57	<0.5	<0.5	<0.5	<1.0	--	--	--
5/3/2012	83	8.8	<0.5	<0.5	<1.0	--	--	--
9/18/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
11/16/2012	<50	<0.5	<0.5	<0.5	<0.5-1.0	--	--	--
Nitrate Injection Area - A Zone Injection Wells								
NIW-A1								
5/13/2004	9,300	1,800	59	250	96	--	--	--
6/18/2004	3,100	340	22	93	55	--	--	--
8/27/2004	250	13	1.4	6	5.7	--	--	--
10/5/2004	1,700	150	<5.0	24	12	--	--	--
12/2/2004	1,400	28	6.2	10	23	--	--	--
5/27/2005	14,000	1,300	61.0	680	300	--	--	--
NIW-A2								
5/13/2004	970	18	<2.5	<2.5	4	--	--	--
6/18/2004	200	6.4	1.7	2.1	3.5	--	--	--
8/27/2004	<500	6.3	<5.0	<5.0	<10	--	--	--
12/2/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/27/2005	550	14.0	0.7	1.8	0.93	--	--	--

TABLE 3
Groundwater Analytical Results - November 2012 and Historical
David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, CA

Date Sampled	TPH-G (µg/L)	Benzene (µg/L)	Toluene (µg/L)	Ethylbenzene (µg/L)	Total Xylenes (µg/L)	MTBE (µg/L)	Chromium (µg/L)	Dissolved Inorganic Lead (µg/L)
Nitrate Injection Area - B Zone Injection Wells								
NIW-B1								
5/13/2004	170	6.5	1.1	2.4	8.0	--	--	--
6/18/2004	160	2.9	0.7	2.6	2.5	--	--	--
8/27/2004	110	6.9	<0.5	1.4	2.0	--	--	--
12/2/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
NIW-B2								
5/13/2004	260	8.9	1.5	4	8.4	--	--	--
6/18/2004	120	1.0	<0.5	1.1	<1	--	--	--
8/27/2004	120	4.4	<0.5	1.1	1.6	--	--	--
12/2/2004	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
Nitrate Injection Area - Observation Wells								
NOBS-B1								
5/13/2004	120	4.6	0.8	2.3	5.4	--	--	--
6/18/2004	88	1.9	0.7	1.7	<1	--	--	--
8/27/2004	180	5.5	0.53	0.99	1.6	--	--	--
12/2/2004	<50	2.0	<0.5	<0.5	<1.0	--	--	--
8/24/2006	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
5/3/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
9/18/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--
11/15/2012	<50	<0.5	<0.5	<0.5	<1.0	--	--	--

Abbreviations:

µg/L = micrograms per liter

MTBE = methyl tert-butyl ether

TPH-G = Total Petroleum Hydrocarbons, Gasoline Range

-- = water sample not analyzed for specified constituents

Notes:

Bold indicates detected concentration.

J = the chromatograph for this sample does not match the chromatographic pattern of the specified standard


4,700/4,700 = primary and duplicate sample analytical results.

Stantec

**FOURTH QUARTER 2012
GROUNDWATER MONITORING REPORT
DAVID D. BOHANNON ORGANIZATION**

FIGURES

Fourth Quarter 2012 Groundwater Monitoring Report
David D. Bohannon Organization
575 Paseo Grande
San Lorenzo, California
Stantec PN: 185702534
February 19, 2013

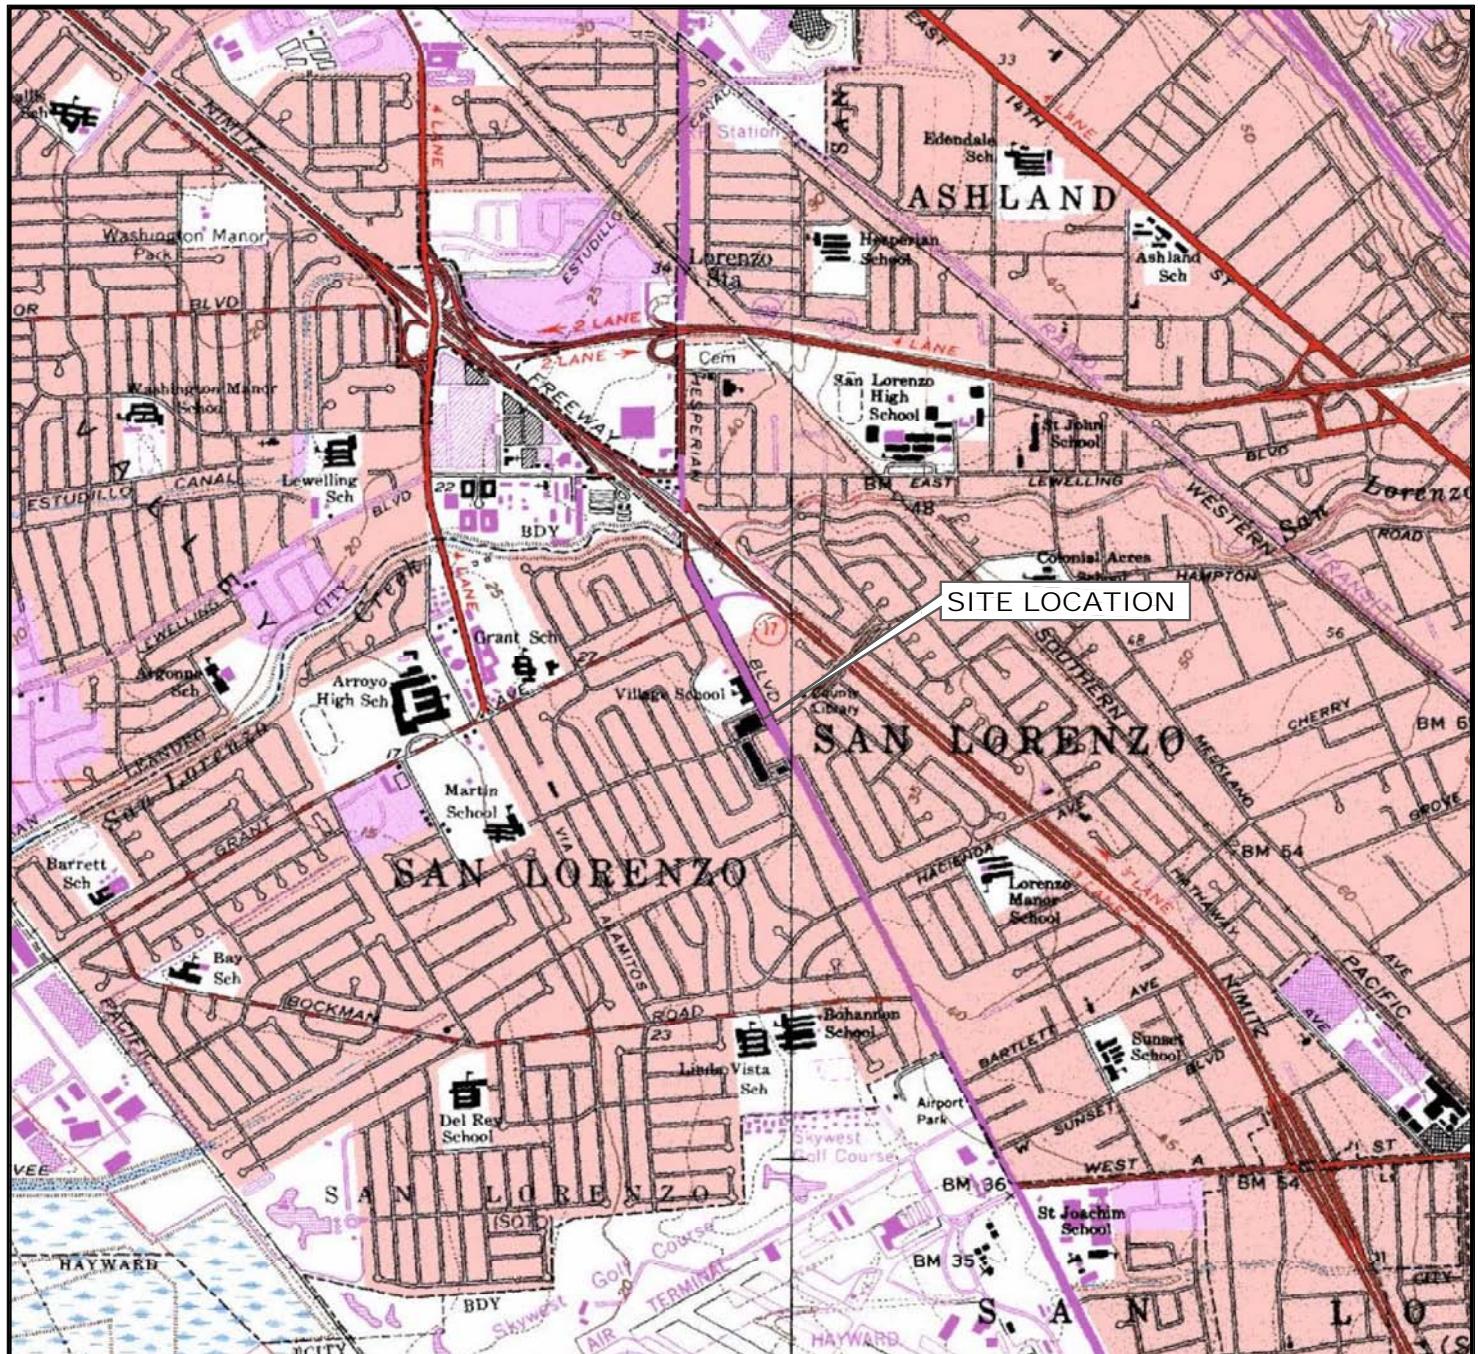

CALIFORNIA

1 1/2 0 1

SCALE IN MILE

1000 0 1000 2000 3000 4000 5000 6000 7000

SCALE IN FEET

Image courtesy of the U.S. Geological Survey and Microsoft TerraService OpenGIS Map Server



57 Lafayette Circle, 2nd Floor
Lafayette California
PHONE: (925) 299-9300 FAX: (925) 299-9302

FOR:

DAVID D. BOHANNON ORGANIZATION
575 PASEO GRANDE
SAN LORENZO, CALIFORNIA

SITE LOCATION MAP

FIGURE:

1


JOB NUMBER:
185702534.200.0003

DRAWN BY:
JMA

CHECKED BY:
CRM

APPROVED BY:
CRM

DATE:
01/31/13

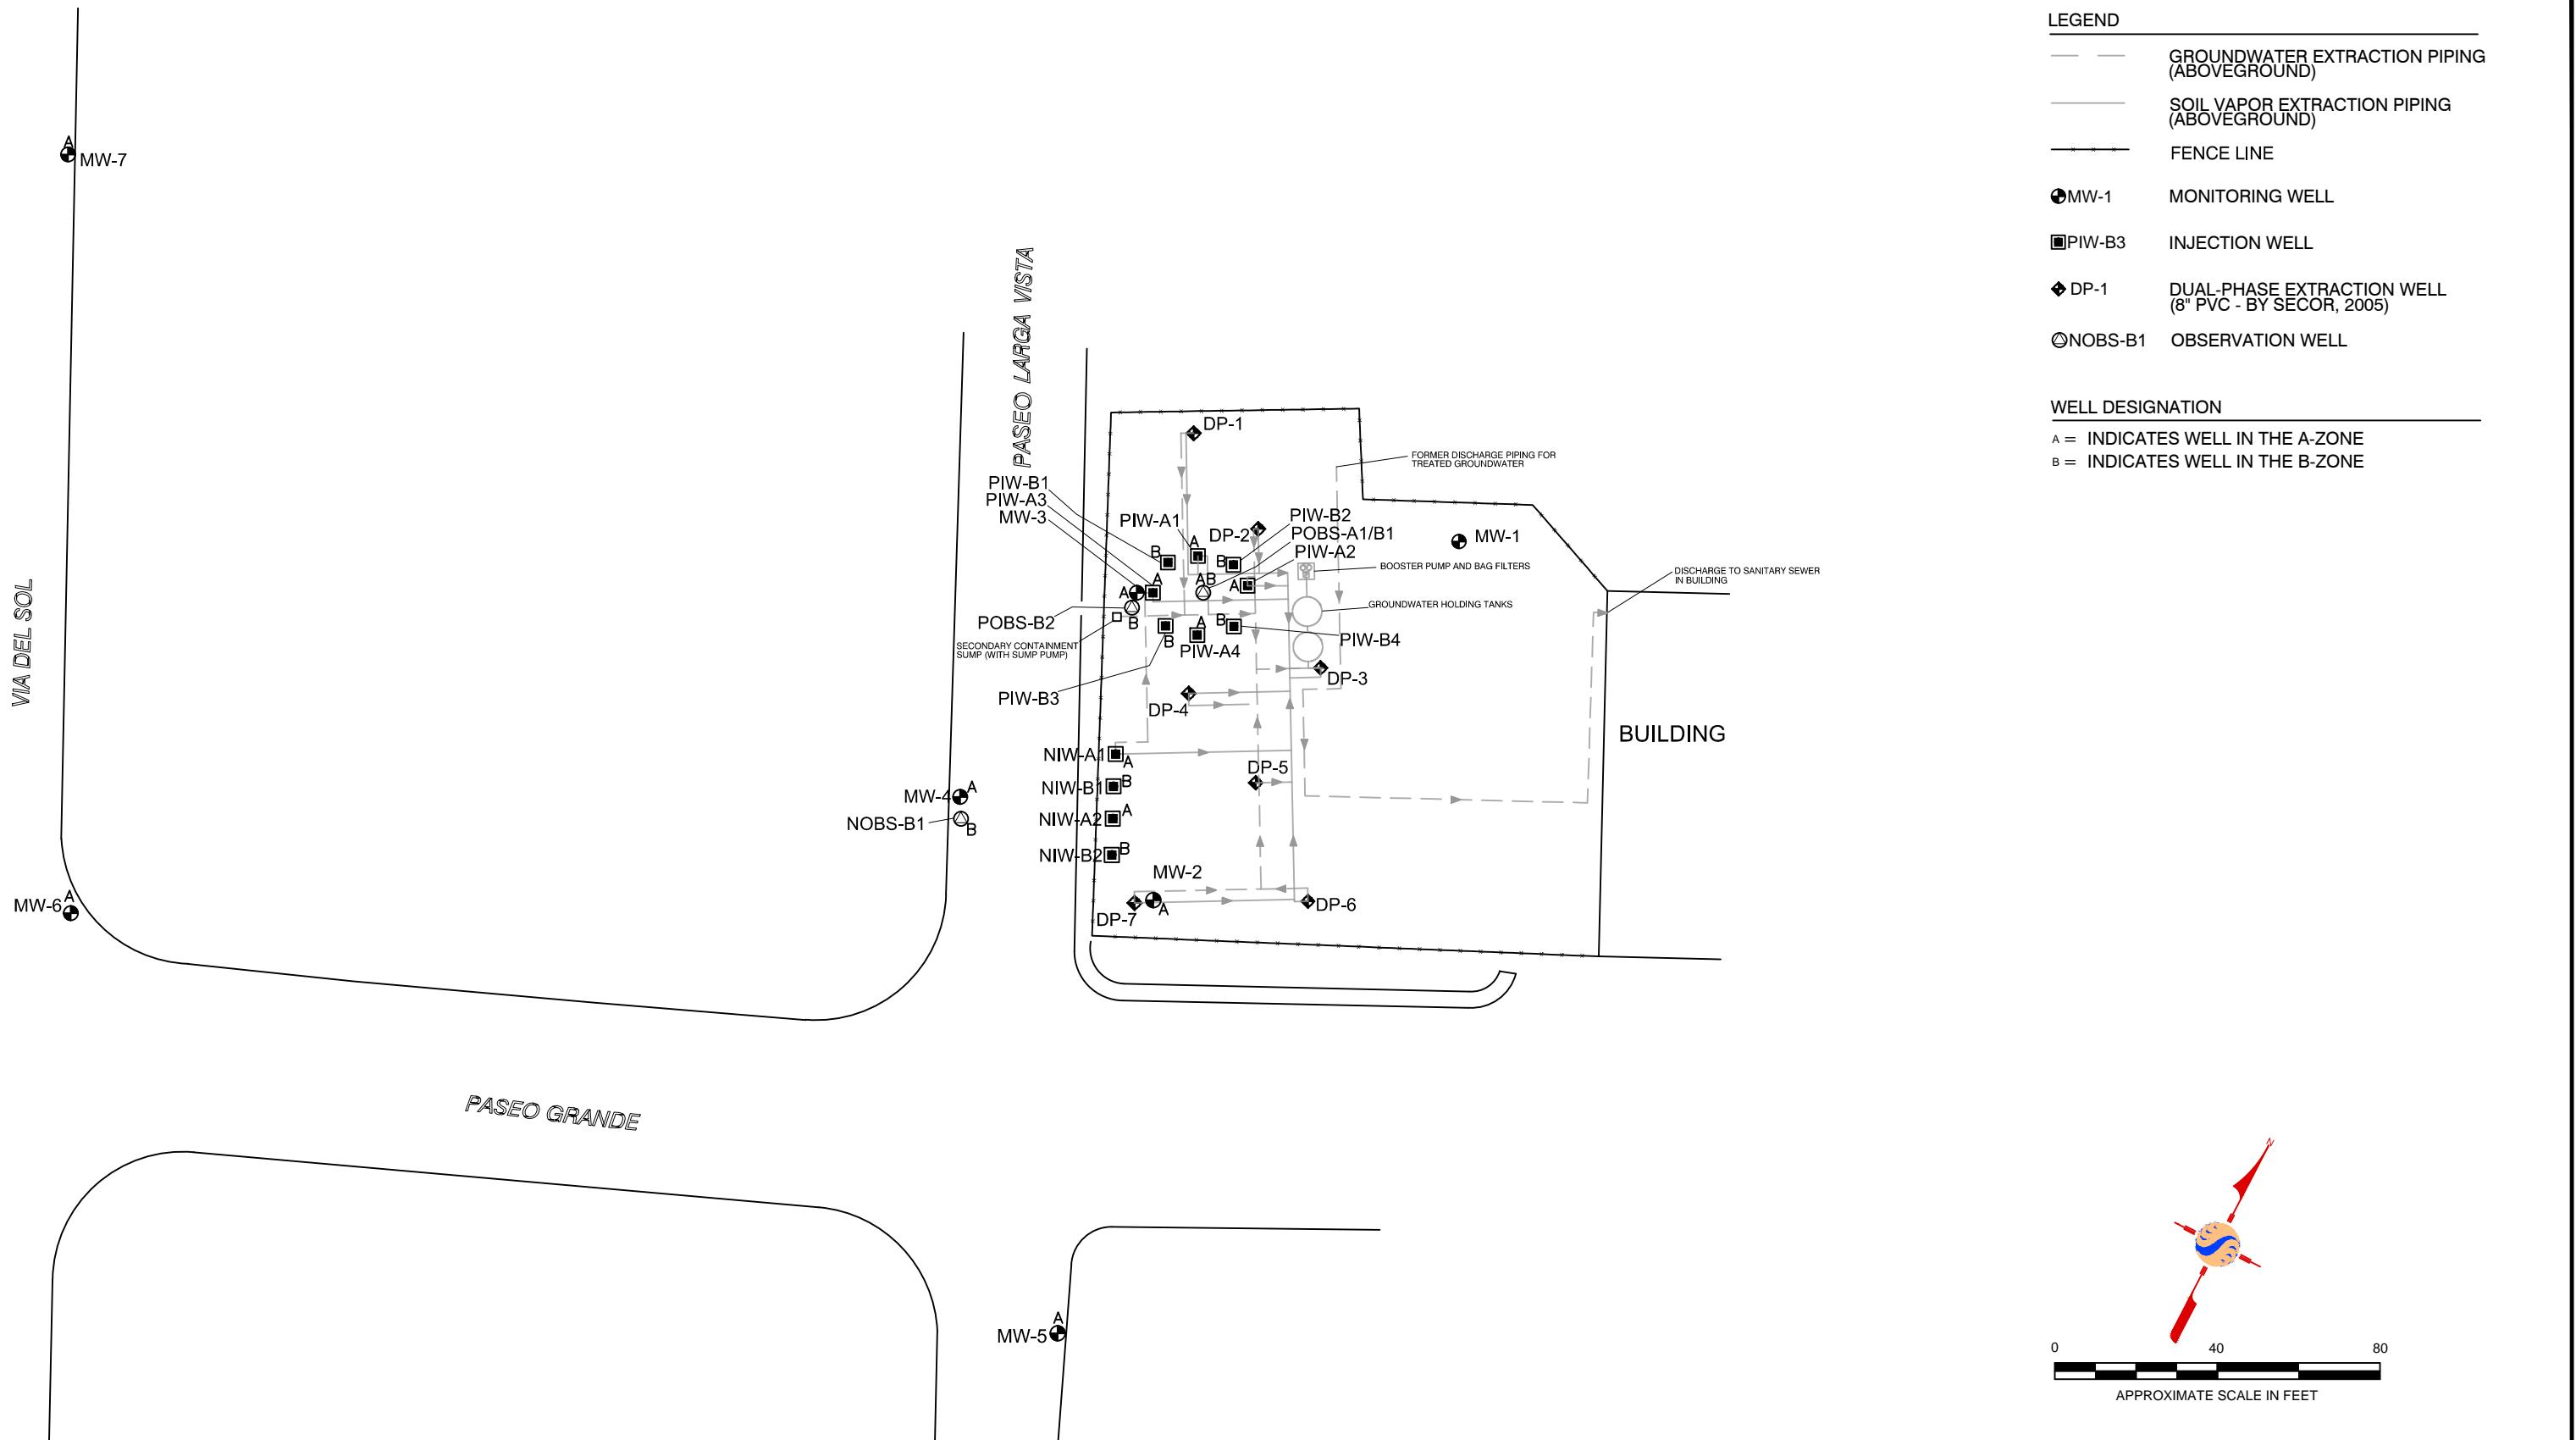


57 Lafayette Circle, 2nd Floor
Lafayette, CA 94549
(925) 299-9300/299-9302 (Fax)

FOR:
DAVID D. BOHANNON ORGANIZATION
575 PASEO GRANDE
SAN LORENZO, CALIFORNIA

JOB NUMBER: 185702534.200.0003	DRAWN BY: RRR	CHECKED BY: JMA	APPROVED BY: JMA	DATE: 1/31/13
--------------------------------	---------------	-----------------	------------------	---------------

SITE PLAN

2

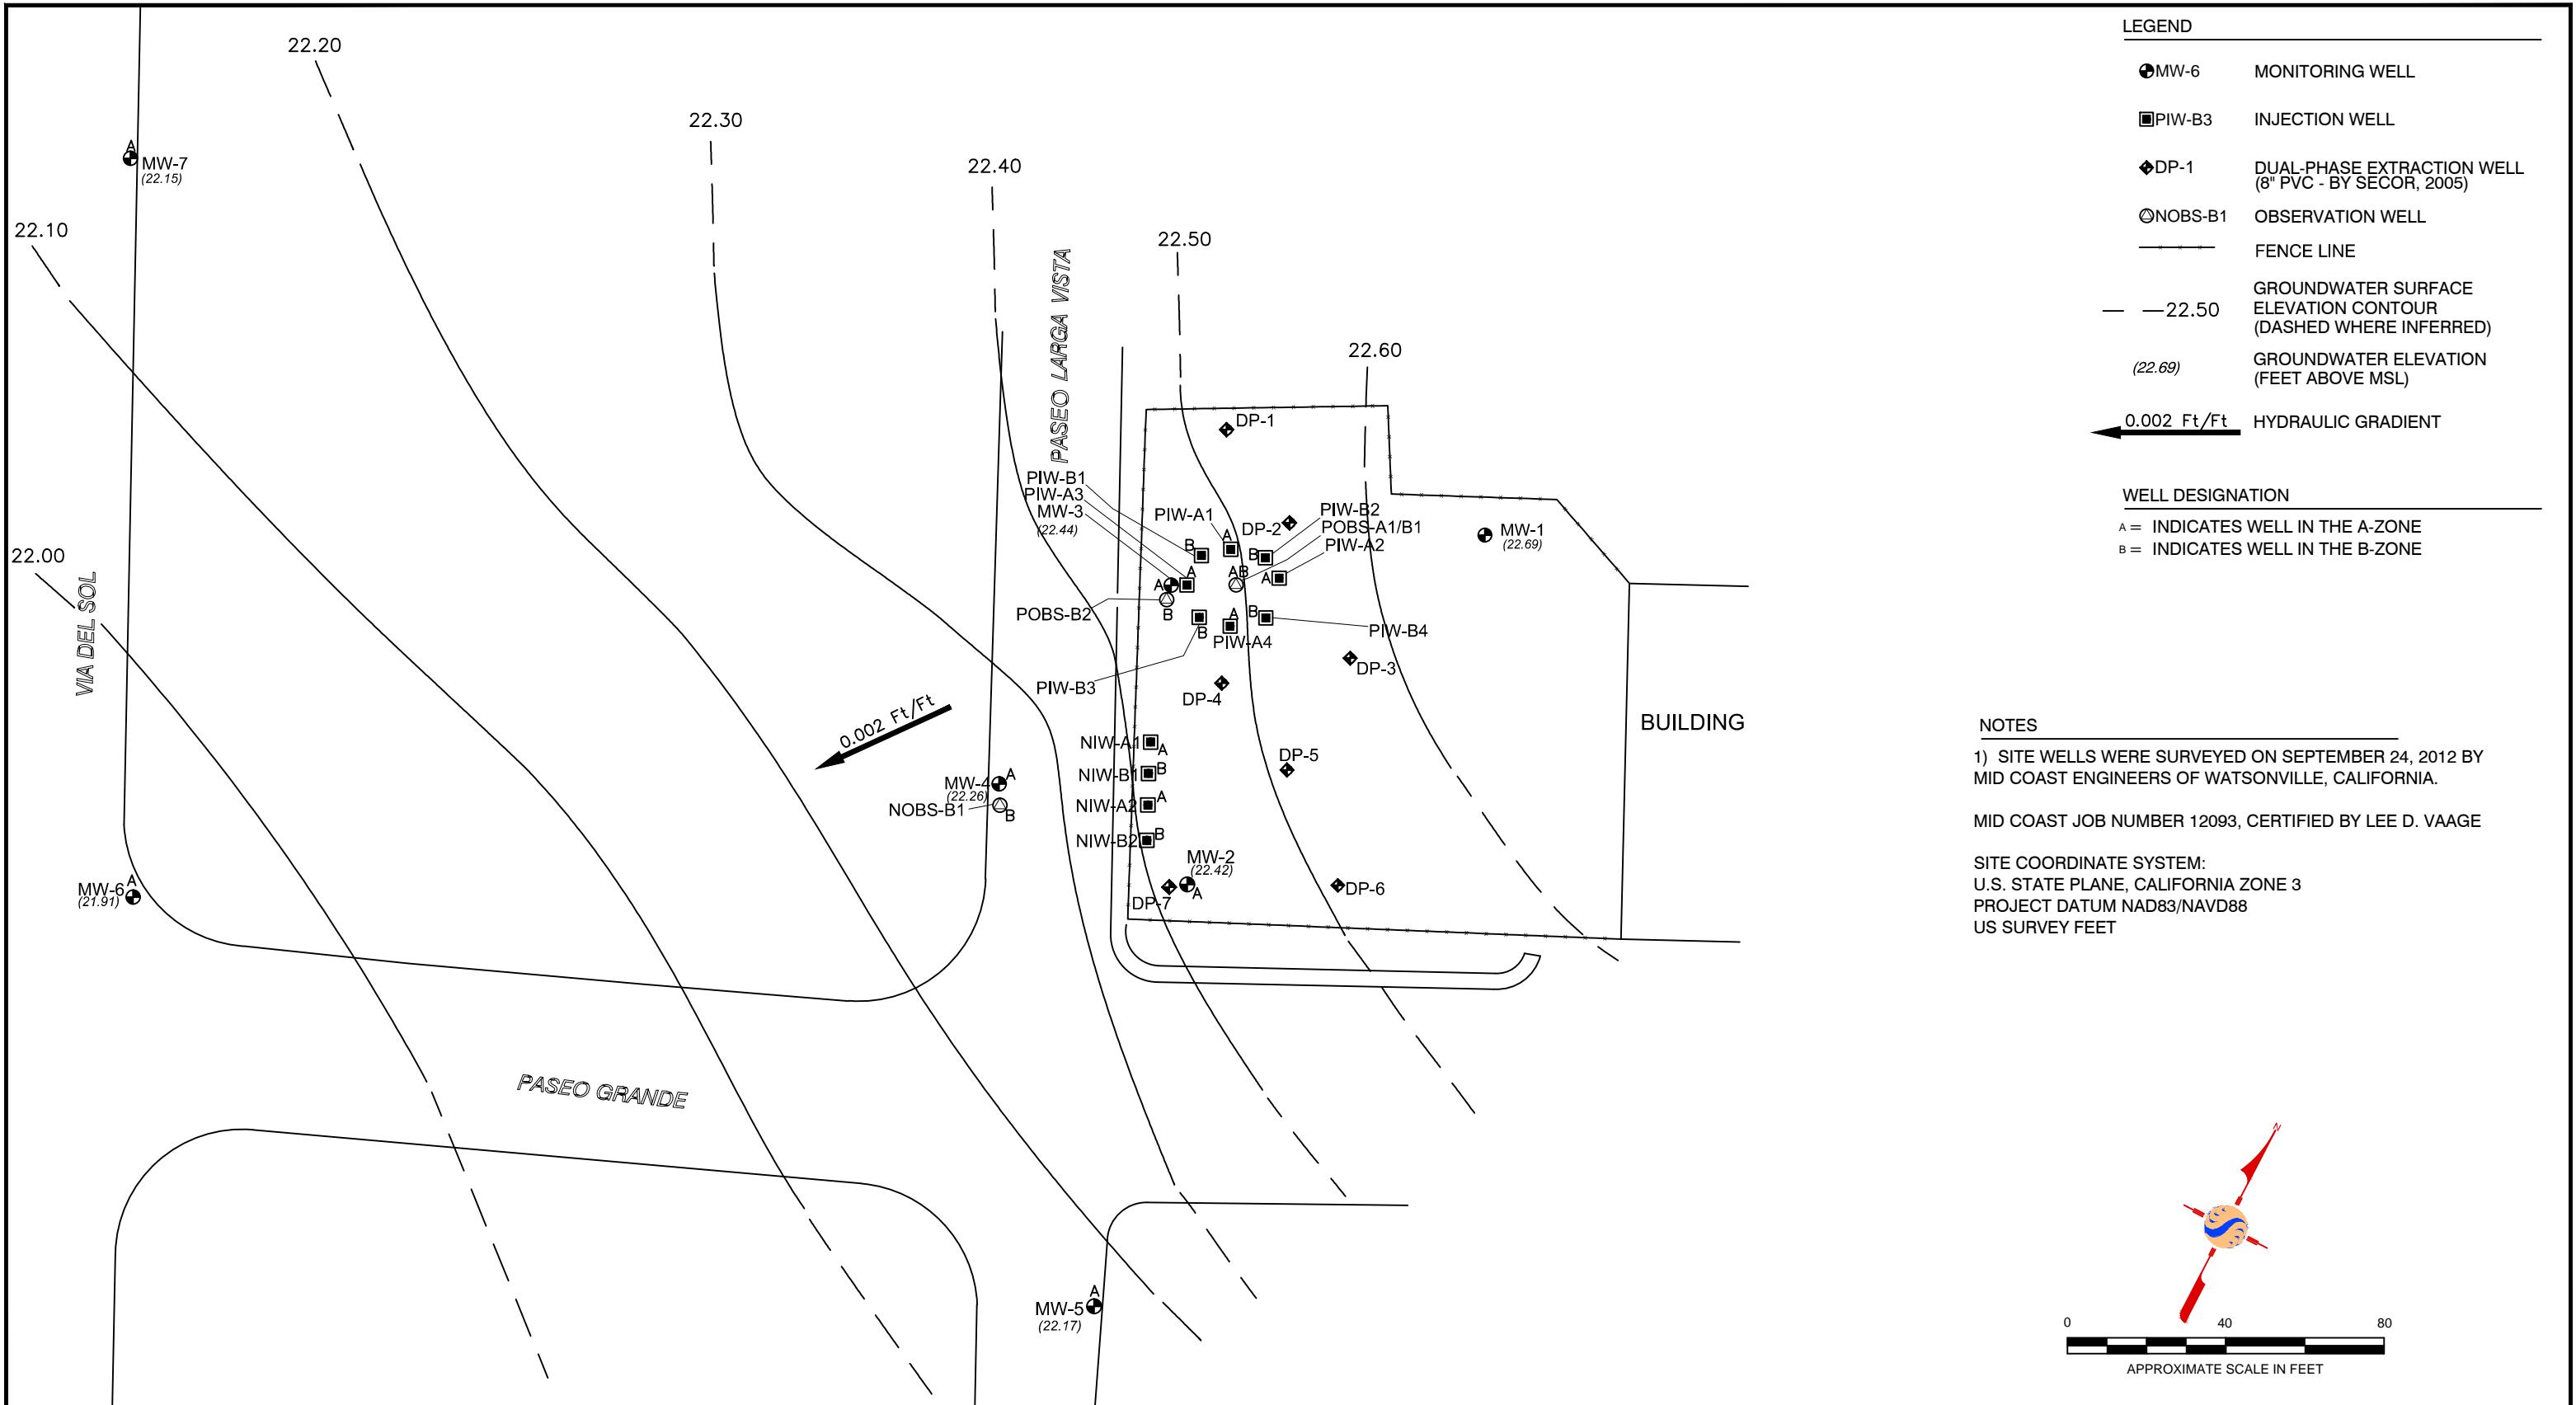

57 Lafayette Circle, 2nd Floor
Lafayette, CA 94549
(925) 299-9300/299-9302 (Fax)


FOR:
DAVID D. BOHANNON ORGANIZATION
575 PASEO GRANDE
SAN LORENZO, CALIFORNIA

JOB NUMBER: 185702534.200.0003

DRAWN BY: JMA/RRR

GROUNDWATER
POTENIOMETRIC SURFACE MAP
NOVEMBER 15, 2012

FIGURE:
3

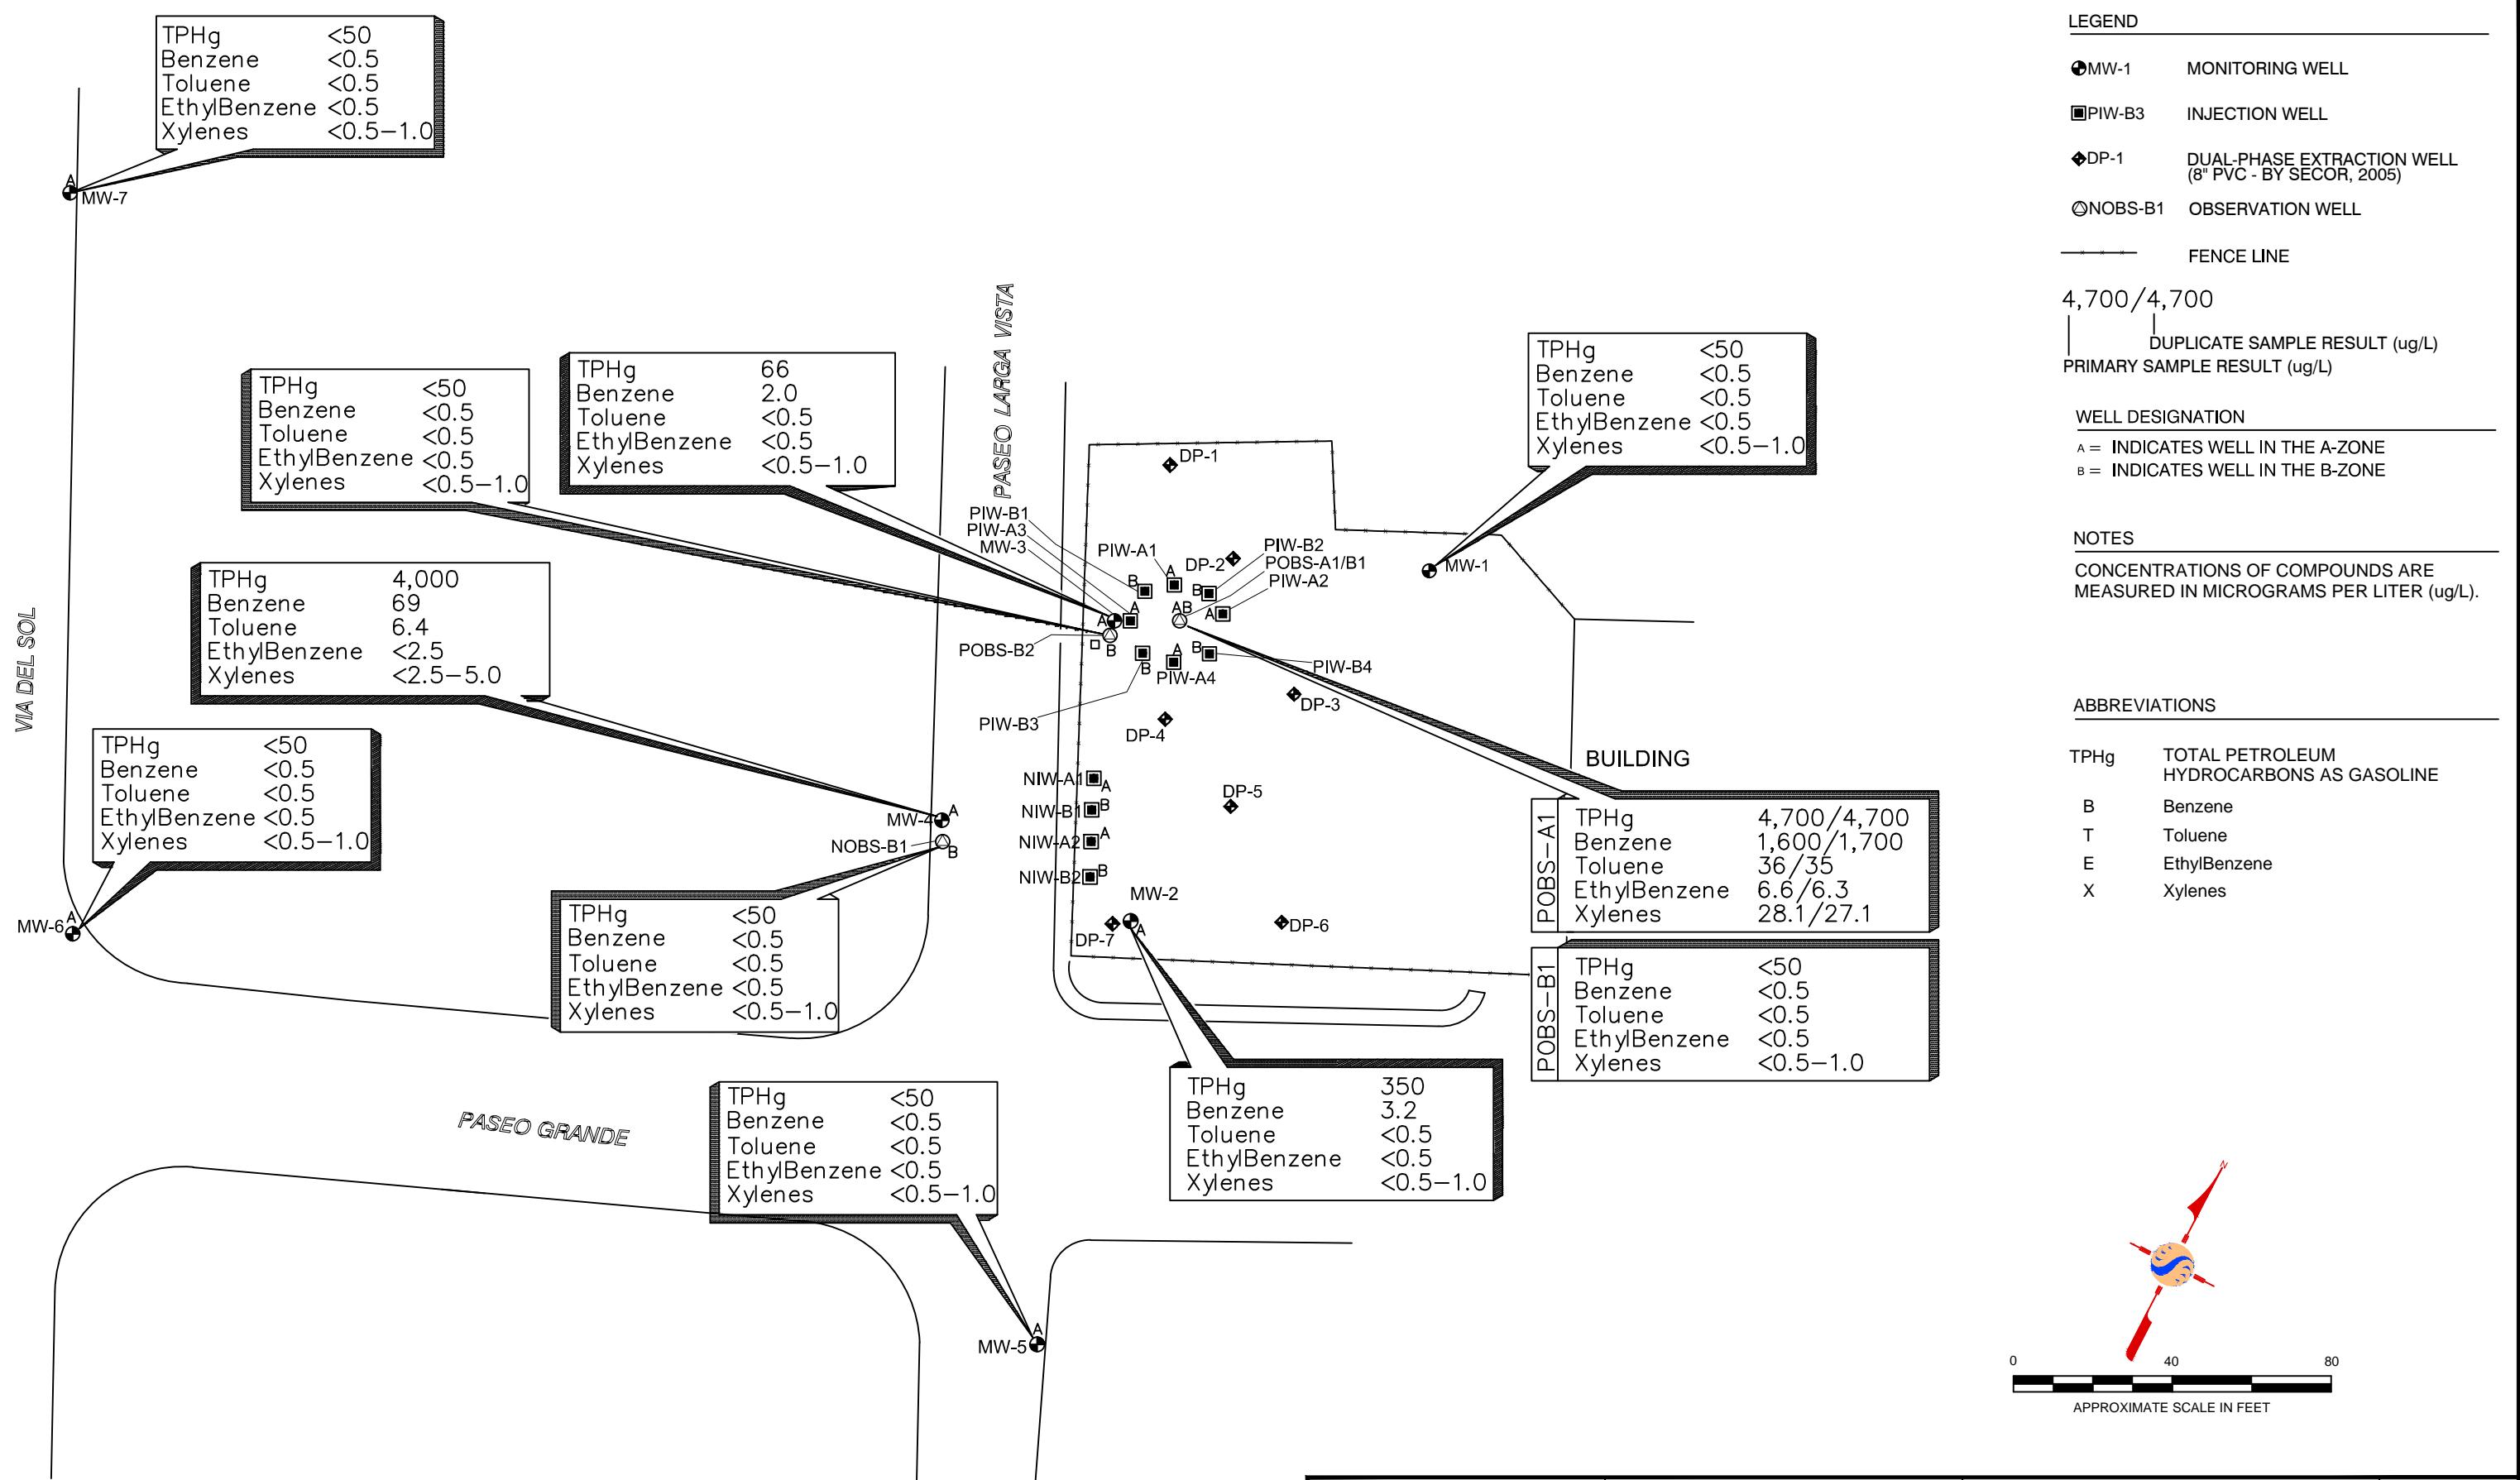

57 Lafayette Circle, 2nd Floor
Lafayette, CA 94549
(925) 299-9300/299-9302 (Fax)

FOR:
DAVID D. BOHANNON ORGANIZATION

575 PASEO GRANDE
SAN LORENZO, CALIFORNIA

PETROLEUM HYDROCARBON
CONCENTRATIONS IN GROUNDWATER
NOVEMBER 2012

4

Stantec

**FOURTH QUARTER 2012
GROUNDWATER MONITORING REPORT
DAVID D. BOHANNON ORGANIZATION**

APPENDIX A

Summary of Previous Site Investigations and Remedial Actions

Fourth Quarter 2012 Groundwater Monitoring Report
David D. Bohannon Organization

575 Paseo Grande
San Lorenzo, California
Stantec PN: 185702534
February 19, 2013

APPENDIX A
Summary of Previous Site Investigations and Remedial Actions

David D. Bohannon Organization
575 Paseo Grande, San Lorenzo, California

Over the last 25 years, the Site has been used as an asphalt-paved parking area located in a C1 commercial zone. The Site was a gasoline station prior to 1969. Little information is known about the Site history related to its use as a gasoline service station. In anticipation of property redevelopment, investigation activities were conducted in March 1995 to determine if former underground service station equipment remained on-Site. The work was conducted by Twining Laboratories, Inc. as documented in their letter report dated April 15, 1995. The investigation included a magnetometer survey followed by an exploratory excavation. In summary, the work conducted identified underground gasoline service station equipment which included what appeared to be the former tank pit, approximately 110 feet of fuel delivery system piping, and a grease sump and/or hydraulic lift pit in an area which may have been the former service garage. Field evidence and one soil sample indicated the potential for soil contamination along the piping runs, around the grease sump, and around the inferred location of the former tank pit. Characterization of the magnitude and extent of potential soil contamination were not performed during the initial activities.

In June 1995, SECOR International Incorporated (SECOR) conducted additional activities at the Site which included removal of the former underground storage tank (UST) system piping and the former grease sump, and characterization soil sampling along the pipelines and around the former grease sump and former tank pit areas. This work was summarized in SECOR's document entitled, "*Preliminary Characterization Report*," to ACEH dated June 29, 1995 (SECOR, 1995). The characterization data from this investigation indicated that there were two areas of concern at the Site: 1) the former grease sump area; and 2) the former gasoline distribution system area. SECOR subsequently conducted excavation activities in these two areas. The soil excavated from the former sump area was transported off-Site for disposal. The soil generated from the UST excavation was treated by means of aeration and later transported off-Site for disposal. Three groundwater monitoring wells (MW-1, MW-2, and MW-3) were installed during the investigation activities to evaluate the degree to which the groundwater had been affected. The results of the soil characterization and groundwater monitoring activities are reported in SECOR's documents entitled, "*Report of Interim Remedial Actions*" (RIRA; SECOR, 1996), dated June 4, 1996, and "*Fourth Quarter 1996 Monitoring and Sampling Report*," dated November 26, 1996.

In June 1999, a utility trench survey was conducted around the Site, and a passive soil vapor survey was performed downgradient from the Site. The results of the utility trench and passive soil vapor surveys are documented in SECOR's document entitled, "*Third Quarter Groundwater Monitoring Results and Plume Definition Investigation Report*," dated October 22, 1999 (3Q99 GWM Report, SECOR, 1999).

On December 5, 2000, four additional groundwater monitoring wells (MW-4 through MW-7) were installed at the Site. Soil and groundwater sampling was conducted to evaluate possible off-Site migration of petroleum-related constituents originating from the Site, and to collect data to direct further subsurface investigations and/or remediation at the Site, if necessary. The work was conducted in general accordance with SECOR's documents entitled, "*Work Plan for Additional Groundwater Monitoring Well Installation*," dated October 22, 1999, and "*Addendum to the Work Plan for Additional Groundwater*

**APPENDIX A
SUMMARY OF PREVIOUS SITE INVESTIGATIONS AND REMEDIAL ACTIONS**

Monitoring Well Installation," dated December 2, 1999. The Work Plan was approved with comments in correspondence from the ACEH in a letter dated November 4, 1999. Historically, two of the on-Site wells (MW-2 and MW-3) and one well immediately downgradient to the west (MW-4) contain elevated concentrations of petroleum hydrocarbons. Wells further off-Site to the west (MW-6 and MW-7) and south (MW-5) typically do not contain detectable levels of petroleum hydrocarbons, with exception of MW-7, which reported low concentrations of total xylenes (up to 6.7 micrograms per liter [$\mu\text{g}/\text{L}$]) in the first two sampling events (December 2000 and February 2001). The well has since been non-detect for all constituents.

In January 2003, SECOR performed an additional limited subsurface investigation as described in the document entitled, "*Remedial Action Work Plan*," dated October 25, 2002, and submitted to ACEH. The Work Plan was approved by ACEH in a letter dated October 28, 2002. Based on field observations, soil boring logs, and laboratory analytical results, SECOR concluded that: 1) perched groundwater was encountered within fill materials at approximately 5 to 8 feet below ground surface (bgs); 2) water-bearing zones were encountered in silt and sand at depths of 13- to 15-feet bgs (A zone), in sand from 16- to 19-feet bgs (B zone), and in silty sand at 22.5 feet bgs (C zone); and 3) soil sample analytical results suggest that the majority of chemical impact exists in silty clay from approximately 8- to 13.5-feet bgs within and adjacent to the former gasoline UST and pump island excavation. The findings of the investigation were presented in the document entitled, "*Limited Subsurface Investigation Report and Work Plan for Additional Soil and Groundwater Assessment*," dated February 19, 2003, and prepared by SECOR (SECOR, 2003a).

At the request of ACEH, a sensitive receptor survey was performed for the Site. The survey consisted of identifying the locations and depths of subsurface utilities near the Site and reviewing data provided by the California Department of Water Resources (DWR) for potential groundwater production wells. The survey results are presented in SECOR's document entitled, "*Sensitive Receptor Survey and Conduit Study*," dated June 30, 2003 (Receptor Study; SECOR, 2003b). The report indicates that no groundwater production wells are likely to be affected by hydrocarbons in the soil and groundwater at the Site.

Chemical Injection and Dual-Phase Extraction (DPE) Pilot Testing

The October 2002 *Remedial Action Workplan* (RAW) proposed nitrate injections to stimulate biological degradation of hydrocarbons in the groundwater. Based on the data collected in January 2003, additional remediation of soil was also recommended. An addendum to the RAW was submitted by SECOR in December 2003 proposing hydrogen peroxide injections for chemical oxidation of soils in addition to nitrate injections. The RAW addendum was approved by ACEH in a letter to Bohannon dated December 15, 2003.

In May 2004, EFI Global began the pilot groundwater remediation program. Four wells were installed on-Site for the purposes of injecting nitrate solution into groundwater upgradient of well MW-4 (NIW-A1, NIW-A2, NIW-B1, and NIW-B2). Eight wells were installed on-Site for injection of peroxide solution into soil and groundwater upgradient of well MW-3 (PIW-A1 to PIW-A4 and PIW-B1 to PIW-B4). Four wells were installed to observe the effects of the injection program (NOBS-B1, POBS-A1, POBS-B1, and POBS-B2).

**APPENDIX A
SUMMARY OF PREVIOUS SITE INVESTIGATIONS AND REMEDIAL ACTIONS**

Injection and observation well installations were completed during May 2004 in accordance with the approved RAW, and initial chemical injections were completed during May/June 2004. Soil boring logs for these wells are provided in Appendix A. The well installation activities were described in the document entitled, "*Semi-Annual (First Half 2004) Groundwater Monitoring and Pilot Remedial Progress Report,*" prepared by EFI Global (EFI Global, 2004b).

Additional injections were completed in July 2004 (Phase Two) and October 2004 (Phase Three). Progress groundwater sampling for Phases Two and Three was conducted in August 2004 and December 2004, respectively. Following Phase Three injections, EFI Global conducted a single-day DPE test (February 2005) and a five-day DPE test (April 2005) in the area of the former gasoline UST. The results of the Phase Three progress sampling (December 2004) and single-day DPE test (February 2005) are reported in the document entitled, "*Semi-Annual (Second Half 2004) Groundwater Monitoring and Pilot Remedial Progress Report,*" (EFI Global, 2005).

Site-wide groundwater monitoring was conducted in May 2005. In June 2005, SECOR advanced 14 soil borings at locations intended to provide additional delineation of the target area for full-scale DPE system implementation. SECOR obtained an operation permit from the Bay Area Air Quality Management District (BAAQMD) in July 2005 and installed seven additional remediation wells in September 2005. SECOR conducted additional Site-wide groundwater monitoring during August 2006. The results of the five-day DPE test (April 2005) and subsequent groundwater monitoring activities are presented in SECOR's document entitled, "*Groundwater Monitoring and Remediation Progress Report,*" dated April 23, 2007 (SECOR, 2007).

Full-Scale DPE Operations and Remedial Progress Sampling

During December 2008, additional DPE system infrastructure was added and full-scale DPE system operation commenced during January/February 2009. Full-scale DPE operations consisted of soil vapor and groundwater extraction and treatment from 11 Site extraction wells and former chemical injection wells. Full-scale DPE operated through December 2009 at which point remedial progress groundwater monitoring was conducted during January 2010. DPE system operations and results of remedial progress groundwater monitoring are described in the Stantec's document entitled, "*Report of Dual-Phase Extraction System Operations, Soil Vapor Sampling, and Risk Analysis,*" (DPE Report; Stantec, 2011). The results of groundwater monitoring and DPE system performance data indicated that the DPE system significantly reduced concentrations of total petroleum hydrocarbons in the gasoline range (TPHg) and benzene, toluene, ethylbenzene and total xylenes (BTEX) in monitoring wells downgradient of the Site below historical concentrations and to near the laboratory reporting limit (LRL) concentrations in monitoring wells immediately downgradient of the former UST on-Site. DPE system treatment equipment was removed from the Site in December 2009; however, all wells used for extraction and aboveground conveyance piping remain on-Site.

Soil vapor sample well installation and subsequent soil vapor sampling was conducted at four locations on-Site during March and April 2011. The purpose of the soil vapor sampling was to evaluate the potential for vapors associated with residual petroleum hydrocarbons in soil and/or groundwater to be present at concentrations that could pose a risk to conceptual future occupants of a Site building (if the

**APPENDIX A
SUMMARY OF PREVIOUS SITE INVESTIGATIONS AND REMEDIAL ACTIONS**

Site was to be redeveloped with commercial and/or residential structures). Results from the soil vapor sampling indicated that concentrations of petroleum hydrocarbons present in shallow soil vapor at the Site were below available screening criteria such as California Environmental Protection Agency (Cal-EPA) California Human Health Screening Levels (CHHSLs) and Environmental Screening Levels (ESLs) published by the California Regional Water Quality Control Board (RWQCB), San Francisco Bay Region. A Site-specific vapor intrusion risk analysis was performed using the Johnson & Ettinger (J&E) model and the concentrations of all chemicals detected in soil vapor at the Site were inputted into the model. The J&E model results indicated that residual concentrations of chemicals in shallow soil vapor at the Site do not pose a risk to human health considering commercial/industrial or residential land uses. A detailed description of soil vapor sampling and results of the risk analysis are included in the DPE Report (Stantec, 2011).

At the request of ACEH, Stantec performed additional groundwater monitoring during the second and third quarters of 2012 to monitor petroleum hydrocarbon concentrations in Site monitoring wells after the completion of full-scale DPE system operations. The monitoring results are reported in the documents entitled, "*Second Quarter 2012 (Semi-Annual) Groundwater Monitoring Report*," dated July 27, 2012 (Stantec, 2012a) and the "*Third Quarter 2012 Groundwater Monitoring Report*," dated December 21, 2012 (Stantec, 2012b). Monitoring results for the second and third quarters of 2012 showed concentrations of petroleum hydrocarbons downgradient of the Site in monitoring wells MW-5, MW-6, and MW-7 remain below laboratory MRLs and concentrations in on-Site monitoring wells MW-1 and MW-2 remain stable or near the laboratory MRLs. Groundwater in POBS-A1 within the former UST area showed a rebound in TPHg and BTEX concentrations during the third quarter 2012; however, concentrations in well MW-3 located immediately downgradient of POBS-A1 were near the MRLs.

References

- EFI Global, 2004a. Semi-Annual (Second Half 2003) Groundwater Monitoring Report, 575 Paseo Grande, San Lorenzo, California. June 21, 2004.
- EFI Global, 2004b. Semi-Annual (First Half 2004) Groundwater Monitoring and Pilot Remedial Progress Report, 575 Paseo Grande, San Lorenzo, California. August 2004.
- EFI Global, 2005. Semi-Annual (Second Half 2004) Groundwater Monitoring and Pilot Remedial Progress Report, 575 Paseo Grande, San Lorenzo, California. April 2005.
- Regional Water Quality Control Board (RWQCB), 2008. Screening for Environmental Concerns at Sites with Contaminated Soil and Groundwater. California Regional Water Quality Control Board, San Francisco Bay Region. Interim Final - November 2007, Revised May 2008.
- SECOR International Incorporated (SECOR), 1995. Preliminary Characterization Report, Former Gasoline Service Station Property at the Northeast Corner of Paseo Grande and Paseo Largavista, San Lorenzo, California. June 29, 1995.
- SECOR, 1996. Report of Interim Remedial Actions, Former Gasoline Service Station, 575 Paseo Grande, San Lorenzo, California. June 4, 1996.
- SECOR, 1999. Third Quarter 1999 Groundwater Monitoring Results and Plume Definition Investigation Report, 575 Paseo Grande, San Lorenzo, California. October 22, 1999.
- SECOR, 2003a. Limited Subsurface Investigation Report and Work Plan for Additional Soil and Groundwater Assessment, David D. Bohannon Organization Property, 575 Paseo Grande, San Lorenzo, California. February 19, 2003.
- SECOR, 2003b. Sensitive Receptor Survey and Conduit Study, The Bohannon Development Company Property, 575 Paseo Grande, San Lorenzo, California. June 30, 2003.
- Stantec Consulting Corporation, 2011. Report of Dual-Phase Extraction System Operations, Soil Vapor Sampling, and Risk Analysis, David D. Bohannon Organization. November 22, 2011.
- Stantec Consulting Services Inc., 2012a. Second Quarter 2012 (Semi-Annual) Groundwater Monitoring Report, David D. Bohannon Organization, 575 Paseo Grande, San Lorenzo, California. July 27, 2012.
- Stantec Consulting Services Inc., 2012b. Third Quarter 2012 Groundwater Monitoring Report, David D. Bohannon Organization, 575 Paseo Grande, San Lorenzo, California. December 21, 2012.

Stantec

FOURTH QUARTER 2012

GROUNDWATER MONITORING REPORT

DAVID D. BOHANNON ORGANIZATION

APPENDIX B

**Field Data Sheets for the November 2012 Groundwater
Monitoring Event**

Fourth Quarter 2012 Groundwater Monitoring Report
David D. Bohannon Organization

575 Paseo Grande
San Lorenzo, California
Stantec PN: 185702534
February 19, 2013

Stantec
HYDROLOGIC DATA SHEET

Date: 11-15-12

Project: *Bohannon*

Technician: C. Melancon

Project #: 185702534

TOC = Top of Well Casing Elevation

DTP = Depth to Free Product (FP or NAPH) Below TOC

PTW = Depth to Groundwater Below TOC

DTB = Depth to Bottom of Well Casing Below TOC

DIA = Well Casing Diameter

ELEV = Groundwater Elevation

DUP = Duplicate

Groundwater Sampling Data Sheet

Project #: 185702534		Task No:	Project Name: Bohannon	Date: 11/15/12
Site Location: San Lorenzo		Sampler(s): C. Melincon		
Well ID: MW-1	Depth to Water (DTW) (ft): 7.08		Sample DTW (ft): 7.20	
Screen Interval (ft):	Depth to Bottom (DTB) (ft):		Measurements Referenced to: TOC	
Tube/Pump Depth (ft):	Well Diameter (inch): 2		OVM (ppm) = -	

CALCULATIONS:

$$\text{Length of the water column: } \frac{\text{DTB}}{\text{Water Col}} \text{ ft} - \frac{\text{DTW}}{\text{Water Col}} \text{ ft} = \frac{\text{Water Col}}{\text{Water Col}} \text{ ft}$$

$$\text{80% of the water level: } \frac{\text{DTW}}{\text{Water Col}} \text{ ft} + (\frac{\text{Water Col}}{\text{Water Col}} \text{ ft} \times 0.2) = \frac{\text{Water Col}}{\text{Recharge water level}}$$

$$\text{Estimated Purge Volume (EPV): } \frac{\text{Water col}}{\text{gal/in. ft.}} \text{ ft} \times \frac{3}{\text{Casing Volumes}} = \frac{\text{Water col}}{\text{Gallons}}$$

Low-Flow/Micro Purging

Purge at least 3 well volumes

Volume of Schedule 40 PVC Pipe		
Well Diameter.	I.D	gal/linear ft.
1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Purging Equipment:

- Bailer
 Disposable Bailer
 Electric Submersible Pump
 Peristaltic Pump
 Other: _____

Sampling Equipment:

- Bailer
 Pump Discharge
 Disposable Bailer
 Peristaltic Pump & Dedicated Tubing
 Other: _____

Type of Water Quality Kit Used:

- YSI 556
 Myron L
 Horriba
 Hanna
 Other: _____

Begin Purge at **1350**

Time (24 hrs)	Volume (G L)	Temp. (C F)	DTW	Specific Conductivity ($\mu\text{S}/\text{cm}$)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	(\pm 10%)	(\pm 10%)		(\pm 10%)	(\pm 0.2)			(\pm 10%)	(\pm 20%)
1355	1	22.99	7.19	1164	7.24	CLEAR	none	1.34	-214.5
1400	2	22.86	7.20	1245	7.00	"	"	0.37	-248.2
1405	3	22.83	7.20	1260	6.99	"	"	0.35	-224.8
1410	4	22.82	7.20	1262	6.99	"	"	0.21	-225.4
1415	5	22.83	7.20	1264	6.98	"	"	0.22	-237.3
1420	6	22.82	7.20	1265	6.98	"	"	0.18	-246.7

Liters / Gallons Purged:			Pump Rate in L or G /min:		
Sampling Time: 1420			Duplicate Sample ID: Sample Time:		
Sample Analyzed For: SEE WORK ORDER			Duplicate Sample Analyzed For: SEE WORK ORDER		
(✓) Analyte(s): Preservative: Bottles: (X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs () TPH-d & TPH-mo HCl 2 x 0.5 L Ambers () NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly () Total Manganese HNO ₃ 1 X 250 mL Poly () Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly () Ferrous Iron HCl 2 X Amber VOAs () SVOCs None 2 x 1 L Ambers			(✓) Analyte(s): Preservative: Bottles: () TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs () Methane HCl 3 X 40 mL VOAs () Naphthalene, Phenol None 2 x 1 L Ambers () Alkalinity, TDS None 1 X 500 mL Poly () Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly () VOCs HCl 3 X 40 mL VOAs () Other _____		

Notes:

Groundwater Sampling Data Sheet

Project #: 185702534		Task No:	Project Name: Bohannon	Date: 11/15/12
Site Location: San Lorenzo		Sampler(s): C. Melanson		
Well ID: MW-2	Depth to Water (DTW) (ft): 7.12		Sample DTW (ft): 7.15	
Screen Interval (ft):	Depth to Bottom (DTB) (ft):		Measurements Referenced to: TOC	
Tube/Pump Depth (ft):	Well Diameter (inch): 2		OVM (ppm) = —	

CALCULATIONS:

Length of the water column:	$\frac{\text{DTB}}{\text{DTW}} \text{ ft} - \frac{\text{DTW}}{\text{Water Col}} \text{ ft} = \frac{\text{Water Col}}{\text{ft}}$	Volume of Schedule 40 PVC Pipe
80% of the water level:	$\frac{\text{DTW}}{\text{Water Col}} \text{ ft} + (\frac{\text{Water Col}}{\text{ft}} \text{ ft} \times 0.2) = \text{Recharge water level}$	Well Diameter. I.D. gal/linear ft.
Estimated Purge Volume (EPV):	$\frac{\text{Water col}}{\text{gal/in. ft.}} \times \frac{3}{\text{Casing Volumes}} = \text{Gallons}$	1.25 1.38 0.08 2 2.067 0.17 3 3.068 0.38 4 4.026 0.66 6 6.065 1.5 8 7.981 2.6 10 10.02 4.12 12 11.938 5.81
<input checked="" type="checkbox"/> Low-Flow/Micro Purgung <input type="checkbox"/> Purge at least 3 well volumes		

Purging Equipment:	Sampling Equipment:	Type of Water Quality Kit Used:
<input type="checkbox"/> Bailer <input type="checkbox"/> Disposable Bailer <input type="checkbox"/> Electric Submersible Pump <input checked="" type="checkbox"/> Peristaltic Pump <input type="checkbox"/> Other: _____	<input type="checkbox"/> Bailer <input checked="" type="checkbox"/> Pump Discharge <input type="checkbox"/> Disposable Bailer <input type="checkbox"/> Peristaltic Pump & Dedicated Tubing <input type="checkbox"/> Other: _____	<input checked="" type="checkbox"/> YSI 556 <input type="checkbox"/> Myron L <input type="checkbox"/> Horriba <input type="checkbox"/> Hanna <input type="checkbox"/> Other: _____

Time (24 hrs)	Volume (G / L)	Temp. ($^{\circ}\text{C}$ $^{\circ}\text{F}$)	DTW	Specific Conductivity ($\mu\text{S}/\text{cm}$)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	($\pm 10\%$)			($\pm 10\%$)	(± 0.2)			($\pm 10\%$)	($\pm 20\%$)
1315	1	22.77	7.15	1332	6.85	Clear	Mod	0.56	-205.9
1320	2	22.92	7.15	1344	6.84	"	"	0.36	-243.4
1325	3	22.90	7.15	1341	6.83	"	"	0.40	-242.2
1330	4	22.87	7.15	1342	6.82	"	"	0.33	-241.1
1335	5	22.88	7.15	1342	6.82	"	Fr	0.31	-243.2

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: 1340	Duplicate Sample ID: Sample Time:
Sample Analyzed For: SEE WORK ORDER	
Duplicate Sample Analyzed For: SEE WORK ORDER	
(✓) Analyte(s): Preservative: Bottles:	
(X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs	
() TPH-d & TPH-mo HCl 2 x 0.5 L Ambers	
() NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly	
() Total Manganese HNO ₃ 1 X 250 mL Poly	
() Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly	
() Ferrous Iron HCl 2 X Amber VOAs	
() SVOCs None 2 x 1 L Ambers	
(✓) Analyte(s): Preservative: Bottles:	
() TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs	
() Methane HCl 3 X 40 mL VOAs	
() Naphthalene, Phenol None 2 x 1 L Ambers	
() Alkalinity, TDS None 1 X 500 mL Poly	
() Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly	
() VOCs HCl 3 X 40 mL VOAs	
() Other _____	

Notes:

Groundwater Sampling Data Sheet

Project #: 185702534		Task No:	Project Name: Bohannon	Date: 11/16/12
Site Location: San Lorenzo		Sampler(s): C. Wefaycon		
Well ID: MW-3	Depth to Water (DTW) (ft): 6.90		Sample DTW (ft): 7.48	
Screen Interval (ft):	Depth to Bottom (DTB) (ft):		Measurements Referenced to: TOC	
Tube/Pump Depth (ft):	Well Diameter (inch): 2		OVM (ppm) = —	

CALCULATIONS:

Length of the water column: $\frac{\text{DTB}}{\text{Water Col}} \text{ ft} - \frac{\text{DTW}}{\text{Water Col}} \text{ ft} = \frac{\text{Water Col}}{\text{Water Col}} \text{ ft}$

80% of the water level: $\frac{\text{DTW}}{\text{Water Col}} \text{ ft} + \left(\frac{\text{Water Col}}{\text{Water Col}} \text{ ft} \times 0.2 \right) = \frac{\text{Recharge water level}}{\text{Water Col}} \text{ ft}$

Estimated Purge Volume (EPV): $\frac{\text{Water col}}{\text{gal/in. ft.}} \text{ ft} \times \frac{3}{\text{Casing Volumes}} = \frac{\text{Gallons}}{\text{Casing Volumes}}$

- () Low-Flow/Micro Purguing
 Purge at least 3 well volumes

Volume of Schedule 40 PVC Pipe		
Well Diameter.	I.D.	gal/linear ft.
1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Purging Equipment:

- () Bailer
 Disposable Bailer
 Electric Submersible Pump
 Peristaltic Pump
 Other: _____

Sampling Equipment:

- () Bailer
 Pump Discharge
 Disposable Bailer
 Peristaltic Pump & Dedicated Tubing
 Other: _____

Type of Water Quality Kit Used:

- () YSI 556
 Myron L
 Horriba
 Hanna
 Other: _____

Begin Purge at **1030**

Time (24 hrs)	Volume (G L)	Temp. (°C °F)	DTW	Specific Conductivity ($\mu\text{S}/\text{cm}$)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	($\pm 10\%$)			($\pm 10\%$)	(± 0.2)			($\pm 10\%$)	($\pm 20\%$)
1035	1.5	21.01	7.33	956	6.77	Clear	Faint	0.55	-273.3
1040	2.5	21.15	7.38	955	6.70	"	"	0.42	-276.2
1045	3.5	20.98	7.43	952	6.68	"	"	0.50	-297.1
1050	4.5	20.69	7.48	956	6.66	"	"	0.37	-294.8
1055	5.0	20.41	7.48	955	6.65	"	"	0.40	-301.2
1100	5.5	20.31	7.48	954	6.65	"	"	0.39	-302.6

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: 1100	Duplicate Sample ID: Sample Time:
Sample Analyzed For: SEE WORK ORDER	Duplicate Sample Analyzed For: SEE WORK ORDER
(<input checked="" type="checkbox"/>) Analyte(s): Preservative: Bottles:	(<input checked="" type="checkbox"/>) Analyte(s): Preservative: Bottles:

(<input checked="" type="checkbox"/>) TPH-g, BTEX, MTBE	HCl	3 X 40 mL VOAs	(<input type="checkbox"/>) TOC	H ₂ SO ₄	2 X 40 mL Amber VOAs
(<input type="checkbox"/>) TPH-d & TPH-mo	HCl	2 x 0.5 L Ambers	(<input type="checkbox"/>) Methane	HCl	3 X 40 mL VOAs
(<input type="checkbox"/>) NO ₂ , NO ₃ & SO ₄	None	1 X 500 mL Poly	(<input type="checkbox"/>) Naphthalene, Phenol	None	2 x 1 L Ambers
(<input type="checkbox"/>) Total Manganese	HNO ₃	1 X 250 mL Poly	(<input type="checkbox"/>) Alkalinity, TDS	None	1 X 500 mL Poly
(<input type="checkbox"/>) Dissolved Iron	Field-filtered, HNO ₃	1 X 250 mL Poly	(<input type="checkbox"/>) Phosphorus, TKN	H ₂ SO ₄	1 x 500 mL Poly
(<input type="checkbox"/>) Ferrous Iron	HCl	2 X Amber VOAs	(<input type="checkbox"/>) VOCs	HCl	3 X 40 mL VOAs
(<input type="checkbox"/>) SVOCs	None	2 x 1 L Ambers	(<input type="checkbox"/>) Other		

Notes:

Groundwater Sampling Data Sheet

Project #: <u>185702534</u>		Task No:	Project Name: <u>Bohannon</u>	Date: <u>11/15/12</u>
Site Location: <u>San Lorenzo</u>		Sampler(s): <u>C, M, L, 44 cores</u>		
Well ID: <u>MW-4</u>	Depth to Water (DTW) (ft): <u>6,38</u>		Sample DTW (ft): <u>6,48</u>	
Screen Interval (ft):	Depth to Bottom (DTB) (ft):		Measurements Referenced to: TOC	
Tube/Pump Depth (ft):	Well Diameter (inch): <u>2</u>		OVM (ppm) = <u>-</u>	

CALCULATIONS:

$$\text{Length of the water column: } \frac{\text{Water Col}}{\text{DTB} - \text{DTW}} \text{ ft}$$

$$80\% \text{ of the water level: } \frac{\text{Water Col}}{\text{DTW}} \text{ ft} + \left(\frac{\text{Water Col}}{\text{Water Col}} \right) \text{ ft} \times 0.2 = \text{Recharge water level}$$

$$\text{Estimated Purge Volume (EPV): } \frac{\text{Water col}}{\text{gal/lin. ft.}} \times \frac{3}{\text{Casing Volumes}} = \text{Gallons}$$

- (X) Low-Flow/Micro Purguing
() Purge at least 3 well volumes

Volume of Schedule 40 PVC Pipe		
Well Diameter.	I.D	gal/linear ft.
1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Purging Equipment:

- () Bailer
() Disposable Bailer
() Electric Submersible Pump
(X) Peristaltic Pump
() Other: _____

Sampling Equipment:

- () Bailer
(X) Pump Discharge
() Disposable Bailer
() Peristaltic Pump & Dedicated Tubing
() Other: _____

Type of Water Quality Kit Used:

- (X) YSI 556
() Myron L
() Horriba
() Hanna
() Other: _____

Begin Purge at 1150

Time (24 hrs)	Volume (G <u>L</u>)	Temp. (<u>C</u> <u>F</u>)	DTW	Specific Conductivity ($\mu\text{S}/\text{cm}$)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	($\pm 10\%$)			($\pm 10\%$)	(± 0.2)			($\pm 10\%$)	($\pm 20\%$)
1155	1	21.04	6.49	974	6.75	C/peach	Faint	0.41	-231.2
1200	2	21.05	6.48	978	6.72	"	"	0.46	-215.3
1205	3	20.99	6.48	979	6.72	"	"	0.38	-225.5
1210	4	21.02	6.48	979	6.71	"	"	0.26	-222.0
1215	5	21.07	6.48	979	6.71	"	"	0.27	-252.6
1220	6	20.99	6.48	979	6.70	"	"	0.31	-238.9

Liters / Gallons Purged:			Pump Rate in L or G /min:		
Sampling Time: <u>1220</u>			Duplicate Sample ID: _____		
Sample Analyzed For: SEE WORK ORDER			Duplicate Sample Analyzed For: SEE WORK ORDER		
(✓) Analyte(s): Preservative: Bottles:			(✓) Analyte(s): Preservative: Bottles:		
(X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs			() TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs		
() TPH-d & TPH-mo HCl 2 x 0.5 L Ambers			() Methane HCl 3 X 40 mL VOAs		
() NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly			() Naphthalene, Phenol None 2 x 1 L Ambers		
() Total Manganese HNO ₃ 1 X 250 mL Poly			() Alkalinity, TDS None 1 X 500 mL Poly		
() Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly			() Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly		
() Ferrous Iron HCl 2 X Amber VOAs			() VOCs HCl 3 X 40 mL VOAs		
() SVOCs None 2 x 1 L Ambers			() Other _____		

Notes: _____

Groundwater Sampling Data Sheet

Project #: <u>185702534</u>		Task No:	Project Name: <u>Bohannon</u>	Date: <u>11/15/12</u>
Site Location: <u>San Lorenzo</u>		Sampler(s): <u>C-WL44C04</u>		
Well ID: <u>MW-5</u>	Depth to Water (DTW) (ft): <u>6.39</u>		Sample DTW (ft): <u>6.48</u>	
Screen Interval (ft):	Depth to Bottom (DTB) (ft):		Measurements Referenced to: TOC	
Tube/Pump Depth (ft):	Well Diameter (inch): <u>2</u>		OVM (ppm) = <u>—</u>	

CALCULATIONS:

$$\text{Length of the water column: } \frac{\text{Water Col}}{\text{DTB} - \text{DTW}} \text{ ft}$$

$$80\% \text{ of the water level: } \frac{\text{Water Col}}{\text{DTW}} \text{ ft} + \left(\frac{\text{Water Col}}{\text{Water Col}} \right) \text{ ft} \times 0.2 = \text{Recharge water level}$$

$$\text{Estimated Purge Volume (EPV): } \frac{\text{Water col}}{\text{gal/lin. ft.}} \times \frac{3}{\text{Casing Volumes}} = \text{Gallons}$$

- (X) Low-Flow/Micro Purgung
() Purge at least 3 well volumes

Volume of Schedule 40 PVC Pipe		
Well Diameter.	I.D	gal/linear ft.
1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Purging Equipment:

- () Bailer
() Disposable Bailer
() Electric Submersible Pump
(X) Peristaltic Pump
() Other: _____

Sampling Equipment:

- () Bailer
(X) Pump Discharge
() Disposable Bailer
() Peristaltic Pump & Dedicated Tubing
() Other: _____

Type of Water Quality Kit Used:

- (X) YSI 556
() Myron L
() Horriba
() Hanna
() Other: _____

Begin Purge at 1110

Time (24 hrs)	Volume (G/L)	Temp. (°C / °F)	DTW	Specific Conductivity (μS/cm)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)		(± 10%)		(± 10%)	(± 0.2)			(± 10%)	(± 20%)
1115	1	22.20	6.48	868	7.27	Clear	404P	0.45	-245.0
1120	2	22.42	6.49	870	7.26	"	"	0.35	-219.0
1125	3	22.28	6.48	870	7.24	"	"	0.27	-235.1
1130	4	22.19	6.48	870	7.22	"	"	0.20	-239.7
1135	5	22.13	6.48	871	7.21	"	"	0.22	-223.9
1140	6	22.09	6.48	873	7.21	"	"	0.20	-238.1

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: <u>1140</u>	Duplicate Sample ID: Sample Time:
Sample Analyzed For: SEE WORK ORDER	Duplicate Sample Analyzed For: SEE WORK ORDER
(✓) Analyte(s): Preservative: Bottles:	(✓) Analyte(s): Preservative: Bottles:

(X) TPH-g, BTEX, MTBE	HCl	3 X 40 mL VOAs	() TOC	H ₂ SO ₄	2 X 40 mL Amber VOAs
() TPH-d & TPH-mo	HCl	2 x 0.5 L Ambers	() Methane	HCl	3 X 40 mL VOAs
() NO ₂ , NO ₃ & SO ₄	None	1 X 500 mL Poly	() Naphthalene, Phenol	None	2 x 1 L Ambers
() Total Manganese	HNO ₃	1 X 250 mL Poly	() Alkalinity, TDS	None	1 X 500 mL Poly
() Dissolved Iron	Field-filtered, HNO ₃	1 X 250 mL Poly	() Phosphorus, TKN	H ₂ SO ₄	1 x 500 mL Poly
() Ferrous Iron	HCl	2 X Amber VOAs	() VOCs	HCl	3 X 40 mL VOAs
() SVOCs	None	2 x 1 L Ambers	() Other		

Notes:

Groundwater Sampling Data Sheet

Project #: 185702534 Task No: Project Name: Bohannon Date: 11/15/12
Site Location: San Lorenzo Sampler(s): Cr. Melgacoan
Well ID: MW-6 Depth to Water (DTW) (ft): 5.79 Sample DTW (ft): 5.85
Screen Interval (ft): Depth to Bottom (DTB) (ft): Measurements Referenced to: TOC
Tube/Pump Depth (ft): Well Diameter (inch): 2 OVM (ppm) = -

CALCULATIONS:

Length of the water column: _____ ft - _____ ft = _____ ft
DTB DTW Water Col

$$80\% \text{ of the water level: } \underline{\hspace{2cm}} \text{ ft} + (\underline{\hspace{2cm}} \text{ ft} \times 0.2) = \underline{\hspace{2cm}} \text{ ft}$$

DTW	Water Col	Recharge water level
-----	-----------	----------------------

- Low-Flow/Micro Purging
 Purge at least 3 well volumes

<u>Well Diameter.</u>	<u>I.D.</u>	<u>gal/linear ft.</u>
1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Purging Equipment:

Sampling Equipment:

Type of Water Quality Kit Used:

- Bailer Bailer
 Disposable Bailer Pump Discharge
 Electric Submersible Pump Disposable Bailer
 Peristaltic Pump Peristaltic Pump & Dedicated Tubing
 Other: Other:

Begin Purge at 1020

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: <i>1050</i>	Duplicate Sample ID: Sample Time:
Sample Analyzed For: SEE WORK ORDER	Duplicate Sample Analyzed For: SEE WORK ORDER
(<input checked="" type="checkbox"/>) Analyte(s): Preservative: Bottles:	(<input checked="" type="checkbox"/>) Analyte(s): Preservative: Bottles:
(X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs	(<input type="checkbox"/>) TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs
(<input type="checkbox"/>) TPH-d & TPH-mo HCl 2 x 0.5 L Ambers	(<input type="checkbox"/>) Methane HCl 3 X 40 mL VOAs
(<input type="checkbox"/>) NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly	(<input type="checkbox"/>) Naphthalene, Phenol None 2 x 1 L Ambers
(<input type="checkbox"/>) Total Manganese HNO ₃ 1 X 250 mL Poly	(<input type="checkbox"/>) Alkalinity, TDS None 1 X 500 mL Poly
(<input type="checkbox"/>) Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly	(<input type="checkbox"/>) Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly
(<input type="checkbox"/>) Ferrous Iron HCl 2 X Amber VOAs	(<input type="checkbox"/>) VOCs HCl 3 X 40 mL VOAs
(<input type="checkbox"/>) SVOCs None 2 x 1 L Ambers	(<input type="checkbox"/>) Other

Notes:

Groundwater Sampling Data Sheet

Project #: 185702534		Task No:	Project Name: Bohannon	Date: 11/15/12
Site Location: San Lorenzo		Sampler(s): C. McElroy con		
Well ID: MW-7		Depth to Water (DTW) (ft): 6.07	Sample DTW (ft): 6.09	
Screen Interval (ft):		Depth to Bottom (DTB) (ft):	Measurements Referenced to: TOC	
Tube/Pump Depth (ft):		Well Diameter (inch): 2	OVM (ppm) = —	

CALCULATIONS:

Length of the water column: $\frac{\text{DTB}}{\text{DTW}} \text{ ft} - \frac{\text{DTW}}{\text{Water Col}} \text{ ft} = \frac{\text{Water Col}}{\text{ft}}$

80% of the water level: $\frac{\text{DTW}}{\text{Water Col}} \text{ ft} + \left(\frac{\text{Water Col}}{\text{Recharge water level}} \text{ ft} \times 0.2 \right) = \frac{\text{Recharge water level}}{\text{ft}}$

Estimated Purge Volume (EPV): $\frac{\text{Water col}}{\text{gal/lin. ft.}} \text{ ft} \times \frac{3}{\text{Casing Volumes}} = \frac{\text{Gallons}}{\text{Casing Volumes}}$

Low-Flow/Micro Purgung

Purge at least 3 well volumes

Volume of Schedule 40 PVC Pipe		
Well Diameter.	I.D	gal/linear ft.
1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Purging Equipment:

- Bailer
- Disposable Bailer
- Electric Submersible Pump
- Peristaltic Pump
- Other: _____

Sampling Equipment:

- Bailer
- Pump Discharge
- Disposable Bailer
- Peristaltic Pump & Dedicated Tubing
- Other: _____

Type of Water Quality Kit Used:

- YSI 556
- Myron L
- Horriba
- Hanna
- Other: _____

Begin Purge at **940**

Time (24 hrs)	Volume (G /L)	Temp. (C /F)	DTW	Specific Conductivity (μS/cm)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	(± 10%)			(± 10%)	(± 0.2)			(± 10%)	(± 20%)
945	1.5	18.53	6.11	178	7.99	clear/yel.	none	3.72	-253.7
950	2.5	18.45	6.10	169	8.10	clear	"	3.65	-253.0
955	3.5	18.56	6.09	166	8.12	"	"	3.58	-251.3
1000	4.5	18.66	6.09	164	8.13	"	"	2.62	-248.0
1005	5.5	18.62	6.09	163	8.12	"	"	2.61	-244.1
1010	6.5	18.69	6.09	162	8.12	"	"	2.62	-241.7

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: 1010	Duplicate Sample ID: Sample Time:
Sample Analyzed For: SEE WORK ORDER	Duplicate Sample Analyzed For: SEE WORK ORDER
<input checked="" type="checkbox"/> Analyte(s): Preservative: Bottles:	<input checked="" type="checkbox"/> Analyte(s): Preservative: Bottles:
(X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs	() TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs
() TPH-d & TPH-mo HCl 2 x 0.5 L Ambers	() Methane HCl 3 X 40 mL VOAs
() NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly	() Naphthalene, Phenol None 2 x 1 L Ambers
() Total Manganese HNO ₃ 1 X 250 mL Poly	() Alkalinity, TDS None 1 X 500 mL Poly
() Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly	() Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly
() Ferrous Iron HCl 2 X Amber VOAs	() VOCs HCl 3 X 40 mL VOAs
() SVOCs None 2 x 1 L Ambers	() Other

Notes:

TB-1 (800)

Groundwater Sampling Data Sheet

Project #: 185702534 Task No: Project Name: Bohannon Date: 11/16/12
Site Location: San Lorenzo Sampler(s): C. Melanson
Well ID: POBS-A1 Depth to Water (DTW) (ft): 7.34 Sample DTW (ft): 7.78
Screen Interval (ft): Depth to Bottom (DTB) (ft): Measurements Referenced to: TOC
Tube/Pump Depth (ft): Well Diameter (inch): 1 OVM (ppm) = 0

CALCULATIONS:

Length of the water column:

ft - ft = ft
PTB PTW Water Col

Volume of Schedule 40 PVC Pipe

80% of the water level:

$$\text{ft} + (\quad \quad \quad \text{ft} \times 0.2) = \quad \quad \quad \text{ft}$$

Volume of Schedule 40 PVC Pipe

DTW **Water Col** **Recharge water level**

1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Estimated Purge Volume (EPV): = _____ ft X _____ X 3 = _____ Gallons

(X) Low-Flow/Micro Purging

() Purge at least 3 well volumes

Purging Equipment:

Sampling Equipment:

Type of Water Quality Kit Used:

Bailer
 Disposable Bailer
 Electric Submersible Pump
 Peristaltic Pump
 Other:

Bailer
 Pump Discharge
 Disposable Bailer
 Peristaltic Pump & Dedicated Tubing
 Other:

(X) YSI 556
() Myron L
() Horriba
() Hanna
() Other:

Begin Purge at

900

Time (24 hrs)	Volume (G L)	Temp. (C / F)	DTW	Specific Conductivity (μS/cm)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)		(± 10%)		(± 10%)	(± 0.2)			(± 10%)	(± 20%)
905	1.5	19.96	7.73	1660	6.66	Clear	Mild	0.66	-250.0
910	2.5	20.03	7.74	1671	6.71	"	"	0.46	-251.3
915	3.5	19.93	7.75	1663	6.69	"	"	0.46	-268.1
920	4.5	20.05	7.78	1676	6.69	"	"	0.44	-321.0
925	5.0	20.02	7.78	1644	6.68	"	"	0.43	-326.5
930	5.5	20.00	7.78	1643	6.69	"	"	0.39	-327.1

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: 930	Duplicate Sample ID: DUP Sample Time:
Sample Analyzed For: SEE WORK ORDER	Duplicate Sample Analyzed For: SEE WORK ORDER
(<input checked="" type="checkbox"/>) Analyte(s): Preservative: Bottles:	(<input checked="" type="checkbox"/>) Analyte(s): Preservative: Bottles:
(X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs	(<input type="checkbox"/>) TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs
(<input type="checkbox"/>) TPH-d & TPH-mo HCl 2 x 0.5 L Ambers	(<input type="checkbox"/>) Methane HCl 3 X 40 mL VOAs
(<input type="checkbox"/>) NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly	(<input type="checkbox"/>) Naphthalene, Phenol None 2 x 1 L Ambers
(<input type="checkbox"/>) Total Manganese HNO ₃ 1 X 250 mL Poly	(<input type="checkbox"/>) Alkalinity, TDS None 1 X 500 mL Poly
(<input type="checkbox"/>) Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly	(<input type="checkbox"/>) Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly
(<input type="checkbox"/>) Ferrous Iron HCl 2 X Amber VOAs	(<input type="checkbox"/>) VOCs HCl 3 X 40 mL VOAs
(<input type="checkbox"/>) SVOCs None 2 x 1 L Ambers	(<input type="checkbox"/>) Other

Notes:

Groundwater Sampling Data Sheet

Project #: 185702534	Task No: Bohannon	Project Name: C. Melaycon
Site Location: San Lorenzo		Sampler(s): C. Melaycon
Well ID: P0BS - B1	Depth to Water (DTW) (ft): 7.45	Sample DTW (ft): 7.61
Screen Interval (ft):	Depth to Bottom (DTB) (ft):	Measurements Referenced to: TOC
Tube/Pump Depth (ft):	Well Diameter (inch): 1	OVM (ppm) = -

CALCULATIONS:

Length of the water column:	ft -	ft =	ft	Volume of Schedule 40 PVC Pipe																								
	DTB	DTW	Water Col	Well Diameter. I.D. gal/linear ft.																								
80% of the water level:	ft +	(Water Col)	ft X 0.2) =	ft Recharge water level																								
Estimated Purge Volume (EPV):	ft X	gal/in. ft.	X 3 Casing Volumes	Gallons																								
<input checked="" type="checkbox"/> Low-Flow/Micro Purging <input type="checkbox"/> Purge at least 3 well volumes				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>1.25</td><td>1.38</td><td>0.08</td></tr> <tr><td>2</td><td>2.067</td><td>0.17</td></tr> <tr><td>3</td><td>3.068</td><td>0.38</td></tr> <tr><td>4</td><td>4.026</td><td>0.66</td></tr> <tr><td>6</td><td>6.065</td><td>1.5</td></tr> <tr><td>8</td><td>7.981</td><td>2.6</td></tr> <tr><td>10</td><td>10.02</td><td>4.12</td></tr> <tr><td>12</td><td>11.938</td><td>5.81</td></tr> </table>	1.25	1.38	0.08	2	2.067	0.17	3	3.068	0.38	4	4.026	0.66	6	6.065	1.5	8	7.981	2.6	10	10.02	4.12	12	11.938	5.81
1.25	1.38	0.08																										
2	2.067	0.17																										
3	3.068	0.38																										
4	4.026	0.66																										
6	6.065	1.5																										
8	7.981	2.6																										
10	10.02	4.12																										
12	11.938	5.81																										

Purging Equipment:	Sampling Equipment:	Type of Water Quality Kit Used:
<input type="checkbox"/> Bailer <input type="checkbox"/> Disposable Bailer <input type="checkbox"/> Electric Submersible Pump <input checked="" type="checkbox"/> Peristaltic Pump <input type="checkbox"/> Other: _____	<input type="checkbox"/> Bailer <input checked="" type="checkbox"/> Pump Discharge <input type="checkbox"/> Disposable Bailer <input type="checkbox"/> Peristaltic Pump & Dedicated Tubing <input type="checkbox"/> Other: _____	<input checked="" type="checkbox"/> YSI 556 <input type="checkbox"/> Myron L <input type="checkbox"/> Horriba <input type="checkbox"/> Hanna <input type="checkbox"/> Other: _____

Time (24 hrs)	Volume (G L)	Temp. (C °F)	DTW	Specific Conductivity (µS/cm)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	(± 10%)		(± 10%)	(± 0.2)				(± 10%)	(± 20%)
950	1.5	20.32	7.64	1363	6.85	Clear	Faint	0.75	-258.0
955	2.5	20.51	7.61	1406	6.86	"	"	0.39	-253.0
1000	3.5	20.65	7.61	1428	6.85	"	"	0.29	-259.2
1005	4.5	20.70	7.61	1445	6.85	"	"	0.25	-258.0
1010	5.5	20.92	7.61	1452	6.84	"	"	0.20	-264.0
1015	6.5	20.97	7.61	1456	6.84	"	"	0.18	-270.1

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: 1020	Duplicate Sample ID: _____ Sample Time: _____
Sample Analyzed For: SEE WORK ORDER Duplicate Sample Analyzed For: SEE WORK ORDER	
(✓) Analyte(s): Preservative: Bottles: (✓) Analyte(s): Preservative: Bottles:	
(X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs () TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs	
() TPH-d & TPH-mo HCl 2 x 0.5 L Ambers () Methane HCl 3 X 40 mL VOAs	
() NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly () Naphthalene, Phenol None 2 x 1 L Ambers	
() Total Manganese HNO ₃ 1 X 250 mL Poly () Alkalinity, TDS None 1 X 500 mL Poly	
() Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly () Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly	
() Ferrous Iron HCl 2 X Amber VOAs () VOCs HCl 3 X 40 mL VOAs	
() SVOCs None 2 x 1 L Ambers () Other _____	

Notes:

Groundwater Sampling Data Sheet

Project #: <u>185702534</u>		Task No:	Project Name: <u>Bohannon</u>	Date: <u>11/16/12</u>
Site Location: <u>San Lorenzo</u>		Sampler(s): <u>Cr. Wye/awson</u>		
Well ID: <u>P0BS-B2</u>	Depth to Water (DTW) (ft): <u>6.78</u>		Sample DTW (ft): <u>8.44</u>	
Screen Interval (ft):	Depth to Bottom (DTB) (ft):		Measurements Referenced to: TOC	
Tube/Pump Depth (ft):	Well Diameter (inch): <u>2</u>		OVM (ppm) = <u>-</u>	

CALCULATIONS:

Length of the water column:	<u>DTB</u>	<u>DTW</u>	<u>Water Col</u>	ft - ft = ft	Volume of Schedule 40 PVC Pipe
80% of the water level:	<u>DTW</u>	<u>Water Col</u>		<u>Recharge water level</u>	Well Diameter. I.D. gal/linear ft.
Estimated Purge Volume (EPV):	<u>Water col</u>	<u>gal/lin. ft.</u>	X <u>3</u>	= <u>Gallons</u>	1.25 1.38 0.08
(X) Low-Flow/Micro Purgung					2 2.067 0.17
() Purge at least 3 well volumes					3 3.068 0.38
					4 4.026 0.66
					6 6.065 1.5
					8 7.981 2.6
					10 10.02 4.12
					12 11.938 5.81

Purging Equipment:	Sampling Equipment:	Type of Water Quality Kit Used:
() Bailer	() Bailer	(X) YSI 556
() Disposable Bailer	(X) Pump Discharge	() Myron L
() Electric Submersible Pump	() Disposable Bailer	() Horriba
(X) Peristaltic Pump	() Peristaltic Pump & Dedicated Tubing	() Hanna
() Other: _____	() Other: _____	() Other: _____

Time (24 hrs)	Volume (G <u>L</u>)	Temp. (<u>°C</u> <u>°F</u>)	DTW	Specific Conductivity ($\mu\text{S}/\text{cm}$)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	(\pm 10%)			(\pm 10%)	(\pm 0.2)			(\pm 10%)	(\pm 20%)
1115	1.5	21.30	8.48	1080	6.95	Clear	Faint	0.93	-273.8
1120	2.5	21.52	8.45	1091	6.94	"	"	0.52	-248.8
1125	3.5	21.46	8.44	1091	6.92	"	"	0.35	-284.3
1130	4.5	21.43	8.44	1091	6.91	"	"	0.29	-282.1
1135	5.5	21.37	8.44	1090	6.91	"	"	0.30	-262.4
1140	6.5	21.28	8.44	1089	6.90	"	"	0.31	-256.3

Liters / Gallons Purged:	Pump Rate in L or G /min:
Sampling Time: <u>1140</u>	Duplicate Sample ID: Sample Time:
Sample Analyzed For: SEE WORK ORDER	Duplicate Sample Analyzed For: SEE WORK ORDER
(<input checked="" type="checkbox"/> Analyte(s): Preservative: Bottles:	(<input checked="" type="checkbox"/> Analyte(s): Preservative: Bottles:
(X) TPH-g, BTEX, MTBE HCl 3 X 40 mL VOAs	() TOC H ₂ SO ₄ 2 X 40 mL Amber VOAs
() TPH-d & TPH-mo HCl 2 x 0.5 L Ambers	() Methane HCl 3 X 40 mL VOAs
() NO ₂ , NO ₃ & SO ₄ None 1 X 500 mL Poly	() Naphthalene, Phenol None 2 x 1 L Ambers
() Total Manganese HNO ₃ 1 X 250 mL Poly	() Alkalinity, TDS None 1 X 500 mL Poly
() Dissolved Iron Field-filtered, HNO ₃ 1 X 250 mL Poly	() Phosphorus, TKN H ₂ SO ₄ 1 x 500 mL Poly
() Ferrous Iron HCl 2 X Amber VOAs	() VOCs HCl 3 X 40 mL VOAs
() SVOCs None 2 x 1 L Ambers	() Other _____

Notes: _____

Groundwater Sampling Data Sheet

Project #: <u>185702534</u>		Task No:	Project Name: <u>Bohannon</u>	Date: <u>11/15/12</u>
Site Location: <u>San Lorenzo</u>		Sampler(s): <u>C. Weller</u>		
Well ID: <u>NOBS - B1</u>	Depth to Water (DTW) (ft): <u>6.32</u>		Sample DTW (ft): <u>6.32</u>	Measurements Referenced to: TOC
Screen Interval (ft):	Depth to Bottom (DTB) (ft):			
Tube/Pump Depth (ft):	Well Diameter (inch): <u>2</u>		OVM (ppm) = <u>—</u>	

CALCULATIONS:

$$\text{Length of the water column: } \frac{\text{DTB}}{\text{Water Col}} \text{ ft} - \frac{\text{DTW}}{\text{Water Col}} \text{ ft} = \frac{\text{Water Col}}{\text{Water Col}} \text{ ft}$$

$$\text{80% of the water level: } \frac{\text{DTW}}{\text{Water Col}} \text{ ft} + (\frac{\text{Water Col}}{\text{Water Col}} \text{ ft} \times 0.2) = \frac{\text{Recharge water level}}{\text{Water Col}} \text{ ft}$$

$$\text{Estimated Purge Volume (EPV): } \frac{\text{Water col}}{\text{gal/in. ft.}} \times \frac{3}{\text{Casing Volumes}} = \frac{\text{Gallons}}{\text{Casing Volumes}}$$

- (X) Low-Flow/Micro Purging
() Purge at least 3 well volumes

Volume of Schedule 40 PVC Pipe		
Well Diameter.	ID	gal/linear ft.
1.25	1.38	0.08
2	2.067	0.17
3	3.068	0.38
4	4.026	0.66
6	6.065	1.5
8	7.981	2.6
10	10.02	4.12
12	11.938	5.81

Purging Equipment:

- () Bailer
() Disposable Bailer
() Electric Submersible Pump
(X) Peristaltic Pump
() Other: _____

Sampling Equipment:

- () Bailer
(X) Pump Discharge
() Disposable Bailer
() Peristaltic Pump & Dedicated Tubing
() Other: _____

Type of Water Quality Kit Used:

- (X) YSI 556
() Myron L
() Horriba
() Hanna
() Other: _____

Begin Purge at 1230

Time (24 hrs)	Volume (G <u>L</u>)	Temp. (<u>°</u> F)	DTW	Specific Conductivity ($\mu\text{S}/\text{cm}$)	pH (units)	Color	Odor	DO (mg/L)	Redox Potential (mV)
(every 3-5 min)	(\pm 10%)	(\pm 10%)		(\pm 10%)	(\pm 0.2)			(\pm 10%)	(\pm 20%)
1235	1	20.98	6.32	1064	6.99	Clear	none	0.54	-225.2
1240	2	20.88	6.32	1066	6.98	"	"	0.33	-226.3
1245	3	20.82	6.32	1066	6.97	"	"	0.30	-210.6
1250	4	20.83	6.32	1067	6.96	"	"	0.13	-248.1
1255	5	20.82	6.32	1067	6.95	"	"	0.12	-277.3
1300	6	20.85	6.32	1068	6.95	"	"	0.11	-277.2

Liters / Gallons Purged:			Pump Rate in L or G /min:		
Sampling Time: <u>1300</u>			Duplicate Sample ID: <u> </u> Sample Time: <u> </u>		
Sample Analyzed For: SEE WORK ORDER			Duplicate Sample Analyzed For: SEE WORK ORDER		
(<input checked="" type="checkbox"/> Analyte(s):	Preservative:	Bottles:	(<input checked="" type="checkbox"/> Analyte(s):	Preservative:	Bottles:
(X) TPH-g, BTEX, MTBE	HCl	3 X 40 mL VOAs	() TOC	H_2SO_4	2 X 40 mL Amber VOAs
() TPH-d & TPH-mo	HCl	2 x 0.5 L Ambers	() Methane	HCl	3 X 40 mL VOAs
() NO ₂ , NO ₃ & SO ₄	None	1 X 500 mL Poly	() Naphthalene, Phenol	None	2 x 1 L Ambers
() Total Manganese	HNO ₃	1 X 250 mL Poly	() Alkalinity, TDS	None	1 X 500 mL Poly
() Dissolved Iron	Field-filtered, HNO ₃	1 X 250 mL Poly	() Phosphorus, TKN	H_2SO_4	1 x 500 mL Poly
() Ferrous Iron	HCl	2 X Amber VOAs	() VOCs	HCl	3 X 40 mL VOAs
() SVOCs	None	2 x 1 L Ambers	() Other		




Notes:



Stantec

**Stantec Lafayette Office
57 Lafayette Circle, 2nd Floor
Lafayette, CA 94549
TEL:(925) 299-9300 FAX:(925)299-9302**

CHAIN OF CUSTODY RECORD

Stantec Stantec Lafayette Office 57 Lafayette Circle, 2nd Floor Lafayette, CA 94549 TEL:(925) 299-9300 FAX:(925)299-9302		Stantec Company Contact(s) for Invoice:					Stantec Project #		DATE: 11-16-12		
Project Manager: Mason Albrecht email: mason.albrcht@stantec.com					185702534		PAGE: 1 OF 1				
Project Name: Bohannon Address: 575 Paseo Grande, San Lorenzo CA					Sampler(s) Printed Name: Charles Melancon Sampler(s) Signature: 		Laboratory:		TestAmerica		
							Lab Use Only:				
Turn-around Time (Business Days): 10 DAYS <input checked="" type="checkbox"/> 5 DAYS <input type="checkbox"/> 72 HR <input type="checkbox"/> 48 HR <input type="checkbox"/> 24 HR <input type="checkbox"/> <24 HR <input type="checkbox"/> <input type="checkbox"/> OTHER					REQUESTED ANALYSIS						
Special Instructions or Notes: Temperature Upon Receipt (C): <input type="text"/>					Temp 34°C						
LAB USE ONLY	Field Sample Identification	SAMPLING		MAT- RIX	No. of Cont.	Pre- serve	TPH-g/IBTEX by 8260B	Laboratory Notes			
		DATE	TIME								
	TB-1	11-15-12	800	W	2	HCL	X				
	MW-7		1010		3		X				
	MW-6		1050				X				
	MW-5		1140				X				
	MW-4		1220				X				
	NOBS-B1		1300				X				
	MW-2		1340				X				
	MW-1		1420				X				
	POBS-A1	11-16-12	930				X				
	POBS-B1		1020				X				
	MW-3		1100				X				
	POBS-B2		1140				X				
	DUP		—				X				
Relinquished by: (Signature) 		Date: 11-16-12	Time: 1222	Received by: (Signature) 				11-16-12	Time: 1422		
Relinquished by: (Signature)		Date:	Time:	Received by: (Signature)					Time:		
Relinquished by: (Signature)		Date:	Time:	Received by: (Signature)					Time:		

Stantec

**FOURTH QUARTER 2012
GROUNDWATER MONITORING REPORT
DAVID D. BOHANNON ORGANIZATION**

APPENDIX C

**Laboratory Analytical Report and Chain-of-Custody for the
November 2012 Groundwater Monitoring Event**

Fourth Quarter 2012 Groundwater Monitoring Report

David D. Bohannon Organization

575 Paseo Grande

San Lorenzo, California

Stantec PN: 185702534

February 19, 2013

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

ANALYTICAL REPORT

TestAmerica Laboratories, Inc.

TestAmerica Pleasanton

1220 Quarry Lane

Pleasanton, CA 94566

Tel: (925)484-1919

TestAmerica Job ID: 720-46042-1

Client Project/Site: Bohannon San Lorenzo

For:

Stantec Consulting Corp.

57 Lafayette Circle

2nd Floor

Lafayette, California 94549-4321

Attn: Mr. Mason Albrecht



Authorized for release by:

11/26/2012 1:45:26 PM

Afsaneh Salimpour

Project Manager I

afsaneh.salimpour@testamericainc.com

LINKS

Review your project
results through

TotalAccess

Have a Question?

Ask
The
Expert

Visit us at:

www.testamericainc.com

This report has been electronically signed and authorized by the signatory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

Results relate only to the items tested and the sample(s) as received by the laboratory.

Table of Contents

Cover Page	1
Table of Contents	2
Definitions/Glossary	3
Case Narrative	4
Detection Summary	5
Client Sample Results	7
QC Sample Results	12
QC Association Summary	19
Lab Chronicle	21
Certification Summary	24
Method Summary	25
Sample Summary	26
Chain of Custody	27
Receipt Checklists	28

Definitions/Glossary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Glossary

Abbreviation	These commonly used abbreviations may or may not be present in this report.	1
⊗	Listed under the "D" column to designate that the result is reported on a dry weight basis	2
%R	Percent Recovery	3
CNF	Contains no Free Liquid	4
DER	Duplicate error ratio (normalized absolute difference)	5
DL, RA, RE, IN	Indicates a Dilution, Reanalysis, Re-extraction, or additional Initial metals/anion analysis of the sample	6
DLC	Decision level concentration	7
EDL	Estimated Detection Limit	8
EPA	United States Environmental Protection Agency	9
MDA	Minimum detectable activity	10
MDC	Minimum detectable concentration	11
MDL	Method Detection Limit	12
ML	Minimum Level (Dioxin)	13
ND	Not detected at the reporting limit (or MDL or EDL if shown)	14
PQL	Practical Quantitation Limit	
QC	Quality Control	
RER	Relative error ratio	
RL	Reporting Limit or Requested Limit (Radiochemistry)	
RPD	Relative Percent Difference, a measure of the relative difference between two points	
TEF	Toxicity Equivalent Factor (Dioxin)	
TEQ	Toxicity Equivalent Quotient (Dioxin)	

Case Narrative

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Job ID: 720-46042-1

Laboratory: TestAmerica Pleasanton

Narrative

Job Narrative
720-46042-1

Comments

No additional comments.

Receipt

The samples were received on 11/16/2012 12:22 PM; the samples arrived in good condition, properly preserved and, where required, on ice. The temperature of the cooler at receipt was 3.4° C.

GC/MS VOA

No analytical or quality issues were noted.

Detection Summary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Client Sample ID: TB-1

Lab Sample ID: 720-46042-1

No Detections

Client Sample ID: MW-7

Lab Sample ID: 720-46042-2

No Detections

Client Sample ID: MW-6

Lab Sample ID: 720-46042-3

No Detections

Client Sample ID: MW-5

Lab Sample ID: 720-46042-4

No Detections

Client Sample ID: MW-4

Lab Sample ID: 720-46042-5

Analyte	Result	Qualifier	RL	MDL	Unit	Dil Fac	D	Method	Prep Type
Benzene	69		2.5		ug/L	5		8260B/CA_LUFT MS	Total/NA
Toluene	6.4		2.5		ug/L	5		8260B/CA_LUFT MS	Total/NA
Gasoline Range Organics (GRO) -C5-C12	4000		250		ug/L	5		8260B/CA_LUFT MS	Total/NA

Client Sample ID: NOBS-B1

Lab Sample ID: 720-46042-6

No Detections

Client Sample ID: MW-2

Lab Sample ID: 720-46042-7

Analyte	Result	Qualifier	RL	MDL	Unit	Dil Fac	D	Method	Prep Type
Benzene	3.2		0.50		ug/L	1		8260B/CA_LUFT MS	Total/NA
Gasoline Range Organics (GRO) -C5-C12	350		50		ug/L	1		8260B/CA_LUFT MS	Total/NA

Client Sample ID: MW-1

Lab Sample ID: 720-46042-8

No Detections

Client Sample ID: POBS-A1

Lab Sample ID: 720-46042-9

Analyte	Result	Qualifier	RL	MDL	Unit	Dil Fac	D	Method	Prep Type
Benzene	1600		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
Ethylbenzene	6.6		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
Toluene	36		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
m-Xylene & p-Xylene	22		10		ug/L	10		8260B/CA_LUFT MS	Total/NA
o-Xylene	6.1		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
Gasoline Range Organics (GRO) -C5-C12	4700		500		ug/L	10		8260B/CA_LUFT MS	Total/NA

Detection Summary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Client Sample ID: POBS-B1

Lab Sample ID: 720-46042-10

No Detections

Client Sample ID: MW-3

Lab Sample ID: 720-46042-11

Analyte	Result	Qualifier	RL	MDL	Unit	Dil Fac	D	Method	Prep Type
Benzene	2.0		0.50		ug/L	1		8260B/CA_LUFT MS	Total/NA
Gasoline Range Organics (GRO) -C5-C12	66		50		ug/L	1		8260B/CA_LUFT MS	Total/NA

Client Sample ID: POBS-B2

Lab Sample ID: 720-46042-12

No Detections

Client Sample ID: DUP

Lab Sample ID: 720-46042-13

Analyte	Result	Qualifier	RL	MDL	Unit	Dil Fac	D	Method	Prep Type
Benzene	1700		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
Ethylbenzene	6.3		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
Toluene	35		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
m-Xylene & p-Xylene	21		10		ug/L	10		8260B/CA_LUFT MS	Total/NA
o-Xylene	6.1		5.0		ug/L	10		8260B/CA_LUFT MS	Total/NA
Gasoline Range Organics (GRO) -C5-C12	4700		500		ug/L	10		8260B/CA_LUFT MS	Total/NA

Client Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS

Client Sample ID: TB-1

Date Collected: 11/15/12 08:00

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-1

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/20/12 16:50	1
Ethylbenzene	ND		0.50		ug/L			11/20/12 16:50	1
Toluene	ND		0.50		ug/L			11/20/12 16:50	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/20/12 16:50	1
o-Xylene	ND		0.50		ug/L			11/20/12 16:50	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/20/12 16:50	1
-C5-C12									
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	98		67 - 130					11/20/12 16:50	1
1,2-Dichloroethane-d4 (Surr)	100		75 - 138					11/20/12 16:50	1
Toluene-d8 (Surr)	98		70 - 130					11/20/12 16:50	1

Client Sample ID: MW-7

Date Collected: 11/15/12 10:10

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-2

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/20/12 16:21	1
Ethylbenzene	ND		0.50		ug/L			11/20/12 16:21	1
Toluene	ND		0.50		ug/L			11/20/12 16:21	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/20/12 16:21	1
o-Xylene	ND		0.50		ug/L			11/20/12 16:21	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/20/12 16:21	1
-C5-C12									
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	101		67 - 130					11/20/12 16:21	1
1,2-Dichloroethane-d4 (Surr)	103		75 - 138					11/20/12 16:21	1
Toluene-d8 (Surr)	101		70 - 130					11/20/12 16:21	1

Client Sample ID: MW-6

Date Collected: 11/15/12 10:50

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-3

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/20/12 17:19	1
Ethylbenzene	ND		0.50		ug/L			11/20/12 17:19	1
Toluene	ND		0.50		ug/L			11/20/12 17:19	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/20/12 17:19	1
o-Xylene	ND		0.50		ug/L			11/20/12 17:19	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/20/12 17:19	1
-C5-C12									
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	97		67 - 130					11/20/12 17:19	1
1,2-Dichloroethane-d4 (Surr)	101		75 - 138					11/20/12 17:19	1
Toluene-d8 (Surr)	99		70 - 130					11/20/12 17:19	1

TestAmerica Pleasanton

Client Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS

Client Sample ID: MW-5

Date Collected: 11/15/12 11:40

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-4

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/20/12 17:48	1
Ethylbenzene	ND		0.50		ug/L			11/20/12 17:48	1
Toluene	ND		0.50		ug/L			11/20/12 17:48	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/20/12 17:48	1
o-Xylene	ND		0.50		ug/L			11/20/12 17:48	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/20/12 17:48	1
-C5-C12									
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	98		67 - 130					11/20/12 17:48	1
1,2-Dichloroethane-d4 (Surr)	101		75 - 138					11/20/12 17:48	1
Toluene-d8 (Surr)	99		70 - 130					11/20/12 17:48	1

Client Sample ID: MW-4

Date Collected: 11/15/12 12:20

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-5

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	69		2.5		ug/L			11/21/12 02:37	5
Ethylbenzene	ND		2.5		ug/L			11/21/12 02:37	5
Toluene	6.4		2.5		ug/L			11/21/12 02:37	5
m-Xylene & p-Xylene	ND		5.0		ug/L			11/21/12 02:37	5
o-Xylene	ND		2.5		ug/L			11/21/12 02:37	5
Gasoline Range Organics (GRO)	4000		250		ug/L			11/21/12 02:37	5
-C5-C12									
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	100		67 - 130					11/21/12 02:37	5
1,2-Dichloroethane-d4 (Surr)	92		75 - 138					11/21/12 02:37	5
Toluene-d8 (Surr)	115		70 - 130					11/21/12 02:37	5

Client Sample ID: NOBS-B1

Date Collected: 11/15/12 13:00

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-6

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/21/12 03:05	1
Ethylbenzene	ND		0.50		ug/L			11/21/12 03:05	1
Toluene	ND		0.50		ug/L			11/21/12 03:05	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/21/12 03:05	1
o-Xylene	ND		0.50		ug/L			11/21/12 03:05	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/21/12 03:05	1
-C5-C12									
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	99		67 - 130					11/21/12 03:05	1
1,2-Dichloroethane-d4 (Surr)	91		75 - 138					11/21/12 03:05	1
Toluene-d8 (Surr)	114		70 - 130					11/21/12 03:05	1

Client Sample ID: MW-2

Date Collected: 11/15/12 13:40

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-7

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	3.2		0.50		ug/L			11/21/12 16:29	1

TestAmerica Pleasanton

Client Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Client Sample ID: MW-2

Date Collected: 11/15/12 13:40

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-7

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Ethylbenzene	ND		0.50		ug/L			11/21/12 16:29	1
Toluene	ND		0.50		ug/L			11/21/12 16:29	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/21/12 16:29	1
o-Xylene	ND		0.50		ug/L			11/21/12 16:29	1
Gasoline Range Organics (GRO) -C5-C12	350		50		ug/L			11/21/12 16:29	1
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	103		67 - 130					11/21/12 16:29	1
1,2-Dichloroethane-d4 (Surr)	103		75 - 138					11/21/12 16:29	1
Toluene-d8 (Surr)	102		70 - 130					11/21/12 16:29	1

Client Sample ID: MW-1

Date Collected: 11/15/12 14:20

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-8

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/21/12 06:22	1
Ethylbenzene	ND		0.50		ug/L			11/21/12 06:22	1
Toluene	ND		0.50		ug/L			11/21/12 06:22	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/21/12 06:22	1
o-Xylene	ND		0.50		ug/L			11/21/12 06:22	1
Gasoline Range Organics (GRO) -C5-C12	ND		50		ug/L			11/21/12 06:22	1
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	100		67 - 130					11/21/12 06:22	1
1,2-Dichloroethane-d4 (Surr)	107		75 - 138					11/21/12 06:22	1
Toluene-d8 (Surr)	111		70 - 130					11/21/12 06:22	1

Client Sample ID: POBS-A1

Date Collected: 11/16/12 09:30

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-9

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	1600		5.0		ug/L			11/21/12 04:03	10
Ethylbenzene	6.6		5.0		ug/L			11/21/12 04:03	10
Toluene	36		5.0		ug/L			11/21/12 04:03	10
m-Xylene & p-Xylene	22		10		ug/L			11/21/12 04:03	10
o-Xylene	6.1		5.0		ug/L			11/21/12 04:03	10
Gasoline Range Organics (GRO) -C5-C12	4700		500		ug/L			11/21/12 04:03	10
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	102		67 - 130					11/21/12 04:03	10
1,2-Dichloroethane-d4 (Surr)	89		75 - 138					11/21/12 04:03	10
Toluene-d8 (Surr)	114		70 - 130					11/21/12 04:03	10

Client Sample ID: POBS-B1

Date Collected: 11/16/12 10:20

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-10

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/21/12 04:31	1
Ethylbenzene	ND		0.50		ug/L			11/21/12 04:31	1

TestAmerica Pleasanton

Client Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Client Sample ID: POBS-B1

Date Collected: 11/16/12 10:20

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-10

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Toluene	ND		0.50		ug/L			11/21/12 04:31	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/21/12 04:31	1
o-Xylene	ND		0.50		ug/L			11/21/12 04:31	1
Gasoline Range Organics (GRO) -C5-C12	ND		50		ug/L			11/21/12 04:31	1
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	100		67 - 130					11/21/12 04:31	1
1,2-Dichloroethane-d4 (Surr)	95		75 - 138					11/21/12 04:31	1
Toluene-d8 (Surr)	114		70 - 130					11/21/12 04:31	1

Client Sample ID: MW-3

Date Collected: 11/16/12 11:00

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-11

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	2.0		0.50		ug/L			11/21/12 16:58	1
Ethylbenzene	ND		0.50		ug/L			11/21/12 16:58	1
Toluene	ND		0.50		ug/L			11/21/12 16:58	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/21/12 16:58	1
o-Xylene	ND		0.50		ug/L			11/21/12 16:58	1
Gasoline Range Organics (GRO) -C5-C12	66		50		ug/L			11/21/12 16:58	1
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	104		67 - 130					11/21/12 16:58	1
1,2-Dichloroethane-d4 (Surr)	100		75 - 138					11/21/12 16:58	1
Toluene-d8 (Surr)	100		70 - 130					11/21/12 16:58	1

Client Sample ID: POBS-B2

Date Collected: 11/16/12 11:40

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-12

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/21/12 05:28	1
Ethylbenzene	ND		0.50		ug/L			11/21/12 05:28	1
Toluene	ND		0.50		ug/L			11/21/12 05:28	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/21/12 05:28	1
o-Xylene	ND		0.50		ug/L			11/21/12 05:28	1
Gasoline Range Organics (GRO) -C5-C12	ND		50		ug/L			11/21/12 05:28	1
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	101		67 - 130					11/21/12 05:28	1
1,2-Dichloroethane-d4 (Surr)	94		75 - 138					11/21/12 05:28	1
Toluene-d8 (Surr)	114		70 - 130					11/21/12 05:28	1

Client Sample ID: DUP

Date Collected: 11/16/12 00:00

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-13

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	1700		5.0		ug/L			11/21/12 05:57	10
Ethylbenzene	6.3		5.0		ug/L			11/21/12 05:57	10
Toluene	35		5.0		ug/L			11/21/12 05:57	10

TestAmerica Pleasanton

Client Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Client Sample ID: DUP

Date Collected: 11/16/12 00:00

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-13

Matrix: Water

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
m-Xylene & p-Xylene	21		10		ug/L			11/21/12 05:57	10
o-Xylene	6.1		5.0		ug/L			11/21/12 05:57	10
Gasoline Range Organics (GRO) -C5-C12	4700		500		ug/L			11/21/12 05:57	10
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	103		67 - 130					11/21/12 05:57	10
1,2-Dichloroethane-d4 (Surr)	109		75 - 138					11/21/12 05:57	10
Toluene-d8 (Surr)	114		70 - 130					11/21/12 05:57	10

QC Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS

Lab Sample ID: MB 720-125540/4

Matrix: Water

Analysis Batch: 125540

Client Sample ID: Method Blank
Prep Type: Total/NA

Analyte	MB	MB	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
	Result	Qualifier							
Benzene	ND		0.50		ug/L			11/20/12 08:38	1
Ethylbenzene	ND		0.50		ug/L			11/20/12 08:38	1
Toluene	ND		0.50		ug/L			11/20/12 08:38	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/20/12 08:38	1
o-Xylene	ND		0.50		ug/L			11/20/12 08:38	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/20/12 08:38	1
-C5-C12									
Surrogate	MB	MB	Limits				Prepared	Analyzed	Dil Fac
	%Recovery	Qualifier							
4-Bromofluorobenzene	99		67 - 130					11/20/12 08:38	1
1,2-Dichloroethane-d4 (Surr)	98		75 - 138					11/20/12 08:38	1
Toluene-d8 (Surr)	100		70 - 130					11/20/12 08:38	1

Lab Sample ID: LCS 720-125540/5

Matrix: Water

Analysis Batch: 125540

Client Sample ID: Lab Control Sample
Prep Type: Total/NA

Analyte	Spike	LCS	LCS	Unit	D	%Rec	Limits
	Added	Result	Qualifier				
Benzene	25.0	24.1		ug/L		96	79 - 130
Ethylbenzene	25.0	25.0		ug/L		100	80 - 120
Toluene	25.0	24.9		ug/L		100	78 - 120
m-Xylene & p-Xylene	50.0	51.9		ug/L		104	70 - 142
o-Xylene	25.0	25.9		ug/L		104	70 - 130
Surrogate	LCS	LCS	Limits				
	%Recovery	Qualifier					
4-Bromofluorobenzene	101		67 - 130				
1,2-Dichloroethane-d4 (Surr)	95		75 - 138				
Toluene-d8 (Surr)	101		70 - 130				

Lab Sample ID: LCS 720-125540/7

Matrix: Water

Analysis Batch: 125540

Client Sample ID: Lab Control Sample
Prep Type: Total/NA

Analyte	Spike	LCS	LCS	Unit	D	%Rec	Limits
	Added	Result	Qualifier				
Gasoline Range Organics (GRO)	500	555		ug/L		111	62 - 120
-C5-C12							
Surrogate	LCS	LCS	Limits				
	%Recovery	Qualifier					
4-Bromofluorobenzene	103		67 - 130				
1,2-Dichloroethane-d4 (Surr)	101		75 - 138				
Toluene-d8 (Surr)	102		70 - 130				

Lab Sample ID: LCSD 720-125540/6

Matrix: Water

Analysis Batch: 125540

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte	Spike	LCSD	LCSD	Unit	D	%Rec	Limits	RPD
	Added	Result	Qualifier					
Benzene	25.0	23.6		ug/L		94	79 - 130	2

TestAmerica Pleasanton

QC Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Lab Sample ID: LCSD 720-125540/6

Matrix: Water

Analysis Batch: 125540

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte		Spike	LCSD	LCSD	Unit	D	%Rec.		RPD	RPD	Limit
		Added	Result	Qualifier			%Rec	Limits			
Ethylbenzene		25.0	24.3		ug/L		97	80 - 120	3	20	
Toluene		25.0	24.3		ug/L		97	78 - 120	3	20	
m-Xylene & p-Xylene		50.0	50.7		ug/L		101	70 - 142	2	20	
o-Xylene		25.0	25.5		ug/L		102	70 - 130	1	20	

Surrogate **LCSD** **LCSD**

Surrogate	%Recovery	Qualifier	Limits
4-Bromofluorobenzene	102		67 - 130
1,2-Dichloroethane-d4 (Surr)	98		75 - 138
Toluene-d8 (Surr)	101		70 - 130

Lab Sample ID: LCSD 720-125540/8

Matrix: Water

Analysis Batch: 125540

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte		Spike	LCSD	LCSD	Unit	D	%Rec.		RPD	RPD	Limit
		Added	Result	Qualifier			%Rec	Limits			
Gasoline Range Organics (GRO)		500	547		ug/L		109	62 - 120	1	20	
-C5-C12											

Surrogate **LCSD** **LCSD**

Surrogate	%Recovery	Qualifier	Limits
4-Bromofluorobenzene	103		67 - 130
1,2-Dichloroethane-d4 (Surr)	100		75 - 138
Toluene-d8 (Surr)	102		70 - 130

Lab Sample ID: 720-46042-2 MS

Matrix: Water

Analysis Batch: 125540

Client Sample ID: MW-7
Prep Type: Total/NA

Analyte	Sample Result	Sample Qualifier	Spike	MS	MS	Unit	D	%Rec.		RPD	RPD	Limit
		Result	Added	Result	Qualifier			%Rec	Limits			
Benzene	ND		25.0	23.1		ug/L		92	60 - 140			
Ethylbenzene	ND		25.0	25.7		ug/L		103	60 - 140			
Toluene	ND		25.0	25.4		ug/L		102	60 - 140			
m-Xylene & p-Xylene	ND		50.0	52.8		ug/L		106	60 - 140			
o-Xylene	ND		25.0	25.7		ug/L		103	60 - 140			

Surrogate **MS** **MS**

Surrogate	%Recovery	Qualifier	Limits
4-Bromofluorobenzene	99		67 - 130
1,2-Dichloroethane-d4 (Surr)	85		75 - 138
Toluene-d8 (Surr)	101		70 - 130

Lab Sample ID: 720-46042-2 MSD

Matrix: Water

Analysis Batch: 125540

Client Sample ID: MW-7
Prep Type: Total/NA

Analyte	Sample Result	Sample Qualifier	Spike	MSD	MSD	Unit	D	%Rec.		RPD	RPD	Limit
		Result	Added	Result	Qualifier			%Rec	Limits			
Benzene	ND		25.0	23.7		ug/L		95	60 - 140	2	20	
Ethylbenzene	ND		25.0	24.3		ug/L		97	60 - 140	6	20	
Toluene	ND		25.0	24.2		ug/L		97	60 - 140	5	20	
m-Xylene & p-Xylene	ND		50.0	50.6		ug/L		101	60 - 140	4	20	

TestAmerica Pleasanton

QC Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Lab Sample ID: 720-46042-2 MSD

Matrix: Water

Analysis Batch: 125540

**Client Sample ID: MW-7
Prep Type: Total/NA**

Analyte	Sample	Sample	Spike	MSD	MSD	Unit	D	%Rec	%Rec.	RPD	RPD
	Result	Qualifier	Added	Result	Qualifier						
o-Xylene	ND		25.0	25.6		ug/L		102	60 - 140	0	20
Surrogate											
4-Bromofluorobenzene	103			67 - 130							
1,2-Dichloroethane-d4 (Surr)	98			75 - 138							
Toluene-d8 (Surr)	101			70 - 130							

Lab Sample ID: MB 720-125603/4

Matrix: Water

Analysis Batch: 125603

**Client Sample ID: Method Blank
Prep Type: Total/NA**

Analyte	MB	MB	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
	Result	Qualifier							
Benzene	ND		0.50		ug/L			11/20/12 19:27	1
Ethylbenzene	ND		0.50		ug/L			11/20/12 19:27	1
Toluene	ND		0.50		ug/L			11/20/12 19:27	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/20/12 19:27	1
o-Xylene	ND		0.50		ug/L			11/20/12 19:27	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/20/12 19:27	1
-C5-C12									
Surrogate									
4-Bromofluorobenzene	96		67 - 130				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	89		75 - 138					11/20/12 19:27	1
Toluene-d8 (Surr)	99		70 - 130					11/20/12 19:27	1

Lab Sample ID: LCS 720-125603/5

Matrix: Water

Analysis Batch: 125603

**Client Sample ID: Lab Control Sample
Prep Type: Total/NA**

Analyte	Spike	LCS	LCS	Unit	D	%Rec	%Rec.
	Added	Result	Qualifier				
Benzene	25.0	23.1		ug/L		92	79 - 130
Ethylbenzene	25.0	25.5		ug/L		102	80 - 120
Toluene	25.0	25.1		ug/L		100	78 - 120
m-Xylene & p-Xylene	50.0	52.8		ug/L		106	70 - 142
o-Xylene	25.0	25.8		ug/L		103	70 - 130
Surrogate							
4-Bromofluorobenzene	99	67 - 130					
1,2-Dichloroethane-d4 (Surr)	85	75 - 138					
Toluene-d8 (Surr)	102	70 - 130					

Lab Sample ID: LCS 720-125603/7

Matrix: Water

Analysis Batch: 125603

**Client Sample ID: Lab Control Sample
Prep Type: Total/NA**

Analyte	Spike	LCS	LCS	Unit	D	%Rec	%Rec.
	Added	Result	Qualifier				
Gasoline Range Organics (GRO)	500	568		ug/L		114	62 - 120
-C5-C12							

TestAmerica Pleasanton

QC Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Lab Sample ID: LCS 720-125603/7

Matrix: Water

Analysis Batch: 125603

Client Sample ID: Lab Control Sample
Prep Type: Total/NA

Surrogate	LCS	LCS	%Recovery	Qualifier	Limits
4-Bromofluorobenzene			98		67 - 130
1,2-Dichloroethane-d4 (Surr)			86		75 - 138
Toluene-d8 (Surr)			102		70 - 130

Lab Sample ID: LCSD 720-125603/6

Matrix: Water

Analysis Batch: 125603

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte	Spike		LCSD	LCSD	Unit	D	%Rec	Limits	%Rec.	RPD	Limit
	Added	Result	Qualifier								
Benzene		25.0		23.3	ug/L		93	79 - 130		1	20
Ethylbenzene		25.0		25.7	ug/L		103	80 - 120		1	20
Toluene		25.0		25.2	ug/L		101	78 - 120		1	20
m-Xylene & p-Xylene		50.0		53.0	ug/L		106	70 - 142		0	20
o-Xylene		25.0		25.8	ug/L		103	70 - 130		0	20

Surrogate

Surrogate	LCSD	LCSD	%Recovery	Qualifier	Limits
4-Bromofluorobenzene			99		67 - 130
1,2-Dichloroethane-d4 (Surr)			85		75 - 138
Toluene-d8 (Surr)			102		70 - 130

Lab Sample ID: LCSD 720-125603/8

Matrix: Water

Analysis Batch: 125603

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte	Spike		LCSD	LCSD	Unit	D	%Rec	Limits	%Rec.	RPD	Limit
	Added	Result	Qualifier								
Gasoline Range Organics (GRO) -C5-C12		500		577	ug/L		115	62 - 120		1	20

Surrogate	LCSD		LCSD	Limits
	%Recovery	Qualifier		
4-Bromofluorobenzene			100	67 - 130
1,2-Dichloroethane-d4 (Surr)			88	75 - 138
Toluene-d8 (Surr)			101	70 - 130

Lab Sample ID: MB 720-125604/4

Matrix: Water

Analysis Batch: 125604

Client Sample ID: Method Blank
Prep Type: Total/NA

Analyte	MB		MB	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
	Result	Qualifier								
Benzene	ND			0.50		ug/L			11/20/12 20:22	1
Ethylbenzene	ND			0.50		ug/L			11/20/12 20:22	1
Toluene	ND			0.50		ug/L			11/20/12 20:22	1
m-Xylene & p-Xylene	ND			1.0		ug/L			11/20/12 20:22	1
o-Xylene	ND			0.50		ug/L			11/20/12 20:22	1
Gasoline Range Organics (GRO) -C5-C12	ND			50		ug/L			11/20/12 20:22	1

TestAmerica Pleasanton

QC Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Lab Sample ID: MB 720-125604/4

Matrix: Water

Analysis Batch: 125604

Client Sample ID: Method Blank
Prep Type: Total/NA

Surrogate	MB	MB	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
	%Recovery	Qualifier						
4-Bromofluorobenzene	95		67 - 130				11/20/12 20:22	1
1,2-Dichloroethane-d4 (Surr)	101		75 - 138				11/20/12 20:22	1
Toluene-d8 (Surr)	98		70 - 130				11/20/12 20:22	1

Lab Sample ID: LCS 720-125604/5

Matrix: Water

Analysis Batch: 125604

Client Sample ID: Lab Control Sample
Prep Type: Total/NA

Analyte	Spikes	LCS	LCS	Unit	D	%Rec	Limits	%Rec.
	Added	Result	Qualifier					
Benzene	25.0	24.4		ug/L		98	79 - 130	
Ethylbenzene	25.0	24.0		ug/L		96	80 - 120	
Toluene	25.0	23.8		ug/L		95	78 - 120	
m-Xylene & p-Xylene	50.0	49.8		ug/L		100	70 - 142	
o-Xylene	25.0	25.1		ug/L		100	70 - 130	

Surrogate	LCS	LCS	%Recovery	Qualifier	Limits	Unit	D	%Rec
	%Recovery	Added						
4-Bromofluorobenzene	100		67 - 130					
1,2-Dichloroethane-d4 (Surr)	96		75 - 138					
Toluene-d8 (Surr)	103		70 - 130					

Lab Sample ID: LCS 720-125604/7

Matrix: Water

Analysis Batch: 125604

Client Sample ID: Lab Control Sample
Prep Type: Total/NA

Analyte	Spikes	LCS	LCS	Unit	D	%Rec	Limits	%Rec.
	Added	Result	Qualifier					
Gasoline Range Organics (GRO)	500	460		ug/L		92	62 - 120	
-C5-C12								

Surrogate	LCS	LCS	%Recovery	Qualifier	Limits	Unit	D	%Rec
	%Recovery	Added						
4-Bromofluorobenzene	101		67 - 130					
1,2-Dichloroethane-d4 (Surr)	98		75 - 138					
Toluene-d8 (Surr)	102		70 - 130					

Lab Sample ID: LCSD 720-125604/6

Matrix: Water

Analysis Batch: 125604

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte	Spikes	LCSD	LCSD	Unit	D	%Rec	Limits	RPD	Limit
	Added	Result	Qualifier						
Benzene	25.0	24.4		ug/L		98	79 - 130	0	20
Ethylbenzene	25.0	23.8		ug/L		95	80 - 120	1	20
Toluene	25.0	23.5		ug/L		94	78 - 120	1	20
m-Xylene & p-Xylene	50.0	49.0		ug/L		98	70 - 142	2	20
o-Xylene	25.0	25.0		ug/L		100	70 - 130	1	20

Surrogate	LCSD	LCSD	%Recovery	Qualifier	Limits	Unit	D	%Rec
	%Recovery	Added						
4-Bromofluorobenzene	99		67 - 130					
1,2-Dichloroethane-d4 (Surr)	95		75 - 138					

TestAmerica Pleasanton

QC Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Lab Sample ID: LCSD 720-125604/6

Matrix: Water

Analysis Batch: 125604

Surrogate	LCSD %Recovery	LCSD Qualifier	Limits
Toluene-d8 (Surr)	103		70 - 130

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

Lab Sample ID: LCSD 720-125604/8

Matrix: Water

Analysis Batch: 125604

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec.	RPD	RPD Limit
Gasoline Range Organics (GRO)		460		ug/L				
-C5-C12	500							
Surrogate	%Recovery	Qualifier	Limits	ug/L	D	%Rec.	RPD	RPD Limit
4-Bromofluorobenzene	101		67 - 130					
1,2-Dichloroethane-d4 (Surr)	99		75 - 138					
Toluene-d8 (Surr)	102		70 - 130					

Lab Sample ID: MB 720-125648/4

Matrix: Water

Analysis Batch: 125648

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.50		ug/L			11/21/12 09:46	1
Ethylbenzene	ND		0.50		ug/L			11/21/12 09:46	1
Toluene	ND		0.50		ug/L			11/21/12 09:46	1
m-Xylene & p-Xylene	ND		1.0		ug/L			11/21/12 09:46	1
o-Xylene	ND		0.50		ug/L			11/21/12 09:46	1
Gasoline Range Organics (GRO)	ND		50		ug/L			11/21/12 09:46	1
-C5-C12									

Surrogate **MB** **MB**

Surrogate	MB %Recovery	MB Qualifier	MB Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene	110		67 - 130		11/21/12 09:46	1
1,2-Dichloroethane-d4 (Surr)	91		75 - 138		11/21/12 09:46	1
Toluene-d8 (Surr)	124		70 - 130		11/21/12 09:46	1

Lab Sample ID: LCS 720-125648/11

Matrix: Water

Analysis Batch: 125648

Analyte	Spike Added	LCs Result	LCs Qualifier	Unit	D	%Rec.	RPD
Gasoline Range Organics (GRO)	500	551		ug/L			
-C5-C12							
Surrogate	%Recovery	Qualifier	Limits	ug/L	D	%Rec.	RPD
4-Bromofluorobenzene	101		67 - 130				
1,2-Dichloroethane-d4 (Surr)	87		75 - 138				
Toluene-d8 (Surr)	101		70 - 130				

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

QC Sample Results

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method: 8260B/CA_LUFTMS - 8260B / CA LUFT MS (Continued)

Lab Sample ID: LCS 720-125648/9

Matrix: Water

Analysis Batch: 125648

Client Sample ID: Lab Control Sample
Prep Type: Total/NA

Analyte	Spike	LCS	LCS	Unit	D	%Rec.	Limits
	Added	Result	Qualifier			%Rec	
Benzene	25.0	22.9		ug/L	92	79 - 130	
Ethylbenzene	25.0	26.0		ug/L	104	80 - 120	
Toluene	25.0	25.6		ug/L	102	78 - 120	
m-Xylene & p-Xylene	50.0	53.8		ug/L	108	70 - 142	
o-Xylene	25.0	26.0		ug/L	104	70 - 130	

Surrogate **LCS** **LCS**
%Recovery **Qualifier** **Limits**

4-Bromofluorobenzene	101		67 - 130
1,2-Dichloroethane-d4 (Surr)	83		75 - 138
Toluene-d8 (Surr)	101		70 - 130

Lab Sample ID: LCSD 720-125648/10

Matrix: Water

Analysis Batch: 125648

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte	Spike	LCSD	LCSD	Unit	D	%Rec.	RPD	Limit
	Added	Result	Qualifier			%Rec		
Benzene	25.0	23.3		ug/L	93	79 - 130	2	20
Ethylbenzene	25.0	26.0		ug/L	104	80 - 120	0	20
Toluene	25.0	25.5		ug/L	102	78 - 120	0	20
m-Xylene & p-Xylene	50.0	53.8		ug/L	108	70 - 142	0	20
o-Xylene	25.0	26.0		ug/L	104	70 - 130	0	20

Surrogate **LCSD** **LCSD**
%Recovery **Qualifier** **Limits**

4-Bromofluorobenzene	100		67 - 130
1,2-Dichloroethane-d4 (Surr)	83		75 - 138
Toluene-d8 (Surr)	100		70 - 130

Lab Sample ID: LCSD 720-125648/12

Matrix: Water

Analysis Batch: 125648

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA

Analyte	Spike	LCSD	LCSD	Unit	D	%Rec.	RPD	Limit
	Added	Result	Qualifier			%Rec		
Gasoline Range Organics (GRO) -C5-C12	500	567		ug/L	113	62 - 120	3	20

Surrogate **LCSD** **LCSD**
%Recovery **Qualifier** **Limits**

4-Bromofluorobenzene	101		67 - 130
1,2-Dichloroethane-d4 (Surr)	91		75 - 138
Toluene-d8 (Surr)	100		70 - 130

TestAmerica Pleasanton

QC Association Summary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

GC/MS VOA

Analysis Batch: 125540

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
720-46042-1	TB-1	Total/NA	Water	8260B/CA_LUFT MS	5
720-46042-2	MW-7	Total/NA	Water	8260B/CA_LUFT MS	6
720-46042-2 MS	MW-7	Total/NA	Water	8260B/CA_LUFT MS	7
720-46042-2 MSD	MW-7	Total/NA	Water	8260B/CA_LUFT MS	8
720-46042-3	MW-6	Total/NA	Water	8260B/CA_LUFT MS	9
720-46042-4	MW-5	Total/NA	Water	8260B/CA_LUFT MS	10
LCS 720-125540/5	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	11
LCS 720-125540/7	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	12
LCSD 720-125540/6	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	13
LCSD 720-125540/8	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	14
MB 720-125540/4	Method Blank	Total/NA	Water	8260B/CA_LUFT MS	

Analysis Batch: 125603

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
720-46042-5	MW-4	Total/NA	Water	8260B/CA_LUFT MS	
720-46042-6	NOBS-B1	Total/NA	Water	8260B/CA_LUFT MS	
720-46042-9	POBS-A1	Total/NA	Water	8260B/CA_LUFT MS	
720-46042-10	POBS-B1	Total/NA	Water	8260B/CA_LUFT MS	
720-46042-12	POBS-B2	Total/NA	Water	8260B/CA_LUFT MS	
720-46042-13	DUP	Total/NA	Water	8260B/CA_LUFT MS	
LCS 720-125603/5	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	
LCS 720-125603/7	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	
LCSD 720-125603/6	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	
LCSD 720-125603/8	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	
MB 720-125603/4	Method Blank	Total/NA	Water	8260B/CA_LUFT MS	

Analysis Batch: 125604

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
720-46042-8	MW-1	Total/NA	Water	8260B/CA_LUFT MS	
LCS 720-125604/5	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	
LCS 720-125604/7	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	

TestAmerica Pleasanton

QC Association Summary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

GC/MS VOA (Continued)

Analysis Batch: 125604 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
LCSD 720-125604/6	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	5
LCSD 720-125604/8	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	6
MB 720-125604/4	Method Blank	Total/NA	Water	8260B/CA_LUFT MS	7

Analysis Batch: 125648

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
720-46042-7	MW-2	Total/NA	Water	8260B/CA_LUFT MS	9
720-46042-11	MW-3	Total/NA	Water	8260B/CA_LUFT MS	10
LCS 720-125648/11	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	11
LCS 720-125648/9	Lab Control Sample	Total/NA	Water	8260B/CA_LUFT MS	12
LCSD 720-125648/10	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	13
LCSD 720-125648/12	Lab Control Sample Dup	Total/NA	Water	8260B/CA_LUFT MS	14
MB 720-125648/4	Method Blank	Total/NA	Water	8260B/CA_LUFT MS	

Lab Chronicle

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Client Sample ID: TB-1

Date Collected: 11/15/12 08:00
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-1

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125540	11/20/12 16:50	AC	TAL SF

Client Sample ID: MW-7

Date Collected: 11/15/12 10:10
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-2

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125540	11/20/12 16:21	AC	TAL SF

Client Sample ID: MW-6

Date Collected: 11/15/12 10:50
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-3

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125540	11/20/12 17:19	AC	TAL SF

Client Sample ID: MW-5

Date Collected: 11/15/12 11:40
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-4

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125540	11/20/12 17:48	AC	TAL SF

Client Sample ID: MW-4

Date Collected: 11/15/12 12:20
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-5

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		5	125603	11/21/12 02:37	AC	TAL SF

Client Sample ID: NOBS-B1

Date Collected: 11/15/12 13:00
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-6

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125603	11/21/12 03:05	AC	TAL SF

TestAmerica Pleasanton

Lab Chronicle

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Client Sample ID: MW-2

Date Collected: 11/15/12 13:40
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-7

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125648	11/21/12 16:29	AC	TAL SF

Client Sample ID: MW-1

Date Collected: 11/15/12 14:20
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-8

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125604	11/21/12 06:22	LL	TAL SF

Client Sample ID: POBS-A1

Date Collected: 11/16/12 09:30
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-9

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		10	125603	11/21/12 04:03	AC	TAL SF

Client Sample ID: POBS-B1

Date Collected: 11/16/12 10:20
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-10

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125603	11/21/12 04:31	AC	TAL SF

Client Sample ID: MW-3

Date Collected: 11/16/12 11:00
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-11

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125648	11/21/12 16:58	AC	TAL SF

Client Sample ID: POBS-B2

Date Collected: 11/16/12 11:40
Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-12

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		1	125603	11/21/12 05:28	AC	TAL SF

TestAmerica Pleasanton

Lab Chronicle

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Client Sample ID: DUP

Date Collected: 11/16/12 00:00

Date Received: 11/16/12 12:22

Lab Sample ID: 720-46042-13

Matrix: Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260B/CA_LUFTMS		10	125603	11/21/12 05:57	AC	TAL SF

Laboratory References:

TAL SF = TestAmerica Pleasanton, 1220 Quarry Lane, Pleasanton, CA 94566, TEL (925)484-1919

1

2

3

4

5

6

7

8

9

10

11

12

13

14

TestAmerica Pleasanton

Certification Summary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Laboratory: TestAmerica Pleasanton

All certifications held by this laboratory are listed. Not all certifications are applicable to this report.

Authority	Program	EPA Region	Certification ID	Expiration Date
California	State Program	9	2496	01-31-14

1

2

3

4

5

6

7

8

9

10

11

12

13

14

TestAmerica Pleasanton

Method Summary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Method	Method Description	Protocol	Laboratory
8260B/CA_LUFTM S	8260B / CA LUFT MS	SW846	TAL SF

Protocol References:

SW846 = "Test Methods For Evaluating Solid Waste, Physical/Chemical Methods", Third Edition, November 1986 And Its Updates.

Laboratory References:

TAL SF = TestAmerica Pleasanton, 1220 Quarry Lane, Pleasanton, CA 94566, TEL (925)484-1919

1

2

3

4

5

6

7

8

9

10

11

12

13

14

Sample Summary

Client: Stantec Consulting Corp.
Project/Site: Bohannon San Lorenzo

TestAmerica Job ID: 720-46042-1

Lab Sample ID	Client Sample ID	Matrix	Collected	Received
720-46042-1	TB-1	Water	11/15/12 08:00	11/16/12 12:22
720-46042-2	MW-7	Water	11/15/12 10:10	11/16/12 12:22
720-46042-3	MW-6	Water	11/15/12 10:50	11/16/12 12:22
720-46042-4	MW-5	Water	11/15/12 11:40	11/16/12 12:22
720-46042-5	MW-4	Water	11/15/12 12:20	11/16/12 12:22
720-46042-6	NOBS-B1	Water	11/15/12 13:00	11/16/12 12:22
720-46042-7	MW-2	Water	11/15/12 13:40	11/16/12 12:22
720-46042-8	MW-1	Water	11/15/12 14:20	11/16/12 12:22
720-46042-9	POBS-A1	Water	11/16/12 09:30	11/16/12 12:22
720-46042-10	POBS-B1	Water	11/16/12 10:20	11/16/12 12:22
720-46042-11	MW-3	Water	11/16/12 11:00	11/16/12 12:22
720-46042-12	POBS-B2	Water	11/16/12 11:40	11/16/12 12:22
720-46042-13	DUP	Water	11/16/12 00:00	11/16/12 12:22

TestAmerica Pleasanton



Stantec
Stantec Lafayette Office
57 Lafayette Circle, 2nd Floor
Lafayette, CA 94549
TEL:(925) 299-9300 FAX:(925)299-9302

720-46042

CHAIN OF CUSTODY RECORD

142332

11/26/2012

Stantec Company Contact(s) for Invoice: Project Manager: Mason Albrecht email: mason.albrcht@stantec.com		Stantec Project #		DATE: 11-16-12					
		185702534		PAGE: 1 OF 1					
Project Name: Bohannon Address: 575 Paseo Grande, San Lorenzo CA		Sampler(s) Printed Name: Charles Melancon Sampler(s) Signature: 		Laboratory: TestAmerica Lab Use Only: 					
Turn-around Time (Business Days): 10 DAYS <input checked="" type="checkbox"/> 5 DAYS <input type="checkbox"/> 72 HR <input type="checkbox"/> 48 HR <input type="checkbox"/> 24 HR <input type="checkbox"/> <24 HR <input type="checkbox"/> <input type="checkbox"/> OTHER		REQUESTED ANALYSIS							
Special Instructions or Notes: Temperature Upon Receipt (C): <input type="text"/>		 Temp 3.4°							
LAB USE ONLY	Field Sample Identification	SAMPLING		MAT- RIX	No. of Cont.	Pre- serve	Laboratory Notes		
		DATE	TIME						
		TB-1	11-15-12	800	W	2		HCL	X
		MW-7		1010		3			X
		MW-6		1050					X
		MW-5		1140					X
		MW-4		1220					X
		NOBS-B1		1300					X
		MW-2		1340					X
		MW-1	↓	1420					X
		POBS-A1	11-16-12	930					X
		POBS-B1		1020					X
		MW-3		1100					X
		POBS-B2		1140					X
		DUP	↓	—	↓	↓		↓	X
Relinquished by: (Signature) 		Date: 11-16-12	Time: 1222	Received by: (Signature) 		Time: 11-16-12			
Relinquished by: (Signature)		Date:	Time:	Received by: (Signature)		Time:			
Relinquished by: (Signature)		Date:	Time:	Received by: (Signature)		Time:			

Login Sample Receipt Checklist

Client: Stantec Consulting Corp.

Job Number: 720-46042-1

Login Number: 46042

List Source: TestAmerica Pleasanton

List Number: 1

Creator: Apostol, Anita

Question	Answer	Comment
Radioactivity wasn't checked or is </= background as measured by a survey meter.	N/A	
The cooler's custody seal, if present, is intact.	N/A	
Sample custody seals, if present, are intact.	N/A	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	True	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time.	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	N/A	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is <6mm (1/4").	True	
Multiphasic samples are not present.	True	
Samples do not require splitting or compositing.	True	
Residual Chlorine Checked.	N/A	

Stantec

**FOURTH QUARTER 2012
GROUNDWATER MONITORING REPORT
DAVID D. BOHANNON ORGANIZATION**

APPENDIX D

Chemical Concentration Trends in Groundwater

Fourth Quarter 2012 Groundwater Monitoring Report

David D. Bohannon Organization

575 Paseo Grande

San Lorenzo, California

Stantec PN: 185702534

February 19, 2013

