



2201 Broadway, Suite 101
Oakland, CA 94612-3023
Tel. 510.740.5800
Fax. 510.663.3315

September 9, 1999
Project 791810

Mr. Paul Supple
ARCO Products Company
PO Box 6549
Moraga, California 94570

Re: Quarterly Groundwater Monitoring Report, Second Quarter 1999, for ARCO Service Station No. 2162, located at 15135 Hesperian Boulevard, San Leandro, California

Dear Mr. Supple:

Pinnacle Environmental Solutions, a member of The IT Group (Pinnacle), is submitting the attached report which presents the results of the second quarter 1999 groundwater monitoring program at ARCO Products Company (ARCO) Service Station No. 2162, located at 15135 Hesperian Boulevard, San Leandro, California. The monitoring program complies with the Alameda County Health Care Services Agency (ACHCSA) requirements regarding underground tank investigations.

LIMITATIONS

No monitoring event is thorough enough to describe all geologic and hydrogeologic conditions of interest at a given site. If conditions have not been identified during the monitoring event, results should not be construed as a guarantee of the absence of such conditions at the site, but rather as the product of the scope and limitations of work performed during the monitoring event.

Please call if you have questions.

Sincerely,

Pinnacle

Glen VanderVeen
Project Manager

Dan Easter, R.G.
Project Geologist

Attachment: Quarterly Groundwater Monitoring Report, Second Quarter 1999

cc: Mr. John Jang, Regional Water Quality Control Board - S.F. Bay Region
Mr. Mike Bakaldin, City of San Leandro Fire Department, Hazardous Materials Division
Mr. Scott Seery, Alameda County Health Care Services Agency

ENVIRONMENTAL
PROTECTION
99 SEP 10 PM 3:13

ARCO QUARTERLY GROUNDWATER MONITORING REPORT

Facility No.: 2162 Address: 15135 Hesperian Boulevard, San Leandro, California
ARCO Environmental Engineer: Paul Supple
Consulting Co./Contact Person: Pinnacle Environmental Solutions/Glen VanderVeen
Consultant Project No.: 791810
Primary Agency/Regulatory ID No.: ACHCSA

WORK PERFORMED THIS QUARTER (SECOND - 1999):

1. Prepared and submitted quarterly groundwater monitoring report for first quarter 1999.
2. Performed quarterly groundwater monitoring and sampling for second quarter 1999.

WORK PROPOSED FOR NEXT QUARTER (THIRD - 1999):

1. Prepare and submit quarterly groundwater monitoring report for second quarter 1999.
2. Perform quarterly groundwater monitoring and sampling for third quarter 1999.

QUARTERLY MONITORING:

Current Phase of Project: Monitoring
Frequency of Groundwater Sampling: Quarterly: MW-1 through MW-4
Frequency of Groundwater Monitoring: Quarterly
Is Free Product (FP) Present On-Site: No
FP Recovered this Quarter: None
Cumulative FP Recovered to Date: None
Bulk Soil Removed This Quarter: None
Bulk Soil Removed to Date: None
Current Remediation Techniques: Natural Attenuation
Approximate Depth to Groundwater: 8.2 feet
Groundwater Flow Direction and Gradient
(Average): 0.02 ft/ft toward Southwest

DISCUSSION:

- Please refer to the Fourth Quarter 1996 Groundwater Monitoring Report for historical groundwater elevation and analytical data.

ATTACHMENTS:

- Table 1 - Groundwater Elevation and Analytical Data
- Table 2 - Groundwater Flow Direction and Gradient
- Figure 1 - Groundwater Analytical Summary Map
- Figure 2 - Groundwater Elevation Contour Map
- Appendix A - Sampling and Analysis Procedures
- Appendix B - Certified Analytical Reports and Chain-of-Custody Documentation
- Appendix C - Field Data Sheets

Table 1
Groundwater Elevation and Analytical Data
Total Purgeable Petroleum Hydrocarbons
(TPPH as Gasoline, BTEX Compounds, and MTBE)

ARCO Service Station 2162
15135 Hesperian Boulevard, San Leandro, California

Well Number	Date Gauged/ Sampled	Well Elevation (feet, MSL)	Depth to Water (feet, TOC)	Groundwater Elevation (feet, MSL)	TPPH as Gasoline (ppb)	Benzene (ppb)	Toluene (ppb)	Ethyl- benzene (ppb)	Xylenes (ppb)	MTBE 8020 (ppb)	MTBE 8260 (ppb)	Dissolved Oxygen (ppm)	Purged/ Not Purged (P/NP)	
MW-1	02/26/96	31.19	7.14	24.05	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA		
	05/23/96		7.70	23.49	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA		
	08/21/96		8.75	22.44	210	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA		
	11/20/96		8.62	22.57	91	<0.5	<0.5	<0.5	<0.5	2.6	NA	NA		
	04/01/97		8.70	22.49	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NP	
	06/10/97		8.45	22.74	94	<0.5	<0.5	<0.5	0.68	0.56	6.4	NA	NA	NP
	09/17/97		9.20	21.99	<50	<0.5	<0.5	<0.5	<0.5	<0.5	10	NA	1.0	NP
	12/12/97		8.00	23.19	<200	<2.0	<2.0	<2.0	<2.0	<2.0	180	NA	2.0	NP
	03/25/98		7.00	24.19	<200	<2	<2	<2	3	<2	180	NA	2.0	
	05/14/98		7.46	23.73	<50	<0.5	<0.5	<0.5	<0.5	<0.5	<3	NA	1.17	P
	07/31/98		8.10	23.09	<50	<0.5	<0.5	<0.5	<0.5	<0.5	<3	NA	2.0	NP
	10/12/98		8.60	22.59	<50	<0.5	<0.5	<0.5	<0.5	<0.5	9	NA	2.5	NP
	02/11/99		7.32	23.87	<50	<0.5	<0.5	<0.5	<0.5	<0.5	25	NA	1.0	P
	06/23/99		8.40	22.79	55	<0.5	<0.5	<0.5	<0.5	<0.5	<3	NA	1.36	NP
MW-2	02/26/96	30.38	6.41	23.97	770	<0.5	<0.5	45	28	NA	NA	NA		
	05/23/96		6.80	23.58	590	0.50	<0.5	35	18	NA	NA	NA		
	08/21/96		7.80	22.58	170	<0.5	<0.5	21	6.3	<2.5	NA	NA		
	11/20/96		7.73	22.65	88	<0.5	<0.5	7.9	1.1	<2.5	NA	NA		
	04/01/97		7.83	22.55	66	<0.5	<0.5	3.6	0.56	33	NA	NA		
	06/10/97		7.52	22.86	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NP	
	09/17/97		8.24	22.14	<50	<0.5	<0.5	<0.5	<0.5	<3.0	NA	0.6	NP	
	12/12/97		7.10	23.28	<50	<0.5	<0.5	<0.5	<0.5	<3.0	NA	1.2	NP	
	03/25/98		6.27	24.11	<50	<0.5	<0.5	0.7	0.5	55	NA	1.0		
	05/14/98		6.54	23.84	210	<0.5	<0.5	3.3	<0.5	42	NA	1.47	P	
	07/31/98		7.14	23.24	230	<0.5	<0.5	3.9	<0.5	6	NA	1.0	P	
	10/12/98		7.65	22.73	110	<0.5	<0.5	1.5	<0.5	<3	NA	1.0	P	
	02/11/99		6.55	23.83	660	<0.5	<0.5	6.7	0.7	3	NA	1.0	P	
	06/23/99		7.48	22.90	270	<0.5	<0.5	2.2	0.8	<3	NA	NM	P	

Table 1
Groundwater Elevation and Analytical Data
Total Purgeable Petroleum Hydrocarbons
(TPPH as Gasoline, BTEX Compounds, and MTBE)

ARCO Service Station 2162
15135 Hesperian Boulevard, San Leandro, California

Well Number	Date Gauged/ Sampled	Well Elevation (feet, MSL)	Depth to Water (feet, TOC)	Groundwater Elevation (feet, MSL)	TPPH as Gasoline (ppb)	Benzene (ppb)	Toluene (ppb)	Ethyl- benzene (ppb)	Xylenes (ppb)	MTBE 8020 (ppb)	MTBE 8260 (ppb)	Dissolved Oxygen (ppm)	Purged/ Not Purged (P/NP)
MW-3	02/26/96	30.30	6.72	23.58	120	5.0	<0.5	<0.5	<0.5	NA	NA	NA	
	05/23/96		7.18	23.12	140	12	<0.5	<0.5	<0.5	NA	NA	NA	
	08/21/96		8.17	22.13	<50	1.1	<0.5	<0.5	<0.5	130	NA	NA	
	11/20/96		8.03	22.27	55	<0.5	<0.5	<0.5	<0.5	59	NA	NA	
	04/01/97		8.09	22.21	<50	<0.5	<0.5	<0.5	<0.5	180	NA	NA	NP
	06/10/97		7.97	22.33	<50	<0.5	<0.5	<0.5	<0.5	1,900	NA	NA	NP
	09/17/97		8.54	21.76	<5,000	<50	<50	<50	<50	1,100	860	2.2	NP
	12/12/97		7.50	22.80	560	<5.0	<5.0	<5.0	5.0	370	NA	1.4	NP
	03/25/98		6.60	23.70	<500	<5	<5	<5	<5	470	NA	1.0	
	05/14/98		7.13	23.17	750	<5	<5	<5	<5	630	NA	1.97	P
	07/31/98		7.58	22.72	<500	<5	<5	<5	<5	590	NA	1.0	P
	10/12/98		8.00	22.30	<500	<5	<5	<5	<5	600	NA	2.0	P
	02/11/99		6.90	23.40	<500	<5	<5	<5	<5	280	NA	1.0	P
	06/23/99		7.82	22.48	220	<0.5	3.2	<0.5	<0.5	740	NA	1.98	P
MW-4	02/26/96	30.39	7.59	22.80	110	9.9	<0.5	<0.5	<0.5	NA	NA	NA	
	05/23/96		8.22	22.17	69	8.0	<0.5	<0.5	<0.5	NA	NA	NA	
	08/21/96		9.28	21.11	<50	6.8	<0.5	<0.5	<0.5	<2.5	NA	NA	
	11/20/96		9.12	21.27	95	10	0.59	<0.5	0.52	3.8	NA	NA	
	04/01/97		8.45	21.94	73	5.7	<0.5	<0.5	<0.5	<2.5	NA	NA	
	06/10/97		9.00	21.39	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NP
	09/17/97		9.76	20.63	<50	3.2	<0.5	<0.5	<0.5	8.0	NA	0.2	NP
	12/12/97		8.45	21.94	<50	2.9	<0.5	<0.5	<0.5	14	NA	1.0	NP
	03/25/98		7.52	22.87	58	2.8	<0.5	<0.5	<0.5	<3	NA	3.0	
	05/14/98		8.03	22.36	<50	<0.5	<0.5	<0.5	<0.5	<3	NA	3.24	NP
	07/31/98		8.67	21.72	<50	<0.5	<0.5	<0.5	<0.5	<3	NA	2.0	NP
	10/12/98		9.15	21.24	<50	<0.5	<0.5	<0.5	<0.5	4	NA	1.5	NP
	02/11/99		7.80	22.59	61	2.5	<0.5	<0.5	<0.5	6	NA	1.0	P
	06/23/99		9.00	21.39	<50	<0.5	<0.5	<0.5	<0.5	<3	NA	1.42	NP

Table 1
Groundwater Elevation and Analytical Data
Total Purgeable Petroleum Hydrocarbons
(TPPH as Gasoline, BTEX Compounds, and MTBE)


ARCO Service Station 2162
15135 Hesperian Boulevard, San Leandro, California

Well Number	Date Gauged/ Sampled	Well Elevation (feet, MSL)	Depth to Water (feet, TOC)	Groundwater Elevation (feet, MSL)	TPPH as Gasoline (ppb)	Benzene (ppb)	Toluene (ppb)	Ethyl- benzene (ppb)	Xylenes (ppb)	MTBE 8020 (ppb)	MTBE 8260 (ppb)	Dissolved Oxygen (ppm)	Purged/ Not Purged (P/NP)
TPPH = Total purgeable petroleum hydrocarbons by modified EPA method 8015 BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA method 8020 MTBE = Methyl tert -Butyl Ether MSL = Mean sea level TOC = Top of casing ppb = Parts per billion ppm = Parts per million NA = Not analyzed NM = Not measured < = Denotes concentration not present above laboratory detection limited stated to the right													

Table 2
Groundwater Flow Direction and Gradient

ARCO Service Station 2162
15135 Hesperian Boulevard, San Leandro, California

Date Measured	Average Flow Direction	Average Hydraulic Gradient
02/26/96	Southwest	0.009
05/23/96	South-Southwest	0.010
08/21/96	South-Southwest	0.01
11/20/96	South-Southwest	0.011
04/01/97	South-Southwest	0.004
06/10/97	South-Southwest	0.010
09/17/97	South-Southwest	0.01
12/12/97	Southwest	0.01
03/25/98	South-Southwest	0.008
05/14/98	Southwest	0.01
07/31/98	Southwest	0.01
10/12/98	Southwest	0.01
02/11/99	Southwest	0.008
06/23/99	Southwest	0.02

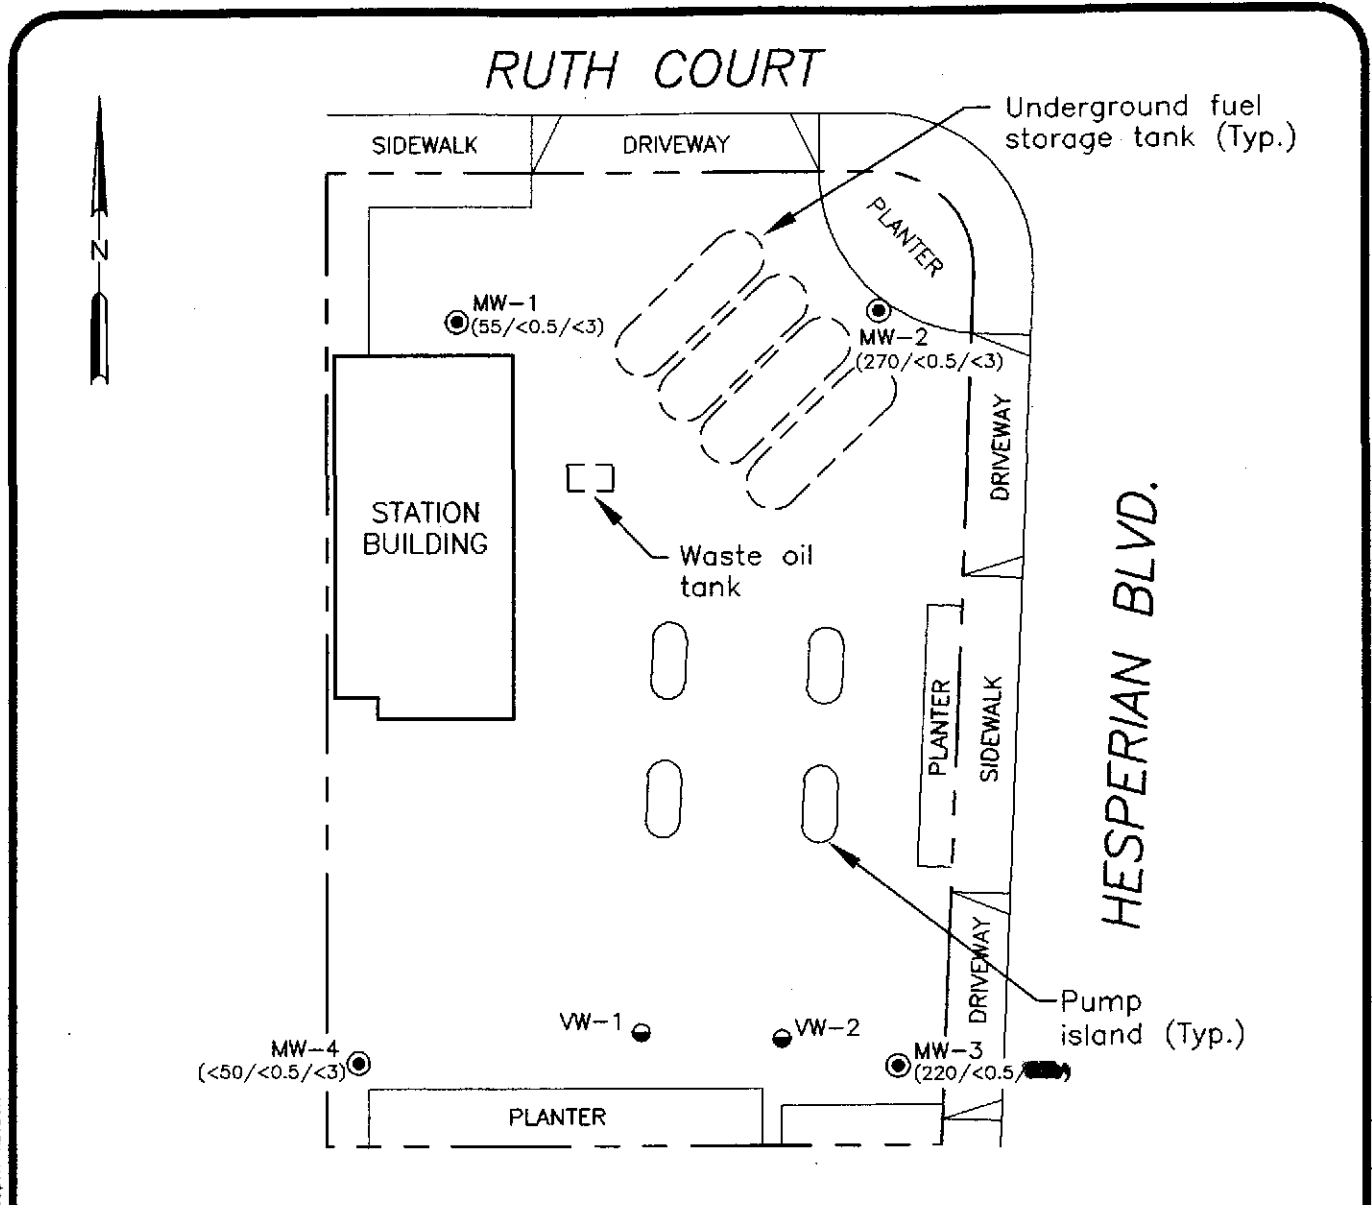

EXPLANATION

- Groundwater monitoring well
- Vadose zone monitoring well

(220/<0.5/740) Concentration of total petroleum hydrocarbons as gasoline (TPHG), benzene, and ~~toluene~~ in groundwater (ug/L); samples collected 6/23/99

< Not detected at or above the indicated laboratory detection limit





IMAGE Files: <No Images>
 XREF Files: <No Xrefs>
 Dimstyle: 30 Ltscale: 30 Pltstyle: 1
 SANJOSE/CADD: N:\DWG\PINACL\2162\CHEM.DWG Fri, 06/Aug/99 12:28pm kblack

Pinnacle
 ENVIRONMENTAL SOLUTIONS
 A MEMBER OF THE IT GROUP

DATE AUG. 1999
 DWN KAB
 APP _____
 REV 0
 PROJECT NO. 791810

FIGURE 1
 ARCO PRODUCTS COMPANY
 SERVICE STATION 2162, 15135 HESPERIAN BLVD.
 SAN LEANDRO, CALIFORNIA
GROUNDWATER ANALYTICAL SUMMARY
SECOND QUARTER 1999

RUTH COURT

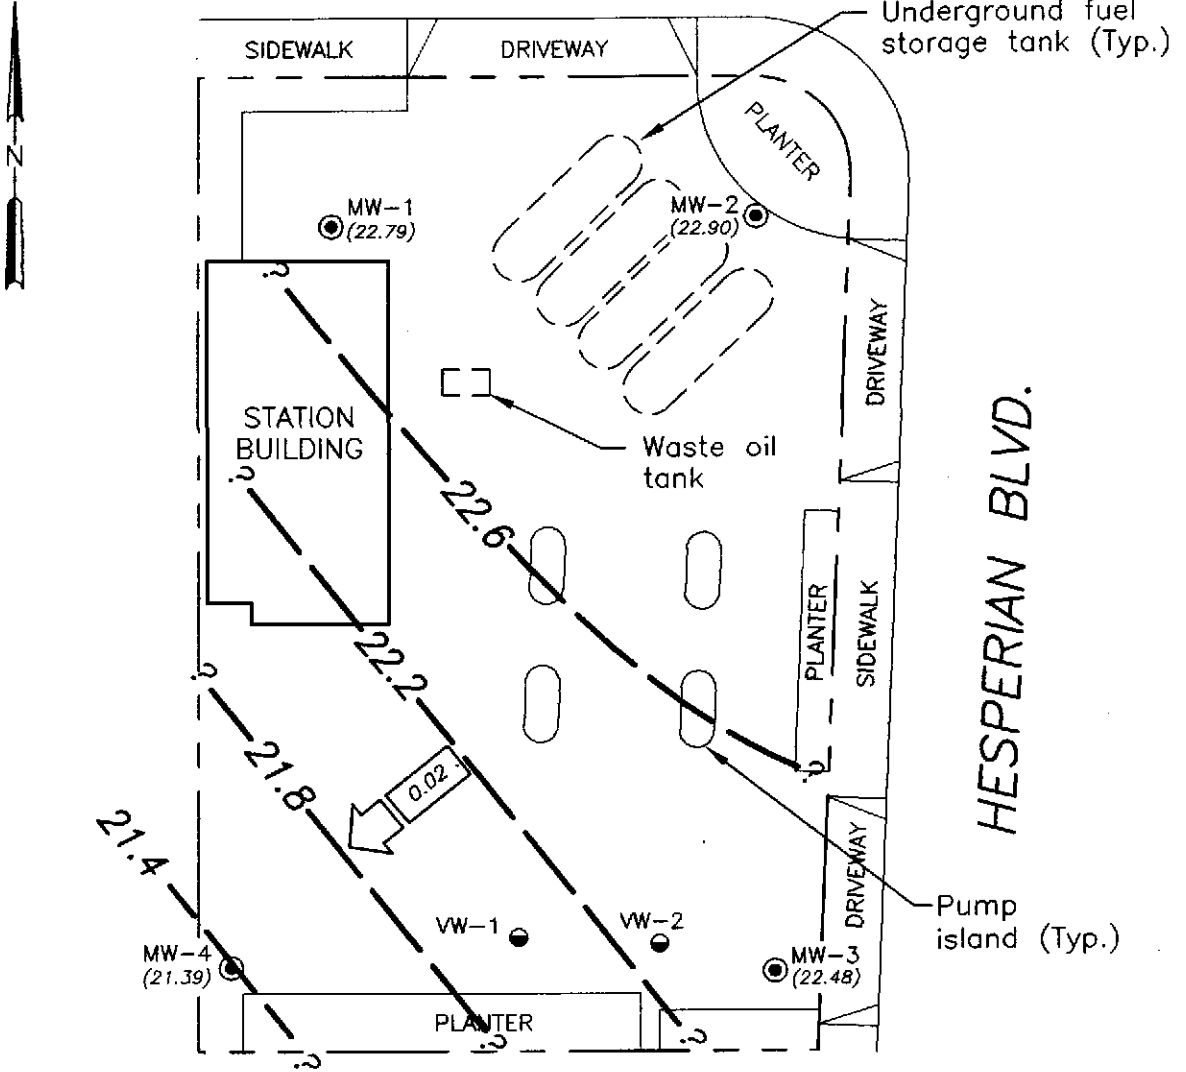

EXPLANATION

● Groundwater monitoring well

● Vadose zone monitoring well

(21.39) Groundwater elevation (Ft.-MSL);
measured 6/23/99

--- Groundwater elevation contour (Ft.-MSL)

← Approximate direction of groundwater
flow showing gradient





IMAGE Files: <No Images>
XREF Files: <No Xrefs>
Dimscale: 30 Ltscale: 30 Psttscale: 1
SANJOSE/CADD: N:\DWG\PINACL\2162\2162GWC.DWG Tue, 24/Aug/99 10:10am kblack

Pinnacle

ENVIRONMENTAL SOLUTIONS
A MEMBER OF THE IT GROUP

DATE AUG. 1999
DWN KAB
APP
REV 0
PROJECT NO.
791810

FIGURE 2
ARCO PRODUCTS COMPANY
SERVICE STATION 2162, 15135 HESPERIAN BLVD.
SAN LEANDRO, CALIFORNIA
**GROUNDWATER ELEVATION CONTOURS
SECOND QUARTER 1999**

APPENDIX A

SAMPLING AND ANALYSIS PROCEDURES

The sampling and analysis procedures for water quality monitoring programs are contained in this appendix. The procedures provided for consistent and reproducible sampling methods, proper application of analytical methods, and accurate and precise analytical results. Finally, these procedures provided guidelines so that the overall objectives of the monitoring program were achieved.

The following documents have been used as guidelines for developing these procedures:

- Procedures Manual for Groundwater Monitoring at Solid Waste Disposal Facilities, Environmental Protection Agency (EPA)-530/SW-611, August 1977
- Resource Conservation and Recovery Act (RCRA) Groundwater Monitoring Technical Enforcement Guidance Document, Office of Solid Waste and Emergency Response (OSWER) 9950.1, September 1986
- Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, EPA SW-846, 3rd edition, November 1986
- Methods for Organic Chemical Analysis of Municipal and Industrial Waste Water, EPA-600/4-82-057, July 1982
- Methods for Organic Chemical Analysis of Water and Wastes, EPA-600/4-79-020, revised March 1983
- Leaking Underground Fuel Tank (LUFT) Field Manual, California State Water Resources Control Board, revised October 1989

Sample Collection

Sample collection procedures include equipment cleaning, water level and total well depth measurements, and well purging and sampling.

Equipment Cleaning

Before the sampling event was started, equipment that was used to sample groundwater was disassembled and cleaned with detergent water and then rinsed with deionized water. During field sampling, equipment surfaces that were placed in the well or came into contact with groundwater during field sampling were steam cleaned with deionized water before the next well was purged or sampled.

Water Level, Floating Hydrocarbon, and Total Well Depth Measurements

Before purging and sampling occurred, the depth to water, floating hydrocarbon thickness, and total well depth were measured using an oil/water interface measuring system. The oil/water interface measuring system consists of a probe that emits a continuous audible tone when immersed in a nonconductive fluid, such as oil or gasoline, and an intermittent tone when immersed in a conductive fluid, such as water. The floating hydrocarbon thickness and water level were measured by lowering the probe into the well. Liquid levels were recorded relative to the tone emitted at the groundwater surface. The sonic probe was decontaminated by being rinsed with deionized water or steam cleaned after each use. A bottom-filling, clear Teflon[®] bailer was used to verify floating hydrocarbon thickness measurements of less than 0.02 foot. Alternatively, an electric sounder and a bottom-filling Teflon bailer may have been used to record floating hydrocarbon thickness and depth to water.

The electric sounder is a transistorized instrument that uses a reel-mounted, two-conductor, coaxial cable that connects the control panel to the sensor. Cable markings are stamped at 1-foot intervals. The water level was measured by lowering the sensor into the monitoring well. A low-current circuit was completed when the sensor contacted the water, which served as an electrolyte. The current was amplified and fed into an indicator light and audible buzzer, signaling when water had been contacted. A sensitivity control compensated for highly saline or conductive water. The electric sounder was decontaminated by being rinsed with deionized water after each use. The bailer was lowered to a point just below the liquid level, retrieved, and observed for floating hydrocarbon.

Liquid measurements were recorded to the nearest 0.01 foot on the depth to water/floating product survey form. The groundwater elevation at each monitoring well was calculated by subtracting the measured depth to water from the surveyed elevation of the top of the well casing. (Every attempt was made to measure depth to water for all wells on the same day.) Total well depth was then measured by lowering the sensor to the bottom of the well. Total well depth, used to calculate purge volumes and to determine whether the well screen was partially obstructed by silt, was recorded to the nearest 0.1 foot on the depth to water/floating product survey form.

Well Purging

If the depth to groundwater was above the top of screens of the monitoring wells, then the wells were purged. Before sampling occurred, a polyvinyl chloride (PVC) bailer, centrifugal pump, low-flow submersible pump, or Teflon bailer was used to purge standing water in the casing and gravel pack from the monitoring well. Monitoring wells were purged according to the protocol presented in Figure A-1. In most monitoring wells, the amount of water purged before sampling was greater than or equal to three casing volumes. Some monitoring wells were expected to be evacuated to dryness after removing fewer than three casing volumes. These low-yield monitoring wells were allowed to recharge for up to 24 hours. Samples were obtained as soon as the monitoring wells recharged to a level sufficient for sample collection. If insufficient water recharged after 24 hours, the monitoring well was recorded as dry for the sampling event.

Groundwater purged from the monitoring wells was transported in a 500-gallon water trailer, 55-gallon drum, or a 325-gallon truck-mounted tank to IT's San Jose or Sacramento office location for temporary storage. IT arranged for transport and disposal of the purged groundwater through Integrated Waste Stream Management, Inc.

Field measurements of pH, specific conductance, and temperature were recorded in a waterproof field logbook. Figure A-2 shows an example of the water sample field data sheet on which field data are recorded. Field data sheets were reviewed for completeness by the sampling coordinator after the sampling event was completed.

The pH, specific conductance, and temperature meter were calibrated each day before field activities were begun. The calibration was checked once each day to verify meter performance. Field meter calibrations were recorded on the water sample field data sheet.

Well Sampling

A Teflon bailer was the only equipment acceptable for well sampling. When samples for volatile organic analysis were being collected, the flow of groundwater from the bailer was regulated to minimize turbulence and aeration. Glass bottles of at least 40-milliliters volume and fitted with Teflon-lined septa were used in sampling for volatile organics. These bottles were filled completely to prevent air from remaining in the bottle. A positive meniscus formed when the bottle was completely full. A convex Teflon septum was placed over the positive meniscus to eliminate air. After the bottle was capped, it was inverted and tapped to verify that it contained no air bubbles. The sample containers for other parameters were filled, filtered as required, and capped.

When required, dissolved concentrations of metals were determined using appropriate field filtration techniques. The sample was filtered by emptying the contents of the Teflon bailer into a pressure transfer vessel. A disposable 0.45-micron acrylic copolymer filter was threaded onto the transfer vessel at the discharge point, and the vessel was sealed. Pressure was applied to the vessel with a hand pump and the filtrate directed into the appropriate containers. Each filter was used once and discarded.

Sample Preservation and Handling

The following section specifies sample containers, preservation methods, and sample handling procedures.

Sample Containers and Preservation

Sample containers vary with each type of analytical parameter. Container types and materials were selected to be nonreactive with the particular analytical parameter tested.

Sample Handling

Sample containers were labeled immediately prior to sample collection. Samples were kept cool with cold packs until received by the laboratory. At the time of sampling, each sample was logged on an ARCO chain-of-custody record that accompanied the sample to the laboratory.

Samples that required overnight storage prior to shipping to the laboratory were kept cool (4° C) in a refrigerator. The refrigerator was kept in a warehouse, which was locked when not occupied by an IT employee. A sample/refrigerator log was kept to record the date and time that samples were placed into and removed from the refrigerator.

Samples were transferred from IT to an ARCO-approved laboratory by courier or taken directly to the laboratory by the environmental sampler. Sample shipments from IT to laboratories performing the selected analyses routinely occurred within 24 hours of sample collection.

Sample Documentation

The following procedures were used during sampling and analysis to provide chain-of-custody control during sample handling from collection through storage. Sample documentation included the use of the following:

- Water sample field data sheets to document sampling activities in the field
- Labels to identify individual samples
- Chain-of-custody record sheets for documenting possession and transfer of samples
- Laboratory analysis request sheets for documenting analyses to be performed

Field Logbook

In the field, the sampler recorded the following information on the water sample field data sheet (see Figure A-2) for each sample collected:

- Project number
- Client's name
- Location
- Name of sampler
- Date and time
- Well accessibility and integrity
- Pertinent well data (e.g., casing diameter, depth to water, well depth)
- Calculated and actual purge volumes
- Purging equipment used
- Sampling equipment used
- Appearance of each sample (e.g., color, turbidity, sediment)
- Results of field analyses (temperature, pH, specific conductance)
- General comments

The water sample field data sheet was signed by the sampler and reviewed by the sampling coordinator.

Labels

Sample labels contained the following information:

- Project number
- Sample number (i.e., well designation)
- Sample depth
- Sampler's initials
- Date and time of collection
- Type of preservation used (if any)

Sampling and Analysis Chain-of-Custody Record

The ARCO chain-of-custody record initiated at the time of sampling contained, at a minimum, the sample designation (including the depth at which the sample was collected), sample type, analytical request, date of sampling, and the name of the sampler. The record sheet was signed, timed, and dated by the sampler when transferring the samples. The number of custodians in the chain of possession was minimized. A copy of the ARCO chain-of-custody record was returned to IT with the analytical results.

Groundwater Sampling and Analysis Request Form

A groundwater sampling and analysis request form (see Figure A-3) was used to communicate to the environmental sampler the requirements of the monitoring event. At a minimum, the groundwater sampling and analysis request form included the following information:

- Date scheduled
- Site-specific instructions
- Specific analytical parameters
- Well number
- Well specifications (expected total depth, depth of water, and product thickness)



OWT

MONITORING WELL PURGING PROTOCOL

MEASURE AND RECORD DEPTH TO WATER AND WELL TOTAL DEPTH

CHECK FOR FLOATING PRODUCT

YES

MEASURE AND DOCUMENT FLOATING PRODUCT THICKNESS. DO NOT SAMPLE WELL FOR DISSOLVED CONSTITUENTS.

NO

CALCULATE PURGE VOLUME BY USING THE FOLLOWING EQUATION:

$$P = \pi r^2 h \times 7.48 \times 3$$

where:

P = calculated purge volume (gallons)

$\pi = 3.14$

r = radius of well casing in feet

h = height of water column in feet

WELL EVACUATED TO PRACTICAL LIMITS OF DRYNESS BEFORE REMOVING CALCULATED PURGE VOLUME

EVACUATE WATER FROM WELL EQUAL TO THE CALCULATED PURGE VOLUME WHILE MONITORING GROUNDWATER STABILIZATION INDICATOR PARAMETERS (pH, CONDUCTIVITY, TEMPERATURE) AT INTERVALS OF ONE CASING VOLUME.

NO

YES

FINAL TWO SETS OF GROUNDWATER STABILIZATION INDICATOR PARAMETER MEASUREMENTS MEET THE FOLLOWING CRITERIA:

- pH = ± 0.1 pH units
- COND. = $\pm 10\%$
- TEMP. = ± 1.0 °F

WELL RECHARGES TO A LEVEL SUFFICIENT FOR SAMPLE COLLECTION WITHIN 24 HOURS OF EVACUATION TO DRYNESS.

YES

NO

YES

NO

WELL PURGING CRITERIA MET; PROCEED TO WELL SAMPLING.

CONTINUE PURGING; EVACUATE ADDITIONAL CASING VOLUME OF WATER, MONITORING INDICATOR PARAMETERS FOR STABILITY.

FIELD TEST FIRST RECHARGE WATER FOR INDICATOR PARAMETERS, THEN PROCEED TO WELL SAMPLING.

RECORD WELL AS DRY FOR PURPOSES OF SAMPLING.



EMCON

MONITORING WELL PURGING PROTOCOL

FIGURE

A-1

WATER SAMPLE FIELD DATA SHEET

Rev. 5/96



OWT

PROJECT NO: _____
 PURGED BY: _____
 SAMPLED BY: _____

SAMPLE ID: _____
 CLIENT NAME: _____
 LOCATION: _____

TYPE: Groundwater _____ Surface Water _____ Leachate _____ Other _____
 CASING DIAMETER (inches): 2 _____ 3 _____ 4 _____ 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL): _____ VOLUME IN CASING (gal.): _____
 DEPTH OF WELL (feet): _____ CALCULATED PURGE (gal.): _____
 DEPTH OF WATER (feet): _____ ACTUAL PURGE VOL. (gal.): _____

DATE PURGED: _____ END PURGE: _____
 DATE SAMPLED: _____ SAMPLING TIME: _____

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	TURBIDITY (visual/NTU)	TIME (2400 HR)

OTHER: _____ ODOR: _____
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): _____

<p style="text-align: center;"><u>PURGING EQUIPMENT</u></p> <p>_____ 2" Bladder Pump _____ Bailer (Teflon) _____ Centrifugal Pump _____ Bailer (PVC) _____ Submersible Pump _____ Bailer (Stainless Steel) _____ Well Wizard™ _____ Dedicated Other: _____</p>	<p style="text-align: center;"><u>SAMPLING EQUIPMENT</u></p> <p>_____ 2" Bladder Pump _____ Bailer (Teflon) _____ Bomb Sampler _____ Bailer (Stainless Steel) _____ Dipper _____ Submersible Pump _____ Well Wizard™ _____ Dedicated Other: _____</p>
--	---

WELL INTEGRITY: _____ LOCK: _____

REMARKS: _____

pH, E.C., Temp. Meter Calibration: Date: _____ Time: _____ Meter Serial No.: _____
 E.C. 1000 _____ / _____ pH 7 _____ / _____ pH 10 _____ / _____ pH 4 _____ / _____

Temperature °F _____
 SIGNATURE: _____ REVIEWED BY: _____ PAGE _____ OF _____



OWT

**EMCON - SACRAMENTO
GROUNDWATER SAMPLING AND ANALYSIS REQUEST FORM**

PROJECT NAME :

SCHEDULED DATE :

SPECIAL INSTRUCTIONS / CONSIDERATIONS :

Project Authorization: _____
EMCON Project No.: _____
OWT Project No.: _____
Task Code: _____
Originals To: _____
cc: _____

Well Lock Number (s)

CHECK BOX TO AUTHORIZE DATA ENTRY

Site Contact: _____
Name Phone #

Well Number or Source	Casing Diameter (inches)	Casing Length (feet)	Depth to Water (feet)	ANAYSES REQUESTED

Laboratory and Lab QC Instructions:



EMCON

SAMPLING AND ANALYSIS REQUEST FORM

FIGURE

A-3



July 7, 1999

Service Request No.: S9901923

Mr. Glen Vanderveen
EMCON-Pinnacle
2201 Broadway, Suite 101
Oakland, CA 94612

RE: TO#24118.00/RAT8/2162 SAN LEANDRO

Dear Mr. Vanderveen:

Enclosed are the results of the sample(s) submitted to our laboratory on June 24, 1999. All analyses were performed in accordance with our laboratory's quality assurance program. Results are intended to be considered in their entirety and apply to the sample(s) analyzed. Columbia Analytical Services is not responsible for use of less than the complete report. Signature of this CAS Analytical Report confirms that pages 2 through 12, following, have been thoroughly reviewed and approved for release.

Columbia Analytical Services is certified for environmental analyses by the California Department of Health Services (certificate number: 1496, expiration: January 31, 2001).


If you have any question, please call me at (408) 748-9700.

Respectfully submitted,

Columbia Analytical Services, Inc.

Bernadette Troncales
Project Chemist

Greg Jordan
Laboratory Director



COLUMBIA ANALYTICAL SERVICES, Inc.

Acronyms

A2LA	American Association for Laboratory Accreditation
ASTM	American Society for Testing and Materials
BOD	Biochemical Oxygen Demand
BTEX	Benzene, Toluene, Ethylbenzene, Xylenes
CAM	California Assessment Metals
CARB	California Air Resources Board
CAS Number	Chemical Abstract Service registry Number
CFC	Chlorofluorocarbon
CFU	Colony-Forming Unit
COD	Chemical Oxygen Demand
DEC	Department of Environmental Conservation
DEQ	Department of Environmental Quality
DHS	Department of Health Services
DLCS	Duplicate Laboratory Control Sample
DMS	Duplicate Matrix Spike
DOE	Department of Ecology
DOH	Department of Health
EPA	U. S. Environmental Protection Agency
ELAP	Environmental Laboratory Accreditation Program
GC	Gas Chromatography
GC/MS	Gas Chromatography/Mass Spectrometry
IC	Ion Chromatography
ICB	Initial Calibration Blank sample
ICP	Inductively Coupled Plasma atomic emission spectrometry
ICV	Initial Calibration Verification sample
J	Estimated concentration. The value is less than the MRL, but greater than or equal to the MDL. If the value is equal to the MRL, the result is actually <MRL before rounding.
LCS	Laboratory Control Sample
LUFT	Leaking Underground Fuel Tank
M	Modified
MBAS	Methylene Blue Active Substances
MCL	Maximum Contaminant Level. The highest permissible concentration of a substance allowed in drinking water as established by the U. S. EPA.
MDL	Method Detection Limit
MPN	Most Probable Number
MRL	Method Reporting Limit
MS	Matrix Spike
MTBE	Methyl tert-Butyl Ether
NA	Not Applicable
NAN	Not Analyzed
NC	Not Calculated
NCASI	National Council of the paper industry for Air and Stream Improvement
ND	Not Detected at or above the method reporting/detection limit (MRL/MDL)
NIOSH	National Institute for Occupational Safety and Health
NTU	Nephelometric Turbidity Units
ppb	Parts Per Billion
ppm	Parts Per Million
PQL	Practical Quantitation Limit
QA/QC	Quality Assurance/Quality Control
RCRA	Resource Conservation and Recovery Act
RPD	Relative Percent Difference
SIM	Selected Ion Monitoring
SM	Standard Methods for the Examination of Water and Wastewater, 18th Ed., 1992
STLC	Solubility Threshold Limit Concentration
SW	Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, SW-846, 3rd Ed., 1986 and as amended by Updates I, II, IIA, and IIB.
TCLP	Toxicity Characteristic Leaching Procedure
TDS	Total Dissolved Solids
TPH	Total Petroleum Hydrocarbons
tr	Trace level. The concentration of an analyte that is less than the PQL but greater than or equal to the MDL. If the value is equal to the PQL, the result is actually <PQL before rounding.
TRPH	Total Recoverable Petroleum Hydrocarbons
TSS	Total Suspended Solids
TTLC	Total Threshold Limit Concentration
VOA	Volatile Organic Analyte(s)

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT8/2162 SAN LEANDRO
Sample Matrix: Water

Service Request: S9901923
Date Collected: 6/23/99
Date Received: 6/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-3(14)
Lab Code: S9901923-001
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/28/99	220	
Benzene	EPA 5030	8020	0.5	1	NA	6/28/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/28/99	3.2	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/28/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/28/99	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	3	10	NA	6/29/99	740	

Approved By: _____

PT

Date: _____

07/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT8/2162 SAN LEANDRO
Sample Matrix: Water

Service Request: S9901923
Date Collected: 6/23/99
Date Received: 6/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-4(10)
Lab Code: S9901923-002
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/28/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/28/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/28/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/28/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/28/99	ND	
Methyl tert-Butyl Ether	EPA 5030	8020	3	1	NA	6/28/99	ND	

Approved By: _____

per

Date: _____

07/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
 Project: TO#24118.00/RAT8/2162 SAN LEANDRO
 Sample Matrix: Water

Service Request: S9901923
 Date Collected: 6/23/99
 Date Received: 6/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-1(9)
 Lab Code: S9901923-003
 Test Notes:

Units: ug/L (ppb)
 Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/30/99	55	
Benzene	EPA 5030	8020	0.5	1	NA	6/30/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/30/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/30/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/30/99	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	3	1	NA	6/30/99	ND	

Approved By: _____

Handwritten signature

Date: _____

07/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
 Project: TO#24118.00/RAT8/2162 SAN LEANDRO
 Sample Matrix: Water

Service Request: S9901923
 Date Collected: 6/23/99
 Date Received: 6/24/99

BTEX, MTBE and TPH as Gasoline

Sample Name: MW-2(15)
 Lab Code: S9901923-004
 Test Notes:

Units: ug/L (ppb)
 Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/30/99	270	
Benzene	EPA 5030	8020	0.5	1	NA	6/30/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/30/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/30/99	2.2	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/30/99	0.8	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/30/99	ND	

Approved By: _____

BS

Date: _____

07/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
Project: TO#24118.00/RAT8/2162 SAN LEANDRO
Sample Matrix: Water

Service Request: S9901923
Date Collected: NA
Date Received: NA

BTEX, MTBE and TPH as Gasoline

Sample Name: Method Blank
Lab Code: S990627-WB1 GC1
Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/27/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/27/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/27/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/27/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/27/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/27/99	ND	

Approved By: _____

BT

Date: _____

07/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

Analytical Report

Client: ARCO Products Company
 Project: TO#24118.00/RAT8/2162 SAN LEANDRO
 Sample Matrix: Water

Service Request: S9901923
 Date Collected: NA
 Date Received: NA

BTEX, MTBE and TPH as Gasoline

Sample Name: Method Blank
 Lab Code: S990629-WB1
 Test Notes:

Units: ug/L (ppb)
 Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	6/29/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	6/29/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	6/29/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	6/29/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	6/29/99	ND	
Methyl <i>tert</i> -Butyl Ether	EPA 5030	8020	3	1	NA	6/29/99	ND	

Approved By: _____

Handwritten signature

Date: _____

07/08/99

COLUMBIA ANALYTICAL SERVICES, INC.

QA/QC Report

Client: ARCO Products Company
Project: TO#24118.00/RAT8/2162 SAN LEANDRO
Sample Matrix: Water

Service Request: S9901923
Date Collected: NA
Date Received: NA
Date Extracted: NA
Date Analyzed: NA

Surrogate Recovery Summary
BTEX, MTBE and TPH as Gasoline

Prep Method: EPA 5030
Analysis Method: 8020 CA/LUFT

Units: PERCENT
Basis: NA

Sample Name	Lab Code	Test Notes	Percent Recovery	
			4-Bromofluorobenzene	a,a,a-Trifluorotoluene
MW-3(14)	S9901923-001		104	90
MW-4(10)	S9901923-002		98	99
MW-1(9)	S9901923-003		104	108
MW-2(15)	S9901923-004		99	113
BATCH QC	S9901879-0013MS		102	104
BATCH QC	S9901879-0013DMS		104	100
BATCH QC	S9901867-007MS		102	97
BATCH QC	S9901867-007DMS		101	101
Method Blank	S990627-WB1 GC1		105	90
Method Blank	S990629-WB1 GC2		100	100

CAS Acceptance Limits: 69-116 69-116

Approved By: _____

PT

Date: _____

07/08/29

COLUMBIA ANALYTICAL SERVICES, INC.

QA/QC Report

Client: ARCO Products Company
 Project: TO#24118.00/RAT8/2162 SAN LEANDRO

Service Request: S9901923
 Date Analyzed: 6/27/99

Initial Calibration Verification (ICV) Summary
 BTEX, MTBE and TPH as Gasoline

Sample Name: ICV
 Lab Code: ICV1
 Test Notes:

Units: ug/L (ppb)
 Basis: NA

ICV Source:

Analyte	Prep Method	Analysis Method	True Value	Result	CAS Percent Recovery		Result Notes
					Acceptance Limits	Percent Recovery	
TPH as Gasoline	EPA 5030	CA/LUFT	250	240	90-110	96	
Benzene	EPA 5030	8020	25	26	85-115	104	
Toluene	EPA 5030	8020	25	26	85-115	104	
Ethylbenzene	EPA 5030	8020	25	26	85-115	104	
Xylenes, Total	EPA 5030	8020	75	78	85-115	104	
Methyl tert -Butyl Ether	EPA 5030	8020	25	22	85-115	88	

Approved By: _____

pt

Date: _____

07/08/99

ICV/032196

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO: 21775-293.004
 PURGED BY: M. Gallagos
 SAMPLED BY: ↓

SAMPLE ID: MW-1 (91)
 CLIENT NAME: ARCO#2162
 LOCATION: San Leandro, CA

TYPE: Groundwater Surface Water _____ Leachate _____ Other _____
 CASING DIAMETER (inches): 2 _____ 3 _____ 4 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): NR
 DEPTH OF WELL (feet): 15.8 CALCULATED PURGE (gal.): _____
 DEPTH OF WATER (feet): 8.40 ACTUAL PURGE VOL. (gal.): ↓

DATE PURGED: 6/23/99 END PURGE: _____
 DATE SAMPLED: ↓ SAMPLING TIME: 0910

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>0910</u>	<u>GRAB</u>	<u>7.03</u>	<u>769</u>	<u>71.4</u>	<u>clear</u>	<u>clear</u>

OTHER: DO = 1.36 ODOR: none NR NR
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT		SAMPLING EQUIPMENT	
<input type="checkbox"/> 2" Bladder Pump	<input type="checkbox"/> Bailer (Teflon)	<input type="checkbox"/> 2" Bladder Pump	<input checked="" type="checkbox"/> Bailer (Teflon)
<input type="checkbox"/> Centrifugal Pump	<input type="checkbox"/> Bailer (PVC)	<input type="checkbox"/> Bomb Sampler	<input type="checkbox"/> Bailer (Stainless Steel)
<input type="checkbox"/> Submersible Pump	<input type="checkbox"/> Bailer (Stainless Steel)	<input type="checkbox"/> Dipper	<input type="checkbox"/> Submersible Pump
<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated	<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated
Other: _____		Other: _____	

WELL INTEGRITY: OK LOCK: ARCO

REMARKS: all samples taken

pH, E.C., Temp. Meter Calibration: Date: 6/23/99 Time: _____ Meter Serial No.: 87M
 E.C. 1000 1 1000 pH 7 1 700 pH 10 1 1000 pH 4 1 400

Temperature °F: _____
 SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 1 OF 4

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO: 21775-293-004

SAMPLE ID: MW-2 (15')

PURGED BY: M. Gallagos

CLIENT NAME: ARCO#2162

SAMPLED BY: ↓

LOCATION: San Leandro CA

TYPE: Groundwater Surface Water _____ Leachate _____ Other _____

CASING DIAMETER (inches): 2 _____ 3 _____ 4 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL): NR

VOLUME IN CASING (gal.): 5.43

DEPTH OF WELL (feet): 15.8

CALCULATED PURGE (gal.): 16.30

DEPTH OF WATER (feet): 7.48

ACTUAL PURGE VOL. (gal.): 16.5

DATE PURGED: 6/23/99

END PURGE: 0923

DATE SAMPLED: ↓

SAMPLING TIME: 0930

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>0918</u>	<u>5.5</u>	<u>7.26</u>	<u>692</u>	<u>72.2</u>	<u>Clear</u>	<u>Light</u>
<u>0921</u>	<u>11.0</u>	<u>7.28</u>	<u>682</u>	<u>71.9</u>	<u>↓</u>	<u>↓</u>
<u>0923</u>	<u>16.5</u>	<u>7.28</u>	<u>690</u>	<u>71.3</u>	<u>↓</u>	<u>↓</u>

OTHER: DO=

ODOR: Moderate

NR NR
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT

SAMPLING EQUIPMENT

2" Bladder Pump Bailer (Teflon)
 Centrifugal Pump Bailer (PVC)
 Submersible Pump Bailer (Stainless Steel)
 Well Wizard[®] Dedicated

2" Bladder Pump Bailer (Teflon)
 Bomb Sampler Bailer (Stainless Steel)
 Dipper Submersible Pump
 Well Wizard[®] Dedicated

Other: _____

Other: _____

WELL INTEGRITY: OK LOCK: ARCO

REMARKS: all samples taken

pH, E.C., Temp. Meter Calibration: Date: 6/23/99 Time: _____ Meter Serial No.: 87M

E.C. 1000 1 1000 pH 7 1 700 pH 10 1 1000 pH 4 1 400

Temperature °F _____

SIGNATURE: [Signature]

REVIEWED BY: [Signature] PAGE 2 OF 4

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



PROJECT NO: 21775-293-004
 PURGED BY: M. Gallinas
 SAMPLED BY: ↓

SAMPLE ID: MW-3 (141)
 CLIENT NAME: ARCO#2162
 LOCATION: San Leandro

TYPE: Groundwater Surface Water Leachate Other
 CASING DIAMETER (inches): 2 3 4 4.5 6 Other

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): 4.54
 DEPTH OF WELL (feet): 14.8 CALCULATED PURGE (gal.): 13.68
 DEPTH OF WATER (feet): 7.82 ACTUAL PURGE VOL. (gal.): 14.0

DATE PURGED: 6/23/99 END PURGE: 0833
 DATE SAMPLED: ↓ SAMPLING TIME: 0840

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>0829</u>	<u>4.5</u>	<u>6.69</u>	<u>744</u>	<u>68.3</u>	<u>cloudy</u>	<u>mod</u>
<u>0831</u>	<u>9.0</u>	<u>6.92</u>	<u>749</u>	<u>69.1</u>	<u>↓</u>	<u>↓</u>
<u>0833</u>	<u>14.0</u>	<u>7.00</u>	<u>734</u>	<u>69.4</u>	<u>↓</u>	<u>↓</u>

OTHER: DO = 1.98 ODOR: moderate NR NR
(COBALT 0-100) (NTU 0-200)
 FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT		SAMPLING EQUIPMENT	
<input type="checkbox"/> 2" Bladder Pump	<input type="checkbox"/> Bailer (Teflon)	<input type="checkbox"/> 2" Bladder Pump	<input checked="" type="checkbox"/> Bailer (Teflon)
<input type="checkbox"/> Centrifugal Pump	<input checked="" type="checkbox"/> Bailer (PVC)	<input type="checkbox"/> Bomb Sampler	<input type="checkbox"/> Bailer (Stainless Steel)
<input type="checkbox"/> Submersible Pump	<input type="checkbox"/> Bailer (Stainless Steel)	<input type="checkbox"/> Dipper	<input type="checkbox"/> Submersible Pump
<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated	<input type="checkbox"/> Well Wizard [®]	<input type="checkbox"/> Dedicated
Other: _____		Other: _____	

WELL INTEGRITY: OK LOCK: ARCO

REMARKS: all samples taken

pH, E.C., Temp. Meter Calibration: Date: 6/23/99 Time: 0825 Meter Serial No.: 87M
 E.C. 1000 1007 1000 pH 7 700 1700 pH 10 1002 1000 pH 4 400 400
 Temperature °F 65.0

SIGNATURE: [Signature] REVIEWED BY: [Signature] PAGE 3 OF 4

WATER SAMPLE FIELD DATA SHEET

Rev. 1/97



OWT

PROJECT NO: 21775-293-004

SAMPLE ID: MW-4 (10')

PURGED BY: M. Gallejas

CLIENT NAME: ARCO #2162

SAMPLED BY: ↓

LOCATION: San Leandro, CA

TYPE: Groundwater Surface Water _____ Leachate _____ Other _____
CASING DIAMETER (inches): 2 _____ 3 _____ 4 4.5 _____ 6 _____ Other _____

CASING ELEVATION (feet/MSL): NR VOLUME IN CASING (gal.): NR
DEPTH OF WELL (feet): 17.5 CALCULATED PURGE (gal.): _____
DEPTH OF WATER (feet): 9.00 ACTUAL PURGE VOL. (gal.): ↓

DATE PURGED: 6/23/99 END PURGE: _____
DATE SAMPLED: ↓ SAMPLING TIME: 0855

TIME (2400 HR)	VOLUME (gal.)	pH (units)	E.C. (µmhos/cm@25°C)	TEMPERATURE (°F)	COLOR (visual)	TURBIDITY (visual)
<u>0855</u>	<u>GRAB</u>	<u>7.13</u>	<u>746</u>	<u>71.7</u>	<u>Clear</u>	<u>Clear</u>
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

OTHER: DO = 1.42 ODOR: _____
(COBALT 0-100) (NTU 0-200)

FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): NR

PURGING EQUIPMENT

SAMPLING EQUIPMENT

____ 2" Bladder Pump
____ Centrifugal Pump
____ Submersible Pump
____ Well Wizard[®]
Other: _____

____ Bailer (Teflon)
 Bailer (PVC)
____ Bailer (Stainless Steel)
____ Dedicated

____ 2" Bladder Pump
____ Bomb Sampler
____ Dipper
____ Well Wizard[®]
Other: _____

WELL INTEGRITY: OK LOCK: ARCO

REMARKS: all samples taken

pH, E.C., Temp. Meter Calibration: Date: 6/23/99 Time: _____ Meter Serial No.: 87M
E.C. 1000 1/1000 pH 7 1/700 pH 10 1/1000 pH 4 1/400
Temperature °F _____

SIGNATURE: Manuel J. Gallejas REVIEWED BY: NR PAGE 4 OF 4

1921 Ringwood Avenue
San Jose, California

1999

ARCO 2162
21775-293.004

Well ID	Quarter	Date	Purge Volume (gallons)	Did well dry	Well Contained Product	Gallons			
						First	Second	Third	Fourth
MW-1	First	02/11/99	17.00	NO	NO	71.00	30.50	32.50	30.50
	Second	06/23/99	0.00	GRAB	NO				
	Third	07/31/98	0.00	GRAB	NO				
	Fourth	10/12/98	0.00	GRAB	NO				
MW-2	First	02/11/99	18.50	NO	NO				
	Second	06/23/99	16.50	NO	NO				
	Third	07/31/98	17.50	NO	NO				
	Fourth	10/12/98	16.50	NO	NO				
MW-3	First	02/11/99	16.00	NO	NO				
	Second	06/23/99	14.00	NO	NO				
	Third	07/31/98	15.00	NO	NO				
	Fourth	10/12/98	14.00	NO	NO				
MW-4	First	02/11/99	19.50	NO	NO				
	Second	06/23/99	0.00	GRAB	NO				
	Third	07/31/98	0.00	GRAB	NO				
	Fourth	10/12/98	0.00	GRAB	NO				
	First								
	Second								
	Third								
	Fourth								
	First								
	Second								
	Third								
	Fourth								
	First								
	Second								
	Third								
	Fourth								
	First					Steam water (gal) _____			
	Second								
	Third								
	Fourth								

