



Shell Oil Products US

RECEIVED

1:45 pm, Nov 13, 2009

Alameda County
Environmental Health

November 11, 2009

Re: Third Quarter 2009 Groundwater Monitoring Report
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, California

Dear Mr. Jerry Wickham:

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge.

Sincerely,
Shell Oil Products US

A handwritten signature in black ink that reads "Denis L. Brown".

Denis L. Brown
Project Manager

November 11, 2009
Delta Project No. SCA5251H1A
SAP No. 135785

Mr. Jerry Wickham, PG, CHG
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6540

**Re: THIRD QUARTER 2009
GROUNDWATER MONITORING REPORT**
Shell-Branded Service Station
5251 Hopyard Road
Pleasanton, California



Dear Mr. Wickham:

On behalf of Shell Oil Products (Shell), Delta Consultants (Delta) has prepared this *Third Quarter 2009 Groundwater Monitoring Report* for the site referenced above. Sampling activities at the site were performed by Blaine Tech Services, Inc. (Blaine Tech) under contract to Shell and included the collection of groundwater samples and static water level measurements. Delta did not provide any oversight of Blaine Tech's work or protocol. A Delta staff member performed an evaluation of the data provided to us under the supervision of a California Registered Civil Engineer or a California Professional Geologist.

This report represents Delta's professional opinions based upon the currently available information and is arrived at in accordance with currently acceptable professional standards. This report is based upon a specific scope of work requested by the client. The Contract between Delta and its client outlines the scope of work, and only those tasks specifically authorized by that contract or outlined in this report were performed. This report is intended only for the use of Delta's Client and anyone else specifically listed on this report. Delta will not and cannot be liable for unauthorized reliance by any other third party. Other than as contained in this paragraph, Delta makes no express or implied warranty as to the contents of this report.

If you have any questions regarding this site, please contact Ms. Suzanne McClurkin-Nelson (Delta Project Manager) at (408) 826-1875 or Mr. Denis Brown (Shell Site Manager) at (707) 865-0251.


Sincerely,
Delta Consultants



Suzanne McClurkin-Nelson
Senior Project Manager



Regina Bussard, P.G.
Project Geologist



Attachment: Third Quarter 2009 Groundwater Monitoring Report

cc: Denis Brown, Shell Oil Products US, Carson
Carl Cox, C and J Cox Corporation, Pleasanton
Colleen Winey, Zone 7 Water Agency, Livermore
Danielle Stefani, Livermore-Pleasanton Fire Department, Pleasanton

SHELL SEMI-ANNUAL STATUS REPORT

Station Address:	5251 Hopyard Road, Pleasanton, California
DELTA Project No.:	SCA5251H1A
SHELL Project Manager / Phone No.:	Denis Brown / (707) 865-0251
DELTA Site Manager / Phone No.:	Suzanne McClurkin-Nelson / (408) 826-1875
Primary Agency / Regulatory ID No.:	Alameda County Environmental Health (Mr. Jerry Wickham, P.G., CHG)
Other Agencies to Receive Copies:	Zone 7 Water Agency, Livermore-Pleasanton Fire Department

WORK PERFORMED THIS QUARTER (THIRD –2009):

1. Semi-annual groundwater monitoring and sampling. Submitted 2Q09 quarterly report.
2. Surveyed, developed, and sampled new wells S-10, S-11 and S-12; issued 2009 Well Installation Report.
3. Received ACEH letter dated July 14, 2009 approving request for reduced monitoring frequency.

WORK PROPOSED FOR NEXT TWO QUARTERS (FOURTH – 2009; FIRST –2010):

1. Submit semi-annual report (4Q09).
2. Perform feasibility testing for hot spot remediation via sulfate injection; evaluate potential and submit work plan if groundwater factors indicate receptive subsurface conditions.
3. Semi-annual groundwater monitoring and sampling (1Q10).

Current Phase of Project:	Groundwater monitoring and interim remediation activities.
Site Use:	Shell-branded Service Station
Frequency of Sampling:	Semi-Annual
Frequency of Monitoring:	Semi-Annual
Is Separate Phase Hydrocarbon Present On-site (Well #'s):	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Cumulative SPH Recovered to Date:	NA
SPH Recovered This Quarter :	None
Groundwater Recovered During Sampling This Quarter:	211.6 gallons were recovered during well development on June 30, 2009. 248.85 gallons were recovered during sampling on July 6, 2009.
Sensitive Receptor(s) and Respective Direction(s):	Chabot canal is located approximately 1133 feet north-east of the site and Hewlett Canal is located approximately 1156 feet east of the site. No municipal water supply wells were identified within a 1-mile radius of the site.
General Site Lithology:	The site and property to the north are underlain predominantly by clay and silt.
Current Remediation Techniques:	None
Permits for Discharge:	None
Approximate Depth to Groundwater:	7.83 to 9.18 feet below top of well casing.
Groundwater Gradient:	Variable and undetermined
Current Agency Correspondence:	July 14, 2009; approval of reduced monitoring frequency

SHELL SEMI-ANNUAL STATUS REPORT (CONT.)

Date of Most Recent Work Plan Approval:	March 27, 2009
Site History:	
Case Opening	September 2004
Onsite Assessment	May 2005
Offsite Assessment	None
Passive Remediation	Monitor Natural Attenuation
Active Remediation	Batch Extraction 2007
Closure	N/A
Summary of Unusual Activity:	Wells S-10, S-11, and S-12 were incorporated into the monitoring program.

Discussion:

Wells S-2, S-3, S-10 and EW-1 are being sampled for petroleum hydrocarbons, oxygenates, ferrous iron and sulfate during the fourth quarter 2009 in order to determine if the subsurface environment is reducing in the vicinity of the dissolved-phase plume. If a review of the analytical results indicates a subsurface environment that may be receptive to accelerated anaerobic degradation through the addition of sulfate, a work plan for hot spot remediation will be submitted during the fourth quarter 2009.

ATTACHMENTS:

Figures:

Figure 1 – Site Location Map

Figure 2 – Groundwater Elevation Contour Map – 7/8/2009

Figure 3 – Groundwater Hydrocarbon Distribution Map – 7/8/2009

Table:

Table 1 – Well Concentrations

Appendices:


Appendix A – Agency Correspondence

Appendix B – Blaine Tech Services, Inc. Field Data Sheets


Appendix C – Blaine Tech Services, Inc. Field Procedures

Appendix D – Certified Analytical Report with Chain-of-Custody Documentation

FIGURES

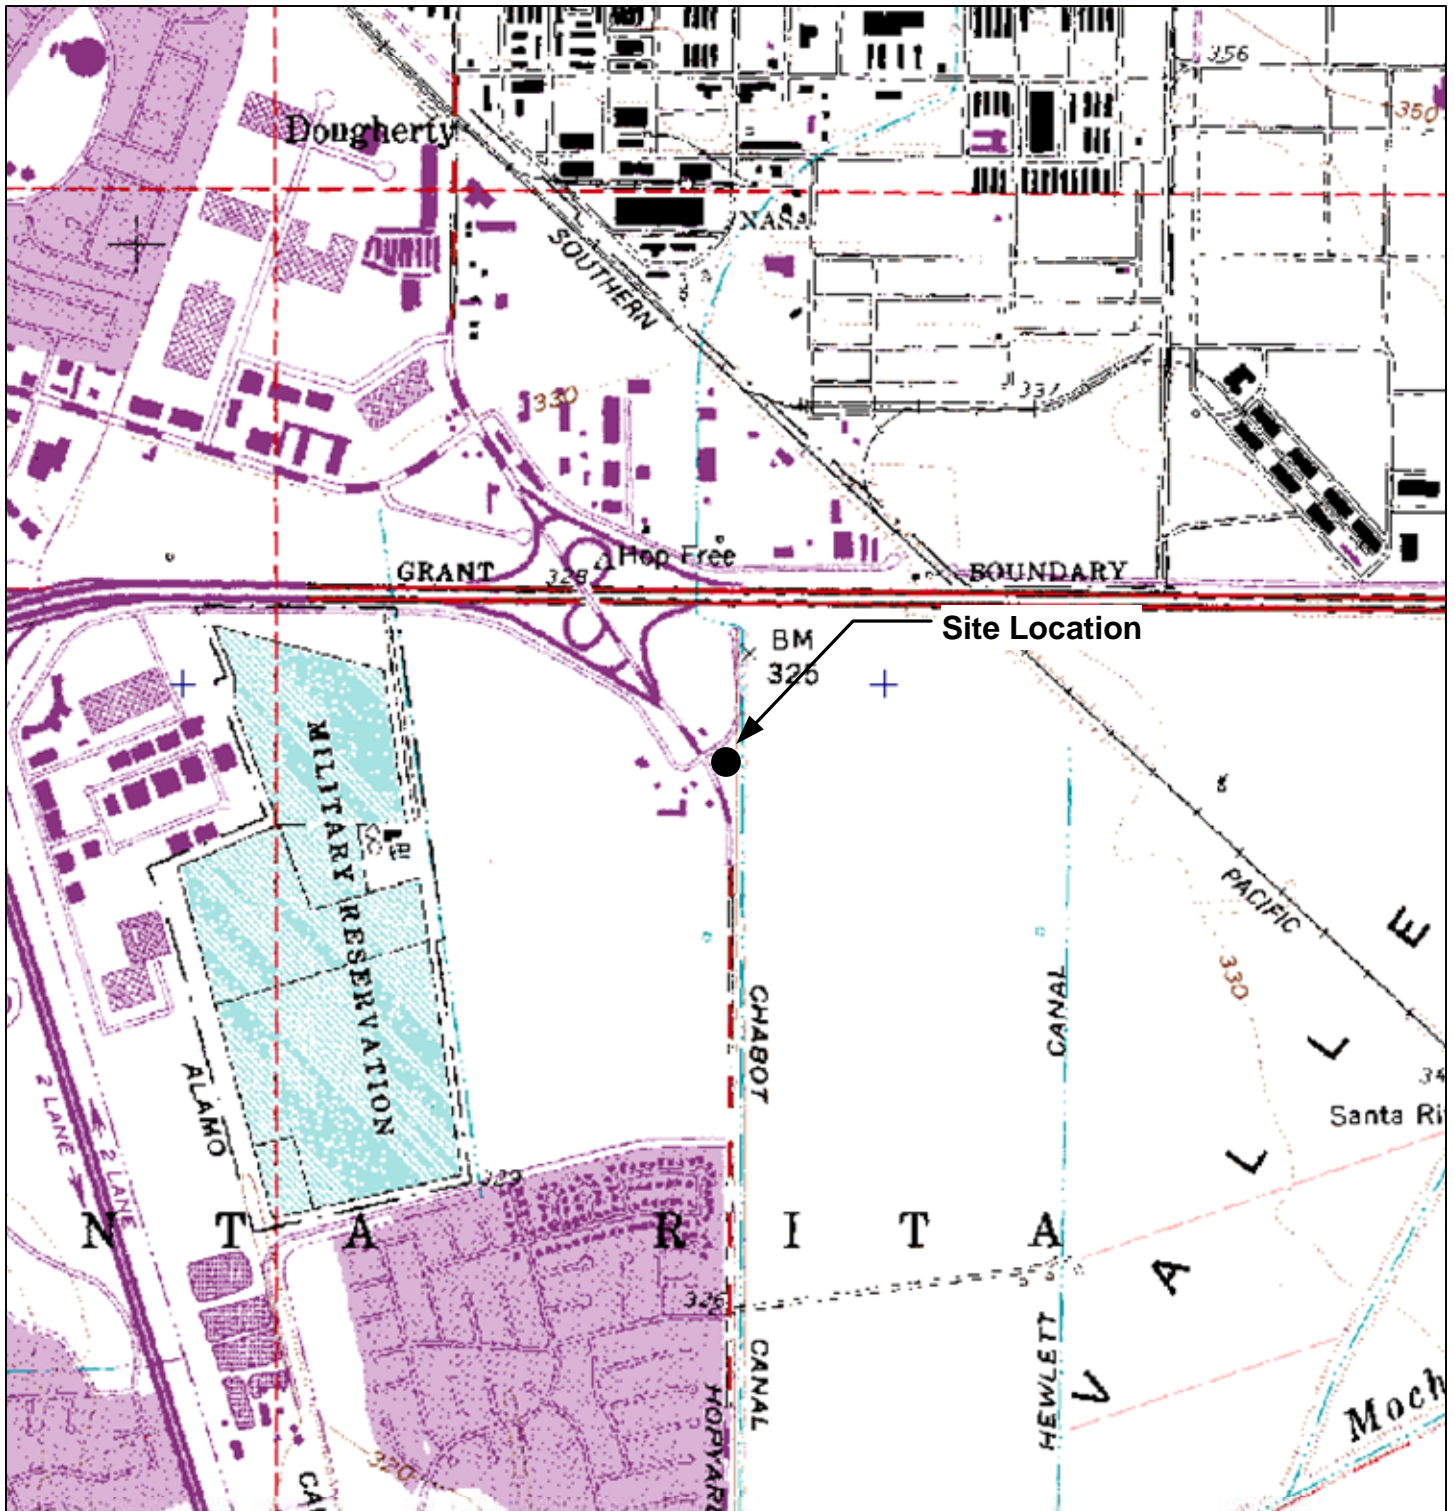

GENERAL NOTES:
 Base Map from: DeLorme Yarmouth, ME 04096
 Source Data: USGS



QUADRANGLE LOCATION




FIGURE 1
 SITE LOCATION MAP



SHELL-BRANDED SERVICE STATION
 5251 Hopyard Road
 Pleasanton, California

PROJECT NO. SCA5251H1A	DRAWN BY V. F. 3/31/05
FILE NO.	PREPARED BY VF
REVISION NO.	REVIEWED BY



PROJECT NUMBER SCA5251H1A
 APPROVED BY
 CHECKED BY
 DRAWN BY J.F.F. 8/3/2009

0 20 40
 SCALE IN FEET

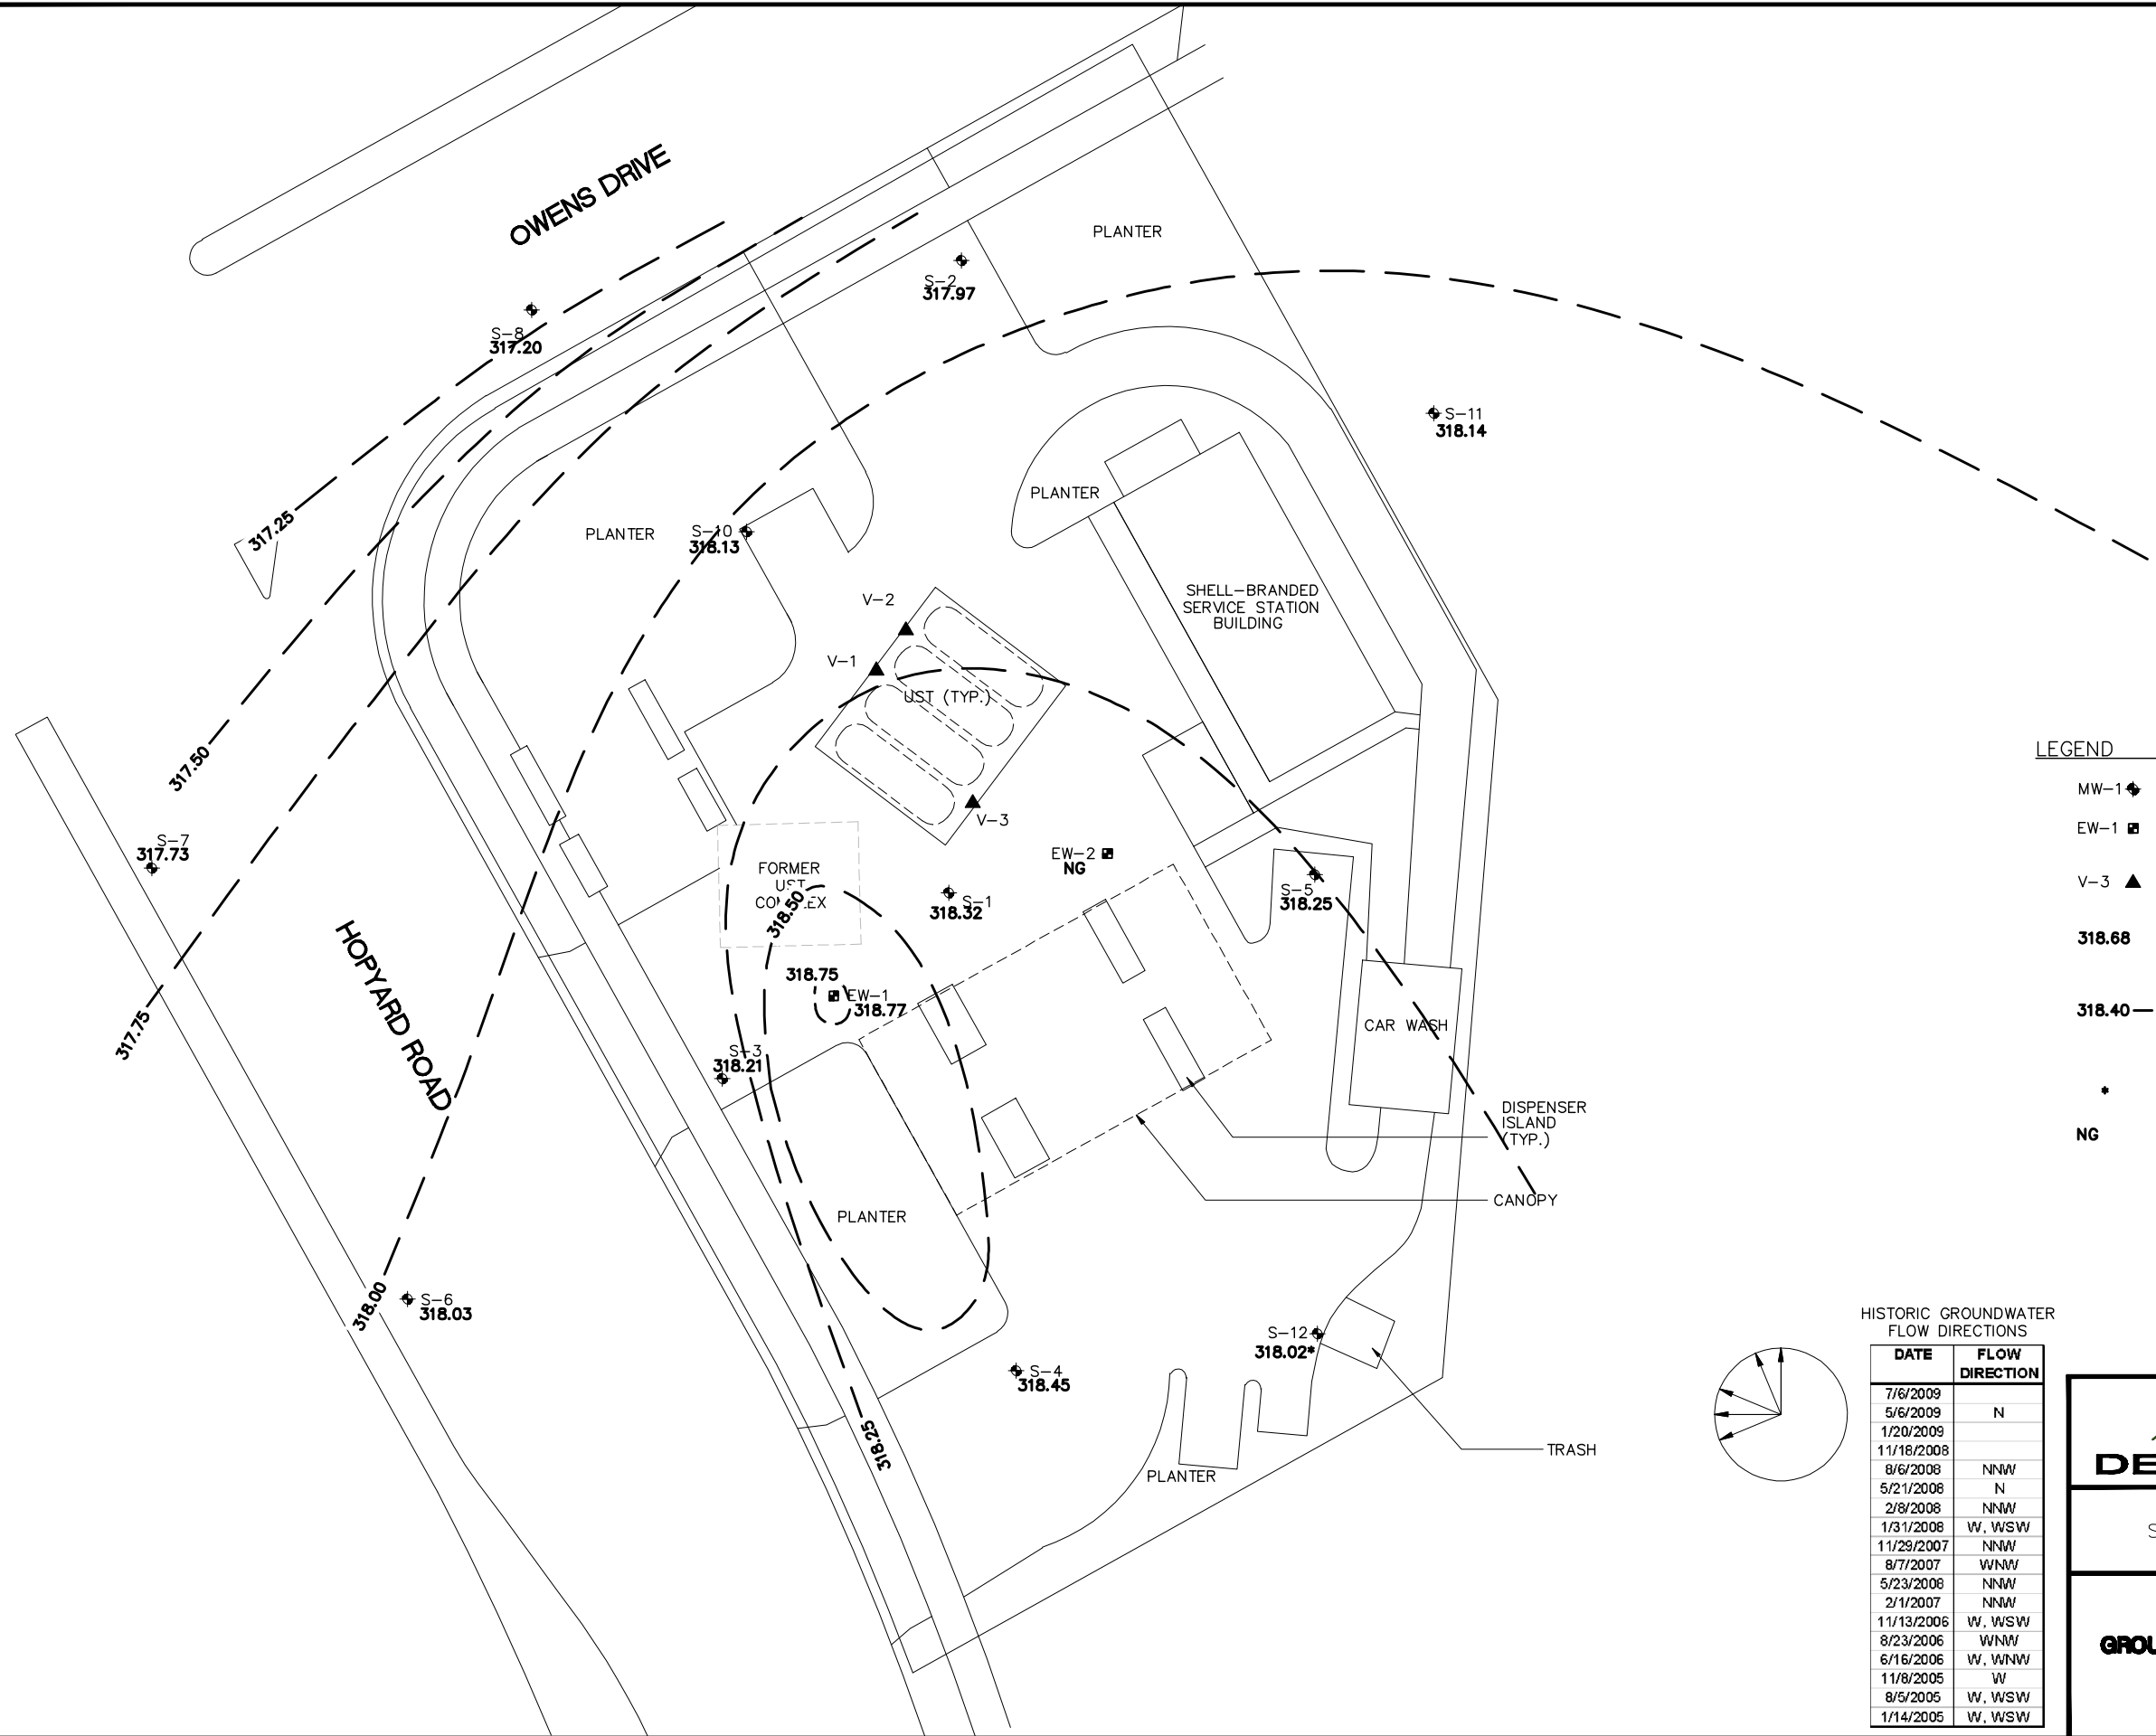


LEGEND

- MW-1 ◆ GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
- EW-1 ■ GROUNDWATER EXTRACTION WELL LOCATION AND DESIGNATION
- V-3 ▲ SOIL VAPOR EXTRACTION WELL LOCATION AND DESIGNATION
- 318.68 GROUNDWATER ELEVATION IN FEET ABOVE MEAN SEA LEVEL (Ft/MSL)
- 318.40 - - - GROUNDWATER CONTOUR IN FEET ABOVE MEAN SEA LEVEL (Ft/MSL) CONTOUR INTERVAL=0.25 FEET
- * ANOMALOUS DATA NOT USED IN CONTOURING
- NG NOT GAUGED

HISTORIC GROUNDWATER FLOW DIRECTIONS

DATE	FLOW DIRECTION
7/6/2009	
5/6/2009	N
1/20/2009	
11/18/2008	
8/6/2008	NNW
5/21/2008	N
2/8/2008	NNW
1/31/2008	W, WSW
11/29/2007	NNW
8/7/2007	WNW
5/23/2008	NNW
2/1/2007	NNW
11/13/2006	W, WSW
8/23/2006	WNW
6/16/2006	W, WNW
11/8/2005	W
8/5/2005	W, WSW
1/14/2005	W, WSW



DELTA CONSULTANTS



SHELL OIL PRODUCTS US
 SHELL BRANDED SERVICE STATION
 PLEASANTON, CALIFORNIA

FIGURE 2

GROUNDWATER ELEVATION CONTOUR MAP
 7/6/2009

5251 HOPYARD ROAD
 PLEASANTON, CALIFORNIA

PROJECT NUMBER SCA5251H1A
 APPROVED BY
 CHECKED BY
 DRAWN BY J.F.F. 8/3/2009



S-10				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	340	ND<1.0	ND<2.0	5,100

S-2				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	110	ND<0.50	59	ND<10

S-9				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	ND<50	ND<0.50	ND<1.0	ND<10

S-8				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	ND<50	ND<0.50	ND<1.0	ND<10

S-11				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	ND<50	ND<0.50	ND<1.0	ND<10

S-1				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	5,800	25	22	180

S-7				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	58	ND<0.50	4.3	ND<10

S-5				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	62	ND<0.50	2.5	11

EW-1				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	17,000	18	ND<10	ND<100

S-3				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	2,300	500	21	ND<50

S-12				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	83	ND<0.50	37	ND<10

S-6				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	ND<50	ND<0.50	ND<1.0	ND<10


S-4				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
7/6/09	ND<50	ND<0.50	ND<1.0	ND<10

- LEGEND**
- MW-1 ◆ GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
 - EW-1 ■ GROUNDWATER EXTRACTION WELL LOCATION AND DESIGNATION
 - V-3 ▲ SOIL VAPOR EXTRACTION WELL LOCATION AND DESIGNATION
 - TPH-g TOTAL PETROLEUM HYDROCARBONS AS GASOLINE
 - MTBE METHYL TERT-BUTYL ETHER
 - TBA TERT-BUTYL ALCOHOL
 - µg/L MICROGRAMS PER LITER
 - ND< NOT DETECTED ABOVE LIMIT NOTED
 - NS NOT SAMPLED

SHELL OIL PRODUCTS US
 SHELL BRANDED SERVICE STATION
 PLEASANTON, CALIFORNIA

**FIGURE 3
 GROUNDWATER HYDROCARBON
 DISTRIBUTION MAP
 7/6/2009**

5251 HOPYARD ROAD
 PLEASANTON, CALIFORNIA

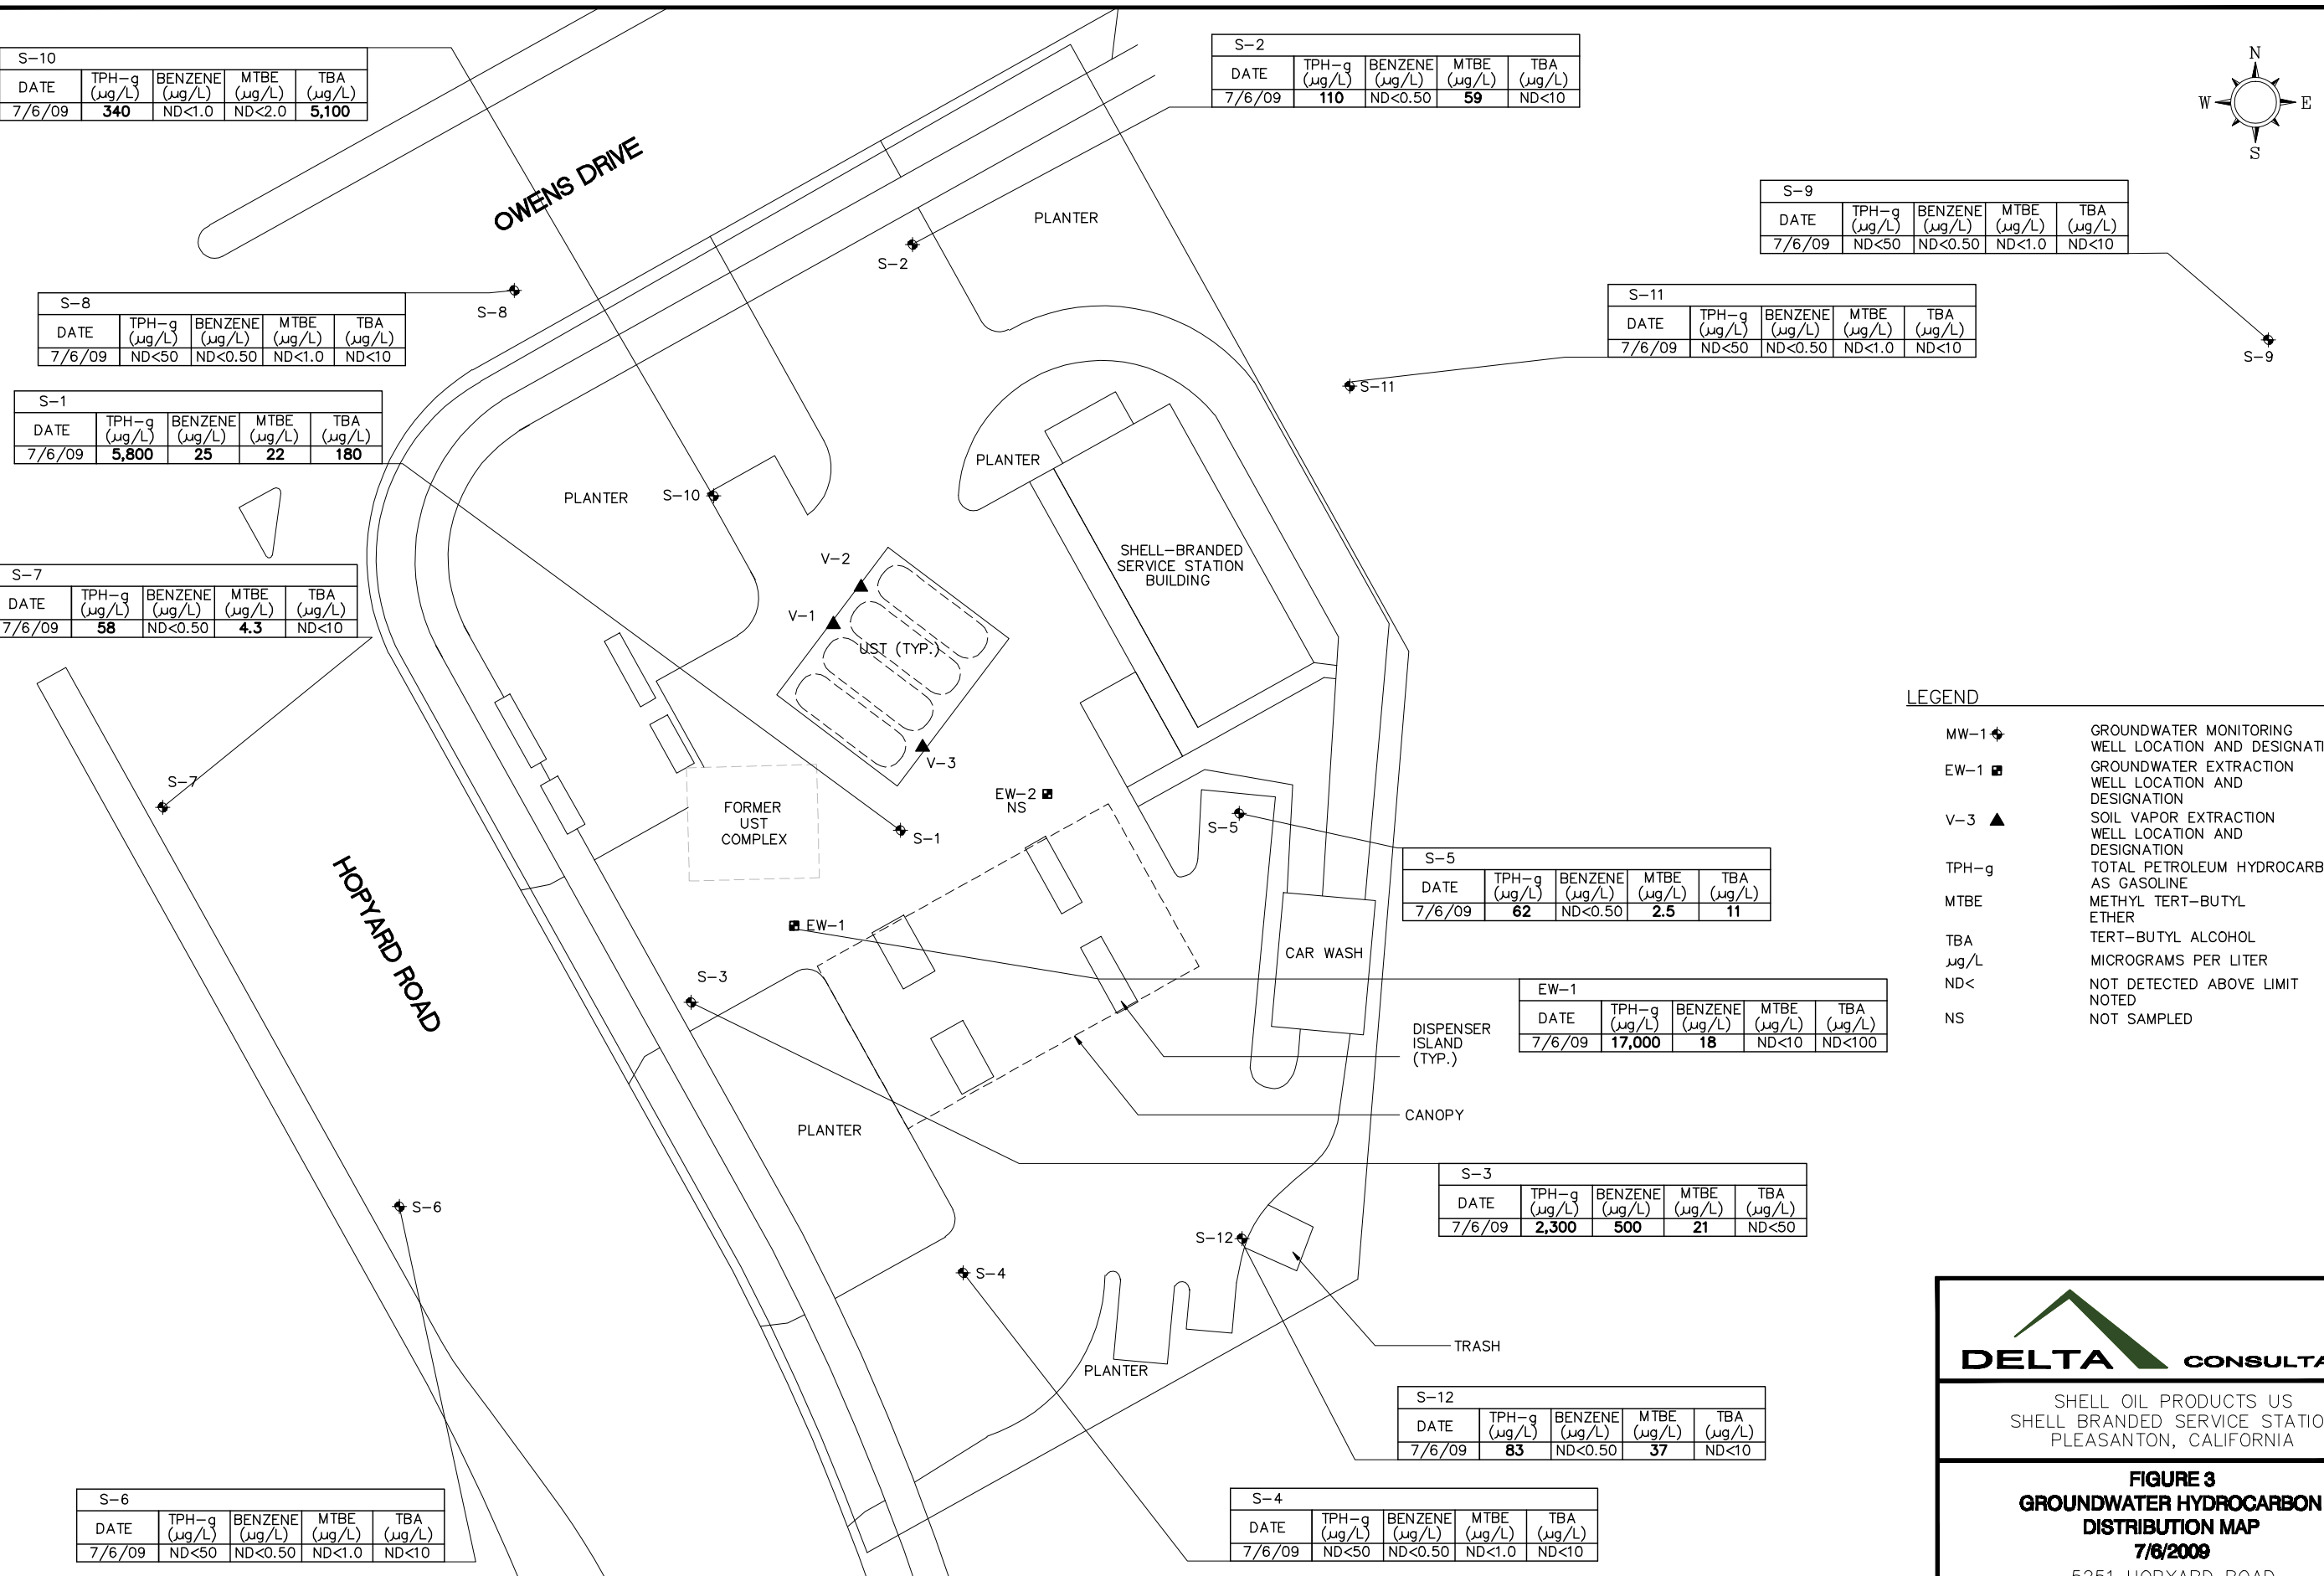

TABLE

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-1	1/25/1991	2,500	1,500	460	<25	130	36	NA	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	4/6/1991	6,700	2,600 a	2,600	14	580	250	NA	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	7/24/1991	8,800	3,800 a	2,300	30	640	220	NA	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	10/18/1991	12,000	3,300 a	3,600	380	990	580	NA	NA	NA	NA	NA	NA	NA	326.73	8.85	317.88	NA
S-1	1/23/1992	1,600	890	450	3	120	17	NA	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	4/27/1992	1,100 g	500 a	610	<10	110	10	NA	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	7/21/1992	5,100	290 c	1,900	54	460	140	NA	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	10/16/1992	13,000	390 c	3,200	310	780	360	NA	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	1/23/1993	2,300	30 d	640	<5	110	13	NA	NA	NA	NA	NA	NA	NA	326.73	7.96	318.77	NA
S-1	4/28/1993	4,600	390	780	<0.5	250	<0.5	NA	NA	NA	NA	NA	NA	NA	326.73	9.07	317.66	NA
S-1	9/22/1993	3,000	610 a	660	28	160	17	NA	NA	NA	NA	NA	NA	NA	326.73	8.68	318.05	NA
S-1	12/8/1993	520	280	210	<2.5	49	<2.5	NA	NA	NA	NA	NA	NA	NA	326.73	8.23	318.50	NA
S-1	3/4/1994	640	NA	190	1.4	18	1.3	NA	NA	NA	NA	NA	NA	NA	326.73	8.81	317.92	NA
S-1 (D)	3/4/1994	640	NA	180	1.7	17	1.3	NA	NA	NA	NA	NA	NA	NA	326.73	8.81	317.92	NA
S-1	6/16/1994	2,500	NA	390	9.5	31	7.5	NA	NA	NA	NA	NA	NA	NA	326.73	8.80	317.93	NA
S-1 (D)	6/16/1994	2,000	NA	410	7.8	120	20	NA	NA	NA	NA	NA	NA	NA	326.73	8.80	317.93	NA
S-1	9/13/1994	1,400	NA	310	7.7	29	8.5	NA	NA	NA	NA	NA	NA	NA	326.73	8.62	318.11	NA
S-1 (D)	9/13/1994	1,400	NA	240	7.9	44	6.3	NA	NA	NA	NA	NA	NA	NA	326.73	8.62	318.11	NA
S-1	5/5/1995	800	NA	120	3.6	26	2.7	NA	NA	NA	NA	NA	NA	NA	326.73	11.54	315.19	NA
S-1 (D)	5/5/1995	710	NA	110	3.4	19	2.7	NA	NA	NA	NA	NA	NA	NA	326.73	11.54	315.19	NA
S-1	5/21/1996	1,500	NA	170	8.5	120	6.7	NA	NA	NA	NA	NA	NA	NA	326.73	8.88	317.85	NA
S-1	5/12/1997	4,700	NA	200	15	210	20	2,300	NA	NA	NA	NA	NA	NA	326.73	11.19	315.54	2.4
S-1 (D)	5/12/1997	4,800	NA	210	16	190	16	3,200	2,900	NA	NA	NA	NA	NA	326.73	11.19	315.54	2.4
S-1	5/8/1998	500	NA	18	2.1	2.3	2	1,000	NA	NA	NA	NA	NA	NA	326.73	8.38	318.35	2.1
S-1	6/27/1999	2,970	NA	117	32.0	69.1	17.5	374	NA	NA	NA	NA	NA	NA	326.73	8.79	317.94	2.4
S-1	4/28/2000	1,920	NA	50.5	15.0	67.2	46.7	276	NA	NA	NA	NA	NA	NA	326.73	8.50	318.23	2.8
S-1	5/30/2001	3,900	NA	27	12	140	28	NA	140	NA	NA	NA	NA	NA	326.73	8.18	318.55	2.6
S-1	6/17/2002	2,700	NA	25	11	51	14	NA	140	NA	NA	NA	NA	NA	326.73	8.39	318.34	3.2

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-1	5/30/2003	3,900	NA	12	8.2	47	12	NA	270	NA	NA	NA	NA	NA	326.74	7.41	319.33	1.2
S-1	5/3/2004	3,700	NA	32	21	170	34	NA	410	NA	NA	NA	NA	NA	326.74	11.18	315.56	2.4
S-1	1/14/2005	4,200	NA	22	34	380	33	NA	100	NA	NA	NA	NA	NA	326.74	7.10	319.64	0.58
S-1	5/5/2005	5,000	NA	33	110	970	210	NA	190	<0.50	<0.50	0.95	630	NA	326.74	11.32	315.42	NA
S-1	08/05/2005	4,600	NA	32	52	420	69	NA	110	<40	<40	<40	410	NA	326.74	9.04	317.70	NA
S-1	9/16/2005	3,300	NA	14	28	280	43	NA	60	51	<10	<10	260	NA	326.74	11.37	315.37	NA
S-1	11/8/2005	4,700	NA	19.2	47	416	84.0	NA	50.2	<0.500	<0.500	<0.500	<10.0	NA	326.74	9.06	317.68	NA
S-1	1/31/2006	6,380	NA	21.0	33.1	280	31.0	NA	59.9	<0.500	<0.500	<0.500	306	NA	326.74	8.12	318.62	NA
S-1	5/16/2006	9,080	NA	25.8	46.6	517	86.6 m	NA	69.5	<0.500	<0.500	<0.500	268	NA	326.74	7.95	318.79	NA
S-1	8/23/2006	4,980	NA	19.0	22.7	74.7	38.7	NA	42.9	<0.500	<0.500	<0.500	252	NA	326.74	7.95	318.79	NA
S-1	11/13/2006	7,900	NA	38	41	480	52	NA	44	<5.0	<5.0	<5.0	480	NA	326.74	7.99	318.75	NA
S-1	2/1/2007	1,500	NA	18	15	110	17	NA	27	<10	<10	<10	640	NA	326.74	8.19	318.55	NA
S-1	5/23/2007	5,300 n	NA	35	42	260	67.9	NA	<5.0	<10	<10	<10	720	NA	326.74	10.50	316.24	NA
S-1	8/7/2007	6,900 n	NA	26	31	240	40.9 o	NA	30	<10	<10	<10	270	NA	326.74	8.13	318.61	NA
S-1	11/29/2007	840 n	NA	16	18	120	14.5	NA	26	<2.0	<2.0	<2.0	190	NA	326.74	9.40	317.34	NA
S-1	2/8/2008	4,500 n	NA	25	39	410	37	NA	28	<10	<10	<10	330	NA	326.74	7.91	318.83	NA
S-1	2/20/2008	5,700 n	NA	29	56	650	89	NA	35	<10	<10	<10	200	<500	326.74	8.70	318.04	NA
S-1	3/7/2008	6,800 n	NA	25	37	310	59.2	NA	<5.0	<10	<10	<10	240	<500	326.74	10.54	316.20	NA
S-1	3/21/2008	5,300	NA	22	23	210	38.7	NA	<2.0	<4.0	<4.0	<4.0	220	<200	326.74	9.79	316.95	NA
S-1	4/8/2008	4,200	NA	15	18	230	26.4	NA	<2.0	<4.0	<4.0	<4.0	240	<200	326.74	8.27	318.47	NA
S-1	4/21/2008	6,600	NA	21	27	440	53	NA	<2.0	<4.0	<4.0	<4.0	170	<200	326.74	8.17	318.57	NA
S-1	5/6/2008	5,700	NA	21	29	440	56	NA	<5.0	<10	<10	<10	270	<500	326.74	8.00	318.74	NA
S-1	5/21/2008	7,800	NA	29	51	620	108	NA	40	<10	<10	<10	190	<500	326.74	8.27	318.47	NA
S-1	8/6/2008	7,600	NA	17	27	140	30.0	NA	24	<10	<10	<10	180	NA	326.74	8.01	318.73	NA
S-1	11/18/2008	6,500	NA	27	35	310	45.0	NA	22	<20	<20	<20	180	NA	326.74	7.59	319.15	NA
S-1	1/20/2009	5,100	NA	19	21	140	22	NA	21	<10	<10	<10	230	NA	326.74	8.28	318.46	NA
S-1	5/6/2009	6,100	NA	26	37	520	51	NA	27	<10	<10	<10	180	NA	326.74	8.04	318.70	NA
S-1	7/6/2009	5,800	NA	25	34	370	44	NA	22	<10	<10	<10	180	NA	326.74	8.42	318.32	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-2	1/25/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	4/16/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	10/18/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	8.83	317.76	NA
S-2	1/23/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	7/17/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	1/23/1993	<50	140 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	8.10	318.49	NA
S-2	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	9.06	317.53	NA
S-2	9/22/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	8.91	317.68	NA
S-2	12/8/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	9.07	317.52	NA
S-2	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	8.90	317.69	NA
S-2	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	8.98	317.61	NA
S-2	9/13/1994	<50	NA	<0.5	2.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	8.78	317.81	NA
S-2	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	8.60	317.99	NA
S-2	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.59	8.75	317.84	NA
S-2	5/12/1997	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	326.59	8.72	317.87	3.4
S-2	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	326.59	8.63	317.96	3.1
S-2	6/27/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.00	NA	NA	NA	NA	NA	NA	326.59	8.79	317.80	2.6
S-2	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	326.59	8.33	318.26	2.0
S-2	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	NA	326.59	8.56	318.03	1.8
S-2	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	326.59	8.87	317.72	i
S-2	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	18	NA	NA	NA	NA	NA	326.47	7.89	318.58	1.7
S-2	5/3/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	510	NA	NA	NA	NA	NA	326.47	5.44	321.03	0.1
S-2	1/14/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	270	NA	NA	NA	NA	NA	326.47	7.88	318.59	NA
S-2	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	280	<0.50	<0.50	0.55	8.9 j	NA	326.47	8.14	318.33	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-2	08/05/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	320	<2.0	<2.0	<2.0	510	NA	326.47	8.24	318.23	NA
S-2	9/16/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	320	<10	<10	<10	1,800	NA	326.47	8.06	318.41	NA
S-2	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	375	<0.500	<0.500	0.610	1,130	NA	326.47	8.20	318.27	NA
S-2	1/31/2006	281	NA	<0.500	<0.500	<0.500	<0.500	NA	354	<0.500	<0.500	<0.500	3,090	NA	326.47	8.18	318.29	NA
S-2	5/16/2006	785	NA	<0.500	<0.500	<0.500	<0.500	NA	282	<0.500	<0.500	<0.500	3,250	NA	326.47	8.34	318.13	NA
S-2	8/23/2006	344	NA	<0.500	<0.500	<0.500	<0.500	NA	194	<0.500	<0.500	0.560	10,600	NA	326.47	8.32	318.15	NA
S-2	11/13/2006	320	NA	<5.0 f	<5.0 f	<5.0 f	<5.0 f	NA	140 f	<5.0 f	<5.0 f	<5.0 f	6,000 f	NA	326.50	8.37	318.13	NA
S-2	2/1/2007	160	NA	<0.50	<0.50	<0.50	<1.0	NA	130	<2.0	<2.0	<2.0	3,900	NA	326.50	8.13	318.37	NA
S-2	5/23/2007	120 n	NA	<0.50	<1.0	<1.0	<1.0	NA	110	<2.0	<2.0	<2.0	1,500	NA	326.50	8.55	317.95	NA
S-2	8/7/2007	93 n,p	NA	<2.5	<5.0	<5.0	<5.0	NA	120	<10	<10	<10	1,700	NA	326.50	8.26	318.24	NA
S-2	11/29/2007	110 n,p	NA	<0.50	<1.0	<1.0	<1.0	NA	98	<2.0	<2.0	<2.0	880	NA	326.50	8.29	318.21	NA
S-2	2/8/2008	110 n,p	NA	<0.50	<1.0	<1.0	<1.0	NA	110	<2.0	<2.0	<2.0	830	NA	326.50	8.07	318.43	NA
S-2	2/20/2008	73 n,p	NA	<0.50	<1.0	<1.0	<1.0	NA	100	<2.0	<2.0	<2.0	650	<100	326.50	8.30	318.20	NA
S-2	3/7/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	57	<2.0	<2.0	<2.0	240	<100	326.50	9.25	317.25	NA
S-2	3/21/2008	73	NA	<0.50	<1.0	<1.0	<1.0	NA	91	<2.0	<2.0	<2.0	480	<100	326.50	9.01	317.49	NA
S-2	4/8/2008	88	NA	<0.50	<1.0	<1.0	<1.0	NA	72	<2.0	<2.0	<2.0	310	<100	326.50	8.46	318.04	NA
S-2	4/21/2008	60	NA	<0.50	<1.0	<1.0	<1.0	NA	8.6	<2.0	<2.0	<2.0	310	<100	326.50	9.60	316.90	NA
S-2	5/6/2008	62	NA	<0.50	<1.0	<1.0	<1.0	NA	53	<2.0	<2.0	<2.0	300	<100	326.50	10.55	315.95	NA
S-2	5/21/2008	130	NA	<0.50	<1.0	<1.0	<1.0	NA	61	<2.0	<2.0	<2.0	320	<100	326.50	9.43	317.07	NA
S-2	8/6/2008	76	NA	<0.50	<1.0	<1.0	<1.0	NA	46	<2.0	<2.0	<2.0	77	NA	326.50	8.41	318.09	NA
S-2	11/18/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	42	<2.0	<2.0	<2.0	18	NA	326.50	8.38	318.12	NA
S-2	1/20/2009	57	NA	<0.50	<1.0	<1.0	<1.0	NA	46	<2.0	<2.0	<2.0	13	NA	326.50	8.64	317.86	NA
S-2	5/6/2009	64	NA	<0.50	<1.0	<1.0	<1.0	NA	58	<2.0	<2.0	<2.0	<10	NA	326.50	8.31	318.19	NA
S-2	7/6/2009	110	NA	<0.50	<1.0	<1.0	<1.0	NA	59	<2.0	<2.0	<2.0	<10	NA	326.50	8.53	317.97	NA
S-3	1/25/1991	870	330	230	<2.5	130	<2.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	4/16/1991	190	140 a	12	0.8	6.2	1.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	7/24/1991	1,700	1,200 a	450	4.4	150	2.9	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-3	10/18/1991	1,900	500	370	3.1	120	220	NA	NA	NA	NA	NA	NA	NA	327.38	9.64	317.74	NA
S-3	1/23/1992	2,000	650 a	580	3	200	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	4/27/1992	1,100	230 a	150	<3	76	14	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	7/17/1992	810	58	200	<2.5	57	3.8	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	10/16/1992	440	190 c	79	1.8	18	4.6	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	1/23/1993	670	170 d	79	1.5	46	15	NA	NA	NA	NA	NA	NA	NA	327.38	8.81	318.57	NA
S-3	4/28/1993	2,000	<50	300	3.4	210	38	NA	NA	NA	NA	NA	NA	NA	327.38	9.87	317.51	NA
S-3	9/22/1993	4,800	670 a	2,000	34	150	51	NA	NA	NA	NA	NA	NA	NA	327.38	9.65	317.73	NA
S-3	12/8/1993	1,200	11	440	<5.0	120	29	NA	NA	NA	NA	NA	NA	NA	327.38	9.26	318.12	NA
S-3	3/4/1994	630	NA	130	<0.5	17	0.8	NA	NA	NA	NA	NA	NA	NA	327.38	9.64	317.74	NA
S-3	6/16/1994	1,800	NA	430	19	35	21	NA	NA	NA	NA	NA	NA	NA	327.38	9.78	317.60	NA
S-3	5/5/1995	160	NA	50	0.9	7.2	4.1	NA	NA	NA	NA	NA	NA	NA	327.38	9.38	318.00	NA
S-3	5/21/1996	270	NA	45	<0.5	1.4	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	9.41	317.97	NA
S-3 (D)	5/21/1996	210	NA	<0.5	<0.5	0.95	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	9.41	317.97	NA
S-3	5/12/1997	420	NA	<1.0	<1.0	<1.0	<1.0	57	NA	NA	NA	NA	NA	NA	327.38	9.30	318.08	2.5
S-3	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	327.38	9.12	318.26	2.2
S-3	6/27/1999	106	NA	8.51	<0.500	<0.500	<0.500	31.0	NA	NA	NA	NA	NA	NA	327.38	9.39	317.99	2.1
S-3	4/28/2000	139	NA	7.58	<0.500	<0.500	<0.500	42.6	NA	NA	NA	NA	NA	NA	327.38	9.04	318.34	1.8
S-3	5/30/2001	2,200	NA	510	6.9	100	21	NA	33	NA	NA	NA	NA	NA	327.38	9.19	318.19	2.0
S-3	6/17/2002	600	NA	150	2.1	30	11	NA	36	NA	NA	NA	NA	NA	327.38	9.35	318.03	0.1
S-3	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	9.0	NA	NA	NA	NA	NA	327.04	8.39	318.65	1.2
S-3	5/3/2004	61 k	NA	0.90	<0.50	<0.50	<1.0	NA	9.8	NA	NA	NA	NA	NA	327.04	8.73	318.31	1.2
S-3	1/14/2005	94	NA	4.6	<0.50	3.1	1.0	NA	13	NA	NA	NA	NA	NA	327.04	8.00	319.04	NA
S-3	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	5.7	<0.50	<0.50	<0.50	<5.0	NA	327.04	8.31	318.73	NA
S-3	08/05/2005 l	<50	NA	0.51	<0.50	<0.50	<1.0	NA	6.0	<2.0	<2.0	<2.0	42	NA	327.04	8.32	318.72	NA
S-3	9/16/2005	<50	NA	0.62	<0.50	<0.50	<1.0	NA	7.9	<2.0	<2.0	<2.0	<5.0	NA	327.04	8.29	318.75	NA
S-3	11/8/2005	166	NA	63.0	1.32	7.20	2.99	NA	8.67	<0.500	<0.500	<0.500	<10.0	NA	327.04	8.17	318.87	NA
S-3	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	7.05	<0.500	<0.500	<0.500	<10.0	NA	327.04	8.05	318.99	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-3	5/16/2006	<50.0	NA	3.23	<0.500	1.42	1.63 m	NA	3.92	<0.500	<0.500	<0.500	<10.0	NA	327.04	8.62	318.42	NA
S-3	8/23/2006	<50.0	NA	18.9	<0.500	1.72	0.800	NA	7.65	<0.500	<0.500	<0.500	<10.0	NA	327.04	8.54	318.50	NA
S-3	11/13/2006	530	NA	130 f	3.4 f	10 f	4.6 f	NA	17 f	<2.0 f	<2.0 f	<2.0 f	<80 f	NA	327.01	8.65	318.36	NA
S-3	2/1/2007	430	NA	230	4.4	4.0	<5.0	NA	17	<10	<10	<10	<25	NA	327.01	8.41	318.60	NA
S-3	5/23/2007	1,400 n	NA	370	11	17	11.58 o	NA	21	<2.0	<2.0	<2.0	12	NA	327.01	8.37	318.64	NA
S-3	8/7/2007	1,000 n	NA	150	4.6 o	4.1 o	4.0 o	NA	21	<10	<10	<10	<50	NA	327.01	8.59	318.42	NA
S-3	11/29/2007	710 n	NA	110	3.1	3.8	5.3 o	NA	17	<2.0	<2.0	<2.0	<10	NA	327.01	8.78	318.23	NA
S-3	2/8/2008	300 n	NA	2.7	<1.0	<1.0	<1.0	NA	19	<2.0	<2.0	<2.0	<10	NA	327.01	8.05	318.96	NA
S-3	2/20/2008	620 n	NA	150	4.1	11	11	NA	19	<2.0	<2.0	<2.0	<10	<100	327.01	8.57	318.44	NA
S-3	3/7/2008	170 n	NA	15	<1.0	2.5	4.0	NA	12	<2.0	<2.0	<2.0	<10	<100	327.01	8.87	318.14	NA
S-3	3/21/2008	68	NA	4.8	<1.0	1.3	1.6	NA	8.6	<2.0	<2.0	<2.0	<10	<100	327.01	9.00	318.01	NA
S-3	4/8/2008	170	NA	7.8	<1.0	2.6	4.0	NA	8.1	<2.0	<2.0	<2.0	<10	<100	327.01	8.55	318.46	NA
S-3	4/21/2008	350	NA	2.8	<1.0	1.2	1.9	NA	12	<2.0	<2.0	<2.0	<10	<100	327.01	8.65	318.36	NA
S-3	5/6/2008	210	NA	2.3	<1.0	<1.0	<1.0	NA	9.1	<2.0	<2.0	<2.0	<10	<100	327.01	8.60	318.41	NA
S-3	5/21/2008	430	NA	21	<1.0	3.5	4.2	NA	17	<2.0	<2.0	<2.0	<10	<100	327.01	8.81	318.20	NA
S-3	8/6/2008	210	NA	<0.50	<1.0	<1.0	<1.0	NA	13	<2.0	<2.0	<2.0	11	NA	327.01	8.71	318.30	NA
S-3	11/18/2008	930	NA	130	3.5	15	19	NA	18	<2.0	<2.0	<2.0	10	NA	327.01	8.79	318.22	NA
S-3	1/20/2009	950	NA	100	1.2	1.8	<1.0	NA	18	<2.0	<2.0	<2.0	16	NA	327.01	9.10	317.91	NA
S-3	5/6/2009	2,000	NA	490	5.9	14	4.8	NA	21	<2.0	<2.0	<2.0	14	NA	327.01	8.51	318.50	NA
S-3	7/6/2009	2,300	NA	500	10	30	13	NA	21	<10	<10	<10	<50	NA	327.01	8.80	318.21	NA
S-4	1/25/1991	<50	<50	<0.5	1.5	<0.5	2.8	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	4/16/1991	<50	0.7	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	10/18/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	8.82	318.56	NA
S-4	1/23/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	7/17/1992	<500	74	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-4	10/16/1992	<500	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	1/23/1993	<500	94 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	8.32	319.06	NA
S-4	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	9.76	317.62	NA
S-4	9/22/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.30	318.08	NA
S-4	12/8/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.74	317.64	NA
S-4	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.60	317.78	NA
S-4	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.42	317.96	NA
S-4	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	9.02	318.36	NA
S-4	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.38	9.29	318.09	NA
S-4	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	140	NA	NA	NA	NA	NA	NA	327.38	7.95	319.43	2.5
S-4	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	250	NA	NA	NA	NA	NA	NA	327.38	8.96	318.42	2.0
S-4	6/27/1999	303	NA	35.8	24.8	12.4	69.8	106	NA	NA	NA	NA	NA	NA	327.38	8.90	318.48	2.6
S-4	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	40.2	NA	NA	NA	NA	NA	NA	327.38	8.37	319.01	1.9
S-4	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	6.8	NA	NA	NA	NA	NA	327.38	8.83	318.55	1.8
S-4	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	31	NA	NA	NA	NA	NA	327.38	9.37	318.01	4.8
S-4	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	130	NA	NA	NA	NA	NA	327.24	8.46	318.78	1.4
S-4	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	170	NA	NA	NA	NA	NA	327.24	8.70	318.54	1.1
S-4	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	25	NA	NA	NA	NA	NA	327.24	8.17	319.07	NA
S-4	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	15	<0.50	<0.50	<0.50	<5.0	NA	327.24	8.25	318.99	NA
S-4	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	6.1	<2.0	<2.0	<2.0	<5.0	NA	327.24	8.14	319.10	NA
S-4	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.01	<0.500	<0.500	<0.500	<10.0	NA	327.24	8.33	318.91	NA
S-4	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	327.24	8.29	318.95	NA
S-4	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	327.24	8.46	318.78	NA
S-4	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	327.24	8.34	318.90	NA
S-4	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<20	NA	327.24	8.23	319.01	NA
S-4	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	327.24	8.56	318.68	NA
S-4	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	0.60 o	<2.0	<2.0	<2.0	<10	NA	327.24	7.92	319.32	NA
S-4	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	0.32 o	<2.0	<2.0	<2.0	<10	NA	327.24	8.52	318.72	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-4	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	327.24	8.58	318.66	NA
S-4	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	327.24	8.07	319.17	NA
S-4	5/21/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	<100	327.24	8.80	318.44	NA
S-4	8/6/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	327.24	8.73	318.51	NA
S-4	11/18/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	327.24	8.77	318.47	NA
S-4	1/20/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	327.24	9.32	317.92	NA
S-4	5/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	327.24	8.45	318.79	NA
S-4	7/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	327.24	8.79	318.45	NA
S-5	1/25/1991	<50	<50	<0.5	<0.5	<0.5	0.7	NA	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	4/16/1991	<50	<50	<0.5	<0.5	<0.5	0.8	NA	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	10/18/1991	120 e	<50	4.3	<0.5	1	0.7	NA	NA	NA	NA	NA	NA	NA	327.76	10.00	317.76	NA
S-5	1/23/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	4/27/1992	50	<50	<0.5	<0.5	<0.5	0.6	NA	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	7/17/1992	<50	70	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	10/16/1992	230	57	13	<0.5	4.9	4.3	NA	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	1/23/1993	<50	150 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	8.88	318.88	NA
S-5	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	10.20	317.56	NA
S-5	9/22/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	9.92	317.84	NA
S-5	12/8/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	10.19	317.57	NA
S-5	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	9.95	317.81	NA
S-5	6/16/1994	<50	NA	0.9	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	10.02	317.74	NA
S-5	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	9.58	318.18	NA
S-5	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	327.76	9.84	317.92	NA
S-5	5/12/1997	360	NA	3.3	<0.50	17	9.8	130	NA	NA	NA	NA	NA	NA	327.76	9.16	318.60	4.2
S-5	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	92	NA	NA	NA	NA	NA	NA	327.76	9.25	318.51	3.8
S-5 (D)	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	100	NA	NA	NA	NA	NA	NA	327.76	9.25	318.51	3.8

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-5	6/27/1999	223	NA	13.7	12.9	8.20	45.8	106	NA	NA	NA	NA	NA	NA	327.76	9.39	318.37	3.0
S-5	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	255	NA	NA	NA	NA	NA	NA	327.76	9.43	318.33	1.2
S-5	5/30/2001	<100	NA	<1.0	<1.0	<1.0	<1.0	NA	480	NA	NA	NA	NA	NA	327.76	9.47	318.29	1.1
S-5	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	210	NA	NA	NA	NA	NA	327.76	9.74	318.02	0.2
S-5	5/30/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	450	NA	NA	NA	NA	NA	327.43	8.87	318.56	1.7
S-5	5/3/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	470	NA	NA	NA	NA	NA	327.43	9.10	318.33	0.7
S-5	1/14/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	230	NA	NA	NA	NA	NA	327.43	8.43	319.00	NA
S-5	5/5/2005	76	NA	16	<0.50	<0.50	<0.50	NA	120	<0.50	<0.50	<0.50	630	NA	327.43	8.71	318.72	NA
S-5	08/05/2005	1,900	NA	57	7.5	22	17	NA	240	<4	<4	<4	480	NA	327.43	8.90	318.53	NA
S-5	9/16/2005	1,400	NA	87	2.0	7.8	5.8	NA	75	<4.0	<4.0	<4.0	630	NA	327.43	8.84	318.59	NA
S-5	11/8/2005	315	NA	35.8	<0.500	<0.500	1.07	NA	49.1	<0.500	<0.500	<0.500	<10.0	NA	327.43	8.86	318.57	NA
S-5	1/31/2006	335	NA	7.74	<0.500	<0.500	<0.500	NA	48.2	<0.500	<0.500	<0.500	337	NA	327.43	8.66	318.77	NA
S-5	5/16/2006	349	NA	3.54	<0.500	<0.500	<0.500	NA	24.7	<0.500	<0.500	<0.500	182	NA	327.43	9.00	318.43	NA
S-5	8/23/2006	<50.0	NA	5.39	<0.500	<0.500	<0.500	NA	17.0	<0.500	<0.500	<0.500	91.0	NA	327.43	8.97	318.46	NA
S-5	11/13/2006	420	NA	19	1.7	<0.50	1.7	NA	19	<0.50	<0.50	<0.50	80	NA	327.43	8.77	318.66	NA
S-5	2/1/2007	280	NA	14	2.1	<0.50	1.4	NA	13	<2.0	<2.0	<2.0	42	NA	327.43	9.30	318.13	NA
S-5	5/23/2007	590 n	NA	19	2.0	<1.0	0.92 o	NA	11	<2.0	<2.0	<2.0	24	NA	327.43	8.73	318.70	NA
S-5	8/7/2007	450 n	NA	10	1.0	<1.0	<1.0	NA	13	<2.0	<2.0	<2.0	17	NA	327.43	9.00	318.43	NA
S-5	11/29/2007	340 n	NA	4.1	0.34 o	<1.0	<1.0	NA	7.1	<2.0	<2.0	<2.0	<10	NA	327.43	9.06	318.37	NA
S-5	2/8/2008	270 n	NA	4.7	<1.0	<1.0	<1.0	NA	6.0	<2.0	<2.0	<2.0	<10	NA	327.43	8.75	318.68	NA
S-5	2/20/2008	340 n	NA	4.6	<1.0	<1.0	<1.0	NA	5.5	<2.0	<2.0	<2.0	<10	<100	327.43	9.03	318.40	NA
S-5	3/7/2008	220 n	NA	1.8	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	<100	327.43	9.20	318.23	NA
S-5	3/21/2008	150	NA	0.71	<1.0	<1.0	<1.0	NA	5.2	<2.0	<2.0	<2.0	<10	<100	327.43	9.43	318.00	NA
S-5	4/8/2008	120	NA	0.76	<1.0	<1.0	<1.0	NA	5.2	<2.0	<2.0	<2.0	<10	<100	327.43	9.11	318.32	NA
S-5	4/21/2008	190	NA	0.63	<1.0	<1.0	<1.0	NA	3.4	<2.0	<2.0	<2.0	<10	<100	327.43	9.17	318.26	NA
S-5	5/6/2008	150	NA	1.0	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	190	327.43	8.80	318.63	NA
S-5	5/21/2008	250	NA	1.6	<1.0	<1.0	<1.0	NA	3.8	<2.0	<2.0	<2.0	<10	<100	327.43	9.20	318.23	NA
S-5	8/6/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	6.2	<2.0	<2.0	<2.0	<10	NA	327.43	9.11	318.32	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-5	11/18/2008	93	NA	<0.50	<1.0	<1.0	<1.0	NA	3.5	<2.0	<2.0	<2.0	<10	NA	327.43	9.06	318.37	NA
S-5	1/20/2009	59	NA	<0.50	<1.0	<1.0	<1.0	NA	2.7	<2.0	<2.0	<2.0	<10	NA	327.43	9.60	317.83	NA
S-5	5/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	2.5	<2.0	<2.0	<2.0	<10	NA	327.43	8.94	318.49	NA
S-5	7/6/2009	62	NA	<0.50	<1.0	<1.0	<1.0	NA	2.5	<2.0	<2.0	<2.0	11	NA	327.43	9.18	318.25	NA
S-6	1/25/1991	<50	<50	<0.5	1.7	<0.5	2.8	NA	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	4/16/1991	<50	<50	<0.5	<0.5	<0.5	0.6	NA	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	7/24/1991	<50	<50	<0.5	<0.5	<0.5	0.5	NA	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	10/18/1991	<50	<50	<0.5	<0.5	<0.5	0.5	NA	NA	NA	NA	NA	NA	NA	326.56	8.84	317.22	NA
S-6	1/23/1992	<50	<50	<0.5	<0.5	<0.5	0.5	NA	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	7/17/1992	400	130	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	1/23/1993	<50	230 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	7.82	318.74	NA
S-6	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	9.00	317.56	NA
S-6	9/22/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	8.61	317.96	NA
S-6	12/8/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	10.02	316.54	NA
S-6	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	8.88	317.68	NA
S-6	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	9.04	317.52	NA
S-6	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	8.54	318.02	NA
S-6	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.56	8.62	317.94	NA
S-6	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	326.56	8.60	317.96	2.6
S-6	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	326.56	7.90	318.66	2.2
S-6	6/27/1999	430	NA	50.1	30.5	15.2	83.5	8.05	NA	NA	NA	NA	NA	NA	326.56	8.01	318.55	2.3
S-6	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	326.56	8.84	317.72	2.0
S-6	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	NA	326.56	8.54	318.02	1.9
S-6	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	326.56	8.48	318.08	1.3
S-6	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	8.7	NA	NA	NA	NA	NA	326.35	7.36	318.99	1.0

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-6	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	NA	326.35	8.08	318.27	0.9
S-6	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	NA	326.35	7.38	318.97	NA
S-6	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	NA	326.35	7.55	318.80	NA
S-6	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	326.35	7.61	318.74	NA
S-6	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	326.35	7.64	318.71	NA
S-6	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	30.5	NA	326.35	7.90	318.45	NA
S-6	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	326.35	8.16	318.19	NA
S-6	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	10.9	NA	326.35	7.77	318.58	NA
S-6	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<20	NA	326.35	8.15	318.20	NA
S-6	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.2	<2.0	<2.0	<2.0	<5.0	NA	326.35	8.36	317.99	NA
S-6	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	7.80	318.55	NA
S-6	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	0.39 o	<2.0	<2.0	<2.0	<10	NA	326.35	8.07	318.28	NA
S-6	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	8.17	318.18	NA
S-6	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	7.67	318.68	NA
S-6	5/21/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	<100	326.35	8.17	318.18	NA
S-6	8/6/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	7.89	318.46	NA
S-6	11/18/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	8.30	318.05	NA
S-6	1/20/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	8.01	318.34	NA
S-6	5/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	7.96	318.39	NA
S-6	7/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.35	8.32	318.03	NA
S-7	1/25/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	4/16/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	10/18/1991	<50	140 f	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	8.92	317.57	NA
S-7	1/23/1992	<50	140 f	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	7/17/1992	<50	<50	<0.5	1.8	0.6	4.1	NA	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-7	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	1/23/1993	<50	110 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	8.06	318.43	NA
S-7	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	8.94	317.55	NA
S-7	9/22/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	8.57	317.92	NA
S-7	12/8/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	9.00	317.49	NA
S-7	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	8.96	317.53	NA
S-7	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	9.12	317.37	NA
S-7	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	8.58	317.91	NA
S-7	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	326.49	8.64	317.85	NA
S-7	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	326.49	8.74	317.75	2.3
S-7	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	326.49	8.00	318.49	2.5
S-7	6/27/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.00	NA	NA	NA	NA	NA	NA	326.49	8.75	317.74	2.9
S-7	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	326.49	8.96	317.53	2.2
S-7	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	NA	326.49	8.65	317.84	2.0
S-7	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	326.49	8.55	317.94	2.3
S-7	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	12	NA	NA	NA	NA	NA	326.36	7.88	318.48	1.8
S-7	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	100	NA	NA	NA	NA	NA	326.36	8.30	318.06	1.2
S-7	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	41	NA	NA	NA	NA	NA	326.36	7.70	318.66	NA
S-7	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	91	<0.50	<0.50	6.8	<5.0	NA	326.36	7.60	318.76	NA
S-7	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	100	<2.0	<2.0	7.5	<5.0	NA	326.36	8.42	317.94	NA
S-7	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	124	<0.500	<0.500	8.70	<10.0	NA	326.36	7.61	318.75	NA
S-7	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	93.0	<0.500	<0.500	4.50	<10.0	NA	326.36	7.85	318.51	NA
S-7	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	76.3	<0.500	<0.500	2.98	<10.0	NA	326.36	8.08	318.28	NA
S-7	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	34.7	<0.500	<0.500	2.02	<10.0	NA	326.36	7.93	318.43	NA
S-7	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	27	<0.50	<0.50	1.6	<20	NA	326.36	8.15	318.21	NA
S-7	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	45	<2.0	<2.0	2.9	28	NA	326.36	8.35	318.01	NA
S-7	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	1.7	<2.0	<2.0	<2.0	<10	NA	326.36	8.11	318.25	NA
S-7	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	23	<2.0	<2.0	<2.0	<10	NA	326.36	8.36	318.00	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-7	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	10	<2.0	<2.0	<2.0	<10	NA	326.36	8.19	318.17	NA
S-7	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	9.2	<2.0	<2.0	<2.0	<10	NA	326.36	7.73	318.63	NA
S-7	5/21/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	8.8	<2.0	<2.0	<2.0	<10	<100	326.36	8.10	318.26	NA
S-7	8/6/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	1.2	<2.0	<2.0	<2.0	<10	NA	326.36	8.49	317.87	NA
S-7	11/18/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	7.6	<2.0	<2.0	<2.0	<10	NA	326.36	8.31	318.05	NA
S-7	1/20/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	7.7	<2.0	<2.0	<2.0	<10	NA	326.36	8.39	317.97	NA
S-7	5/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	6.4	<2.0	<2.0	<2.0	<10	NA	326.36	8.39	317.97	NA
S-7	7/6/2009	58	NA	<0.50	<1.0	<1.0	<1.0	NA	4.3	<2.0	<2.0	<2.0	<10	NA	326.36	8.63	317.73	NA
S-8	1/25/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	4/16/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	10/18/1991	<50	360 f	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.62	317.70	NA
S-8	1/23/1992	<50	90	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	7/17/1992	53	<50	<0.5	1	<0.5	1.8	NA	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	1/23/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.00	318.32	NA
S-8	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.77	317.55	NA
S-8	9/22/1993	<50	160	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.67	317.65	NA
S-8	12/8/1993	<50	210	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.76	317.56	NA
S-8	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.66	317.66	NA
S-8	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.78	317.54	NA
S-8	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.42	317.90	NA
S-8	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	325.32	7.50	317.82	NA
S-8	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	325.32	7.56	317.76	1.6
S-8	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	325.32	7.64	317.68	2.0
S-8	6/27/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.00	NA	NA	NA	NA	NA	NA	325.32	7.75	317.57	2.3

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-8	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	325.32	8.02	317.30	1.8
S-8	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	NA	325.32	7.34	317.98	1.8
S-8	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	325.32	7.45	317.87	1.8
S-8	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	14	NA	NA	NA	NA	NA	325.03	7.39	317.64	3.0
S-8	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	NA	325.03	7.00	318.03	1.0
S-8	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	NA	325.03	8.65	316.39	NA
S-8	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	NA	325.03	6.73	318.30	NA
S-8	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	325.03	6.93	318.10	NA
S-8	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	325.03	6.95	318.08	NA
S-8	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	325.03	6.91	318.12	NA
S-8	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	325.03	7.02	318.01	NA
S-8	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	325.03	6.98	318.05	NA
S-8	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<20	NA	325.03	7.09	317.94	NA
S-8	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	325.03	7.27	317.76	NA
S-8	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	6.80	318.23	NA
S-8	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	7.04	317.99	NA
S-8	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	7.04	317.99	NA
S-8	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	6.77	318.26	NA
S-8	5/21/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	<100	325.03	7.10	317.93	NA
S-8	8/6/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	6.94	318.09	NA
S-8	11/18/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	7.10	317.93	NA
S-8	1/20/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	7.18	317.85	NA
S-8	1/20/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	7.18	317.85	NA
S-8	5/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	7.01	318.02	NA
S-8	7/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.03	7.83	317.20	NA
S-9	11/22/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	325.89	7.61	318.28	NA
S-9	11/27/2006	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	325.89	7.77	318.12	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-9	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	325.89	8.14	317.75	NA
S-9	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	7.85	318.04	NA
S-9	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	7.77	318.12	NA
S-9	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	7.99	317.90	NA
S-9	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	7.78	318.11	NA
S-9	5/21/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	<100	325.89	7.84	318.05	NA
S-9	8/6/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	7.69	318.20	NA
S-9	11/18/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	7.93	317.96	NA
S-9	1/20/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	8.13	317.76	NA
S-9	5/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	8.02	317.87	NA
S-9	7/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	325.89	8.06	317.83	NA
S-10	6/30/2009	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.24	8.04	318.20	NA
S-10	7/6/2009	340	NA	<1.0	<2.0	<2.0	<2.0	NA	<2.0	<4.0	<4.0	<4.0	5,100	NA	326.24	8.11	318.13	NA
S-11	6/30/2009	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.12	7.97	318.15	NA
S-11	7/6/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	326.12	7.98	318.14	NA
S-12	6/30/2009	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.91	8.49	318.42	NA
S-12	7/6/2009	83	NA	<0.50	<1.0	<1.0	<1.0	NA	37	<2.0	<2.0	<2.0	<10	NA	326.91	8.89	318.02	NA
EW-1	2/20/2008	9,100 n	NA	110	180	840	146.9	NA	<5.0	<10	<10	<10	<50	<500	NA	8.07	NA	NA
EW-1	3/7/2008	11,000 n	NA	380	200	370	317.0	NA	<5.0	<10	<10	<10	<50	<500	NA	17.80	NA	NA
EW-1	3/21/2008	14,000	NA	690	430	750	614	NA	<5.0	<10	<10	<10	<50	<500	NA	8.61	NA	NA
EW-1	4/8/2008	12,000	NA	430	200	430	302	NA	<5.0	<10	<10	<10	<50	<500	NA	8.40	NA	NA
EW-1	4/21/2008	22,000	NA	430	510	1,100	747	NA	<5.0	<10	<10	<10	71	<500	NA	8.33	NA	NA
EW-1	5/6/2008	20,000	NA	280	620	1,000	616	NA	<10	<20	<20	<20	<100	<1,000	NA	8.30	NA	NA
EW-1	5/21/2008	17,000	NA	180	440	830	484	NA	<10	<20	<20	<20	<100	<1,000	NA	8.60	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
EW-1	8/6/2008	12,000	NA	140	79	720	110	NA	<10	<20	<20	<20	<100	NA	NA	8.41	NA	NA
EW-1	11/18/2008	16,000	NA	94	170	970	310	NA	<20	<40	<40	<40	<200	NA	NA	8.03	NA	NA
EW-1	1/20/2009	10,000	NA	110	58	440	61	NA	<20	<40	<40	<40	<200	NA	NA	8.98	NA	NA
EW-1	5/6/2009	14,000	NA	73	120	690	120	NA	<20	<40	<40	<40	<200	NA	NA	7.92	NA	NA
EW-1	7/6/2009	17,000	NA	18	82	750	140	NA	<10	<20	<20	<20	<100	NA	326.98	8.21	318.77	NA
EW-2	12/14/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	6.25	NA	NA
EW-2	2/8/2008	70 n,p	NA	<0.50	<1.0	<1.0	<1.0	NA	8.9	<2.0	<2.0	<2.0	940	NA	NA	8.42	NA	NA
EW-2	2/20/2008	59 n,p	NA	<1.0	<2.0	<2.0	<2.0	NA	10	<4.0	<4.0	<4.0	1,300	<200	NA	8.85	NA	NA
EW-2	3/7/2008	850 n,p	NA	<1.0	<2.0	<2.0	<2.0	NA	8.0	<4.0	<4.0	<4.0	1,200	<200	NA	9.75	NA	NA
EW-2	3/21/2008	350	NA	5.3	4.6	6.2	18	NA	<2.0	<4.0	<4.0	<4.0	990	<200	NA	9.51	NA	NA
EW-2	4/8/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	8.9	<2.0	<2.0	<2.0	180	<100	NA	9.12	NA	NA
EW-2	4/21/2008	140	NA	<0.50	<1.0	<1.0	<1.0	NA	57	<2.0	<2.0	<2.0	230	<100	NA	8.86	NA	NA
EW-2	5/6/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	8.3	<2.0	<2.0	<2.0	590	<100	NA	8.87	NA	NA
EW-2	5/21/2008	53	NA	<0.50	<1.0	<1.0	<1.0	NA	11	<2.0	<2.0	<2.0	380	<100	NA	9.00	NA	NA
EW-2	8/6/2008	60	NA	<0.50	<1.0	<1.0	<1.0	NA	10	<2.0	<2.0	<2.0	560	NA	NA	8.81	NA	NA
EW-2	11/18/2008	140	NA	8.0	<1.0	6.2	29	NA	7.4	<2.0	<2.0	<2.0	410	NA	NA	8.92	NA	NA
EW-2	1/20/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	6.8	<2.0	<2.0	<2.0	390	NA	NA	9.28	NA	NA
EW-2	5/6/2009	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.21	NA	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	--------------	----------------------------	--------------------------	------------------------

Abbreviations:

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to May 30, 2001 analyzed by EPA Method 8015.

TEPH = Total petroleum hydrocarbons as diesel by modified EPA Method 8015.

BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to May 30, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260B

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260B

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260B

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260B

TOC = Top of Casing Elevation

TOB = Top of Wellbox Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ug/L = Parts per billion

ppm = Parts per million

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	--------------	----------------------------	--------------------------	------------------------

Notes:

Ethanol analyzed by EPA Method 8260B

a = Compounds detected as TEPH appear to be the less volatile constituents of gasoline.

b = The concentration reported as TEPH primarily due to the presence of a heavier petroleum product.

c = The concentration reported as TEPH due to the presence of a lighter petroleum product.

d = Concentrations reported as diesel includes a heavier petroleum product.

e = Compounds detected within the chromatographic range of TEPH but not characteristic of the standard gasoline pattern.

f = There was insufficient preservative to reduce the sample pH to less than 2.

g = Compounds detected within the chromatographic range of TEPH but not characteristic of the standard diesel pattern.

h = The chromatographic pattern of the purgeable hydrocarbons found in the sample is similar to the pattern of weathered gasoline.

i = DO reading not taken.

j = The results may be biased slightly high.

k = The hydrocarbon reported in the gasoline range does not match the laboratory standard.

l = Extracted out of holding time.

m = Analyte was detected in the associated Method Blank.

n = Analyzed by EPA Method 8015B (M).

o = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.

p = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Site surveyed April 16, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.

Beginning May 30, 2003, depth to water referenced to Top of Casing elevation.

Wells S-2, S-3 and S-9 were surveyed on November 22, 2006 by Mid Coast Engineers.

Wells S-10 through S-12 and EW-1 were surveyed on June 25, 2009 by Mid Coast Engineers.

APPENDIX A
AGENCY CORRESPONDENCE

ALAMEDA COUNTY
HEALTH CARE SERVICES
AGENCY
DAVID J. KEARS, Agency Director



ENVIRONMENTAL HEALTH SERVICES
ENVIRONMENTAL PROTECTION
1131 Harbor Bay Parkway, Suite 250
Alameda, CA 94502-6577
(510) 567-6700
FAX (510) 337-93

July 14, 2009

Mr. Denis Brown
Shell Oil Products US
20945 S. Wilmington Ave.
Carson, CA 90810-1039

Subject: Groundwater Sampling Frequency Reductions in Response to State Water Resources Control Board Resolution No. 2009-0042

Dear Mr. Brown:

Alameda County Environmental Health (ACEH) staff has reviewed your proposal to reduce groundwater monitoring frequency as summarized in the attached table. This table was submitted to ACEH via email on July 13, 2009. In accordance with State Water Resources Control Board Resolution No. 2009-0042, your proposal to reduce sampling frequencies and modify analytes as proposed for the sites listed in the attached table, is acceptable. Please submit groundwater monitoring reports no later than 45 days following the end of the quarter in which the sampling was conducted.

If you have any questions, please call me at (510) 567-6791 or send me an electronic mail message at jerry.wickham@acgov.org.

Sincerely,

Jerry Wickham, California PG 3766, CEG 1177, and CHG 297
Senior Hazardous Materials Specialist

Attachment: Proposed Groundwater Monitoring Frequencies

Enclosure: ACEH Electronic Report Upload (ftp) Instructions

cc: Suzanne McClurkin-Nelson, Delta Environmental, 312 Piercy Road, San Jose, CA 95138

Regina Bussard, Delta Environmental, 312 Piercy Road, San Jose, CA 95138

Cheryl Dizon, QIC 80201, Zone 7 Water Agency, 100 North Canyons Parkway
Livermore, CA 94551

Danielle Stefani, Livermore-Pleasanton Fire Department, 3560 Nevada Street
Pleasanton, CA 94566

Denis Brown
July 14, 2009
Page 2

Donna Drogos, ACEH
Jerry Wickham, ACEH
Geotracker
File (RO213; RO0372; RO2882; RO0363; RO0360; RO0194; RO2522; RO2744)

ACEH Case Number	Site Address	City	Previous Schedule (Enter Number of Wells)					Proposed Schedule (Enter Number of Wells)					Reasons for Monthly or Quarterly Groundwater Monitoring (Check Where Applicable)							
			Monthly	Quarterly	Semiannual	Annual	Other	Monthly (Show total number of wells and list individual well designations)	Quarterly (Show total number of wells and list individual well designations)	Semiannual (Also Show Proposed Quarters 1&3 or 2&4)	Annual	Other	Assessment Incomplete	WDR Permit Required	Well Being Sampled during Remedial Action for Progress Assessment	Well Being Sampled for Free Product Evaluation and Reduction Verification	Well Being Sampled within First Year of Being Installed	Well Being Sampled for Post-Remedial Action Verification Monitoring	Well Has not Shown Reliable Consistency Yet to Warrant Reduction in Sampling Frequency	Well is Last Point of Monitoring Prior to Possible Impact to Receptor
RO0000213	11989 Dublin Boulevard	Dublin			6					6 (1/3)										
RO0000372	15275 Washington Avenue	San Leandro			4	8				4 (1/3)	8 (1Q)									
RO0002882	1801 Santa Rita Road	Pleasanton		6			2			6 (2/4)	2 (2Q)	Discontinue analyses for DIPE, ETBE, TAME, EDB, and 1,2-DCA (all wells)								
RO0000363	3790 Hopyard Road	Pleasanton		20						10 (1/3)	10 (1Q)	Reduce analyses for DIPE, ETBE, TAME, 1,2-DCA, and ethanol to annual (1Q-all wells)								
RO0000360	4226 First Street (aka 4212)	Pleasanton		5					5 wells MW-1 MW-1B MW-2 MW-3 MW-4									X		
RO0000194	5251 Hopyard Road	Pleasanton		10						9 (1/3)	4 (1Q)	Discontinue analyses for DIPE ETBE and TAME (all wells)								
RO0002522	6750 Santa Rita Road	Pleasanton		7						7 (2/4)		Discontinue analyses for DIPE, ETBE, TAME, EDB, and 1,2-DCA (all wells)								
RO0002744	8999 San Ramon Road	Dublin	10 to 16				6 wells destroyed in 2008 due to onsite redevelopment		9 wells MW-5 MW-5B MW-5C MW-7 MW-8 MW-8B MW-9 MW-11B MW-12			Discontinue monitoring and sampling MW-11			X (new replacement wells to be installed in 2009-2010)			X (issues with several wells being dry or having insufficient water for sampling)		

Alameda County Environmental Cleanup Oversight Programs (LOP and SLIC)	ISSUE DATE: July 5, 2005
	REVISION DATE: March 27, 2009
	PREVIOUS REVISIONS: December 16, 2005, October 31, 2005
SECTION: Miscellaneous Administrative Topics & Procedures	SUBJECT: Electronic Report Upload (ftp) Instructions

The Alameda County Environmental Cleanup Oversight Programs (LOP and SLIC) require submission of all reports in electronic form to the county's ftp site. Paper copies of reports will no longer be accepted. The electronic copy replaces the paper copy and will be used for all public information requests, regulatory review, and compliance/enforcement activities.

REQUIREMENTS

- Entire report including cover letter must be submitted to the ftp site as a **single portable document format (PDF) with no password protection**. (Please do not submit reports as attachments to electronic mail.)
- It is **preferable** that reports be converted to PDF format from their original format, (e.g., Microsoft Word) rather than scanned.
- Signature pages and perjury statements **must** be included and have either original or electronic signature.
- **Do not password protect the document**. Once indexed and inserted into the correct electronic case file, the document will be secured in compliance with the County's current security standards and a password. **Documents with password protection will not be accepted.**
- Each page in the PDF document should be rotated in the direction that will make it easiest to read on a computer monitor.
- Reports must be named and saved using the following naming convention:
RO#_Report Name_Year-Month-Date (e.g., RO#5555_WorkPlan_2005-06-14)

Additional Recommendations

- A separate copy of the tables in the document should be submitted by e-mail to your Caseworker in **Excel** format. These are for use by assigned Caseworker only.

Submission Instructions

- 1) Obtain User Name and Password:
 - a) Contact the Alameda County Environmental Health Department to obtain a User Name and Password to upload files to the ftp site.
 - i) Send an e-mail to dehloptoxic@acgov.org
 - Or
 - ii) Send a fax on company letterhead to (510) 337-9335, to the attention of My Le Huynh.
 - b) In the subject line of your request, be sure to include **"ftp PASSWORD REQUEST"** and in the body of your request, include the **Contact Information, Site Addresses**, and the **Case Numbers (RO# available in Geotracker) you will be posting for**.

- 2) Upload Files to the ftp Site
 - a) Using Internet Explorer (IE4+), go to <ftp://alcoftp1.acgov.org>
 - (i) Note: Netscape and Firefox browsers will not open the FTP site.
 - b) Click on File, then on Login As.
 - c) Enter your User Name and Password. (Note: Both are Case Sensitive.)
 - d) Open "My Computer" on your computer and navigate to the file(s) you wish to upload to the ftp site.
 - e) With both "My Computer" and the ftp site open in separate windows, drag and drop the file(s) from "My Computer" to the ftp window.

- 3) Send E-mail Notifications to the Environmental Cleanup Oversight Programs
 - a) Send email to dehloptoxic@acgov.org notify us that you have placed a report on our ftp site.
 - b) Copy your Caseworker on the e-mail. Your Caseworker's e-mail address is the entire first name then a period and entire last name @acgov.org. (e.g., firstname.lastname@acgov.org)
 - c) The subject line of the e-mail must start with the RO# followed by **Report Upload**. (e.g., Subject: RO1234 Report Upload) If site is a new case without an RO# use the street address instead.
 - d) If your document meets the above requirements and you follow the submission instructions, you will receive a notification by email indicating that your document was successfully uploaded to the ftp site.

APPENDIX B

**BLAINE TECH SERVICES, INC.
FIELD DATA SHEETS**

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 5251 HOPKARD St. Date 7/6/09

Job Number 090706-RM1 Technician R. McCarty Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
S-1	X								NO TAG
S-2	X								NO TAG
S-3	X								NO TAG
S-4	X								NO TAG
S-5	X	X							NO TAG
S-6	X								NO TAG
S-7	X								NO TAG
S-8									CHRISBY BOX
S-9	X	X							NO TAG
S-10	X								NO TAG
S-11	X	X							NO TAG
S-12	X								NO TAG
EW-1	X	X							NO TAG (EW)

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: _____

WELL GAUGING DATA

 Project # 090706-RM1

 Date 7/6/09

 Client SHELL

 Site 5251 HOPKINS Rd. Pleasanton

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	Notes
S-1	0844	3					8.42	28.39		10
S-2	0848	3					8.53	24.05		7
S-3	0839	3					8.80	24.10		9
S-4	0832	3					8.79	24.18		1
S-5	0828	3					9.18	24.02		8
S-6	0920	3					8.32	25.42		TR
S-7	0915	3					8.63	25.01		TR
S-8	1006	3					7.83	24.53		TR
S-9	0805	2					8.06	19.74		1
S-10	0825	4					8.11	19.14		1
S-11	0811	4					7.98	19.63		1
S-12	0836	4					8.89	20.19		1
EW-1	0842	4					8.21	19.70	✓	1

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-RM		Site: 5251 HOPYARD RD. Pleasanton	
Sampler: P.M		Date: 7/6/09	
Well I.D.: S-1		Well Diameter: 2 <u>(3)</u> 4 6 8	
Total Well Depth (TD): 28.39		Depth to Water (DTW): 8.42	
Depth to Free Product:		Thickness of Free Product (feet):	
Referenced to: <u>(PVC)</u> Grade		D.O. Meter (if req'd): YSI HACH	
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 12.41			

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
~~Electric Submersible~~ Other _____ Dedicated Tubing

Other: _____

<u>7.4</u> (Gals.) X	<u>3</u>	=	<u>22.2</u> Gals.
I Case Volume	Specified Volumes		Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>μS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
1323	68.3	7.85	1471	353	7.4	
1325	67.9	7.67	1704	71000	14.8	
1327	68.0	7.59	1744	71000	22.2	
						DTW = 7 25.02

Did well dewater? Yes (No) Gallons actually evacuated: 22.2

Sampling Date: 7/6/09 Sampling Time: 1400 Depth to Water: 12.36

Sample I.D.: S-1 Laboratory: (CalScience) Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: Sees see

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-EM	Site: 5251 HOPKINSON RD, Pleasanton
Sampler: E.M.	Date: 7/6/09
Well I.D.: S-2	Well Diameter: 2 (3) 4 6 8
Total Well Depth (TD): 24.05	Depth to Water (DTW): 8.53 15.5'
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.63	

Purge Method: Bailer Waterra Sampling Method: ~~Bailer~~
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
~~Electric Submersible~~ Other _____ Dedicated Tubing

Other: _____

5.8 (Gals.) X 3 = 17.4 Gals.
 I Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1339	68.3	7.84	3251	412	5.8	
1340	67.9	7.67	3195	193	11.6	
1341	67.8	7.65	3157	83.3	17.4	

Did well dewater? Yes No Gallons actually evacuated: 17.4

Sampling Date: 7/6/09 Sampling Time: 1355 Depth to Water: 11.61

Sample I.D.: S-2 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See GC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>090706-EM1</u>	Site: <u>5251 HOPKINS Rd. Pleasanton</u>
Sampler: <u>RM</u>	Date: <u>7/6/09</u>
Well I.D.: <u>S-3</u>	Well Diameter: 2 <u>3</u> 4 6 8 _____
Total Well Depth (TD): <u>24.10</u>	Depth to Water (DTW): <u>8.80</u> 15.3
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.86</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing
 Other: _____

<u>5.7</u>	(Gals.) X	<u>3</u>	=	<u>17.1</u>	Gals.
1 Case Volume		Specified Volumes		Calculated Volume	

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
1241	69.2	7.46	2253	137	5.7	<u>odor</u>
1243	68.3	7.34	2605	338	11.4	
1245	68.2	7.27	2597	224	17.1	

Did well dewater? Yes No Gallons actually evacuated: 17.1

Sampling Date: 7/6/09 Sampling Time: 1300 Depth to Water: 11.85

Sample I.D.: S-3 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See We

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-PM1	Site: 5251 HOPYARD Rd. Pleasanton
Sampler: PM	Date: 7/6/09
Well I.D.: S-4	Well Diameter: 2 (3) 4 6 8
Total Well Depth (TD): 24.18	Depth to Water (DTW): 8.79 1534
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.86	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

Other: _____

5.7 (Gals.) X 3 = 17.1 Gals.
 1 Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1220	69.3	7.91	978.4	783	5.7	
1221	68.0	7.92	1076	298	11.4	
1222	67.9	7.88	1025	112	17.1	

Did well dewater? Yes No Gallons actually evacuated: 17.1

Sampling Date: 7/6/09 Sampling Time: 1230 Depth to Water: 11.57

Sample I.D.: S-4 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE ACC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-RM1	Site: 5251 HOPKINSON RD. Pleasanton
Sampler: RM	Date: 7/6/09
Well I.D.: S5	Well Diameter: 2 (3) 4 6 8
Total Well Depth (TD): 24.02	Depth to Water (DTW): 9.18 1484
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 12.04	

Purge Method: Bailer Waterra Sampling Method: ~~Bailer~~
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
~~Electric Submersible~~ Other _____ Dedicated Tubing

Other: _____

5.5 (Gals.) X 3 = 16.5 Gals.
 1 Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1140	65.3	7.65	1558	352	5.5	
1141	65.2	7.57	1490	235	11.0	
1142	65.5	7.49	1489	96.4	16.5	

Did well dewater? Yes No Gallons actually evacuated: 16.5

Sampling Date: 7/6/09 Sampling Time: 1150 Depth to Water: 11.78

Sample I.D.: S-5 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SOB COC

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-2M1	Site: 5251 HOPKINS RA Pleasanton
Sampler: RM	Date: 7/6/09
Well I.D.: S-6	Well Diameter: 2 3 4 6 8 _____
Total Well Depth (TD): 25.42	Depth to Water (DTW): 8.32
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.74 (TR)	

Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible Waterra Peristaltic Extraction Pump Other _____

Sampling Method: ~~Bailer~~ Disposable Bailer Extraction Port Dedicated Tubing Other: _____

6.4 (Gals.)	X	3	=	19.2	Gals.
I Case Volume		Specified Volumes		Calculated Volume	

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
0923	70.2	7.14	3792	299	6.4	
0924	69.7	6.94	7453	606	12.8	
0926	69.9	6.93	7584	496	19.2	

Did well dewater? Yes No Gallons actually evacuated: 19.2

Sampling Date: 7/6/09 Sampling Time: 0931 Depth to Water: 19.19 (TRAFFIC)

Sample I.D.: S-6 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE DOC

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: _____

D.O. (if req'd):	Pre-purge:		mg/L	Post-purge:		mg/L
O.R.P. (if req'd):	Pre-purge:		mV	Post-purge:		mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-EM	Site: 5250 HOPKINSON Rd. Pleasanton
Sampler: EM	Date: 7/16/01
Well I.D.: S-7	Well Diameter: 2 3 4 6 8 _____
Total Well Depth (TD): 25.01	Depth to Water (DTW): 8.63
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.90 (TR)	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

Other: _____

6.1 (Gals.) X 3 = 18.3 Gals.
 1 Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
0939	69.9	7.53	4089	193	6.1	
0940	70.2	6.96	8120	121	12.2	
0941	70.2	6.93	7989	64.2	18.3	

Did well dewater? Yes No Gallons actually evacuated: 18.3

Sampling Date: 7/16/01 Sampling Time: 0946 Depth to Water: 14.21

Sample I.D.: S-7 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE COC

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-RM	Site: 5251 HOPKINSON RD. Pleasanton
Sampler: RM	Date: 7/6/09
Well I.D.: 8	Well Diameter: 2 3 4 6 8
Total Well Depth (TD): 24.53	Depth to Water (DTW): 7.83
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.17 (TR)	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

Other: _____

$$0.2 \text{ (Gals.)} \times 3 = 18.6 \text{ Gals.}$$
 1 Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
1009	66.7	6.88	14.10	480	6.2	
1010	66.8	6.68	16.10	657	12.4	
1011	66.7	6.61	15.92	342	18.6	

Did well dewater? Yes No Gallons actually evacuated: 18.6

Sampling Date: 7/6/09 Sampling Time: 1010 Depth to Water: 15.73 (TR)

Sample I.D.: 8-8 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE CDC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090706-RM1	Site: 5251 HAYWARD Rd Pleasanton
Sampler: RM	Date: 7/2/09
Well I.D.: S-9	Well Diameter: (2) 3 4 6 8
Total Well Depth (TD): 19.74	Depth to Water (DTW): 8.06 1168
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 10.39	

Purge Method: ~~Bailer~~ Water Watterra Sampling Method: ~~Bailer~~ Disposable Bailer Peristaltic Disposable Bailer Positive Air Displacement Extraction Pump Extraction Port Electric Submersible Other _____ Dedicated Tubing

Other: _____

$$19 \text{ (Gals.)} \times 3 = 5.7 \text{ Gals.}$$
 I Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1052	68.9	7.91	3905	71000	1.9	Cloudy
1055	69.2	7.60	4085	71000	3.8	" "
1058	71.3	7.70	4024	71000	5.7	" "

Did well dewater? Yes No Gallons actually evacuated: 5.7

Sampling Date: 7/2/09 Sampling Time: 1105 Depth to Water: 9.65

Sample I.D.: S-9 Laboratory: (CalScience) Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: ~~SOB~~ COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>0910706-RM</u>	Site: <u>5251 HOPKINS Rd. Pleasanton</u>
Sampler: <u>RM</u>	Date: <u>7/6/09</u>
Well I.D.: <u>S-10</u>	Well Diameter: 2 3 <u>(4)</u> 6 8
Total Well Depth (TD): <u>19.14</u>	Depth to Water (DTW): <u>8.11</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>(PVC)</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>10.31</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

Other: _____

<u>7.2</u>	(Gals.) X	<u>3</u>	=	<u>21.6</u>	Gals.
I Case Volume		Specified Volumes		Calculated Volume	

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>US</u>)	Turbidity (NTUs)	Gals. Removed	Observations
<u>1119</u>	<u>69.3</u>	<u>8.53</u>	<u>2438</u>	<u>71000</u>	<u>7.2</u>	
<u>1121</u>	<u>68.2</u>	<u>8.14</u>	<u>2881</u>	<u>71000</u>	<u>14.4</u>	
<u>1123</u>	<u>68.1</u>	<u>8.12</u>	<u>2779</u>	<u>71000</u>	<u>21.6</u>	

Did well dewater? Yes (No) Gallons actually evacuated: 21.6

Sampling Date: 7/6/09 Sampling Time: 1155 Depth to Water: 10.30 (wanted)

Sample I.D.: S-10 Laboratory: (CalScience) Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>090706 EMU</u>	Site: <u>S251 HOPKINS RD. Pleasanton</u>
Sampler: <u>PM</u>	Date: <u>7/6/09</u>
Well I.D.: <u>S-11</u>	Well Diameter: 2 3 <u>(4)</u> 6 8 _____
Total Well Depth (TD): <u>19.63</u>	Depth to Water (DTW): <u>7.98</u> 1165
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>(PVC)</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>10.31</u>	

Purge Method: Bailer Watera Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
~~Electric Submersible~~ Other _____ Dedicated Tubing
 Other: _____

<u>7.6</u> (Gals.) X	<u>3</u>	=	<u>22.8</u> Gals.
1 Case Volume	Specified Volumes		Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
1025	<u>66.7</u>	<u>7.77</u>	<u>7619</u>	<u>71000</u>	<u>7.6</u>	
1027	<u>66.8</u>	<u>7.70</u>	<u>8341</u>	<u>71000</u>	<u>15.2</u>	
1029	<u>66.8</u>	<u>7.48</u>	<u>8423</u>	<u>71000</u>	<u>22.8</u>	
1031	<u>67.1</u>	<u>7.43</u>	<u>8436</u>	<u>71000</u>	<u>30.4</u>	

Did well dewater? Yes No Gallons actually evacuated: 30.4

Sampling Date: 7/6/09 Sampling Time: 1040 Depth to Water: 10.27

Sample I.D.: S-11 Laboratory: (CalScience) Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE WC

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>090706-RM1</u>	Site: <u>5251 HOPYARD RD. Pleasanton</u>
Sampler: <u>RM</u>	Date: <u>7/6/09</u>
Well I.D.: <u>S-12</u>	Well Diameter: 2 3 <u>4</u> 6 8 _____
Total Well Depth (TD): <u>20.19</u>	Depth to Water (DTW): <u>8.89</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.15</u>	

Purge Method: Bailer Water Peristaltic Extraction Pump Other _____

Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing Other _____

$\frac{7.4 \text{ (Gals.)} \times 3}{1 \text{ Case Volume}} = 22.2 \text{ Gals.}$ <p style="margin: 0;">Specified Volumes Calculated Volume</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1201	67.0	7.92	1604	231	7.4	
1203	66.3	7.78	1741	952	14.8	
1205	66.1	7.78	1761	7100	22.2	

Did well dewater? Yes No Gallons actually evacuated: 22.2

Sampling Date: 7/6/09 Sampling Time: 1210 Depth to Water: 11.12

Sample I.D.: S-12 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SES WC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>090706-RM1</u>	Site: <u>5251 HOFYARD Rd. Pleasanton</u>
Sampler: <u>EM</u>	Date: <u>7/6/09</u>
Well I.D.: <u>EW-1</u>	Well Diameter: 2 3 <u>(4)</u> 6 8 _____
Total Well Depth (TD): <u>19.70</u>	Depth to Water (DTW): <u>8.21</u> 11.49
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>10.50</u>	

Purge Method: Bailer Disposable Bailer Positive Air Displacement <input checked="" type="checkbox"/> Electric Submersible	Waterra Peristaltic Extraction Pump Other _____	Sampling Method: <u>Bailer</u> Disposable Bailer Extraction Port Dedicated Tubing Other: _____
--	--	--

<u>7.5</u> (Gals.) X	<u>3</u>	= <u>22.5</u> Gals.
I Case Volume	Specified Volumes	Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
<u>1305</u>	<u>71.0</u>	<u>7.71</u>	<u>1177</u>	<u>105</u>	<u>7.5</u>	
<u>1307</u>	<u>69.9</u>	<u>7.24</u>	<u>1271</u>	<u>66.0</u>	<u>15.0</u>	
<u>1309</u>	<u>69.6</u>	<u>7.18</u>	<u>1321</u>	<u>85.0</u>	<u>22.5</u>	

Did well dewater? Yes No Gallons actually evacuated: 22.5

Sampling Date: 7/6/09 Sampling Time: 1320 Depth to Water: 10.47

Sample I.D.: EW-1 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE COE

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
------------------	------------	------	-------------	------

O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV
--------------------	------------	----	-------------	----

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 5251 HOPKIN RD Date 6/30/09

Job Number 090630-JPI Technician JD Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
S-10				X	X		X		NO TAG
S-11					X		X		NO TAG
S-12	X				X		X		NO TAG

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: _____

WELL GAUGING DATA

Project # 5251[®] 090630-JP1 Date 6/30/09 Client SHELL

Site 5251 HOPKINSON RD.

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or <u>TOC</u>	Notes
S-10	0755	4					8.04	18.87	↓	
S-11	0800	4					7.97	19.85	↓	
S-12	0750	4					8.49	20.20	↓	

WELL DEVELOPMENT DATA SHEET

Project #: 090630-JP	Client: SHELL
Developer: JP	Date Developed: 6/30/09
Well I.D. S-10	Well Diameter: (circle one) 2 3 4 6
Total Well Depth: Before 16.87 After	Depth to Water: Before 8.04 After
Reason not developed:	If Free Product, thickness:
Additional Notations: SWABBED & SURGED FOR 15 MINS	

Volume Conversion Factor (VCF): $(12 \times (d^2/4) \times \pi) / 231$

where

12 = in / foot
d = diameter (in.)
 $\pi = 3.1416$
231 = in³/gal

Well dia.	VCF
2"	= 0.16
3"	= 0.37
4"	= 0.65
6"	= 1.47
10"	= 4.08
12"	= 6.87

<u>7.0</u>	X	<u>13</u>	=	<u>70</u>	gallons
1 Case Volume		Specified Volumes			

- Purging Device:
- Bailer
 - Suction Pump
 - Electric Submersible
 - Positive Air Displacement

Type of Installed Pump NONE

Other equipment used 4" SURGE BLOW

TIME	TEMP (F)	pH	Cond. (mS or μ S)	TURBIDITY (NTUs)	VOLUME REMOVED:	NOTATIONS:
09105	69.3	7.63	2559	>1000	7.0	BROWN, SANDY
09114	68.4	7.95	2298	>1000	14.0	" "
0921	68.3	7.99	2001	>1000	21.0	" " SAND CLOGGED PUMP
1102	72.0	7.97	2002	>1000	28.0	" "
1112	72.6	7.95	1903	>1000	35.0	LIGHTENING SAND CLOGGED PUMP
1126	72.3	7.91	1840	>1000	42.0	" " " "
						PLAYGROUND-TYPE
						SAND IN WELL, DTB 19.22
						POST PUMP: BOTTOM STILL SANDY.
Did Well Dewater? NO	If yes, note above.			Gallons Actually Evacuated:	42	

WELL DEVELOPMENT DATA SHEET

Project #: 090630-JP	Client: SHELL
Developer: JP	Date Developed: 6/30/09
Well I.D. S-11	Well Diameter: (circle one) 2 3 4 6
Total Well Depth: Before 19.85 After 19.86	Depth to Water: Before 7.87 After 15.18
Reason not developed:	If Free Product, thickness:
Additional Notations: SWABBED & SURGED FOR 15 MIN	

Volume Conversion Factor (VCF):
 $(12 \times (d^2/4) \times \pi) / 231$
 where
 12 = in / foot
 d = diameter (in.)
 $\pi = 3.1416$
 231 = in³/gal

Well dia.	VCF
2" =	0.16
3" =	0.37
4" =	0.65
6" =	1.47
10" =	4.08
12" =	6.87

7.8	X	10	=	78
1 Case Volume		Specified Volumes		gallons

Purging Device: Bailer Electric Submersible
 Suction Pump Positive Air Displacement

Type of Installed Pump **NONE**
 Other equipment used **4" SURGE BLOCK**

TIME	TEMP (F)	pH	Cond. (mS) or μS	TURBIDITY (NTUs)	VOLUME REMOVED:	NOTATIONS:
1335	75.5	7.63	1175	>1000	7.8	DK BRN, SILTY
1345	75.5	7.50	9929 μS	>1000	15.6	LT BRN, SILTY
1356	73.9	7.44	8725	>1000	23.4	" "
1407	73.7	7.49	8510	>1000	31.2	" "
1417	72.2	7.41	8169	>1000	39.0	" "
1427	72.9	7.37	7774	>1000	46.8	" "
1438	73.9 73.9	7.40	7505	>1000	54.6	HARD BTM. NO SILT, ^{SWITCHED TO ES.}
1440	70.6	7.36	8003 8003	>1000	62.4	LT BRN CLOUDY
1442	69.7	7.39	7473 7473	>1000	70.2	" " "
1444	69.6	7.35	7660	>1000	78.0	" " "
1446	69.4	7.37	7022	>1000	85.8	" " "
1448	69.1	7.35	6848	>1000	93.6	" " "
Did Well Dewater? NO If yes, note above.						Gallons Actually Evacuated: 93.6

WELL DEVELOPMENT DATA SHEET

Project #: 090630-JP	Client: SHELL
Developer: JP	Date Developed: 6/30/09
Well I.D.: S-12	Well Diameter: (circle one) 2 3 4 6
Total Well Depth: Before 20.20 After	Depth to Water: Before 8.49 After
Reason not developed:	If Free Product, thickness:
Additional Notations: Surge & surbed for 15 mins	

Volume Conversion Factor (VCF):
 $(12 \times (d^2/4) \times \pi) / 231$
 where
 12 = in / foot
 d = diameter (in.)
 $\pi = 3.1416$
 231 = in³/gal

Well dia.	VCF
2"	= 0.16
3"	= 0.37
4"	= 0.65
6"	= 1.47
10"	= 4.08
12"	= 6.87

<u>7.6</u>	X	<u>3 10</u>	=	<u>76</u>
1 Case Volume		Specified Volumes		gallons

- Purging Device:
- Bailer
 - Suction Pump
 - Electric Submersible
 - Positive Air Displacement

Type of Installed Pump NONE
 Other equipment used 4" SURGE BLOCK

TIME	TEMP (F)	pH	Cond. (mS or μ S)	TURBIDITY (NTUs)	VOLUME REMOVED:	NOTATIONS:
13:07	72.6	7.59	2367	>1000	7.6	Brown silty
13:12	71.9	7.83	2427	>1000	15.2	Brown silty Semi Hard Bot
13:17	68.6	8.05	2341	>1000	22.8	Brown silty Semi Hard Bottom
15:23	68.5	8.15	2284	>1000	30.4	" "
15:29	68.9	8.00	2206	>1000	38.0	Hard Bottom
15:35	68.9	8.00	2179	>1000	45.6	Hard Bottom silty
15:41	73.2	8.00	2117	>1000	53.2	switched to ES
15:47	67.5	8.04	1889	>1000	60.8	Hard Bottom Brown
550 553 15:53	68.2	7.91	2314	>1000	68.4	Hard Bottom
553 15:59	68.1	7.93	2218	>1000	76	Hard Bottom
Did Well Dewater?	If yes, note above.		Gallons Actually Evacuated:			

SHELL SITE INSPECTION CHECKLIST

Client Shell Date 6/23/09
 Site Address 5251 Hopyard Rd Pleasanton
 Job Number 090623-MS2 Technician MS

Site Status Shell ~~Branded Station~~ Vacant Lot Other _____

- Inspected / Labeled / Cleaned - all wells on Scope Of Work N/A
- Inspected / Cleaned Components - all other identifiable wells N/A
- Inspected site for site investigation & site remediation related trip hazards N/A
- Completed all outstanding *BLAINE Wellhead Repair Order(s)* N/A
- Completed *Shell Wellhead Repair Form(s)* N/A
- Inspected treatment / remediation system compound for security, cleanliness and appearance ~~N/A~~
- Inspected vacant lot for signs of habitation, hazardous materials or terrain, overgrown vegetation and security ~~N/A~~
- Visually inspected site drums for condition and proper labeling ~~N/A~~
- Unresolved deficiencies identified - "*Notice of Deficient Condition*" form(s) completed N/A

Notes _____

PROJECT MANAGER ONLY

Checklist Reviewed	<u>MS 7/1</u> <small>Initial/Date</small>	Notes
--------------------	--	-------

SHELL WELLHEAD REPAIR FORM

(FOR REPAIR TECHNICIAN)

Site Address 5251 Hopyard Rd Pleasanton Date 6/23/09
 Job Number 090623-MS2 Technician MS Page 1 of 2

Inspection Point (Well ID or description of location)	Check Indicates deficiency													Well Not Inspected (explain in notes)	All Repairs Completed	Remaining Deficiencies Logged onto BLAINE Repair Order	Remaining Deficiencies Logged onto Notice of Deficient Condition - BLAINE Unable to Repair			
	Well Inspected, Cleaned, Labeled - No Further Corrective Action Required	Replaced Cap	Replaced Lock	Replaced Lid Seal	Casing	Annular Seal	✓ Tabs / Bolts	Box Structure	Apron	Trip Hazard	Below Grade	Not Securable by Design (12" diameter or less)	Lid not marked with words "MONITORING WELL"					Other Deficiency	Not Securable by Design (greater than 12" diameter)	
S-1	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>			
	Notes: <u>Tapped 2/2 tabs</u>																			
	Well box type / size: <u>12" Emco</u>										Materials used: <u>2 Bolts</u>									
S-2	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>			
	Notes: <u>Tapped 2/2 tabs</u>																			
	Well box type / size: <u>12" Emco</u>										Materials used: <u>2 Bolts</u>									
S-3	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>			
	Notes: <u>Tapped 2/2 tabs</u>																			
	Well box type / size: <u>12" Emco</u>										Materials used: <u>2 Bolts</u>									
S-4	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>			
	Notes: <u>Tapped 2/2 tabs</u>																			
	Well box type / size: <u>12" Emco</u>										Materials used: <u>2 Bolts</u>									
S-5	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>			
	Notes: <u>Tapped 2/2 tabs</u>																			
	Well box type / size: <u>12" Emco</u>										Materials used: <u>2 Bolts</u>									
S-6	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>			
	Notes: <u>Helicoil 2/2 tabs</u>																			
	Well box type / size: <u>8" Emco</u>										Materials used: <u>2 Bolts</u>									
S-7	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>			
	Notes: <u>Tapped 2/2 tabs</u>																			
	Well box type / size: <u>12" Emco</u>										Materials used: <u>2 Bolts</u>									

SHELL WELLHEAD REPAIR FORM

(FOR REPAIR TECHNICIAN)

Job Number 090623-MS2

Page 2 of 2

Inspection Point (Well ID or description of location)	Well Inspected, Cleaned, Labeled - No Further Corrective Action Required	Replaced Cap	Replaced Lock	Replaced Lid Seal	Check Indicates deficiency										Well Not Inspected (explain in notes)	All Repairs Completed	Remaining Deficiencies Logged onto BLAINE Repair Order	Remaining Deficiencies Logged onto Notice of Deficient Condition - BLAINE Unable to Repair
					Casing	Annular Seal	Tabs / Bolts	Box Structure	Apron	Trip Hazard	Below Grade	Not Securable by Design (12" diameter or less)	Lid not marked with words "MONITORING WELL"	Other Deficiency				
S-7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Notes:																	
	Well box type / size:										Materials used:							
S-8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Notes:																	
	Well box type / size: 12" Christy										Materials used:							
S-9	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Notes: Tapped 2 1/2 tabs																	
	Well box type / size: 12" CMCO										Materials used: 2 Bolts							
S-10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Notes: new well location unknown																	
	Well box type / size:										Materials used:							
S-11	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Notes: new well location unknown																	
	Well box type / size:										Materials used:							
S-12	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Notes: new well location unknown																	
	Well box type / size:										Materials used:							
EW-1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Notes: Tapped 2 1/2 tabs																	
	Well box type / size: Tapped 2 1/2 tabs 12" CMCO										Materials used: 2 Bolts							
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Notes:																	
	Well box type / size:										Materials used:							

APPENDIX C

**BLAINE TECH SERVICES, INC.
FIELD PROCEDURES**

BLAINE

TECH SERVICES INC.

GROUNDWATER SAMPLING SPECIALISTS
SINCE 1985

July 22, 2009

Denis Brown
Shell Oil Products US
20945 South Wilmington Avenue
Carson, CA 90810

Third Quarter 2009 Groundwater Monitoring at
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Monitoring performed on June 30 and July 6, 2009

Groundwater Monitoring Report **090706-RM-1**

This report covers the routine monitoring of groundwater wells at this Shell-branded facility. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purgewater (if applicable) is, likewise, collected and transported to the Martinez Refining Company.


Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight-hour refresher courses.

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. Our activities at this site consisted of objective data and sample collection only. No interpretation of analytical results, defining of hydrological conditions or formulation of recommendations was performed.

Please call if you have any questions.

Yours truly,

A handwritten signature in black ink, appearing to read "Mike Ninokata", with a long horizontal flourish extending to the right.

Mike Ninokata
Project Manager

MN/jb

attachments: Cumulative Table of WELL CONCENTRATIONS
Certified Analytical Report
Field Data Sheets

cc: Suzanne McClurkin-Nelson
Delta Environmental
175 Bernal Rd., Suite 200
San Jose, CA 95119

BLAINE TECH SERVICES, INC. METHODS AND PROCEDURES FOR THE ROUTINE MONITORING OF GROUNDWATER WELLS AT SHELL SITES

Blaine Tech Services, Inc. performs environmental sampling and documentation as an independent third party. We specialize in groundwater monitoring assignments and intentionally limit the scope of our services to those centered on the generation of objective information.

To avoid conflicts of interest, Blaine Tech Services, Inc. personnel do not evaluate or interpret the information we collect. As a state licensed contractor (C-57 well drilling –water – 746684) performing strictly technical services, we do not make any professional recommendations and perform no consulting of any kind.

SAMPLING PROCEDURES OVERVIEW

SAFETY

All groundwater monitoring assignments performed for Shell comply with Shell's safety guidelines, 29 CFR 1910.120 and SB-198 Injury and Illness Prevention Program (IIPP). All Field Technicians receive the full 40-hour 29CFR 1910.120 OSHA SARA HAZWOPER course, medical clearance and on-the-job training prior to commencing any work on any Shell site.

INSPECTION AND GAUGING

Wells are inspected prior to evacuation and sampling. The condition of the wellhead is checked and noted according to a wellhead inspection checklist.

Standard measurements include the depth to water (DTW) and the total well depth (TD) obtained with industry standard electronic water level indicators that are graduated in increments of hundredths of a foot.

The water in each well is inspected for the presence of immiscibles. When free product is suspected, its presence is confirmed using an electronic interface probe (e.g. MMC). No samples are collected from a well containing over two-hundredths of a foot (0.02') of product.

EVACUATION

Depth to water measurements are collected by our personnel prior to purging and minimum purge volumes are calculated anew for each well based on the height of the water column and the diameter of the well. Expected purge volumes are never less than three case volumes and are set at no less than four case volumes in some jurisdictions.

Well purging devices are selected on the basis of the well diameter and the total volume to be evacuated. In most cases the well will be purged using an electric submersible pump (i.e. Grundfos) suspended near (but not touching) the bottom of the well.

PARAMETER STABILIZATION

Well purging completion standards include minimum purge volumes, but additionally require stabilization of specific groundwater parameters prior to sample collection. Typical groundwater parameters used to measure stability are electrical conductivity, pH, and temperature. Instrument readings are obtained at regular intervals during the evacuation process (no less than once per case volume).

Stabilization standards for routine quarterly monitoring of fuel sites include the following: Temperature is considered to have stabilized when successive readings do not fluctuate more than +/- 1 degree Celsius. Electrical conductivity is considered stable when successive readings are within 10%. pH is considered to be stable when successive readings remain constant or vary no more than 0.2 of a pH unit.

DEWATERED WELLS

Normal evacuation removes no less than three case volumes of water from the well. However, less water may be removed in cases where the well dewateres and does not immediately recharge.

MEASURING RECHARGE

Upon completion of well purging, a depth to water measurement is collected and notated to ensure that the well has recharged to within 80% of its static, pre-purge level prior to sampling.

Wells that do not immediately show 80% recharge or dewatered wells will be allowed a minimum of 2 hours to recharge prior to sampling. The water level at time of sampling will be noted.

PURGEWATER CONTAINMENT

All non-hazardous purgewater evacuated from each groundwater monitoring well is captured and contained in on-board storage tanks on the Sampling Vehicle and/or special water hauling trailers. Effluent from the decontamination of reusable apparatus (sounders, electric pumps and hoses etc.), consisting of groundwater combined with deionized water and non-phosphate soap, is also captured and pumped into effluent tanks.

Non-hazardous purgewater is transported under standard Bill of Lading documentation to a Blaine Tech Services, Inc. facility before being transported to a Shell approved disposal facility.

SAMPLE COLLECTION DEVICES

All samples are collected using a stainless steel, Teflon or disposable bailers.

SAMPLE CONTAINERS

Sample material is decanted directly from the sampling bailer into sample containers provided by the laboratory that will analyze the samples. The transfer of sample material from the bailer to the sample container conforms to specifications contained in the USEPA T.E.G.D. The type of sample container, material of construction, method of closure and filling requirements are specific to the intended analysis. Chemicals needed to preserve the sample material are commonly placed inside the sample containers by the laboratory or glassware vendor prior to delivery of the bottle to our personnel. The laboratory sets the number of replicate containers.

TRIP BLANKS

Trip Blanks, if requested, are taken to the site and kept inside the sample cooler for the duration of the event. They are turned over to the laboratory for analysis with the samples from that site.

DUPLICATES

Duplicates, if requested, may be collected at a site. The Field Technician uses their discretion in choosing the well at which the Duplicate is collected, typically one suspected of containing measurable contaminants. The Duplicate sample is labeled "DUP" and the time of collection is omitted from the COC, thus rendering the sample blind.

SAMPLE STORAGE

All sample containers are promptly placed in food grade ice chests for storage in the field and transport (direct or via our facility) to the designated analytical laboratory. These ice chests contain quantities of restaurant grade ice as a refrigerant material. The samples are maintained in either an ice chest or a refrigerator until relinquished into the custody of the laboratory or laboratory courier.

DOCUMENTATION CONVENTIONS

A label must be affixed to all sample containers. In most cases these labels are generated by our office personnel and are partially preprinted. Labels can also be hand written by our field personnel. The site is identified with the store number and site address, as is the particular groundwater well from which the sample is drawn (e.g. MW-1, MW-2, S-1 etc.). The time and date of sample collection along with the initials of the person who collects the sample are handwritten onto the label.

Chain of Custody records are created using client specific preprinted forms following USEPA specifications.

Bill of Lading records are contemporaneous records created in the field at the site where the non-hazardous purgewater is generated. Field Technicians use preprinted Bill of Lading forms.

DECONTAMINATION

All equipment is brought to the site in clean and serviceable condition and is cleaned after use in each well and before subsequent use in any other well. Equipment is decontaminated before leaving the site.

The primary decontamination device is a commercial steam cleaner. The steam cleaner is de-tuned to function as a hot pressure washer that is then operated with high quality deionized water that is produced at our facility and stored onboard our sampling vehicle. Cleaning is facilitated by the use of proprietary fixtures and devices included in the patented workstation (U.S. Patent 5,535,775) that is incorporated in each sampling vehicle. The steam cleaner is used to decon reels, pumps and bailers.

Any sensitive equipment or parts (i.e. Dissolved Oxygen sensor membrane, water level indicator, etc.) that cannot be washed using the high pressure water, will be sprayed with a non-phosphate soap and deionized water solution and rinsed with deionized water.

DISSOLVED OXYGEN READINGS

Dissolved Oxygen readings are taken pre- and/or post-purge using YSI meters (e.g. YSI Model 54, 58 or 95) or HACH field test kits.

The YSI meters are equipped with a stirring device that enables them to collect accurate in-situ readings. The probe/stirring devices are modified to allow downhole measurements to be taken from wells with diameters as small as two inches. The probe and reel is decontaminated between wells as described above. The meter is calibrated between wells as per the instructions in the operating manual. The probe and stirrer is lowered into the water column. The reading is allowed to stabilize prior to collection.


OXYIDATON REDUCTION POTENTIAL READINGS

All readings are obtained with either Corning or Myron-L meters (e.g. Corning ORP-65 or a Myron-L Ultrameter GP). The meter is cleaned between wells as described above. The meter is calibrated at the start of each day according to the instruction manual.

FERROUS IRON MEASUREMENTS

All field measurements are collected at time of sampling with a HACH test kit.

APPENDIX D
CERTIFIED ANALYTICAL REPORT
WITH CHAIN-OF-CUSTODY DOCUMENTATION

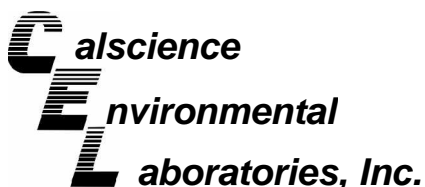

July 21, 2009

Michael Ninokata
Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Subject: **Calscience Work Order No.: 09-07-0657**
Client Reference: 5251 Hopyard Rd., Pleasanton, CA

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 7/9/2009 and analyzed in accordance with the attached chain-of-custody.

Unless otherwise noted, all analytical testing was accomplished in accordance with the guidelines established in our Quality Systems Manual, applicable standard operating procedures, and other related documentation. The original report of subcontracted analysis, if any, is provided herein, and follows the standard Calscience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.

If you have any questions regarding this report, please do not hesitate to contact the undersigned.

Sincerely,

A handwritten signature in black ink that reads "Philip Samelle for".

Calscience Environmental
Laboratories, Inc.
Jessie Lee
Project Manager

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 1 of 6

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-1	09-07-0657-1-A	07/06/09 14:10	Aqueous	GC/MS OO	07/14/09	07/14/09 17:55	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	25	2.5	5		Tert-Butyl Alcohol (TBA)	180	50	5	
Ethylbenzene	370	5.0	5		Diisopropyl Ether (DIPE)	ND	10	5	
Toluene	34	5.0	5		Ethyl-t-Butyl Ether (ETBE)	ND	10	5	
Xylenes (total)	44	5.0	5		Tert-Amyl-Methyl Ether (TAME)	ND	10	5	
Methyl-t-Butyl Ether (MTBE)	22	5.0	5		TPPH	5800	250	5	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	106	74-140			1,2-Dichloroethane-d4	102	74-146		
Toluene-d8	103	88-112			Toluene-d8-TPPH	109	88-112		
1,4-Bromofluorobenzene	100	74-110							


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-2	09-07-0657-2-A	07/06/09 13:55	Aqueous	GC/MS OO	07/14/09	07/14/09 16:08	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	59	1.0	1		TPPH	110	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	108	74-140			1,2-Dichloroethane-d4	113	74-146		
Toluene-d8	104	88-112			Toluene-d8-TPPH	110	88-112		
1,4-Bromofluorobenzene	88	74-110							

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-3	09-07-0657-3-A	07/06/09 13:00	Aqueous	GC/MS OO	07/14/09	07/14/09 18:22	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	500	2.5	5		Tert-Butyl Alcohol (TBA)	ND	50	5	
Ethylbenzene	30	5.0	5		Diisopropyl Ether (DIPE)	ND	10	5	
Toluene	10	5.0	5		Ethyl-t-Butyl Ether (ETBE)	ND	10	5	
Xylenes (total)	13	5.0	5		Tert-Amyl-Methyl Ether (TAME)	ND	10	5	
Methyl-t-Butyl Ether (MTBE)	21	5.0	5		TPPH	2300	250	5	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	100	74-140			1,2-Dichloroethane-d4	99	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	104	88-112		
1,4-Bromofluorobenzene	97	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 2 of 6

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-4	09-07-0657-4-A	07/06/09 12:30	Aqueous	GC/MS OO	07/14/09	07/14/09 18:49	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	98	74-140			1,2-Dichloroethane-d4	108	74-146		
Toluene-d8	102	88-112			Toluene-d8-TPPH	107	88-112		
1,4-Bromofluorobenzene	87	74-110							


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-5	09-07-0657-5-A	07/06/09 11:50	Aqueous	GC/MS OO	07/14/09	07/14/09 19:16	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	11	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	2.5	1.0	1		TPPH	62	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	109	74-140			1,2-Dichloroethane-d4	110	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	107	88-112		
1,4-Bromofluorobenzene	91	74-110							

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-6	09-07-0657-6-A	07/06/09 09:31	Aqueous	GC/MS OO	07/14/09	07/14/09 19:42	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	106	74-140			1,2-Dichloroethane-d4	110	74-146		
Toluene-d8	97	88-112			Toluene-d8-TPPH	103	88-112		
1,4-Bromofluorobenzene	99	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 3 of 6

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-7	09-07-0657-7-A	07/06/09 09:46	Aqueous	GC/MS OO	07/14/09	07/14/09 20:09	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	4.3	1.0	1		TPPH	58	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	98	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	106	88-112		
1,4-Bromofluorobenzene	97	74-110							


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-8	09-07-0657-8-A	07/06/09 10:16	Aqueous	GC/MS OO	07/14/09	07/14/09 20:36	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	111	74-140			1,2-Dichloroethane-d4	115	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	104	88-112		
1,4-Bromofluorobenzene	93	74-110							

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-9	09-07-0657-9-A	07/06/09 11:05	Aqueous	GC/MS OO	07/14/09	07/14/09 21:03	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	101	74-140			1,2-Dichloroethane-d4	114	74-146		
Toluene-d8	105	88-112			Toluene-d8-TPPH	110	88-112		
1,4-Bromofluorobenzene	93	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 4 of 6

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-10	09-07-0657-10-C	07/06/09 11:35	Aqueous	GC/MS W	07/18/09	07/18/09 15:46	090718L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	1.0	2		Tert-Butyl Alcohol (TBA)	5100	100	10	
Ethylbenzene	ND	2.0	2		Diisopropyl Ether (DIPE)	ND	4.0	2	
Toluene	ND	2.0	2		Ethyl-t-Butyl Ether (ETBE)	ND	4.0	2	
Xylenes (total)	ND	2.0	2		Tert-Amyl-Methyl Ether (TAME)	ND	4.0	2	
Methyl-t-Butyl Ether (MTBE)	ND	2.0	2		TPPH	340	100	2	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	110	74-140			1,2-Dichloroethane-d4	121	74-146		
Toluene-d8	104	88-112			Toluene-d8-TPPH	104	88-112		
1,4-Bromofluorobenzene	90	74-110							


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-11	09-07-0657-11-A	07/06/09 10:40	Aqueous	GC/MS OO	07/14/09	07/14/09 21:56	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	101	74-140			1,2-Dichloroethane-d4	106	74-146		
Toluene-d8	92	88-112			Toluene-d8-TPPH	97	88-112		
1,4-Bromofluorobenzene	100	74-110							

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-12	09-07-0657-12-A	07/06/09 12:10	Aqueous	GC/MS OO	07/14/09	07/14/09 22:23	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	37	1.0	1		TPPH	83	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	105	74-140			1,2-Dichloroethane-d4	101	74-146		
Toluene-d8	93	88-112			Toluene-d8-TPPH	98	88-112		
1,4-Bromofluorobenzene	94	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 5 of 6

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
EW-1	09-07-0657-13-A	07/06/09 13:20	Aqueous	GC/MS OO	07/14/09	07/14/09 22:49	090714L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	18	5.0	10		Tert-Butyl Alcohol (TBA)	ND	100	10	
Ethylbenzene	750	10	10		Diisopropyl Ether (DIPE)	ND	20	10	
Toluene	82	10	10		Ethyl-t-Butyl Ether (ETBE)	ND	20	10	
Xylenes (total)	140	10	10		Tert-Amyl-Methyl Ether (TAME)	ND	20	10	
Methyl-t-Butyl Ether (MTBE)	ND	10	10		TPPH	17000	500	10	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	100	74-140			1,2-Dichloroethane-d4	104	74-146		
Toluene-d8	106	88-112			Toluene-d8-TPPH	112	88-112		
1,4-Bromofluorobenzene	96	74-110							


Method Blank	099-12-767-2,200	N/A	Aqueous	GC/MS OO	07/14/09	07/14/09 15:13	090714L01
--------------	------------------	-----	---------	----------	----------	-------------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	97	74-140			1,2-Dichloroethane-d4	118	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	104	88-112		
1,4-Bromofluorobenzene	100	74-110							

Method Blank	099-12-767-2,207	N/A	Aqueous	GC/MS RR	07/17/09	07/17/09 15:36	090717L01
--------------	------------------	-----	---------	----------	----------	-------------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	94	74-140			1,2-Dichloroethane-d4	93	74-146		
Toluene-d8	98	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	97	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 07/09/09
 Work Order No: 09-07-0657
 Preparation: EPA 5030B
 Method: LUFT GC/MS / EPA 8260B
 Units: ug/L


Project: 5251 Hopyard Rd., Pleasanton, CA

Page 6 of 6

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
Method Blank	099-12-767-2,219	N/A	Aqueous	GC/MS W	07/18/09	07/18/09 13:49	090718L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	113	74-140			1,2-Dichloroethane-d4	122	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	100	88-112		
1,4-Bromofluorobenzene	85	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

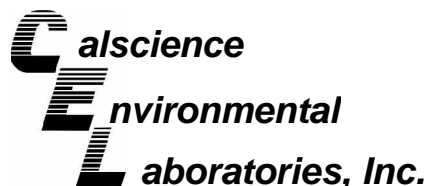

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA
8260B

Project 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-2	Aqueous	GC/MS OO	07/14/09	07/14/09	090714S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	98	105	88-118	7	0-7	
Carbon Tetrachloride	103	108	67-145	4	0-11	
Chlorobenzene	97	98	88-118	1	0-7	
1,2-Dibromoethane	92	101	70-130	10	0-30	
1,2-Dichlorobenzene	100	100	86-116	0	0-8	
1,1-Dichloroethene	93	99	70-130	6	0-25	
Ethylbenzene	95	101	70-130	5	0-30	
Toluene	94	101	87-123	7	0-8	
Trichloroethene	92	90	79-127	2	0-10	
Vinyl Chloride	90	96	69-129	6	0-13	
Methyl-t-Butyl Ether (MTBE)	78	87	71-131	4	0-13	
Tert-Butyl Alcohol (TBA)	102	97	36-168	5	0-45	
Diisopropyl Ether (DIPE)	88	93	81-123	6	0-9	
Ethyl-t-Butyl Ether (ETBE)	107	108	72-126	1	0-12	
Tert-Amyl-Methyl Ether (TAME)	103	106	72-126	3	0-12	
Ethanol	97	95	53-149	2	0-31	

RPD - Relative Percent Difference , CL - Control Limit



Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA
8260B

Project 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
09-07-1235-2	Aqueous	GC/MS RR	07/17/09	07/17/09	090717S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	107	107	88-118	0	0-7	
Carbon Tetrachloride	107	106	67-145	1	0-11	
Chlorobenzene	106	106	88-118	0	0-7	
1,2-Dibromoethane	108	105	70-130	2	0-30	
1,2-Dichlorobenzene	103	103	86-116	0	0-8	
1,1-Dichloroethene	108	108	70-130	1	0-25	
Ethylbenzene	107	107	70-130	0	0-30	
Toluene	106	106	87-123	0	0-8	
Trichloroethene	104	105	79-127	0	0-10	
Vinyl Chloride	93	91	69-129	2	0-13	
Methyl-t-Butyl Ether (MTBE)	105	104	71-131	0	0-13	
Tert-Butyl Alcohol (TBA)	107	98	36-168	8	0-45	
Diisopropyl Ether (DIPE)	100	100	81-123	0	0-9	
Ethyl-t-Butyl Ether (ETBE)	103	103	72-126	0	0-12	
Tert-Amyl-Methyl Ether (TAME)	104	104	72-126	0	0-12	
Ethanol	109	98	53-149	11	0-31	

RPD - Relative Percent Difference , CL - Control Limit



Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/09/09
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA
8260B

Project 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
09-07-1396-20	Aqueous	GC/MS W	07/18/09	07/18/09	090718S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	100	102	88-118	3	0-7	
Carbon Tetrachloride	101	105	67-145	3	0-11	
Chlorobenzene	100	104	88-118	4	0-7	
1,2-Dibromoethane	102	109	70-130	7	0-30	
1,2-Dichlorobenzene	101	102	86-116	1	0-8	
1,1-Dichloroethene	99	101	70-130	2	0-25	
Ethylbenzene	108	112	70-130	4	0-30	
Toluene	108	107	87-123	1	0-8	
Trichloroethene	99	99	79-127	0	0-10	
Vinyl Chloride	80	83	69-129	3	0-13	
Methyl-t-Butyl Ether (MTBE)	103	108	71-131	4	0-13	
Tert-Butyl Alcohol (TBA)	92	99	36-168	7	0-45	
Diisopropyl Ether (DIPE)	104	107	81-123	2	0-9	
Ethyl-t-Butyl Ether (ETBE)	102	111	72-126	8	0-12	
Tert-Amyl-Methyl Ether (TAME)	113	117	72-126	4	0-12	
Ethanol	83	83	53-149	0	0-31	

RPD - Relative Percent Difference , CL - Control Limit



Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project: 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number		
099-12-767-2,200	Aqueous	GC/MS OO	07/14/09	07/14/09	090714L01		
Parameter	LCS %REC	LCSD %REC	%REC CL	ME CL	RPD	RPD CL	Qualifiers
Benzene	96	101	84-120	78-126	5	0-8	
Carbon Tetrachloride	104	100	63-147	49-161	4	0-10	
Chlorobenzene	99	97	89-119	84-124	2	0-7	
1,2-Dibromoethane	106	96	80-120	73-127	10	0-20	
1,2-Dichlorobenzene	104	94	89-119	84-124	10	0-9	X
1,1-Dichloroethene	93	92	77-125	69-133	0	0-16	
Ethylbenzene	103	98	80-120	73-127	5	0-20	
Toluene	90	96	83-125	76-132	7	0-9	
Trichloroethene	90	94	89-119	84-124	5	0-8	
Vinyl Chloride	90	90	63-135	51-147	0	0-13	
Methyl-t-Butyl Ether (MTBE)	98	95	82-118	76-124	2	0-13	
Tert-Butyl Alcohol (TBA)	100	98	46-154	28-172	1	0-32	
Diisopropyl Ether (DIPE)	89	85	81-123	74-130	4	0-11	
Ethyl-t-Butyl Ether (ETBE)	103	98	74-122	66-130	5	0-12	
Tert-Amyl-Methyl Ether (TAME)	105	106	76-124	68-132	0	0-10	
Ethanol	92	95	60-138	47-151	3	0-32	
TPPH	86	79	65-135	53-147	8	0-30	


Total number of LCS compounds : 17

Total number of ME compounds : 0

Total number of ME compounds allowed : 1

LCS ME CL validation result : Pass

RPD - Relative Percent Difference , CL - Control Limit





Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project: 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number		
099-12-767-2,207	Aqueous	GC/MS RR	07/17/09	07/17/09	090717L01		
Parameter	LCS %REC	LCSD %REC	%REC CL	ME CL	RPD	RPD CL	Qualifiers
Benzene	107	106	84-120	78-126	1	0-8	
Carbon Tetrachloride	103	106	63-147	49-161	3	0-10	
Chlorobenzene	105	106	89-119	84-124	0	0-7	
1,2-Dibromoethane	109	106	80-120	73-127	3	0-20	
1,2-Dichlorobenzene	105	103	89-119	84-124	2	0-9	
1,1-Dichloroethene	102	105	77-125	69-133	2	0-16	
Ethylbenzene	104	105	80-120	73-127	1	0-20	
Toluene	105	105	83-125	76-132	0	0-9	
Trichloroethene	107	105	89-119	84-124	2	0-8	
Vinyl Chloride	94	96	63-135	51-147	3	0-13	
Methyl-t-Butyl Ether (MTBE)	104	106	82-118	76-124	1	0-13	
Tert-Butyl Alcohol (TBA)	99	98	46-154	28-172	1	0-32	
Diisopropyl Ether (DIPE)	100	101	81-123	74-130	2	0-11	
Ethyl-t-Butyl Ether (ETBE)	102	104	74-122	66-130	2	0-12	
Tert-Amyl-Methyl Ether (TAME)	105	103	76-124	68-132	1	0-10	
Ethanol	96	99	60-138	47-151	4	0-32	
TPPH	91	90	65-135	53-147	1	0-30	


Total number of LCS compounds : 17

Total number of ME compounds : 0

Total number of ME compounds allowed : 1

LCS ME CL validation result : Pass

RPD - Relative Percent Difference , CL - Control Limit





Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 09-07-0657
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project: 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number		
099-12-767-2,219	Aqueous	GC/MS W	07/18/09	07/18/09	090718L01		
Parameter	LCS %REC	LCSD %REC	%REC CL	ME CL	RPD	RPD CL	Qualifiers
Benzene	103	103	84-120	78-126	1	0-8	
Carbon Tetrachloride	104	101	63-147	49-161	3	0-10	
Chlorobenzene	103	99	89-119	84-124	4	0-7	
1,2-Dibromoethane	108	97	80-120	73-127	11	0-20	
1,2-Dichlorobenzene	105	102	89-119	84-124	2	0-9	
1,1-Dichloroethene	104	101	77-125	69-133	3	0-16	
Ethylbenzene	113	108	80-120	73-127	4	0-20	
Toluene	109	110	83-125	76-132	1	0-9	
Trichloroethene	106	103	89-119	84-124	3	0-8	
Vinyl Chloride	84	88	63-135	51-147	5	0-13	
Methyl-t-Butyl Ether (MTBE)	107	105	82-118	76-124	3	0-13	
Tert-Butyl Alcohol (TBA)	85	97	46-154	28-172	13	0-32	
Diisopropyl Ether (DIPE)	105	101	81-123	74-130	4	0-11	
Ethyl-t-Butyl Ether (ETBE)	107	106	74-122	66-130	0	0-12	
Tert-Amyl-Methyl Ether (TAME)	117	112	76-124	68-132	4	0-10	
Ethanol	83	89	60-138	47-151	8	0-32	
TPPH	102	104	65-135	53-147	2	0-30	


Total number of LCS compounds : 17

Total number of ME compounds : 0

Total number of ME compounds allowed : 1


LCS ME CL validation result : Pass

RPD - Relative Percent Difference , CL - Control Limit



Work Order Number: 09-07-0657

<u>Qualifier</u>	<u>Definition</u>
*	See applicable analysis comment.
1	Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification.
2	Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification.
3	Recovery of the Matrix Spike (MS) or Matrix Spike Duplicate (MSD) compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification.
4	The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification.
5	The PDS/PDSD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported with no further corrective action required.
A	Result is the average of all dilutions, as defined by the method.
B	Analyte was present in the associated method blank.
C	Analyte presence was not confirmed on primary column.
E	Concentration exceeds the calibration range.
H	Sample received and/or analyzed past the recommended holding time.
J	Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
ME	LCS Recovery Percentage is within LCS ME Control Limit range.
N	Nontarget Analyte.
ND	Parameter not detected at the indicated reporting limit.
Q	Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater.
U	Undetected at the laboratory method detection limit.
X	% Recovery and/or RPD out-of-range.
Z	Analyte presence was not confirmed by second column or GC/MS analysis.
	Solid - Unless otherwise indicated, solid sample data is reported on a wet weight basis, not corrected for % moisture.



LAB (LOCATION)



Shell Oil Products Chain Of Custody Record

- CALSCIENCE ()
- SPL ()
- XENCO ()
- TEST AMERICA ()
- OTHER ()

Please Check Appropriate Box:

<input checked="" type="checkbox"/> ENV SERVICES	<input type="checkbox"/> MOTIVA RETAIL	<input type="checkbox"/> SHELL RETAIL
<input type="checkbox"/> MOTIVA SD&CM	<input checked="" type="checkbox"/> CONSULTANT	<input type="checkbox"/> LUBES
<input type="checkbox"/> SHELL PIPELINE	<input type="checkbox"/> OTHER _____	

Print Bill To Contact Name: Denis Brown

INCIDENT # (ENV SERVICES) 9 8 9 9 5 8 4 3

PO # _____ **SAP #** _____

DATE: 7/6/09 **PAGE:** 1 of 2

CHECK IF NO INCIDENT # APPLIES

SAMPLING COMPANY Blaine Tech Services

LOG CODE BTSS

ADDRESS: 1680 Rogers Ave, San Jose, CA 95112

PROJECT CONTACT (Hardcopy or PDF Report): Michael Ninokata

TELEPHONE: (408)573-0555 **FAX:** (408)573-7771 **E-MAIL:** mninokata@blainetech.com

SITE ADDRESS: Street and City 5251 Hopyard Rd., Pleasanton

State CA **GLOBAL ID NO** T0600101267

EDF DELIVERABLE TO (Name, Company, Office Location) Angela Pico, Delta, San Jose Office

PHONE NO 408.826.1862 **E-MAIL** apico@deltaenv.com

CONSULTANT PROJECT NO 090706-RM1

BTS# _____

SAMPLER NAME(S) (Print) R. McCarney

LAB USE ONLY 09-07-0657

TURNAROUND TIME (CALENDAR DAYS):

STANDARD (14 DAY) 5 DAYS 3 DAYS 2 DAYS 24 HOURS

RESULTS NEEDED ON WEEKEND

LA - RWQCB REPORT FORMAT UST AGENCY:

REQUESTED ANALYSIS

TPH - Purgeable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)	Methanol (8015M)	TEMPERATURE ON RECEIPT °C
-------------------------	---------------------------	--------------	----------------------	--------------	-------------	--------------	--------------	--------------	-----------------	-------------	-----------------	------------------	---------------------------

SPECIAL INSTRUCTIONS OR NOTES :

CC Suzanne McClurkin-Nelson w/final report smcclurkin-nelson@deltaenv.com

SHELL CONTRACT RATE APPLIES

STATE REIMBURSEMENT RATE APPLIES

EDD NOT NEEDED

RECEIPT VERIFICATION REQUESTED

LAB USE ONLY	Field Sample Identification	SAMPLING		MATRIX	PRESERVATIVE					NO. OF CONT.	REQUESTED ANALYSIS												TEMPERATURE ON RECEIPT °C	Container PID Readings or Laboratory Notes	
		DATE	TIME		HCL	HNO3	H2SO4	NONE	OTHER		TPH - Purgeable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)			Methanol (8015M)
1	S-1	7/6/09	1410	W	3					3	X	X	X												
2	S-2		1355								X	X	X												
3	S-3		1300								X	X	X												
4	S-4		1230								X	X	X												
5	S-5		1150								X	X	X												
6	S-6		0931								X	X	X												
7	S-7		0946								X	X	X												
8	S-8		1016								X	X	X												
9	S-9		1105								X	X	X												
10	S-10		1135								X	X	X												

Relinquished by (Signature): <i>[Signature]</i>	Received by (Signature): <i>[Signature] (Sample Custodian)</i>	Date: 7/6/09	Time: 1625
Relinquished by (Signature): <i>[Signature] Approval Sample Custodian</i>	Received by (Signature): <i>[Signature] Tom O'Malley CEL</i>	Date: 7/8/09	Time: 1005
Relinquished by (Signature): <i>[Signature]</i>	Received by (Signature): <i>[Signature] CEL</i>	Date: 7/9/09	Time: 1030

630 512212957

LAB (LOCATION)

- CALSCIENCE (_____)
- SPL (_____)
- XENCO (_____)
- TEST AMERICA (_____)
- OTHER (_____)



Shell Oil Products Chain Of Custody Record

Please Check Appropriate Box:

<input checked="" type="checkbox"/> ENV SERVICES	<input type="checkbox"/> MOTIVA RETAIL	<input type="checkbox"/> SHELL RETAIL
<input type="checkbox"/> MOTIVA SD&CM	<input checked="" type="checkbox"/> CONSULTANT	<input type="checkbox"/> LUBES
<input type="checkbox"/> SHELL PIPELINE	<input type="checkbox"/> OTHER _____	

Print Bill To Contact Name: Denis Brown

INCIDENT # (ENV SERVICES): 9 8 9 9 5 8 4 3

PO #: _____ **SAP #:** _____

CHECK IF NO INCIDENT # APPLIES

DATE: 7/6/09
PAGE: 2 of 2

SAMPLING COMPANY: Blaine Tech Services
LOG CODE: BTSS
ADDRESS: 1680 Rogers Ave, San Jose, CA 95112
EDF DELIVERABLE TO (Name, Company, Office Location): Angela Pico, Delta, San Jose Office
PHONE NO.: 408.826.1862
STATE: CA
GLOBAL ID NO: T0600101267
E-MAIL: apico@deltaenv.com
CONSULTANT PROJECT NO: 0A0706-RM1
BTS#: _____
PROJECT CONTACT (Hardcopy or PDF Report to): Michael Ninokata
TELEPHONE: (408)573-0555
FAX: (408)573-7771
E-MAIL: mninokata@blainetech.com
SAMPLER NAME(S) (Print): R. McCarty
LAB USE ONLY: 09-07-0657

TURNAROUND TIME (CALENDAR DAYS):
 STANDARD (14 DAY) 5 DAYS 3 DAYS 2 DAYS 24 HOURS RESULTS NEEDED ON WEEKEND

LA - RWQCB REPORT FORMAT UST AGENCY:

SPECIAL INSTRUCTIONS OR NOTES :

CC Suzanne McClurkin-Nelson w/final report smcclurkin-nelson@deltaenv.com

SHELL CONTRACT RATE APPLIES
 STATE REIMBURSEMENT RATE APPLIES
 EDD NOT NEEDED
 RECEIPT VERIFICATION REQUESTED

LAB USE ONLY	Field Sample Identification	SAMPLING		MATRIX	PRESERVATIVE					NO. OF CONT.	REQUESTED ANALYSIS											TEMPERATURE ON RECEIPT C°	Container PID Readings or Laboratory Notes				
		DATE	TIME		HCL	HNO3	H2SO4	NONE	OTHER		TPH - Purgeable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)			Ethanol (8260B)	Methanol (8015M)		
11	S-11	7/6/09	1040	W	3						X	X	X														
12	S-12	↓	1210	↓	3						X	X	X														
13	EW-1	↓	1320	↓	3						X	X	X														

Relinquished by: (Signature)	Received by: (Signature)	Date:	Time:
<i>[Signature]</i>	<i>[Signature]</i> Sample Custodian	7/6/09	1625
Relinquished by: (Signature)	Received by: (Signature)	Date:	Time:
<i>[Signature]</i>	<i>[Signature]</i> CEL	7/8/09	1005
Relinquished by: (Signature)	Received by: (Signature)	Date:	Time:
<i>[Signature]</i>	<i>[Signature]</i> CEL	7/9/09	1030

830 5/22/2957

SAMPLE RECEIPT FORM

Cooler 1 of 1

CLIENT: Blaine Tech

DATE: 07/09/09

TEMPERATURE: (Criteria: 0.0°C – 6.0°C, not frozen)

Temperature 2.2 °C - 0.2°C (CF) = 2.0 °C Blank Sample

Sample(s) outside temperature criteria (PM/APM contacted by: _____).

Sample(s) outside temperature criteria but received on ice/chilled on same day of sampling.

Received at ambient temperature, placed on ice for transport by Courier.

Ambient Temperature: Air Filter Metals Only PCBs Only Initial: YL

CUSTODY SEALS INTACT:

Cooler _____ No (Not Intact) Not Present N/A Initial: YL

Sample _____ No (Not Intact) Not Present Initial: T.N

SAMPLE CONDITION:

	Yes	No	N/A
Chain-Of-Custody (COC) document(s) received with samples.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
COC document(s) received complete.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> Collection date/time, matrix, and/or # of containers logged in based on sample labels.			
<input type="checkbox"/> COC not relinquished. <input type="checkbox"/> No date relinquished. <input type="checkbox"/> No time relinquished.			
Sampler's name indicated on COC.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sample container label(s) consistent with COC.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sample container(s) intact and good condition.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Correct containers and volume for analyses requested.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Analyses received within holding time.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Proper preservation noted on COC or sample container.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> Unpreserved vials received for Volatiles analysis			
Volatile analysis container(s) free of headspace.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Tedlar bag(s) free of condensation.....	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

CONTAINER TYPE:

Solid: 4ozCGJ 8ozCGJ 16ozCGJ Sleeve EnCores® TerraCores® _____

Water: VOA VOAh VOAna₂ 125AGB 125AGBh 125AGBp 1AGB 1AGBna₂ 1AGBs

500AGB 500AGJ 500AGJs 250AGB 250CGB 250CGBs 1PB 500PB 500PBna

250PB 250PBn 125PB 125PBzna 100PJ 100PJna₂ _____ _____ _____

Air: Tedlar® Summa® _____ **Other:** _____ **Checked/Labeled by:** T.N

Container: C: Clear A: Amber P: Plastic G: Glass J: Jar (Wide-mouth) B: Bottle (Narrow-mouth) **Reviewed by:** AM

Preservative: h: HCL n: HNO₃ na₂:Na₂S₂O₃ Na: NaOH p: H₃PO₄ s: H₂SO₄ zna: ZnAc₂+NaOH f: Field-filtered **Scanned by:** T.N