

922



W. A. CRAIG, INC.

Environmental Contracting and Consulting

6940 Tremont Road
Dixon, California 95620
Contractor and Hazardous Substances License #455752
tech@wacraig.com
(800) 522-7244

Dixon (707) 693-2929

Napa (707) 252-3353

Fax: (707) 693-2922

SITE INVESTIGATION WORK PLAN
(Revision 1)

SITE LOCATION:
Oakland Truck Stop
1107 5th Street
Oakland, California

PREPARED FOR:
Mr. Reed Rinehart
Rinehart Distribution, Inc.
P.O. Box 725
Ukiah, California 95482

SUBMITTED TO:
Mr. Barney Chan
Alameda County Department of Environmental Health Services
Division of Environmental Protection
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577
(510) 567-6774
fax (510) 337-9335

W. A. CRAIG, INC. PROJECT # 3628

October 22, 2001

PROFESSIONAL CERTIFICATION


Site Investigation Workplan Revision 1

Oakland Truck Stop
1107 5th Street
Oakland, California

Job No. 3628
October 22, 2001

This document has been prepared by the staff of W. A. Craig, Inc., under the professional supervision of the persons whose seals and signatures appear hereon. No warranty, either expressed or implied, is made as to the professional advice presented herein. The site descriptions contained in this document are based upon our current understanding of site conditions. These conditions are subject to change as W.A. Craig, Inc. evaluates additional information.

Opinions or conclusions presented in this document are professional opinions based solely upon a review of existing environmental data. We recognize that the limited scope of services performed in execution of this investigation may not be appropriate to satisfy the needs, or requirements of other state agencies, or of other users. Any use or reuse of this document or its findings, conclusions or recommendations presented herein is at the sole risk of the user.



Tim D. Cook, P.E.
Principal Engineer

1.0 INTRODUCTION

The purpose of this work plan is to revise our *Site Investigation Work Plan* dated October 1, 2001 to incorporate changes requested by Alameda County Health Care Services (ACHCS). Specifically, the ACHCS requested that three monitoring wells be installed to determine the direction of groundwater flow and that the installation of temporary borings as described in the previous work plan be delayed until the flow direction could be determined.

1.1 Site Location and Description

The Oakland Truck Stop located at 1107 5th Street in Oakland, California ("the Site") is owned by Mr. Tony Muir. Rino Pacific, Inc. and Rinehart Distribution, Inc. lease the property from the owner. The Site is in a commercial and industrial district at the intersection of Adeline and 5th Streets (**Figure 1**). A service station building, two underground storage tanks, four pump dispenser islands, a truck scale and scale house currently occupy the Site.

The Site topography is flat and is bounded on the north by the Interstate 880 overpass, on the west by Adeline Street, on the south by a restaurant and parking lot and on the east by Chestnut Street. The nearest surface water is the Oakland Estuary located approximately 2,400 feet south of the Site.

1.2 Background

The Site was developed as a truck stop approximately 40 years ago and has been in operation throughout this period. Three 10,000-gallon underground storage tanks (USTs) and one 8,000-gallon UST were formerly maintained at the Site. All four USTs were constructed of single-wall steel. Of the 10,000-gallon USTs, two contained diesel fuel and one contained mid-grade unleaded gasoline. The 8,000-gallon UST contained regular unleaded gasoline. Prior to the recent remodel of the Site, fuel product lines were constructed of single-wall fiberglass.

In mid-1995 an unauthorized release of gasoline occurred as a result of a leak in a product line. Product lines associated with this release were replaced as soon as the leak was discovered. Interim cleanup of the spill was performed by installing and operating two product recovery sumps in the vicinity of the release. The sumps recovered approximately 6.3 gallons of gasoline using a skimmer device and reduced the floating product thickness to a sheen on the water in the recovery wells. The sumps were removed during recent leaseholder improvements at the Site. The water table fluctuates seasonally between 10 inches and 4 feet below grade.

In March 1999, the four single-walled USTs were replaced with two 15,000-gallon double-walled fiberglass USTs. An interim remedial action was performed during UST replacement activities to remove the grossly contaminated soil and groundwater.

The following is a summary of interim remedial activities performed at the site by Trinity Excavating and Engineering, Inc. of Santa Rosa, California. The work was performed between February 8, 1999 and May 5, 1999.

2/8 through 2/10, 1999	Excavated to tops of tanks and rinsed three gasoline and one diesel underground fuel tanks
2/11/1999	Removed tanks and disposed offsite (observed by Fire Inspector)
3/3 & 3/4, 1999	Removed approximately 2,100 tons of contaminated soil from excavation bottom and sides before sampling as directed by Fire Inspector. Collected excavation and stockpile samples. Removed water from pit as needed. Stored approximately 33,000 gallons of contaminated water in temporary storage tanks.
2/24 through 5/19, 1999	Loaded, manifested and disposed of 2,000.5 tons of contaminated soil at the Forward non-hazardous disposal facility near Stockton, California.
2/1 through 5/6, 1999	Provided and placed approximately 1,700 tons of backfill.
5/3 through 5/5, 1999	Disposed of contaminated water at Seaport Environmental.

The lateral extent of hydrocarbon contamination has not yet determined. Quarterly groundwater monitoring is being conducted. The direction of groundwater flow has varied from southwest to north. Interpretation of the groundwater gradient is suspect ^{been} ~~(and could be affected by tidal fluctuation.)~~

The shallow aquifer beneath the site has no beneficial use as a potential drinking water resource due to its high total dissolved solids concentration (>3,000 mg/l). Proposed Groundwater Amendments to the Water Quality Control Plan (Basin Plan), dated April 2000, specifically states that shallow groundwater to a depth of about 100 feet in portions of the East Bay Plain is often brackish due to naturally-occurring saltwater intrusion. However, well yields may be sufficient for industrial or irrigation uses.

This same document states that cleanup in areas that have no beneficial use as a drinking water resource, should be protective of ecological receptors, human health and probable non-potable uses (e.g., irrigation or industrial process supply). Pursuant to State Board Resolution No. 92-49, pollution sites will continue to be required to demonstrate that 1) reasonably adequate source removal has occurred, 2) the plume has been reasonably defined both laterally and vertically and 3) a long-term monitoring program is established to verify that the plume is stable and will not impact ecological receptors or human health (e.g., from volatilization into trenches and buildings). In the East Bay Plain there are deep aquifers that will continue to be designated as potential drinking water resources. In such a setting, the deep aquifers (defined as aquifers

below the Yerba Buena Mud) are subject to protection as potential drinking water resources.

In a letter to Rinehart Distributing Inc. dated July 27, 2001, Alameda County Health Care Services (ACHCS) requested that additional investigation be performed to delineate the extent of petroleum hydrocarbons both on-site and off-site. Specifically, they requested temporary borings and requested borings to the south or adjacent to the main building.

2.0 PROPOSED SCOPE OF WORK

The scope of services proposed herein will be performed to determine the presence and extent of petroleum hydrocarbons in soil and groundwater. The proposed scope of services includes the following:

- Preparing this Site Investigation Work Plan for submittal to the RWQCB and ACHCS;
- Obtaining appropriate regulatory permits and approvals;
- Obtaining permits and site access to install three monitoring wells;
- Obtaining underground utility clearance through Underground Service Alert;
- Installing three monitoring wells at and around the Site;
- Abandoning one on-site well;
- Surveying the new wells and tying them into the existing monitoring well network;
- Measure water levels in all monitoring wells to determine the groundwater flow direction at the Site;
- Collecting and analyzing soil and groundwater samples from each monitoring well; and
- Preparing a Site Investigation Report that evaluates site conditions and makes recommendations regarding corrective actions, if necessary.

3.0 FIELD PROCEDURES

Three new monitoring wells will be situated in the locations shown on **Figure 2**. The purpose of these wells is to determine the direction of groundwater flow and to delineate the extent of petroleum hydrocarbons in groundwater.

Well MW-3 will be properly abandoned due to incompatible well screening with the other seven monitoring wells. We will install a replacement well (MW-3N), with a screened interval similar to the most recently installed wells.

Wells MW-9 and MW-10 will be located south of the Site on an adjoining parcel owned by Oliver's Hofbrau Restaurant located at 360 Adeline Street.

3.1 Well Permits and Utility Clearance

The Alameda County Department of Public Works requires that well permits be obtained prior to the installation of monitoring wells. Well permit applications will be filed with Alameda

County at least 14 days prior to installation of the wells. ACHCS will be given at least 48 hours notice prior to site investigation field activities.

Per requirements of California law, underground service alert (USA) will be notified of the intent to perform subsurface investigation at the Site. USA will notify public and private utility companies and each utility will send a field representative to mark the location of underground utilities owned and maintained by each utility company. In addition, W.A. Craig will review existing utility plans to ensure that buried utilities are not within two feet of the proposed monitoring well locations.

3.2 Monitoring Well Drilling Procedures

Monitoring wells will be drilled using a truck-mounted hollow-stem auger drill rig. Drilling will cease approximately 10 feet below the first encountered water-bearing zone.

Borings will be continuously logged in the field using the unified soil classification system. The field geologist will observe significant changes in material penetrated, changes in drilling conditions, hydraulic pressure, and drilling action. The field geologist will observe and record lithologic changes, the relative moisture content of soils and note water-producing zones. This record will be used later to prepare a detailed boring log. Lithologic descriptions will include soil or rock type, color, grain, size, texture, hardness, degree of induration, carbonate content, presence of fossils, minerals and other materials (gypsum, hydrocarbons) and other pertinent information.

Soil cuttings from the drilling operations will be stored on-site in 55-gallon, steel, DOT approve drums. These investigation-derived wastes will be characterized as hazardous or non-hazardous based of the results of the investigation. Disposal of these wastes is not included in this scope of work.

3.3 Monitoring Well Abandonment

Well MW-3 will be abandoned by over-drilling the 2-inch diameter casing with hollow-stem augers. The PVC casing will be removed as well as the traffic box. The borehole will be filled with a Portland cement/bentonite grout to the surface. A cement mix or cold-patch asphalt mix will be used to finish the boring at the surface grade.

3.4 Monitoring Well Construction

Monitoring wells will be constructed of two-inch diameter, flush-threaded, Schedule-40 PVC well casing. The screen and casing will be installed through the hollow-stem augers. The screened interval of the well will be factory slotted with a slot size of 0.010 inches. The well screen will be installed to approximately 10-feet below the first encountered groundwater, or as conditions warrant. The screened section annulus will be packed with clean #2/12 graded sand

to a level approximately one foot above the screened interval. Bentonite chips will be placed above the sand as a sealing material. The well will be sealed from the bentonite seal to the ground surface using a Portland cement/bentonite grout. No glues or other solvents will be used in the construction of the well. The well is not designed to provide optimum flow but is intended to provide water samples that are representative of water quality in the first water-bearing zone.

The wellhead will be protected from vandalism using a locking expansion-plug cap and will be housed within a traffic-rated box to protect the well from traffic and surface water runoff. The grout will be allowed to set for a period of 72 hours prior to development or sampling.

3.5 Well Development

Intermittent surging, bailing and pumping will be used to develop the three new monitoring wells. Field parameters, including color, odor, free-phase liquid, turbidity, specific-conductance, temperature, and pH will be monitored during development. Development will continue until field parameters stabilize and the water is relatively clear and free of silt and sand.

3.6 Groundwater Sample Collection

The three new monitoring wells will be sampled along with seven other on-site monitoring wells on a quarterly schedule. Water level measurements will be obtained from the monitoring wells prior to sampling. The wells will be purged of a minimum of three well-casing volumes prior to sampling. The wells will be purged using a disposable polyethylene bailer. Should the well become completely evacuated during purging, samples will be collected after the well has recovered to 80 percent of its initial water level. Field parameters will be intermittently monitored during the purging of the well (as described in well development).

Groundwater samples will be decanted from the bailer into laboratory supplied containers, approved for the analyses required. The samples will be immediately placed in refrigerated storage for delivery to the laboratory. The samples will be labeled in such a manner as to maintain client confidentiality. Samples will be delivered under chain of custody control to an analytical laboratory that is certified by the State of California to perform the requested analyses.

3.7 Surveying

A licensed professional surveyor will survey the three new monitoring wells for horizontal and elevation control. The survey will tie the top of casing elevation for the new wells to the survey datum previously established for the other seven wells. The top of well casing elevations will be accurate to within 0.01 foot. A permanent mark on the top of the well casing such as an indelible mark or notch will reference the surveyed point on the casing. All subsequent water level measurements will be tied to this reference point. The surveyor will produce an Site map

with monitoring well and temporary boring locations in AutoCAD. This map will be used as a base map for future site investigation reports.

3.8 Field Equipment Decontamination Procedures

Soil sampling devices will be decontaminated before and after each use by washing in a laboratory grade detergent solution, followed by tap water rinses. Potable water will be used for decontamination of drilling equipment.

Rinseate water used in the decontamination process and purge water and soil cuttings from the new monitoring well borings will be stored on-site in steel DOT approved drums. Drums will be labeled as to contents, date container filled, company name, and sealed. The drums will be left on-site for subsequent disposal pending analytical results.

4.0 LABORATORY ANALYSIS


specify # & location
Soil and groundwater samples will be analyzed by McCampbell Analytical, Inc. for total petroleum hydrocarbons as gasoline (TPH-g) and total petroleum hydrocarbons as diesel (TPH-d) by EPA method 8015 modified; for benzene, toluene, ethylbenzene and xylenes (BTEX) by EPA method 8020; and for MtBE and other fuel oxygenates using EPA method 8260b. McCampbell Analytical is certified by the State of California to perform these analyses.

5.0 SITE INVESTIGATION REPORT

A Site Investigation Report will be prepared and submitted to the ACHCS and the RWQCB. The report will include a site history, figures identifying sample locations, boring logs, laboratory analytical reports, a summary of all work performed, a tabulation of analytical results, conclusions and recommendations for additional investigation or remediation work, if necessary.

6.0 SCHEDULE

Approval of this work plan, obtaining well permits and scheduling of subcontractor services could be completed in approximately five weeks. The drilling, well installation, well development, and well sampling activities should be completed in two weeks (allowing for 72 hours curing of the well sealant and sampling 48 hours after well development). The results of soil sample analyses should be completed within 14 days of sample collection. Groundwater sample analytical results should be available approximately 10 days after sample collection. The results of the additional investigative work would be presented in a report approximately three weeks after ~~completion of~~ the receipt of the final laboratory analytical results. WAC estimates this scope of work could be completed in approximately 12 weeks, although additional time may be required for pre-approval of the investigation costs by the State Water Resources Control Board, Underground Storage Tank Cleanup Fund.

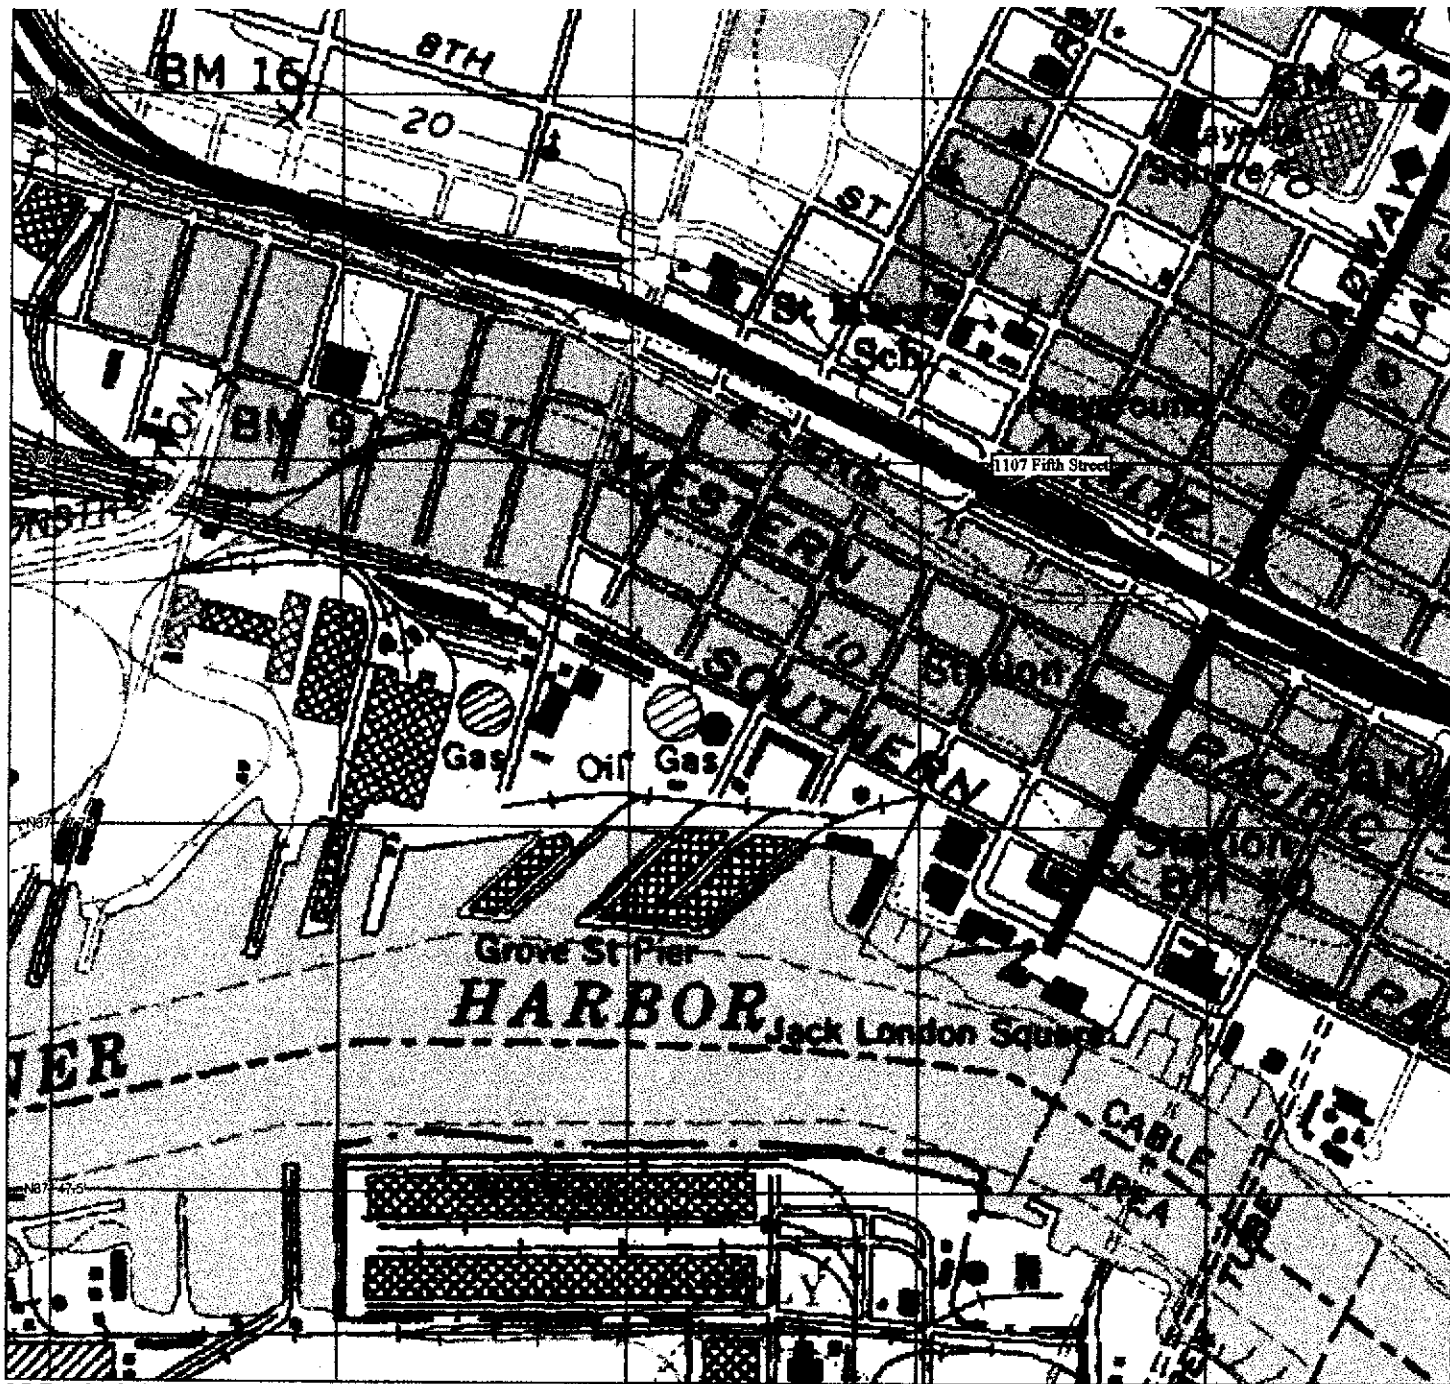

3-D TopoQuads Copyright © 1999 DeLorme Yarmouth, ME 04096 Source Data: USGS

350 ft Scale: 1 : 9,600 Detail: 14-4 Datum: WGS84

Project No: 3628

October 1, 2001

Site Location Map
 Oakland Truck Stop
 1107 5th Street
 Oakland, California

Figure 1





W. A. Craig, Inc.

Environmental Contracting and Consulting

6940 Tremont Road
 Dixon, California 95620
 Cal License #455752

(707) 693-2929
 FAX (707) 693-2922



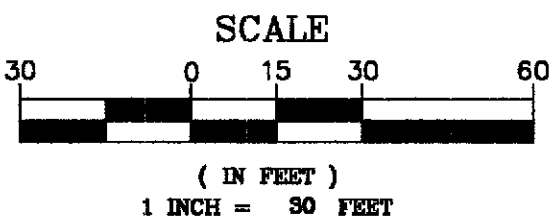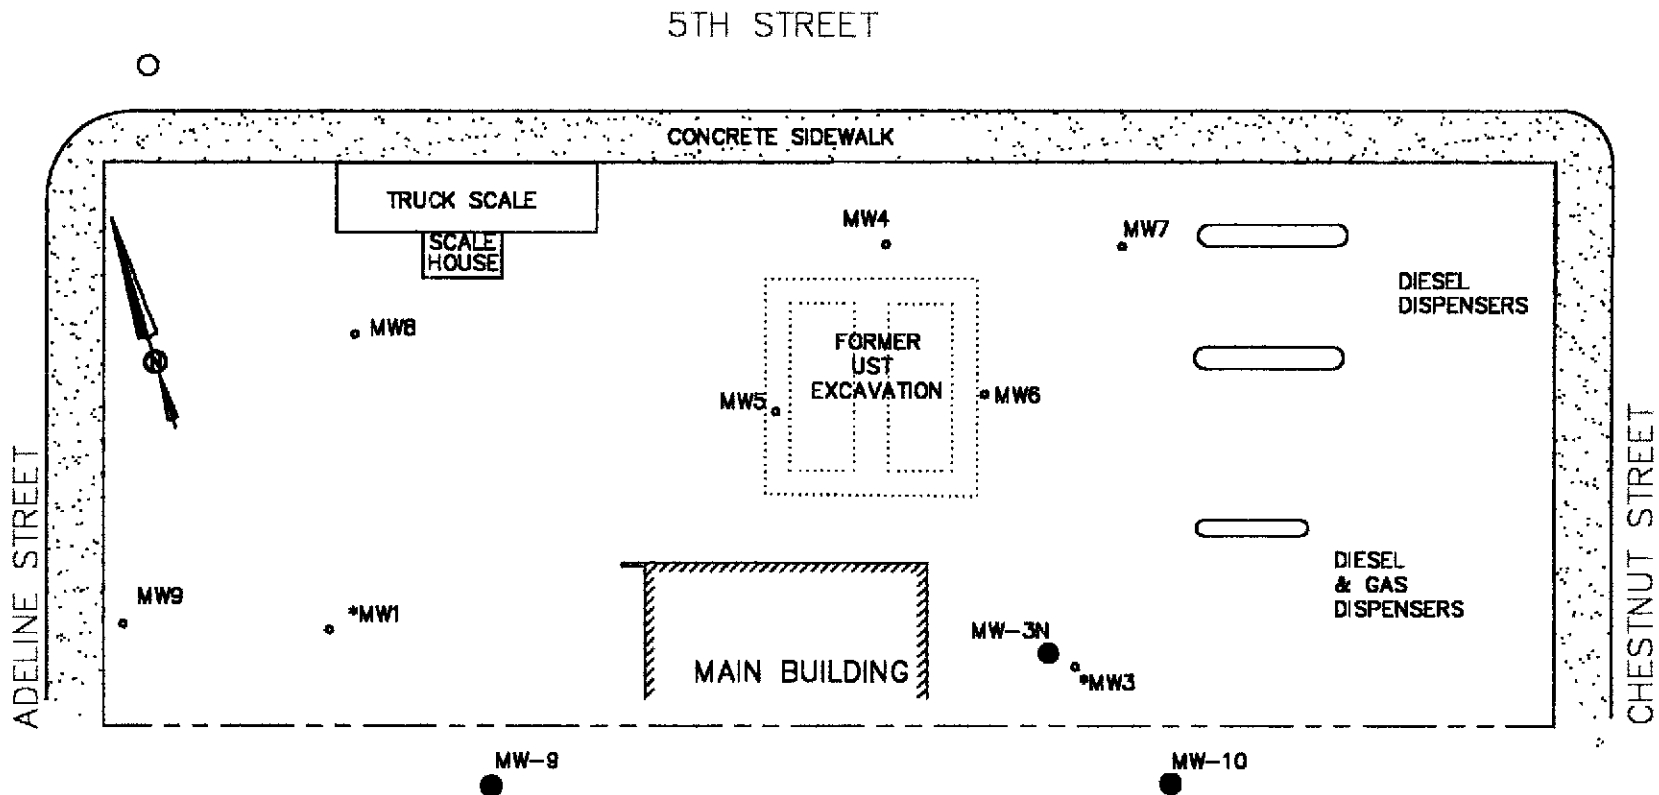

EXPLANATION

- Proposed Monitoring Well
- Existing Monitoring Wells



W.A. Craig, Inc.
 6940 Tremont Road LIC# 455752
 Dixon, California 95620-9603
 PH# (707) 693-2929 Fax# (707) 693-2922

Proposed Monitoring Well Locations
OAKLAND TRUCK STOP
1107 FIFTH STREET
OAKLAND, CA

Project #: 3628
 Date: 10/22/01

Figure:
2