

Eric HetrickProject Manager
Marketing Business Unit

RECEIVED

Chevron Environmental Management Company 6101 Bollinger Canyon Road San Ramon, CA 94583 Tel (925) 790-6491 ehetrick@chevron.com

By Alameda County Environmental Health at 10:46 am, Mar 23, 2015

March 20, 2015

Alameda County Health Care Services 1131 Harbor Bay Parkway, Suite 250 Alameda, CA 94502-6577

e: Former Chevron Service Station 95607

5269 Crow Canyon Road

Castro Valley, CA ACEH Case #RO 0350

I have reviewed the attached Monthly Remedial Progress Report – February 2015.

The information in this report is accurate to the best of my knowledge and all local Agency/Regional Board guidelines have been followed. This report was prepared by Conestoga Rovers Associates, upon who assistance and advice I have relied.

This letter is submitted pursuant to the requirements of California Water Code Section 13267(b)(1) and the regulating implementation entitled Appendix A pertaining thereto.

I declare under penalty of perjury that the foregoing is true and correct to the best of my knowledge.

Sincerely,

Eric Hetrick Project Manager

Attachment: Monthly Remedial Progress Report – February 2015



5900 Hollis Street, Suite A Emeryville, California 94608

Telephone: (510) 420-0700 Fax: (510) 420-9170

http://www.craworld.com

March 20, 2015 Reference No. 311950

Mr. Mark Detterman Alameda County Environmental Health Services 1131 Harbor Bay Parkway Alameda, California 94502

Re: Monthly Remedial Progress Report - February 2015

Former Chevron Station 95607 5269 Crow Canyon Road Castro Valley, California Fuel Leak Case RO0350

Dear Mr. Detterman:

Conestoga-Rovers & Associates (CRA), on behalf of Chevron Environmental Management Company (Chevron), is providing this *Monthly Remedial Progress Report – February 2015* (Report), for the site referenced above (Figure 1). This report was prepared in accordance with Alameda County Environmental Health Services (ACEHS) Approval of the Remedial Action Plan, dated December 11, 2013. This report includes a summary of the DPE system operations conducted in the month of February 2015 and cumulatively (Tables 1 through 4).

DPE system compliance testing and sampling was performed on February 4, 2015 in accordance with system operational permits. During the reporting period, approximately 491 pounds of total petroleum hydrocarbons as gasoline (TPHg), and 8 pounds of benzene were removed in vapor phase (Table 4), and approximately 0.6 pounds of TPHg and 0.03 pounds of benzene were removed in dissolved phase (Table 2). A summary of the DPE system operational performance for the month of February 2015 is presented below.

VAPOR-PHASE EXTRACTION DATA-FEBRUARY 2015

Soil Vapor Influent Flow Rate (avg scfm)	121 scfm					
Soil Vapor Laboratory Influent Concentrations (TPHg ppmv)	800 ppmv					
Soil Vapor Laboratory Influent Concentrations (Benzene ppmv)	17 ppmv					
Soil Vapor Mass Removal (lb TPHg/period)	491 pounds					
Soil Vapor Mass Removal (lb Benzene/period)	8 pounds					
Soil Vapor Extraction Period Operating Uptime (hours)	363 hours					
Soil Vapor Treatment Destruction Efficiency (%)	99 percent					
ppmv – parts per million by volume						

Equal Employment Opportunity Employer



March 20, 2015 Reference No. 311950

DISSOLVED-PHASE EXTRACTION DATA-FEBRUARY 2015

Maximum Groundwater Extraction Rate (gpm)	1.0 gpm
Average Groundwater Extraction Rate (gpm)	0.9 gpm
Dissolved-Phase Mass Removal Rate (lb TPHg/period)	0.6 pounds
Dissolved-Phase Mass Removal Rate (lb Benzene/period)	0.03 pounds
Total Volume Groundwater Treated (gallons)	18,622 gallons
Groundwater Extraction Period Operating Uptime (hours)	363 hours

Please contact Darrell Smolko of CRA at (925) 334-8617 or Judy Gilbert of CRA at (510) 420-3314, if you have any questions or comments.

Sincerely,

CONESTOGA-ROVERS & ASSOCIATES

Darrell Smolko

DS/mws/39

Nanul Snoths

Brandon S. Wilken, PG 7564

Figure 1 General Site Plan

Table 1 Groundwater Extraction & Treatment System Hydrocarbon Analytical Data

Table 2 Groundwater Extraction & Treatment System Operational Data &

Hydrocarbon Mass Removal

Table 3 Soil Vapor Extraction Operational Data

Table 4 Soil Vapor Extraction Analytical Data & Mass Removal


Attachment A Laboratory Analytical Reports

c.c.: Mr. Eric Hetrick, Chevron EMC (electronic copy)

Mr. Kevin Hinkley, Property Owner

Ms. Diane Riggs, Forest Creek Townhomes Association

FIGURE

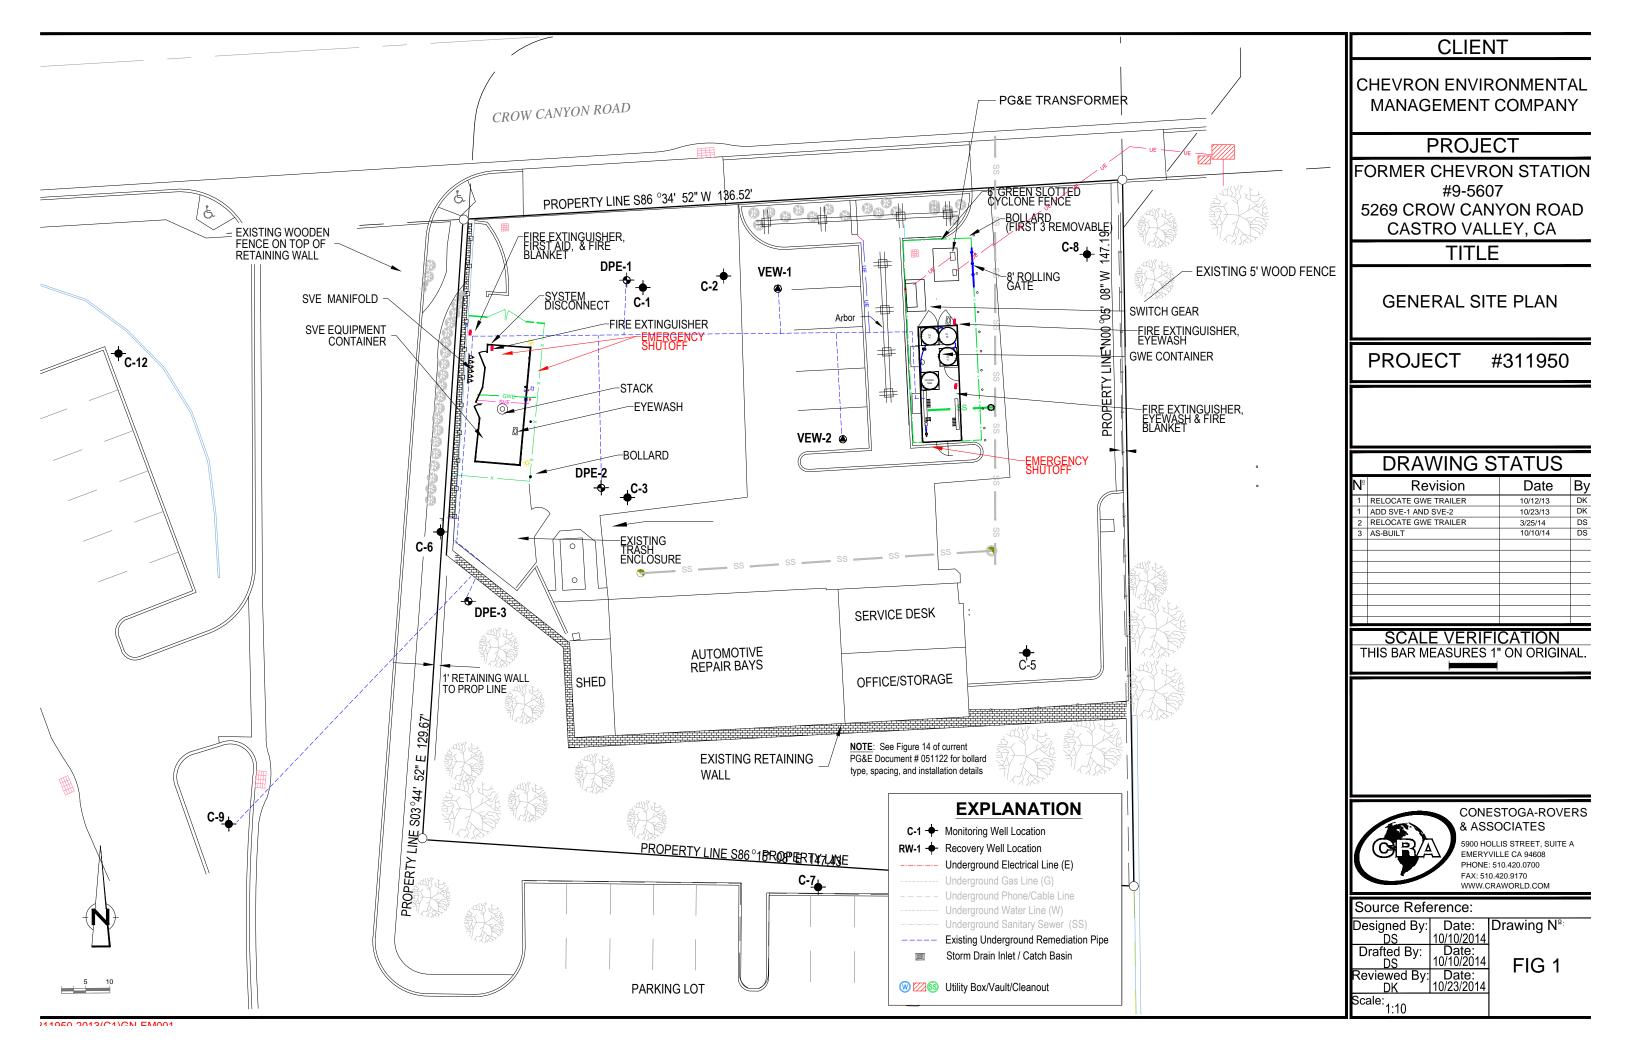

TABLEG

Table 4: Dual Phase Extraction System **Analytical Data** Former Chevron Station # 9-5607 5269 Crow Canvon Road, Castro Valley, California

Date	Concentrations ¹ Entering Deficiency							WIBE		**	<i>.</i>										
Date			IN	F-2			Effl	luent		Removal	Cumulative	Emission	Removal	Cumulative	Emission	Removal	Cumulative	Emission	Removal	Emission	Destruction
(mm/dd/yy hh:mm)	Operating Wells	TPHg	Benzene	MTBE	voc	TPHg	Benzene	MTBE	voc	Rate ^{2, 6}	Removed ⁷	Rate ^{2, 6}	Rate ^{3, 6}	Removed ⁷	Rate ^{3, 6}	Rate ^{4, 6}	Removed ⁷	Rate ^{4, 6}	Rate ^{5, 6}	Rate ^{5, 6}	Efficiency
		(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppd)	(pounds)	(ppd)	(ppd)	(pounds)	(ppd)	(ppd)	(pounds)	(ppd)	(ppd)	(ppd)	(%)
9/12/14 14:00	C9, DPE-1 - DPE3, VE-1, VE-2	4,200	44	38	4,282	46	0.39	0.19	46.58	348.5	0.0	3.8	3.3	0.0	0.0	3.2	0.0	0.0	355.3	4.0	98.9%
9/29/14 14:00	C9, DPE-1 - DPE3, VE-1, VE-2									287.1	72.8	3.1	2.7	0.7	0.0	2.7	0.7	0.0	292.7	3.3	98.9%
10/6/14 11:00	C9, DPE-1 - DPE3, VE-1, VE-2									292.3	133.2	3.2	2.8	1.3	0.0	2.7	1.2	0.0	298.0	3.3	98.9%
10/13/14 11:00	C9, DPE-1 - DPE-3	1,500	10	< 20	1,530	<5	< 0.5	< 0.5	< 6.0	109.3	1019.9	0.4	0.7	8.9	0.0	1.5	10.5	0.0	111.4	0.4	99.6%
10/20/14 11:30	C9, DPE-1 - DPE-3									105.3	1762.0	0.4	0.6	13.3	0.0	1.4	20.6	0.0	107.4	0.4	99.6%
10/27/14 11:00	C9, DPE-1, DPE2									113.8	2296.2	0.4	0.7	16.6	0.0	1.6	27.9	0.0	116.1	0.5	99.6%
11/6/14 13:15	C9, DPE-2, DPE3									73.1	2557.0	0.2	0.4	18.2	0.0	1.0	31.5	0.0	74.5	0.2	99.6%
11/21/14 13:50	C9, DPE-2, DPE-3*	558	0.01	0.01	558	0.31	0.0020	< 0.002	0.31	27.0	2950.0	0.0	0.0	19.9	0.0	0.0	35.4	0.0	27.0	0.0	99.9%
12/2/14 15:15	C9, DPE-2, DPE-3	1,000	12	9	1,021	0.23	0.0012	< 0.001	0.23	42.6	3114.3	0.0	0.5	21.0	0.0	0.4	36.3	0.0	43.5	0.0	100.0%
12/16/14 11:30	C9, DPE-2, DPE-3									32.0	3501.4	0.0	0.3	25.2	0.0	0.3	39.8	0.0	32.6	0.0	100.0%
12/31/14 10:30	C9, DPE-2, DPE-3									35.9	4008.9	0.0	0.4	30.7	0.0	0.3	44.4	0.0	36.6	0.0	100.0%
1/14/15 11:25	C9, DPE-2, DPE-3	870	13	4.7	888	0.08	< 0.001	< 0.001	0.08	35.1	4506.7	0.0	0.5	36.8	0.0	0.2	48.0	0.0	35.8	0.0	100.0%
1/23/15 14:35	C9, DPE-2, DPE-3									37.4	4837.5	0.0	0.5	41.3	0.0	0.2	49.8	0.0	38.1	0.0	100.0%
2/4/15 11:00	C9, DPE-2	800	17	7.3	824	1.5	0.014	0.0012	1.52	29.3	5227.7	0.1	0.6	47.5	0.0	0.3	52.6	0.0	30.2	0.1	99.8%
2/17/15 14:30	C9, DPE-2									29.8	5328.9	0.1	0.6	49.5	0.0	0.3	53.6	0.0	30.7	0.1	99.8%
Permit conditions					<u>'</u>	<u> </u>									<0.017 ppd					>98.5% for >	>2,000 ppm inlet
																			>	97% for >200-<	<2,000 ppm inlet
																				>90% for	r <200 ppm inlet
								Period Po	ounds Removed ⁹ :	TPHg =	491		Benzene =	8		MTBE =	4				
								Total P	Pounds Removed:	TPHg =	5,329		Benzene =	49.5		MTBE =	53.56				

- Notes:

 1. TPHg, Benzene, and MTBE analyzed by Modified EPA Method TO-3. Vapor samples were collected in 1-liter tedlar bags unless otherwise noted.
 - 2. Molecular weight of TPHg assumed to be 86 lb/lb-mole as hexane.
 - 3. Molecular weight of Benzene assumed to be 78 lb/lb-mole.
 - 4. Molecular weight of MTBE assumed to be 88 lb/lb-mole. 5. Molecular weight of VOCs assumed to be 86 lb/lb-mole as hexane.

 - 6. Removal/Emission Rate (ppd) = C (ppmv) x Q (scfm) x (1lb-mole/386ft³) x MW (lb/lb-mole) x 60 min/hr x 24 hr/day x 10⁻⁶

C = concentration = concentration = flow

Q = flow

MW = molecular weig = molecular weight

- 7. Cumulative TPHg / Benzene / MTBE removed = Previous Total + (Average of Previous and Current Removal Rates * Operation Interval)
- 8. Inflluent not measured due to water in vapor stream. Individual well samples were collected at a lower vacuum at this time.
- 9 Reporting period from January 23, 2015 through February 17, 2015

BAAQMD Requirements:

Flow Rate < 300 scfm

Oxidizer Temperature > 600 deg Fahrenheit in electric catalytic mode and > 1400 degrees in thermal catalytic mode

Benzene Emission Limit < 0.017 ppd

Destruction efficiency (measured as hexane)

98.50% VOC >2,000 ppmv

97.00% VOC >200 and <2,000 ppmv

90.00% VOC < 200 ppmv

Note: If outlet VOC < 10 ppmv, destruction efficiency requirement is waived

Abbreviations:

mm/dd/yy = month/day/year

hh:mm = hours : minutes

TPHg = total petroluem hydrocarbons as gasoline

MTBE = methyl tertiary butyl ether

TPHg

MTBE

Benzene

VOC

VOC = volatile organic compounds ppmv = parts per million by volume

ppd = pounds per day

NA = not applicable

NM = not measured

lb = pounds

ft³ = cubic feet

scfm = standard cubic feet per minute

INF-1

INF-2 = pre-dilution system influent

TBD = post-dilution system influent

= Sample taken during this time and are awaiting results

311950-39-MASTER TABLES Page 1

Table 2

Groundwater Extraction and Treatment System

$Operational\ Data\ and\ Dissolved\ Phase\ Hydrocarbons\ Mass\ Removal\ Data$

Former Chevron Station # 9-5607

5269 Crow Canyon Road, Castro Valley, California

								TPHg			Benzene			MTBE	
Date	Well	Hour	Totalizer	Period	Period Operational		ТРНд	Period	Cumulative	Benzene	Period	Cumulative	MTBE	Period	Cumulative
()	IDs	Meter	Reading	Volume	Flow Rate	Volume	Concentration	Removal ²	Removal	Concentration (µg/L)	Removal	Removal	Concentration (µg/L)	Removal	Removal
(mm/dd/yy)		(hours)	(gallons)	(gallons)	(gpm)	(gallons)	(μg/L)	(pounds)	(pounds)	(μg/L)	(pounds)	(pounds)	(μg/L)	(pounds)	(pounds)
9/12/14 9:00	DPE-1 - DPE-3, C-9	4008.5	330,400	0	0.0	0									
9/12/14 14:00	DPE-1 - DPE-3, C-9	4013.5	331,500	1,100	3.7	1,100	6,000	0.055	0.055	1,800	0.017	0.017	4	0.000	0.000
9/29/14 14:00	DPE-1 - DPE-3, C-9	4019.0	332,000	500	1.5	1,600		0.025	0.08		0.008	0.024		0.000	0.000
10/6/14 11:00	DPE-1 - DPE-3, C-9	4024.0	332,700	700	2.3	2,300		0.035	0.12		0.011	0.035		0.000	0.000
10/13/14 14:00	DPE-1 - DPE-3, C-9	4,130.0	341,085	8,385	1.3	10,685	7,500	0.525	0.64	1,600	0.112	0.146	4	0.000	0.000
10/20/14 11:30	DPE-1 - DPE-3, C-9	4,296.0	348,600	7,515	0.8	18,200		0.470	1.11		0.100	0.247		0.000	0.001
10/27/14 11:00	DPE-1 - DPE-3, C-9	4,413.0	354,200	5,600	0.8	23,800		0.350	1.46		0.075	0.322		0.000	0.001
11/6/14 13:15	DPE-1 - DPE-3, C-9	4,480.0	364,390	10,190	2.5	33,990	8,000	0.680	2.14	990	0.084	0.406	10	0.001	0.002
11/21/14 13:50	DPE-1 - DPE-3, C-9	4,668.6	373,033	8,643	0.8	42,633		0.577	2.72		0.071	0.477		0.001	0.002
12/2/14 15:15	DPE-1 - DPE-3, C-9	4,781.9	379,635	6,602	1.0	49,235	7,000	0.386	3.10	780	0.043	0.520	4	0.000	0.003
12/16/14 11:30	DPE-1 - DPE-3, C-9	5,030.7	399,600	19,965	1.3	69,200		1.166	4.27		0.130	0.650		0.001	0.003
12/31/14 10:30	DPE-1 - DPE-3, C-9	5,390.1	436,625	37,025	1.7	106,225		2.163	6.43		0.241	0.891		0.001	0.004
1/14/15 11:25	DPE-1 - DPE-3, C-9	5,726.6	461,160	24,535	1.2	130,760	3,700	0.757	7.19	290	0.059	0.950	3	0.001	0.005
1/23/15 14:35	DPE-1 - DPE-3, C-9	5,945.7	472,688	11,528	0.9	142,288		0.356	7.55		0.028	0.978		0.000	0.005
2/4/15 11:00	DPE-1 - DPE-3, C-9	6,226.7	486,220	13,532	0.8	155,820	4,100	0.463	8.01	190	0.021	1.000	3	0.000	0.006
2/17/15 14:30	DPE-1 - DPE-3, C-9	6,309.0	491,310	5,090	1.0	160,910		0.174	8.18		0.008	1.008		0.000	0.006
Agency Limits															
				Total Ex	tracted Volume (gal):	160,910	Pounds Removed:	0.64	8.18	Pounds Removed:	0.03	1.01	Pounds Removed:	0.00	0.01
			Average	Operation	nal Flow Rate (gpm) ³ :	1.27	Gallons Removed ⁴	0.10	1.34	Gallons Removed ⁴	0.0	0.14	Gallons Removed	0.00	0.00
Reporting Period: 1/	/23/15 - 2/17/2015						Cumulative Results	s Since Start-	ıp:						
Number of Days dur Gallons of Extracted Average Flow Rate Pounds of TPHg Re				25 18,622 0.85 0.637	gpm		Number Days since Cumulative Total (Average Flow Rate Cumulative Pound	Gallons Extra			158 160,910 1.17 8.18	gal gpm			
TPHg Removal Rate Pounds of Benzene Removed Benzene Removal Rate 0.025 lbs/day 0.030 lbs 0.001 lbs/day			lbs/day lbs		TPHg Removal Rate Cumulative Pounds of Benzene Removed Benzene Removal Rate			0.052 lbs/day 1.008 lbs 0.006 lbs/day							
Pounds of MTBE Removed MTBE Removal Rate				0.000			Cumulative Pound MTBE Removal R	s of MTBE R	emoved		0.006				

Formulas and Assumptions:

- 1. Hour meter readings taken at the end of the site visit
- 2. Mass Removed During the Period = Volume of Water Extracted (gallons) x Concentration (µg/L) x (g/10⁶ µg) x (lb/453.6g) x (3.785 L/gal)
- 3. When concentration of individual parameters were not detected, the concentration was assumed to be half the detection limit for calculation Average Flow Rate = (Volume of Extracted Water (gal) / Number of Operational Days) * (60 minutes/hour) * (24 hours/day)
- 4. Gallons Removed = (Mass (lb) / Density (g/cc)) x 453.6 (g/lb) x (L/1000 cc) x (gal/3.785 L)

Density: = 0.73 g/cc TPHg = 0.88 g/cc Benzene = 0.74 g/cc MTBE

Abbreviations:

TPHg = total petroleum hydrocarbons as gasoline

MTBE = methyl tertiary butyl ether

L = liter

gal = gallon

gpm = gallon per minute

 μ g/L = micrograms per liter

g = grams

cc = cubic centimeter

lb = pounds

311950-39-MASTER TABLES Page 1

Table 3: Dual Phase Extraction System Operational Data Former Chevron Station # 9-5607 5269 Crow Canyon Road, Castro Valley, California

Date	Operating	Operating	Hour	System	Period	Blower	INF-1	INF-1	INF-1	INF-1	INF-2	INF-2	INF-2	INF-2	Effluent	Dilution	Pre-Oxidizer	Post-Oxidizer	INF-2	Effluent	Mass Removal	Destruction
	Wells	Time	Meter	Uptime	Operation	Vacuum	Vacuum	Temperature	Measured Flow	Calculated Flow	Pressure ¹	Temperature	Measured Flow ¹	Calculated Flow	Flow Rate	Air	Temp	Temp	OVA	PID	based on OVA	Efficiency
(mm/dd/yy hh:mm)	(open)	(hours)	(hours)	(%)	(hours)	(inHg)	(inHg)	(°F)	(acfm)	(scfm)	(inH ₂ O)	(°F)	(acfm)	(scfm)	(scfm)	(% open)	(°F)	(°F)	(ppmv)	(ppmv)	(ppd)	(%)
9/12/14 14:00	C9, DPE-1 - DPE3, VE-1, VE-2	0.00	4013.5	0%	0.0	NM	3.00	NM	NM	NM	10.0	155	294	259	259	20	747	NM	8000	20.0	663.8	99.8%
9/29/14 14:00	C9, DPE-1 - DPE3, VE-1, VE-2	5.50	4019.0	1.3%	5.5	15.0	2.81	93	165	143	11	189	255	213	213	20	880	NM	NM	0.0	NM	100.0%
10/6/14 11:00	C9, DPE-1 - DPE3, VE-1, VE-2	5.00	4024	3.0%	5.0	15.0	2.81	83	144	127	10	176	255	217	217	25	899	NM	560	0.2	39.0	100.0%
10/13/14 14:00	C9, DPE-1 - DPE-3	106.00	4130	62.0%	106.0	14.5	2.35	68	191	176	10.9	180	268	227	227	0	750	883	1100	5.0	80.1	99.5%
10/20/14 11:30	C9, DPE-1 - DPE-3	166.00	4296	100.3%	166.0	15.0	3.18	79	140	123	10.5	171	255	219	219	0	750	927	650	0.3	45.6	100.0%
10/27/14 11:00	C9, DPE-1, DPE-2	117.00	4413	69.9%	117.0	15.0	4.1	61	161	141	11.6	160	270	236	236	0	750	897	700	0.4	53.1	99.9%
11/6/14 13:15	C9, DPE-3, DPE-2	67.00	4480	27.7%	67.0	20.0	5.0	61	146	123	10.7	61	146	152	123	0	701	900	1250	0.0	60.9	100.0%
11/21/14 13:50	C9, DPE-3, DPE-2	188.60	4669	52.3%	188.6	20.0	5.3	68	132	109	11.1	174	176	151	109	0	698	809	558	0.4	27.0	99.9%
12/2/14 15:15	C9, DPE-3, DPE-2	113.30	4782	42.7%	113.3	20.0	7.4	63	103	78	3.3	169	157	133	78	0	697	785	1215	0.5	51.8	100.0%
12/16/14 11:30	C9, DPE-3, DPE-2	249.10	5031	75.0%	249.1	18.5	10.2	64	61	41	4.3	172	118	100	100	0	700	750	1650	3.0	52.7	99.8%
12/31/14 10:30	C9, DPE-3, DPE-2	359.10	5390	100.0%	359.1	22.0	10.0	72	133	88	7.2	179	133	112	112	0	698	707	425	5.0	15.2	98.8%
1/14/15 11:25	C9, DPE-3, DPE-2	336.50	5727	99.9%	336.5	23.0	8.1	71	148	107	9.8	176	148	126	126	0	700	752	1,000	0.5	40.4	100%
1/23/15 14:35	C9, DPE-3, DPE-2	219.10	5946	100.0%	219.1	23.0	7.1	76	157	118	9.6	174	157	134	134	0	700	764	915	3.5	39.3	99.6%
2/4/15 11:00	C9, DPE-2	281.00	6227	98.8%	281.0	22.0	8.3	75	137	98	5.9	183	137	114	114	0	698	738	715	0.7	26.2	99.9%
2/17/15 14:30	C9, DPE-2	82.30	6309	26.1%	82.3	21.5	10.1	62	136	91	6.9	170	136	116	116	0	698	682	515	0.1	19.2	100.0%
Reporting Period			363	60.6%										121								99.9%
Permit Conditions:	I									<300				<300			>600	<u> </u>		<u> </u>	<u> </u>	>98.5%

Abbreviations and Notes:

mm/dd/yy = month/day/year

hh:mm = hour : minute

inHg = inches of mercury inH₂O = inches of water

°F = degrees Fahrenheit

acfm = actual cubic feet per minute

scfm = standard cubic feet per minute (flow in scfm = flow in acfm * [operating pressure {abs}] * [standard temperature {abs}] / operating temperature {abs}])

% = percentage

INF-1 = pre-dilution system influent

INF-2 = post-dilution system influent

ppmv = parts per million by volume

PID = photo-ionization detector

OVA = organic vapor analyzer

- pvd = organic vapor analyzer
 ppd = pounds per day
 1. = INF-2 flow read from chart recorder. INF-2 pressure used to convert acfm to scfm.
 2. = water in pipe; unable to measure accurate concentration/ LEL readings
 Reporting period from January 23, 2015 through February 17, 2015

Compliance:
BAAQMD Requirements:

Flow Rate < 300 scfm

Oxidizer Temperature > 600 degrees Fahrenheit in electric catalytic mode and > 1400 degrees in thermal catalytic mode

Benzene Emission Limit < 0.017ppd

Destruction Efficiency (measured as hexane)

VOC >2,000 ppmv VOC >200 and <2,000 ppmv 98.50% 97.00% 90.00% VOC < 200 ppmv

Note: If outlet VOC < 10 ppmv, destruction efficiency requirement is waived

311950-39-MASTER TABLES Page 2

Table 4: Dual Phase Extraction System **Analytical Data** Former Chevron Station # 9-5607 5269 Crow Canyon Road, Castro Valley, California

				Concentration	one ¹						TPHg			Benzene		MTBE			VOC		
Date				Concentration	ліs																
			INF-2	2			Effl	luent		Removal	Cumulative	Emission	Removal	Cumulative	Emission	Removal	Cumulative	Emission	Removal	Emission	Destruction
(mm/dd/yy hh:mm)	Operating Wells	TPHg	Benzene	MTBE	voc	TPHg	Benzene	MTBE	VOC	Rate ^{2, 6}	Removed ⁷	Rate ^{2, 6}	Rate ^{3, 6}	Removed ⁷	Rate ^{3, 6}	Rate4,6	Removed ⁷	Rate ^{4, 6}	Rate ^{5, 6}	Rate ^{5, 6}	Efficiency
		(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppmv)	(ppd)	(pounds)	(ppd)	(ppd)	(pounds)	(ppd)	(ppd)	(pounds)	(ppd)	(ppd)	(ppd)	(%)
9/12/14 14:00	C9, DPE-1 - DPE3, VE-1, VE-2	4,200	44	38	4,282	46	0.39	0.19	46.58	348.5	0.0	3.8	3.3	0.0	0.0	3.2	0.0	0.0	355.3	4.0	98.9%
9/29/14 14:00	C9, DPE-1 - DPE3, VE-1, VE-2									287.1	72.8	3.1	2.7	0.7	0.0	2.7	0.7	0.0	292.7	3.3	98.9%
10/6/14 11:00	C9, DPE-1 - DPE3, VE-1, VE-2	-	-							292.3	133.2	3.2	2.8	1.3	0.0	2.7	1.2	0.0	298.0	3.3	98.9%
10/13/14 11:00	C9, DPE-1 - DPE-3	1,500	10	< 20	1,530	<5	< 0.5	< 0.5	< 6.0	109.3	1019.9	0.4	0.7	8.9	0.0	1.5	10.5	0.0	111.4	0.4	99.6%
10/20/14 11:30	C9, DPE-1 - DPE-3									105.3	1762.0	0.4	0.6	13.3	0.0	1.4	20.6	0.0	107.4	0.4	99.6%
10/27/14 11:00	C9, DPE-1, DPE2									113.8	2296.2	0.4	0.7	16.6	0.0	1.6	27.9	0.0	116.1	0.5	99.6%
11/6/14 13:15	C9, DPE-2, DPE3		-							73.1	2557.0	0.2	0.4	18.2	0.0	1.0	31.5	0.0	74.5	0.2	99.6%
11/21/14 13:50	C9, DPE-2, DPE-3*	558	0.01	0.01	558	0.31	0.0020	< 0.002	0.31	27.0	2950.0	0.0	0.0	19.9	0.0	0.0	35.4	0.0	27.0	0.0	99.9%
12/2/14 15:15	C9, DPE-2, DPE-3	1,000	12	9	1,021	0.23	0.0012	< 0.001	0.23	42.6	3114.3	0.0	0.5	21.0	0.0	0.4	36.3	0.0	43.5	0.0	100.0%
12/16/14 11:30	C9, DPE-2, DPE-3		-							32.0	3501.4	0.0	0.3	25.2	0.0	0.3	39.8	0.0	32.6	0.0	100.0%
12/31/14 10:30	C9, DPE-2, DPE-3									35.9	4008.9	0.0	0.4	30.7	0.0	0.3	44.4	0.0	36.6	0.0	100.0%
1/14/15 11:25	C9, DPE-2, DPE-3	870	13	4.7	888	0.08	< 0.001	< 0.001	0.08	35.1	4506.7	0.0	0.5	36.8	0.0	0.2	48.0	0.0	35.8	0.0	100.0%
1/23/15 14:35	C9, DPE-2, DPE-3		-							37.4	4837.5	0.0	0.5	41.3	0.0	0.2	49.8	0.0	38.1	0.0	100.0%
2/4/15 11:00	C9, DPE-2	800	17	7.3	824	1.5	0.014	0.0012	1.52	29.3	5227.7	0.1	0.6	47.5	0.0	0.3	52.6	0.0	30.2	0.1	99.8%
2/17/15 14:30	C9, DPE-2									29.8	5328.9	0.1	0.6	49.5	0.0	0.3	53.6	0.0	30.7	0.1	99.8%
Permit conditions						<u>'</u>									<0.017 ppd					>98.5% for >	2,000 ppm inlet
															**					97% for >200-<	
																					<200 ppm inlet
	<u> </u>							Daried Dam	nds Removed ⁹ :	TPHg =	491		Benzene =	8		MTBE =	1			7 0 7 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	FF
										1rng=	471		Delizelle =			MIIDE =	+				
								Total Pou	inds Removed:	TPHg =	5,329		Benzene =	49.5		MTBE =	53.56				

- Notes:

 1. TPHg, Benzene, and MTBE analyzed by Modified EPA Method TO-3. Vapor samples were collected in 1-liter tedlar bags unless otherwise noted.

 2. Molecular weight of TPHg assumed to be 86 lb/lb-mole as hexane.

 3. Molecular weight of Benzene assumed to be 78 lb/lb-mole.

 - 5. Molecular weight of VOCs assumed to be 86 lb/lb-mole as hexane.
 - 6. Removal/Emission Rate (ppd) = C (ppmv) x Q (scfm) x (1lb-mole/386 ft³) x MW (lb/lb-mole) x 60 min/hr x 24 hr/day x 10⁻⁶

C = concentration = concentration Q = flow= flow

- MW = molecular weight = molecular weight

 7. Cumulative TPHg / Benzene / MTBE removed = Previous Total + (Average of Previous and Current Removal Rates * Operation Interval)

 8. Influent not measured due to water in vapor stream. Individual well samples were collected at a lower vacuum at this time.
- 9 Reporting period from January 23, 2015 through February 17, 2015

BAAQMD Requirements:

Flow Rate < 300 scfm

Oxidizer Temperature > 600 deg Fahrenheit in electric catalytic mode and > 1400 degrees in thermal catalytic mode

Benzene Emission Limit < 0.017 ppd

Destruction efficiency (measured as hexane)

98.50% VOC >2,000 ppmv

97.00% VOC >200 and <2,000 ppmv

90.00% VOC < 200 ppmv

Note: If outlet VOC < 10 ppmv, destruction efficiency requirement is waived

Abbreviations:

mm/dd/yy = month/day/year

hh:mm = hours : minutes

TPHg = total petroleum hydrocarbons as gasoline

MTBE = methyl tertiary butyl ether

VOC = volatile organic compounds

ppmv = parts per million by volume ppd = pounds per day

lb = pounds ft³ = cubic feet

scfm = standard cubic feet per minute INF-2 = pre-dilution system influent

311950-39-MASTER TABLES Page 3

ATTACHMENT A

LABORATORY ANALYTICAL REPORT



2/18/2015
Ms. Judy Gilbert
Conestoga-Rovers Associates (CRA)
5900 Hollis Street
Suite A
Emeryville CA 94608

Project Name: Castro Valley Project #: 311950 2014.7 94.09

Workorder #: 1502054

Dear Ms. Judy Gilbert

The following report includes the data for the above referenced project for sample(s) received on 2/5/2015 at Air Toxics Ltd.

The data and associated QC analyzed by Modified TO-3 are compliant with the project requirements or laboratory criteria with the exception of the deviations noted in the attached case narrative.

Thank you for choosing Air Toxics Ltd. for your air analysis needs. Air Toxics Ltd. is committed to providing accurate data of the highest quality. Please feel free to contact the Project Manager: Kyle Vagadori at 916-985-1000 if you have any questions regarding the data in this report.

Regards,

Kyle Vagadori

Project Manager

Kya Vych



WORK ORDER #: 1502054

Work Order Summary

CLIENT: Ms. Judy Gilbert BILL TO: Accounts Payable

Conestoga-Rovers Associates (CRA) Chevron U.S.A. Inc.

5900 Hollis Street 6001 Bollinger Canyon Road

Suite A L4310

Emeryville, CA 94608 San Ramon, CA 94583

PHONE: 510-420-3314 **P.O.** # 311950 2014.7 94.09

FAX: 510-420-9170 PROJECT # 311950 2014.7 94.09 Castro Valley

DATE RECEIVED: 02/05/2015 **CONTACT:** Kyle Vagadori 02/18/2015

			RECEIPT	FINAL
FRACTION #	NAME	<u>TEST</u>	VAC./PRES.	PRESSURE
01A	EFF	Modified TO-3	Tedlar Bag	Гedlar Bag
02A	INF	Modified TO-3	Tedlar Bag	Гedlar Bag
03A	Lab Blank	Modified TO-3	NA	NA
04A	LCS	Modified TO-3	NA	NA
04AA	LCSD	Modified TO-3	NA	NA
04B	LCS	Modified TO-3	NA	NA
04BB	LCSD	Modified TO-3	NA	NA

	1/4	eide Thayes		
CERTIFIED BY:		0	DATE: $02/18/15$	

Technical Director

Certification numbers: AZ Licensure AZ0775, NJ NELAP - CA016, NY NELAP - 11291, TX NELAP - T104704343-14-7, UT NELAP CA009332014-5, VA NELAP - 460197, WA NELAP - C935 Name of Accreditation Body: NELAP/ORELAP (Oregon Environmental Laboratory Accreditation Program) Accreditation number: CA300005, Effective date: 10/18/2014, Expiration date: 10/17/2015. Eurofins Air Toxics Inc.. certifies that the test results contained in this report meet all requirements of the NELAC standards

This report shall not be reproduced, except in full, without the written approval of Eurofins Air Toxics, Inc.



LABORATORY NARRATIVE Modified TO-3 Conestoga-Rovers Associates (CRA) Workorder# 1502054

Two 1 Liter Tedlar Bag samples were received on February 05, 2015. The laboratory performed analysis for volatile organic compounds in air via modified EPA Method TO-3 using gas chromatography with photo ionization and flame ionization detection. The TPH results are calculated using the response of Gasoline. A molecular weight of 100 is used to convert the TPH ppmv result to ug/L. The method involves concentrating up to 200 mL of sample. The concentrated aliquot is then dry purged to remove water vapor prior to entering the chromatographic system.

Method modifications taken to run these samples are summarized in the table below. Specific project requirements may over-ride the ATL modifications.

Requirement	TO-3	ATL Modifications
Daily Calibration Standard Frequency	Prior to sample analysis and every 4 - 6 hrs	Prior to sample analysis and after the analytical batch = 20 samples.</td
Initial Calibration Calculation	4-point calibration using a linear regression model	5-point calibration using average Response Factor
Initial Calibration Frequency	Weekly	When daily calibration standard recovery is outside 75 - 125 %, or upon significant changes to procedure or instrumentation
Moisture Control	Nafion system	Sorbent system
Minimum Detection Limit (MDL)	Calculated using the equation DL = A+3.3S, where A is intercept of calibration line and S is the standard deviation of at least 3 reps of low level standard	40 CFR Pt. 136 App. B
Preparation of Standards	Levels achieved through dilution of gas mixture	Levels achieved through loading various volumes of the gas mixture

Receiving Notes

There were no receiving discrepancies.

Analytical Notes

The recovery of surrogate Fluorobenzene in sample INF was outside control limits due to high level hydrocarbon matrix interference. Data is reported as qualified.

Total Xylenes concentration is calculated by summing the individual concentrations of m,p-Xylene and O-Xylene.



Definition of Data Qualifying Flags

Seven qualifiers may have been used on the data analysis sheets and indicate as follows:

- B Compound present in laboratory blank greater than reporting limit.
- J Estimated value.
- E Exceeds instrument calibration range.
- S Saturated peak.
- Q Exceeds quality control limits.
- U Compound analyzed for but not detected above the detection limit.
- M Reported value may be biased due to apparent matrix interferences.

File extensions may have been used on the data analysis sheets and indicates as follows:

- a-File was requantified
- b-File was quantified by a second column and detector
- r1-File was requantified for the purpose of reissue



Summary of Detected Compounds MODIFIED EPA METHOD TO-3 GC/PID/FID

Client Sample ID: EFF Lab ID#: 1502054-01A

Compound	Rpt. Limit (ppmv)	Rpt. Limit (ug/L)	Amount (ppmv)	Amount (ug/L)
Benzene	0.0010	0.0032	0.014	0.046
Toluene	0.0010	0.0038	0.017	0.063
Ethyl Benzene	0.0010	0.0043	0.050	0.22
Total Xylenes	0.0020	0.0087	0.34	1.4
Methyl tert-butyl ether	0.0010	0.0036	0.0012	0.0044
TPH (Gasoline Range)	0.025	0.10	1.5	6.1

Client Sample ID: INF Lab ID#: 1502054-02A

Compound	Rpt. Limit (ppmv)	Rpt. Limit (ug/L)	Amount (ppmv)	Amount (ug/L)
Benzene	0.050	0.16	17	54
Toluene	0.050	0.19	2.9	11
Ethyl Benzene	0.050	0.22	2.9	13
Total Xylenes	0.10	0.43	15	66
Methyl tert-butyl ether	0.050	0.18	7.3	26
TPH (Gasoline Range)	1.2	5.1	800	3300



Client Sample ID: EFF Lab ID#: 1502054-01A

MODIFIED EPA METHOD TO-3 GC/PID/FID

File Name: Dil. Factor:	d020611 1.00	Date of Collection: 2/4/15 11:45:00 AM Date of Analysis: 2/6/15 04:02 PM						
Compound	Rpt. Limit (ppmv)	Rpt. Limit (ug/L)	Amount (ppmv)	Amount (ug/L)				
Benzene	0.0010	0.0032	0.014	0.046				
Toluene	0.0010	0.0038	0.017	0.063				
Ethyl Benzene	0.0010	0.0043	0.050	0.22				
Total Xylenes	0.0020	0.0087	0.34	1.4				
Methyl tert-butyl ether	0.0010	0.0036	0.0012	0.0044				
TPH (Gasoline Range)	0.025	0.10	1.5	6.1				

Container Type: 1 Liter Tedlar Bag

		Method
Surrogates	%Recovery	Limits
Fluorobenzene (FID)	106	75-150
Fluorobenzene (PID)	103	75-125



Client Sample ID: INF Lab ID#: 1502054-02A

MODIFIED EPA METHOD TO-3 GC/PID/FID

File Name: Dil. Factor:	d020610 50.0	Date of Collection: 2/4/15 11:30:00 AM Date of Analysis: 2/6/15 02:16 PM		
Compound	Rpt. Limit Rpt. Limit (ppmv) (ug/L)		Amount Amou (ppmv) (ug/l	
Benzene	0.050	0.16	17	54
Toluene	0.050	0.19	2.9	11
Ethyl Benzene	0.050	0.22	2.9	13
Total Xylenes	0.10	0.43	15	66
Methyl tert-butyl ether	0.050	0.18	7.3	26
TPH (Gasoline Range)	1.2	5.1	800	3300

Q = Exceeds Quality Control limits, possibly due to matrix effects.

Container Type: 1 Liter Tedlar Bag

Surrogates	%Recovery	Method Limits
Fluorobenzene (FID)	244 Q	75-150
Fluorobenzene (PID)	187 Q	75-125



Client Sample ID: Lab Blank Lab ID#: 1502054-03A

MODIFIED EPA METHOD TO-3 GC/PID/FID

File Name: Dil. Factor:	d020605 1.00	Date of Collection: NA Date of Analysis: 2/6/15 10:01 Al		
Compound	Rpt. Limit (ppmv)	Rpt. Limit (ug/L)	Amount (ppmv)	Amount (ug/L)
Benzene	0.0010	0.0032	Not Detected	Not Detected
Toluene	0.0010	0.0038	Not Detected	Not Detected
Ethyl Benzene	0.0010	0.0043	Not Detected	Not Detected
Total Xylenes	0.0020	0.0087	Not Detected	Not Detected
Methyl tert-butyl ether	0.0010	0.0036	Not Detected	Not Detected
TPH (Gasoline Range)	0.025	0.10	Not Detected	Not Detected

Container Type: NA - Not Applicable

		Method
Surrogates	%Recovery	Limits
Fluorobenzene (FID)	95	75-150
Fluorobenzene (PID)	95	75-125



Fluorobenzene (PID)

Client Sample ID: LCS Lab ID#: 1502054-04A

MODIFIED EPA METHOD TO-3 GC/PID/FID

File Name: Dil. Factor:	d020604b 1.00	Date of Collection: NA Date of Analysis: 2/6/15 09:22 AN	
Compound		%Recovery	Method Limits
Benzene		104	75-125
Toluene		104	75-125
Ethyl Benzene		110	75-125
Total Xylenes		114	75-125
Methyl tert-butyl ether		105	75-125
Container Type: NA - Not Ap	pplicable		
Surrogates	•	%Recovery	Method Limits

92

75-125



Client Sample ID: LCSD Lab ID#: 1502054-04AA

MODIFIED EPA METHOD TO-3 GC/PID/FID

File Name:	d020616b	Date of Collection: NA
Dil. Factor:	1.00	Date of Analysis: 2/6/15 09:54 PM
•		Method

	wethod	
%Recovery	Limits	
98	75-125	
102	75-125	
111	75-125	
121	75-125	
94	75-125	
	98 102 111 121	

Container Type: NA - Not Applicable

		Method
Surrogates	%Recovery	Limits
Fluorobenzene (PID)	90	75-125



Surrogates

Fluorobenzene (FID)

Client Sample ID: LCS Lab ID#: 1502054-04B

MODIFIED EPA METHOD TO-3 GC/PID/FID

Date of Analysis: 2/6/15 08:05 AM Method
Method
Limits
75-125

%Recovery

92

Limits 75-150



Fluorobenzene (FID)

Client Sample ID: LCSD Lab ID#: 1502054-04BB

MODIFIED EPA METHOD TO-3 GC/PID/FID

File Name:	d020617	17 Date of Collection: NA	
Dil. Factor:	1.00	Date of Analys	sis: 2/6/15 10:23 PM
Compound		%Recovery	Method Limits
TPH (Gasoline Range)		98	75-125
Container Type: NA - Not Ap	plicable		
			Method
Surrogates		%Recovery	Limits

88

75-150

Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

ANALYTICAL RESULTS

Prepared by:

Prepared for:

Eurofins Lancaster Laboratories Environmental 2425 New Holland Pike Lancaster, PA 17601 ChevronTexaco 6001 Bollinger Canyon Rd L4310 San Ramon CA 94583

February 12, 2015

Project: 95607

Submittal Date: 02/07/2015 Group Number: 1536881 PO Number: 0015164161 Release Number: HETRICK State of Sample Origin: CA

Client Sample Description Lancaster Labs (LL) #

 EFF-1-W-150204 Grab Groundwater
 7764828

 MID-1-W-150204 Grab Groundwater
 7764830

 INF-1-W-150204 Grab Groundwater
 7764831

The specific methodologies used in obtaining the enclosed analytical results are indicated on the Laboratory Sample Analysis Record.

Regulatory agencies do not accredit laboratories for all methods, analytes, and matrices. Our scopes of accreditation can be viewed at http://www.eurofinsus.com/environment-testing/laboratories/eurofins-lancaster-laboratories-environmental/resources/certifications/.

ELECTRONIC Chevron Attn: CRA EDD

COPY TO

ELECTRONIC CRA Attn: Judy Gilbert

COPY TO

ELECTRONIC CRA Attn: Darrell Smolko

COPY TO

Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

Respectfully Submitted,

Amek Carter Specialist

(717) 556-7252



Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

Sample Description: EFF-1-W-150204 Grab Groundwater

Facility# 95607 CRAW

5269 Crow Canyon-Castro Va T0600100344

LL Sample # WW 7764828

LL Group # 1536881 Account # 10880

Project Name: 95607

Collected: 02/04/2015 12:00 by DS ChevronTexaco

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

Submitted: 02/07/2015 10:15 Reported: 02/12/2015 20:27

E1CCC

CAT No.	Analysis Name		CAS Number	As Received Result	As Received Method Detection Limit*	As Received Limit of Quantitation	Dilution Factor
GC/MS	Volatiles SV	W-846	8260B	ug/l	ug/l	ug/l	
10945	Benzene		71-43-2	N.D.	0.5	1	1
10945	Ethylbenzene		100-41-4	N.D.	0.5	1	1
10945	Methyl Tertiary Butyl	Ether	1634-04-4	N.D.	0.5	1	1
10945	Toluene		108-88-3	N.D.	0.5	1	1
10945	Xylene (Total)		1330-20-7	N.D.	0.5	1	1
GC Vol	latiles SV	W-846	8015B	ug/l	ug/l	ug/l	
01728	TPH-GRO N. CA water C6	-C12	n.a.	N.D.	50	100	1

General Sample Comments

CA ELAP Lab Certification No. 2792

Trip blank vials were not received by the laboratory for this sample group.

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
10945	BTEX/MTBE	SW-846 8260B	1	P150412AA	02/10/2015 13:56	Anita M Dale	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	P150412AA	02/10/2015 13:56	Anita M Dale	1
01728	TPH-GRO N. CA water C6-C12	SW-846 8015B	1	15042B20A	02/11/2015 19:50	Laura M Krieger	1
01146	GC VOA Water Prep	SW-846 5030B	1	15042B20A	02/11/2015 19:50	Laura M Krieger	1

^{*=}This limit was used in the evaluation of the final result



Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

Sample Description: MID-1-W-150204 Grab Groundwater

Facility# 95607 CRAW

5269 Crow Canyon-Castro Va T0600100344

LL Sample # WW 7764830

LL Group # 1536881 Account # 10880

Project Name: 95607

Collected: 02/04/2015 12:20 by DS ChevronTexaco

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

Submitted: 02/07/2015 10:15 Reported: 02/12/2015 20:27

M1CCC

CAT No.	Analysis Name		CAS Number	As Received Result	As Received Method Detection Limit*	As Received Limit of Quantitation	Dilution Factor
GC/MS	Volatiles SV	W-846	8260B	ug/l	ug/l	ug/l	
10945	Benzene		71-43-2	N.D.	0.5	1	1
10945	Ethylbenzene		100-41-4	N.D.	0.5	1	1
10945	Methyl Tertiary Butyl	Ether	1634-04-4	N.D.	0.5	1	1
10945	Toluene		108-88-3	N.D.	0.5	1	1
10945	Xylene (Total)		1330-20-7	N.D.	0.5	1	1
GC Vol	latiles SV	W-846	8015B	ug/l	ug/l	ug/l	
01728	TPH-GRO N. CA water C6	-C12	n.a.	N.D.	50	100	1

General Sample Comments

CA ELAP Lab Certification No. 2792

Trip blank vials were not received by the laboratory for this sample group.

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time		Analyst	Dilution Factor
10945	BTEX/MTBE	SW-846 8260B	1	F150402AA	02/09/2015 07	7:35	Anita M Dale	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	F150402AA	02/09/2015 07	7:35	Anita M Dale	1
01728	TPH-GRO N. CA water	SW-846 8015B	1	15037B20A	02/09/2015 11	1:30	Brett W Kenyon	1
	C6-C12							
01146	GC VOA Water Prep	SW-846 5030B	1	15037B20A	02/09/2015 11	1:30	Brett W Kenyon	1



Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

Sample Description: INF-1-W-150204 Grab Groundwater

Facility# 95607 CRAW

5269 Crow Canyon-Castro Va T0600100344

LL Sample # WW 7764831 LL Group # 1536881

Account # 10880

Project Name: 95607

Collected: 02/04/2015 12:30 by DS ChevronTexaco

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

Submitted: 02/07/2015 10:15 Reported: 02/12/2015 20:27

I1CCC

CAT No.	Analysis Name		CAS Number	As Received Result	As Received Method Detection Limit*	As Received Limit of Quantitation	Dilution Factor
GC/MS	Volatiles SW-	846 826	0В	ug/l	ug/l	ug/l	
10945	Benzene		71-43-2	190	0.5	1	1
10945	Ethylbenzene		100-41-4	N.D.	0.5	1	1
10945	Methyl Tertiary Butyl Et	her	1634-04-4	3	0.5	1	1
10945	Toluene		108-88-3	14	0.5	1	1
10945	Xylene (Total)		1330-20-7	350	0.5	1	1
GC Vol	latiles SW-	846 801	.5B	ug/l	ug/l	ug/l	
01728	TPH-GRO N. CA water C6-C	12	n.a.	4,100	50	100	1

General Sample Comments

CA ELAP Lab Certification No. 2792

Trip blank vials were not received by the laboratory for this sample group.

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Sample Analysis Record

CAT No.	Analysis Name	Method	Trial#	Batch#	Analysis Date and Time	Analyst	Dilution Factor
10945	BTEX/MTBE	SW-846 8260B	1	P150412AA	02/10/2015 14:25	Anita M Dale	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	P150412AA	02/10/2015 14:25	Anita M Dale	1
01728	TPH-GRO N. CA water C6-C12	SW-846 8015B	1	15042B20A	02/11/2015 20:18	Laura M Krieger	1
01146	GC VOA Water Prep	SW-846 5030B	1	15042B20A	02/11/2015 20:18	Laura M Krieger	1

^{*=}This limit was used in the evaluation of the final result



Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

Quality Control Summary

Client Name: ChevronTexaco Group Number: 1536881

Reported: 02/12/15 at 08:27 PM

Matrix QC may not be reported if insufficient sample or site-specific QC samples were not submitted. In these situations, to demonstrate precision and accuracy at a batch level, a LCS/LCSD was performed, unless otherwise specified in the method.

All Inorganic Initial Calibration and Continuing Calibration Blanks met acceptable method criteria unless otherwise noted on the Analysis Report.

Laboratory Compliance Quality Control

Analysis Name	Blank <u>Result</u>	Blank MDL**	Blank <u>LOQ</u>	Report <u>Units</u>	LCS %REC	LCSD %REC	LCS/LCSD <u>Limits</u>	RPD	RPD <u>Max</u>
Batch number: F150402AA	Sample number(s): 7764		64830						
Benzene	N.D.	0.5	1	ug/l	93		78-120		
Ethylbenzene	N.D.	N.D. 0.5 1 ug/l 94			79-120				
Methyl Tertiary Butyl Ether	N.D.	0.5	1	ug/l	98		75-120		
Toluene	N.D.	0.5	1	ug/l	97		80-120		
Xylene (Total)	N.D.	0.5	1	ug/l	95		80-120		
Batch number: P150412AA	Sample numb	er(s): 77	64828,7764	1831					
Benzene	N.D.	0.5	1	ug/l	98		78-120		
Ethylbenzene	N.D.	0.5	1	ug/l	93		79-120		
Methyl Tertiary Butyl Ether	N.D.	0.5	1	ug/l	99		75-120		
Toluene	N.D.	0.5	1	ug/l	96		80-120		
Xylene (Total)	N.D.	0.5	1	ug/l	98		80-120		
Batch number: 15037B20A	Sample numb	er(s): 77	64830						
TPH-GRO N. CA water C6-C12	N.D.	50.	100	ug/l	118	115	80-139	2	30
Batch number: 15042B20A	Sample numb	er(s): 77	64828,7764	1831					
TPH-GRO N. CA water C6-C12	N.D.	50.	100	ug/l	116	115	80-139	1	30

Sample Matrix Quality Control

Unspiked (UNSPK) = the sample used in conjunction with the matrix spike Background (BKG) = the sample used in conjunction with the duplicate

Analysis Name	MS <u>%REC</u>	MSD %REC	MS/MSD Limits	RPD	RPD <u>MAX</u>	BKG Conc	DUP Conc	DUP <u>RPD</u>	Dup RPD <u>Max</u>
Batch number: F150402AA	Sample	number(s)): 7764830	UNSPK	: 77648	30			
Benzene	93	99	72-134	6	30				
Ethylbenzene	95	100	71-134	5	30				
Methyl Tertiary Butyl Ether	96	101	72-126	4	30				
Toluene	98	102	80-125	4	30				
Xylene (Total)	97	102	79-125	5	30				
Batch number: P150412AA	Sample	number(s)): 7764828	,776483	31 UNSP	K: P764799			
Benzene	103	104	72-134	1	30				
Ethylbenzene	95	96	71-134	1	30				
Methyl Tertiary Butyl Ether	98	99	72-126	1	30				
Toluene	98	98	80-125	0	30				
Xylene (Total)	99	100	79-125	1	30				

^{*-} Outside of specification

^{**-}This limit was used in the evaluation of the final result for the blank

⁽¹⁾ The result for one or both determinations was less than five times the LOQ.

⁽²⁾ The unspiked result was more than four times the spike added.

Analysis Report

2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300 • Fax: 717-656-2681 • www.LancasterLabs.com

Quality Control Summary

Client Name: ChevronTexaco Group Number: 1536881

Reported: 02/12/15 at 08:27 PM

Surrogate Quality Control

Surrogate recoveries which are outside of the QC window are confirmed unless attributed to dilution or otherwise noted on the Analysis Report.

Analysis Name: BTEX/MTBE Batch number: F150402AA

	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
7764830	100	100	104	98
Blank	97	99	105	98
LCS	97	102	104	98
MS	99	102	104	101
MSD	96	106	104	98
Limits:	80-116	77-113	80-113	78-113

Analysis Name: BTEX/MTBE Batch number: P150412AA

Daccii iiui	IDCI, IIJOTIZAA			
	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
7764828	101	98	98	95
7764831	101	97	97	99
Blank	100	98	97	96
LCS	100	102	98	98
MS	100	99	98	100
MSD	99	100	97	99

78-113

80-113

Analysis Name: TPH-GRO N. CA water C6-C12

77-113

Batch number: 15037B20A

Trifluorotoluene-F

7764830	92
Blank	90
LCS	94
LCSD	95
Limits:	63-135

Limits: 80-116

Analysis Name: TPH-GRO N. CA water C6-C12

Batch number: 15042B20A Trifluorotoluene-F

7764828	89
7764831	127
Blank	91
LCS	94
LCSD	94
Limits:	63-135

*- Outside of specification

(2) The unspiked result was more than four times the spike added.

^{**-}This limit was used in the evaluation of the final result for the blank

⁽¹⁾ The result for one or both determinations was less than five times the LOQ.

Environmental Analysis Request/Chain of Custody

🐯 eurofins	Lancaster Laboratories Environmental	+0515	102×	Acct	.# <u>10</u>	088	30_ _{Gr}	oup#	15'	368	381		Sample	e#	776	183	38	-36	2		
Client: Chevro		70313	-00		-	l	Matrix			<u> </u>					Reques				For Lab Us	e Only	
Project Name/#:	Castro Valley	Site ID #:	95607						1						ion Co				SF #:	-	
Project Manager:	Judy Gilbert	P.O. #:	Direct Bill	То С	hevro	1													SCR #:		
Sampler: Darre U	- 1 0	/				Sediment	Ground Surface												Preserva	tion Codes	1
Phone #: 925		Quote #:				šedij			ners										H = HCI	T = Thiosulfate	
State where sample		VE Effluent				l "	l		ntail			0							N = HNO ₃	B = NaOH	
State where sample	e(s) were conscieut.		ection		Composite		Potable NPDES	l u	Total # of Containers	TPH-g by 8015M	BTEX by 8260	E by 8260							$S = H_2SO_4$ $O = Other$	P = H ₃ PO ₄	
Sample Identification Date		Time	Grab	Com	Soil	Water	Other:	Total	TPH-g	BTEX	MTBE by								narks		
EFF-1		2/4/15	1700				Х		6	×	×	×							Z4 TAT	on MIL	- į
MID-2			1260				Х		6	×	×	×							HOLD MID	-2, SAMPLE	
MID-1			1220				Х		6	×	×	×								/IID-1 > N.D.	
INF-1		V	1230				Х		6	×	×	×							<u> </u>		
		· ·			<u> </u>	<u> </u>											_				
							,										_				
		_	ļ		ļ	<u> </u>			ļ		ļ					_ _			<u> </u>		
			<u> </u>		_			ļ	<u> </u>	<u> </u>							-	-			
			<u> </u>	├-						_							+	-			
				<u> </u>	<u></u>	15 alii	- ngu ể chod	bv:		<u> </u>	D.	ate	Tir	nο	Reçeive	ad by:			,Daţe	Time	-campy
	e Requested (TAT) (please che	•				/	nguished	ly.	~ / .	la se		4/15-	20		7	/.		12	2/5/15	1153	
,	sh TAT is subject to laboratory appro	ovai and surci	narges.)	M	TI) I	Réli	mull nguished	by.	1011			ate	Tir		Receive	ed by:	9	Et	Date	Time	
Date results are ne				ne [G	: ' /	. /.				EIZ I S		3Q	ζ	<i>y</i> - <i>y</i> .	/				
· · · · · · · · · · · · · · · · · · ·	• ",	Mail 🗂	Pho	ne L	_		nguished	bv:	م		4	<i>Lঙ্ডা</i> ু ate	Tir		Receive	ed by:			Date	Time	
E-mail Address:	jgilbert@craworld.com dsm	olko@craw	oria.com					(\	\					
Phone:	ntions (alone shoot if require					Reli	nquished	by:\			D	ate	Tir	ne	Receive	ed by:			Date	Time	
Type I (Validation/r	ptions (please check if require non-CLP)						·	. ,													
						Reli	nquished	by:	/	`	D	ate	Tir	ne	Recejy	ed by			7/2/15	Time	
Type III (Reduced I	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,							\					12				17/1/13	Time			
	Type VI (Raw Data Only)				Reli	nquished	by C	omm	ercial	Carri	er:							(10.		ĺ	
EDD Required?		es, format:	_Zip File			UPS		Fedi	<u> </u>		Other	•			Tempe	ature	upon	receip	t_4,0_	°C	

Eurofins Lancaster Laboratories Environmental, LLC • 2425 New Holland Pike, Lancaster, PA 17601 • 717-656-2300



Explanation of Symbols and Abbreviations

The following defines common symbols and abbreviations used in reporting technical data:

RL N.D.	Reporting Limit none detected	BMQL MPN	Below Minimum Quantitation Level Most Probable Number
TNTC	Too Numerous To Count	CP Units	cobalt-chloroplatinate units
IU	International Units	NTU	nephelometric turbidity units
umhos/cm	micromhos/cm	ng	nanogram(s)
С	degrees Celsius	F	degrees Fahrenheit
meq	milliequivalents	lb.	pound(s)
g	gram(s)	kg	kilogram(s)
μg	microgram(s)	mg	milligram(s)
mL	milliliter(s)	L	liter(s)
m3	cubic meter(s)	μL	microliter(s)
		pg/L	picogram/liter

< less than

> greater than

ppm parts per million - One ppm is equivalent to one milligram per kilogram (mg/kg) or one gram per million grams. For aqueous liquids, ppm is usually taken to be equivalent to milligrams per liter (mg/l), because one liter of water has a weight very close to a kilogram. For gases or vapors, one ppm is equivalent to one microliter per liter of gas.

ppb parts per billion

Dry weight Results printed under this heading have been adjusted for moisture content. This increases the analyte weight concentration to approximate the value present in a similar sample without moisture. All other results are reported on an

as-received basis.

Laboratory Data Qualifiers:

B - Analyte detected in the blank

C - Result confirmed by reanalysis

E - Concentration exceeds the calibration range

J (or G, I, X) - estimated value ≥ the Method Detection Limit (MDL or DL) and the < Limit of Quantitation (LOQ or RL)

P - Concentration difference between the primary and confirmation column >40%. The lower result is reported.

U - Analyte was not detected at the value indicated

V - Concentration difference between the primary and confirmation column >100%. The reporting limit is raised due to this disparity and evident interference...

Additional Organic and Inorganic CLP qualifiers may be used with Form 1 reports as defined by the CLP methods. Qualifiers specific to Dioxin/Furans and PCB Congeners are detailed on the individual Analysis Report.

Analytical test results meet all requirements of the associated regulatory program (i.e., NELAC (TNI), DoD, ISO17025) unless otherwise noted under the individual analysis.

Measurement uncertainty values, as applicable, are available upon request.

Tests results relate only to the sample tested. Clients should be aware that a critical step in a chemical or microbiological analysis is the collection of the sample. Unless the sample analyzed is truly representative of the bulk of material involved, the test results will be meaningless. If you have questions regarding the proper techniques of collecting samples, please contact us. We cannot be held responsible for sample integrity, however, unless sampling has been performed by a member of our staff.

This report shall not be reproduced except in full, without the written approval of the laboratory.

Times are local to the area of activity. Parameters listed in the 40 CFR Part 136 Table II as "analyze immediately" are not performed within 15 minutes.

WARRANTY AND LIMITS OF LIABILITY - In accepting analytical work, we warrant the accuracy of test results for the sample as submitted. THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. WE DISCLAIM ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING A WARRANTY OF FITNESS FOR PARTICULAR PURPOSE AND WARRANTY OF MERCHANTABILITY. IN NO EVENT SHALL EUROFINS LANCASTER LABORATORIES ENVIRONMENTAL, LLC BE LIABLE FOR INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFIT OR GOODWILL REGARDLESS OF (A) THE NEGLIGENCE (EITHER SOLE OR CONCURRENT) OF EUROFINS LANCASTER LABORATORIES ENVIRONMENTAL AND (B) WHETHER EUROFINS LANCASTER LABORATORIES ENVIRONMENTAL HAS BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. We accept no legal responsibility for the purposes for which the client uses the test results. No purchase order or other order for work shall be accepted by Eurofins Lancaster Laboratories Environmental which includes any conditions that vary from the Standard Terms and Conditions, and Eurofins Lancaster Laboratories Environmental hereby objects to any conflicting terms contained in any acceptance or order submitted by client.