

R0372



Shell Oil Products US

October 15, 2004

Roseanna Garcia-LaGrille
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

Subject: Shell-branded Service Station
15275 Washington Avenue, San Leandro, California

Dear Ms. Garcia-LaGrille:

Attached for your review and comment is a copy of the *Third Quarter 2004 Monitoring Report* for the above referenced site. Upon information and belief, I declare, under penalty of perjury, that the information contained in the attached document is true and correct.

As always, please feel free to contact me directly at (559) 645-9306 with any questions or concerns.

Sincerely,

Shell Oil Products US

A handwritten signature in cursive script that reads "Karen Petryna".

Karen Petryna
Sr. Environmental Engineer



TOXICHEM Management Systems, Inc.

Environmental & Occupational Health Services

11 Kenton Avenue
San Carlos, California 94070
(650) 551-0112 / Fax (650) 551-0116

Industrial Hygiene - Exposure Assessment
Quantitative Risk Assessment
Compliance Audits
Real Property Environmental Assessments
Remedial Investigations
Air, Soil, and Groundwater Sampling
Remedial Engineering and Construction
Regulatory Compliance and Negotiation
Litigation Support Services

October 15, 2004
Project EQ-75.2A

REPORTS

Roseanna Garcia-LaGrille
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

Re: Quarterly Monitoring Report – Third Quarter 2004
Former Shell-branded Service Station
15275 Washington Avenue, San Leandro, California
Incident Number 97093412, SAP Number 129460

Dear Ms. Garcia-LaGrille:

On behalf of Equilon Enterprises LLC dba Shell Oil Products US (Shell), this letter transmits the results of third quarter 2004 groundwater monitoring and sampling conducted at the site referenced above (Figure 1).

Third Quarter 2004 Activities

During the third quarter 2004, Blaine Tech Services, Inc. (Blaine) of San Jose, California gauged and sampled selected wells and prepared a summary table of groundwater elevation and analytical data. Toxicchem Management Systems, Inc. (TOXICHEM) prepared the groundwater elevation contour and analytical concentration map (Figure 2). In addition to the regular analyses for total petroleum hydrocarbons as gasoline, benzene, toluene, ethylbenzene, xylenes, and methyl tertiary butyl ether (MtBE); groundwater samples from all wells sampled during this event (Wells S-7 through S-9) were analyzed for tert-Butyl alcohol (TBA), di-isopropyl ether (DIPE), ethyl tert-butyl ether (ETBE), and tert-Amyl methyl ether (TAME). None of these constituents were detected above the laboratory reporting limit with the exception of 17 micrograms per liter MtBE in Well S-7. Blaine's report, inclusive of the certified analytical report and field data sheets, is included as Attachment A.

Oxygen Releasing Compound (ORC) Maintenance:

Blaine performed semi-annual replacement of the ORCs in Wells S-3 and S-9.

Anticipated Fourth Quarter 2004 and First Quarter 2005 Activities

Gauging and sampling of selected site wells will be performed by Blaine in first quarter 2005 according to the semi-annual schedule proposed in the *First Quarter 2004 Monitoring and Remediation Report* (Cambria Environmental Technology, Inc. April 2, 2004). Well S-6 will be sampled during the first quarter 2005 since it was uncovered during the third quarter 2004. The first quarter 2005 monitoring report will be prepared and submitted by TOXICHEM.

If you have any questions regarding this site, please contact me at (650) 551-0112.

Sincerely,

Toxichem Management Systems, Inc.




Ross Tinline, RG
Senior Geologist




Attachments: Figure 1 - Vicinity Map
Figure 2 - Groundwater Elevation and Concentration Map
Attachment A - Third Quarter 2004 Groundwater Monitoring Data


cc: Karen Petryna, Shell Oil Products US, 20945 S. Wilmington Avenue Carson, CA 90810
Mike Bakaldin, San Leandro Fire Department, Civic Center, 835 E. 14th Street,
San Leandro, California 94577
Jonathan Redding, Wendell, Rosen, Black & Dean, P. O. Box 2047, Oakland, CA 94604-2047
Richard Waxman, Wendell, Rosen, Black & Dean, P. O. Box 2047, Oakland, CA 94604-2047
Salel Enterprises c/o Foothill Hardware, 6733 Foothill Blvd, Oakland, CA 94605

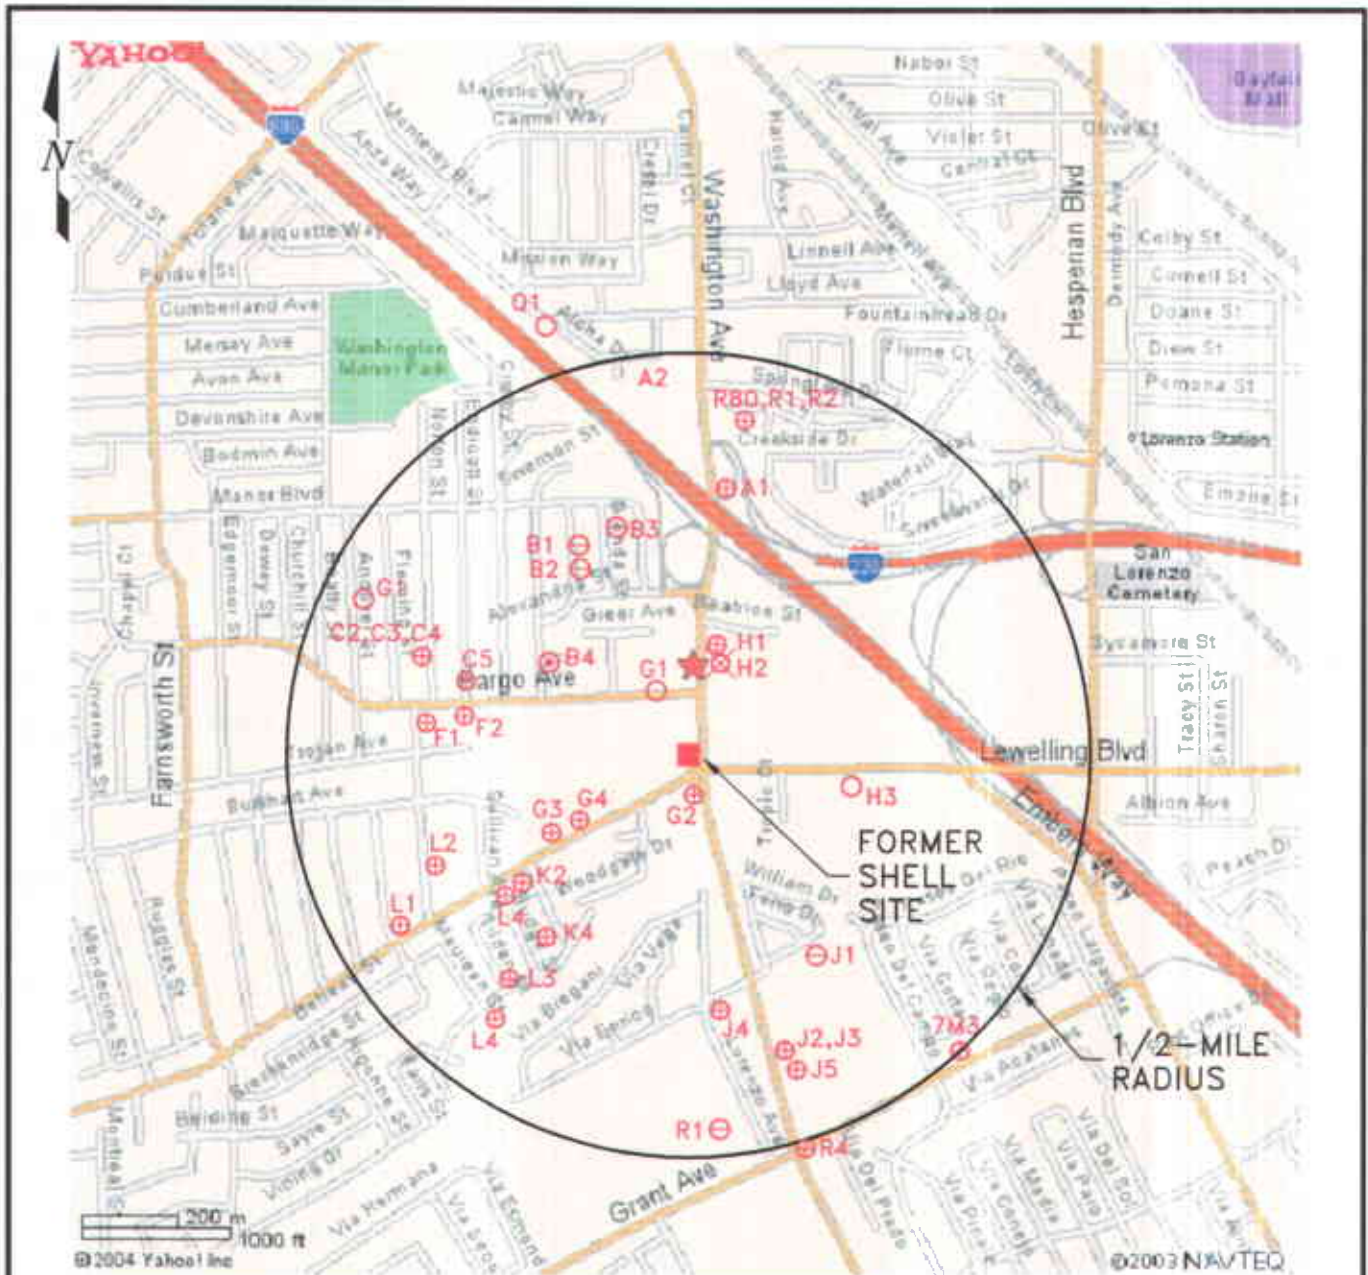

- EXPLANATION**
- ⊗ ABANDONED WELL
 - ⊕ AGRICULTURE/IRRIGATION WELL
 - ⊙ CATHODIC PROTECTION
 - DOMESTIC WELL
 - ⊖ UNKNOWN WELL

Ref. EQ-75.1a/WELL SURVEY.DWG
 Base map from Yahoo Maps, July 2004

| | | |
|---|---|---------------------------------|
| PREPARED BY  TOXICHEM Management Systems, Inc. Environmental & Occupational Health Services | Former Shell-Branded Service Station 15275 Washington Avenue San Leandro, California | FIGURE: 1 |
| | SITE VICINITY AND WELL SURVEY MAP | PROJECT: EQ-75 |

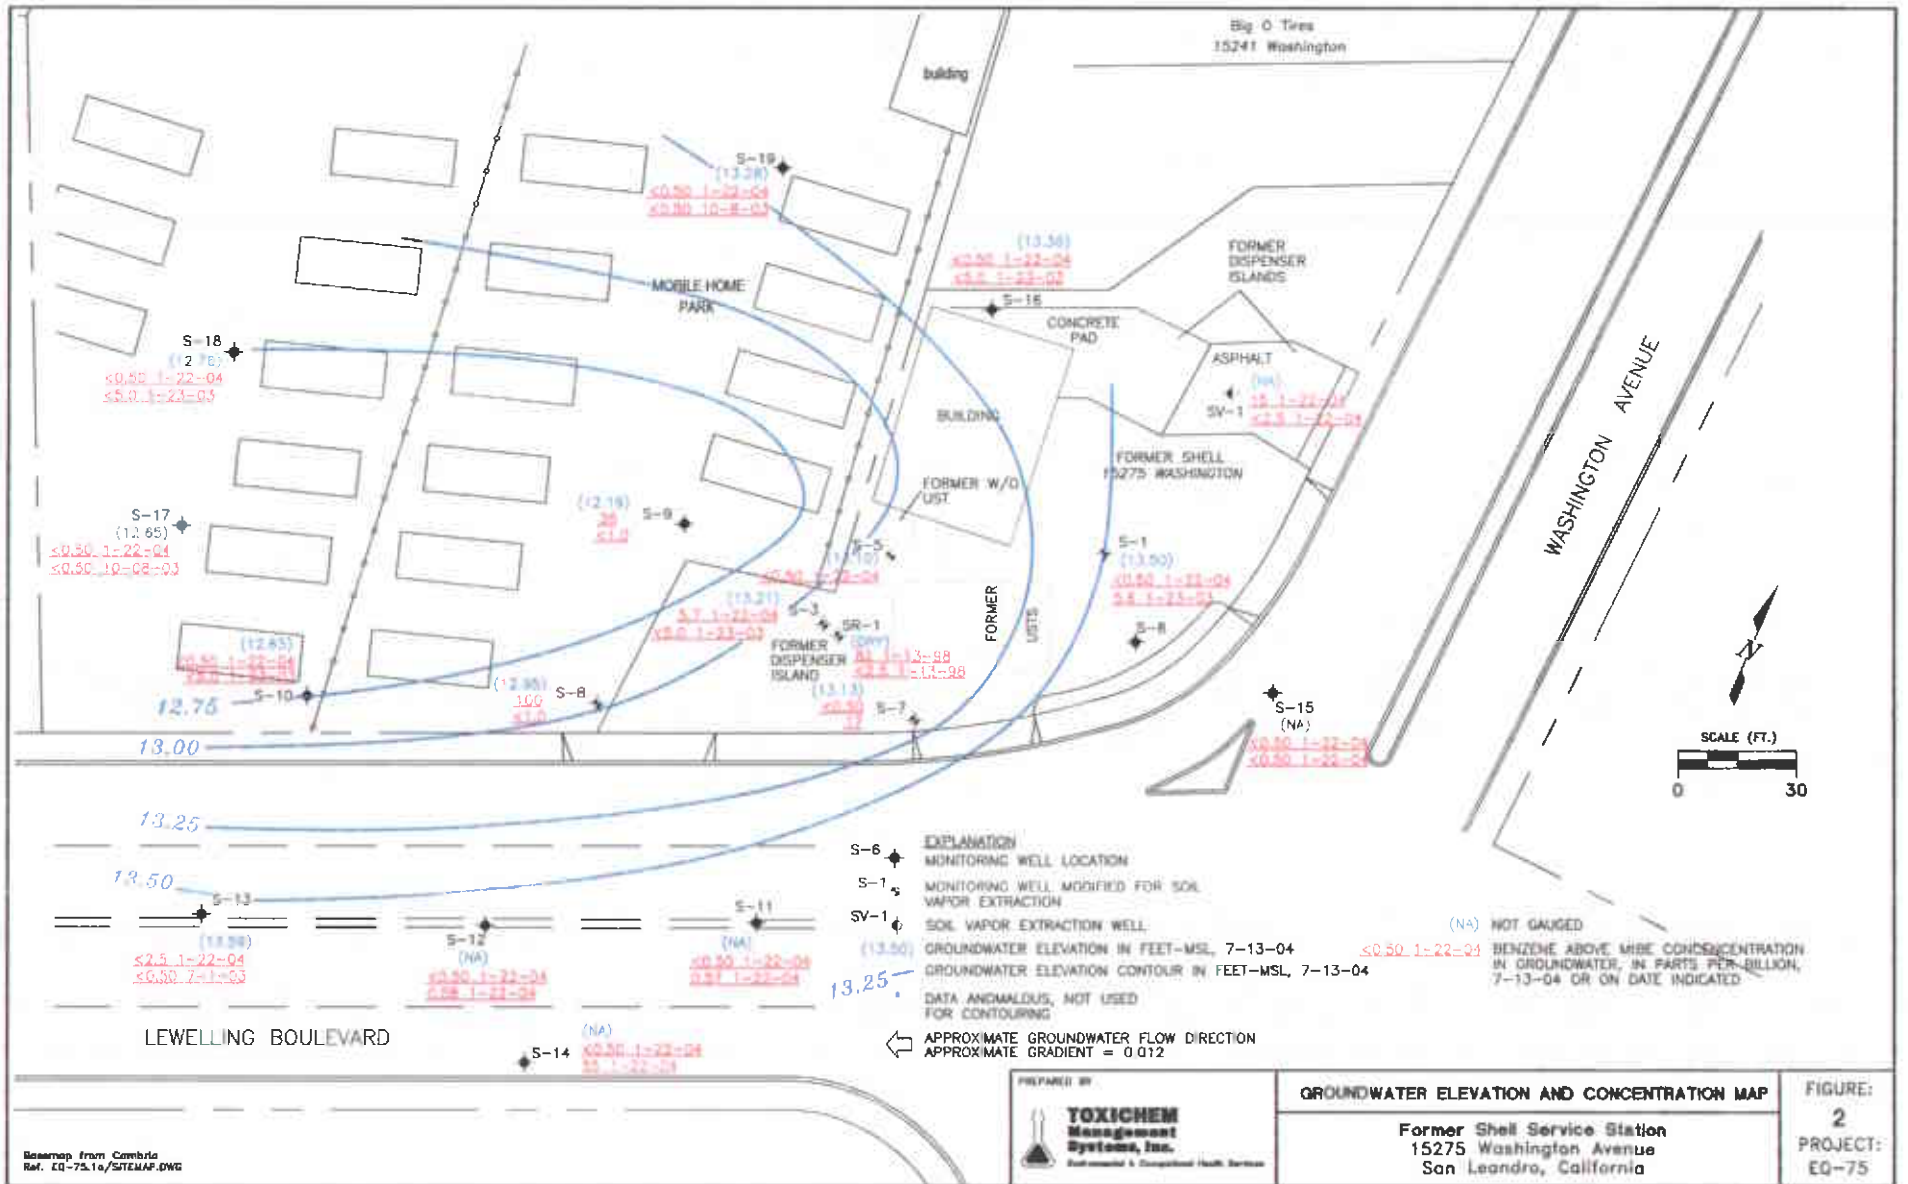

ATTACHMENT A
THIRD QUARTER 2004 GROUNDWATER MONITORING DATA

BLAINE
TECH SERVICES INC.

GROUNDWATER SAMPLING SPECIALISTS
SINCE 1985

August 11, 2004

Karen Petryna
Shell Oil Products US
P.O. Box 7869
Burbank, CA 91510-7869

Third Quarter 2004 Groundwater Monitoring at
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

Monitoring performed on July 13 and 21, 2004

Groundwater Monitoring Report **040713-PC-2**

This report covers the routine monitoring of groundwater wells at this Former Shell facility. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purgewater (if applicable) is, likewise, collected and transported to the Martinez Refining Company.

Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight-hour refresher courses.

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. Our activities at this site consisted of objective data and sample collection only. No interpretation of analytical results, defining of hydrological conditions or formulation of recommendations was performed.

Please call if you have any questions.

Yours truly,

Leon Gearhart
Project Coordinator

LG/ks

attachments: Cumulative Table of WELL CONCENTRATIONS
Certified Analytical Report
Field Data Sheets

cc: Ross Tinline
Toxichem Management Systems
11 Kenton Avenue
San Carlos, CA 94060

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-1 | 07/08/1985 | 520 | NA | NA | NA | NA | NA | NA | 21.55 | NA | NA | NA | NA |
| S-1 | 09/06/1988 | <50 | <0.5 | <1 | <1 | <0.3 | NA | NA | 21.55 | NA | NA | NA | NA |
| S-1 | 11/16/1988 | <50 | <0.5 | <1 | <1 | <0.3 | NA | NA | 21.55 | 8.01 | 13.54 | NA | NA |
| S-1 | 02/27/1989 | <50 | 0.5 | <1 | <1 | <0.3 | NA | NA | 21.55 | NA | NA | NA | NA |
| S-1 | 05/04/1989 | <50 | 1.0 | <1 | <1 | <0.3 | NA | NA | 21.55 | NA | NA | NA | NA |
| S-1 | 08/10/1989 | <50 | 0.7 | <1 | <1 | <0.3 | NA | NA | 21.55 | 7.93 | 13.62 | NA | NA |
| S-1 | 10/10/1989 | <50 | <0.5 | <1 | <1 | <0.3 | NA | NA | 21.55 | 8.09 | 13.46 | NA | NA |
| S-1 | 01/25/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 21.55 | 7.73 | 13.82 | NA | NA |
| S-1 | 04/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 21.55 | 7.91 | 13.64 | NA | NA |
| S-1 | 07/23/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.55 | 7.72 | 13.83 | NA | NA |
| S-1 | 10/18/1990 | 80 | 5 | <0.5 | <0.5 | 3.0 | NA | NA | 21.55 | 8.55 | 13.00 | NA | NA |
| S-1 | 01/28/1991 | <50 | 4.5 | <0.5 | <0.5 | 2.0 | NA | NA | 21.55 | 8.52 | 13.03 | NA | NA |
| S-1 | 04/25/1991 | 80a | 3.7 | <0.5 | 0.7 | 2.0 | NA | NA | 21.55 | 7.18 | 14.37 | NA | NA |
| S-1 | 07/09/1991 | 200 | 16 | <0.5 | 1.3 | 5.8 | NA | NA | 21.55 | 8.22 | 13.33 | NA | NA |
| S-1 | 10/08/1991 | <50 | 2.3 | <0.5 | <0.5 | <0.5 | NA | NA | 21.55 | 8.70 | 12.85 | NA | NA |
| S-1 | 02/05/1992 | 160 | 8.9 | <0.5 | 2.1 | 6.0 | NA | NA | 21.55 | 8.14 | 13.41 | NA | NA |
| S-1 | 04/28/1992 | <50 | 2.4 | <0.5 | <0.5 | 0.9 | NA | NA | 21.55 | 7.52 | 14.03 | NA | NA |
| S-1 | 07/27/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.55 | 8.28 | 13.27 | NA | NA |
| S-1 | 10/26/1992 | 57 | 3.0 | 1.6 | 1.4 | 1.7 | NA | NA | 21.55 | 8.74 | 12.81 | NA | NA |
| S-1 | 01/14/1993 | 490 | 53 | 1.2 | 20 | 33 | NA | NA | 21.55 | 5.91 | 15.64 | NA | NA |
| S-1 | 04/16/1993 | 240 | 20 | <0.5 | 15 | 240 | NA | NA | 21.55 | 6.66 | 14.89 | NA | NA |
| S-1 | 07/23/1993 | <50 | 0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.55 | 7.53 | 14.02 | NA | NA |
| S-1 | 10/27/1993 | 60 | 5.9 | <0.5 | 2.5 | 1.7 | NA | NA | 21.55 | 8.20 | 13.35 | NA | NA |
| S-1 | 01/27/1994 | <50 | 2.1 | <0.5 | <0.5 | 0.63 | NA | NA | 21.55 | 7.26 | 14.29 | NA | NA |
| S-1 | 05/05/1994 | 57 | 3.9 | <0.5 | 1.9 | 1.9 | NA | NA | 21.27 | 7.38 | 13.89 | NA | NA |
| S-1 | 07/26/1994 | <50 | 2.2 | <0.3 | <0.3 | <0.6 | NA | NA | 21.27 | 7.86 | 13.41 | NA | NA |
| S-1 | 10/28/1994 | <50 | 0.8 | <0.3 | <0.3 | 0.8 | NA | NA | 21.27 | 7.86 | 13.41 | NA | NA |
| S-1 | 01/02/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.27 | 6.85 | 14.42 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-1 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 6.08 | 15.19 | NA | NA |
| S-1 | 07/28/1995 | 60 | 2.2 | <0.5 | 1.3 | 1.2 | NA | NA | 21.27 | 6.79 | 14.48 | NA | NA |
| S-1 | 10/17/1995 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.01 | 14.23 | NA | NA |
| S-1 | 01/11/1996 | NA | NA | <0.5 | <0.5 | 0.5 | NA | NA | 21.27 | 6.49 | 14.87 | NA | NA |
| S-1 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 5.84 | 15.43 | NA | NA |
| S-1 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 6.50 | 14.77 | NA | NA |
| S-1 | 10/10/1996 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.31 | 13.96 | NA | NA |
| S-1 | 01/09/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | 6.7 | NA | 21.27 | 5.50 | 15.77 | NA | NA |
| S-1 | 04/08/1997 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.03 | 14.24 | NA | NA |
| S-1 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.00 | 14.27 | NA | NA |
| S-1 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.51 | 13.76 | NA | NA |
| S-1 | 01/15/1998 | 420 | 16 | <0.50 | 4.6 | 3.9 | 26 | NA | 21.27 | 5.43 | 15.84 | NA | NA |
| S-1 | 04/14/1998 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 5.55 | 15.72 | NA | NA |
| S-1 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 6.38 | 14.95 | NA | NA |
| S-1 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.48 | 13.85 | NA | NA |
| S-1 | 01/22/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 2.53 | NA | 21.33 | 6.37 | 14.96 | NA | NA |
| S-1 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 5.93 | 15.40 | NA | NA |
| S-1 | 07/23/1999 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.20 | 14.13 | NA | NA |
| S-1 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.61 | 13.72 | NA | NA |
| S-1 | 01/03/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 4.73 | NA | 21.33 | 7.76 | 13.57 | NA | NA |
| S-1 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 6.35 | 14.98 | NA | NA |
| S-1 | 07/12/2000 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.05 | 14.28 | NA | NA |
| S-1 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 6.51 | 14.82 | NA | NA |
| S-1 | 01/03/2001 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 21.33 | 7.49 | 13.84 | NA | NA |
| S-1 | 04/24/2001 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 6.85 | 14.48 | NA | NA |
| S-1 | 07/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.65 | 13.68 | NA | NA |
| S-1 | 11/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.84 | 13.49 | NA | NA |
| S-1 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 21.33 | 6.16 | 15.17 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|-----|------------|-----|-------|-------|-------|-------|----|-----|-------|------|-------|----|----|
| S-1 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 6.57 | 14.76 | NA | NA |
| S-1 | 07/11/2002 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.52 | 13.81 | NA | NA |
| S-1 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.99 | 13.34 | NA | NA |
| S-1 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | 5.6 | 21.33 | 6.46 | 14.87 | NA | NA |
| S-1 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 6.18 | 15.15 | NA | NA |
| S-1 | 07/01/2003 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.38 | 13.95 | NA | NA |
| S-1 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.87 | 13.46 | NA | NA |
| S-1 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | NA | 21.33 | 6.90 | 14.43 | NA | NA |
| S-1 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 21.33 | 7.83 | 13.50 | NA | NA |

| | | | | | | | | | | | | | |
|-----|------------|--------|-------|-------|-------|-------|----|----|-------|------|-------|----|----|
| S-3 | 09/06/1988 | 96000 | 3400 | 9500 | 2700 | 17000 | NA | NA | 21.14 | NA | NA | NA | NA |
| S-3 | 11/16/1988 | 70000 | 4600 | 8400 | 2500 | 13000 | NA | NA | 21.14 | 7.76 | 13.38 | NA | NA |
| S-3 | 02/27/1989 | 32000 | 2400 | 3100 | 1500 | 6400 | NA | NA | 21.14 | NA | NA | NA | NA |
| S-3 | 05/04/1989 | 47000 | 4400 | 300 | 2400 | 15000 | NA | NA | 21.14 | NA | NA | NA | NA |
| S-3 | 08/10/1989 | 110000 | 5700 | 5700 | 3200 | 19000 | NA | NA | 21.14 | 7.92 | 13.22 | NA | NA |
| S-3 | 10/10/1989 | 52000 | 4600 | 3300 | 2600 | 15000 | NA | NA | 21.14 | 8.00 | 13.14 | NA | NA |
| S-3 | 01/25/1990 | 420000 | 5200 | 4100 | 6700 | 34000 | NA | NA | 21.14 | 7.54 | 13.60 | NA | NA |
| S-3 | 04/18/1990 | 58000 | 3800 | 1400 | 2400 | 12000 | NA | NA | 21.14 | 7.74 | 13.40 | NA | NA |
| S-3 | 07/23/1990 | 49000 | 3400 | 1800 | 2300 | 12000 | NA | NA | 21.14 | 7.55 | 13.59 | NA | NA |
| S-3 | 10/18/1990 | 44000 | 3500 | 650 | 2400 | 11000 | NA | NA | 21.14 | 8.47 | 12.67 | NA | NA |
| S-3 | 01/28/1991 | 64000 | 40900 | 570 | 1940 | 8090 | NA | NA | 21.14 | 8.38 | 12.76 | NA | NA |
| S-3 | 04/25/1991 | 120000 | 3900 | 3600 | 2400 | 8900 | NA | NA | 21.14 | 6.91 | 14.23 | NA | NA |
| S-3 | 07/09/1991 | 50000 | 3600 | 2300 | 1800 | 10000 | NA | NA | 21.14 | 8.07 | 13.07 | NA | NA |
| S-3 | 10/08/1991 | 130000 | 3600 | 1000 | 2800 | 8400 | NA | NA | 21.14 | 8.61 | 12.53 | NA | NA |
| S-3 | 02/05/1992 | 150000 | 2500 | 670 | 2700 | 10000 | NA | NA | 21.14 | 7.80 | 13.34 | NA | NA |
| S-3 | 04/28/1992 | 120000 | 2200 | 1200 | 2000 | 5800 | NA | NA | 21.14 | 7.27 | 13.87 | NA | NA |
| S-3 | 07/27/1992 | 190000 | 1400 | <1250 | <1250 | 3400 | NA | NA | 21.14 | 8.10 | 13.04 | NA | NA |
| S-3 | 10/26/1992 | 950000 | 2000 | 8400 | 16000 | 36000 | NA | NA | 21.14 | 8.62 | 12.52 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-3 | 01/14/1993 | 41000 | 2700 | 2500 | 1800 | 6900 | NA | NA | 21.14 | 5.16 | 15.98 | NA | NA |
| S-3 | 04/16/1993 | 40000 | 930 | 2800 | 1900 | 14000 | NA | NA | 21.14 | 7.18 | 13.96 | NA | NA |
| S-3 | 07/23/1993 | 27000 | 1000 | 2500 | 1300 | 4000 | NA | NA | 21.14 | 7.34 | 13.80 | NA | NA |
| S-3 | 10/27/1993 | 30000 | 2200 | 4000 | 1500 | 3200 | NA | NA | 21.14 | 8.03 | 13.11 | NA | NA |
| S-3 | 01/27/1994 | 190000 | 3200 | 3100 | 4100 | 15000 | NA | NA | 21.14 | 6.79 | 14.35 | NA | NA |
| S-3 | 05/05/1994 | 36000 | 1100 | 490 | 1600 | 4700 | NA | NA | 20.48 | 6.75 | 13.73 | NA | NA |
| S-3 | 07/26/1994 | 18000 | 1039 | 170.5 | 845.4 | 967.5 | NA | NA | 20.48 | 7.30 | 13.18 | NA | NA |
| S-3 | 10/28/1994 | 25869 | 467.9 | 294 | 546.2 | 343.3 | NA | NA | 20.48 | 8.36 | 12.12 | NA | NA |
| S-3 | 01/02/1995 | 23000 | 850 | 260 | 900 | 2100 | NA | NA | 20.48 | 6.36 | 14.12 | NA | NA |
| S-3 | 04/14/1995 | 33000 | 720 | 670 | 1600 | 6600 | NA | NA | 20.48 | 5.87 | 14.61 | NA | NA |
| S-3 | 07/28/1995 | 12000 | 540 | <10 | 580 | 780 | NA | NA | 20.48 | 6.33 | 14.15 | NA | NA |
| S-3 | 10/17/1995 | Well inaccessible | | NA | NA | NA | NA | NA | 20.48 | 6.48 | 14.00 | NA | NA |
| S-3 | 01/11/1996 | 16000 | 520 | 290 | 740 | 2600 | <200 | NA | 20.48 | 5.80 | 14.68 | NA | NA |
| S-3 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 5.00 | 15.48 | NA | NA |
| S-3 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 5.93 | 14.55 | NA | NA |
| S-3 | 10/10/1996 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 6.73 | 13.75 | NA | NA |
| S-3 | 01/09/1997 | 30000 | 420 | 330 | 1500 | 6300 | <500 | NA | 20.48 | 4.72 | 15.76 | NA | NA |
| S-3 | 04/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 6.63 | 13.85 | NA | NA |
| S-3 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 6.18 | 14.30 | NA | NA |
| S-3 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 6.83 | 13.65 | NA | NA |
| S-3 | 01/15/1998 | 21000 | 300 | 51 | 770 | 2800 | <100 | NA | 20.48 | 4.30 | 16.18 | NA | NA |
| S-3 (D) | 01/15/1998 | 14000 | 330 | 63 | 920 | 3400 | <250 | NA | 20.48 | NA | NA | NA | NA |
| S-3 | 04/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 4.37 | 16.11 | NA | NA |
| S-3 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 5.47 | 15.01 | NA | NA |
| S-3 | 10/20/1998 | Well inaccessible | | NA | NA | NA | NA | NA | 20.48 | NA | NA | NA | NA |
| S-3 | 01/22/1999 | 40000 | 313 | 194 | 2200 | 8800 | <40.0 | NA | 20.48 | 5.71 | 14.77 | NA | NA |
| S-3 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 4.95 | 15.53 | NA | NA |
| S-3 | 07/23/1999 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 6.78 | 13.70 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-3 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 7.25 | 13.23 | NA | NA |
| S-3 | 01/03/2000 | 39700 | 150 | 61.8 | 1690 | 7720 | 445 | NA | 20.48 | 7.46 | 13.02 | NA | NA |
| S-3 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 5.64 | 14.84 | NA | NA |
| S-3 | 07/12/2000 | Well inaccessible | | NA | NA | NA | NA | NA | 20.48 | NA | NA | NA | NA |
| S-3 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 6.72 | 13.76 | NA | NA |
| S-3 | 01/03/2001 | 25000 | 89.0 | <50.0 | 1270 | 5180 | <250 | NA | 20.48 | 7.14 | 13.34 | NA | NA |
| S-3 | 04/24/2001 | Well inaccessible | | NA | NA | NA | NA | NA | 20.48 | NA | NA | NA | NA |
| S-3 | 07/02/2001 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 7.28 | 13.20 | NA | 3.2 |
| S-3 | 11/02/2001 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 7.64 | 12.84 | NA | 3.5 |
| S-3 | 01/16/2002 | Well inaccessible | | NA | NA | NA | NA | NA | 20.48 | NA | NA | NA | NA |
| S-3 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 5.99 | 14.49 | NA | 3.8 |
| S-3 | 07/11/2002 | NA | NA | NA | NA | NA | NA | NA | 20.48 | 7.21 | 13.27 | NA | 0.7 |
| S-3 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 7.90 | 12.95 | NA | e |
| S-3 | 01/23/2003 | 28000 | 60 | 13 | 970 | 3700 | NA | <50 | 20.85 | 6.00 | 14.85 | NA | 0.3 |
| S-3 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 5.34 | 15.51 | NA | 1.0 |
| S-3 | 07/01/2003 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 7.28 | 13.57 | NA | 1.0 |
| S-3 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 7.63 | 13.22 | NA | 26.9 |
| S-3 | 01/22/2004 | 3200 | 5.7 | <2.5 | 16 | 320 | NA | NA | 20.85 | 6.53 | 14.32 | NA | 0.5 |
| S-3 | 07/13/2004 | Well inaccessible | | NA | NA | NA | NA | NA | 20.85 | NA | NA | NA | NA |
| S-3 | 07/21/2004 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 7.64 | 13.21 | NA | 2.2 |
| S-5 | 01/08/1987 | 7800 | 380 | 510 | NA | 1000 | NA | NA | 21.41 | NA | NA | NA | NA |
| S-5 | 09/06/1988 | 7000 | 2600 | 60 | 400 | 700 | NA | NA | 21.41 | NA | NA | NA | NA |
| S-5 | 11/16/1988 | 3000 | 660 | 60 | 120 | 220 | NA | NA | 21.41 | NA | NA | NA | NA |
| S-5 | 02/27/1989 | 5700 | 2000 | 220 | 260 | 320 | NA | NA | 21.41 | NA | NA | NA | NA |
| S-5 | 05/04/1989 | 9000 | 3000 | 600 | 630 | 1700 | NA | NA | 21.41 | NA | NA | NA | NA |
| S-5 | 08/10/1989 | 5100 | 1100 | <50 | 270 | 400 | NA | NA | 21.41 | 8.28 | 13.13 | NA | NA |
| S-5 | 10/10/1989 | 15000 | 3300 | 160 | 830 | 2200 | NA | NA | 21.41 | 8.32 | 13.09 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-5 | 01/25/1990 | 12000 | 2400 | 360 | 570 | 1400 | NA | NA | 21.41 | 8.20 | 13.21 | NA | NA |
| S-5 | 04/18/1990 | 5200 | 1100 | 40 | 300 | 460 | NA | NA | 21.41 | 8.32 | 13.09 | NA | NA |
| S-5 | 07/23/1990 | 5500 | 1300 | 140 | 320 | 730 | NA | NA | 21.41 | 8.03 | 13.38 | NA | NA |
| S-5 | 10/18/1990 | 12000 | 3200 | 40 | 720 | 900 | NA | NA | 21.41 | 9.03 | 12.38 | NA | NA |
| S-5 | 01/28/1991 | 2550 | 410 | 15 | 110 | 60 | NA | NA | 21.41 | 8.80 | 12.61 | NA | NA |
| S-5 | 04/25/1991 | 67000 | 5100 | 3100 | 2800 | 11000 | NA | NA | 21.41 | 7.40 | 14.01 | NA | NA |
| S-5 | 07/09/1991 | 4900 | 480 | 36 | 360 | 1000 | NA | NA | 21.41 | 8.52 | 12.89 | NA | NA |
| S-5 | 10/08/1991 | 6600 | 370 | 7.0 | 190 | 380 | NA | NA | 21.41 | 9.00 | 12.41 | NA | NA |
| S-5 | 02/05/1992 | 44000 | 4800 | 850 | 2700 | 8400 | NA | NA | 21.41 | 8.11 | 13.30 | NA | NA |
| S-5 | 04/28/1992 | 33000 | 1400 | 320 | 1600 | 5200 | NA | NA | 21.41 | 7.70 | 13.71 | NA | NA |
| S-5 | 07/27/1992 | 20000 | 2400 | <25 | 1800 | 2300 | NA | NA | 21.41 | 8.52 | 12.89 | NA | NA |
| S-5 | 10/26/1992 | 21000 | 1600 | 140 | 1500 | 2800 | NA | NA | 21.41 | 9.02 | 12.39 | NA | NA |
| S-5 | 01/14/1993 | 54000 | 1900 | 1000 | 2700 | 16000 | NA | NA | 21.41 | 5.22 | 16.19 | NA | NA |
| S-5 | 04/16/1993 | 42000 | 2000 | 1300 | 4300 | 18000 | NA | NA | 21.41 | 7.04 | 14.37 | NA | NA |
| S-5 | 07/23/1993 | 46000 | 2500 | 2200 | 3400 | 11000 | NA | NA | 21.41 | 7.75 | 13.66 | NA | NA |
| S-5 | 10/27/1993 | 6500 | 990 | 31 | 1100 | 1000 | NA | NA | 21.41 | 8.49 | 12.92 | NA | NA |
| S-5 | 01/27/1994 | 34000 | 1800 | 580 | 2900 | 9700 | NA | NA | 21.41 | 7.04 | 14.37 | NA | NA |
| S-5 | 05/05/1994 | 24000 | 670 | 70 | 1400 | 2700 | NA | NA | 21.03 | 7.20 | 13.83 | NA | NA |
| S-5 | 07/27/1994 | 4700 | 193.6 | 33.1 | 332.3 | 281.2 | NA | NA | 21.03 | 7.72 | 13.31 | NA | NA |
| S-5 | 10/28/1994 | 3200 | 167.3 | 18 | 238.7 | 104.5 | NA | NA | 21.03 | 7.82 | 13.21 | NA | NA |
| S-5 | 01/02/1995 | 18000 | 1300 | 220 | 3400 | 10000 | NA | NA | 21.03 | 6.65 | 14.38 | NA | NA |
| S-5 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 5.99 | 15.04 | NA | NA |
| S-5 | 07/28/1995 | 25000 | 440 | 74 | 1700 | 4500 | NA | NA | 21.03 | 6.77 | 14.26 | NA | NA |
| S-5 (D) | 07/28/1995 | 25000 | 450 | <50 | 1700 | 4600 | NA | NA | 21.03 | NA | NA | NA | NA |
| S-5 | 10/17/1995 | 18000 | 360 | 24 | 1300 | 2200 | NA | NA | 21.03 | 7.00 | 14.03 | NA | NA |
| S-5 | 01/11/1996 | 41000 | 420 | 180 | 1600 | 9500 | <200 | NA | 21.03 | 6.22 | 14.81 | NA | NA |
| S-5 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 5.44 | 15.59 | NA | NA |
| S-5 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.41 | 14.62 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-5 | 10/10/1996 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.19 | 13.84 | NA | NA |
| S-5 | 01/09/1997 | 38000 | 130 | 43 | 160 | 6200 | <125 | NA | 21.03 | 5.03 | 16.00 | NA | NA |
| S-5 (D) | 01/09/1997 | 36000 | 130 | <50 | 160 | 5600 | <250 | NA | 21.03 | NA | NA | NA | NA |
| S-5 | 04/08/1997 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.20 | 13.83 | NA | NA |
| S-5 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.82 | 14.21 | NA | NA |
| S-5 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.31 | 13.72 | NA | NA |
| S-5 | 01/15/1998 | 49000 | 62 | <50 | 93 | 4100 | <250 | NA | 21.03 | 4.58 | 16.45 | NA | NA |
| S-5 | 04/14/1998 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 4.94 | 16.09 | NA | NA |
| S-5 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 5.36 | 15.91 | NA | NA |
| S-5 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.53 | 13.74 | NA | NA |
| S-5 | 01/22/1999 | 2550 | 9.09 | <0.500 | 1.93 | 112 | 4.40 | NA | 21.27 | 6.35 | 14.92 | NA | NA |
| S-5 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 5.37 | 15.90 | NA | NA |
| S-5 | 07/23/1999 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 6.43 | 14.84 | NA | NA |
| S-5 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.51 | 13.76 | NA | NA |
| S-5 | 01/03/2000 | 3310 | 39.0 | <10.0 | 293 | 21.7 | <50.0 | NA | 21.27 | 7.78 | 13.49 | NA | NA |
| S-5 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 6.15 | 15.12 | NA | NA |
| S-5 | 07/12/2000 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.05 | 14.22 | NA | NA |
| S-5 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 6.00 | 15.27 | NA | NA |
| S-5 | 01/03/2001 | 516 | 3.65 | 0.968 | 18.0 | 4.02 | 18.4 | NA | 21.27 | 7.48 | 13.79 | NA | NA |
| S-5 | 04/24/2001 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 6.58 | 14.69 | NA | NA |
| S-5 | 07/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.60 | 13.67 | NA | NA |
| S-5 | 11/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.94 | 13.33 | NA | NA |
| S-5 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 21.27 | 5.88 | 15.39 | NA | NA |
| S-5 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 6.27 | 15.00 | NA | NA |
| S-5 | 07/11/2002 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.53 | 13.74 | NA | NA |
| S-5 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 8.11 | 13.16 | NA | NA |
| S-5 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 21.27 | 6.22 | 15.05 | NA | NA |
| S-5 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 5.48 | 15.79 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|-----|------------|-----|-------|-------|-------|------|----|----|-------|------|-------|----|----|
| S-5 | 07/01/2003 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.32 | 13.95 | NA | NA |
| S-5 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 7.91 | 13.36 | NA | NA |
| S-5 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | NA | 21.27 | 6.68 | 14.59 | NA | NA |
| S-5 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 21.27 | 8.17 | 13.10 | NA | NA |

| | | | | | | | | | | | | | |
|-----|------------|-----|------|------|------|------|----|----|-------|------|-------|----|----|
| S-6 | 11/16/1988 | 50 | 0.7 | <1 | <1 | <3 | NA | NA | 22.02 | 8.58 | 13.44 | NA | NA |
| S-6 | 02/27/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 22.02 | NA | NA | NA | NA |
| S-6 | 05/04/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 22.02 | NA | NA | NA | NA |
| S-6 | 08/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 22.02 | 8.54 | 13.48 | NA | NA |
| S-6 | 10/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 22.02 | 8.58 | 13.44 | NA | NA |
| S-6 | 01/25/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 22.02 | 8.31 | 13.71 | NA | NA |
| S-6 | 04/18/1990 | <50 | <0.5 | 0.6 | <0.5 | 1.0 | NA | NA | 22.02 | 8.43 | 13.59 | NA | NA |
| S-6 | 07/23/1990 | <50 | <0.5 | 0.9 | <0.5 | 1.8 | NA | NA | 22.02 | 8.24 | 13.78 | NA | NA |
| S-6 | 10/18/1990 | <50 | <0.5 | 0.7 | <0.5 | 0.8 | NA | NA | 22.02 | 9.20 | 12.82 | NA | NA |
| S-6 | 01/28/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.02 | 9.10 | 12.92 | NA | NA |
| S-6 | 04/25/1991 | <50 | <0.5 | <0.5 | <0.5 | 0.7 | NA | NA | 22.02 | 7.74 | 14.28 | NA | NA |
| S-6 | 07/09/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.02 | 8.81 | 13.21 | NA | NA |
| S-6 | 10/08/1991 | <50 | 0.7 | <0.5 | <0.5 | <0.5 | NA | NA | 22.02 | 9.26 | 12.76 | NA | NA |
| S-6 | 02/02/1992 | NA | NA | NA | NA | NA | NA | NA | 22.02 | 8.47 | 13.55 | NA | NA |
| S-6 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.02 | 7.91 | 14.11 | NA | NA |
| S-6 | 07/27/1992 | NA | NA | NA | NA | NA | NA | NA | 22.02 | 8.83 | 13.19 | NA | NA |
| S-6 | 10/26/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.02 | 9.29 | 12.73 | NA | NA |
| S-6 | 01/13/1994 | NA | NA | NA | NA | NA | NA | NA | 22.02 | 9.43 | 12.59 | NA | NA |
| S-6 | 04/16/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.02 | 7.12 | 14.90 | NA | NA |
| S-6 | 07/23/1993 | NA | NA | NA | NA | NA | NA | NA | 22.02 | 8.14 | 13.88 | NA | NA |
| S-6 | 10/27/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.02 | 8.75 | 13.27 | NA | NA |
| S-6 | 01/27/1994 | NA | NA | NA | NA | NA | NA | NA | 22.02 | 7.87 | 14.15 | NA | NA |
| S-6 | 05/05/1994 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.40 | 7.71 | 13.69 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-6 | 07/26/1994 | NA | NA | NA | NA | NA | NA | NA | 21.40 | 8.10 | 13.30 | NA | NA |
| S-6 | 10/28/1994 | <50 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 21.40 | 8.04 | 13.36 | NA | NA |
| S-6 | 01/02/1995 | NA | NA | NA | NA | NA | NA | NA | 21.40 | 7.07 | 14.33 | NA | NA |
| S-6 | 04/14/1995 | <50 | <0.5 | 1.3 | <0.5 | <0.5 | NA | NA | 21.40 | 6.29 | 15.11 | NA | NA |
| S-6 | 07/28/1995 | NA | NA | NA | NA | NA | NA | NA | 21.40 | 6.91 | 14.49 | NA | NA |
| S-6 | 10/17/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.40 | 7.20 | 14.20 | NA | NA |
| S-6 | 01/11/1996 | NA | NA | NA | NA | NA | NA | NA | 21.40 | 6.60 | 14.80 | NA | NA |
| S-6 | 01/22/2004 | Unable to locate | | NA | NA | NA | NA | NA | 21.40 | NA | NA | NA | NA |
| S-7 | 11/16/1988 | 100 | 5.1 | 15 | 2.0 | 13 | NA | NA | 21.47 | 8.24 | 13.23 | NA | NA |
| S-7 | 02/27/1989 | 50 | 0.5 | 3.0 | 1.0 | 11 | NA | NA | 21.47 | NA | NA | NA | NA |
| S-7 | 05/04/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.47 | NA | NA | NA | NA |
| S-7 | 08/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.47 | 8.18 | 13.29 | NA | NA |
| S-7 | 10/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.47 | 8.35 | 13.12 | NA | NA |
| S-7 | 01/25/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 21.47 | 7.95 | 13.52 | NA | NA |
| S-7 | 04/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 21.47 | 8.06 | 13.41 | NA | NA |
| S-7 | 07/23/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 7.89 | 13.58 | NA | NA |
| S-7 | 10/18/1990 | <50 | <0.5 | 0.5 | 0.5 | 4.1 | NA | NA | 21.47 | 8.83 | 12.64 | NA | NA |
| S-7 | 01/28/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 8.77 | 12.70 | NA | NA |
| S-7 | 04/25/1991 | 60 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 7.25 | 14.22 | NA | NA |
| S-7 | 07/09/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 8.41 | 13.06 | NA | NA |
| S-7 | 10/08/1991 | NA | NA | NA | NA | NA | NA | NA | 21.47 | 8.95 | 12.52 | NA | NA |
| S-7 | 02/05/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 8.04 | 13.43 | NA | NA |
| S-7 | 10/08/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 8.95 | 12.52 | NA | NA |
| S-7 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 7.45 | 14.02 | NA | NA |
| S-7 | 07/27/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 8.48 | 12.99 | NA | NA |
| S-7 | 10/26/1992 | 570 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 9.95 | 11.52 | NA | NA |
| S-7 | 01/14/1993 | 56 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 5.84 | 15.63 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-7 | 04/16/1993 | 110 | 28 | <0.5 | <0.5 | 1.8 | NA | NA | 21.47 | 6.38 | 15.09 | NA | NA |
| S-7 | 07/23/1993 | 80 | 0.48 | <0.5 | <0.5 | 0.8 | NA | NA | 21.47 | 7.72 | 13.75 | NA | NA |
| S-7 | 10/27/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 7.79 | 13.68 | NA | NA |
| S-7 | 01/27/1994 | 70a | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.47 | 7.85 | 13.62 | NA | NA |
| S-7 | 05/05/1994 | 92 | 2.1 | <0.5 | <0.5 | <0.5 | NA | NA | 20.85 | 9.45 | 11.40 | NA | NA |
| S-7 | 07/26/1994 | 88 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 20.85 | 7.64 | 13.21 | NA | NA |
| S-7 | 10/28/1994 | 60 | <0.3 | 0.5 | <0.3 | <0.6 | NA | NA | 20.85 | 7.68 | 13.17 | NA | NA |
| S-7 | 01/02/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.85 | 6.95 | 13.90 | NA | NA |
| S-7 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 5.82 | 15.03 | NA | NA |
| S-7 | 07/28/1995 | 170 | 1.7 | <0.5 | <0.5 | 2.2 | NA | NA | 20.85 | 6.32 | 14.53 | NA | NA |
| S-7 | 10/17/1995 | 100 | <0.5 | 0.6 | <0.5 | <0.5 | NA | NA | 20.85 | 7.07 | 13.78 | NA | NA |
| S-7 | 01/11/1996 | 80 | 0.6 | <0.5 | <0.5 | <0.5 | 54 | NA | 20.85 | 6.10 | 14.75 | NA | NA |
| S-7 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 6.14 | 14.71 | NA | NA |
| S-7 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 6.40 | 14.45 | NA | NA |
| S-7 | 10/10/1996 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 6.70 | 14.15 | NA | NA |
| S-7 | 01/09/1997 | 130 | 1.4 | <0.50 | <0.50 | 0.56 | 70 | NA | 20.85 | 5.25 | 15.60 | NA | NA |
| S-7 | 04/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 7.15 | 13.70 | NA | NA |
| S-7 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 6.67 | 14.18 | NA | NA |
| S-7 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 7.26 | 13.59 | NA | NA |
| S-7 | 01/15/1998 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | 39 | NA | 20.85 | 5.51 | 15.34 | NA | NA |
| S-7 | 04/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.85 | 5.45 | 15.40 | NA | NA |
| S-7 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.48 | 14.55 | NA | NA |
| S-7 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.37 | 13.66 | NA | NA |
| S-7 | 01/22/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 97.8 | NA | 21.03 | 6.21 | 14.82 | NA | NA |
| S-7 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 5.30 | 15.73 | NA | NA |
| S-7 | 07/23/1999 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.12 | 13.91 | NA | NA |
| S-7 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.54 | 13.49 | NA | NA |
| S-7 | 01/03/2000 | 615 | 8.73 | 2.90 | 4.00 | 7.17 | 17.0 | NA | 21.03 | 7.73 | 13.30 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-7 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.27 | 14.76 | NA | NA |
| S-7 | 07/12/2000 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.97 | 14.06 | NA | NA |
| S-7 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.43 | 14.60 | NA | NA |
| S-7 | 01/03/2001 | 460 | 6.68 | <0.500 | 0.712 | 0.596 | 10.2 | NA | 21.03 | 7.27 | 13.76 | NA | NA |
| S-7 | 04/24/2001 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.75 | 14.28 | NA | NA |
| S-7 | 07/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.55 | 13.48 | NA | NA |
| S-7 | 11/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.80 | 13.23 | NA | NA |
| S-7 | 01/16/2002 | 360 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 21.03 | 6.11 | 14.92 | NA | NA |
| S-7 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 6.54 | 14.49 | NA | NA |
| S-7 | 07/11/2002 | NA | NA | NA | NA | NA | NA | NA | 21.03 | 7.37 | 13.66 | NA | NA |
| S-7 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 21.01 | 7.97 | 13.04 | NA | NA |
| S-7 | 01/23/2003 | 160 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 21.01 | 6.45 | 14.56 | NA | NA |
| S-7 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 21.01 | 6.14 | 14.87 | NA | NA |
| S-7 | 07/01/2003 | NA | NA | NA | NA | NA | NA | NA | 21.01 | 7.28 | 13.73 | NA | NA |
| S-7 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 21.01 | 7.78 | 13.23 | NA | NA |
| S-7 | 01/22/2004 | 140 | <0.50 | <0.50 | 0.51 | <1.0 | NA | NA | 21.01 | 6.93 | 14.08 | NA | NA |
| S-7 | 07/13/2004 | 150 | <0.50 | <0.50 | <0.50 | <1.0 | NA | 17 | 21.01 | 7.88 | 13.13 | NA | NA |
| S-8 | 11/16/1988 | 210 | 5.0 | <1 | 1.0 | 5.0 | NA | NA | 20.72 | 7.76 | 12.96 | NA | NA |
| S-8 | 02/27/1989 | <50 | 2.4 | <1 | <1 | <3 | NA | NA | 20.72 | NA | NA | NA | NA |
| S-8 | 05/04/1989 | <50 | 7.5 | <1 | 2.0 | <3 | NA | NA | 20.72 | NA | NA | NA | NA |
| S-8 | 08/10/1989 | <50 | 0.6 | <1 | <1 | <3 | NA | NA | 20.72 | 7.79 | 12.93 | NA | NA |
| S-8 | 10/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 20.72 | 7.84 | 12.88 | NA | NA |
| S-8 | 01/25/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 20.72 | 7.47 | 13.25 | NA | NA |
| S-8 | 04/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 20.72 | 7.59 | 13.13 | NA | NA |
| S-8 | 07/23/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.72 | 7.49 | 13.23 | NA | NA |
| S-8 | 10/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.72 | 8.44 | 12.28 | NA | NA |
| S-8 | 01/28/1991 | <50 | 55 | 0.5 | <0.5 | 1.4 | NA | NA | 20.72 | 8.28 | 12.44 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-8 | 04/25/1991 | 130a | 19 | <0.5 | 1.3 | 1.1 | NA | NA | 20.72 | 6.72 | 14.00 | NA | NA |
| S-8 | 07/09/1991 | 200 | 33 | <0.5 | 1.8 | 2.8 | NA | NA | 20.72 | 7.98 | 12.74 | NA | NA |
| S-8 | 10/08/1991 | 580 | 95 | 2.2 | 4.9 | 6.5 | NA | NA | 20.72 | 8.55 | 12.17 | NA | NA |
| S-8 | 02/05/1992 | 90a | 18 | <0.5 | 6.2 | 1.8 | NA | NA | 20.72 | 7.50 | 13.22 | NA | NA |
| S-8 | 04/28/1992 | <50 | 5.9 | <0.5 | 2.5 | <0.5 | NA | NA | 20.72 | 7.14 | 13.58 | NA | NA |
| S-8 | 07/27/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.72 | 8.06 | 12.66 | NA | NA |
| S-8 | 10/26/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.72 | 8.58 | 12.14 | NA | NA |
| S-8 | 01/14/1993 | 270 | 74 | 0.9 | 25 | 5.5 | NA | NA | 20.72 | 5.32 | 15.40 | NA | NA |
| S-8 | 04/16/1993 | 1100 | 420 | <0.5 | 200 | 20 | NA | NA | 20.72 | 5.76 | 14.96 | NA | NA |
| S-8 | 07/23/1993 | 160 | 23 | <0.5 | 1.2 | 1.5 | NA | NA | 20.72 | 7.29 | 13.43 | NA | NA |
| S-8 | 10/27/1993 | 420 | 650 | 0.7 | 11 | 1.7 | NA | NA | 20.72 | 7.93 | 12.79 | NA | NA |
| S-8 | 01/27/1994 | 290 | 65 | <1 | 6.9 | 2.4 | NA | NA | 20.72 | 6.31 | 14.41 | NA | NA |
| S-8 | 05/05/1994 | 120 | 13 | <0.5 | <0.5 | <0.5 | NA | NA | 20.32 | 6.84 | 13.48 | NA | NA |
| S-8 | 07/26/1994 | 115 | 12.2 | 1.3 | <0.3 | 2.7 | NA | NA | 20.32 | 7.42 | 12.90 | NA | NA |
| S-8 | 10/28/1994 | 733 | 75.9 | 3.2 | 4.9 | 4.2 | NA | NA | 20.32 | 7.56 | 12.76 | NA | NA |
| S-8 | 01/02/1995 | 290 | 54 | <0.5 | 10 | <0.5 | NA | NA | 20.32 | 6.19 | 14.13 | NA | NA |
| S-8 | 04/14/1995 | 230 | 68 | <0.5 | 10 | 2.4 | NA | NA | 20.32 | 5.54 | 14.78 | NA | NA |
| S-8 | 07/28/1995 | 290 | 44 | <0.5 | 8.0 | <0.5 | NA | NA | 20.32 | 6.28 | 14.04 | NA | NA |
| S-8 | 10/17/1995 | 190 | 24 | <0.5 | 1.0 | 0.9 | NA | NA | 20.32 | 6.64 | 13.68 | NA | NA |
| S-8 | 01/11/1996 | 400 | 85 | 1.1 | 13 | 3.4 | 2.3 | NA | 20.32 | 5.96 | 14.36 | NA | NA |
| S-8 | 04/02/1996 | 300 | 110 | 0.7 | 4.9 | 0.9 | <2 | NA | 20.32 | 5.21 | 15.11 | NA | NA |
| S-8 | 07/09/1996 | <50 | 5.4 | <0.50 | 0.63 | <0.50 | <2.5 | NA | 20.32 | 6.05 | 14.27 | NA | NA |
| S-8 | 10/10/1996 | 150 | 0.53 | 0.66 | 2.3 | 1.0 | 8.9 | NA | 20.32 | 6.83 | 13.49 | NA | NA |
| S-8 | 01/09/1997 | 240 | 27 | <0.50 | 2.4 | <0.50 | 5.8 | NA | 20.32 | 4.51 | 15.81 | NA | NA |
| S-8 | 04/08/1997 | 220 | 27 | 0.62 | 1.9 | 0.71 | 5.7 | NA | 20.32 | 6.50 | 13.82 | NA | NA |
| S-8 | 07/21/1997 | 1200 | 140 | 2.8 | 21 | 5.0 | 27 | NA | 20.32 | 6.36 | 13.96 | NA | NA |
| S-8 (D) | 07/21/1997 | 1200 | 120 | <2.0 | 19 | 3.9 | 25 | NA | 20.32 | NA | NA | NA | NA |
| S-8 | 10/08/1997 | 690 | 92 | 1.4 | 25 | 2.0 | <2.5 | NA | 20.32 | 6.83 | 13.49 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-8 (D) | 10/08/1997 | 700 | 95 | 1.3 | 26 | 1.9 | <2.5 | NA | 20.32 | NA | NA | NA | NA |
| S-8 | 01/15/1998 | 460 | 110 | 1.0 | 3.4 | 1.7 | <5.0 | NA | 20.32 | 4.30 | 16.02 | NA | NA |
| S-8 | 04/14/1998 | 780 | 190 | 2.9 | 15 | 3.4 | <2.5 | NA | 20.32 | 4.68 | 15.64 | NA | NA |
| S-8 | 07/14/1998 | 1600 | 240 | <5.0 | 36 | <5.0 | <25 | NA | 20.36 | 6.36 | 14.00 | NA | NA |
| S-8 | 10/20/1998 | 700 | 55 | <5.0 | <5.0 | <5.0 | 49 | NA | 20.36 | 6.91 | 13.45 | NA | NA |
| S-8 | 01/22/1999 | <50.0 | 5.83 | <0.500 | 0.919 | <0.500 | <2.00 | NA | 20.36 | 5.97 | 14.39 | NA | NA |
| S-8 | 04/08/1999 | 684 | 10.6 | 1.3 | 9.75 | 1.0 | 10.5 | NA | 20.36 | 5.01 | 15.35 | NA | NA |
| S-8 | 07/23/1999 | 1540 | 86.5 | 5.20 | 5.30 | 6.35 | <25.0 | NA | 20.36 | 6.61 | 13.75 | NA | NA |
| S-8 | 10/26/1999 | 1680 | 116 | <2.50 | 22.4 | 5.58 | <12.5 | NA | 20.36 | 6.95 | 13.41 | NA | NA |
| S-8 | 01/03/2000 | Well inaccessible | | NA | NA | NA | NA | NA | 20.36 | NA | NA | NA | NA |
| S-8 | 04/14/2000 | Well inaccessible | | NA | NA | NA | NA | NA | 20.36 | NA | NA | NA | NA |
| S-8 | 07/12/2000 | Well inaccessible | | NA | NA | NA | NA | NA | 20.36 | NA | NA | NA | NA |
| S-8 | 11/01/2000 | 2300 | 118 | 12.4 | 51.7 | <2.50 | <12.5 | NA | 20.36 | 5.68 | 14.68 | NA | NA |
| S-8 | 01/03/2001 | 263 | 4.34 | 0.620 | <0.500 | 0.643 | 5.40 | NA | 20.36 | 6.95 | 13.41 | NA | NA |
| S-8 | 04/24/2001 | 680 | 12 | <0.50 | 0.86 | <0.50 | NA | <0.50 | 20.36 | 6.25 | 14.11 | NA | NA |
| S-8 | 07/02/2001 | 330 | 2.5 | <0.50 | 0.86 | <0.50 | NA | <5.0 | 20.36 | 7.00 | 13.36 | NA | NA |
| S-8 | 11/02/2001 | 1300 | 71 | 0.84 | 14 | 1.7 | NA | <5.0 | 20.36 | 7.44 | 12.92 | NA | NA |
| S-8 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.36 | 5.67 | 14.89 | NA | NA |
| S-8 | 04/01/2002 | 330 | 2.2 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.36 | 5.99 | 14.37 | NA | NA |
| S-8 | 07/11/2002 | 1400 | 55 | 0.83 | 5.3 | 0.71 | NA | <5.0 | 20.36 | 6.94 | 13.42 | NA | NA |
| S-8 | 10/28/2002 | 660 | 6.2 | 0.63 | 0.76 | <0.50 | NA | <0.50 | 20.36 | 7.50 | 12.86 | NA | 1.1 |
| S-8 | 01/23/2003 | 1600 | 30 | 0.56 | 6.7 | <0.50 | NA | <5.0 | 20.36 | 5.99 | 14.37 | NA | NA |
| S-8 | 04/30/2003 | 890 | 13 | <0.50 | 0.59 | <1.0 | NA | <5.0 | 20.36 | 5.30 | 15.06 | NA | NA |
| S-8 | 07/01/2003 | 1800 | 68 | 1.3 | 2.6 | 1.2 | NA | <0.50 | 20.36 | 6.87 | 13.49 | NA | 1.0 |
| S-8 | 10/08/2003 | 220 | 1.3 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 20.36 | 7.27 | 13.09 | NA | NA |
| S-8 | 01/22/2004 | 1000 | 6.7 | <0.50 | 0.61 | <1.0 | NA | NA | 20.36 | 6.50 | 13.86 | NA | NA |
| S-8 | 07/13/2004 | 2000 | 100 | 1.7 | 5.7 | <2.0 | NA | <1.0 | 20.36 | 7.41 | 12.95 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-9 | 11/16/1988 | 1400 | 69 | 3.0 | 52 | 180 | NA | NA | 20.96 | 7.78 | 13.18 | NA | NA |
| S-9 | 02/27/1989 | 1600 | 240 | 4.0 | 130 | 180 | NA | NA | 20.96 | NA | NA | NA | NA |
| S-9 | 05/04/1989 | 2600 | 470 | 10 | 240 | 480 | NA | NA | 20.96 | NA | NA | NA | NA |
| S-9 | 08/10/1989 | 520 | 73 | <10 | 40 | <30 | NA | NA | 20.96 | 7.82 | 13.14 | NA | NA |
| S-9 | 10/10/1989 | 380 | 82 | <1 | 46 | 13 | NA | NA | 20.96 | 7.87 | 13.09 | NA | NA |
| S-9 | 01/25/1990 | 750 | 140 | 1.2 | 69 | 75 | NA | NA | 20.96 | 7.41 | 13.55 | NA | NA |
| S-9 | 04/18/1990 | 680 | 150 | 1.7 | 50 | 37 | NA | NA | 20.96 | 7.65 | 13.31 | NA | NA |
| S-9 | 07/23/1990 | 490 | 94 | 1.2 | 32 | 24 | NA | NA | 20.96 | 7.58 | 13.38 | NA | NA |
| S-9 | 10/18/1990 | 390 | 140 | 0.7 | 3.3 | 24 | NA | NA | 20.96 | 8.46 | 12.50 | NA | NA |
| S-9 | 01/28/1991 | 1040 | 450 | 4.6 | 85 | 97 | NA | NA | 20.96 | 8.29 | 12.67 | NA | NA |
| S-9 | 04/25/1991 | 5800 | 880 | 9.0 | 360 | 500 | NA | NA | 20.96 | 6.09 | 14.87 | NA | NA |
| S-9 | 07/09/1991 | 1400 | 220 | 2.8 | 82 | 100 | NA | NA | 20.96 | 7.82 | 13.14 | NA | NA |
| S-9 | 10/08/1991 | 890 | 960 | <2.5 | 16 | 29 | NA | NA | 20.96 | 8.55 | 12.41 | NA | NA |
| S-9 | 02/05/1992 | 950 | 240 | <2.5 | 28 | 55 | NA | NA | 20.96 | 6.96 | 14.00 | NA | NA |
| S-9 | 04/28/1992 | 1400a | 290 | 3.0 | 100 | 81 | NA | NA | 20.96 | 6.76 | 14.20 | NA | NA |
| S-9 | 07/27/1992 | 890 | 190 | <2.5 | 66 | 68 | NA | NA | 20.96 | 8.10 | 12.86 | NA | NA |
| S-9 | 10/26/1992 | 650 | 160 | <2.5 | 63 | 89 | NA | NA | 20.96 | 8.53 | 12.43 | NA | NA |
| S-9 | 01/13/1993 | 19000 | 2400 | 38 | 1700 | 2200 | NA | NA | 20.96 | 6.80 | 14.16 | NA | NA |
| S-9 | 04/16/1993 | 10000 | 1500 | <5 | 1100 | 990 | NA | NA | 20.96 | 6.28 | 14.68 | NA | NA |
| S-9 | 07/23/1993 | 1100 | 400 | <5 | 260 | 160 | NA | NA | 20.96 | 7.26 | 13.70 | NA | NA |
| S-9 | 10/27/1993 | 2500 | 400 | <5 | 190 | 110 | NA | NA | 20.96 | 8.00 | 12.96 | NA | NA |
| S-9 | 01/27/1994 | 4800 | 990 | 16 | 630 | 490 | NA | NA | 20.96 | 5.96 | 15.00 | NA | NA |
| S-9 | 05/05/1994 | 3700 | 480 | <5 | 21 | 120 | NA | NA | 20.68 | 6.99 | 13.69 | NA | NA |
| S-9 | 07/26/1994 | 1000 | 124.6 | <0.3 | 35.8 | 28.6 | NA | NA | 20.68 | 7.56 | 13.12 | NA | NA |
| S-9 | 10/28/1994 | 979 | 80.3 | 7.0 | 21.7 | 29.2 | NA | NA | 20.68 | 7.78 | 12.90 | NA | NA |
| S-9 | 01/02/1995 | 3900 | 540 | 2.4 | 350 | 150 | NA | NA | 20.68 | 6.29 | 14.39 | NA | NA |
| S-9 | 04/14/1995 | 5100 | 1000 | <10 | 380 | 230 | NA | NA | 20.68 | 5.69 | 14.99 | NA | NA |
| S-9 | 07/28/1995 | 4600 | 680 | <10 | 120 | 47 | NA | NA | 20.68 | 6.61 | 14.07 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-9 | 10/17/1995 | 1600 | 150 | <0.5 | 42 | 15 | NA | NA | 20.68 | 7.00 | 13.68 | NA | NA |
| S-9 | 01/11/1996 | 6800 | 1100 | 12 | 720 | 95 | 24 | NA | 20.68 | 6.20 | 14.48 | NA | NA |
| S-9 | 04/02/1996 | 6000 | 1300 | 8.3 | 430 | 99 | 49 | NA | 20.68 | 5.19 | 15.49 | NA | NA |
| S-9 (D) | 04/02/1996 | 6500 | 1200 | 8.3 | 410 | 90 | <20 | NA | 20.68 | NA | NA | NA | NA |
| S-9 | 07/09/1996 | 3400 | 680 | 6.7 | 54 | 31 | <25 | NA | 20.68 | 6.43 | 14.25 | NA | NA |
| S-9 (D) | 07/09/1996 | 3300 | 730 | <5.0 | 58 | 28 | <25 | NA | 20.68 | NA | NA | NA | NA |
| S-9 | 10/10/1996 | 6600 | 1200 | <10 | 160 | <10 | 70 | NA | 20.68 | 7.08 | 13.60 | NA | NA |
| S-9 (D) | 10/10/1996 | 6100 | 1000 | <10 | 200 | 15 | 65 | NA | 20.68 | NA | NA | NA | NA |
| S-9 | 01/09/1997 | 12000 | 1400 | <25 | 1000 | 39 | <125 | NA | 20.68 | 5.03 | 15.65 | NA | NA |
| S-9 | 04/08/1997 | 6600 | 920 | 10 | 230 | 26 | 150 | NA | 20.68 | 6.78 | 13.90 | NA | NA |
| S-9 | 07/21/1997 | 7800 | 860 | 13 | 260 | 14 | 87 | NA | 20.68 | 6.77 | 13.91 | NA | NA |
| S-9 | 10/08/1997 | 4600 | 320 | <10 | 61 | <10 | 28 | NA | 20.68 | 6.92 | 13.76 | NA | NA |
| S-9 | 01/15/1998 | 9300 | 1000 | <10 | 730 | 24 | <50 | NA | 20.68 | 4.50 | 16.18 | NA | NA |
| S-9 | 04/14/1998 | 12000 | 1200 | <2.5 | 960 | <2.5 | <12 | NA | 20.68 | 4.35 | 16.33 | NA | NA |
| S-9 (D) | 04/14/1998 | 12000 | 1200 | <2.5 | 930 | <2.5 | <12 | NA | 20.68 | NA | NA | NA | NA |
| S-9 | 07/14/1998 | 12000 | 1700 | <25 | 990 | 39 | <125 | NA | 20.68 | 5.95 | 14.73 | NA | NA |
| S-9 (D) | 07/14/1998 | 11000 | 1800 | <25 | 650 | <25 | <125 | NA | 20.68 | NA | NA | NA | NA |
| S-9 | 10/20/1998 | 14000 | 1600 | <25 | 560 | <25 | 340 | NA | 20.68 | 7.03 | 13.65 | NA | NA |
| S-9 (D) | 10/20/1998 | 11000 | 1100 | <10 | 230 | <10 | 100 | NA | 20.68 | NA | NA | NA | NA |
| S-9 | 01/22/1999 | 9900 | 1030 | 26.7 | 819 | 27.5 | 46.8 | NA | 20.68 | 6.01 | 14.67 | NA | NA |
| S-9 | 04/08/1999 | 17900 | 1450 | <50.0 | 1610 | 73.8 | <500 | NA | 20.68 | 5.25 | 15.43 | NA | NA |
| S-9 | 07/23/1999 | 12200 | 1020 | <20.0 | 536 | <20.0 | <200 | NA | 20.68 | 6.71 | 13.97 | NA | NA |
| S-9 | 10/26/1999 | 9580 | 1170 | 11.9 | 566 | 23.1 | <50.0 | NA | 20.68 | 7.27 | 13.41 | NA | NA |
| S-9 | 10/26/1999 | 9580 | 1170 | 11.9 | 566 | 23.1 | <50.0 | NA | 20.68 | 7.27 | 13.41 | NA | NA |
| S-9 | 01/03/2000 | 9660 | 689 | <50.0 | 640 | <50.0 | <250 | NA | 20.68 | 7.47 | 13.21 | NA | NA |
| S-9 | 04/14/2000 | 14000 | 1040 | <50.0 | 1210 | <50.0 | <250 | NA | 20.68 | 5.75 | 14.93 | NA | NA |
| S-9 | 07/12/2000 | 13200 | 1360 | 33.9 | 552 | 26.8 | <100 | NA | 20.68 | 6.63 | 14.05 | NA | NA |
| S-9 | 11/01/2000 | 9120 | 928 | 13.5 | 468 | <10.0 | <50.0 | NA | 20.68 | 5.50 | 15.18 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|-----|------------|-------|-------|-------|-------|-------|------|-------|-------|------|-------|----|------|
| S-9 | 01/03/2001 | 355 | 19.8 | 0.732 | 2.23 | 0.630 | 5.09 | NA | 20.68 | 7.11 | 13.57 | NA | NA |
| S-9 | 04/24/2001 | 3500 | 300 | 1.7 | 150 | 1.7 | NA | <1.0 | 20.68 | 6.30 | 14.38 | NA | NA |
| S-9 | 07/02/2001 | 88 | 3.8 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.68 | 8.18 | 12.50 | NA | 2.6 |
| S-9 | 11/02/2001 | 210 | 9.5 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.68 | 8.40 | 12.28 | NA | 16.4 |
| S-9 | 01/16/2002 | 15000 | 520 | 4.9 | 580 | 7.1 | NA | <20 | 20.68 | 5.71 | 14.97 | NA | 0.5 |
| S-9 | 04/01/2002 | 15000 | 530 | 5.1 | 920 | 7.8 | NA | <25 | 20.68 | 5.99 | 14.69 | NA | 3.0 |
| S-9 | 07/11/2002 | 10000 | 520 | 5.3 | 97 | 5.8 | NA | <25 | 20.68 | 6.99 | 13.69 | NA | 0.5 |
| S-9 | 10/28/2002 | 11000 | 580 | 6.2 | 65 | 5.3 | NA | <2.5 | 20.70 | 7.63 | 13.07 | NA | 1.0 |
| S-9 | 01/23/2003 | 9300 | 400 | 5.6 | 320 | 6.5 | NA | <5.0 | 20.70 | 5.96 | 14.74 | NA | 0.5 |
| S-9 | 04/30/2003 | 180 | 4.2 | <0.50 | 3.7 | <1.0 | NA | <5.0 | 20.70 | 5.20 | 15.50 | NA | 7.0 |
| S-9 | 07/01/2003 | 2200 | 71 | 0.94 | 6.4 | <1.0 | NA | <0.50 | 20.70 | 7.78 | 12.92 | NA | 0.9 |
| S-9 | 10/08/2003 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 20.70 | 7.38 | 13.32 | NA | 16.2 |
| S-9 | 01/22/2004 | 1400 | 26 | <1.0 | 14 | 12 | NA | NA | 20.70 | 6.51 | 14.19 | NA | 0.7 |
| S-9 | 07/13/2004 | 1900 | 36 | <1.0 | 2.0 | <2.0 | NA | <1.0 | 20.70 | 8.51 | 12.19 | NA | 17.1 |

| | | | | | | | | | | | | | |
|------|------------|-----|------|------|------|------|----|----|-------|------|-------|----|----|
| S-10 | 11/16/1988 | 330 | 0.5 | <1 | 1.0 | 11 | NA | NA | 20.86 | 7.91 | 12.95 | NA | NA |
| S-10 | 02/27/1989 | 140 | <0.5 | <3 | 2.0 | 6.0 | NA | NA | 20.86 | NA | NA | NA | NA |
| S-10 | 05/03/1989 | 220 | <0.5 | 1.0 | 2.0 | 7.0 | NA | NA | 20.86 | NA | NA | NA | NA |
| S-10 | 08/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 20.86 | 7.94 | 12.92 | NA | NA |
| S-10 | 10/09/1989 | 170 | <0.5 | <1 | <1 | <3 | NA | NA | 20.86 | 7.99 | 12.87 | NA | NA |
| S-10 | 01/25/1990 | <50 | <0.5 | <0.5 | 1.1 | 4.0 | NA | NA | 20.86 | 7.56 | 13.30 | NA | NA |
| S-10 | 04/18/1990 | <50 | <0.5 | 0.9 | <0.5 | 2.0 | NA | NA | 20.86 | 7.71 | 13.15 | NA | NA |
| S-10 | 07/23/1990 | 590 | <0.5 | <0.5 | 1.9 | 19 | NA | NA | 20.86 | 7.64 | 13.22 | NA | NA |
| S-10 | 10/18/1990 | 140 | <0.5 | 0.7 | <0.5 | 7.0 | NA | NA | 20.86 | 8.58 | 12.28 | NA | NA |
| S-10 | 01/28/1991 | <50 | <0.5 | <0.5 | <0.5 | 0.5 | NA | NA | 20.86 | 8.35 | 12.51 | NA | NA |
| S-10 | 04/25/1991 | <50 | <0.5 | <0.5 | 1.1 | 0.8 | NA | NA | 20.69 | 6.91 | 13.78 | NA | NA |
| S-10 | 07/09/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 8.14 | 12.55 | NA | NA |
| S-10 | 10/08/1991 | 140 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 8.70 | 11.99 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-10 | 02/05/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 7.57 | 13.12 | NA | NA |
| S-10 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 7.20 | 13.49 | NA | NA |
| S-10 | 07/27/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 8.17 | 12.52 | NA | NA |
| S-10 | 10/26/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 8.68 | 12.01 | NA | NA |
| S-10 | 01/13/1993 | 88 | <0.5 | 0.6 | 0.6 | <0.5 | NA | NA | 20.69 | 3.78 | 16.91 | NA | NA |
| S-10 | 04/16/1993 | 80 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 6.46 | 14.23 | NA | NA |
| S-10 | 07/23/1993 | <50 | 1.5 | <0.5 | 0.7 | 2.7 | NA | NA | 20.69 | 7.38 | 13.31 | NA | NA |
| S-10 | 10/27/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.69 | 8.09 | 12.60 | NA | NA |
| S-10 | 01/27/1994 | 270 | 1.1 | 1.3 | 2.0 | 7.4 | NA | NA | 20.69 | 5.81 | 14.88 | NA | NA |
| S-10 | 05/05/1994 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.15 | 6.82 | 13.33 | NA | NA |
| S-10 | 07/26/1994 | <50 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 20.15 | 7.40 | 12.75 | NA | NA |
| S-10 | 10/28/1994 | <50 | 2.4 | <0.3 | 0.5 | 0.8 | NA | NA | 20.15 | 7.62 | 12.53 | NA | NA |
| S-10 | 01/02/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.15 | 6.13 | 14.02 | NA | NA |
| S-10 | 04/14/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.15 | 5.60 | 14.55 | NA | NA |
| S-10 | 07/28/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.15 | 6.44 | 13.71 | NA | NA |
| S-10 | 10/17/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.15 | 6.85 | 13.30 | NA | NA |
| S-10 | 01/11/1996 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <2 | NA | 20.15 | 6.08 | 14.07 | NA | NA |
| S-10 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 5.21 | 14.94 | NA | NA |
| S-10 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.20 | 13.95 | NA | NA |
| S-10 | 10/10/1996 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.92 | 13.23 | NA | NA |
| S-10 | 01/09/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.15 | 4.64 | 15.51 | NA | NA |
| S-10 | 04/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 5.82 | 14.33 | NA | NA |
| S-10 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.48 | 13.67 | NA | NA |
| S-10 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 5.48 | 14.67 | NA | NA |
| S-10 | 01/15/1998 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.15 | 3.01 | 17.14 | NA | NA |
| S-10 | 04/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 4.30 | 15.85 | NA | NA |
| S-10 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 5.84 | 14.31 | NA | NA |
| S-10 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.89 | 13.26 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-10 | 01/22/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.00 | NA | 20.15 | 6.00 | 14.15 | NA | NA |
| S-10 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 4.41 | 15.74 | NA | NA |
| S-10 | 07/23/1999 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.48 | 13.67 | NA | NA |
| S-10 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 7.07 | 13.08 | NA | NA |
| S-10 | 01/03/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.15 | 7.27 | 12.88 | NA | NA |
| S-10 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 5.75 | 14.40 | NA | NA |
| S-10 | 07/12/2000 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.17 | 13.98 | NA | NA |
| S-10 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 5.63 | 14.52 | NA | NA |
| S-10 | 01/03/2001 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.15 | 6.89 | 13.26 | NA | NA |
| S-10 | 04/24/2001 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.20 | 13.95 | NA | NA |
| S-10 | 07/02/2001 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.80 | 13.35 | NA | NA |
| S-10 | 11/02/2001 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 7.40 | 12.75 | NA | NA |
| S-10 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.15 | 5.66 | 14.49 | NA | NA |
| S-10 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 5.63 | 14.52 | NA | NA |
| S-10 | 07/11/2002 | NA | NA | NA | NA | NA | NA | NA | 20.15 | 6.72 | 13.43 | NA | NA |
| S-10 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 20.14 | 7.50 | 12.64 | NA | NA |
| S-10 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.14 | 5.97 | 14.17 | NA | NA |
| S-10 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 20.14 | 5.24 | 14.90 | NA | NA |
| S-10 | 07/01/2003 | NA | NA | NA | NA | NA | NA | NA | 20.14 | 6.82 | 13.32 | NA | NA |
| S-10 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 20.14 | 7.06 | 13.08 | NA | NA |
| S-10 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | NA | 20.14 | 6.50 | 13.64 | NA | NA |
| S-10 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 20.14 | 7.49 | 12.65 | NA | NA |
| S-11 | 11/16/1988 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.26 | 8.62 | 12.64 | NA | NA |
| S-11 | 02/27/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.26 | NA | NA | NA | NA |
| S-11 | 05/03/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.26 | NA | NA | NA | NA |
| S-11 | 08/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.26 | 8.65 | 12.61 | NA | NA |
| S-11 | 10/09/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.26 | 8.64 | 12.62 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|--------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-11 | 01/25/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 21.26 | 8.43 | 12.83 | NA | NA |
| S-11 | 04/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 21.26 | 8.42 | 12.84 | NA | NA |
| S-11 | 07/23/1990 | <50 | <0.5 | 0.6 | <0.5 | 1.1 | NA | NA | 21.26 | 8.23 | 13.03 | NA | NA |
| S-11 | 10/18/1990 | <50 | <0.5 | <0.5 | <0.5 | 0.5 | NA | NA | 21.26 | 9.20 | 12.06 | NA | NA |
| S-11 | 01/28/1991 | 63 | <0.5 | 3.3 | 0.9 | 7.0 | NA | NA | 21.26 | 9.13 | 12.13 | NA | NA |
| S-11 | 04/25/1991 | <50 | <0.5 | <0.5 | 0.8 | <0.5 | NA | NA | 21.26 | 7.53 | 13.73 | NA | NA |
| S-11 | 07/09/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.26 | 8.85 | 12.41 | NA | NA |
| S-11 | 10/08/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.26 | 9.34 | 11.92 | NA | NA |
| S-11 | 02/05/1991 | NA | NA | NA | NA | NA | NA | NA | 21.26 | 8.50 | 12.76 | NA | NA |
| S-11 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.26 | 7.80 | 13.46 | NA | NA |
| S-11 | 07/27/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.26 | 8.80 | 12.46 | NA | NA |
| S-11 | 10/26/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.26 | 9.42 | 11.84 | NA | NA |
| S-11 | 01/13/1993 | NA | NA | NA | NA | NA | NA | NA | 21.26 | 6.52 | 14.74 | NA | NA |
| S-11 | 04/16/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.26 | 6.86 | 14.40 | NA | NA |
| S-11 | 07/23/1993 | NA | NA | NA | NA | NA | NA | NA | 21.26 | 8.07 | 13.19 | NA | NA |
| S-11 | 10/27/1993 | Well inaccessible | | NA | NA | NA | NA | NA | 21.26 | NA | NA | NA | NA |
| S-11 | 01/27/1994 | NA | NA | NA | NA | NA | NA | NA | 21.26 | NA | NA | NA | NA |
| S-11 | 05/05/1994 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.24 | 7.73 | 13.51 | NA | NA |
| S-11 | 07/26/1994 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 8.30 | 12.94 | NA | NA |
| S-11 | 10/28/1994 | <50 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 21.24 | 8.30 | 12.94 | NA | NA |
| S-11 | 01/02/1995 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.25 | 13.99 | NA | NA |
| S-11 | 04/14/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.24 | 6.99 | 14.25 | NA | NA |
| S-11 | 07/28/1995 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.21 | 14.03 | NA | NA |
| S-11 | 10/17/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.24 | 7.41 | 13.83 | NA | NA |
| S-11 | 01/11/1996 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.80 | 14.44 | NA | NA |
| S-11 | 07/21/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 21.24 | 7.28 | 13.96 | NA | NA |
| S-11 | 03/18/2002 d | NA | NA | NA | NA | NA | NA | NA | 21.27 | NA | NA | NA | NA |
| S-11 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | 0.57 | 21.27 | 7.55 | 13.72 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-12 | 11/16/1988 | 50 | 3.5 | <1 | <1 | <3 | NA | NA | 21.05 | NA | NA | NA | NA |
| S-12 | 02/27/1989 | <50 | 0.8 | <1 | <1 | <3 | NA | NA | 21.05 | NA | NA | NA | NA |
| S-12 | 05/03/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.05 | NA | NA | NA | NA |
| S-12 | 08/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 21.05 | 8.32 | 12.73 | NA | NA |
| S-12 | 10/09/1989 | <50 | <0.5 | <1 | <1 | <1 | NA | NA | 21.05 | 8.32 | 12.73 | NA | NA |
| S-12 | 01/25/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 21.05 | 8.18 | 12.87 | NA | NA |
| S-12 | 04/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.05 | 13.00 | NA | NA |
| S-12 | 07/23/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 7.92 | 13.13 | NA | NA |
| S-12 | 10/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.90 | 12.15 | NA | NA |
| S-12 | 01/28/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.54 | 12.51 | NA | NA |
| S-12 | 04/25/1991 | 90 | 5.4 | <0.5 | 1.1 | 0.7 | NA | NA | 21.05 | 7.08 | 13.97 | NA | NA |
| S-12 | 07/09/1991 | <50 | 2.9 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.42 | 12.63 | NA | NA |
| S-12 | 10/08/1991 | 50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.80 | 12.25 | NA | NA |
| S-12 | 02/05/1992 | 50a | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.07 | 12.98 | NA | NA |
| S-12 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.33 | 12.72 | NA | NA |
| S-12 | 07/27/1992 | 94 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 8.55 | 12.50 | NA | NA |
| S-12 | 10/26/1992 | 86 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 9.03 | 12.02 | NA | NA |
| S-12 | 01/14/1993 | 120 | 2.0 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 6.38 | 14.67 | NA | NA |
| S-12 | 04/16/1993 | 60 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 6.56 | 14.49 | NA | NA |
| S-12 | 07/23/1993 | 90 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.05 | 7.76 | 13.29 | NA | NA |
| S-12 | 10/27/1993 | Well inaccessible | | NA | NA | NA | NA | NA | 21.05 | NA | NA | NA | NA |
| S-12 | 01/27/1994 | Well inaccessible | | NA | NA | NA | NA | NA | 21.05 | NA | NA | NA | NA |
| S-12 | 05/05/1994 | <50 | 2.0 | <0.5 | <0.5 | <0.5 | NA | NA | 20.71 | 7.49 | 13.22 | NA | NA |
| S-12 | 07/26/1994 | 128 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 20.71 | 7.92 | 12.79 | NA | NA |
| S-12 | 10/28/1994 | 167 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 20.71 | 7.78 | 12.93 | NA | NA |
| S-12 | 01/02/1995 | 50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.71 | 7.33 | 13.38 | NA | NA |
| S-12 | 04/14/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.71 | 6.47 | 14.24 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|--------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-12 | 07/28/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.71 | 6.90 | 13.81 | NA | NA |
| S-12 | 10/17/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.71 | 7.16 | 13.55 | NA | NA |
| S-12 | 01/11/1996 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 82 | NA | 20.71 | 6.65 | 14.06 | NA | NA |
| S-12 | 07/21/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | 45 | NA | 20.71 | 6.95 | 13.76 | NA | NA |
| S-12 | 03/18/2002 d | NA | NA | NA | NA | NA | NA | NA | 20.73 | NA | NA | NA | NA |
| S-12 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | 0.58 | 20.73 | 7.30 | 13.43 | NA | NA |
| S-13 | 05/03/1989 | 150 | 4.9 | 4.0 | 2.0 | 14 | NA | NA | 20.57 | NA | NA | NA | NA |
| S-13 | 08/10/1989 | 110 | 2.9 | <1 | <1 | <3 | NA | NA | 20.57 | 8.00 | 12.57 | NA | NA |
| S-13 | 10/09/1989 | 77 | 1.4 | <1 | <1 | <3 | NA | NA | 20.57 | 7.95 | 12.62 | NA | NA |
| S-13 | 01/25/1990 | 51 | 0.5 | <0.5 | <0.5 | <1 | NA | NA | 20.57 | 7.79 | 12.78 | NA | NA |
| S-13 | 04/18/1990 | 85 | 8.7 | <0.5 | <0.5 | <1 | NA | NA | 20.57 | 7.73 | 12.84 | NA | NA |
| S-13 | 07/23/1990 | 80 | 0.8 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 7.63 | 12.94 | NA | NA |
| S-13 | 10/18/1990 | 130 | <0.5 | <0.5 | <0.5 | <5 | NA | NA | 20.57 | 8.58 | 11.99 | NA | NA |
| S-13 | 01/28/1991 | <50 | <0.5 | 0.9 | 1.2 | 1.0 | NA | NA | 20.57 | 8.39 | 12.18 | NA | NA |
| S-13 | 04/25/1991 | 440a | 3.8 | <0.5 | <0.5 | 0.6 | NA | NA | 20.57 | 7.00 | 13.57 | NA | NA |
| S-13 | 07/09/1991 | 320a | 0.6 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 8.12 | 12.45 | NA | NA |
| S-13 | 10/08/1991 | 310 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 8.69 | 11.88 | NA | NA |
| S-13 | 02/05/1992 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 7.62 | 12.95 | NA | NA |
| S-13 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 7.15 | 13.42 | NA | NA |
| S-13 | 07/27/1992 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 8.20 | 12.37 | NA | NA |
| S-13 | 10/26/1992 | 180 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 8.73 | 11.84 | NA | NA |
| S-13 | 01/13/1993 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 5.06 | 15.51 | NA | NA |
| S-13 | 04/16/1993 | 240 | 4.8 | <0.5 | 1.3 | <0.5 | NA | NA | 20.57 | 6.38 | 14.19 | NA | NA |
| S-13 | 07/23/1993 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 7.45 | 13.12 | NA | NA |
| S-13 | 10/27/1993 | Well inaccessible | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| S-13 | 01/27/1994 | NA | NA | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| S-13 | 05/05/1994 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.16 | 6.91 | 13.25 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-13 | 07/26/1994 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 7.52 | 12.64 | NA | NA |
| S-13 | 10/28/1994 | 368 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 20.16 | 7.68 | 12.48 | NA | NA |
| S-13 | 01/02/1995 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.37 | 13.79 | NA | NA |
| S-13 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 5.81 | 14.35 | NA | NA |
| S-13 | 07/28/1995 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.73 | 13.43 | NA | NA |
| S-13 | 10/17/1995 | <50 | 1.0 | <0.5 | <0.5 | <0.5 | NA | NA | 20.16 | 6.94 | 13.22 | NA | NA |
| S-13 | 01/11/1996 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.20 | 13.96 | NA | NA |
| S-13 | 04/02/1996 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <2 | NA | 20.16 | 5.28 | 14.88 | NA | NA |
| S-13 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.35 | 13.81 | NA | NA |
| S-13 | 10/10/1996 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | 210 | 160 | 20.16 | 7.04 | 13.12 | NA | NA |
| S-13 | 01/09/1997 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 5.19 | 14.97 | NA | NA |
| S-13 | 04/08/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | 81 | NA | 20.16 | 6.62 | 13.54 | NA | NA |
| S-13 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.76 | 13.40 | NA | NA |
| S-13 | 10/08/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | 110 | NA | 20.16 | 7.05 | 13.11 | NA | NA |
| S-13 | 01/15/1998 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 5.27 | 14.89 | NA | NA |
| S-13 | 04/14/1998 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | 3.2 | NA | 20.16 | 5.24 | 14.92 | NA | NA |
| S-13 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 5.48 | 14.68 | NA | NA |
| S-13 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 7.08 | 13.08 | NA | NA |
| S-13 | 01/22/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 92.2 | NA | 20.16 | 6.65 | 13.51 | NA | NA |
| S-13 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 5.61 | 14.55 | NA | NA |
| S-13 | 07/23/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | NA | 20.16 | 6.78 | 13.38 | NA | NA |
| S-13 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 7.33 | 12.83 | NA | NA |
| S-13 | 01/03/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.16 | 7.51 | 12.65 | NA | NA |
| S-13 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.08 | 14.08 | NA | NA |
| S-13 | 07/12/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.16 | 6.50 | 13.66 | NA | NA |
| S-13 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.10 | 14.06 | NA | NA |
| S-13 | 01/03/2001 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 21.2 | 23.9 | 20.16 | 7.09 | 13.07 | NA | NA |
| S-13 | 04/24/2001 | Well inaccessible | | NA | NA | NA | NA | NA | 20.16 | NA | NA | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|-------------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------|-------------|--------------|-----------|----------|
| S-13 | 07/02/2001 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.16 | 7.13 | 13.03 | NA | NA |
| S-13 | 11/02/2001 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 7.38 | 12.78 | NA | NA |
| S-13 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | 5.9 | 20.16 | 6.02 | 14.14 | NA | NA |
| S-13 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 20.16 | 6.26 | 13.90 | NA | NA |
| S-13 | 07/11/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.16 | 7.00 | 13.16 | NA | NA |
| S-13 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 20.19 | 7.70 | 12.49 | NA | NA |
| S-13 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | 110 | 20.19 | 6.41 | 13.78 | NA | NA |
| S-13 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 20.19 | 6.12 | 14.07 | NA | NA |
| S-13 | 07/01/2003 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 20.19 | 7.65 | 12.54 | NA | 1.4 |
| S-13 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 20.19 | 7.32 | 12.87 | NA | NA |
| S-13 | 01/22/2004 | <250 | <2.5 | <2.5 | <2.5 | <5.0 | NA | NA | 20.19 | 6.60 | 13.59 | NA | NA |
| S-13 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 20.19 | 6.60 | 13.59 | NA | e |

| | | | | | | | | | | | | | |
|------|------------|-------|-----|-----|-----|-----|----|----|-------|------|-------|----|----|
| S-14 | 05/03/1989 | 5300 | 750 | 400 | 200 | 800 | NA | NA | 20.44 | NA | NA | NA | NA |
| S-14 | 08/10/1989 | 1800 | 540 | 140 | 42 | 50 | NA | NA | 20.44 | 7.58 | 12.86 | NA | NA |
| S-14 | 10/09/1989 | 1000 | 360 | 60 | 20 | 30 | NA | NA | 20.44 | 7.62 | 12.82 | NA | NA |
| S-14 | 01/25/1990 | 640 | 160 | 77 | 17 | 39 | NA | NA | 20.44 | 7.82 | 12.62 | NA | NA |
| S-14 | 04/18/1990 | 1200 | 200 | 110 | 30 | 96 | NA | NA | 20.44 | 7.37 | 13.07 | NA | NA |
| S-14 | 07/23/1990 | 5000 | 430 | 340 | 140 | 660 | NA | NA | 20.44 | 7.28 | 13.16 | NA | NA |
| S-14 | 10/18/1990 | 1800 | 770 | 13 | 17 | 120 | NA | NA | 20.44 | 8.10 | 12.34 | NA | NA |
| S-14 | 01/28/1991 | 720 | 200 | 36 | 21 | 78 | NA | NA | 20.44 | 8.04 | 12.40 | NA | NA |
| S-14 | 04/25/1991 | 14000 | 930 | 430 | 250 | 970 | NA | NA | 20.44 | 6.40 | 14.04 | NA | NA |
| S-14 | 07/09/1991 | 160 | 30 | 5.3 | 5 | 16 | NA | NA | 20.44 | 7.69 | 12.75 | NA | NA |
| S-14 | 10/08/1991 | 5400 | 81 | 57 | 95 | 380 | NA | NA | 20.44 | 8.24 | 12.20 | NA | NA |
| S-14 | 02/02/1992 | NA | NA | NA | NA | NA | NA | NA | 20.44 | 7.20 | 13.24 | NA | NA |
| S-14 | 04/28/1992 | 2000 | 270 | 140 | 48 | 170 | NA | NA | 20.44 | 9.75 | 10.69 | NA | NA |
| S-14 | 10/26/1992 | 920 | 33 | 12 | 25 | 88 | NA | NA | 20.44 | 8.32 | 12.12 | NA | NA |
| S-14 | 01/13/1993 | NA | NA | NA | NA | NA | NA | NA | 20.44 | 5.07 | 15.37 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|------|--------------|-------------------|-------|-------|-------|-------|-----|----|-------|------|-------|----|----|
| S-14 | 04/16/1993 | 4500 | 1100 | 29 | 91 | 170 | NA | NA | 20.44 | 5.86 | 14.58 | NA | NA |
| S-14 | 07/23/1993 | NA | NA | NA | NA | NA | NA | NA | 20.44 | 7.06 | 13.38 | NA | NA |
| S-14 | 10/27/1993 | Well inaccessible | | NA | NA | NA | NA | NA | 20.44 | NA | NA | NA | NA |
| S-14 | 01/27/1994 | NA | NA | NA | NA | NA | NA | NA | 20.44 | NA | NA | NA | NA |
| S-14 | 05/05/1994 | 810 | 250 | <2.5 | 9.4 | 19 | NA | NA | 19.99 | 6.48 | 13.51 | NA | NA |
| S-14 | 07/26/1994 | NA | NA | NA | NA | NA | NA | NA | 19.99 | 7.04 | 12.95 | NA | NA |
| S-14 | 10/28/1994 | 5385 | 290.6 | 85.8 | 49.7 | 186.2 | NA | NA | 19.99 | 7.07 | 12.92 | NA | NA |
| S-14 | 01/02/1995 | NA | NA | NA | NA | NA | NA | NA | 19.99 | 5.95 | 14.04 | NA | NA |
| S-14 | 04/14/1995 | 1600 | 40 | 4.7 | 11 | 20 | NA | NA | 19.99 | 5.22 | 14.77 | NA | NA |
| S-14 | 07/28/1995 | NA | NA | NA | NA | NA | NA | NA | 19.99 | 6.21 | 13.78 | NA | NA |
| S-14 | 10/17/1995 | 1200 | 37 | <0.5 | 7.8 | 11 | NA | NA | 19.99 | 6.30 | 13.69 | NA | NA |
| S-14 | 01/11/1996 | NA | NA | NA | NA | NA | NA | NA | 19.99 | 5.70 | 14.29 | NA | NA |
| S-14 | 07/21/1997 | 220 | 71 | 0.71 | 1.3 | 1.3 | 100 | NA | 19.99 | 6.14 | 13.85 | NA | NA |
| S-14 | 03/18/2002 d | NA | NA | NA | NA | NA | NA | NA | 20.01 | NA | NA | NA | NA |
| S-14 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | 55 | 20.01 | 6.20 | 13.81 | NA | NA |

| | | | | | | | | | | | | | |
|------|------------|-----|------|------|------|------|----|----|-------|------|-------|----|----|
| S-15 | 05/03/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 22.22 | NA | NA | NA | NA |
| S-15 | 08/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 22.22 | 8.48 | 13.74 | NA | NA |
| S-15 | 10/09/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 22.22 | 8.46 | 13.76 | NA | NA |
| S-15 | 01/25/1990 | <50 | <0.5 | <1 | <1 | <1 | NA | NA | 22.22 | 8.34 | 13.88 | NA | NA |
| S-15 | 04/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 22.22 | 8.45 | 13.77 | NA | NA |
| S-15 | 07/23/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 8.22 | 14.00 | NA | NA |
| S-15 | 10/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 9.11 | 13.11 | NA | NA |
| S-15 | 01/28/1991 | <50 | <0.5 | 0.6 | <0.5 | 0.8 | NA | NA | 22.22 | 9.13 | 13.09 | NA | NA |
| S-15 | 04/25/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 7.83 | 14.39 | NA | NA |
| S-15 | 07/09/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 8.93 | 13.29 | NA | NA |
| S-15 | 10/08/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 9.26 | 12.96 | NA | NA |
| S-15 | 02/05/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 8.60 | 13.62 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|--------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-15 | 04/28/1992 | 50 | 0.8 | 0.9 | <0.5 | 1.4 | NA | NA | 22.22 | 8.09 | 14.13 | NA | NA |
| S-15 | 07/27/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 8.83 | 13.39 | NA | NA |
| S-15 | 10/26/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 9.31 | 12.91 | NA | NA |
| S-15 | 01/14/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 22.22 | 6.64 | 15.58 | NA | NA |
| S-15 | 04/16/1993 | <50 | 0.6 | 1.0 | <0.5 | 0.7 | NA | NA | 22.22 | 7.14 | 15.08 | NA | NA |
| S-15 | 07/23/1993 | <50 | 1.2 | <0.5 | <0.5 | 1.6 | NA | NA | 22.22 | 8.23 | 13.99 | NA | NA |
| S-15 | 10/27/1993 | Well inaccessible | | NA | NA | NA | NA | NA | 22.22 | NA | NA | NA | NA |
| S-15 | 01/27/1994 | Well inaccessible | | NA | NA | NA | NA | NA | 22.22 | NA | NA | NA | NA |
| S-15 | 05/05/1994 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.42 | 7.57 | 13.85 | NA | NA |
| S-15 | 07/26/1994 | <50 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 21.42 | 8.16 | 13.26 | NA | NA |
| S-15 | 10/28/1994 | <50 | 0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 21.42 | 7.87 | 13.55 | NA | NA |
| S-15 | 01/02/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.42 | 7.02 | 14.40 | NA | NA |
| S-15 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 21.42 | 6.19 | 15.23 | NA | NA |
| S-15 | 07/28/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.42 | 6.72 | 14.70 | NA | NA |
| S-15 | 10/17/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.42 | 7.04 | 14.38 | NA | NA |
| S-15 | 01/11/1996 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <2 | NA | 21.42 | 6.40 | 15.02 | NA | NA |
| S-15 | 03/18/2002 d | NA | NA | NA | NA | NA | NA | NA | 21.47 | NA | NA | NA | NA |
| S-15 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 21.47 | 7.07 | 14.40 | NA | NA |
| S-16 | 05/04/1994 | 380 | 44 | 3.0 | 2.0 | <3 | NA | NA | 21.82 | NA | NA | NA | NA |
| S-16 | 08/10/1989 | <50 | 0.6 | <1 | <1 | <3 | NA | NA | 21.82 | 8.36 | 13.46 | NA | NA |
| S-16 | 10/10/1989 | <5 | <0.5 | <1 | <1 | <3 | NA | NA | 21.82 | 8.23 | 13.59 | NA | NA |
| S-16 | 01/25/1990 | 240 | 160 | 3.3 | 0.8 | 11 | NA | NA | 21.82 | 7.88 | 13.94 | NA | NA |
| S-16 | 04/18/1990 | <50 | 1.0 | <0.5 | <0.5 | <1 | NA | NA | 21.82 | 8.19 | 13.63 | NA | NA |
| S-16 | 07/23/1990 | <50 | 1.1 | <0.5 | <0.5 | <0.5 | NA | NA | 21.82 | 8.09 | 13.73 | NA | NA |
| S-16 | 10/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.82 | 8.90 | 12.92 | NA | NA |
| S-16 | 01/28/1991 | <50 | <0.5 | 0.6 | <0.5 | 0.9 | NA | NA | 21.82 | 8.55 | 13.27 | NA | NA |
| S-16 | 04/25/1991 | 60 | 21 | 0.5 | 3.2 | 4.8 | NA | NA | 21.82 | 7.48 | 14.34 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-16 | 07/09/1991 | <50 | 1.0 | <0.5 | <0.5 | <0.5 | NA | NA | 21.82 | 8.48 | 13.34 | NA | NA |
| S-16 | 10/08/1991 | 50 | 17 | 1.4 | 1.2 | 5.5 | NA | NA | 21.82 | 8.95 | 12.87 | NA | NA |
| S-16 | 02/05/1992 | 150 | 65 | 0.7 | <0.5 | 8.4 | NA | NA | 21.82 | 8.20 | 13.62 | NA | NA |
| S-16 | 04/28/1992 | <50 | 13 | <0.5 | <0.5 | <0.5 | NA | NA | 21.82 | 7.80 | 14.02 | NA | NA |
| S-16 | 07/27/1992 | 510 | 130 | <2.5 | <0.5 | 21 | NA | NA | 21.82 | 8.29 | 13.53 | NA | NA |
| S-16 | 10/26/1992 | <50 | <0.5 | <0.5 | <2.5 | <0.5 | NA | NA | 21.82 | 9.02 | 12.80 | NA | NA |
| S-16 | 01/13/1993 | 100 | 25 | 1.9 | <0.5 | 8.4 | NA | NA | 21.82 | 5.78 | 16.04 | NA | NA |
| S-16 | 04/16/1993 | 150 | 56 | 1.8 | 4.6 | 12 | NA | NA | 21.82 | 6.80 | 15.02 | NA | NA |
| S-16 | 07/23/1993 | <50 | 0.9 | <0.5 | <0.5 | <0.5 | NA | NA | 21.82 | 7.67 | 14.15 | NA | NA |
| S-16 | 10/27/1993 | <50 | 1.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.82 | 8.52 | 13.30 | NA | NA |
| S-16 | 01/27/1994 | 140 | 85 | <1 | <1 | 13 | NA | NA | 21.82 | 7.20 | 14.62 | NA | NA |
| S-16 | 05/05/1994 | 71 | 25 | <0.5 | <0.5 | 4.2 | NA | NA | 21.24 | 7.76 | 13.48 | NA | NA |
| S-16 | 07/26/1994 | <50 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 21.24 | 7.84 | 13.40 | NA | NA |
| S-16 | 10/28/1994 | <50 | 11.5 | <0.3 | <0.3 | 1.8 | NA | NA | 21.24 | 7.97 | 13.27 | NA | NA |
| S-16 | 01/02/1995 | 70 | 64 | <0.5 | <0.5 | 4.0 | NA | NA | 21.24 | 6.49 | 14.75 | NA | NA |
| S-16 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.08 | 15.16 | NA | NA |
| S-16 | 07/28/1995 | <50 | 1.7 | <0.5 | <0.5 | <0.5 | NA | NA | 21.24 | 7.00 | 14.24 | NA | NA |
| S-16 | 10/17/1995 | <50 | 4.6 | <0.5 | <0.5 | <0.5 | NA | NA | 21.24 | 7.15 | 14.09 | NA | NA |
| S-16 | 01/11/1996 | 80 | 17 | 0.7 | <0.5 | 2.9 | <2 | NA | 21.24 | 6.30 | 14.94 | NA | NA |
| S-16 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 5.84 | 15.40 | NA | NA |
| S-16 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.72 | 14.52 | NA | NA |
| S-16 | 10/10/1996 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.41 | 13.83 | NA | NA |
| S-16 | 01/09/1997 | 80 | 18 | <0.50 | 1.7 | 4.8 | <2.5 | NA | 21.24 | 5.60 | 15.64 | NA | NA |
| S-16 | 04/08/1997 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.34 | 13.90 | NA | NA |
| S-16 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.20 | 14.04 | NA | NA |
| S-16 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.34 | 13.90 | NA | NA |
| S-16 | 01/15/1998 | 650 | 160 | 2.7 | 8.7 | 62 | <12 | NA | 21.24 | 4.79 | 16.45 | NA | NA |
| S-16 | 04/14/1998 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 5.27 | 15.97 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|------|------------|-------------------|--------|--------|--------|--------|-------|------|-------|------|-------|----|----|
| S-16 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.32 | 14.92 | NA | NA |
| S-16 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.94 | 14.30 | NA | NA |
| S-16 | 01/22/1999 | Well inaccessible | | NA | NA | NA | NA | NA | 21.24 | NA | NA | NA | NA |
| S-16 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 5.80 | 15.44 | NA | NA |
| S-16 | 07/23/1999 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.62 | 14.62 | NA | NA |
| S-16 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.42 | 13.82 | NA | NA |
| S-16 | 01/03/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 21.24 | 7.34 | 13.90 | NA | NA |
| S-16 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.27 | 14.97 | NA | NA |
| S-16 | 07/12/2000 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.02 | 14.22 | NA | NA |
| S-16 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.79 | 14.45 | NA | NA |
| S-16 | 01/03/2001 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 3.05 | NA | 21.24 | 7.18 | 14.06 | NA | NA |
| S-16 | 04/24/2001 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.85 | 14.39 | NA | NA |
| S-16 | 07/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.51 | 13.73 | NA | NA |
| S-16 | 11/02/2001 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.68 | 13.56 | NA | NA |
| S-16 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 21.24 | 6.40 | 14.84 | NA | NA |
| S-16 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 6.33 | 14.91 | NA | NA |
| S-16 | 07/11/2002 | NA | NA | NA | NA | NA | NA | NA | 21.24 | 7.39 | 13.85 | NA | NA |
| S-16 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 21.30 | 8.00 | 13.30 | NA | NA |
| S-16 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 21.30 | 6.36 | 14.94 | NA | NA |
| S-16 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 21.30 | 6.03 | 15.27 | NA | NA |
| S-16 | 07/01/2003 | NA | NA | NA | NA | NA | NA | NA | 21.30 | 7.28 | 14.02 | NA | NA |
| S-16 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 21.30 | 7.77 | 13.53 | NA | NA |
| S-16 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | NA | 21.30 | 6.80 | 14.50 | NA | NA |
| S-16 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 21.30 | 7.94 | 13.36 | NA | NA |

| | | | | | | | | | | | | | |
|------|------------|-----|------|----|----|----|----|----|-------|------|-------|----|----|
| S-17 | 05/03/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 20.95 | NA | NA | NA | NA |
| S-17 | 08/10/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 20.95 | 8.13 | 12.82 | NA | NA |
| S-17 | 10/09/1989 | <50 | <0.5 | <1 | <1 | <3 | NA | NA | 20.95 | 8.18 | 12.77 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-17 | 01/25/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 20.95 | 7.60 | 13.35 | NA | NA |
| S-17 | 04/18/1990 | <50 | <0.5 | <0.5 | <0.5 | <1 | NA | NA | 20.95 | 7.95 | 13.00 | NA | NA |
| S-17 | 07/23/1990 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 7.87 | 13.08 | NA | NA |
| S-17 | 10/18/1990 | 390 | 10 | 62 | 22 | 110 | NA | NA | 20.95 | 8.71 | 12.24 | NA | NA |
| S-17 | 01/28/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 8.54 | 12.41 | NA | NA |
| S-17 | 04/25/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 7.15 | 13.80 | NA | NA |
| S-17 | 07/09/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 8.24 | 12.71 | NA | NA |
| S-17 | 10/08/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 8.86 | 12.09 | NA | NA |
| S-17 | 02/05/1992 | NA | NA | NA | NA | NA | NA | NA | 20.95 | 7.74 | 13.21 | NA | NA |
| S-17 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 7.41 | 13.54 | NA | NA |
| S-17 | 07/27/1992 | NA | NA | NA | NA | NA | NA | NA | 20.95 | 8.34 | 12.61 | NA | NA |
| S-17 | 10/26/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 8.87 | 12.08 | NA | NA |
| S-17 | 01/13/1993 | NA | NA | NA | NA | NA | NA | NA | 20.95 | 3.43 | 17.52 | NA | NA |
| S-17 | 04/16/1993 | 130 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 6.70 | 14.25 | NA | NA |
| S-17 | 07/23/1993 | NA | NA | NA | NA | NA | NA | NA | 20.95 | 7.53 | 13.42 | NA | NA |
| S-17 | 10/27/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.95 | 8.29 | 12.66 | NA | NA |
| S-17 | 01/27/1994 | NA | NA | NA | NA | NA | NA | NA | 20.95 | 5.78 | 15.17 | NA | NA |
| S-17 | 05/05/1994 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.45 | 6.99 | 13.46 | NA | NA |
| S-17 | 07/26/1994 | NA | NA | NA | NA | NA | NA | NA | 20.45 | 7.62 | 12.83 | NA | NA |
| S-17 | 10/28/1994 | <50 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 20.45 | 7.91 | 12.54 | NA | NA |
| S-17 | 01/02/1995 | NA | NA | NA | NA | NA | NA | NA | 20.45 | 6.33 | 14.12 | NA | NA |
| S-17 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 20.45 | 5.53 | 14.92 | NA | NA |
| S-17 | 07/28/1995 | NA | NA | NA | NA | NA | NA | NA | 20.45 | 6.75 | 13.70 | NA | NA |
| S-17 | 10/17/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.45 | 7.15 | 13.30 | NA | NA |
| S-17 | 01/11/1996 | NA | NA | NA | NA | NA | NA | NA | 20.45 | 6.37 | 14.08 | NA | NA |
| S-17 | 04/02/1996 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <2 | NA | 20.45 | 5.31 | 15.14 | NA | NA |
| S-17 | 07/09/1996 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 6.30 | 14.15 | NA | NA |
| S-17 | 10/10/1996 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 7.80 | 12.65 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|----------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-17 | 01/09/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 4.80 | 15.65 | NA | NA |
| S-17 | 04/08/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 6.83 | 13.62 | NA | NA |
| S-17 (D) | 04/08/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | NA | NA | NA | NA |
| S-17 | 07/21/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 6.78 | 13.67 | NA | NA |
| S-17 | 10/08/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 6.80 | 13.65 | NA | NA |
| S-17 | 01/15/1998 | 380 | <0.50 | <0.50 | <0.50 | 0.94 | <2.5 | NA | 20.45 | 2.91 | 17.54 | NA | NA |
| S-17 | 04/14/1998 | 160 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 4.47 | 15.98 | NA | NA |
| S-17 | 07/14/1998 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 6.45 | 14.00 | NA | NA |
| S-17 | 10/20/1998 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.45 | 7.11 | 13.34 | NA | NA |
| S-17 | 01/22/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.00 | NA | 20.45 | 6.01 | 14.44 | NA | NA |
| S-17 | 04/08/1999 | 145 | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | NA | 20.45 | 4.69 | 15.76 | NA | NA |
| S-17 | 07/23/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | NA | 20.45 | 6.60 | 13.85 | NA | NA |
| S-17 | 10/26/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.45 | 6.68 | 13.77 | NA | NA |
| S-17 | 01/03/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.45 | 7.20 | 13.25 | NA | NA |
| S-17 | 04/14/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.45 | 5.88 | 14.57 | NA | NA |
| S-17 | 07/12/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.45 | 6.45 | 14.00 | NA | NA |
| S-17 | 11/01/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.45 | 5.45 | 15.00 | NA | NA |
| S-17 | 01/03/2001 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.45 | 7.22 | 13.23 | NA | NA |
| S-17 | 04/24/2001 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <0.50 | 20.45 | 6.10 | 14.35 | NA | NA |
| S-17 | 07/02/2001 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.45 | 6.95 | 13.50 | NA | NA |
| S-17 | 11/02/2001 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.45 | 7.50 | 12.95 | NA | NA |
| S-17 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.45 | 5.76 | 14.69 | NA | NA |
| S-17 | 04/01/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.45 | 6.02 | 14.43 | NA | NA |
| S-17 | 07/11/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.45 | 6.97 | 13.48 | NA | NA |
| S-17 | 10/28/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <0.50 | 20.44 | 7.60 | 12.84 | NA | 0.9 |
| S-17 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.44 | 5.77 | 14.67 | NA | NA |
| S-17 | 04/30/2003 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <5.0 | 20.44 | 5.35 | 15.09 | NA | NA |
| S-17 | 07/01/2003 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 20.44 | 6.95 | 13.49 | NA | 1.1 |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-17 | 10/08/2003 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 20.44 | 7.01 | 13.43 | NA | NA |
| S-17 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | NA | 20.44 | 6.57 | 13.87 | NA | NA |
| S-17 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 20.36 f | 7.71 | 12.65 | NA | NA |
| S-18 | 05/31/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | NA | NA | NA | NA |
| S-18 | 07/09/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 8.23 | 12.80 | NA | NA |
| S-18 | 10/08/1991 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 8.84 | 12.19 | NA | NA |
| S-18 | 02/05/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 7.67 | 13.36 | NA | NA |
| S-18 | 04/28/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 7.40 | 13.63 | NA | NA |
| S-18 | 07/27/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 8.38 | 12.65 | NA | NA |
| S-18 | 10/26/1992 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 8.83 | 12.20 | NA | NA |
| S-18 | 01/13/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 5.86 | 15.17 | NA | NA |
| S-18 | 04/16/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 4.88 | 16.15 | NA | NA |
| S-18 | 07/23/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 7.56 | 13.47 | NA | NA |
| S-18 | 10/27/1993 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 8.30 | 12.73 | NA | NA |
| S-18 | 01/27/1994 | <50 | 1.9 | <0.5 | <0.5 | <0.5 | NA | NA | 21.03 | 6.84 | 14.19 | NA | NA |
| S-18 | 05/05/1994 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 7.05 | 13.52 | NA | NA |
| S-18 | 07/26/1994 | <500 | <3 | 1.1 | <0.3 | 1.8 | NA | NA | 20.57 | 7.62 | 12.95 | NA | NA |
| S-18 | 10/28/1994 | <50 | <0.3 | <0.3 | <0.3 | <0.6 | NA | NA | 20.57 | 8.01 | 12.56 | NA | NA |
| S-18 | 01/02/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 6.26 | 14.31 | NA | NA |
| S-18 | 04/14/1995 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 4.85 | 15.72 | NA | NA |
| S-18 | 07/28/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 5.80 | 14.77 | NA | NA |
| S-18 | 10/17/1995 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 20.57 | 7.22 | 13.35 | NA | NA |
| S-18 | 01/11/1996 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <2 | NA | 20.57 | 6.40 | 14.17 | NA | NA |
| S-18 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 4.80 | 15.77 | NA | NA |
| S-18 | 07/09/1996 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 5.74 | 14.83 | NA | NA |
| S-18 | 10/10/1996 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.06 | 14.51 | NA | NA |
| S-18 | 01/09/1997 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.57 | 4.70 | 15.87 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| S-18 | 04/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.62 | 13.95 | NA | NA |
| S-18 | 07/21/1997 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.94 | 13.63 | NA | NA |
| S-18 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.88 | 13.69 | NA | NA |
| S-18 | 01/15/1998 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.57 | 3.60 | 16.97 | NA | NA |
| S-18 | 04/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 4.28 | 16.29 | NA | NA |
| S-18 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.13 | 14.44 | NA | NA |
| S-18 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 7.20 | 13.37 | NA | NA |
| S-18 | 01/22/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.00 | NA | 20.57 | 6.00 | 14.57 | NA | NA |
| S-18 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 4.95 | 15.62 | NA | NA |
| S-18 | 07/23/1999 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.03 | 14.54 | NA | NA |
| S-18 | 10/26/1999 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 7.39 | 13.18 | NA | NA |
| S-18 | 01/03/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.57 | 7.54 | 13.03 | NA | NA |
| S-18 | 04/14/2000 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 4.41 | 16.16 | NA | NA |
| S-18 | 07/12/2000 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 5.31 | 15.26 | NA | NA |
| S-18 | 11/01/2000 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.42 | 14.15 | NA | NA |
| S-18 | 01/03/2001 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 3.67 | NA | 20.57 | 7.30 | 13.27 | NA | NA |
| S-18 | 04/24/2001 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.83 | 13.74 | NA | NA |
| S-18 | 07/02/2001 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 7.23 | 13.34 | NA | NA |
| S-18 | 11/02/2001 | Unable to locate | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| S-18 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.57 | 6.15 | 14.42 | NA | NA |
| S-18 | 04/01/2002 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.06 | 14.51 | NA | NA |
| S-18 | 07/11/2002 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.98 | 13.59 | NA | NA |
| S-18 | 10/28/2002 | NA | NA | NA | NA | NA | NA | NA | 20.63 | 7.66 | 12.97 | NA | NA |
| S-18 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.63 | 6.18 | 14.45 | NA | NA |
| S-18 | 04/30/2003 | NA | NA | NA | NA | NA | NA | NA | 20.63 | 5.32 | 15.31 | NA | NA |
| S-18 | 07/01/2003 | NA | NA | NA | NA | NA | NA | NA | 20.63 | 7.20 | 13.43 | NA | NA |
| S-18 | 10/08/2003 | NA | NA | NA | NA | NA | NA | NA | 20.63 | 7.48 | 13.15 | NA | NA |
| S-18 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | NA | 20.63 | 6.74 | 13.89 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|------|------------|----|----|----|----|----|----|----|-------|------|-------|----|----|
| S-18 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 20.63 | 7.87 | 12.76 | NA | NA |
|------|------------|----|----|----|----|----|----|----|-------|------|-------|----|----|

| | | | | | | | | | | | | | |
|------|------------|-------|--------|--------|--------|--------|-------|-------|-------|------|-------|----|-----|
| S-19 | 10/20/1998 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 20.11 | 6.41 | 13.70 | NA | NA |
| S-19 | 01/22/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 90.6 | NA | 20.11 | 5.42 | 14.69 | NA | NA |
| S-19 | 04/08/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | NA | 20.11 | 4.61 | 15.50 | NA | NA |
| S-19 | 07/23/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | NA | 20.11 | 5.86 | 14.25 | NA | NA |
| S-19 | 10/26/1999 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.11 | 6.28 | 13.83 | NA | NA |
| S-19 | 01/03/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.11 | 6.62 | 13.49 | NA | NA |
| S-19 | 04/14/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.11 | 4.31 | 15.80 | NA | NA |
| S-19 | 07/12/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.11 | 5.46 | 14.65 | NA | NA |
| S-19 | 11/01/2000 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 20.11 | 5.05 | 15.06 | NA | NA |
| S-19 | 01/03/2001 | <50.0 | <0.500 | <0.500 | <0.500 | <0.500 | 9.61 | NA | 20.11 | 6.00 | 14.11 | NA | NA |
| S-19 | 04/24/2001 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <0.50 | 20.11 | 5.58 | 14.53 | NA | NA |
| S-19 | 07/02/2001 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.11 | 6.34 | 13.77 | NA | 3.4 |
| S-19 | 11/02/2001 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.11 | 6.57 | 13.54 | NA | 3.4 |
| S-19 | 01/16/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.11 | 5.05 | 15.06 | NA | 0.5 |
| S-19 | 04/01/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.11 | 5.13 | 14.98 | NA | 3.3 |
| S-19 | 07/11/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.11 | 5.50 | 14.61 | NA | 0.5 |
| S-19 | 10/28/2002 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <0.50 | 20.10 | 6.35 | 13.75 | NA | 0.6 |
| S-19 | 01/23/2003 | <50 | <0.50 | <0.50 | <0.50 | <0.50 | NA | <5.0 | 20.10 | 5.15 | 14.95 | NA | 0.3 |
| S-19 | 04/30/2003 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <5.0 | 20.10 | 4.90 | 15.20 | NA | 0.5 |
| S-19 | 07/01/2003 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 20.10 | 5.50 | 14.60 | NA | 1.7 |
| S-19 | 10/08/2003 | 58 | <0.50 | <0.50 | <0.50 | <1.0 | NA | <0.50 | 20.10 | 6.63 | 13.47 | NA | 0.4 |
| S-19 | 01/22/2004 | <50 | <0.50 | <0.50 | <0.50 | <1.0 | NA | NA | 20.10 | 5.67 | 14.43 | NA | 0.6 |
| S-19 | 07/13/2004 | NA | NA | NA | NA | NA | NA | NA | 20.10 | 6.82 | 13.28 | NA | 1.0 |

| | | | | | | | | | | | | | |
|------|------------|------|------|-----|-----|------|----|----|-------|------|-------|----|----|
| SR-1 | 03/22/1989 | 5400 | 1100 | 230 | 350 | 1300 | NA | NA | 21.45 | NA | NA | NA | NA |
| SR-1 | 01/25/1990 | 2200 | 470 | 120 | 110 | 510 | NA | NA | 21.45 | 7.53 | 13.92 | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|----------|------------|-------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| SR-1 | 04/18/1990 | 1000 | 130 | 47 | 47 | 220 | NA | NA | 21.45 | 8.17 | 13.28 | NA | NA |
| SR-1 | 07/23/1990 | 3200 | 470 | 320 | 170 | 870 | NA | NA | 21.45 | 7.58 | 13.87 | NA | NA |
| SR-1 | 10/18/1990 | 1300 | 280 | 6.6 | 110 | 130 | NA | NA | 21.45 | 8.81 | 12.64 | NA | NA |
| SR-1 | 01/28/1991 | 110 | 120 | 12 | 51 | 110 | NA | NA | 21.45 | 8.37 | 13.08 | NA | NA |
| SR-1 | 04/25/1991 | NA | NA | NA | NA | NA | NA | NA | 21.45 | 6.91 | 14.54 | NA | NA |
| SR-1 | 07/09/1991 | 1400 | 200 | 27 | 130 | 340 | NA | NA | 21.45 | 8.11 | 13.34 | NA | NA |
| SR-1 | 10/08/1991 | 980 | 79 | 1.5 | 44 | 52 | NA | NA | 21.45 | 8.63 | 12.82 | NA | NA |
| SR-1 | 02/05/1991 | 3800 | 580 | 36 | 320 | 400 | NA | NA | 21.45 | 7.68 | 13.77 | NA | NA |
| SR-1 | 04/28/1992 | 38000 | 1800 | 460 | 1900 | 750 | NA | NA | 21.45 | 7.27 | 14.18 | NA | NA |
| SR-1 | 07/27/1992 | NA | NA | NA | NA | NA | NA | NA | 21.45 | 8.11 | 13.34 | 0.01 | NA |
| SR-1 | 10/26/1992 | 1800 | 370 | 10 | 130 | 130 | NA | NA | 21.45 | 8.63 | 12.82 | NA | NA |
| SR-1 | 01/13/1993 | 47000 | 1000 | 1100 | 1700 | 13000 | NA | NA | 21.45 | 5.46 | 15.99 | NA | NA |
| SR-1 | 04/16/1993 | 25000 | 1700 | 430 | 2400 | 8300 | NA | NA | 21.45 | 6.28 | 15.17 | NA | NA |
| SR-1 | 07/23/1993 | 33000 | 2400 | 2000 | 3800 | 14000 | NA | NA | 21.45 | 7.34 | 14.11 | NA | NA |
| SR-1 | 10/27/1993 | 2300 | 340 | <12.5 | 270 | 440 | NA | NA | 21.45 | 8.04 | 13.41 | NA | NA |
| SR-1 | 01/27/1994 | 36000 | 2000 | 1700 | 3000 | 11000 | NA | NA | 21.45 | 6.68 | 14.77 | NA | NA |
| SR-1 | 05/05/1994 | 43000 | 1500 | 130 | 2900 | 12000 | NA | NA | 20.57 | 6.81 | 13.76 | NA | NA |
| SR-1 | 07/26/1994 | 13600 | 682.7 | 39.2 | 996.6 | 2516 | NA | NA | 20.57 | 7.38 | 13.19 | NA | NA |
| SR-1 | 10/28/1994 | 8462 | 301.5 | 29.3 | 384.7 | 2019 | NA | NA | 20.57 | 7.48 | 13.09 | NA | NA |
| SR-1 | 01/02/1995 | 13000 | 400 | 120 | 2500 | 10000 | NA | NA | 20.57 | 6.34 | 14.23 | NA | NA |
| SR-1 | 04/14/1995 | 43000 | 690 | 370 | 2500 | 12000 | NA | NA | 20.57 | 5.29 | 15.28 | NA | NA |
| SR-1 | 07/28/1995 | 35000 | 760 | 120 | 2300 | 8100 | NA | NA | 20.57 | 6.36 | 14.21 | NA | NA |
| SR-1 | 10/17/1995 | 9700 | 310 | 12 | 610 | 1200 | NA | NA | 20.57 | 6.62 | 13.95 | NA | NA |
| SR-1 (D) | 10/17/1995 | 8300 | 230 | 9.6 | 680 | 840 | NA | NA | 20.57 | NA | NA | NA | NA |
| SR-1 | 01/11/1996 | 18000 | 410 | 170 | 1200 | 4400 | 42 | NA | 20.57 | 5.66 | 14.91 | NA | NA |
| SR-1 (D) | 01/11/1996 | 17000 | 420 | 180 | 1100 | 4000 | 42 | NA | 20.57 | NA | NA | NA | NA |
| SR-1 | 04/02/1996 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 5.14 | 15.43 | NA | NA |
| SR-1 | 07/09/1996 | Well inaccessible | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------------|---------------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
| SR-1 | 10/10/1996 | Well inaccessible | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| SR-1 | 01/09/1997 | Well inaccessible | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| SR-1 | 04/08/1997 | Well inaccessible | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| SR-1 | 07/21/1997 | Well inaccessible | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| SR-1 | 10/08/1997 | NA | NA | NA | NA | NA | NA | NA | 20.57 | 6.94 | 13.63 | NA | NA |
| SR-1 | 01/15/1998 | 8100 | 82 | <25 | 36 | 2300 | <125 | NA | 20.57 | 4.30 | 16.27 | NA | NA |
| SR-1 | 04/14/1998 | Well inaccessible | | NA | NA | NA | NA | NA | 20.57 | NA | NA | NA | NA |
| SR-1 | 07/14/1998 | NA | NA | NA | NA | NA | NA | NA | 20.28 | 6.48 | 13.80 | NA | NA |
| SR-1 | 10/20/1998 | NA | NA | NA | NA | NA | NA | NA | 20.28 | 6.61 | 13.67 | NA | NA |
| SR-1 | 01/22/1999 | Well inaccessible | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 04/08/1999 | NA | NA | NA | NA | NA | NA | NA | 20.28 | 0.97 | 19.31 | NA | NA |
| SR-1 | 07/23/1999 | Well dry | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 10/26/1999 | Well dry | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 04/14/2000 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 07/12/2000 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 11/01/2000 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 01/03/2001 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 04/24/2001 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 07/02/2001 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 11/02/2001 | Well dry | NA | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 01/16/2002 | Well dry | NA | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 04/01/2002 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 07/11/2002 | Obstruction in well | | NA | NA | NA | NA | NA | 20.28 | NA | NA | NA | NA |
| SR-1 | 10/28/2002 | Obstruction in well | | NA | NA | NA | NA | NA | 20.27 | NA | NA | NA | NA |
| SR-1 | 01/23/2003 | Obstruction in well | | NA | NA | NA+G627 | NA | NA | 20.27 | NA | NA | NA | NA |
| SR-1 | 04/30/2003 | Obstruction in well | | NA | NA | NA | NA | NA | 20.27 | NA | NA | NA | NA |
| SR-1 | 07/01/2003 | Obstruction in well | | NA | NA | NA | NA | NA | 20.27 | NA | NA | NA | NA |
| SR-1 | 10/08/2003 | Well dry | NA | NA | NA | NA | NA | NA | 20.27 | NA | NA | NA | NA |

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

| | | | | | | | | | | | | | |
|------|--------------|------|----|------|----|----|----|------|-------|------|-------|----|----|
| SV-1 | 04/15/1998 b | NA | NA | NA | NA | NA | NA | NA | NA | 6.02 | NA | NA | NA |
| SV-1 | 04/15/1998 c | NA | NA | NA | NA | NA | NA | NA | NA | 7.15 | NA | NA | NA |
| SV-1 | 03/18/2002 d | NA | NA | NA | NA | NA | NA | NA | 21.31 | NA | NA | NA | NA |
| SV-1 | 01/22/2004 | 3000 | 15 | <2.5 | 34 | 11 | NA | <2.5 | 21.31 | 6.67 | 14.64 | NA | NA |

Abbreviations:

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to April 24, 2001, analyzed by EPA Method 8015.

BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to April 24, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

TOC = Top of Casing Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ug/L = Parts per billion

MSL = Mean sea level

ppm = Parts per million

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

NA = Not applicable

WELL CONCENTRATIONS
Former Shell Service Station
15275 Washington Boulevard
San Leandro, CA

| Well ID | Date | TPPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | SPH Thickness (ft.) | DO Reading (ppm) |
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|
|---------|------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|---------------------------|------------------------|

Notes:

a = Chromatogram pattern indicated an unidentified hydrocarbon.

b = Pre-development sample

c = Post-development sample

d = Survey date only.

e = DO reading not taken.

f = TOC lowered 0.08 feet due to wellhead maintenance on June 3, 2004.

Site surveyed March 18, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.

Blaine Tech Services, Inc.

July 28, 2004

1680 Rogers Avenue
San Jose, CA 95112-1105
Attn.: Leon Gearhart
Project#: 040713-PC2
Project: 97093412
Site: 15275 Washington Avenue, San Leandro

Dear Mr. Gearhart,

Attached is our report for your samples received on 07/14/2004 15:38
This report has been reviewed and approved for release. Reproduction of this report
is permitted only in its entirety.

Please note that any unused portion of the samples will be discarded after
08/28/2004 unless you have requested otherwise.

We appreciate the opportunity to be of service to you. If you have any questions,
please call me at (925) 484-1919.

You can also contact me via email. My email address is: vvancil@stl-inc.com

Sincerely,



Vincent Vancil
Project Manager

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

Samples Reported

| Sample Name | Date Sampled | Matrix | Lab # |
|-------------|------------------|--------|-------|
| S-7 | 07/13/2004 10:55 | Water | 1 |
| S-8 | 07/13/2004 11:10 | Water | 2 |
| S-9 | 07/13/2004 11:30 | Water | 3 |

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

| | |
|---------------------------|-----------------------------|
| Prep(s): 5030B | Test(s): 8260B |
| Sample ID: S-7 | Lab ID: 2004-07-0434 - 1 |
| Sampled: 07/13/2004 10:55 | Extracted: 7/24/2004 02:10 |
| Matrix: Water | QC Batch#: 2004/07/23-4C.69 |

| Compound | Conc. | RL | Unit | Dilution | Analyzed | Flag |
|--------------------------------|-------|--------|------|----------|------------------|------|
| Gasoline | 150 | 50 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Benzene | ND | 0.50 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Toluene | ND | 0.50 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Ethylbenzene | ND | 0.50 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Total xylenes | ND | 1.0 | ug/L | 1.00 | 07/24/2004 02:10 | |
| tert-Butyl alcohol (TBA) | ND | 5.0 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Methyl tert-butyl ether (MTBE) | 17 | 0.50 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Di-isopropyl Ether (DIPE) | ND | 2.0 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Ethyl tert-butyl ether (ETBE) | ND | 2.0 | ug/L | 1.00 | 07/24/2004 02:10 | |
| tert-Amyl methyl ether (TAME) | ND | 2.0 | ug/L | 1.00 | 07/24/2004 02:10 | |
| Surrogate(s) | | | | | | |
| 1,2-Dichloroethane-d4 | 111.5 | 76-130 | % | 1.00 | 07/24/2004 02:10 | |
| Toluene-d8 | 108.5 | 78-115 | % | 1.00 | 07/24/2004 02:10 | |

Severn Trent Laboratories, Inc.

STL San Francisco * 1220 Quarry Lane, Pleasanton, CA 94566

Tel 925 484 1919 Fax 925 484 1096 * www.stl-inc.com * CA DHS ELAP# 2496

07/28/2004 16:50

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.
Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

| | | | |
|--|------------------|------------|------------------|
| Prep(s): | 5030B | Test(s): | 8260B |
| Sample ID: | S-8 | Lab ID: | 2004-07-0434 - 2 |
| Sampled: | 07/13/2004 11:10 | Extracted: | 7/24/2004 23:17 |
| Matrix: | Water | QC Batch#: | 2004/07/24-2B.64 |
| Analysis Flag: o (See Legend and Note Section) | | | |

| Compound | Conc. | RL | Unit | Dilution | Analyzed | Flag |
|--------------------------------|-------|--------|------|----------|------------------|------|
| Gasoline | 2000 | 100 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Benzene | 100 | 1.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Toluene | 1.7 | 1.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Ethylbenzene | 5.7 | 1.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Total xylenes | ND | 2.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| tert-Butyl alcohol (TBA) | ND | 10 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Methyl tert-butyl ether (MTBE) | ND | 1.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Di-isopropyl Ether (DIPE) | ND | 4.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Ethyl tert-butyl ether (ETBE) | ND | 4.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| tert-Amyl methyl ether (TAME) | ND | 4.0 | ug/L | 2.00 | 07/24/2004 23:17 | |
| Surrogate(s) | | | | | | |
| 1,2-Dichloroethane-d4 | 116.3 | 76-130 | % | 2.00 | 07/24/2004 23:17 | |
| Toluene-d8 | 99.9 | 78-115 | % | 2.00 | 07/24/2004 23:17 | |

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

| | |
|--|-----------------------------|
| Prep(s): 5030B | Test(s): 8260B |
| Sample ID: S-9 | Lab ID: 2004-07-0434 - 3 |
| Sampled: 07/13/2004 11:30 | Extracted: 7/24/2004 02:47 |
| Matrix: Water | QC Batch#: 2004/07/23-4C.69 |
| Analysis Flag: o (See Legend and Note Section) | |

| Compound | Conc. | RL | Unit | Dilution | Analyzed | Flag |
|--------------------------------|-------|--------|------|----------|------------------|------|
| Gasoline | 1900 | 100 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Benzene | 36 | 1.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Toluene | ND | 1.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Ethylbenzene | 2.0 | 1.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Total xylenes | ND | 2.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| tert-Butyl alcohol (TBA) | ND | 10 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Methyl tert-butyl ether (MTBE) | ND | 1.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Di-isopropyl Ether (DIPE) | ND | 4.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Ethyl tert-butyl ether (ETBE) | ND | 4.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| tert-Amyl methyl ether (TAME) | ND | 4.0 | ug/L | 2.00 | 07/24/2004 02:47 | |
| Surrogate(s) | | | | | | |
| 1,2-Dichloroethane-d4 | 122.8 | 76-130 | % | 2.00 | 07/24/2004 02:47 | |
| Toluene-d8 | 101.8 | 78-115 | % | 2.00 | 07/24/2004 02:47 | |

Severn Trent Laboratories, Inc.

STL San Francisco * 1220 Quarry Lane, Pleasanton, CA 94566

Tel 925 484 1919 Fax 925 484 1096 * www.stl-inc.com * CA DHS ELAP# 2496

07/28/2004 16:50

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

Batch QC Report

Prep(s): 5030B

Method Blank

MB: 2004/07/23-4C.69-057

Water

Test(s): 8260B

QC Batch # 2004/07/23-4C.69

Date Extracted: 07/23/2004 19:51

| Compound | Conc. | RL | Unit | Analyzed | Flag |
|--------------------------------|-------|--------|------|------------------|------|
| Gasoline | ND | 50 | ug/L | 07/23/2004 19:51 | |
| tert-Butyl alcohol (TBA) | ND | 5.0 | ug/L | 07/23/2004 19:51 | |
| Methyl tert-butyl ether (MTBE) | ND | 0.5 | ug/L | 07/23/2004 19:51 | |
| Di-isopropyl Ether (DIPE) | ND | 2.0 | ug/L | 07/23/2004 19:51 | |
| Ethyl tert-butyl ether (ETBE) | ND | 2.0 | ug/L | 07/23/2004 19:51 | |
| tert-Amyl methyl ether (TAME) | ND | 2.0 | ug/L | 07/23/2004 19:51 | |
| Benzene | ND | 0.5 | ug/L | 07/23/2004 19:51 | |
| Toluene | ND | 0.5 | ug/L | 07/23/2004 19:51 | |
| Ethylbenzene | ND | 0.5 | ug/L | 07/23/2004 19:51 | |
| Total xylenes | ND | 1.0 | ug/L | 07/23/2004 19:51 | |
| Surrogates(s) | | | | | |
| 1,2-Dichloroethane-d4 | 109.8 | 76-130 | % | 07/23/2004 19:51 | |
| Toluene-d8 | 102.4 | 78-115 | % | 07/23/2004 19:51 | |

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

Batch QC Report

Prep(s): 5030B

Method Blank

MB: 2004/07/24-2B.64-020

Water

Test(s): 8260B

QC Batch # 2004/07/24-2B.64

Date Extracted: 07/24/2004 18:20

| Compound | Conc. | RL | Unit | Analyzed | Flag |
|--------------------------------|-------|--------|------|------------------|------|
| Gasoline | ND | 50 | ug/L | 07/24/2004 18:20 | |
| tert-Butyl alcohol (TBA) | ND | 5.0 | ug/L | 07/24/2004 18:20 | |
| Methyl tert-butyl ether (MTBE) | ND | 0.5 | ug/L | 07/24/2004 18:20 | |
| Di-isopropyl Ether (DIPE) | ND | 2.0 | ug/L | 07/24/2004 18:20 | |
| Ethyl tert-butyl ether (ETBE) | ND | 2.0 | ug/L | 07/24/2004 18:20 | |
| tert-Amyl methyl ether (TAME) | ND | 2.0 | ug/L | 07/24/2004 18:20 | |
| Benzene | ND | 0.5 | ug/L | 07/24/2004 18:20 | |
| Toluene | ND | 0.5 | ug/L | 07/24/2004 18:20 | |
| Ethylbenzene | ND | 0.5 | ug/L | 07/24/2004 18:20 | |
| Total xylenes | ND | 1.0 | ug/L | 07/24/2004 18:20 | |
| Surrogates(s) | | | | | |
| 1,2-Dichloroethane-d4 | 101.6 | 76-130 | % | 07/24/2004 18:20 | |
| Toluene-d8 | 108.6 | 78-115 | % | 07/24/2004 18:20 | |

Severn Trent Laboratories, Inc.

STL San Francisco * 1220 Quarry Lane, Pleasanton, CA 94566

Tel 925 484 1919 Fax 925 484 1096 * www.stl-inc.com * CA DHS ELAP# 2496

07/28/2004 16:50

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

| Batch QC Report | | | | | | | | | | |
|--------------------------------|----------------------|------|-----------|-----------------------|-------|----------------|-----------------------------|------|-------|-----|
| Prep(s): 5030B | | | | | | Test(s): 8260B | | | | |
| Laboratory Control Spike | | | | Water | | | QC Batch # 2004/07/23-4C.69 | | | |
| LCS | 2004/07/23-4C.69-055 | | | Extracted: 07/23/2004 | | | Analyzed: 07/23/2004 18:55 | | | |
| LCSD | 2004/07/23-4C.69-056 | | | Extracted: 07/23/2004 | | | Analyzed: 07/23/2004 18:36 | | | |
| Compound | Conc. ug/L | | Exp.Conc. | Recovery % | | RPD | Ctrl.Limits % | | Flags | |
| | LCS | LCSD | | LCS | LCSD | | % | Rec. | RPD | LCS |
| Methyl tert-butyl ether (MTBE) | 28.2 | 31.7 | 25 | 112.8 | 126.8 | 11.7 | 65-165 | 20 | | |
| Benzene | 26.6 | 31.2 | 25 | 106.4 | 124.8 | 15.9 | 69-129 | 20 | | |
| Toluene | 23.0 | 27.8 | 25 | 92.0 | 111.2 | 18.9 | 70-130 | 20 | | |
| Surrogates(s) | | | | | | | | | | |
| 1,2-Dichloroethane-d4 | 506 | 488 | 500 | 101.2 | 97.6 | | 76-130 | | | |
| Toluene-d8 | 493 | 541 | 500 | 98.6 | 108.2 | | 78-115 | | | |

Severn Trent Laboratories, Inc.

STL San Francisco * 1220 Quarry Lane, Pleasanton, CA 94566

Tel 925 484 1919 Fax 925 484 1096 * www.stl-inc.com * CA DHS ELAP# 2496

07/28/2004 16:50

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue
San Jose, CA 95112-1105
Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2
97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

Batch QC Report

Prep(s): 5030B

Test(s): 8260B

Laboratory Control Spike

Water

QC Batch # 2004/07/24-2B.64

LCS 2004/07/24-2B.64-035

Extracted: 07/24/2004

Analyzed: 07/24/2004 17:35

LCSD 2004/07/24-2B.64-057

Extracted: 07/24/2004

Analyzed: 07/24/2004 17:57

| Compound | Conc. ug/L | | Exp.Conc. | Recovery % | | RPD | Ctrl.Limits % | | Flags | |
|--------------------------------|------------|------|-----------|------------|-------|-----|---------------|------|-------|-----|
| | LCS | LCSD | | LCS | LCSD | | % | Rec. | RPD | LCS |
| Methyl tert-butyl ether (MTBE) | 26.1 | 26.2 | 25 | 104.4 | 104.8 | 0.4 | 65-165 | 20 | | |
| Benzene | 22.6 | 24.5 | 25 | 90.4 | 98.0 | 8.1 | 69-129 | 20 | | |
| Toluene | 26.4 | 28.1 | 25 | 105.6 | 112.4 | 6.2 | 70-130 | 20 | | |
| Surrogates(s) | | | | | | | | | | |
| 1,2-Dichloroethane-d4 | 496 | 494 | 500 | 99.2 | 98.8 | | 76-130 | | | |
| Toluene-d8 | 531 | 551 | 500 | 106.2 | 110.2 | | 78-115 | | | |

Severn Trent Laboratories, Inc.

STL San Francisco * 1220 Quarry Lane, Pleasanton, CA 94566

Tel 925 484 1919 Fax 925 484 1096 * www.stl-inc.com * CA DHS ELAP# 2496

07/28/2004 16:50

Gas/BTEX Fuel Oxygenates by 8260B (C6-C12)

Blaine Tech Services, Inc.

Attn.: Leon Gearhart

1680 Rogers Avenue

San Jose, CA 95112-1105

Phone: (408) 573-0555 Fax: (408) 573-7771

Project: 040713-PC2

97093412

Received: 07/14/2004 15:38

Site: 15275 Washington Avenue, San Leandro

Legend and Notes

Analysis Flag

o

Reporting limits were raised due to high level of analyte present in the sample.

LAB: STL

SHELL Chain Of Custody Record

87796

Lab Identification (if necessary):

Address:

City, State, Zip:

Shell Project Manager to be invoiced:

- SCIENCE & ENGINEERING
- TECHNICAL SERVICES
- CRIME HOUSTON

Karen Petryna

2004-07-0434

INCIDENT NUMBER (S&E ONLY):

9 7 0 9 3 4 1 2

SAP or CRMT NUMBER (S/S/CRMT):

DATE: 7/13/04

PAGE: 1 of 1

| | | | | | |
|---|--|---|--|---|--|
| ANALYST COMPANY: Blaine Tech Services ADDRESS: 1680 Rogers Avenue, San Jose, CA 95112 (PROJECT CONTACT (Name, Title or PCF Asst.)): Leon Gearhart TELEPHONE: 408-573-0955 FAX: 408-573-7771 EMAIL: lgearhart@blainetech.com | | LABORATORY: BTSS OFFICE ADDRESS (Street and City): 15275 Washington Avenue, San Leandro (FOR DELIVERABLE TO (Designated Party or Organization)): Rose Thilne PHONE NO.: (850) 551-0112 EMAIL: rthilne@toxchem.com (ANALYST NUMBER (P/N)): P.107154 | | GLOBAL ID NO.: T0600101226 OPERATION PROJECT NO.: 040713-022 BTSS # | |
|---|--|---|--|---|--|

TURNAROUND TIME (BUSINESS DAYS):
 10 DAYS 5 DAYS 72 HOURS 48 HOURS 24 HOURS LESS THAN 24 HOURS

LA - RWACCB REPORT FORMAT LIST AGENCY:

GC/MS MTBE CONFIRMATION: HIGHEST _____ HIGHEST per BOPING _____ ALL _____

SPECIAL INSTRUCTIONS OR NOTES: _____ CHECK BOX IF EDD IS NOT NEEDED:

REQUESTED ANALYSIS

| LAB USE ONLY | Field Sample Identification | SAMPLING | | MATRIX | NO. OF CONT. | TPH - Gas, Purgeable | BTEX | MTBE (0.218 - 0.1ppb RL) | MTAE (0.560B - 0.3ppb RL) | Oxygenates (S) by (0.200B) | Ethanol (0.200B) | Methanol | 1,2-DCA (0.200B) | EDB (0.200B) | TPH - Diesel, Extractable (0.015M) | TEMPERATURE OR RECEIPT OF |
|--------------|-----------------------------|----------|------|--------|--------------|----------------------|------|--------------------------|---------------------------|----------------------------|------------------|----------|------------------|--------------|------------------------------------|---------------------------|
| | | DATE | TIME | | | | | | | | | | | | | |
| | S-7 | 7/13/04 | 1055 | W | 3 | 0 | K | K | | | | | | | | 5.0 |
| | S-8 | ↓ | 1110 | ↓ | 3 | K | K | K | | | | | | | | |
| | S-9 | ↓ | 1130 | ↓ | 3 | K | K | K | | | | | | | | |
| | _____ | ↓ | | ↓ | 5 | | | | | | | | | | | |

| | | | |
|---|--|-------------------------|----------------------|
| Requested by: (Signature) <u>WFW</u> | Received by: (Signature) <u>[Signature]</u> | Date: <u>7/14/04</u> | Time: <u>1538</u> |
| Requested by: (Signature) <u>[Signature]</u> | Received by: (Signature) <u>[Signature]</u> | Date: <u>7/14/04</u> | Time: <u>1810</u> |

WELL GAUGING DATA

Project # 640721-SS2 Date 7/21/04 Client 97093412

Site 15275 WASHINGTON AVE. SAN LEANDRO

| Well ID | Well Size (in.) | Sheen / Odor | Depth to Immiscible Liquid (ft.) | Thickness of Immiscible Liquid (ft.) | Volume of Immiscibles Removed (ml) | Depth to water (ft.) | Depth to well bottom (ft.) | Survey Point: TOB or TOC |
|--------------------------------|-----------------|--------------|----------------------------------|--------------------------------------|------------------------------------|----------------------|----------------------------|--------------------------|
| S-3 | 2 | | | | | 7.64 | 20.95 | ↓ |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| * REMOVE OIL prior to gauging. | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

SHELL WELL MONITORING DATA SHEET

| | |
|--|--|
| BTS #: <u>040721-552</u> | Site: <u>97093412</u> |
| Sampler: <u>500CH</u> | Date: <u>4/21/04</u> |
| Well I.D.: <u>5-3</u> | Well Diameter: <u>2</u> 4 6 8 |
| Total Well Depth (TD): <u>20.95</u> | Depth to Water (DTW): <u>7.64</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>PVC</u> Grade | D.O. Meter (if req'd): <u>YSI</u> HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|--|--|--|
| Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible | Water Peristaltic Extraction Pump Other _____ | Sampling Method: <u>Bailer</u> Disposable Bailer Extraction Port Dedicated Tubing Other: _____ |
|--|--|--|

| $\frac{\text{GPRB (Gals.)} \times \text{Specified Volumes}}{\text{I Case Volume}} = \text{Calculated Volume Gals.}$ | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table> | Well Diameter | Multiplier | Well Diameter | Multiplier | 1" | 0.04 | 4" | 0.65 | 2" | 0.16 | 6" | 1.47 | 3" | 0.37 | Other | radius ² * 0.163 |
|---|--|---------------|-----------------------------|---------------|------------|----|------|----|------|----|------|----|------|----|------|-------|-----------------------------|
| Well Diameter | Multiplier | Well Diameter | Multiplier | | | | | | | | | | | | | | |
| 1" | 0.04 | 4" | 0.65 | | | | | | | | | | | | | | |
| 2" | 0.16 | 6" | 1.47 | | | | | | | | | | | | | | |
| 3" | 0.37 | Other | radius ² * 0.163 | | | | | | | | | | | | | | |

| Time | Temp (°F) | pH | Cond. (mS or <u>µS</u>) | Turbidity (NTUs) | Gals. Removed | Observations |
|------|-----------|-----|--------------------------|------------------|---------------|--------------|
| 1020 | 73.1 | 7.0 | 1400 | 54 | — | Amber clear |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes ~~No~~ Gallons actually evacuated: _____

Sampling Date: 7/21/04 Sampling Time: 1020 Depth to Water: _____

Sample I.D.: 5-3 Laboratory: STE Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

| | | | |
|--------------------|----------------------------|-------------|------|
| D.O. (if req'd): | Pre-purge: <u>2.2</u> mg/L | Post-purge: | mg/L |
| O.R.P. (if req'd): | Pre-purge: mV | Post-purge: | mV |

WELL GAUGING DATA

Project # 040713-PCZ Date 7/13/04 Client Shell

Site 15275 Washington Blvd., San Leandro

| Well ID | Well Size (in.) | Sheen / Odor | Depth to Immiscible Liquid (ft.) | Thickness of Immiscible Liquid (ft.) | Volume of Immiscibles Removed (ml) | Depth to water (ft.) | Depth to well bottom (ft.) | Survey Point: TOB or <u>POB</u> | | |
|---------|-----------------|----------------------------------|----------------------------------|--------------------------------------|------------------------------------|--------------------------|----------------------------|---------------------------------|----------|--------|
| S-1 | 3 | | | | | 7.83 | 19.72 | | G.O. | |
| S-3 | 3 | WELL IN ACCESSIBLE - PARKED OVER | | | | | | | | DO ORC |
| S-5 | 4 | | | | | 8.17 | 18.03 | | G.O. | |
| S-7 | 3 | | | | | 7.88 | 23.81 | | | |
| S-8 | 3 | | | | | 7.41 | 23.40 | | | |
| S-9 | 3 | REPLACED ORC'S | | | | 8.51 | 17.60 | | DO ORC. | |
| S-10 | 3 | | | | | 7.49 | 12.65 | | G.O. | |
| S-13 | 3 | | | | | MISSED READING W | | | G.O. | |
| S-16 | 3 | | | | | 7.94 | 23.39 | | G.O. | |
| S-17 | 3 | | | | | 7.71 | 23.79 | | G.O. | |
| S-18 | 3 | | | | | 7.87 17.64 | 17.64 | | G.O. | |
| S-19 | 3 | D.O. → 1.0 mg/L | | | | 6.82 | 20.16 | | G.O. DO. | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

SHELL WELL MONITORING DATA SHEET

| | |
|--|--|
| BTS #: 040713-PCZ | Site: 15275 Washington Ave., San Leandro |
| Sampler: PC | Date: 7/13/04 |
| Well I.D.: 5-3 | Well Diameter: 2 (3) 4 6 8 |
| Total Well Depth (TD): | Depth to Water (DTW): |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: (PVC) Grade | D.O. Meter (if req'd): (SB) HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|--|--|---|
| Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible | Water: Peristaltic Extraction Pump Other: | Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing Other: |
|--|--|---|

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | 4" | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

(Gals.) X NO Purge = _____ Gals.
 Case Volume Specified Volumes Calculated Volume

| Time | Temp (°F) | pH | Cond. (mS or µS) | Turbidity (NTUs) | Gals. Removed | Observations |
|---------------------------------------|-----------|----|------------------|------------------|---------------|--------------|
| Well inaccessible - car parked on top | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated:

Sampling Date: 7/13/04 Sampling Time: Depth to Water:

Sample I.D.: 5-3 Laboratory: (SB) Other:

Analyzed for: (TPH-G) BTEX MTBE TPH-D Other:

EB I.D. (if applicable): @ _____ Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

| | | | | |
|--------------------|------------|------|-------------|------|
| D.O. (if req'd): | Pre-purge: | mg/L | Post-purge: | mg/L |
| O.R.P. (if req'd): | Pre-purge: | mV | Post-purge: | mV |

Blaine Tech Services, Inc. 1680 Rogers Ave., San Jose, CA 95112 (800) 545-7558

SHELL WELL MONITORING DATA SHEET

| | |
|--|---|
| BTS #: <u>040713-PC2</u> | Site: <u>725 Washington Ave., San Leandro</u> |
| Sampler: <u>PC</u> | Date: <u>7/13/04</u> |
| Well I.D.: <u>5-7</u> | Well Diameter: 2 <u>3</u> 4 6 8 _____ |
| Total Well Depth (TD): <u>2381</u> | Depth to Water (DTW): <u>7.88</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>PVC</u> Grade | D.O. Meter (if req'd): YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|--|--|--|
| Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible | Water: Peristaltic Extraction Pump Other: _____ | Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing Other: _____ |
|--|--|--|

| _____ (Gals.) X <u>No Purge</u> = _____ Gals. I Case Volume Specified Volumes Calculated Volume | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </table> | Well Diameter | Multiplier | Well Diameter | Multiplier | 1" | 0.04 | 4" | 0.65 | 2" | 0.16 | 6" | 1.47 | 3" | 0.37 | Other | radius ² * 0.163 |
|--|--|---------------|-----------------------------|---------------|------------|----|------|----|------|----|------|----|------|----|------|-------|-----------------------------|
| Well Diameter | Multiplier | Well Diameter | Multiplier | | | | | | | | | | | | | | |
| 1" | 0.04 | 4" | 0.65 | | | | | | | | | | | | | | |
| 2" | 0.16 | 6" | 1.47 | | | | | | | | | | | | | | |
| 3" | 0.37 | Other | radius ² * 0.163 | | | | | | | | | | | | | | |

| Time | Temp (°F) | pH | Cond. (mS or <u>µS</u>) | Turbidity (NTUs) | Gals. Removed | Observations |
|-------------|-------------|------------|--------------------------|------------------|---------------|--------------|
| <u>1055</u> | <u>68.2</u> | <u>6.7</u> | <u>1403</u> | <u>32</u> | - | <u>clear</u> |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | |
|--|--|
| Did well dewater? Yes No | Gallons actually evacuated: |
| Sampling Date: <u>7/13/04</u> | Sampling Time: <u>1055</u> Depth to Water: |
| Sample I.D.: <u>5-7</u> | Laboratory: <u>STD</u> Other: _____ |
| Analyzed for: TPH-G BTEX MTBE TPH-D Other: | |
| EB I.D. (if applicable): _____ @ _____ Time | Duplicate I.D. (if applicable): |
| Analyzed for: TPH-G BTEX MTBE TPH-D Other: | |
| D.O. (if req'd): Pre-purge: _____ mg/L | Post-purge: _____ mg/L |
| O.R.P. (if req'd): Pre-purge: _____ mV | Post-purge: _____ mV |

Blaine Tech Services, Inc. 1680 Rogers Ave., San Jose, CA 95112 (800) 545-7558

SHELL WELL MONITORING DATA SHEET

| | |
|--|--|
| BTS #: <u>040713-PC2</u> | Site: <u>15275 Washington, San Leandro</u> |
| Sampler: <u>PC</u> | Date: <u>7/13/04</u> |
| Well I.D.: <u>S-B</u> | Well Diameter: 2 <u>3</u> 4 6 8 |
| Total Well Depth (TD): <u>23.90</u> | Depth to Water (DTW): <u>7.41</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>EVE</u> Grade | D.O. Meter (if req'd): YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|--|--|---|
| Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible | Water: Peristaltic Extraction Pump Other _____ | Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing Other: _____ |
|--|--|---|

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | 4" | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

(Gals.) X No Purge = _____ Gals.
 Case Volume Specified Volumes Calculated Volume

| Time | Temp (°F) | pH | Cond. (mS or <u>µS</u>) | Turbidity (NTUs) | Gals. Removed | Observations |
|-------------|-------------|------------|--------------------------|------------------|---------------|---------------|
| <u>1110</u> | <u>70.6</u> | <u>6.8</u> | <u>1000</u> | <u>29</u> | - | <u>flakes</u> |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated: _____

Sampling Date: 7/13/04 Sampling Time: 1110 Depth to Water: _____

Sample I.D.: S-B Laboratory: STL Other: _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

EB I.D. (if applicable): _____ @ _____ Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

| | | | |
|-------------------------------|------|-------------|------|
| D.O. (if req'd): Pre-purge: | mg/L | Post-purge: | mg/L |
| O.R.P. (if req'd): Pre-purge: | mV | Post-purge: | mV |

Blaine Tech Services, Inc. 1680 Rogers Ave., San Jose, CA 95112 (800) 545-7558

SHELL WELL MONITORING DATA SHEET

| | |
|--|---|
| BTS #: <u>04072-PC2</u> | Site: <u>15275 Washington Blvd, San Jose, CA</u> |
| Sampler: <u>PC</u> | Date: <u>7/13/04</u> |
| Well I.D.: <u>5.9</u> | Well Diameter: 2 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/> |
| Total Well Depth (TD): <u>17.60</u> | Depth to Water (DTW): <u>8.51</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <input checked="" type="radio"/> PVC Grade | D.O. Meter (if req'd): <input checked="" type="radio"/> YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|--|--|---|
| Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible | Water: Peristaltic Extraction Pump Other: _____ | Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing Other: _____ |
|--|--|---|

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | 4" | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

_____ (Gals.) X No Purge = _____ Gals.
 1 Case Volume Specified Volumes Calculated Volume

| Time | Temp (°F) | pH | Cond. (mS or μ S) | Turbidity (NTUs) | Gals. Removed | Observations |
|-------------|-------------|------------|-----------------------|------------------|---------------|--------------|
| <u>1130</u> | <u>71.6</u> | <u>7.1</u> | <u>1260</u> | <u>49</u> | - | <u>clear</u> |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated:

Sampling Date: 7/13/04 Sampling Time: 1130 Depth to Water:

Sample I.D.: S-9 Laboratory: ST Other: _____

Analyzed for: ~~TPH-G~~ ~~BTEX~~ ~~MTBE~~ TPH-D Other:

EB I.D. (if applicable): _____ @ _____ time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

| | | | |
|--------------------|--|-------------|---------------------|
| D.O. (if req'd): | Pre-purge: <u>17.1</u> ^{mg/L} | Post-purge: | |
| O.R.P. (if req'd): | Pre-purge: _____ ^{mV} | Post-purge: | _____ ^{mV} |

Blaine Tech Services, Inc. 1680 Rogers Ave., San Jose, CA 95112 (800) 545-7558