



**ENVIRONMENTAL
ENGINEERING & CONTRACTING, INC.**

501 Parkcenter Drive, Santa Ana, CA 92705
Phone (714) 667-2300 Fax (714) 667-2310

10446

Alameda County
APR 09 2004
Environmental Health

Barney Chan
Alameda County Environmental Health
1131 Harbor Bay Parkway
Alameda, California 94502-6577

Mr. Chan

Please find enclosed the well completion reports for the six (6) wells destroyed at 330 Chestnut Street in Oakland California. If you have any question please feel free to contact me at (714) 667-2300 or dbernier@eecworld.com.

Sincerely,
Environmental Engineering and Contracting, Inc.

David Bernier
Senior Staff Geologist

Enclosed: Well Completion Reports (6)

cc: James Yoo (Alameda County Public Works Agency)
Sam Niemann (Aramark Uniform and Career Apparel, Inc.)

CONFIDENTIAL

STATE OF CALIFORNIA DWR
WELL COMPLETION REPORT
(WELL LOGS)

REMOVED



ALAMEDA COUNTY PUBLIC WORKS AGENCY

WATER RESOURCES SECTION
399 KLMHERST ST. HAYWARD CA. 94544-1395
PHONE (510) 670-6615 James Von
FAX (510) 762-1939

APPLICANTS: PLEASE ATTACH A SITE MAP FOR ALL DRILLING PERMIT APPLICATIONS
DESTRUCTION OF WELLS OVER 45 FEET REQUIRES A SEPARATE PERMIT APPLICATION

DRILLING PERMIT APPLICATION

FOR APPLICANT TO COMPLETE

FOR OFFICE USE

LOCATION OF PROJECT
330 Chestnut Street
Oakland, CA 94607

PERMIT NUMBER WOA-0132
WELL NUMBER _____
APN _____

CLIENT
Name Aramark Uniforms Career Apparel, Inc.
Address 2300 Warmville Rd Phone _____
City Danville, CA Zip 94515

APPLICANT
Name Environmental Engineering Contracting
Address 501 Baker St Phone (714) 667-2310
City San Jose Zip 95128

TYPE OF PROJECT
Well Construction Geotechnical Investigation
Cathodic Protection General
Water Supply Contamination
Monitoring Well Destruction

PROPOSED WATER SUPPLY WELL USE
New Domestic Replacement Domestic
Municipal Irrigation
Industrial Other _____

DRILLING METHOD
Mud Rotary Air Rotary Auger
Cable Other

DRILLER'S NAME Gregg Drilling
DRILLER'S LICENSE NO. CS7-485165

WELL PROJECTS
Drill Hole Diameter 8 in. Maximum Depth 27 ft.
Casing Diameter 7 in. Owner's Well Number RAO-2
Surface Seal Depth 4 ft.

GEOTECHNICAL PROJECTS
Number of Borings _____ Maximum Depth _____ ft.
Hole Diameter _____ in.

STARTING DATE 2/16/04
COMPLETION DATE 2/16/04

I hereby agree to comply with the requirements of the provisions of Alameda County Ordinance No. 73-68
APPLICANT'S SIGNATURE David Bernier DATE 2/19/04
PLEASE PRINT NAME David Bernier

- PERMIT CONDITIONS
Circled Permit Requirements Apply
- A. GENERAL**
 1. A permit application should be submitted so as to arrive at the ACPWA office five days prior to proposed starting date.
 2. Submit to ACPWA within 60 days after completion of permitted original Department of Water Resources-Well Completion Report.
 3. Permit is void if project not begun within 90 days of approval date.
 - D. WATER SUPPLY WELLS**
 1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
 2. Minimum seal depth is 30 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved.
 - C. GROUNDWATER MONITORING WELLS INCLUDING PIEZOMETERS**
 1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
 2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.
 - D. GEOTECHNICAL**
Excavate bore hole by tremie with cement grout or cement grout/sand mixture. Upper two-three feet replaced in kind or with compacted cuttings.
 - E. CATHODIC**
Fill hole anode zone with concrete placed by tremie.
 - F. WELL DESTRUCTION** PG #1
Send a map of work site. A separate permit is required for wells deeper than 45 feet.
 - G. SPECIAL CONDITIONS**

NOTE: One application must be submitted for each well or well destruction. Multiple borings on one application are acceptable for geotechnical and contamination investigations.

APPROVED _____ DATE 2/19/04



LOG OF TEST BORING

F-203 (R 01-87)


BORING NO. RA02
 SHEET NO. 1 OF 1
 PROJECT NO. 1622.01
 INSTALLATION 6/8/89
 SURFACE ELEV. _____
 BOREHOLE DIA. 8 IN.

PROJECT NAME ARATEX - OAKLAND
 LOCATION 3RD & CHESTNUT ST. OAKLAND, CA
 CONTRACTOR ANDERSON GEOTECH.
 DRILLING METHOD HSA

SAMPLING NOTES					VISUAL CLASSIFICATION AND GENERAL OBSERVATIONS	GENERAL WELL CONSTRUCT.
INTERVAL NO.	TYPE	RECOVERY N	MOISTURE IN	DEPTH		
					Organic (peat) FILL material, dusky brown.	
5	SS	57	12	5	Fine to medium SAND, moderate yellowish brown, some fine gravel (5mm).	
10	SS	58	12	10	Same as above, but with some clay. Clayey SAND, moderate brown, some iron stain.	
15	SS	36	12	15		
20	SS	100	10	20	Above grades to CLAY and SAND, grayish, stiff.	
				25	Same as above.	
					EOB at 27 ft.	
				30		
				35		

GENERAL NOTES
 DATE STARTED 7 JUN 89
 DATE COMPLETED 7 JUN 89
 RIG MOBILE B-34
 CREW CHIEF SWARTOUT
 LOGGED LYVERSE CHECKED _____

WATER LEVEL OBSERVATIONS
 WHILE DRILLING 9.0 FT.
 AT COMPLETION 8.1 FT.
 AFTER DRILLING _____
 CAVE-IN: DATE/TIME _____ DEPTH _____
 WATER: DATE/TIME 6/8/89 07:45 DEPTH 8.00 FT.

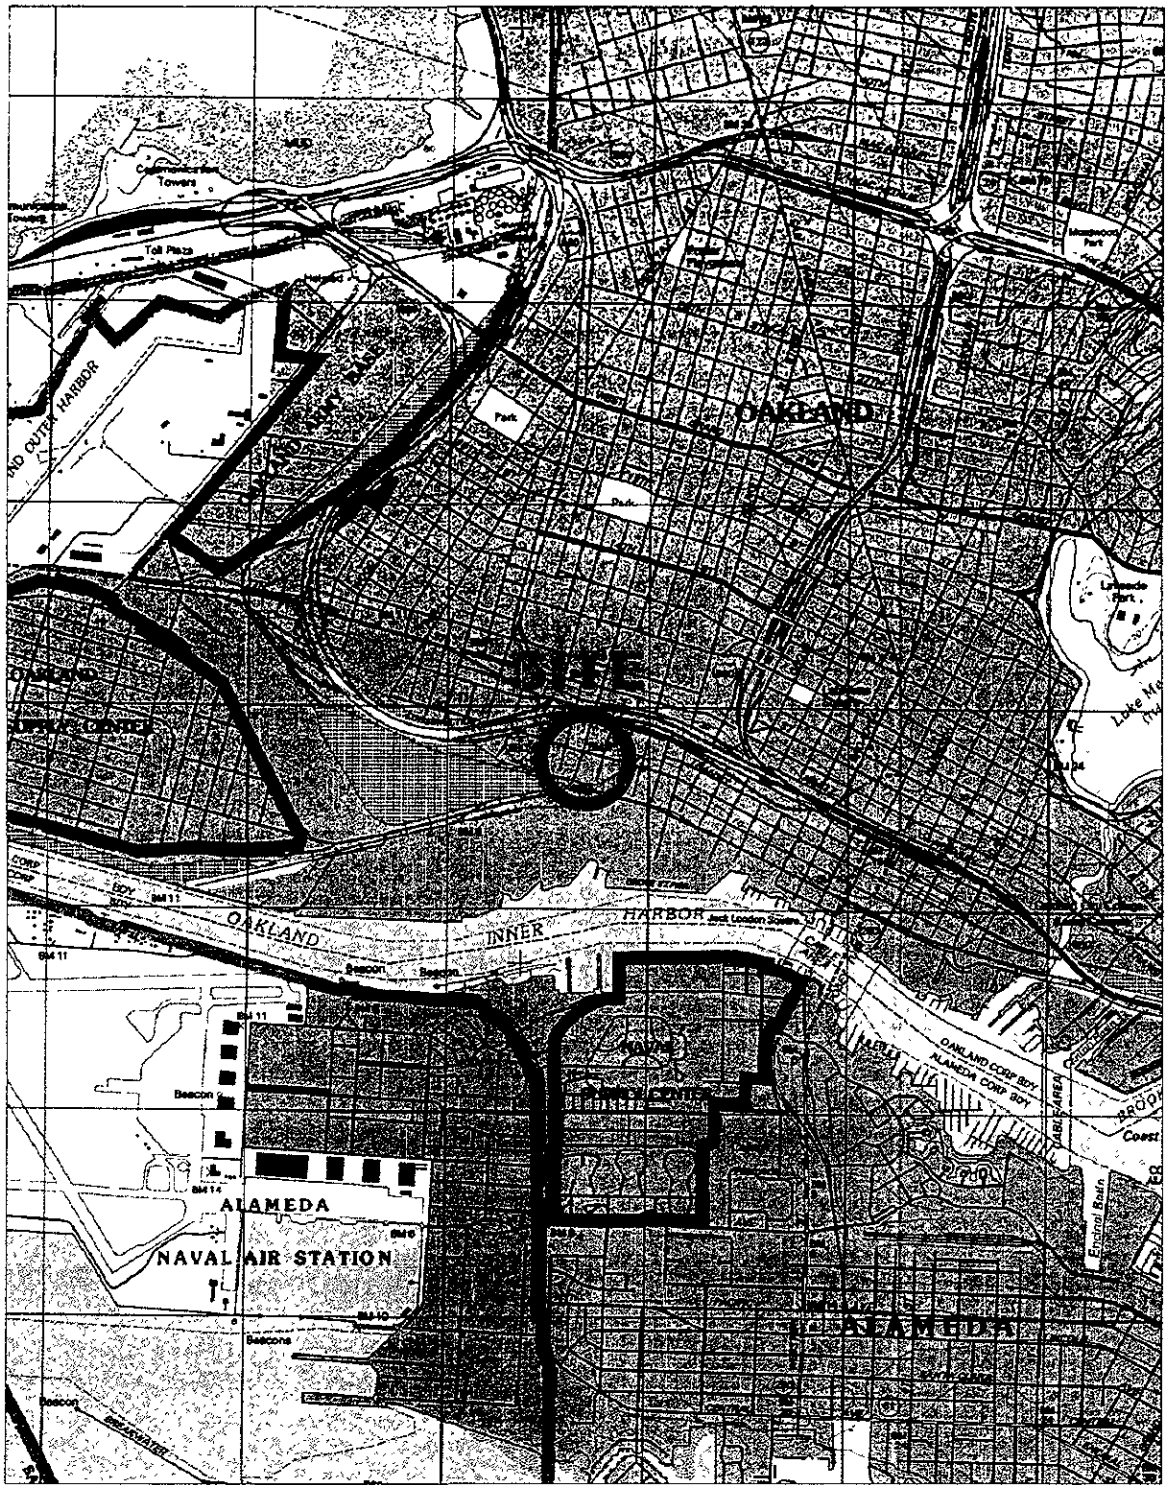

0 2000 4000 FEET
SCALE




ENVIRONMENTAL
ENGINEERING ASSOCIATES, INC.

Map Source U S G S 7 5' Map Series
topographic quadrangle map
Oakland West-1943
photorevised 1993



SITE LOCATION MAP

Aramark Uniform Services
330 Chestnut Street
Oakland, California

File S1494001	Date 3/25/04	PM DB	R G / P E MTZ	PROJECT NO S1494-1	FIGURE 1
------------------	-----------------	----------	------------------	-----------------------	--------------------

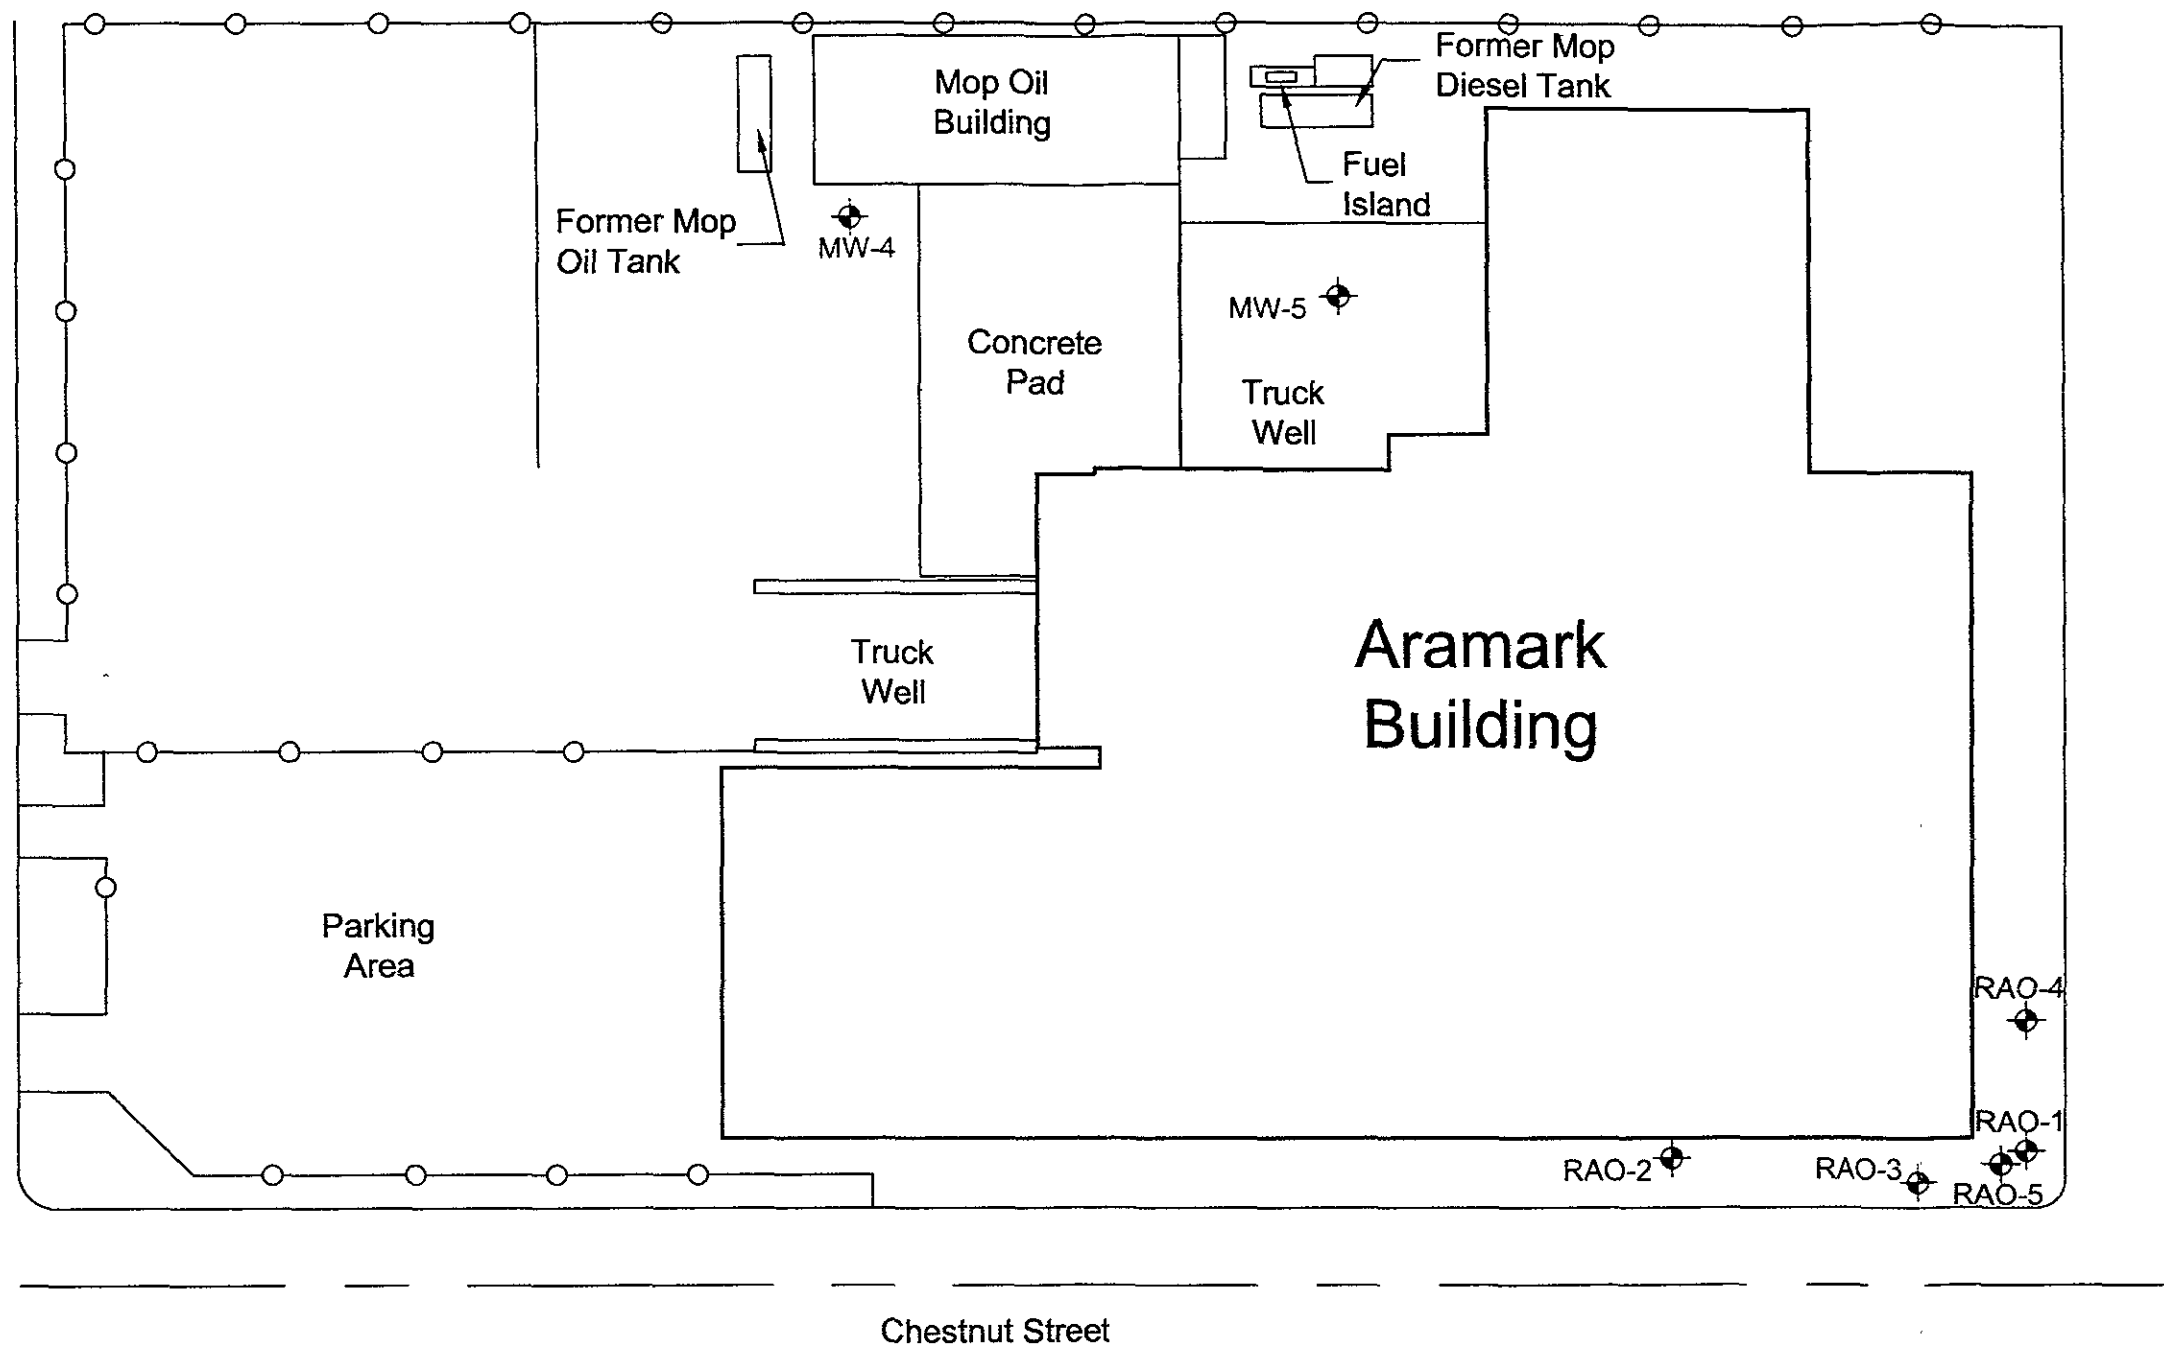

Legend

-  MW-4 Former Monitoring Well Location
-  Chain-Link Fence

Monitoring Well Location Map

Aramark Uniform Services
 330 Chestnut Street
 Oakland California


Project Number
 S1494 01

Date
 March 22, 2004

Figure

2

File: S1494002	PM DB	PE/RG MZ
-------------------	----------	-------------




SOURCE RMT

CONFIDENTIAL

STATE OF CALIFORNIA DWR
WELL COMPLETION REPORT
(WELL LOGS)

REMOVED



ALAMEDA COUNTY PUBLIC WORKS AGENCY

WATER RESOURCES SECTION
390 BLMHURST ST. RAYWARD CA. 94544-1305
PHONE (510) 670-6633 James You
FAX (510) 782-1959

APPLICANTS: PLEASE ATTACH A SITE MAP FOR ALL DRILLING PERMIT APPLICATIONS
DESTRUCTION OF WELLS OVER 45 FEET REQUIRES A SEPARATE PERMIT APPLICATION

DRILLING PERMIT APPLICATION

FOR APPLICANT TO COMPLETE

FOR OFFICE USE

LOCATION OF PROJECT
330 Chestnut Street
Oakland, CA 94607

PERMIT NUMBER 1V04-0133
WELL NUMBER _____
APN _____

CLIENT
Name Aramark Uniform + Career Apparel, Inc.
Address 2300 Wackerly Blvd Phone _____
City Duane's Green, Illinois Zip 60515

APPLICANT
Name Environmental Engineering & Contracting
Address 501 R. Locant v Dr Phone (916) 652-2310
City Sacramento, CA Zip 95805

TYPE OF PROJECT
Well Construction Geotechnical Investigation
Cathodic Protection General
Water Supply Contamination
Monitoring Well Destruction

PROPOSED WATER SUPPLY WELL USE
New Domestic Replacement Domestic
Municipal Irrigation
Industrial Other _____

DRILLING METHOD:
Mud Rotary Air Rotary Auger
Cable Other

DRILLER'S NAME Gregg Drilling
DRILLER'S LICENSE NO. C57-485165

WELL PROJECTS
Drill Hole Diameter 8 in. Maximum _____
Casing Diameter 6 in. Depth 24 ft
Surface Seal Depth 4 ft. Owner's Well Number RAQ-3

GEOTECHNICAL PROJECTS
Number of Borings _____ Maximum _____
Bore Diameter _____ in. Depth _____

STARTING DATE 2/16/04
COMPLETION DATE 2/16/04

I hereby agree to comply with all requirements of this permit and Alameda County Ordinance No. 73.04
APPLICANT'S SIGNATURE David Bernice DATE 2/9/04
PLEASE PRINT NAME David Bernice REV 9-14-02

PERMIT CONDITIONS

Circled Permit Requirements Apply

- GENERAL**
1. A permit application should be submitted so as to arrive at the ACPWA office five days prior to proposed starting date.
 2. Submit to ACPWA within 60 days after completion of permitted original Department of Water Resources Well Completion Report.
 3. Permit is void if project not begun within 90 days of approval date.

- B. WATER SUPPLY WELLS**
1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
 2. Minimum seal depth is 30 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved.

- C. GROUNDWATER MONITORING WELLS INCLUDING PIEZOMETERS**
1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
 2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.

- D. GEOTECHNICAL**
- Backfill bore hole by tremie with cement grout or cement grout and rubble. Upper two-thirds part replaced in kind or with compacted cuttings.

- E. CATHODIC**
- Fill hole anode zone with concrete placed by tremie.

- F. WELL DESTRUCTION - P6-A-7**
- Send a map of work site. A separate permit is required for wells deeper than 45 feet.

G. SPECIAL CONDITIONS

NOTE: One application must be submitted for each well at well construction. Multiple borings on one application are acceptable for geotechnical and contamination investigation.

APPROVED _____ DATE _____



LOG OF TEST BORING

F-203 (R 01-87)

BORING NO. RA03

SHEET NO. 1 OF 1

PROJECT NAME ARATEX - OAKLAND

PROJECT NO. 1622.01

LOCATION 3RD & CHESTNUT ST. OAKLAND, CA

INSTALLATION 6/8/89

CONTRACTOR ANDERSON GEOTECH.

SURFACE ELEV. _____

DRILLING METHOD HSA

BOREHOLE DIA. 8 IN.

SAMPLING NOTES					VISUAL CLASSIFICATION AND GENERAL OBSERVATIONS	GENERAL WELL CONSTRUCT.
INTERVAL		RECOVERY		MOISTURE		
NO.	TYPE	N	IN	DEPTH		
					FILL material (tank pit). Medium to coarse SAND, brownish to black, little gravel.	
8	SS	67	10	10	Estimated bottom of tank pit (change in auger rotation). Clayey SAND, gray, hydrocarbon odor and staining.	
15	SS	35	8	15	Same as above, but pale yellowish brown, less clay than above.	
20	SS	42	5	20	Medium Clayey SAND, dark yellowish brown, some organic streaks, soft.	
				25	Boring terminated at 24.0 ft.	
				30		
				35		

GENERAL NOTES

DATE STARTED 8 JUN 89

DATE COMPLETED 8 JUN 89

RIG MOBILE B-34

CREW CHIEF SWARTOUT

LOGGED LYVERSE CHECKED _____

WATER LEVEL OBSERVATIONS


WHILE DRILLING 10.0 FT.

AT COMPLETION _____

AFTER DRILLING _____

CAVE-IN: DATE/TIME _____ DEPTH _____

WATER: DATE/TIME 6/8/89 12:20 DEPTH 8.35 FT.

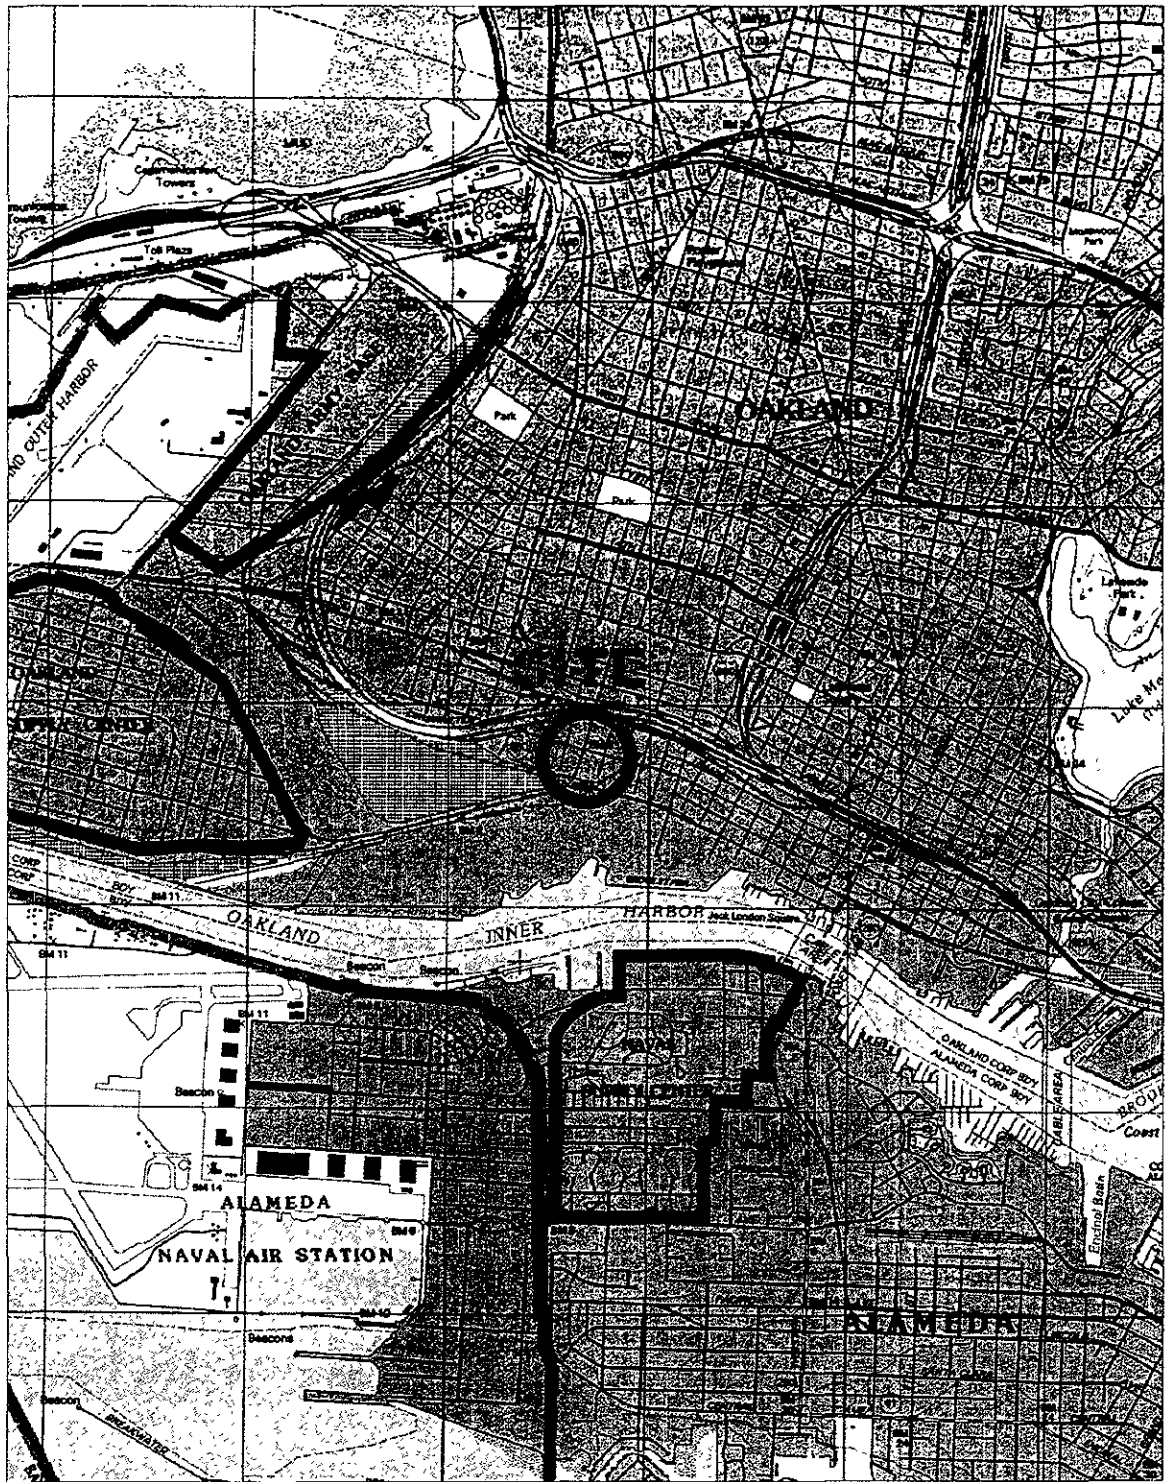

0 2000 4000 FEET
SCALE


SITE LOCATION MAP

Aramark Uniform Services
330 Chestnut Street
Oakland, California



Map Source U.S.G.S 7.5' Map Series
topographic quadrangle map
Oakland West-1943
photorevised 1993

File.	Date	PM	R/G/P/E	PROJECT NO	FIGURE.
S1494001	3/25/04	DB	MTZ	S1494-1	1

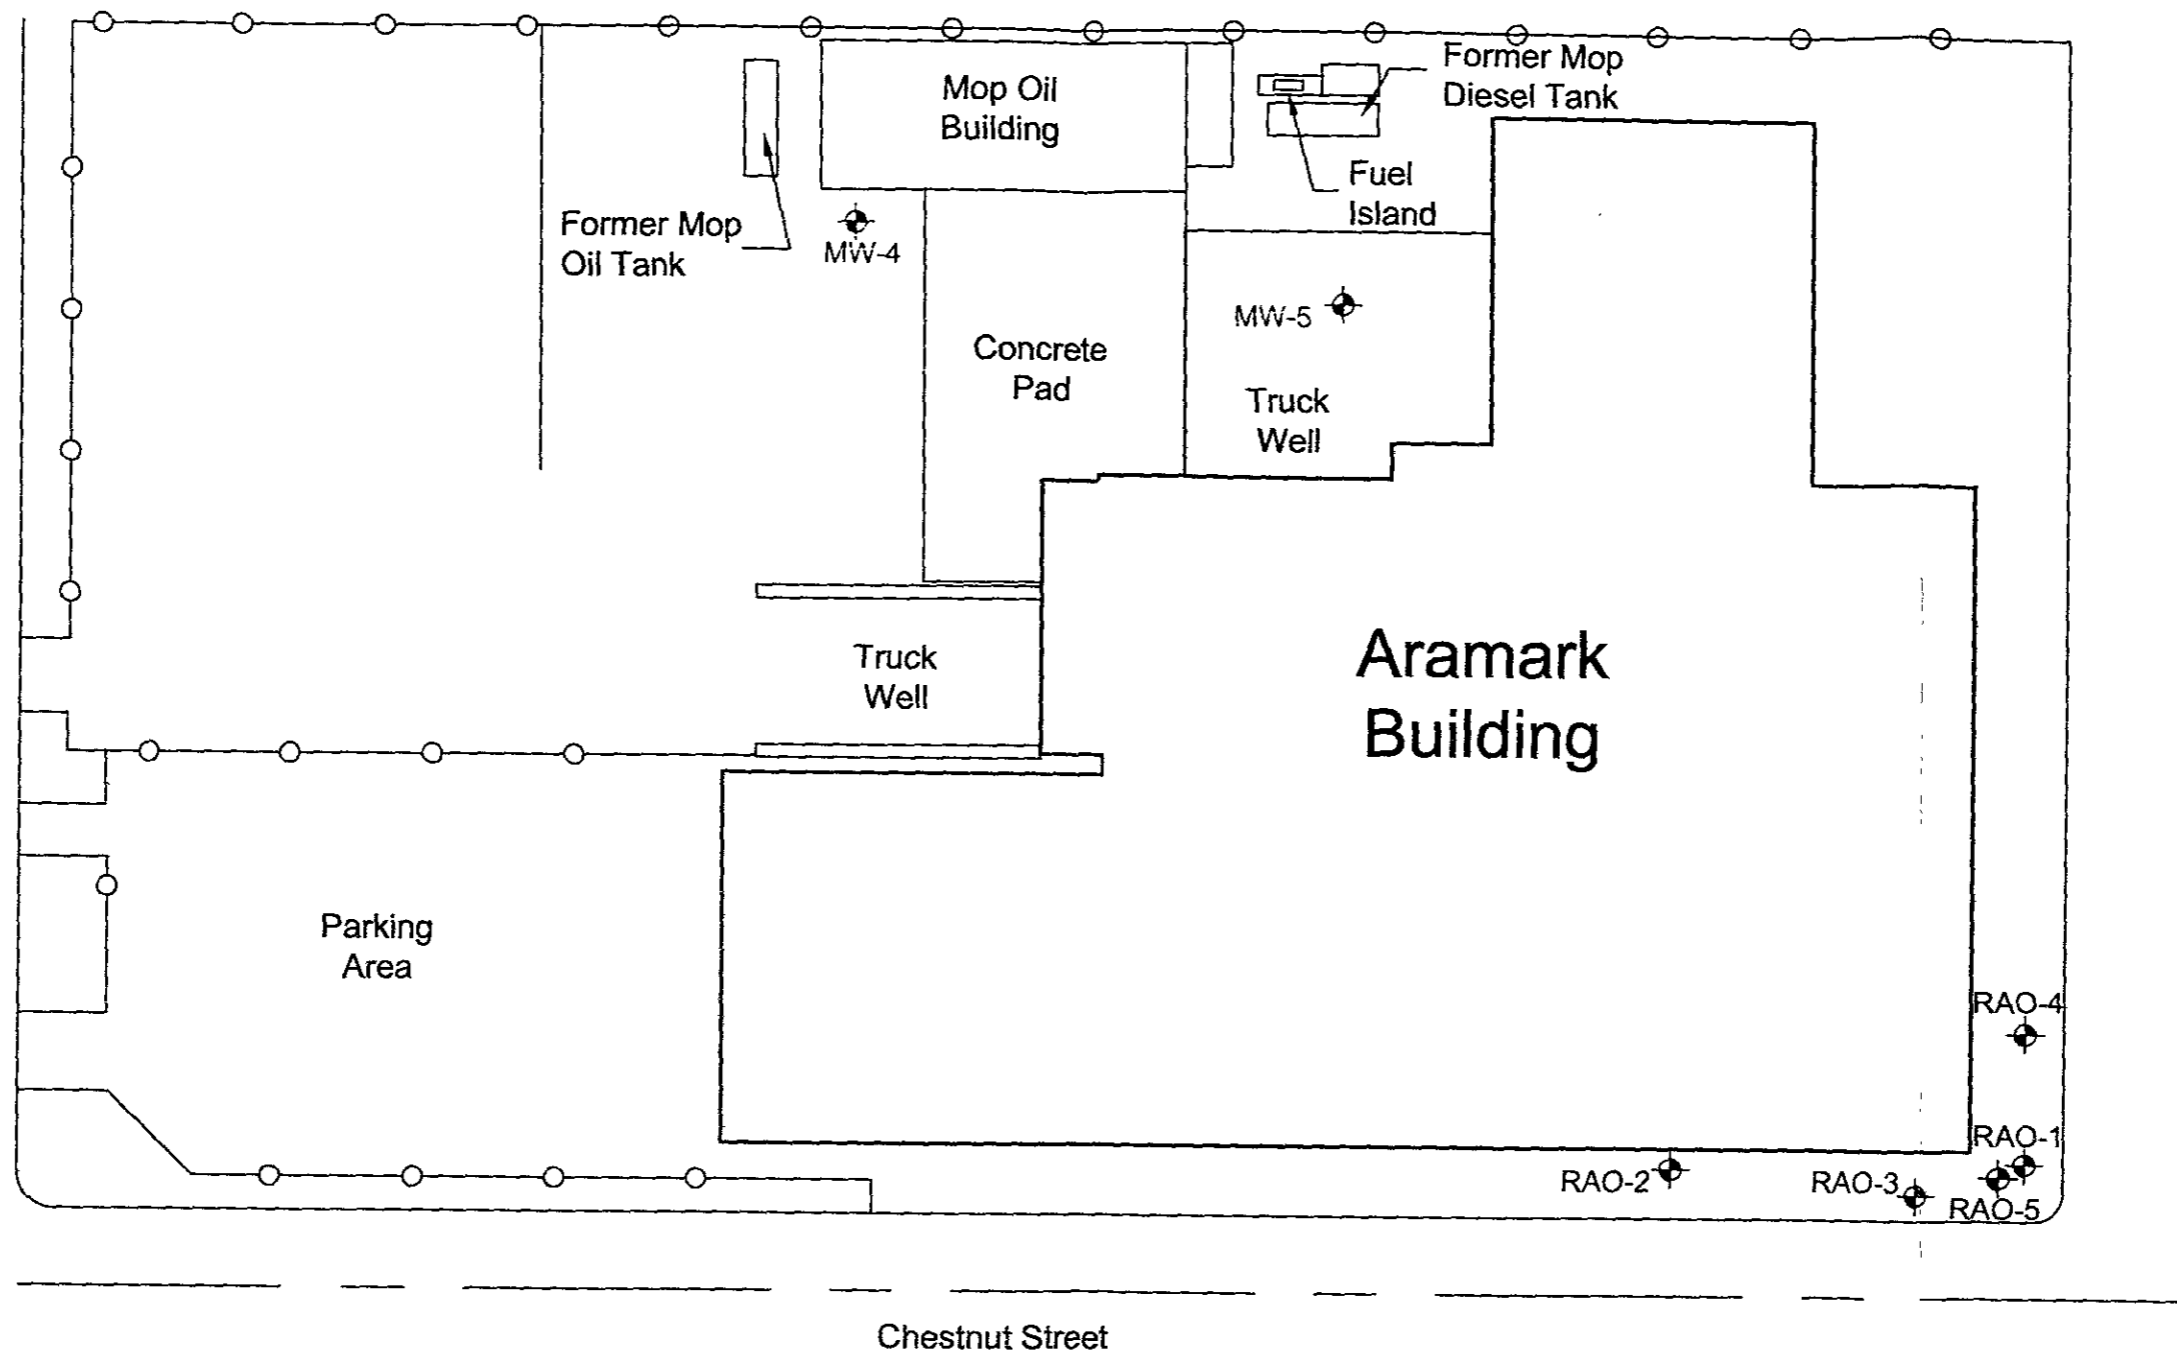

Legend

- MW-4 Former Monitoring Well Location
- Chain-Link Fence

File:	PM	PE/RG
S1494002	DB	MZ



SOURCE: RMT

Monitoring Well Location Map

Aramark Uniform Services
330 Chestnut Street
Oakland, California

Project Number	S1494 01
Date	March 22, 2004

Figure
2

CONFIDENTIAL

STATE OF CALIFORNIA DWR
WELL COMPLETION REPORT
(WELL LOGS)

REMOVED



ALAMEDA COUNTY PUBLIC WORKS AGENCY

WATER RESOURCES SECTION
 399 ELMHURST ST. HAYWARD CA. 94544-1395
 PHONE (510) 570-5533 James Yoo
 FAX (510) 782-1939

APPLICANTS: PLEASE ATTACH A SITE MAP FOR ALL DRILLING PERMIT APPLICATIONS
 DESTRUCTION OF WELLS OVER 45 FEET REQUIRES A SEPARATE PERMIT APPLICATION

DRILLING PERMIT APPLICATION

FOR APPLICANT TO COMPLETE

FOR OFFICE USE

LOCATION OF PROJECT
330 Chestnut Street
Oakland, CA 94602

PERMIT NUMBER W04-0134
 WELL NUMBER _____
 APN _____

CLIENT
 Name Armark Uniforms Career Apparel, Inc
 Address 2300 Woodville Rd Phone _____
 City Calumet Grove, Illinois Zip 60516

APPLICANT
 Name Environmental Engineering Contracting
 Address 501 Parkcenter Dr Phone (925) 667-2300
 City Santa Ana, CA Zip 92705

TYPE OF PROJECT

Well Construction	<input type="checkbox"/>	Geotechnical Investigation	<input type="checkbox"/>
Corrosive Protection	<input type="checkbox"/>	General	<input type="checkbox"/>
Water Supply	<input type="checkbox"/>	Contamination	<input type="checkbox"/>
Monitoring	<input type="checkbox"/>	Well Destruction	<input checked="" type="checkbox"/>

PROPOSED WATER SUPPLY WELL USE

New Domestic	<input type="checkbox"/>	Replacement Domestic	<input type="checkbox"/>
Municipal	<input type="checkbox"/>	Irrigation	<input type="checkbox"/>
Industrial	<input type="checkbox"/>	Other	<input type="checkbox"/>

DRILLING METHOD:

Mud Rotary	<input type="checkbox"/>	Air Rotary	<input type="checkbox"/>	Auger	<input checked="" type="checkbox"/>
Cable	<input type="checkbox"/>	Other	<input type="checkbox"/>		

DRILLER'S NAME Gregg Drilling
 DRILLER'S LICENSE NO. CS7-425165

WELL PROJECTS

Drill Hole Diameter	<u>8</u> in.	Maximum Depth	<u>27</u> ft.
Casing Diameter	<u>8</u> in.	Owner's Well Number	<u>EA0-4</u>
Surface Seal Depth	<u>4</u> ft.		

GEOTECHNICAL PROJECTS

Number of Borings	_____	Maximum Depth	_____ ft.
Hole Diameter	_____ in.		

STARTING DATE 2/16/04
 COMPLETION DATE 2/16/04

I hereby agree to comply with all requirements of this and all other Alameda County Ordinances No. 73-42

APPLICANT'S SIGNATURE David Bernier DATE 2/9/04
 PLEASE PRINT NAME David Bernier REV 9/02

PERMIT CONDITIONS
 Circled Permit Requirements Apply

- GENERAL**
- 1. A permit application should be submitted to us to arrive at the ACPWA office five days prior to proposed starting date.
- 2. Submit to ACPWA within 60 days after completion of permitted original Department of Water Resources-Well Completion Report.
- 3. Permit is void if project not begun within 90 days of approval date.
- D. WATER SUPPLY WELLS**
- 1. Minimum surface seal thickness is two inches of cement grout placed by trowel.
- 2. Minimum seal depth is 50 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved.
- C. GROUNDWATER MONITORING WELLS INCLUDING PIEZOMETERS**
- 1. Minimum surface seal thickness is two inches of cement grout placed by trowel.
- 2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.
- D. GEOTECHNICAL**
- Backfill bore hole by tremie with cement grout or cement grout and mixture. Upper two-three feet replaced in kind or with compressed air.
- E. CATHODIC**
- Fill hole anode zone with concrete placed by tremie.
- F. WELL DESTRUCTION** - P 6 H 1
- Send a map of work site. A separate permit is required for wells deeper than 45 feet.
- G. SPECIAL CONDITIONS**

NOTE: One application may be submitted for each well and a destruction. In-situ coring on one application is acceptable for geotechnical and contamination investigations.

APPROVED _____



LOG OF TEST BORING

F-203 (R 01-87)

BORING NO. RA04
 SHEET NO. 1 OF 1
 PROJECT NO. 1622.01
 INSTALLATION 6/8/89
 SURFACE ELEV. _____
 BOREHOLE DIA. 8 IN.

PROJECT NAME ARATEX - OAKLAND
 LOCATION 3RD & CHESTNUT ST. OAKLAND, CA
 CONTRACTOR ANDERSON GEOTECH.
 DRILLING METHOD HSA


SAMPLING NOTES					VISUAL CLASSIFICATION AND GENERAL OBSERVATIONS	GENERAL WELL CONSTRUCT.
INTERVAL		RECOVERY		MOISTURE		
NO.	TYPE	N	IN	DEPTH		
					FILL material, peat, loose, dark brown.	
5	SS	74	10	5	Very fine to fine SAND, moderate brown.	
10	SS	37	8	10	Medium SAND, moderate yellowish brown, some clay. CLAY, stiff, moist.	
				15	Medium SAND, dark yellowish brown.	
				20		
				25		
				30	EOB at 27 ft.	
				35		

GENERAL NOTES

DATE STARTED 8 JUN 89
 DATE COMPLETED 8 JUN 89
 RIG MOBILE B-34
 CREW CHIEF SWARTOUT
 LOGGED LYVERSE CHECKED _____

WATER LEVEL OBSERVATIONS

WHILE DRILLING ∇ 10.0 FT.
 AT COMPLETION ∇ _____
 AFTER DRILLING
 CAVE-IN: DATE/TIME _____ DEPTH _____
 WATER: DATE/TIME 6/8/89 15:20 DEPTH 8.36 FT.

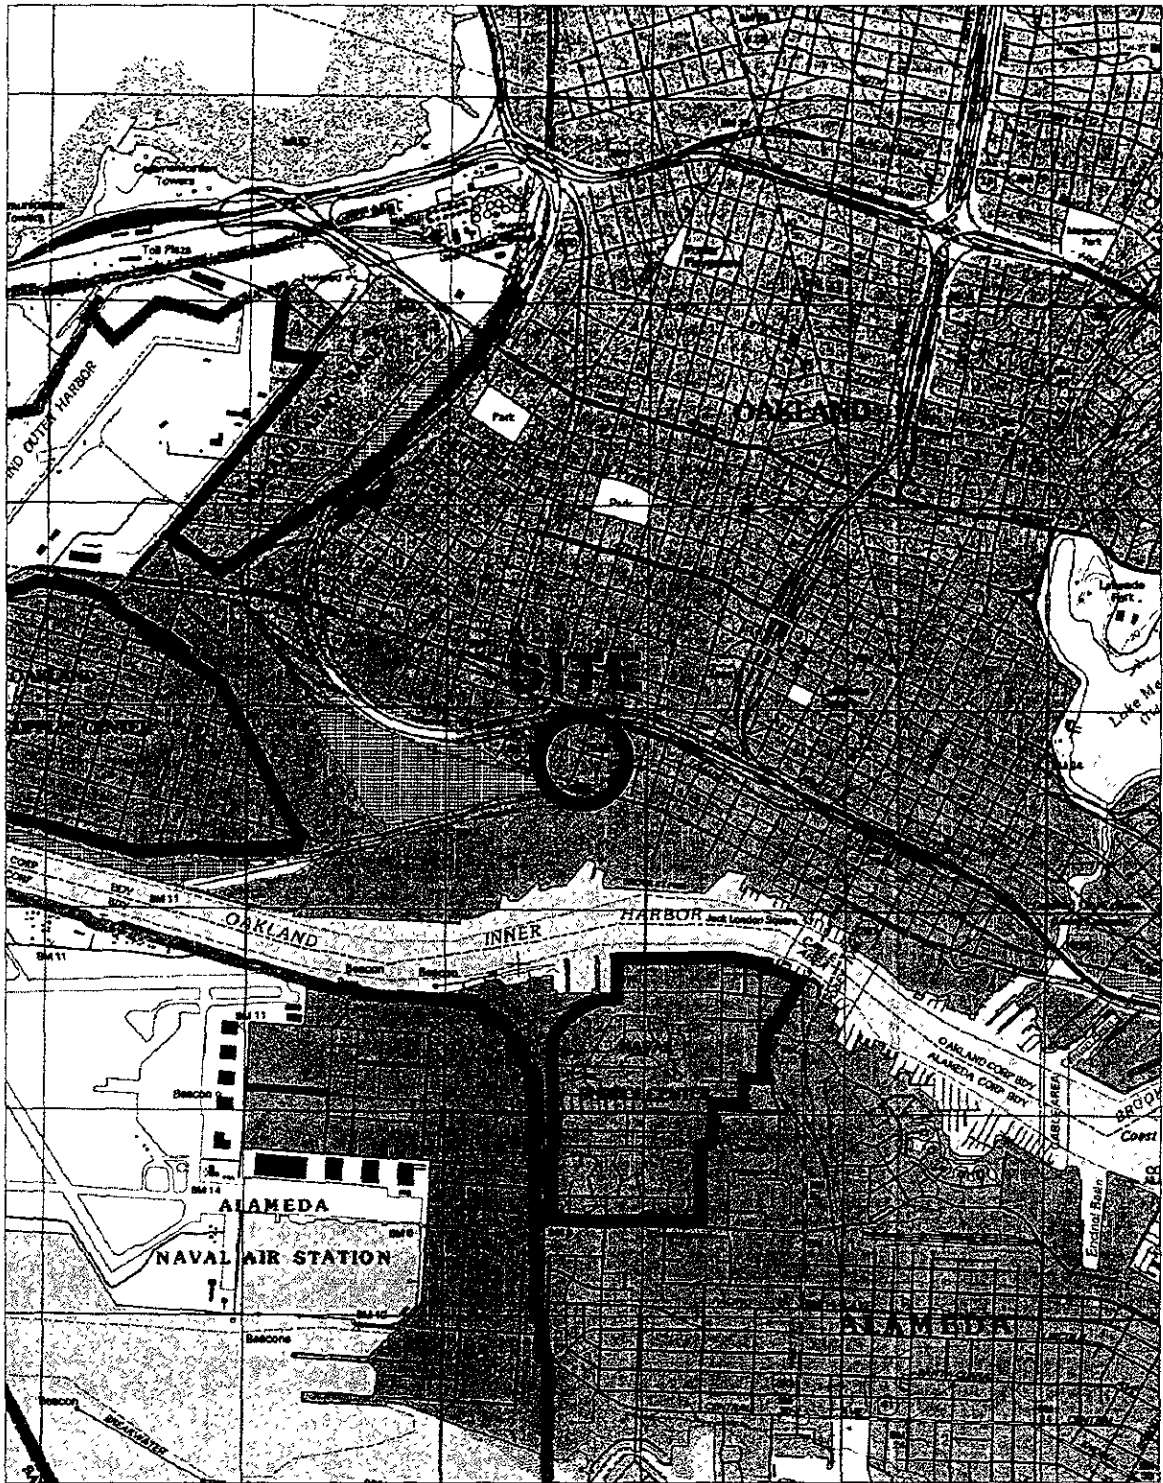

0 2000 4000 FEET
SCALE



SITE LOCATION MAP

Aramark Uniform Services
330 Chestnut Street
Oakland, California



Map Source U S G S 7.5' Map Series
topographic quadrangle map
Oakland West-1943
photorevised 1993

File S1494001	Date 3/25/04	PM DB	R.G./P.E. MTZ	PROJECT NO S1494-1	FIGURE 1
------------------	-----------------	----------	------------------	-----------------------	--------------------

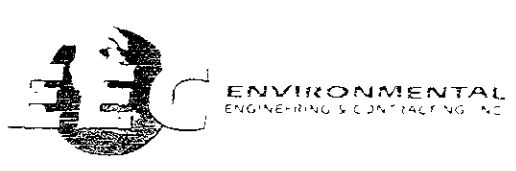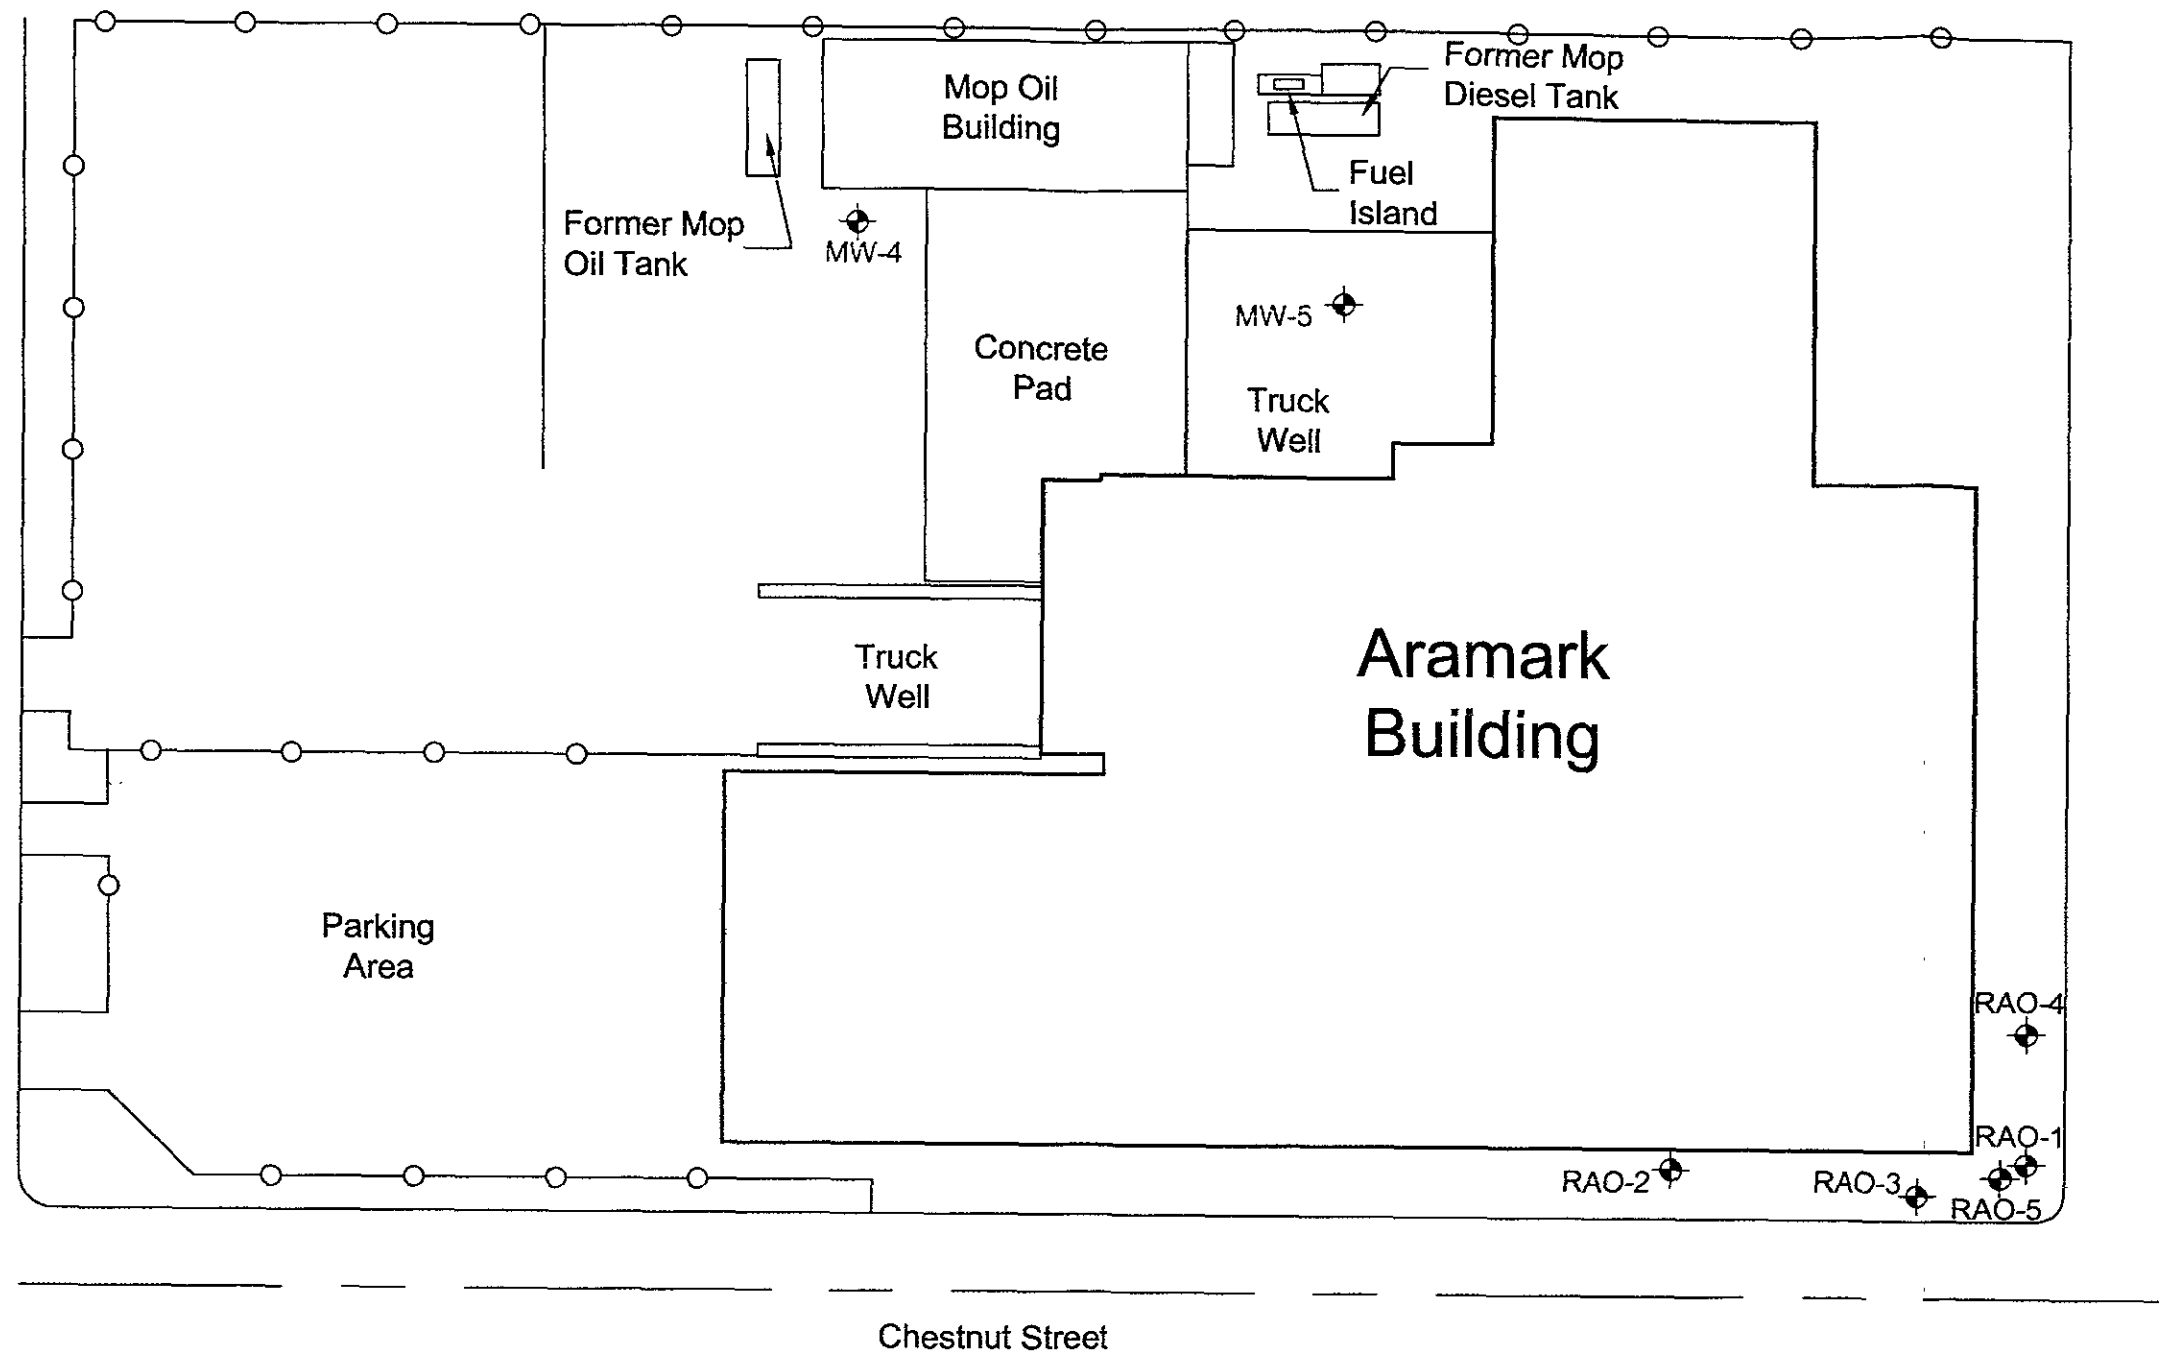



Legend

- MW-4 Former Monitoring Well Location
- Chain-Link Fence

Monitoring Well Location Map

Aramark Uniform Services
 330 Chestnut Street
 Oakland, California

File.	PM	PE/RG
S1494002	DB	MZ




Project Number	Figure
S1494 01	2
Date	
March 22, 2004	

CONFIDENTIAL

STATE OF CALIFORNIA DWR
WELL COMPLETION REPORT
(WELL LOGS)

REMOVED



ALAMEDA COUNTY PUBLIC WORKS AGENCY

WATER RESOURCES SECTION
339 ELMHURST ST. HAYWARD CA. 94544-1395
PHONE (510) 670-6623 James Yoo
FAX (510) 782-1939

APPLICANTS: PLEASE ATTACH A SITE MAP FOR ALL DRILLING PERMIT APPLICATIONS
DESTRUCTION OF WELLS OVER 45 FEET REQUIRES A SEPARATE PERMIT APPLICATION

DRILLING PERMIT APPLICATION

FOR APPLICANT TO COMPLETE

LOCATION OF PROJECT
330 Chestnut Street
Oakland, CA 94607

FOR OFFICE USE
PERMIT NUMBER WCA-0135
WELL NUMBER _____
APN _____

PERMIT CONDITIONS
Circled Permit Requirements Apply

CLIENT
Name Aramark Uniform + Career Apparel, Inc
Address 2300 Waverly St. Phone _____
City Danvers, MA Zip 01923

- A. GENERAL
 1. A permit application should be submitted so as to arrive at the ACPWA office (two days prior to proposed starting date)
 2. Submit to ACPWA within 60 days after completion of permitted original Department of Water Resources-Well Completion Report.
 3. Permit is void if project not begun within 90 days of approval date.

APPLICANT
Name Environmental Engineering & Contracting
Address 901 Parkcenter Dr. Phone (714) 667-2390
City Santa Ana, CA Zip 92705

B. WATER SUPPLY WELLS

TYPE OF PROJECT		Geotechnical Investigation	
Well Construction	<input type="checkbox"/>	General	<input type="checkbox"/>
Cathodic Protection	<input type="checkbox"/>	Contamination	<input type="checkbox"/>
Water Supply	<input type="checkbox"/>	Well Destruction	<input checked="" type="checkbox"/>
Monitoring	<input type="checkbox"/>		

- 1. Minimum surface seal thickness is two inches of cement grout placed by trowel.
- 2. Minimum seal depth is 50 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved.

C. GROUNDWATER MONITORING WELLS INCLUDING PIEZOMETERS

PROPOSED WATER SUPPLY WELL USE			
New Domestic	<input type="checkbox"/>	Replacement Domestic	<input type="checkbox"/>
Municipal	<input type="checkbox"/>	Irrigation	<input type="checkbox"/>
Industrial	<input type="checkbox"/>	Other _____	<input type="checkbox"/>

- 1. Minimum surface seal thickness is two inches of cement grout placed by trowel.
- 2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.

D. GEOTECHNICAL

Backfill bore hole by trowel with cement grout of cement grout and minimum upper two-three feet replaced in kind or with compacted cuttings.

E. CATHODIC

Fill hole anode zone with concrete placed by trowel.

- F. WELL DESTRUCTION - DBA-1
Send a map of work site. A separate permit is required for wells deeper than 45 feet.
- G. SPECIAL CONDITIONS

DRILLING METHOD:
Mud Rotary Air Rotary Auger
Cable Other

DRILLER'S NAME Gregg Drilling
DRILLER'S LICENSE NO. CS7-485165

WELL PROJECTS
Drill Hole Diameter 8 in. Maximum Depth 30 ft. PAO-5
Casing Diameter 2 in. Owner's Well Number _____
Surface Seal Depth 2.5 ft.

NOTE: One application must be submitted for each well or well destruction. Multiple borings on one application are acceptable for geotechnical and contamination investigations.

GEOTECHNICAL PROJECTS
Number of Borings _____ Maximum Depth _____ ft.
Hole Diameter _____ in.

STARTING DATE 2/16/04
COMPLETION DATE 2/16/04

APPROVED _____ DATE _____

I hereby agree to comply with all requirements of this permit and Alameda County Ordinance No. 13-08

APPLICANT'S SIGNATURE David Bernier DATE 2/9/04

PLEASE PRINT NAME David Bernier Rev 0-18-02



LOG OF TEST BORING
 FH: 12013SBS


BORING NO.: SBPA05
 SHEET NO.: 1 OF 1
 PROJECT NO.: 12013.15
 INSTALLATION: _____
 SURFACE ELEV.: _____
 BOREHOLE DIA.: 8"

PROJECT NAME: ARAMARK UNIFORM SERVICES, INC.
 LOCATION: OAKLAND, CALIFORNIA
 CONTRACTOR: WEST HAZMAT
 DRILLING METHOD: HOLLOW STEM AUGER

SAMPLING NOTES					VISUAL CLASSIFICATION AND GENERAL OBSERVATIONS
INTERVAL		RECOVERY %		DEPTH	
NO.	TYPE	BLOWS	PIG (ppm)		
RAO-5 @ 1'	SS	HAND AUGER	<2		SILT (SM): dark brown, slightly moist, no odor or stain.
RAO-5 @ 3'	SS	HAND AUGER	3.8		SILT (SM); with little fine sand, light brown, slightly moist, no odor or stain.
RAO-5 @ 5'	SS	50	50-6"	5	SAND w/SILT (SP-SM): fine to medium sand, dark brown, moist, no odor or stain.
RAO-5 @ 10'	SS	100	11,14,16	10	SILT (SM): dark brown, slight plasticity, wet, no odor or stain.
RAO-5 @ 12'	SS	100	16,19,20	12	SAND w/SILT (SW-SM): fine sand, slight plasticity, wet, dark brown with beige swirls and red stains, no odors.
RAO-5 @ 15'	SS	100	7,8,10	15	Same as above.
RAO-5 @ 17'	SS	100	7,20,30-3"	17	
RAO-5 @ 20'	SS	80	20,30-1"	20	SAND (SW): fine to medium sand, dark brown, moist, no odor or stain.
RAO-5 @ 22'	SS	80	13,30-3"	22	
RAO-5 @ 25'	SS	80	22,30-1"	25	Same as above.
RAO-5 @ 30'	SS	80	19,30-2"	30	
Total Depth = 30'					

GENERAL NOTES
 DATE STARTED: 8/27/98
 DATE COMPLETED: 8/27/98
 RIG: LIMITED ACCESS
 CREW CHIEF: ADAM
 LOGGED: YAM CHECKED: _____

WATER LEVEL OBSERVATIONS
 WHILE DRILLING: ∇ 9.0' bgs.
 AT COMPLETION: ∇ 7.0' bgs.
 AFTER DRILLING: _____
 CAVE-IN: DATE/TIME: _____ DEPTH: _____
 WATER: DATE/TIME: _____ DEPTH: _____

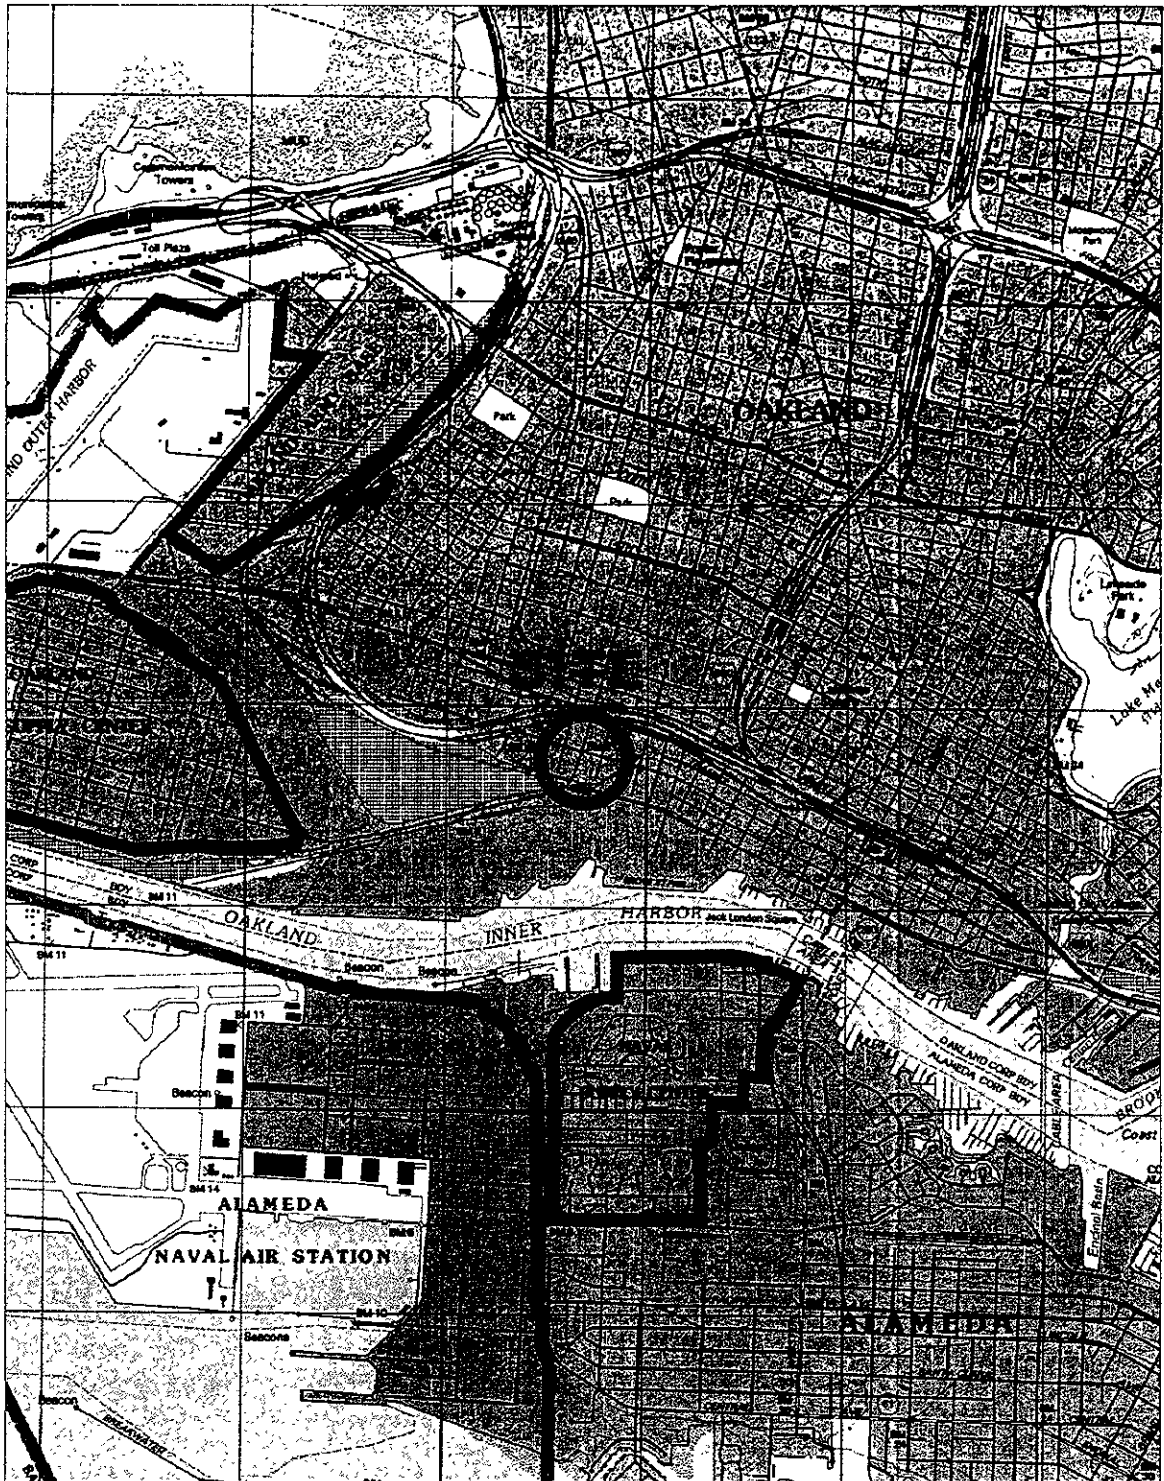

0 2000 4000 FEET
SCALE




Map Source U S G S 7 5' Map Series
topographic quadrangle map
Oakland West-1943
photorevised 1993

SITE LOCATION MAP

Aramark Uniform Services
330 Chestnut Street
Oakland, California



File. S1494001	Date 3/25/04	PM DB	R.G./P.E. MTZ	PROJECT NO S1494-1	FIGURE 1
-------------------	-----------------	----------	------------------	-----------------------	--------------------

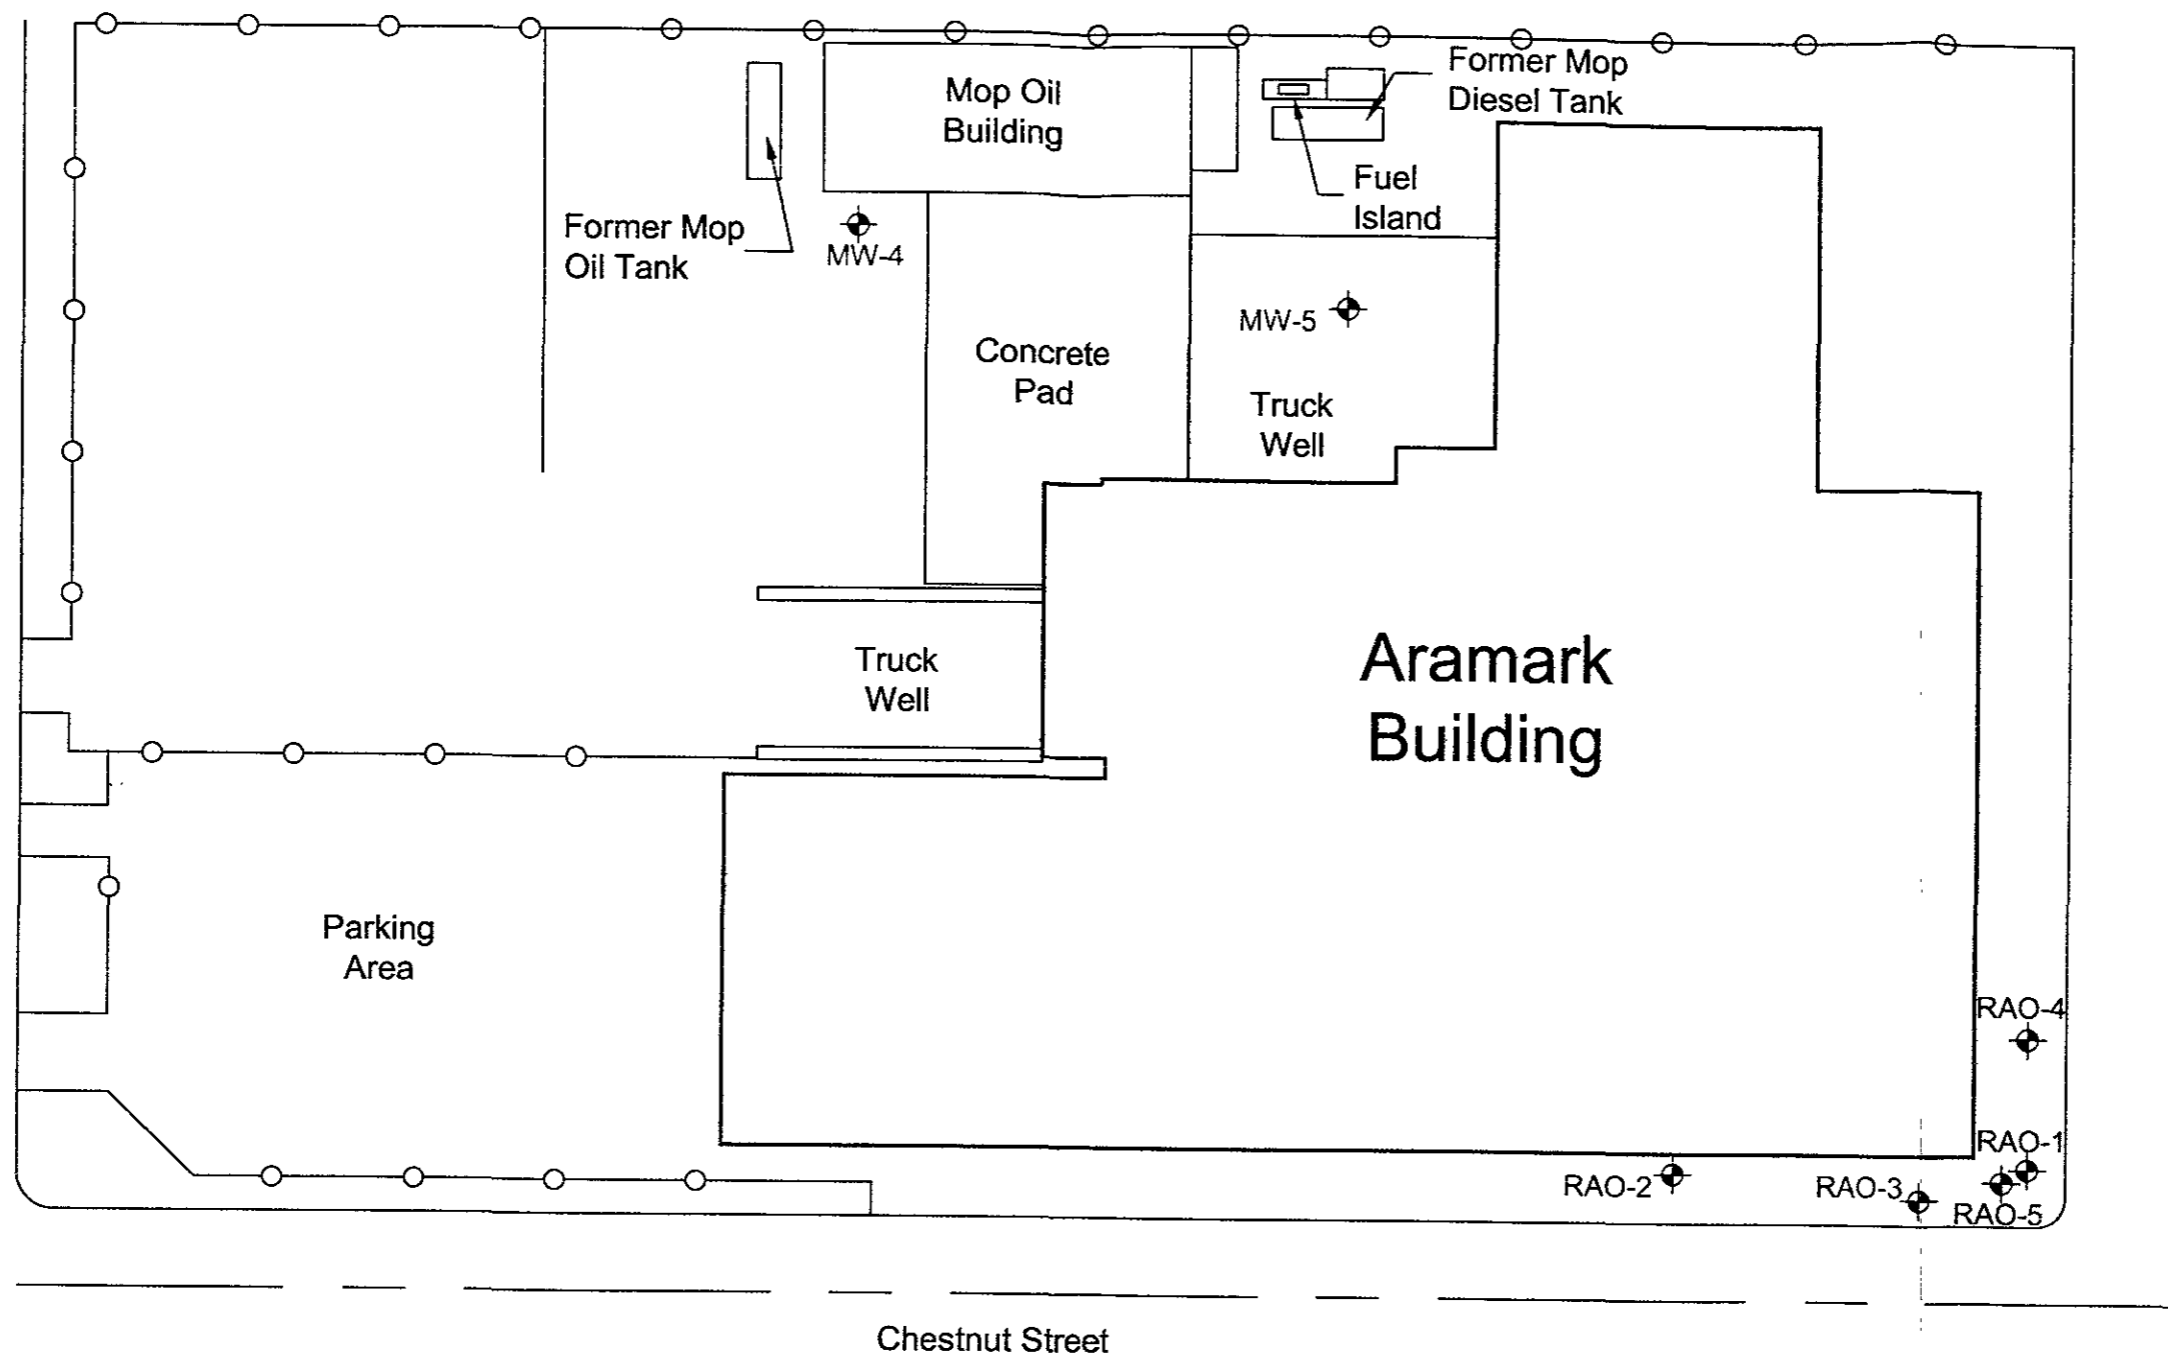

Legend

- MW-4 Former Monitoring Well Location
- Chain-Link Fence

File:	PM	PE/RG
S1494002	DB	MZ



Monitoring Well Location Map


Aramark Uniform Services
330 Chestnut Street
Oakland, California

Project Number S1494 01	2
Date March 22, 2004	

CONFIDENTIAL

STATE OF CALIFORNIA DWR
WELL COMPLETION REPORT
(WELL LOGS)

REMOVED



ALAMEDA COUNTY PUBLIC WORKS AGENCY

WATER RESOURCES SECTION
 399 ELMHURST ST. HAYWARD CA. 94544-1395
 PHONE (510) 670-6633 Inmate Yrs
 FAX (510) 782-1999

APPLICANTS: PLEASE ATTACH A SITE MAP FOR ALL DRILLING PERMIT APPLICATIONS
 DESTRUCTION OF WELLS OVER 45 FEET REQUIRES A SEPARATE PERMIT APPLICATION

DRILLING PERMIT APPLICATION

FOR APPLICANT TO COMPLETE

LOCATION OF PROJECT
330 Chestnut Street
Oakland, CA 94607

FOR OFFICE USE
 PERMIT NUMBER W04-0136
 WELL NUMBER _____
 APN _____

CLIENT
 Name Aramer & Uniform-Corner Apparel, Inc
 Address 2300 Warmville Rd Phone _____
 City Danvers, CA Zip 95015

APPLICANT
 Name Environmental Engineering & Contracting
 Address 501 Archer Dr Phone (925) 627-2310
 City SANTA ANA, CA Zip 92705

TYPE OF PROJECT

Well Construction	<input type="checkbox"/>	Geotechnical Investigation	<input type="checkbox"/>
Cathodic Protection	<input type="checkbox"/>	General	<input type="checkbox"/>
Water Supply	<input type="checkbox"/>	Contamination	<input checked="" type="checkbox"/>
Monitoring	<input type="checkbox"/>	Well Definition	<input checked="" type="checkbox"/>

PROPOSED WATER SUPPLY WELL USE

New Domestic	<input type="checkbox"/>	Replacement Domestic	<input type="checkbox"/>
Municipal	<input type="checkbox"/>	Irrigation	<input type="checkbox"/>
Industrial	<input type="checkbox"/>	Other	<input type="checkbox"/>

DRILLING METHOD:

Mud Rotary	<input type="checkbox"/>	Air Rotary	<input type="checkbox"/>	Auger	<input checked="" type="checkbox"/>
Cable	<input type="checkbox"/>	Other	<input type="checkbox"/>		

DRILLER'S NAME Gregg Drilling
 DRILLER'S LICENSE NO C57-485165

WELL PROJECTS

Drill Hole Diameter	<u>8</u> in	Maximum Depth	<u>17</u> ft
Casing Diameter	<u>2</u> in	Owner's Well Number	<u>MW-4</u>
Surface Seal Depth	<u>23</u> ft		

GEOTECHNICAL PROJECTS

Number of Borings	_____	Maximum Depth	_____ ft
Hole Diameter	_____ in		

START DATE 2/16/04
 COMPLETION DATE 2/16/04

I hereby agree to comply with all requirements of this permit and Alameda County Ordinance No. 73 65
 APPLICANT'S SIGNATURE D. Bernier DATE 2/9/04
 PLEASE PRINT NAME David Bernier RES. 0418-02

- PERMIT CONDITIONS
 Circled Permit Requirements Apply
- A. GENERAL
 1. A permit application should be submitted so as to arrive at the ACPWA office five days prior to proposed starting date.
 2. Submit to ACPWA within 60 days after completion of permitted original Department of Water Resources-Well Completion Report.
 3. Permit is void if project not begun within 90 days of approval date.
 - B. WATER SUPPLY WELLS
 1. Minimum surface seal thickness is two inches of cement grout placed by trowel.
 2. Minimum seal depth is 50 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved.
 - C. GROUNDWATER MONITORING WELLS INCLUDING PIEZOMETERS
 1. Minimum surface seal thickness is two inches of cement grout placed by trowel.
 2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.
 - D. GEOTECHNICAL

Backfill bore hole by trowel with cement grout or cement grout/sand mixture. Upper two-three feet replaced in kind or with compacted cuttings
 - E. CATHODIC

Fill hole made area with concrete placed by trowel.
 - F. WELL DESTRUCTION - PS# 1

Send a map of work site. A separate permit is required for wells deeper than 45 feet.
 - G. SPECIAL CONDITIONS

NOTE: One application must be submitted for each well or well destruction. Multiple borings on one application are acceptable for geotechnical and contamination investigations.

APPROVED _____ DATE _____



LOG OF TEST BORING
 FN: 12013MW4


BORING NO.: MW-4
 SHEET NO.: 1 OF 1
 PROJECT NO.: 12013.13
 INSTALLATION: _____
 SURFACE ELEV.: _____
 BOREHOLE DIA.: 8 INCHES

PROJECT NAME: ARAMARK OAKLAND
 LOCATION: OAKLAND (MOP OIL BUILDING)
 CONTRACTOR: WEST HAZMAT DRILLING
 DRILLING METHOD: HOLLOW STEM AUGER

SAMPLING NOTES				VISUAL CLASSIFICATION AND GENERAL OBSERVATIONS	GENERAL WELL CONSTRUCTION
INTERVAL		RECOVERY			
NO.	TYPE	BLOWS	DEPTH		
				Asphaltic concrete pavement	
				Coarse sub-angular, well graded gravel, sub grade (GW).	
MW4-5	SOIL	70	4/5/9	5	Well graded, fine grained sand (SW), dark brown, slightly moist, no staining, no odor.
MW4-7.5	SOIL	100	12/22/27		Well graded, fine sand (SW), light brown, slightly moist, no staining, no odor
MW4-10	SOIL	100	12/17/24	10	Same as above, wet.
				15	
				20	
				25	
				30	
				Total depth of boring = 17 feet bgs. Groundwater encountered at 13 feet.	

GENERAL NOTES
 DATE STARTED 5/6/95
 DATE COMPLETED 5/6/95
 RIG MOBILE B-81
 CREW CHIEF _____
 LOGGED KEVIN BATE CHECKED JIM VAN NORTWICK

WATER LEVEL OBSERVATIONS
 WHILE DRILLING 10 FEET
 AT COMPLETION _____
 AFTER DRILLING _____
 CAVE-IN DATE/TIME _____ DEPTH: _____
 WATER DATE/TIME _____ DEPTH: _____

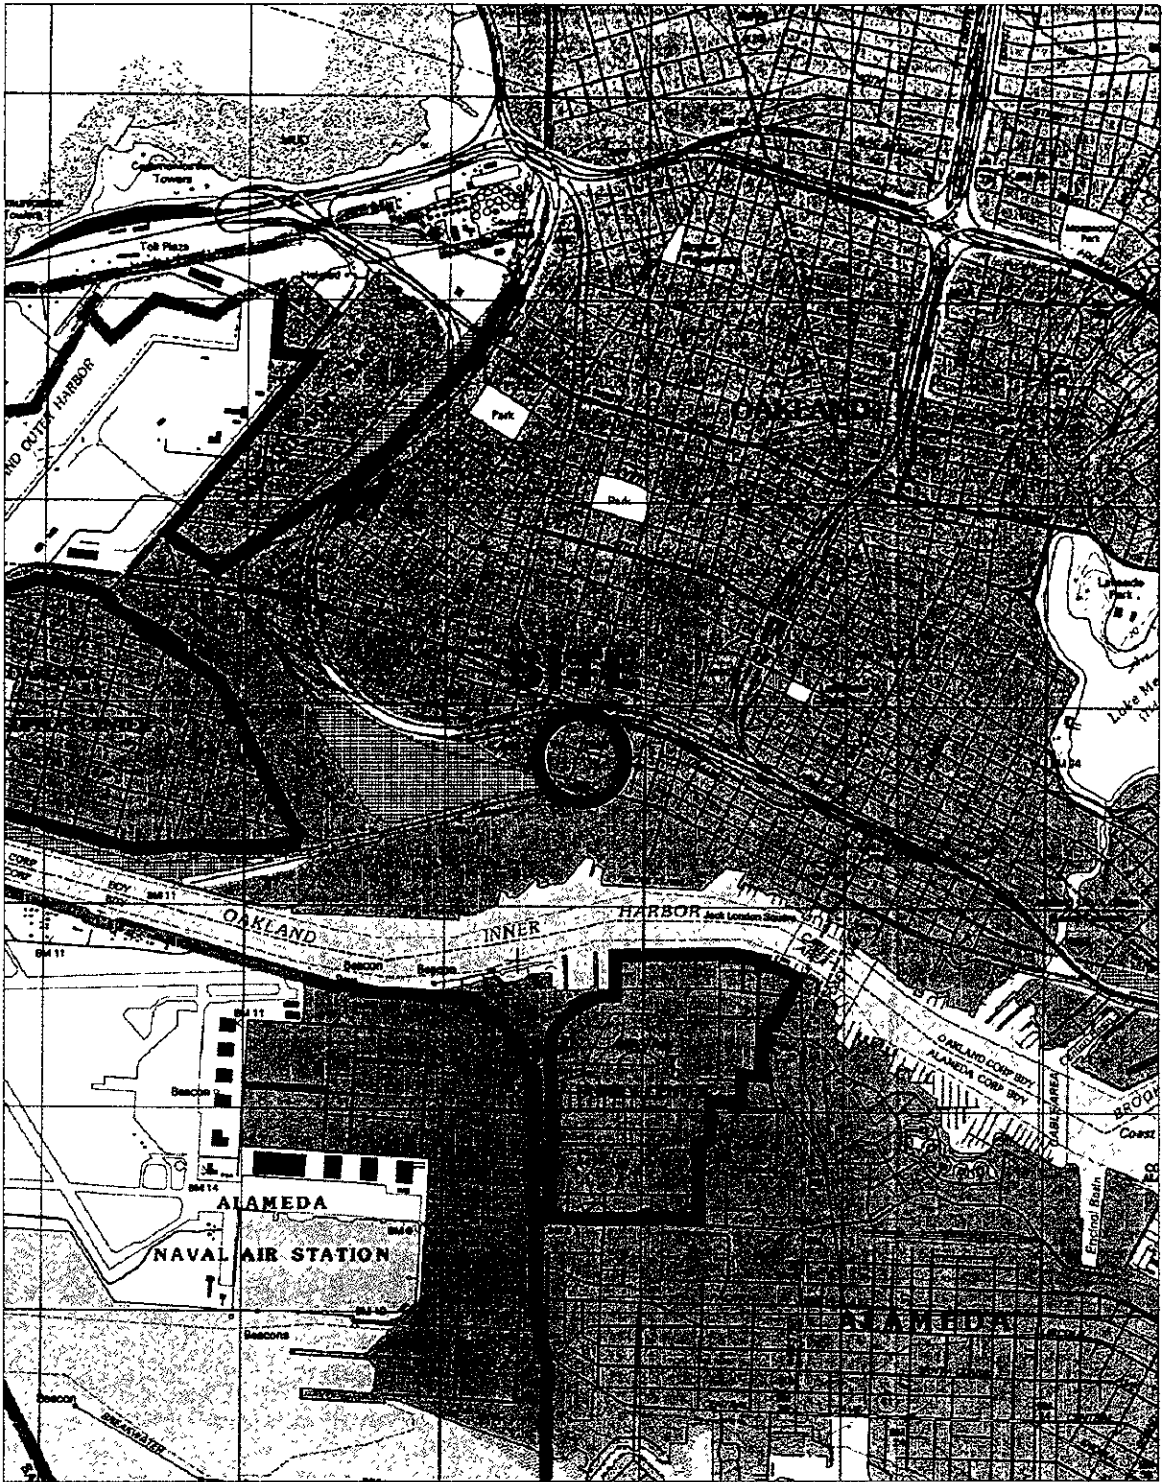

0 2000 4000 FEET
SCALE




Map Source: U S G S 7 5' Map Series
topographic quadrangle map
Oakland West-1943
photorevised 1993



SITE LOCATION MAP

Aramark Uniform Services
330 Chestnut Street
Oakland, California

File S1494001	Date 3/25/04	PM DB	R G / P E MTZ	PROJECT NO S1494-1	FIGURE 1
------------------	-----------------	----------	------------------	-----------------------	--------------------

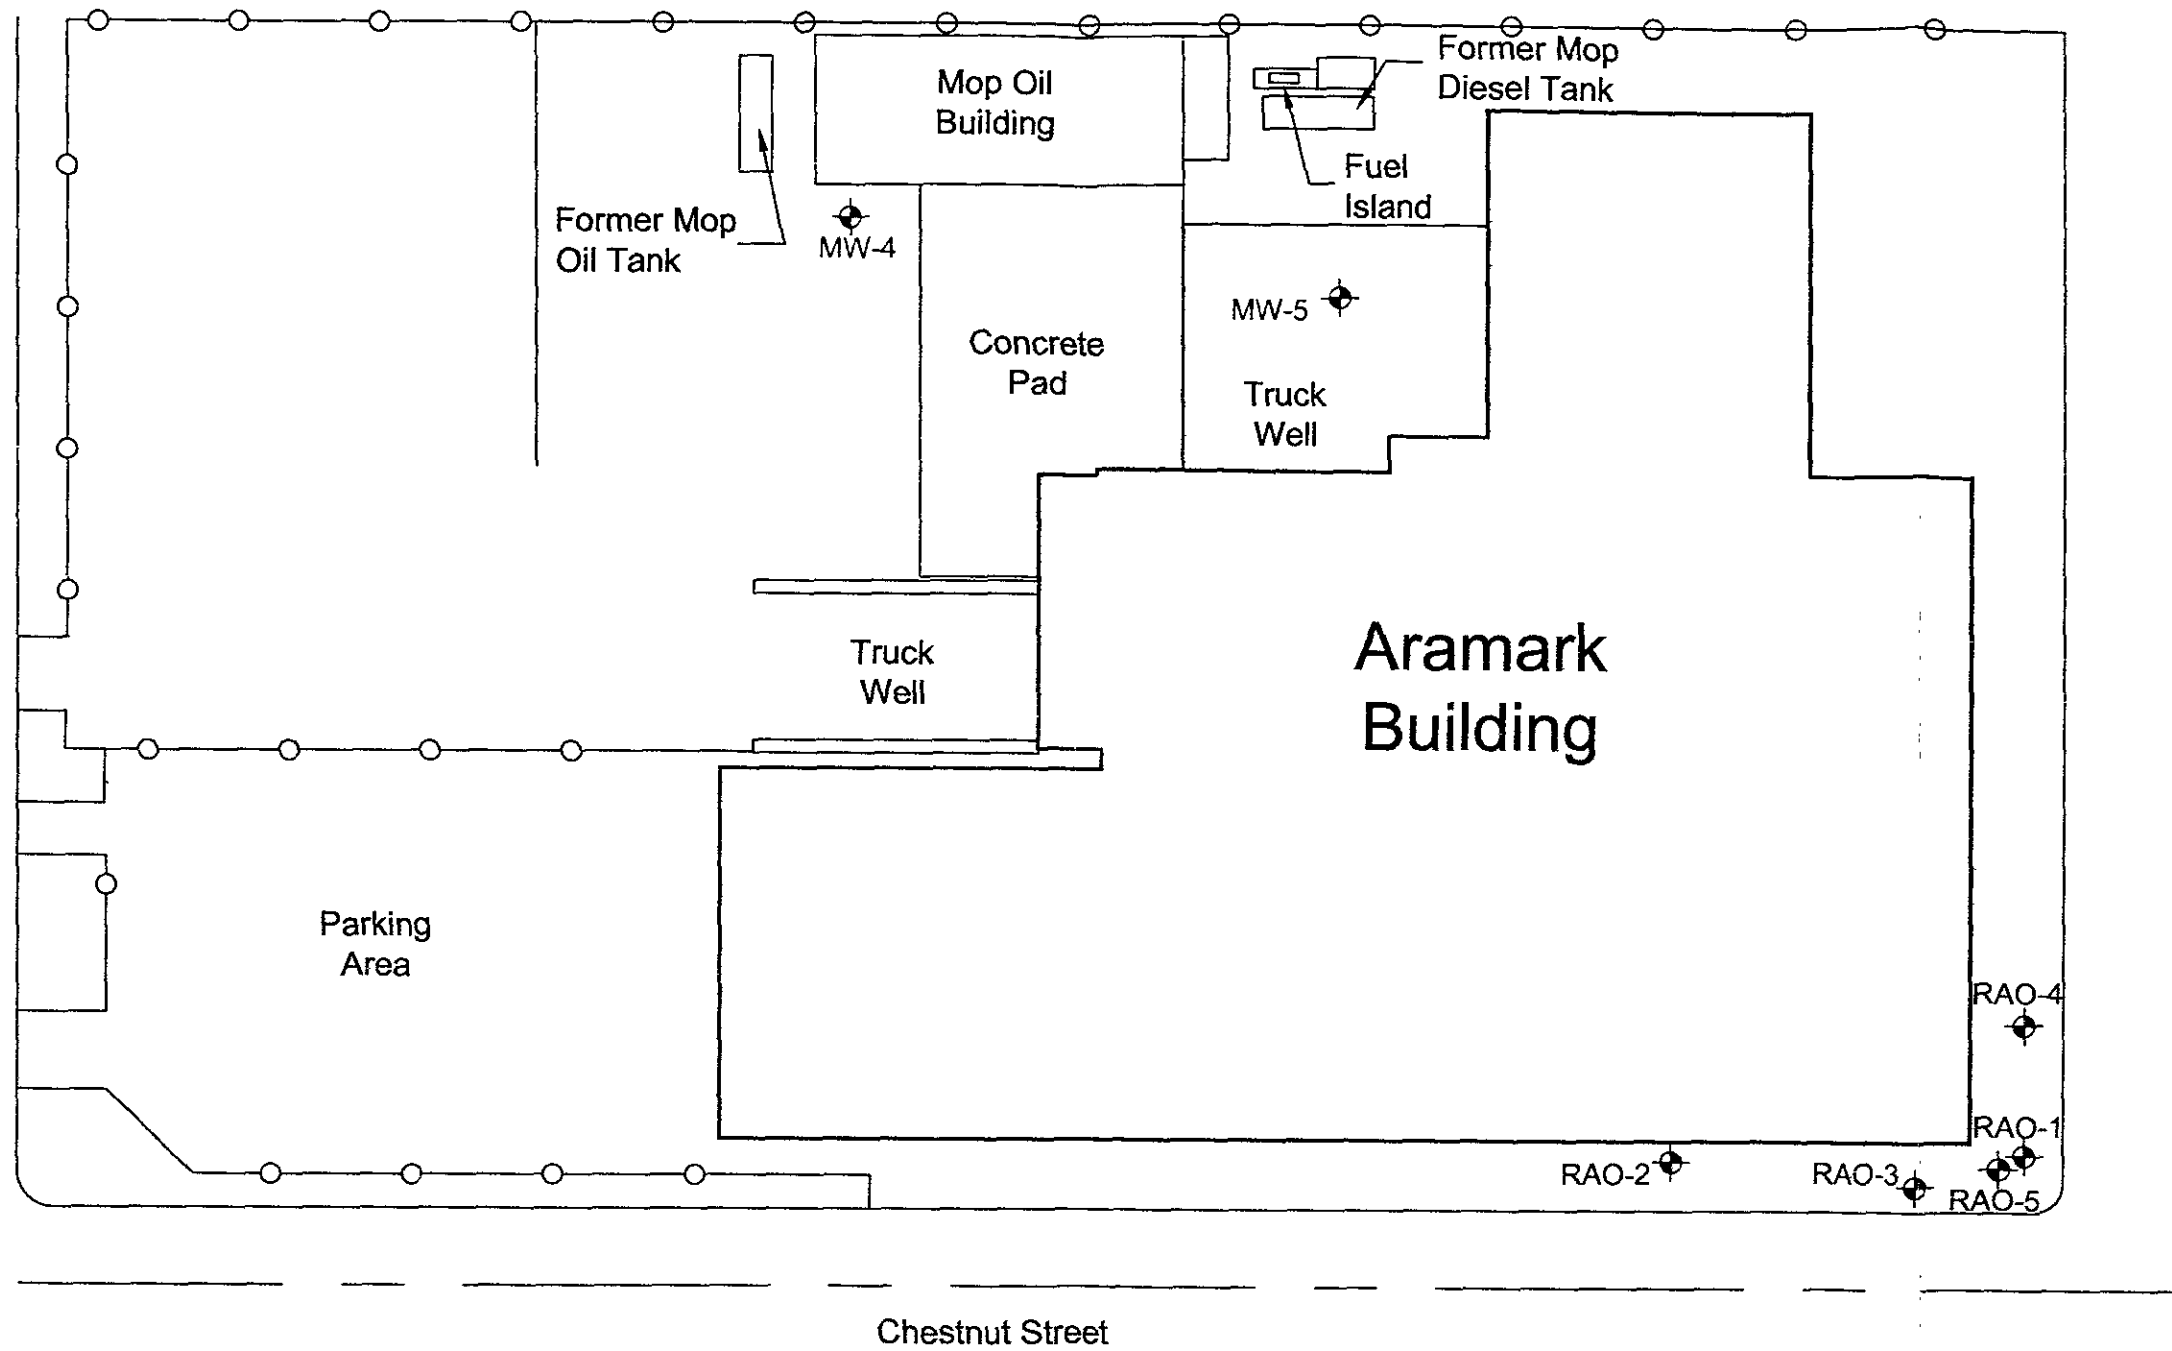

Legend

-  MW-4 Former Monitoring Well Location
-  Chain-Link Fence

Monitoring Well Location Map

Aramark Uniform Services
330 Chestnut Street
Oakland, California

Project Number
S1494 01

Date
March 22, 2004

Figure

2

File	PM	PE/RG
S1494002	DB	MZ



SOURCE: RMT

CONFIDENTIAL

STATE OF CALIFORNIA DWR
WELL COMPLETION REPORT
(WELL LOGS)

REMOVED



ALAMEDA COUNTY PUBLIC WORKS AGENCY

WATER RESOURCES SECTION
395 ELMHURST ST. HAYWARD CA. 94544-1395
PHONE (510) 670-6633 James Yoo
FAX (510) 783-1939

APPLICANTS: PLEASE ATTACH A SITE MAP FOR ALL DRILLING PERMIT APPLICATIONS
DESTRUCTION OF WELLS OVER 45 FEET REQUIRES A SEPARATE PERMIT APPLICATION

DRILLING PERMIT APPLICATION

FOR APPLICANT TO COMPLETE

LOCATION OF PROJECT
330 Chestnut Street
Oakland, CA 94607

FOR OFFICE USE
PERMIT NUMBER W04-0137
WELL NUMBER _____
APN _____

PERMIT CONDITIONS
Circled Permit Requirements Apply

CLIENT
Name Aramark Uniform+Career Apparel, Inc
Address 2300 Washburn Rd Phone _____
City Durand, Illinois Zip 60515

APPLICANT
Name Environmental Engineering Contracting
Address 501 Parkcenter Dr. Phone (714) 667-2350
City Santa Ana, CA Zip 92705

TYPE OF PROJECT

- | | | | |
|---------------------|--------------------------|----------------------------|-------------------------------------|
| Well Construction | <input type="checkbox"/> | Geotechnical Investigation | <input type="checkbox"/> |
| Cathodic Protection | <input type="checkbox"/> | General | <input type="checkbox"/> |
| Water Supply | <input type="checkbox"/> | Construction | <input type="checkbox"/> |
| Monitoring | <input type="checkbox"/> | Well Destruction | <input checked="" type="checkbox"/> |

PROPOSED WATER SUPPLY WELL USE

- | | | | |
|--------------|--------------------------|----------------------|--------------------------|
| New Domestic | <input type="checkbox"/> | Replacement Domestic | <input type="checkbox"/> |
| Municipal | <input type="checkbox"/> | Irrigation | <input type="checkbox"/> |
| Industrial | <input type="checkbox"/> | Other | <input type="checkbox"/> |

DRILLING METHOD:

- | | | | | | |
|------------|--------------------------|------------|--------------------------|-------|-------------------------------------|
| Mud Rotary | <input type="checkbox"/> | Air Rotary | <input type="checkbox"/> | Auger | <input checked="" type="checkbox"/> |
| Cable | <input type="checkbox"/> | Other | <input type="checkbox"/> | | |

DRILLER'S NAME Gregg Drilling

DRILLER'S LICENSE NO. C57-485165

WELL PROJECTS

Drill Hole Diameter 8 in. Maximum Depth 15 ft. Owner's Well Number mw-5
Casing Diameter 8 in.
Surface Seal Depth 5 ft.

GEOTECHNICAL PROJECTS

Number of Borings _____ Minimum Depth _____ ft.
Hole Diameter _____ in.

STARTING DATE 2/16/04

COMPLETION DATE 2/16/04

I hereby agree to comply with all regulations of this permit and Alameda County Ordinance No. 33-65

APPLICANT'S SIGNATURE David Bernier DATE 2/9/04

PLEASE PRINT NAME David Bernier REV 9-18-02

A. GENERAL

1. A permit application should be submitted so as to arrive at the ACPWA office five days prior to proposed starting date.
2. Submit to ACPWA within 60 days after completion of permitted or final Department of Water Resources-Well Completion Report.
3. Permit is void if project not begun within 90 days of approval date.

B. WATER SUPPLY WELLS

1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
2. Minimum seal depth is 50 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved.

C. GROUNDWATER MONITORING WELLS INCLUDING PIEZOMETERS

1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.

D. GEOTECHNICAL

Backfill bore hole by tremie with cement grout or cement grout/sand mixture. Upper two-three feet replaced in kind or with compacted cuttings.

E. CATHODIC

Fill hole around zone with concrete placed by tremie.

F. WELL DESTRUCTION

Send a map of work site. A separate permit is required for wells deeper than 45 feet.

G. SPECIAL CONDITIONS

NOTE: One application may be submitted for such a well destruction. Multiple bore holes on one application are allowed for geotechnical and construction in wells.

APPROVED _____



LOG OF TEST BORING
FN: 12013MW5


PROJECT NAME: ARAMARK OAKLAND
 LOCATION: OAKLAND (MOP OIL BUILDING)
 CONTRACTOR: WEST HAZMAT DRILLING
 DRILLING METHOD: HOLLOW STEM AUGER

BORING NO.: MW-5
 SHEET NO.: 1 OF 1
 PROJECT NO.: 12013.13
 INSTALLATION: _____
 SURFACE ELEV.: _____
 BOREHOLE DIA.: 8 INCHES


SAMPLING NOTES					VISUAL CLASSIFICATION AND GENERAL OBSERVATIONS	GENERAL WELL CONSTRUCT.
INTERVAL		RECOVERY				
NO.	TYPE	BLOWS	DEPTH			
					Concrete pavement	
					Coarse sub-angular well graded gravel, sub grade (GW).	
MW5-5	SOIL	80	4/8/8	5	Well graded, fine grained sand (SW), dark brown, no staining, no odor.	
MW5-7.5	SOIL	100	10/15/18		Same as above, moist.	
MW5-10	SOIL	100	7/17/16	10	Same as above, wet.	
				15	Total depth of boring = 15 feet bgs. Groundwater encountered at 10 feet.	
				20		
				25		
				30		

GENERAL NOTES
 DATE STARTED 5-6/95
 DATE COMPLETED 5/8/95
 RIG MOBILE B-6
 CREW CHIEF _____
 LOGGED KEVIN BATE CHECKED JIM VAN NORTWICK

WATER LEVEL OBSERVATIONS
 WHILE DRILLING 10 FEET
 AT COMPLETION _____
 AFTER DRILLING _____
 CAME-IN DATE/TIME _____ DEPT- _____
 WATER DATE/TIME _____ DEPTH _____

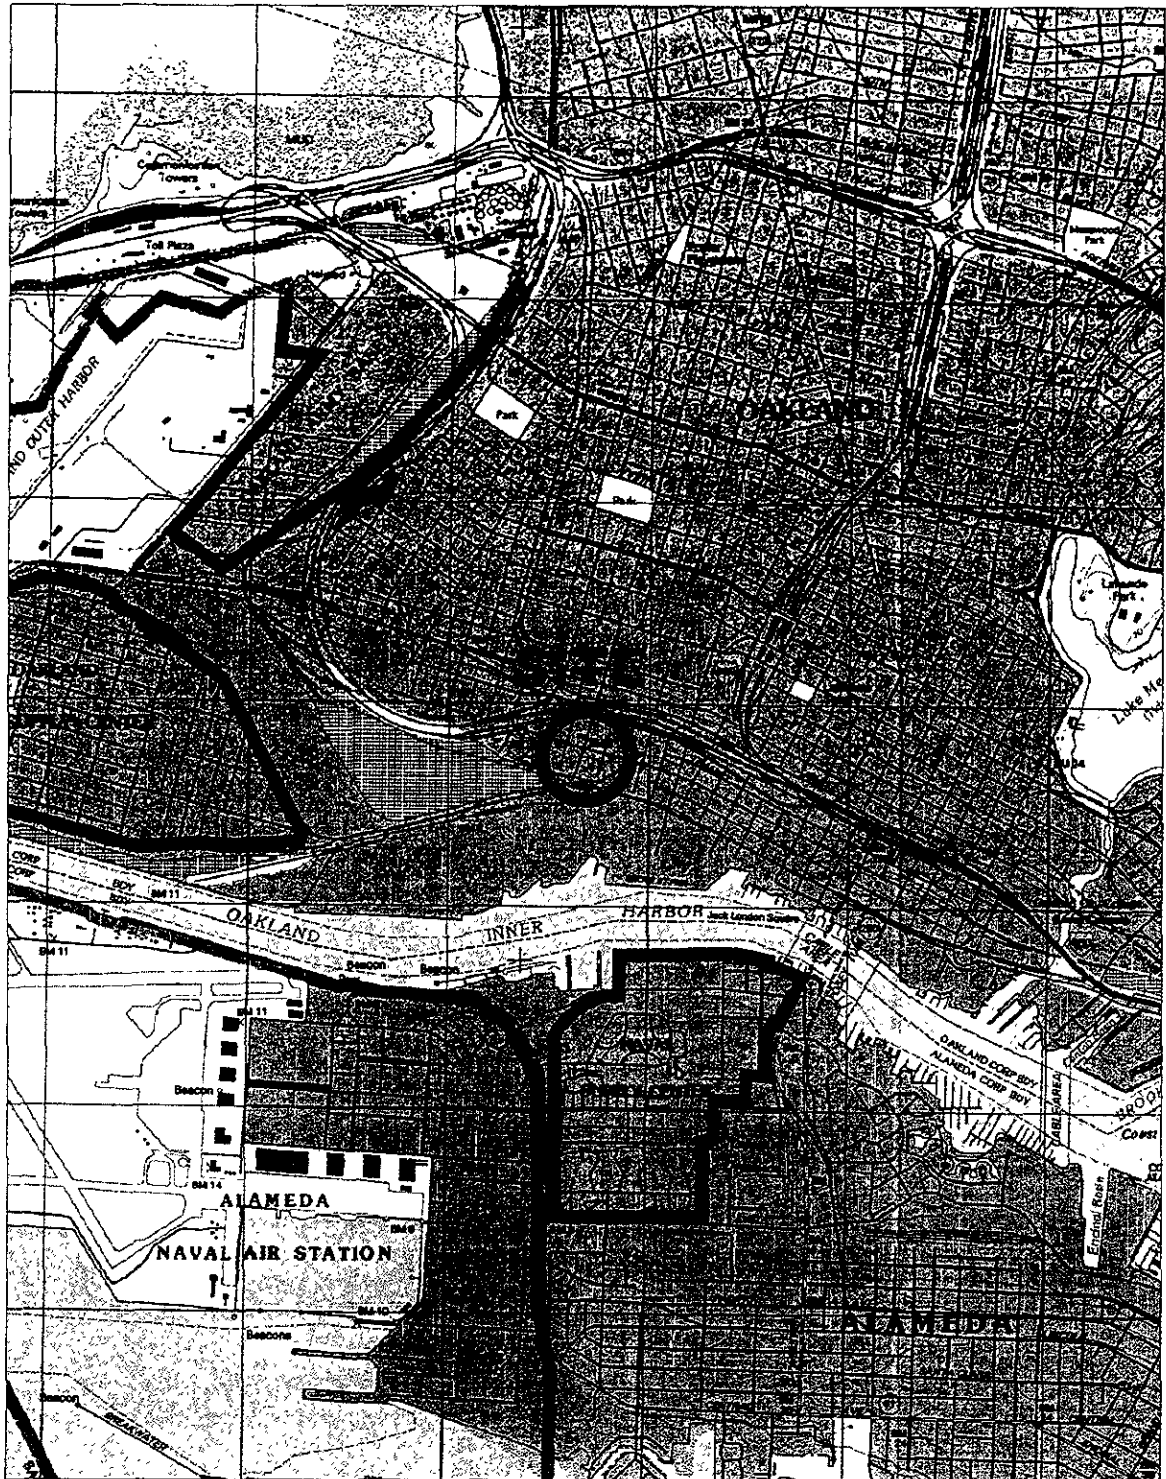

0 2000 4000 FEET
SCALE




Map Source U S G S 7 5' Map Series
topographic quadrangle map
Oakland West-1943
photorevised 1993

SITE LOCATION MAP

Aramark Uniform Services
330 Chestnut Street
Oakland, California



File. S1494001	Date 3/25/04	PM DB	R.G./P.E. MTZ	PROJECT NO S1494-1	FIGURE 1
-------------------	-----------------	----------	------------------	-----------------------	--------------------

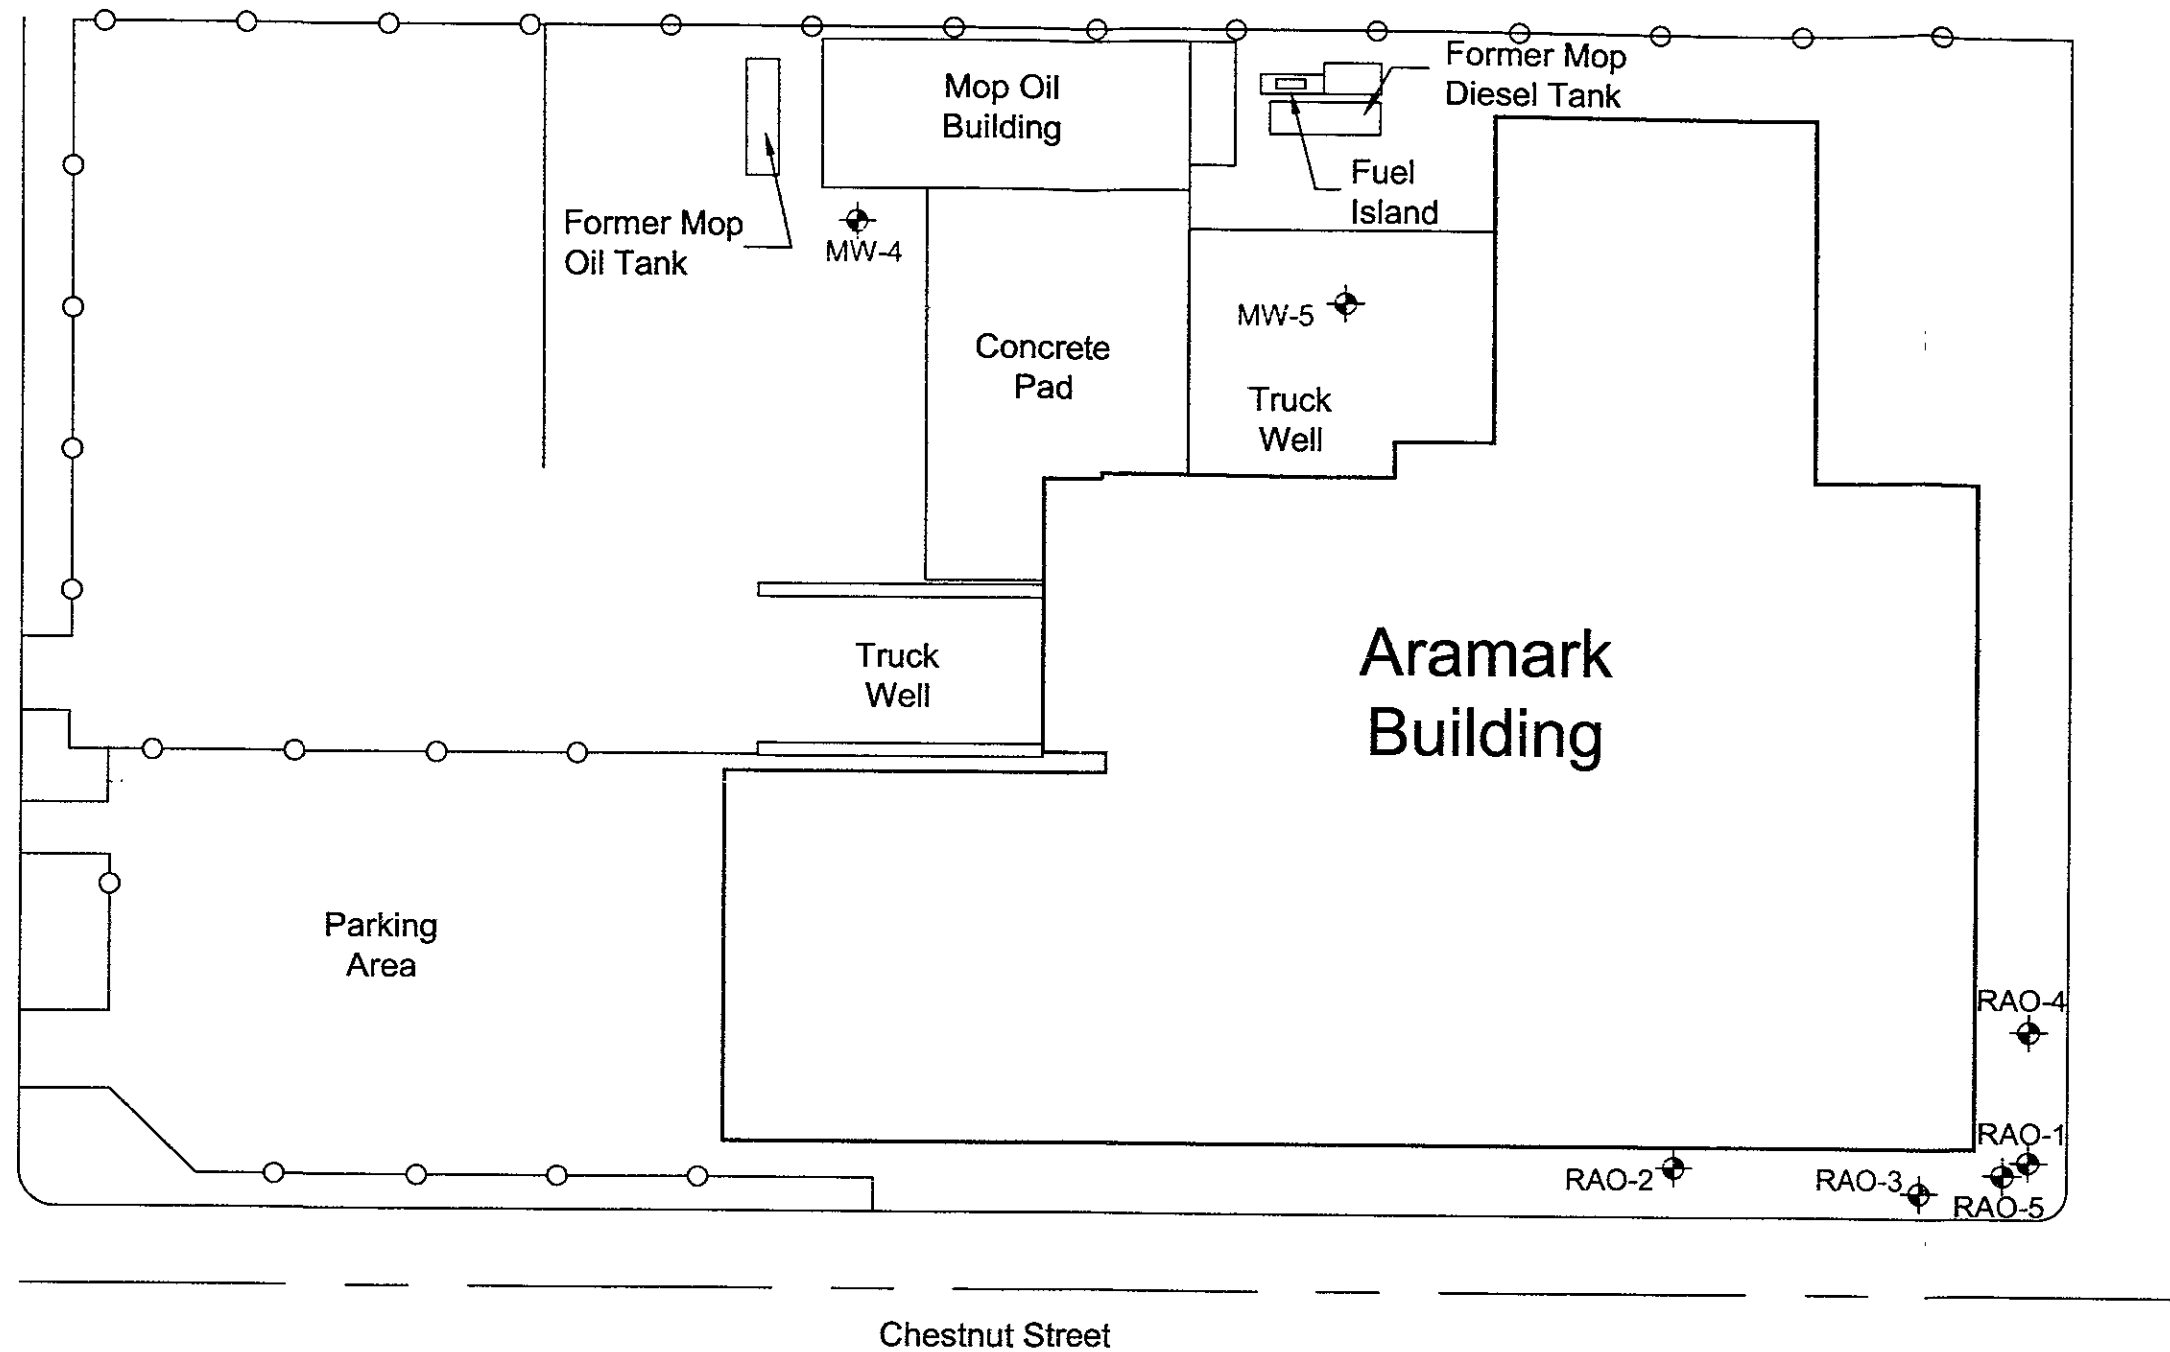

Legend

- MW-4 Former Monitoring Well Location
- Chain-Link Fence

File	PM	PE/RG
S1494002	DB	MZ



Monitoring Well Location Map

Aramark Uniform Services
330 Chestnut Street
Oakland, California

Project Number	S1494 01	Figure 2
Date	March 22, 2004	