

Mr. Jerry Wickham Santa Clara County Department of Environmental Health 1555 Berger Drive, Suite 300 San Jose, California 95112 **RECEIVED**

9:22 am, Nov 15, 2010

Alameda County Environmental Health

November 12, 2009

Re: Third Quarter 2010 Quarterly

Groundwater Monitoring Report

Shell Service Station 4895 Hacienda Dr. Dublin, California

Dear Mr. Wickham:

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge.

Sincerely, Shell Oil Products US

Sam Brenneke's Project Manager

Som & Bunnel

November 12, 2010 DELTA Project No. SCA4895H1D SAP No. 165112

Mr. Jerry Wickham, PG, CEG, CHG Alameda County Environmental Health 1131 Harbor Bay Parkway, Suite 250 Alameda, California 94502

Re: THIRD QUARTER 2010

GROUNDWATER MONITORING REPORT

Shell-branded Service Station 4895 Hacienda Drive Dublin, California

Dear Mr. Wickham:

On behalf of Equilon Enterprises LLC *dba* Shell Oil Products US (Shell), Delta Consultants (Delta) has prepared this *Third Quarter 2010 Groundwater Monitoring Report* for the above referenced site. The sampling activities at the site were conducted by Blaine Tech Services, Inc. (Blaine Tech) under direct contract to Shell and included the collection of groundwater samples and static water level measurements. Delta did not provide any oversight of Blaine Tech's work or protocol. A Delta staff member, under the supervision of a California Registered Civil Engineer or a California Professional Geologist, performed evaluation of the data provided to us.

This report represents Delta's professional opinions based upon the currently available information and are arrived at in accordance with currently acceptable professional standards. This report is based upon a specific scope of work requested by the client. The Contract between Delta and its client outlines the scope of work, and only those tasks specifically authorized by that contract or outlined in this report were performed. This report is intended only for the use of Delta's Client and anyone else specifically listed on this report. Delta will not and cannot be liable for unauthorized reliance by any other third party. Other than as contained in this paragraph, Delta makes no express or implied warranty as to the contents of this report.



November 12, 2010 Third Quarter 2010 Groundwater Monitoring Report 4895 Hacienda Drive, Dublin, California Page 2

This site is part of a portfolio of sites which have been transitioned to a new consultant, Conestoga-Rovers & Associates (CRA). The CRA project manager for this site is Peter Schaefer; he can be contacted directly at (510) 420-3319. If you have any questions regarding this report, please contact Regina Bussard (Delta Project Manager) at (408) 826-1876 or Denis Brown (Shell Project Manager) at (707) 865-0251.

Sincerely,

Delta Consultants

Regina Bussard, P.G.

Project Manager

REGINA M.
BUSSARD
No. 8288
EXP. 1/3/1/2

Attachment: Third Quarter 2010 Groundwater Monitoring Report

cc: Mr. Denis Brown, Shell Oil Products US, Carson

Mr. Carl Cox, C and J Cox Corporation, Pleasanton

Ms. Cheryl Dizon, Zone 7 Water Agency, Livermore

November 12, 2010 Third Quarter 2010 Groundwater Monitoring Report 4895 Hacienda Drive, Dublin, California Page 3

SHELL MONITORING REPORT

| Station Address: | 4895 Hacienda Drive, Dublin, California |
|-------------------------------------|---|
| DELTA Project No.: | SCA4895H1D |
| SHELL Project Manager / Phone No.: | Denis Brown / (707) 865-0251 |
| DELTA Site Manager / Phone No.: | Regina Bussard / (408) 826-1876 |
| Primary Agency / Regulatory ID No.: | Alameda County Environmental Health / Mr. Jerry Wickham |
| Other Agencies to Receive Copies: | Zone 7 Water Agency / Ms. Cheryl Dizon |

WORK PERFORMED THIS QUARTER (THIRD -2010):

- 1. Submitted the 2Q10 quarterly groundwater monitoring report.
- 2. Performed 3Q10 quarterly groundwater monitoring and sampling on August 5, 2010.
- 3. Completed a sensitive receptor survey and submitted a site assessment work plan dated **September 10**, **2010**.

WORK PROPOSED FOR QUARTER (FOURTH – 2010):

- 1. Submit the 3Q10 quarterly groundwater monitoring report.
- 2. Perform 4Q10 quarterly groundwater monitoring and sampling.
- 3. Perform additional site assessment per the September 10, 2010 work plan.

| Current Phase of Project: | Groundwater monitoring |
|---|---|
| Site Use: | Shell-branded Service Station |
| Frequency of Sampling: | Quarterly |
| Frequency of Monitoring: | Quarterly |
| Is Separate Phase Hydrocarbon Present On-site (Well #'s): | ☐ Yes ☐ No |
| Cumulative SPH Recovered to Date: | None |
| SPH Recovered This Quarter: | None |
| Cumulative Groundwater Recovered to Date: | 1,096.6 gallons since 1Q10 |
| Groundwater Recovered This Quarter: | 161.4 gallons recovered during sampling on August 5, 2010. |
| Sensitive Receptor(s) and Respective Direction(s): | 3S/1E-5K1 located 1,750 feet southeast of the site (owned by the Alameda Sugar Company) |
| General Site Lithology: | Low permeability clay to 20 feet bgs, permeable sandy clay from 20 to 30 ft. Layers of clayey sand and sand were observed at 40 to 43 ft and at 55 ft interbedded with low permeability clay. |
| Current Remediation Techniques: | None |
| Permits for Discharge: | None |
| Approximate Depth to Groundwater: | 12.98 to 14.34 feet below top of well casing – groundwater is locally confined |
| Groundwater Gradient: | South-southeast at 0.002 ft/ft |
| Current Agency Correspondence: | Alameda County Environmental Health October 15, 2010 (Appendix A) |

November 12, 2010 Third Quarter 2010 Groundwater Monitoring Report 4895 Hacienda Drive, Dublin, California Page 4

SHELL MONITORING REPORT (CONT.)

| Date of Most Recent Work Plan Approval: | October 15, 2010 |
|---|------------------|
| Site History: | |
| Case Opening | 2008 |
| Onsite Assessment | 2010 |
| Offsite Assessment | NA |
| Passive Remediation | NA |
| Active Remediation | NA |
| Closure | NA |
| Summary of Unusual Activity: | None |

Comments:

During the quarterly event on August 5, 2010, total petroleum hydrocarbons as gasoline (TPH-g) [reported as total purgeable petroleum hydrocarbons] were detected in Well MW-5 at a concentration of 310 micrograms per liter (μ g/L) and in Well MW-6 at a concentration of 53 μ g/L. Methyl-tert butyl ether (MTBE) was detected in wells MW-2, MW-3, MW-5 and MW-6 at concentrations ranging from 4.0 μ g/L (MW-6) to 250 μ g/L (MW-5). Tert-butyl alcohol (TBA) was only detected in well MW-5 at a concentration of 39 μ g/L. The fourth quarter analyte concentrations are generally consistent with previous data except in Well MW-2, where MTBE decreased by an order of magnitude from second quarter 2010.

ATTACHMENTS:

Figures:

```
Figure 1 – Site Location Map
```

Figure 2 – Groundwater Elevation Contour Map – 8/5/2010

Figure 3 – Hydrocarbon Distribution in Groundwater Map – 8/5/2010

Table:

Table 1 –Well Concentrations


Appendices:

Appendix A – Agency Correspondence

Appendix B – Blaine Tech Services, Inc. Field Data Sheets

Appendix C – Blaine Tech Services, Inc. Field Procedures

Appendix D – Certified Analytical Report with Chain-of-Custody Documentation









APPROX. SCALE


FIGURE 1

SITE LOCATION MAP

SHELL-BRANDED SERVICE STATION 4895 HACIENDA DRIVE DUBLIN, CALIFORNIA

| | - , - |
|--------------------------|---------------------------|
| PROJECT NO. SCA4895H1 | DRAWN BY AD SEPT, 2009 |
| FILE NO. | PREPARED BY |
| | AD |
| REVISION NO. | REVIEWED BY |
| 2 | |



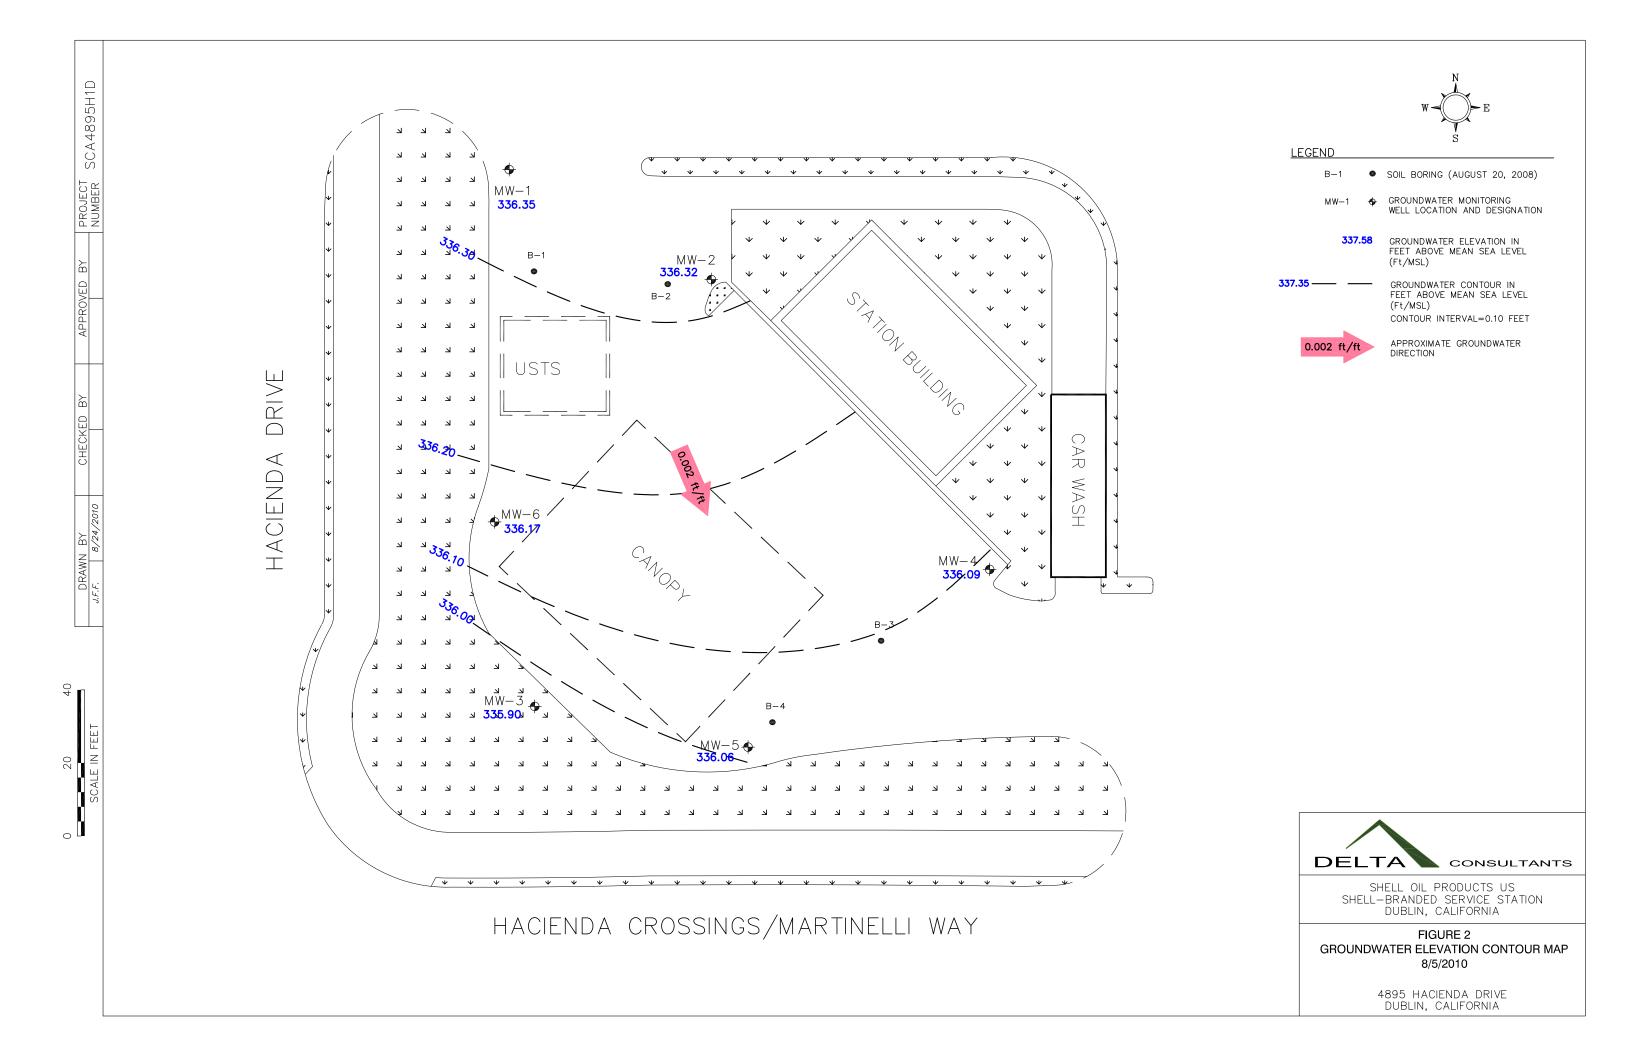

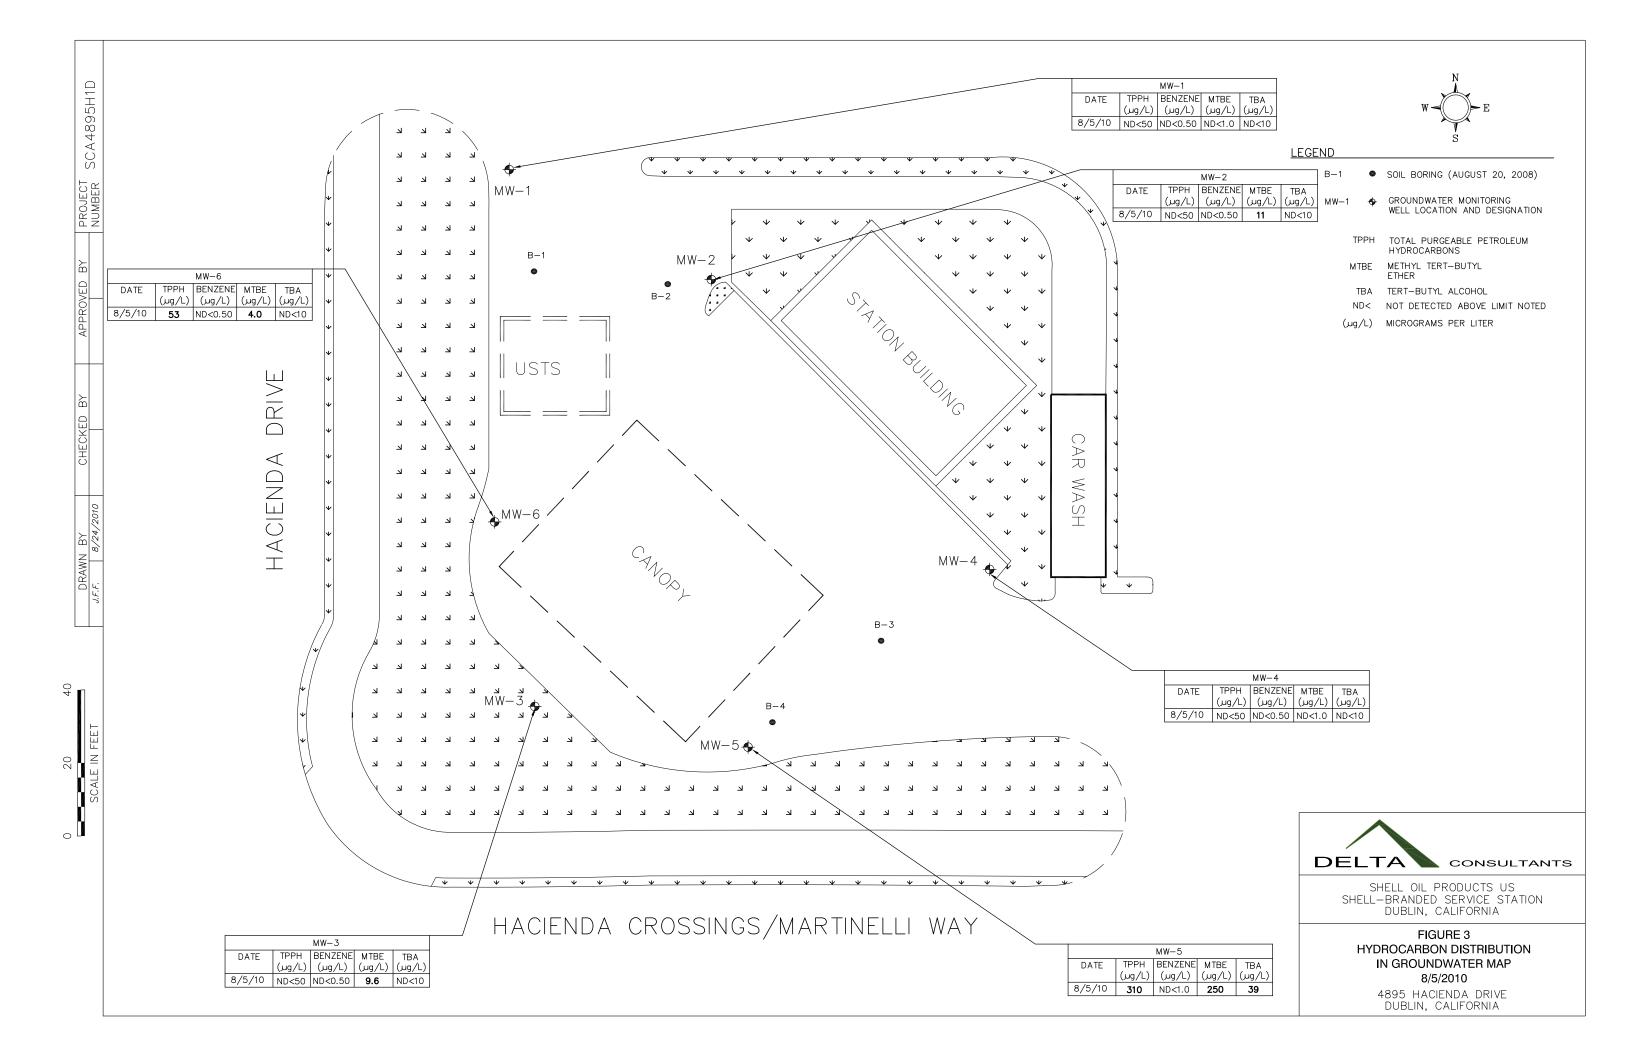




TABLE 1 WELL CONCENTRATIONS Shell-branded Service Station 4895 Hacienda Drive Dublin, CA

| | | | | | | | | | | | | | | Depth to | GW | DO |
|---------|-----------|----------|---|------------|---|--------|--------|----------|--------|--------|--------|--------|--------|----------|-----------|----------|
| Well ID | Date | TPPH | TEPH | В | Т | Е | Х | MTBE | DIPE | ETBE | TAME | ТВА | тос | Water | Elevation | Reading |
| | 24.0 | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (ug/L) | (MSL) | (ft.) | (MSL) | (ppm) |
| | | (0 / | \ | \ 0 / | \ | \ 0 / | () / | (0 / | (0 / | (0 / | (0) | () / | , | | , , | <u> </u> |
| MW-1 | 3/15/2010 | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | 349.33 | 11.65 | 337.68 | NA |
| MW-1 | 3/19/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | <1.0 | <2.0 | <2.0 | <2.0 | <10 | 349.33 | 11.75 | 337.58 | NA |
| MW-1 | 5/6/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | <1.0 | <2.0 | <2.0 | <2.0 | <10 | 349.33 | 11.99 | 337.34 | NA |
| MW-1 | 8/5/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | <1.0 | <2.0 | <2.0 | <2.0 | <10 | 349.33 | 12.98 | 336.35 | NA |
| | | | | | | | | | | | | | | | | |
| MW-2 | 3/15/2010 | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | 350.66 | 12.95 | 337.71 | NA |
| MW-2 | 3/19/2010 | 230 | <50 a | < 0.50 | <1.0 | <1.0 | <1.0 | 180 | <2.0 | <2.0 | <2.0 | <10 | 350.66 | 13.16 | 337.50 | NA |
| MW-2 | 5/6/2010 | 100 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 130 | <2.0 | <2.0 | <2.0 | <10 | 350.66 | 13.32 | 337.34 | NA |
| MW-2 | 8/5/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 11 | <2.0 | <2.0 | <2.0 | <10 | 350.66 | 14.34 | 336.32 | NA |
| | | | | | | | | | | | | | | | | |
| MW-3 | 3/15/2010 | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | 350.18 | 12.62 | 337.56 | NA |
| MW-3 | 3/19/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 11 | <2.0 | <2.0 | <2.0 | <10 | 350.18 | 12.84 | 337.34 | NA |
| MW-3 | 5/6/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 6.9 | <2.0 | <2.0 | <2.0 | <10 | 350.18 | 13.51 | 336.67 | NA |
| MW-3 | 8/5/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 9.6 | <2.0 | <2.0 | <2.0 | <10 | 350.18 | 14.28 | 335.90 | NA |
| | | | | | | | | | | | | | | | | - |
| MW-4 | 3/15/2010 | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | 350.32 | 12.85 | 337.47 | NA |
| MW-4 | 3/19/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 3.3 | <2.0 | <2.0 | <2.0 | <10 | 350.32 | 12.98 | 337.34 | NA |
| MW-4 | 5/6/2010 | <50 | <50 a | < 0.50 | <1.0 | <1.0 | <1.0 | <1.0 | <2.0 | <2.0 | <2.0 | <10 | 350.32 | 13.35 | 336.97 | NA |
| MW-4 | 8/5/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | <1.0 | <2.0 | <2.0 | <2.0 | <10 | 350.32 | 14.23 | 336.09 | NA |
| F | | | | | | | | | | | | | | | | |
| MW-5 | 3/15/2010 | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | NA | 350.31 | 12.80 | 337.51 | NA |
| MW-5 | 3/19/2010 | 410 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 310 | <2.0 | <2.0 | <2.0 | <10 | 350.31 | 12.99 | 337.32 | NA |
| MW-5 | 5/6/2010 | 160 | <50 a | <1.0 | <2.0 | <2.0 | <2.0 | 210 | <4.0 | <4.0 | <4.0 | <20 | 350.31 | 13.21 | 337.10 | NA |
| MW-5 | 8/5/2010 | 310 | <50 a | <1.0 | <2.0 | <2.0 | <2.0 | 250 | <4.0 | <4.0 | <4.0 | 39 | 350.31 | 14.25 | 336.06 | NA |
| 1414/C | 0/45/0040 | NIA | NIA | NIA | NIA | NIA | NIA | NIA | NIA | NIA | NIA | NIA | 050.00 | 40.70 | 007.50 | NIA |
| MW-6 | 3/15/2010 | NA 50 | NA 50 | NA 0.50 | NA | NA | NA | NA 10 | NA | NA | NA O O | NA | 350.29 | 12.79 | 337.50 | NA |
| MW-6 | 3/19/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 18 | <2.0 | <2.0 | <2.0 | <10 | 350.29 | 12.84 | 337.45 | NA |
| MW-6 | 5/6/2010 | <50 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 7.4 | <2.0 | <2.0 | <2.0 | <10 | 350.29 | 13.14 | 337.15 | NA |
| MW-6 | 8/5/2010 | 53 | <50 a | <0.50 | <1.0 | <1.0 | <1.0 | 4.0 | <2.0 | <2.0 | <2.0 | <10 | 350.29 | 14.12 | 336.17 | NA |

TABLE 1

WELL CONCENTRATIONS

Shell-branded Service Station 4895 Hacienda Drive

| Dublin, | CA |
|---------|----|
|---------|----|

| | | | | | | | | | | | | | | Depth to | GW | DO |
|---------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|----------|-----------|---------|
| Well ID | Date | TPPH | TEPH | В | T | Ε | X | MTBE | DIPE | ETBE | TAME | TBA | TOC | Water | Elevation | Reading |
| | | (ug/L) | (MSL) | (ft.) | (MSL) | (ppm) |

Abbreviations:

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B

TEPH = Total petroleum hydrocarbons as diesel by EPA Method 8015

BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B

MTBE = Methyl tertiary butyl ether by EPA Method 8260B

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260B

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260B

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260B

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260B

TOC = Top of Casing Elevation

GW = Groundwater

DO = Dissolved Oxygen

ug/L = Parts per billion

ppm = Parts per million

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

n/n = Pre-purge/Post-purge Dissolved Oxygen Reading.

NA = Not applicable

ND = Not detected

Notes:

a =The sample extract was subjected to Silica Gel treatment proior to analysis.

Site surevey dated March 19, 2010 provided by Mid Coast Engineers, CA.

APPENDIX A AGENCY CORRESPONDENCE

ALAMEDA COUNTY HEALTH CARE SERVICES AGENCY



ALEX BRISCOE, Director

ENVIRONMENTAL HEALTH SERVICES ENVIRONMENTAL PROTECTION 1131 Harbor Bay Parkway, Suite 250 Alameda, CA 94502-6577 (510) 567-6700 FAX (510) 337-9335

October 14, 2010

Mr. Denis Brown Shell Oil Products US 20945 S. Wilmington Ave. Carson, CA 90810-1039

Carl Cox CJC Hacienda LLC 4431 Stoneridge Drive #100 Pleasanton. CA 94588-8417

Subject: Work Plan Approval for Fuel Leak Case No. RO0002985 and Geotracker Global ID T10000000423, Shell #16-5112, 4895 Hacienda Drive, Dublin, CA 94568

Dear Mr. Brown:

Alameda County Environmental Health (ACEH) staff has reviewed the fuel leak case file for the above referenced site including the documents entitled, "Additional Site Assessment Work Plan," dated September 10, 2010 (Work Plan). The Work Plan, which was prepared by Delta Consultants on behalf of Shell Oil Products, presents plans for soil and groundwater sampling and the installation of one groundwater monitoring well.

The proposed scope of work is acceptable and may be implemented as proposed. We request that you perform the proposed work and send us the reports described below.

TECHNICAL REPORT REQUEST

Please submit technical reports to Alameda County Environmental Health (Attention: Jerry Wickham), according to the following schedule:

- November 13, 2010 Third Quarter 2010 Groundwater Monitoring Report
- February 18, 2011 Site Investigation Report

If you have any questions, please call me at (510) 567-6791 or send me an electronic mail message at jerry.wickham@acgov.org.

Sincerely,

Digitally signed by Jerry Wickham
DN: cn=Jerry Wickham, o=Alameda County
Environmental Health, ou,
email=Jerry.wickham@acgov.org, c=US

Jerry Wickham, California PG 3766, CEG 1177, and CHG 297

Senior Hazardous Materials Specialist

Mr. Denis Brown Mr. Carl Cox RO0002985 October 14, 2010 Page 2

Attachment: Responsible Party(ies) Legal Requirements/Obligations

Enclosure: ACEH Electronic Report Upload (ftp) Instructions

cc: Cheryl Dizon (QIC 8021), Zone 7 Water Agency, 100 North Canyons Pkwy, Livermore, CA 94551 (Sent via E-mail to: cdizon@zone7water.com)

Regina Bussard, Delta Environmental Consultants, Inc., 312 Piercy Road, San Jose, CA 95138 (Sent via E-mail to: RBussard@deltaenv.com)

Suzanne McClurkin-Nelson, Delta Environmental Consultants, Inc., 312 Piercy Road, San Jose, CA 95138 (Sent via E-mail to: SMcClurkin-Nelson@deltaenv.com)

Donna Drogos, ACEH (Sent via E-mail to: donna.drogos@acgov.org)
Jerry Wickham, ACEH (Sent via E-mail to: jerry.wickham@acgov.org)
Geotracker, File

Attachment 1 Responsible Party(ies) Legal Requirements/Obligations

REPORT REQUESTS

These reports are being requested pursuant to California Health and Safety Code Section 25296.10. 23 CCR Sections 2652 through 2654, and 2721 through 2728 outline the responsibilities of a responsible party in response to an unauthorized release from a petroleum UST system, and require your compliance with this request.

ELECTRONIC SUBMITTAL OF REPORTS

ACEH's Environmental Cleanup Oversight Programs (LOP and SLIC) require submission of reports in electronic form. The electronic copy replaces paper copies and is expected to be used for all public information requests, regulatory review, and compliance/enforcement activities. Instructions for submission of electronic documents to the Alameda County Environmental Cleanup Oversight Program FTP site are provided on the attached "Electronic Report Upload Instructions." Submission of reports to the Alameda County FTP site is an addition to existing requirements for electronic submittal of information to the State Water Resources Control Board (SWRCB) GeoTracker website. In September 2004, the SWRCB adopted regulations that require electronic submittal of information for all groundwater cleanup programs. For several years, responsible parties for cleanup of leaks from underground storage tanks (USTs) have been required to submit groundwater analytical data, surveyed locations of monitoring wells, and other data to the GeoTracker database over the Internet. Beginning July 1, 2005, these same reporting requirements were added to Spills, Leaks, Investigations, and Cleanup (SLIC) sites. Beginning July 1, 2005, electronic submittal of a complete copy of all reports for all sites is required in GeoTracker (in PDF format). Please visit the SWRCB website for more information on these requirements (http://www.swrcb.ca.gov/ust/electronic submittal/report rqmts.shtml.

PERJURY STATEMENT

All work plans, technical reports, or technical documents submitted to ACEH must be accompanied by a cover letter from the responsible party that states, at a minimum, the following: "I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge." This letter must be signed by an officer or legally authorized representative of your company. Please include a cover letter satisfying these requirements with all future reports and technical documents submitted for this fuel leak case.

PROFESSIONAL CERTIFICATION & CONCLUSIONS/RECOMMENDATIONS

The California Business and Professions Code (Sections 6735, 6835, and 7835.1) requires that work plans and technical or implementation reports containing geologic or engineering evaluations and/or judgments be performed under the direction of an appropriately registered or certified professional. For your submittal to be considered a valid technical report, you are to present site specific data, data interpretations, and recommendations prepared by an appropriately licensed professional and include the professional registration stamp, signature, and statement of professional certification. Please ensure all that all technical reports submitted for this fuel leak case meet this requirement.

UNDERGROUND STORAGE TANK CLEANUP FUND

Please note that delays in investigation, later reports, or enforcement actions may result in your becoming ineligible to receive grant money from the state's Underground Storage Tank Cleanup Fund (Senate Bill 2004) to reimburse you for the cost of cleanup.

AGENCY OVERSIGHT

If it appears as though significant delays are occurring or reports are not submitted as requested, we will consider referring your case to the Regional Board or other appropriate agency, including the County District Attorney, for possible enforcement actions. California Health and Safety Code, Section 25299.76 authorizes enforcement including administrative action or monetary penalties of up to \$10,000 per day for each day of violation.

Alameda County Environmental Cleanup Oversight Programs (LOP and SLIC)

ISSUE DATE: July 5, 2005

REVISION DATE: July 8, 2010

PREVIOUS REVISIONS: December 16, 2005,

October 31, 2005

SECTION: Miscellaneous Administrative Topics & Procedures

SUBJECT: Electronic Report Upload (ftp) Instructions

The Alameda County Environmental Cleanup Oversight Programs (LOP and SLIC) require submission of all reports in electronic form to the county's ftp site. Paper copies of reports will no longer be accepted. The electronic copy replaces the paper copy and will be used for all public information requests, regulatory review, and compliance/enforcement activities.

REQUIREMENTS

- Entire report including cover letter must be submitted to the ftp site as a single portable document format (PDF) with no password protection. (Please do not submit reports as attachments to electronic mail.)
- It is preferable that reports be converted to PDF format from their original format, (e.g., Microsoft Word) rather than scanned.
- Signature pages and perjury statements must be included and have either original or electronic signature.
- Do not password protect the document. Once indexed and inserted into the correct electronic case file, the document will be secured in compliance with the County's current security standards and a password. Documents with password protection will not be accepted.
- Each page in the PDF document should be rotated in the direction that will make it easiest to read on a computer monitor.
- Reports must be named and saved using the following naming convention:

RO#_Report Name_Year-Month-Date (e.g., RO#5555 WorkPlan 2005-06-14)

Additional Recommendations

A separate copy of the tables in the document should be submitted by e-mail to your Caseworker in Excel format. These are for use by assigned Caseworker only.

Submission Instructions

- 1) Obtain User Name and Password:
 - a) Contact the Alameda County Environmental Health Department to obtain a User Name and Password to upload files to the ftp site.
 - i) Send an e-mail to dehloptoxic@acgov.org

O

- ii) Send a fax on company letterhead to (510) 337-9335, to the attention of Teena Le Khan.
- b) In the subject line of your request, be sure to include "ftp PASSWORD REQUEST" and in the body of your request, include the Contact Information, Site Addresses, and the Case Numbers (RO# available in Geotracker) you will be posting for.
- 2) Upload Files to the ftp Site
 - a) Using Internet Explorer (IE4+), go to ftp://alcoftp1.acgov.org
 - (i) Note: Netscape and Firefox browsers will not open the FTP site.
 - b) Click on Page on upper right side of browser, and then scroll down to Open FTP Site in Windows Explorer.
 - c) Enter your User Name and Password. (Note: Both are Case Sensitive.)
 - d) Open "My Computer" on your computer and navigate to the file(s) you wish to upload to the ftp site.
 - e) With both "My Computer" and the ftp site open in separate windows, drag and drop the file(s) from "My Computer" to the ftp window.
- 3) Send E-mail Notifications to the Environmental Cleanup Oversight Programs
 - a) Send email to dehloptoxic@acgov.org notify us that you have placed a report on our ftp site.
 - b) Copy your Caseworker on the e-mail. Your Caseworker's e-mail address is the entire first name then a period and entire last name @acgov.org. (e.g., firstname.lastname@acgov.org)
 - c) The subject line of the e-mail must start with the RO# followed by **Report Upload**. (e.g., Subject: RO1234 Report Upload) If site is a new case without an RO#, use the street address instead.
 - d) If your document meets the above requirements and you follow the submission instructions, you will receive a notification by email indicating that your document was successfully uploaded to the ftp site.

APPENDIX B

BLAINE TECH SERVICES, INC. FIELD DATA SHEETS

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

| Site Address | 48 | 995 | 4 | au | end | la D | Ç. | Public | C4 | Date _ <u>&</u> | -S-W | - |
|--|--|--|---------------------------|---|-----------------|--|---------------------------------|--|---|--|-----------------|---|
| Job Number | 100 | 805 is | <u>I</u> | · | | Tec | hnician | 40 | | Page | -5-10 Lof_(_ | |
| Well ID | Well Inspected - No Corrective Action Required | Well Box Meets Compliance Requirements | Water Balled From Wellbox | Cap Replaced | Lock Replaced | Well Not Inspected (explain in notes) | New Deficiency Identified | Previously Identified Deficiency Persists | | Notes | | |
| MWY | X | * | | | | | | | | | | |
| how-2 | Y | 文 | | | | | | | | | | |
| Mw-3 | K | X | | | | | | | | | | |
| MW-4 | X | X | | | | · · | | | | | | |
| Mw-5 | X | X | | | | | | | | | | ······································ |
| MW-5 MW-6 | 4 | X | | | | | | | nerena de la compania | TOTAL STATE OF THE | | |
| | | | | | | | | | Mess | The Control of the Co | | - |
| | | | | | | | | | | | · | *************************************** |
| | | | | | | | | - | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | · | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | , | |
| | | | | | | | | | | | | - |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | - | | | | | | | |
| Well box must meet a MONITORING WELL" Notes: | II three (12"or | criteria to less) 3) \ | be co | mpli: TAG | ant: 1 IS PR |) WELL IS ESENT, S | SECURAE ECURE, AI | BLE BY DE: ND CORRE | SIGN (12"or less) 2) V CT | VELL IS MARKED WIT | H THE WORDS | |
| | | | | *************************************** | | | · . | 4 | | | | |
| | | | | | | | | * | | | | |

BLAINE TECH SERVICES, INC.

SAN JOSE

SACRAMENTO

LOS ANGELES

SAN DIEGO

SEATTLE

www.blainetech.com

WELL GAUGING DATA

| Project | # 10080S Juz | Date 8-5-10 | Client | Shell | |
|---------|--------------|-------------|--------|-------|--|
| | | | | | |
| Site | 4895 Hacerda | Dr. Public | cin. | | |

| Well ID | Time | Well Size (in.) | Sheen / Odor | Depth to Immiscible Liquid (ft.) | Thickness of Immiscible Liquid (ft.) | Immiscibles Removed | Depth to water (ft.) | Depth to well bottom (ft.) | Survey Point: TOB or | Notes |
|--------------------------------------|-------|-----------------------|-----------------|--|---|------------------------|----------------------|----------------------------|----------------------|-------|
| MW·(| 0940 | 4 | | | | | 12.98 | 30.27 | | |
| MW-1 MW-2 MW-3 MW-4 MW-5 | 6957 | 4 | | | | | 4734 | 29.92 | | |
| Mw-3 | 946 | 4 | | | | | 14-28 | 25.03 | | |
| NNW-4 | 09 55 | 4 | | | | | 14.23 | 27.32 | | |
| MW-5 | 0949 | 4 | | | | | 14.25 | 29.63 | | |
| MW-6 | 0443 | 4 | | | | | 14.12 | 25.25 | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

| | | SHE: | WELL MO | NITORING D | AT HEET | | | | |
|---------------|--|-----------------|-----------------|---|---|--|--|--|--|
| BTS #: 10 | 0805 - 5080 | 7 | | Site: 4895 | Haesada : | or pulling | | | |
| Sampler: | 02 | | | Date: 8-5-16 | | | | | |
| Well I.D.: | Mw. | | | Well Diameter: 2 3 4 6 8 | | | | | |
| Total Well | Depth (TI |)): | 50.27. | Depth to Wate | r (DTW): 12.9 | Y) | | | |
| Depth to Fi | ree Produc | t: | <u> </u> | Thickness of F | Free Product (fee | et): | | | |
| Referenced | to: | (PVC) | Grade | D.O. Meter (if | req'd): | YSI HACH | | | |
| DTW with | 80% Rech | arge [(F | leight of Water | Column x 0.20 |) + DTW]: \ | 6.44 | | | |
| Purge Method: | Bailer Disposable E Positive Air Electric Subi | Displaceme | Other | Waterra Peristaltic ction Pump Well Diamet 1" 2" 3" | Other: Other: Other: Well O.04 4" O.16 6" O.37 Other Other: O.37 Other O.37 Other | Disposable Bailer Extraction Port Dedicated Tubing Diameter Multiplier 0.65 1.47 | | | |
| 1 Case volume | Speci | iried voidii | Cond. | Turbidity | | | | | |
| Time | Temp (°F) | рН | (mS or (μ\$) | (NTUs) | Gals. Removed | Observations | | | |
| 1002 | 66.6 | 7.64 | 1250 | 225 | 11.2 | dovda | | | |
| 1004 | 66.7 | 7.62 | 1254 | 182 | 22.4 | e- 4 | | | |
| 1006 | 66.3 | 7.59 | 1253 | 144 | 336 | e- "b | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| Did well de | water? | Yes (| Mp | Gallons actuall | y evacuated: | 33.6 | | | |
| Sampling D | ate: 8-5 | -(6 | Sampling Time | e: 1010 | Depth to Water | r: 13.92 | | | |
| Sample I.D. | : New- | (Florancescope) | | Laboratory: (| CalScience Colu | ımbia Other | | | |
| Analyzed fo | or: TPH-G | BTEX | MTBE TPH-D | Oxygenates (5) | Other: See | C07 | | | |
| EB I.D. (if a | applicable) |): | (i) Time | Duplicate I.D. | (if applicable): | | | | |
| Analyzed fo | or: TPH-G | BTEX | МТВЕ ТРН-D | Oxygenates (5) | Other: | | | | |
| D.O. (if req' | 'd): Pr | e-purge: | | mg/L P | ost-purge: | mg/L | | | |

mV

Post-purge:

Post-purge:

mV

D.O. (if req'd):

O.R.P. (if req'd):

Pre-purge:

Pre-purge:

| SHE: WELL MONITORING DAT HEET | | | | | | | | | | | |
|-------------------------------|---|-----------------|------------------------------|--------------------------------------|---|---|--|--|--|--|--|
| BTS #: 100 | 0805 507 | 7 | <u> </u> | Site: 4895 | Haesada : | or pulling | | | | | |
| Sampler: | 02 | · · · · | | Date: 8-5-16 | | | | | | | |
| Well I.D.: | MW-2 | 24-45 | Z (1) | Well Diameter: 2 3 4 6 8 | | | | | | | |
| Total Well | Depth (TI |)): Z9. | 47 | Depth to Water (DTW): 14.34 | | | | | | | |
| Depth to Fr | ee Produc | t: | | | Free Product (fee | • | | | | | |
| Referenced | | (PVC) | Grade | D.O. Meter (if | req'd): | YSI HACH | | | | | |
| DTW with | 80% Rech | arge [(H | leight of Water | Column x 0.20 |) + DTW]: \[\frac{1}{3} | 7-46 | | | | | |
| Purge Method: | Bailer Disposable B Positive Air I Electric Subr | Displaceme | | Waterra Peristaltic ction Pump | Sampling Method: | Disposable Bailer Extraction Port Dedicated Tubing | | | | | |
| l Case Volume | Gals.) X Speci | J fied Volum | = 30-3 ces Calculated Vo | | er Multiplier Well I 0.04 4" 0.16 6" 0.37 Other | Diameter Multiplier 0.65 1.47 r radius ^{2 *} 0.163 | | | | | |
| Time | Temp (°F) | рН | Cond. (mS or (uS) | Turbidity (NTUs) | Gals. Removed | Observations | | | | | |
| 1131 | C9.(| 7.61 | 2506 | 331 | 10.1 | clarky | | | | | |
| 1133 | 649 | 7.51 | 2510 | 327 | 2012 | u h | | | | | |
| 1135 | 67.9 | 7.45 | 2503 | 36 | 30,3 | a y | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| Did well dev | water? | Yes | No | Gallons actuall | y evacuated: | 30.3 | | | | | |
| Sampling D | ate: 8-5 | ~(6 | Sampling Time | e: 1140 | Depth to Water | r: 15-17 | | | | | |
| Sample I.D. | : Nw | 2 | | Laboratory: (| CalScience Colu | ımbia Other | | | | | |
| Analyzed fo | Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See cor | | | | | | | | | | |
| EB I.D. (if a | pplicable) | • | @ Time | Duplicate I.D. (if applicable): | | | | | | | |
| Analyzed for | r: TPH-G | BTEX | MTBE TPH-D | Oxygenates (5) | Other: | • | | | | | |

D.O. (if req'd):

O.R.P. (if req'd):

Pre-purge:

Pre-purge:

Post-purge:

Post-purge:

mg/L

mV

mg/_l

WELL MONITORING DAT SHE: HEET 100805 - 507 BTS#: Site: 4895 Huerada DC 8-5-10 Date: Sampler: 8 Well I.D.: Well Diameter: 2 6 Total Well Depth (TD): 2503 Depth to Water (DTW): 14.28 Thickness of Free Product (feet): Depth to Free Product: D.O. Meter (if req'd): Referenced to: (PVC) Grade YSI HACH 16.43 DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: Baile Purge Method: Sampling Method: Bailer Waterra Disposable Bailer Disposable Bailer Peristaltic Positive Air Displacement Extraction Port Extraction Pump Electric Submersible Dedicated Tubing Other Other: Well Diameter Multiplier Well Diameter Multiplier 0.04 0.65 2" 0.16 (Gals.) X Gals. $radius^2 * 0.163$ 3" 0.37 Other 1 Case Volume Specified Volumes Calculated Volume Cond. Turbidity (mS or (uS)) Temp (°F) Time (NTUs) Gals. Removed Observations рН 7.41 647 1050 64.8 1051 13.8 64.9 1053 107 Did well dewater? No Gallons actually evacuated: Yes 2017 Sampling Time: Sampling Date: 8-5-16 Depth to Water: 1100 1591 Sample I.D.: Now 3 Laboratory: CalScience Columbia

Oxygenates (5)

Oxygenates (5)

nig/L

mV

Other:

Other:

Post-purge:

Post-purge:

Duplicate I.D. (if applicable):

Analyzed for:

Analyzed for:

D.O. (if req'd):

O.R.P. (if req'd):

EB I.D. (if applicable):

TPH-G

TPH-G

BTEX

BTEX

Pre-purge:

Pre-purge:

MTBE

MTBE

(a)

TPH-D

TPH-D

See cor

mg/

| | | SHE | WELL MO | NITORING D. | AT HEET | | | | | | | |
|---------------------|---|-----------------|-----------------------------------|---------------------------------|----------------------------------|---|--|--|--|--|--|--|
| BTS #: 100 | 1805 - 508 | , | | Site: 4895 | Haciada ? | or pullin | | | | | | |
| Sampler: | 02 | | | Date: 8-5-16 | | | | | | | | |
| Well I.D.: | Mw. L | { | | Well Diameter: 2 3 4 6 8 | | | | | | | | |
| Total Well | Depth (TD |): Z | 7.32 | Depth to Water (DTW): 14-23 | | | | | | | | |
| Depth to Fr | ee Product | | | Thickness of F | ree Product (fee | et): | | | | | | |
| Referenced | | (PVC) | Grade | D.O. Meter (if req'd): YSI HACH | | | | | | | | |
| DTW with | 80% Rech | arge [(H | leight of Water | Column x 0.20) |) + DTW]: | 16.95 | | | | | | |
| Purge Method: | Bailer Disposable B Positive Air I Electric Subn | Displaceme | nt Extrac Other_ | Waterra Peristaltic | Sampling Method: | Bailer Disposable Bailer Extraction Port Dedicated Tubing | | | | | | |
| 8,5 (C) Case Volume | Gals.) X Speci | 5 fied Volum | = <u>U,5</u> nes Calculated Vo | 11 7" | 0.04 4" 0.16 6" 0.37 Other | Diameter Multiplier 0.65 1.47 radius² * 0.163 | | | | | | |
| Time | Temp (°F) | рН | Cond. (mS or µS) | Turbidity (NTUs) | Gals. Removed | Observations | | | | | | |
| 4011 | 67.2 | 7.63 | 2362 | 629 | 8.5 | dady | | | | | | |
| 1109 | 673 | 7.29 | 2360 | 582 | 11.0 | re of | | | | | | |
| 1111 | 62.3 | 7.25 | 2361 | 524 | 25.5 | ~ 1 | | | | | | |
| | | , | · | | | | | | | | | |
| | | | | | | 45.5 | | | | | | |
| Did well der | water? | Yes | No | Gallons actuall | y evacuated: 1 | 5.5 | | | | | | |
| Sampling D | ate: 8-5 | ~(6 | Sampling Time | e: 1115 | Depth to Water | r: 15.29 | | | | | | |
| Sample I.D. | : Nw | 4 | | Laboratory: (| CalScience Colu | ımbia Other | | | | | | |
| Analyzed fo | | BTEX | МТВЕ ТРН-D | Oxygenates (5) | Other: See | C07 | | | | | | |
| EB I.D. (if a | pplicable) | | @ Time | Duplicate I.D. | | | | | | | | |
| Analyzed fo | | BTEX | MTBE TPH-D | Oxygenates (5) | Other: | | | | | | | |
| D.O. (if reg' | d): Pr | e-purge: | | mg/L P | ost-purge: | mg/L | | | | | | |

O.R.P. (if req'd):

Pre-purge:

mV

Post-purge:

| | | SHE: | WELL MO | NITORING | DAT HEET | | | | | | |
|---------------|---|-----------------|---|-----------------------------------|------------------|--|--|--|--|--|--|
| BTS #: 100 | 0805 - 5080 | · | | Site: 4895 | Huerada | or public | | | | | |
| Sampler: | 10 | | | Date: 8-5 | 5= 10 | | | | | | |
| Well I.D.: | | | | Well Diameter: 2 3 4 6 8 | | | | | | | |
| Total Well | Depth (TE |)): 20 | 1.63 | Depth to Water (DTW): 14.25 | | | | | | | |
| Depth to Fr | ee Produc | | | Thickness of Free Product (feet): | | | | | | | |
| Referenced | to: | (PVC) | Grade | D.O. Meter (i | f req'd): | YSI HACH | | | | | |
| DTW with | 80% Rech | arge [(H | leight of Water | Column x 0.20 | 0) + DTW]: | (7-33 | | | | | |
| Purge Method: | Bailer Disposable B Positive Air I Electric Subr | Displaceme | | Waterra Peristaltic | , - | | | | | | |
| Case Volume | Gals.) X Speci | 3 fied Volum | = 247 $Calculated Vo$ | 11 (" | | 0.65 1.47 | | | | | |
| Time | Temp (°F) | рН | Cond. (mS or µS) | Turbidity (NTUs) | Gals. Removed | Observations | | | | | |
| 1032 | 659 | 7.56 | NSZ | 43 | 9.9 | | | | | | |
| 1034 | 65.7 | 7.48 | लझ | 39 | 19.8 | | | | | | |
| 1036 | 65.7 | 11.5 | 1962 | 33 | 29.7 | | | | | | |
| | | | | | | | | | | | |
| Did well de | water? | Yes (| Ng | Gallons actual | ly evacuated: | 29.7 | | | | | |
| Sampling D | ate: 8-5 | -(6 | Sampling Time | e: 1046 | Depth to Wate | er: US, GC | | | | | |
| Sample I.D. | : New- | 5 | | Laboratory: (| CalScience Goli | umbia Other | | | | | |
| Analyzed fo | r: TPH-G | ВТЕХ | MTBE TPH-D | Oxygenates (5) | Other: See | cor | | | | | |
| EB I.D. (if a | pplicable) | • 8 | (i) Time | Duplicate I.D. | (if applicable): | | | | | | |
| Analyzed fo | r: трн-G | ВТЕХ | MTBE TPH-D | Oxygenates (5) | Other: | egergreit phriodoxia salaina (a la characa militarra un passando de enconda aconda per combo mandro (a la characa de la characa de enconda aconda per combo militarra (a la characa de enconda aconda per combo militarra (a la characa de enconda aconda per combo de enconda de e | | | | | |
| D.O. (if req' | d): Pr | e-purge: | 8-12-1-12-13-13-13-13-13-13-13-13-13-13-13-13-13- | nig/L | Post-purge: | mg/ _L | | | | | |

O.R.P. (if req'd):

Pre-purge:

mV

Post-purge:

SHE: WELL MONITORING DAT HEET

| BTS #: 100 | 1805 - 508 | ? | * 12 | Site: 4095 | Huerada | or pulling | | | | | | |
|----------------|---|-----------------|---|---|---|--|--|--|--|--|--|--|
| Sampler: | OL | | | Date: \$ -5-16 | | | | | | | | |
| Well I.D.: | mu. ¢ | > | | Well Diameter: 2 3 4 6 8 | | | | | | | | |
| Total Well | Depth (TD |)): US | .25 | Depth to Water (DTW): 1412 | | | | | | | | |
| Depth to Fr | ee Product | t: | | Thickness of Free Product (feet): | | | | | | | | |
| Referenced | to: | (PVC) | Grade | D.O. Meter (if req'd): YSI HACH | | | | | | | | |
| DTW with | 80% Rech | arge [(F | leight of Water | Column x 0.20 |) + DTW]: | 16 35 | | | | | | |
| Purge Method: | Bailer Disposable B Positive Air I Electric Subn | Displaceme | ent Extrac | Waterra Peristaltic ction Pump Well Diamete | Sampling Method Other or Multiplier Well 0.04 4" | Disposable Bailer Extraction Port Dedicated Tubing | | | | | | |
| 7.7 (Company) | Gals.) X Speci | S fied Volum | $\frac{1}{1} = \frac{2}{3}$ $\frac{1}{1}$ $\frac{1}{1}$ Calculated Vo | _ Gals. 2" lume 3" | 0.16 6" 0.37 Othe | 1.47 er radius ² * 0.163 | | | | | | |
| Time | Temp (°F) | pН | Cond. (mS or (uS) | Turbidity (NTUs) | Gals. Removed | Observations | | | | | | |
| 1016 | 64.2 | 2,53 | 2563 | 17(| 12 | | | | | | | |
| 1017 | 64.5 | 752 | 2567 | 118 | 14.4 | | | | | | | |
| (0)[9 | 64-8 | 7.47 | 2569 | (03 | 2.6 | | | | | | | |
| ender Ej de | | | - | 44. | | | | | | | | |
| | | | | | | | | | | | | |
| Did well de | water? | Yes (| No | Gallons actuall | y evacuated: | 216 | | | | | | |
| Sampling D | ate: 8-5 | 46 | Sampling Time | e: 1025 | Depth to Wate | r: 15.22 | | | | | | |
| Sample I.D. | : Nu- | 6 | | Laboratory: (| CalScience Colu | ımbia Other | | | | | | |
| Analyzed fo | r: TPH-G | BTEX | MTBE TPH-D | Oxygenates (5) | Other: See | C07 8 | | | | | | |
| EB I.D. (if a | pplicable) | • | (i) Time | Duplicate I.D. | (if applicable): | | | | | | | |
| Analyzed fo | r: TPH-G | BTEX | MTBE TPH-D | Oxygenates (5) | Other: | | | | | | | |
| D.O. (if req' | d): Pr | e-purge: | | mg/ _L P | ost-purge: | mg/ _L | | | | | | |
| O.R.P. (if re | a'd): Pr | e-nurge | _ | mV P | ost-niirge: | mV | | | | | | |

SHELL SITE INSPECTION CHECKLIST

| Client | Shell | | Date _ | 5/7 | 10 | |
|--------------------------------|---|-------------|----------|----------|----|-----|
| Site Address | 4895 Havenda Dr. Dublin | | | | | |
| Job Number | 100507-BWZ Te | chnician _ | Br | <u> </u> | | |
| Site Status | Shell Branded Station Va | cant Lot | Other | | | |
| | abeled / Cleaned - all wells on Scope Of V | | | | | |
| Inspected / Cl | eaned Components - all other identifiable | e wells | | | 本 | N/A |
| Inspected site | e for site investigation & site remediation | related tri | p hazar | ds [| 图 | |
| Completed all | outstanding BLAINE Wellhead Repair O | rder(s) | | [2 | Z, | N/A |
| Completed Sh | nell Wellhead Repair Form(s) | | | [2 | 囚 | N/A |
| _ | ntment / remediation system compound for appearance | or security | , | | | N/A |
| • | ant lot for signs of habitation, hazardous own vegetation and security | materials | or | | | N/A |
| Visually inspe | cted site drums for condition and proper | · labeling | | | | N/A |
| Unresolved de form(s) compl | eficiencies identified - "Notice of Deficien eted | t Conditio | n" | 1 | | N/A |
| Notes | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | PROJECT MANAGER ON | 1LY | | | | |
| Checklist Revi | ewed Notes Initial/Date | | | | | |

BLAINE TECH SERVICES, INC.

SAN JOSE

SACRAMENTO

LOS ANGELES

SAN DIEGO

SEATTLE

www.blainetech.com

SHELL WELLHEAD REPAIR FORM

(FOR REPAIR TECHNICIAN)

| Site Address | 4895 Havienda Dr. Dublin | | | | | | | | | | Date | 5/7 | 10 | | | | | | |
|--|---|----------------------------------|---------------|-------------------|---------|--|--------------|---------------|-------|-------------|-------------|---|---|------------------|--|---------------------------------------|-----------------------|--|---|
| Job Number | 100507-BW2 Technician BW | | | | | | | | Page | î of |) gaptions. | | | | | | | | |
| Check Indicates deficiency | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | s | | | | | |
| Inspection | eaned, ner Require | | * | Seal | | | | | | | | y Desi | ords WELL' | ίος | y Desi | es) | pleted | siencie | ciencie otice of tion - |
| Point | cted, Cl No Furti Action | ed Cap | od Loc | od Lid | | Seal | solts | acture | | zard | rade | rable t | ed with s | eficier | rable b an 12" o | t Insp in not | rs Corr | ig Defii into BL rder | ng Defi onto No Condi |
| (Well ID or description of location) | Well Inspected, Cleaned, Labeled - No Further Corrective Action Required | Replaced Cap | Replaced Lock | Replaced Lid Seal | Casing | Annular Seal | Tabs / Bolts | Box Structure | Apron | Trip Hazard | Below Grade | Not Securable by Design (12" diameter or less) | Lid not marked with words "MONITORING WELL" | Other Deficiency | Not Securable by Design (greater than 12" diameter) | Well Not Inspected (explain in notes) | All Repairs Completed | Remaining Deficiencies Logged onto BLAINE Repair Order | Remaining Deficiencies Logged onto Notice of Deficient Condition - BLAINE Unable to Repair |
| location | ŏ Ľ ≪ | œ | æ | Ж | O | Ā | \ \ \ | ā | ₹ | F | B | žΞ | Lia "N | 0 | ΣŌ | (e × | \ \{\bar{4}\} | 272 | شەرىي |
| | Niotos | (C) | 1 | | | | <u></u> | | | agreement. | | | | | | | | | enseennesellovenesellovenes |
| MW-1 | Notes: Retapped 7z Tabs - Tagged Well box type / size: 12" Morrison Materials used: 2 bolts | | | | | | | | | | | | | | | | | | |
| | vveii bo | х туре | e / SIZE | 17 | 1 | 18F | 100 |) N | | | · | | IVI | ateriai | s used: | 2 | bol 15 | | |
| | | | | | | <u>, </u> | 力 | | | | | | | | | | | | |
| MW-Z | Notes: | K | eta | pple | | 1/2 | | 65 | | Tag | ge | | | | | | | | |
| | Well bo | x type | / size | 12 | · · · · | M |)(1) | 56n | L | · · · | | | Ма | aterials | s used: | 2 | bolts | į. | |
| | | | | | | | X | | | | | | | | | | \prec | | |
| MW-3 | Notes: | Notes: Retapped 1/2 Tabs- Tagged | | | | | | | | | | | | | | | | | |
| ' | Well box type / size: 12" Morrison Materials used: 2 bolts | | | | | | | | | | | | | | | | | | |
| | | | | | | | 4 | | | | | | | | | | 7 | | |
| MW-4 | Notes: Retarded 3/2 Tabs- Tagged | | | | | | | | | | | | | | | | | | |
|) | Well box | type | / size | : 12' | ľ | Nor | [IS | 6V^ | ~ | (| 0 | | Ma | terials | used: | 2 | polts | | |
| | | | | | | | 1 | 4 | | | X | | | | | | \prec | | |
| MW-5 | Notes: Retapped 1/2 Tabs- Tagged | | | | | | | | | | | | | | | | | | |
| | Well box | type | / size: | 12 | 'n | lor | (150 | h | | ł | 00 | | Ma | terials | used: | 2 | holfs | | |
| | | | | | | | X | | | | | | | | | | 7 | | |
| MW-6 | Notes: | Re | tal | æd | 2 | 12 | Ta | 65 | | Tag | a ed |) | | | | | | | |
| | Well box | type | - | 1 | | Mo | 111 | 50 r | | J | 0 | | Mat | terials | used: | 2 | bolts | | |
| | | | | | | | | Ì | | | | | | | | Onitation (Inches) | | | |
| - | Votes: | | | | | | | | | | | | | | | | | | |
| | Vell box | type | / size: | | | | | | | | | | Mat | terials | used: | | | | |

SEATTLE

APPENDIX C

BLAINE TECH SERVICES, INC. FIELD PROCEDURES



GROUNDWATER SAMPLING SPECIALISTS
SINCE 1985

August 20, 2010

Denis Brown Shell Oil Products US 20945 South Wilmington Avenue Carson, CA 90810

> Third Quarter 2010 Groundwater Monitoring at Shell-Branded Service Station 4895 Hacienda Drive Dublin, CA

Monitoring performed on August 5, 2010

Groundwater Monitoring Report 100805-JR-2

This report covers the routine monitoring of groundwater wells at this Shell-branded service station. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purgewater (if applicable) is, likewise, collected and transported to the Martinez Refining Company.

Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight-hour refresher courses.

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. Our activities at this site consisted of objective data and sample collection only. No interpretation of analytical results, defining of hydrological conditions or formulation of recommendations was performed.

Please call if you have any questions.

Yours truly,

Mike Ninokata Project Manager

MN/np

attachments: Cumulative Table of WELL CONCENTRATIONS

Certified Analytical Report

Field Data Sheets

cc: Regina Bussard
Delta Environmental
175 Bernal Rd., Suite 200
San Jose, CA 95119

SAN JOSE SACRAMENTO LOS ANGELES SAN DIEGO SEATTLE

BLAINE TECH SERVICES, INC. METHODS AND PROCEDURES FOR THE ROUTINE MONITORING OF **GROUNDWATER WELLS AT SHELL SITES**

Blaine Tech Services, Inc. performs environmental sampling and documentation as an independent third party. We specialize in groundwater monitoring assignments and intentionally limit the scope of our services to those centered on the generation of objective information.

To avoid conflicts of interest, Blaine Tech Services, Inc. personnel do not evaluate or interpret the information we collect. As a state licensed contractor (C-57 well drilling -water - 746684) performing strictly technical services, we do not make any professional recommendations and perform no consulting of any kind.

SAMPLING PROCEDURES OVERVIEW

SAFETY

All groundwater monitoring assignments performed for Shell comply with Shell's safety guidelines, 29 CFR 1910.120 and SB-198 Injury and Illness Prevention Program (IIPP). All Field Technicians receive the full 40-hour 29CFR 1910.120 OSHA SARA HAZWOPER course, medical clearance and on-the-job training prior to commencing any work on any Shell site.

INSPECTION AND GAUGING

Wells are inspected prior to evacuation and sampling. The condition of the wellhead is checked and noted according to a wellhead inspection checklist.

Standard measurements include the depth to water (DTW) and the total well depth (TD) obtained with industry standard electronic water level indicators that are graduated in increments of hundredths of a foot.

The water in each well is inspected for the presence of immiscibles. When free product is suspected, its presence is confirmed using an electronic interface probe (e.g. MMC). No samples are collected from a well containing over two-hundredths of a foot (0.02') of product.

EVACUATION

Depth to water measurements are collected by our personnel prior to purging and minimum purge volumes are calculated anew for each well based on the height of the water column and the diameter of the well. Expected purge volumes are never less than three case volumes and are set at no less than four case volumes in some jurisdictions.

Well purging devices are selected on the basis of the well diameter and the total volume to be evacuated. In most cases the well will be purged using an electric submersible pump (i.e. Grundfos) suspended near (but not touching) the bottom of the well.

PARAMETER STABILIZATION

Well purging completion standards include minimum purge volumes, but additionally require stabilization of specific groundwater parameters prior to sample collection. Typical groundwater parameters used to measure stability are electrical conductivity, pH, and temperature. Instrument readings are obtained at regular intervals during the evacuation process (no less than once per case volume).

Stabilization standards for routine quarterly monitoring of fuel sites include the following: Temperature is considered to have stabilized when successive readings do not fluctuate more than +/- 1 degree Celsius. Electrical conductivity is considered stable when successive readings are within 10%. pH is considered to be stable when successive readings remain constant or vary no more than 0.2 of a pH unit.

DEWATERED WELLS

Normal evacuation removes no less than three case volumes of water from the well. However, less water may be removed in cases where the well dewaters and does not immediately recharge.

MEASURING RECHARGE

Upon completion of well purging, a depth to water measurement is collected and notated to ensure that the well has recharged to within 80% of its static, pre-purge level prior to sampling.

Wells that do not immediately show 80% recharge or dewatered wells will be allowed a minimum of 2 hours to recharge prior to sampling. The water level at time of sampling will be noted.

PURGEWATER CONTAINMENT

All non-hazardous purgewater evacuated from each groundwater monitoring well is captured and contained in on-board storage tanks on the Sampling Vehicle and/or special water hauling trailers. Effluent from the decontamination of reusable apparatus (sounders, electric pumps and hoses etc.), consisting of groundwater combined with deionized water and non-phosphate soap, is also captured and pumped into effluent tanks.

Non-hazardous purgewater is transported under standard Bill of Lading documentation to a Blaine Tech Services, Inc. facility before being transported to a Shell approved disposal facility.

SAMPLE COLLECTION DEVICES

All samples are collected using a stainless steel, Teflon or disposable bailers.

SAMPLE CONTAINERS

Sample material is decanted directly from the sampling baller into sample containers provided by the laboratory that will analyze the samples. The transfer of sample material from the bailer to the sample container conforms to specifications contained in the USEPA T.E.G.D. The type of sample container, material of construction, method of closure and filling requirements are specific to the intended analysis. Chemicals needed to preserve the sample material are commonly placed inside the sample containers by the laboratory or glassware vendor prior to delivery of the bottle to our personnel. The laboratory sets the number of replicate containers.

TRIP BLANKS

Trip Blanks, if requested, are taken to the site and kept inside the sample cooler for the duration of the event. They are turned over to the laboratory for analysis with the samples from that site.

DUPLICATES

Duplicates, if requested, may be collected at a site. The Field Technician uses their discretionin choosing the well at which the Duplicate is collected, typically one suspected of containing measurable contaminants. The Duplicate sample is labeled "DUP" and the time of collection is omitted from the COC, thus rendering the sample blind.

SAMPLE STORAGE

All sample containers are promptly placed in food grade ice chests for storage in the field and transport (direct or via our facility) to the designated analytical laboratory. These ice chests contain quantities of restaurant grade ice as a refrigerant material. The samples are maintained in either an ice chest or a refrigerator until relinquished into the custody of the laboratory or laboratory courier.

DOCUMENTATION CONVENTIONS

A label must be affixed to all sample containers. In most cases these labels are generated by our office personnel and are partially preprinted. Labels can also be hand written by our field personnel. The site is identified with the store number and site address, as is the particular groundwater well from which the sample is drawn (e.g. MW-1, MW-2, S-1 etc.). The time and date of sample collection along with the initials of the person who collects the sample are handwritten onto the label.

Chain of Custody records are created using client specific preprinted forms following USEPA specifications.

Bill of Lading records are contemporaneous records created in the field at the site where the non-hazardous purgewater is generated. Field Technicians use preprinted Bill of Lading forms.

DECONTAMINATION

All equipment is brought to the site in clean and serviceable condition and is cleaned after use in each well and before subsequent use in any other well. Equipment is decontaminated before leaving the site.

The primary decontamination device is a commercial steam cleaner. The steam cleaner is detuned to function as a hot pressure washer that is then operated with high quality deionized water that is produced at our facility and stored onboard our sampling vehicle. Cleaning is facilitated by the use of proprietary fixtures and devices included in the patented workstation (U.S. Patent 5,535,775) that is incorporated in each sampling vehicle. The steam cleaner is used to decon reels, pumps and bailers.

Any sensitive equipment or parts (i.e. Dissolved Oxygen sensor membrane, water level indicator, etc.) that cannot be washed using the high pressure water, will be sprayed with a nonphosphate soap and deionized water solution and rinsed with deionized water,

DISSOLVED OXYGEN READINGS

Dissolved Oxygen readings are taken pre- and/or post-purge using YSI meters (e.g. YSI Model 54, 58 or 95) or HACH field test kits.

The YSI meters are equipped with a stirring device that enables them to collect accurate in-situ readings. The probe/stirring devices are modified to allow downhole measurements to be taken from wells with diameters as small as two inches. The probe and reel is decontaminated between wells as described above. The meter is calibrated between wells as per the instructions in the operating manual. The probe and stirrer is lowered into the water column. The reading is allowed to stabilize prior to collection.

OXYIDATON REDUCTION POTENTIAL READINGS

All readings are obtained with either Corning or Myron-L meters (e.g. Corning ORP-65 or a Myron-L Ultrameter GP). The meter is cleaned between wells as described above. The meter is calibrated at the start of each day according to the instruction manual.

FERROUS IRON MEASUREMENTS

All field measurements are collected at time of sampling with a HACH test kit.

APPENDIX D

CERTIFIED ANALYTICAL REPORT WITH CHAIN-OF-CUSTODY DOCUMENTATION





August 16, 2010

Michael Ninokata Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105

Calscience Work Order No.: 10-08-0617

Client Reference: 4895 Hacienda Dr., San Ramon Road, Dub, CA

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 8/7/2010 and analyzed in accordance with the attached chain-of-custody.

Calscience Environmental Laboratories certifies that the test results provided in this report meet all NELAC requirements for parameters for which accreditation is required or available. Any exceptions to NELAC requirements are noted in the case narrative. The original report of subcontracted analysis, if any, is provided herein, and follows the standard Calscience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.

If you have any questions regarding this report, please do not hesitate to contact the undersigned.

Sincerely,

Calscience Environmental Laboratories, Inc.

Xuan H. Dang Project Manager

NELAP ID: 03220CA

CSDLAC ID: 10109





Blaine Tech Services, Inc. Date Received: 08/07/10 1680 Rogers Avenue Work Order No: 10-08-0617 San Jose, CA 95112-1105 Preparation: **EPA 3510C** Method: EPA 8015B

| Project: 4895 Hacienda D | r., San Ramon | Road, Dub, C | Α | | | | Pa | age 1 of 2 |
|-----------------------------|-----------------------|----------------------|------------------------|-------------|--------------|------------------|-----------------------|-------------|
| Client Sample Number | | Lab Sample Number | Date/Time Collected | Matrix | Instrument | Date Prepared | Date/Time Analyzed | QC Batch ID |
| MW-1 | | 10-08-0617-1-D | 08/05/10 10:10 | Aqueous | GC 27 | 08/10/10 | 08/11/10 11:57 | 100810B12 |
| Comment(s): -The sample ext | ract was subjected to | Silica Gel treatment | prior to analys | sis. | | | | |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Units</u> | | | |
| Diesel Range Organics | ND | 50 | 1 | | ug/L | | | |
| Surrogates: | <u>REC (%)</u> | Control Limits | | Qual | | | | |
| Decachlorobiphenyl | 91 | 68-140 | | | | | | |
| MW-2 | | 10-08-0617-2-D | 08/05/10 11:40 | Aqueous | GC 27 | 08/10/10 | 08/11/10 12:14 | 100810B12 |
| Comment(s): -The sample ext | ract was subjected to | Silica Gel treatment | prior to analys | sis. | | | | |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Units</u> | | | |
| Diesel Range Organics | ND | 50 | 1 | | ug/L | | | |
| Surrogates: | <u>REC (%)</u> | Control Limits | | <u>Qual</u> | | | | |
| Decachlorobiphenyl | 105 | 68-140 | | | | | | |
| MW-3 | | 10-08-0617-3-D | 08/05/10 11:00 | Aqueous | GC 27 | 08/10/10 | 08/11/10 12:32 | 100810B12 |
| Comment(s): -The sample ext | ract was subjected to | Silica Gel treatment | prior to analys | sis. | | | | |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | Qual | <u>Units</u> | | | |
| Diesel Range Organics | ND | 50 | 1 | | ug/L | | | |
| Surrogates: | <u>REC (%)</u> | Control Limits | | <u>Qual</u> | | | | |
| Decachlorobiphenyl | 104 | 68-140 | | | | | | |
| MW-4 | | 10-08-0617-4-D | 08/05/10 11:15 | Aqueous | GC 27 | 08/10/10 | 08/11/10 12:50 | 100810B12 |
| Comment(s): -The sample ext | ract was subjected to | Silica Gel treatment | prior to analys | sis. | | | | |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | Qual | <u>Units</u> | | | |
| Diesel Range Organics | ND | 50 | 1 | | ug/L | | | |
| Surrogates: | REC (%) | Control Limits | | <u>Qual</u> | | | | |
| Decachlorobiphenyl | 103 | 68-140 | | | | | | |





Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105 Date Received: Work Order No: Preparation: Method:

10-08-0617 EPA 3510C EPA 8015B

08/07/10

| | | Road, Dub, C/ | | | | Date | Date/Time | |
|-------------------------------------|--------------|----------------------|------------------------|-------------|--------------|----------|-------------------|-------------|
| Client Sample Number | | Lab Sample Number | Date/Time Collected | Matrix | Instrument | | Analyzed | QC Batch ID |
| MW-5 | | 10-08-0617-5-D | 08/05/10 10:40 | Aqueous | GC 27 | 08/10/10 | 08/11/10 13:08 | 100810B12 |
| Comment(s): -The sample extract was | subjected to | Silica Gel treatment | prior to analys | sis. | | | | |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Units</u> | | | |
| Diesel Range Organics | ND | 50 | 1 | | ug/L | | | |
| Surrogates: | REC (%) | Control Limits | | Qual | | | | |
| Decachlorobiphenyl | 107 | 68-140 | | | | | | |
| MW-6 | | 10-08-0617-6-D | 08/05/10 10:25 | Aqueous | GC 27 | 08/10/10 | 08/11/10 13:25 | 100810B12 |
| Comment(s): -The sample extract was | subjected to | Silica Gel treatment | prior to analys | sis. | | | | |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Units</u> | | | |
| Diesel Range Organics | ND | 50 | 1 | | ug/L | | | |
| Surrogates: | REC (%) | Control Limits | | <u>Qual</u> | | | | |
| Decachlorobiphenyl | 106 | 68-140 | | | | | | |
| Method Blank | | 099-12-211-1,767 | N/A | Aqueous | GC 27 | 08/10/10 | 08/10/10 19:49 | 100810B12 |
| Parameter_ | Result | <u>RL</u> | <u>DF</u> | Qual | <u>Units</u> | | | |
| Diesel Range Organics | ND | 50 | 1 | | ug/L | | | |
| | REC (%) | Control Limits | | Qual | | | | |

Decachlorobiphenyl

86

68-140





Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105 Date Received: Work Order No: Preparation:

EPA 5030B LUFT GC/MS / EPA 8260B

Method: Units: ug/L

Project: 4895 Hacienda Dr., San Ramon Road, Dub, CA

Page 1 of 3

08/07/10

10-08-0617

| Client Sample Number | | | | Sample lumber | Date/Time Collected | Matrix | Instrument | Date Prepared | Date/ Analy | | QC Batch ID |
|-----------------------------|----------------|-------------------|-------------|------------------|------------------------|----------------|------------|------------------|-------------------|-----------|-------------|
| MW-1 | | | 10-08-0 | 617-1-A | 08/05/10 10:10 | Aqueous | GC/MS CC | 08/12/10 | 08/13 01: | | 100812L02 |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | Qual | Parameter | | | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> |
| Benzene | ND | 0.50 | 1 | | Tert-Butyl Ald | cohol (TBA) | | ND | 10 | 1 | |
| Ethylbenzene | ND | 1.0 | 1 | | Diisopropyl E | , , | | ND | 2.0 | 1 | |
| Toluene | ND | 1.0 | 1 | | Ethyl-t-Butyl I | , |) | ND | 2.0 | 1 | |
| Xylenes (total) | ND | 1.0 | 1 | | Tert-Amyl-Me | • | , | ND | 2.0 | 1 | |
| Methyl-t-Butyl Ether (MTBE) | ND | 1.0 | 1 | | TPPH | , , | , | ND | 50 | 1 | |
| Surrogates: | <u>REC (%)</u> | Control Limits | Qual | | Surrogates: | | | REC (%) | Control Limits | | <u>Qual</u> |
| Dibromofluoromethane | 113 | 80-126 | | | 1,2-Dichloroe | thane-d4 | | 109 | 80-131 | | |
| Toluene-d8 | 100 | 80-120 | | | Toluene-d8-T | | | 102 | 88-112 | | |
| 1,4-Bromofluorobenzene | 96 | 80-120 | | | . 3140110 40 1 | | | - | _5 L | | |
| MW-2 | | | 10-08-0 | 617-2-A | 08/05/10 11:40 | Aqueous | GC/MS CC | 08/12/10 | 08/13 03:3 | | 100812L02 |
| _ | | | | | _ | | | | | | |
| <u>Parameter</u> | <u>Result</u> | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Parameter</u> | | | <u>Result</u> | <u>RL</u> | <u>DF</u> | <u>Qual</u> |
| Benzene | ND | 0.50 | 1 | | Tert-Butyl Ald | , , | | ND | 10 | 1 | |
| Ethylbenzene | ND | 1.0 | 1 | | Diisopropyl E | ther (DIPE) | | ND | 2.0 | 1 | |
| Toluene | ND | 1.0 | 1 | | Ethyl-t-Butyl I | Ether (ETBE |) | ND | 2.0 | 1 | |
| Xylenes (total) | ND | 1.0 | 1 | | Tert-Amyl-Me | ethyl Ether (T | AME) | ND | 2.0 | 1 | |
| Methyl-t-Butyl Ether (MTBE) | 11 | 1.0 | 1 | | TPPH | | | ND | 50 | 1 | |
| Surrogates: | REC (%) | Control Limits | <u>Qual</u> | | Surrogates: | | | REC (%) | Control Limits | <u>(</u> | <u>Qual</u> |
| Dibromofluoromethane | 114 | 80-126 | | | 1,2-Dichloroe | thane-d4 | | 108 | 80-131 | | |
| Toluene-d8 | 100 | 80-120 | | | Toluene-d8-T | PPH | | 101 | 88-112 | | |
| 1,4-Bromofluorobenzene | 96 | 80-120 | | | | | | | | | |
| MW-3 | | | 10-08-0 | 617-3-A | 08/05/10 11:00 | Aqueous | GC/MS CC | 08/12/10 | 08/13 04:0 | | 100812L02 |
| Parameter | Result | RL | DF | Qual | Parameter | | | Result | RL | DF | Qual |
| Benzene | ND | 0.50 | 1 | | Tert-Butyl Alo | ohol (TRA) | | ND | 10 | 1 | |
| Ethylbenzene | ND ND | 1.0 | 1 | | Diisopropyl E | , , | | ND | 2.0 | 1 | |
| Toluene | ND ND | 1.0 | 1 | | Ethyl-t-Butyl | , |) | ND | 2.0 | 1 | |
| Xylenes (total) | ND ND | 1.0 | 1 | | Tert-Amyl-Me | • | , | ND | 2.0 | 1 | |
| Methyl-t-Butyl Ether (MTBE) | 9.6 | 1.0 | 1 | | TPPH | zaryi Euloi (I | , WIL) | ND | 2.0 50 | 1 | |
| , , , | | Control | u Qual | | | | | REC (%) | Control | - | Qual |
| Surrogates: | <u>REC (%)</u> | <u>Limits</u> | <u>Qual</u> | | <u>Surrogates:</u> | | | | Limits | _ | <u>kual</u> |
| Dibromofluoromethane | 114 | 80-126 | | | 1,2-Dichloroe | thane-d4 | | 109 | 80-131 | | |
| Toluene-d8 | 99 | 80-120 | | | Toluene-d8-T | PPH | | 101 | 88-112 | | |
| 1,4-Bromofluorobenzene | 95 | 80-120 | | | | | | | | | |
| | | | | | | | | | | | |

DF - Dilution Factor Qual - Qualifiers





Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105 Date Received: Work Order No: Preparation:

10-08-0617 EPA 5030B

08/07/10

Method: Units:


LUFT GC/MS / EPA 8260B

ug/L

Project: 4895 Hacienda Dr., San Ramon Road, Dub, CA

Page 2 of 3

| Client Sample Number | | | | o Sample lumber | Date/Time Collected | Matrix | Instrument | Date Prepared | Date/\ Analy | | QC Batch ID |
|-----------------------------|---------|-------------------|------------|--------------------|------------------------|----------------|------------|------------------|-------------------|-----------|-------------|
| MW-4 | | | 10-08-0 | 617-4-A | 08/05/10 11:15 | Aqueous | GC/MS CC | 08/12/10 | 08/13 04:3 | | 100812L02 |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Parameter</u> | | | Result | <u>RL</u> | <u>DF</u> | Qual |
| Benzene | ND | 0.50 | 1 | | Tert-Butyl Ald | cohol (TBA) | | ND | 10 | 1 | |
| Ethylbenzene | ND | 1.0 | 1 | | Diisopropyl E | ther (DIPE) | | ND | 2.0 | 1 | |
| Toluene | ND | 1.0 | 1 | | Ethyl-t-Butyl I | Ether (ETBE |) | ND | 2.0 | 1 | |
| Xylenes (total) | ND | 1.0 | 1 | | Tert-Amyl-Me | ethyl Ether (T | AME) | ND | 2.0 | 1 | |
| Methyl-t-Butyl Ether (MTBE) | ND | 1.0 | 1 | | TPPH | | | ND | 50 | 1 | |
| Surrogates: | REC (%) | Control Limits | <u>Qua</u> | <u>l</u> | Surrogates: | | | REC (%) | Control Limits | <u>C</u> | <u>Qual</u> |
| Dibromofluoromethane | 117 | 80-126 | | | 1,2-Dichloroe | ethane-d4 | | 113 | 80-131 | | |
| Toluene-d8 | 99 | 80-120 | | | Toluene-d8-T | TPPH | | 104 | 88-112 | | |
| 1,4-Bromofluorobenzene | 96 | 80-120 | | | | | | | | | |
| MW-5 | | | 10-08-0 | 617-5-A | 08/05/10 10:40 | Aqueous | GC/MS CC | 08/12/10 | 08/13 05: | | 100812L02 |
| Parameter | Result | RL | DF | Qual | Parameter | | | Result | RL | DF | Qual |
| Benzene | ND | 1.0 | 2 | | Tert-Butyl Ald | cohol (TBA) | | 39 | 20 | 2 | |
| Ethylbenzene | ND | 2.0 | 2 | | Diisopropyl E | , , | | ND | 4.0 | 2 | |
| Toluene | ND | 2.0 | 2 | | Ethyl-t-Butyl I | . , |) | ND | 4.0 | 2 | |
| Xylenes (total) | ND | 2.0 | 2 | | Tert-Amyl-Me | , | , | ND | 4.0 | 2 | |
| Methyl-t-Butyl Ether (MTBE) | 250 | 2.0 | 2 | | TPPH | , | , | 310 | 100 | 2 | |
| Surrogates: | REC (%) | Control Limits | Qua | l | Surrogates: | | | REC (%) | Control Limits | <u>C</u> | <u>Qual</u> |
| Dibromofluoromethane | 117 | 80-126 | | | 1,2-Dichloroe | ethane-d4 | | 112 | 80-131 | | |
| Toluene-d8 | 97 | 80-120 | | | Toluene-d8-T | TPPH | | 104 | 88-112 | | |
| 1,4-Bromofluorobenzene | 95 | 80-120 | | | | | | | | | |
| MW-6 | | | 10-08-0 | 617-6-A | 08/05/10 10:25 | Aqueous | GC/MS CC | 08/12/10 | 08/13 05:4 | | 100812L02 |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Parameter</u> | | | Result | <u>RL</u> | <u>DF</u> | Qual |
| Benzene | ND | 0.50 | 1 | | Tert-Butyl Ald | cohol (TBA) | | ND | 10 | 1 | |
| Ethylbenzene | ND | 1.0 | 1 | | Diisopropyl E | ther (DIPE) | | ND | 2.0 | 1 | |
| Toluene | ND | 1.0 | 1 | | Ethyl-t-Butyl I | Ether (ETBE |) | ND | 2.0 | 1 | |
| Xylenes (total) | ND | 1.0 | 1 | | Tert-Amyl-Me | ethyl Ether (T | AME) | ND | 2.0 | 1 | |
| Methyl-t-Butyl Ether (MTBE) | 4.0 | 1.0 | 1 | | TPPH | | | 53 | 50 | 1 | |
| Surrogates: | REC (%) | Control Limits | <u>Qua</u> | <u>[</u> | Surrogates: | | | REC (%) | Control Limits | <u>C</u> | <u>Qual</u> |
| Dibromofluoromethane | 115 | 80-126 | | | 1,2-Dichloroe | ethane-d4 | | 112 | 80-131 | | |
| Toluene-d8 | 101 | 80-120 | | | Toluene-d8-T | TPPH | | 103 | 88-112 | | |
| 1,4-Bromofluorobenzene | 94 | 80-120 | | | | | | | | | |



DF - Dilution Factor

Qual - Qualifiers



Units:



Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105 Date Received:
Work Order No:
Preparation:
Method:

10-08-0617 EPA 5030B

08/07/10

LUFT GC/MS / EPA 8260B

ug/L

Project: 4895 Hacienda Dr., San Ramon Road, Dub, CA

Page 3 of 3

| Client Sample Number | | | | ab Sample Number | Date/Time Collected | Matrix | Instrument | Date Prepared | Date/T Analy | | QC Batch ID |
|-----------------------------|---------|-------------------|-----------|---------------------|------------------------|---------------|------------|------------------|-------------------|-----------|-------------|
| Method Blank | | | 099-12 | -767-4,452 | N/A | Aqueous | GC/MS CC | 08/12/10 | 08/13 01:0 | | 100812L02 |
| <u>Parameter</u> | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> | <u>Parameter</u> | | | Result | <u>RL</u> | <u>DF</u> | <u>Qual</u> |
| Benzene | ND | 0.50 | 1 | | Tert-Butyl Alc | ohol (TBA) | | ND | 10 | 1 | |
| Ethylbenzene | ND | 1.0 | 1 | | Diisopropyl Et | ther (DIPE) | | ND | 2.0 | 1 | |
| Toluene | ND | 1.0 | 1 | | Ethyl-t-Butyl E | Ether (ETBE |) | ND | 2.0 | 1 | |
| Xylenes (total) | ND | 1.0 | 1 | | Tert-Amyl-Me | thyl Ether (T | AME) | ND | 2.0 | 1 | |
| Methyl-t-Butyl Ether (MTBE) | ND | 1.0 | 1 | | TPPH | | | ND | 50 | 1 | |
| Surrogates: | REC (%) | Control Limits | Qua | <u>al</u> | Surrogates: | | | REC (%) | Control Limits | <u>C</u> | <u>Qual</u> |
| Dibromofluoromethane | 116 | 80-126 | | | 1,2-Dichloroe | thane-d4 | | 110 | 80-131 | | |
| Toluene-d8 | 99 | 80-120 | | | Toluene-d8-T | PPH | | 102 | 88-112 | | |
| 1,4-Bromofluorobenzene | 95 | 80-120 | | | | | | | | | |



Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105 Date Received: Work Order No: Preparation: Method: 08/07/10 10-08-0617 EPA 5030B LUFT GC/MS / EPA 8260B

Project 4895 Hacienda Dr., San Ramon Road, Dub, CA

| Quality Control Sample ID | Matrix | Instrument | Date Prepared | | Date Analyzed | MS/MSD Batch Number |
|-------------------------------|---------|------------|------------------|------------|------------------|------------------------|
| MW-1 | Aqueous | GC/MS CC | 08/12/10 | | 08/13/10 | 100812S02 |
| <u>Parameter</u> | MS %REC | MSD %REC | %REC CL | <u>RPD</u> | RPD CL | Qualifiers |
| Benzene | 96 | 96 | 80-120 | 0 | 0-20 | |
| Ethylbenzene | 93 | 94 | 73-127 | 1 | 0-20 | |
| Toluene | 97 | 96 | 80-120 | 2 | 0-20 | |
| Methyl-t-Butyl Ether (MTBE) | 95 | 98 | 65-131 | 3 | 0-22 | |
| Tert-Butyl Alcohol (TBA) | 95 | 96 | 62-134 | 0 | 0-20 | |
| Diisopropyl Ether (DIPE) | 99 | 101 | 64-136 | 2 | 0-29 | |
| Ethyl-t-Butyl Ether (ETBE) | 89 | 92 | 70-124 | 3 | 0-20 | |
| Tert-Amyl-Methyl Ether (TAME) | 83 | 83 | 71-125 | 0 | 0-20 | |



RPD - Relative Percent Difference , CL - Control Limit



Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105 Date Received: Work Order No: Preparation: Method:

10-08-0617 EPA 3510C EPA 8015B

N/A

Project: 4895 Hacienda Dr., San Ramon Road, Dub, CA

| Quality Control Sample ID | Matrix | Instrument | Date Prepared | Dat Analy | | LCS/LCSD Batc Number | h |
|---------------------------|---------|------------|------------------|--------------|------------|-------------------------|------------|
| 099-12-211-1,767 | Aqueous | GC 27 | 08/10/10 | 08/10/ | /10 | 100810B12 | |
| | | | | | | | |
| <u>Parameter</u> | LCS % | 6REC LCSD | %REC % | 6REC CL | <u>RPD</u> | RPD CL | Qualifiers |
| Diesel Range Organics | 92 | 95 | | 75-117 | 2 | 0-13 | |

Mulhan_

RPD - Relative Percent Difference , CL - Control Limit



Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc. 1680 Rogers Avenue San Jose, CA 95112-1105 Date Received: Work Order No: Preparation: Method:

10-08-0617 EPA 5030B

N/A

LUFT GC/MS / EPA 8260B

Project: 4895 Hacienda Dr., San Ramon Road, Dub, CA

| Quality Control Sample ID | Matrix | Instrun | | Date epared | Da ⁻ Analy | | LCS/LCSD Bato Number | :h |
|-------------------------------|---------|-------------|-----------|----------------|--------------------------|------------|-------------------------|------------|
| 099-12-767-4,452 | Aqueous | GC/MS | CC 08 | 08/12/10 08 | | /10 | 100812L02 | |
| <u>Parameter</u> | LCS % | <u>SREC</u> | LCSD %REC | <u>%R</u> | EC CL | <u>RPD</u> | RPD CL | Qualifiers |
| Benzene | 103 | | 93 | 8 | 0-120 | 10 | 0-20 | |
| Ethylbenzene | 102 | | 93 | 8 | 0-123 | 10 | 0-20 | |
| Toluene | 104 | | 95 | 8 | 0-120 | 9 | 0-20 | |
| Methyl-t-Butyl Ether (MTBE) | 104 | | 95 | 7 | 5-123 | 10 | 0-25 | |
| Tert-Butyl Alcohol (TBA) | 99 | | 93 | 7: | 2-126 | 7 | 0-20 | |
| Diisopropyl Ether (DIPE) | 108 | | 98 | 7: | 5-129 | 10 | 0-22 | |
| Ethyl-t-Butyl Ether (ETBE) | 101 | | 92 | 7 | 6-124 | 10 | 0-20 | |
| Tert-Amyl-Methyl Ether (TAME) | 93 | | 82 | 7 | 9-121 | 12 | 0-20 | |
| TPPH | 97 | | 97 | 6 | 5-135 | 0 | 0-30 | |



Glossary of Terms and Qualifiers



Work Order Number: 10-08-0617

| Qualifier * | Definition See applicable analysis comment. |
|----------------|--|
| < | Less than the indicated value. |
| | Greater than the indicated value. |
| > | |
| 1 | Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification. |
| 2 | Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification. |
| 3 | Recovery of the Matrix Spike (MS) or Matrix Spike Duplicate (MSD) compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification. |
| 4 | The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification. |
| 5 | The PDS/PDSD or PES/PESD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported without further clarification. |
| В | Analyte was present in the associated method blank. |
| E | Concentration exceeds the calibration range. |
| J | Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated. |
| ME | LCS Recovery Percentage is within LCS ME Control Limit range. |
| ND | Parameter not detected at the indicated reporting limit. |
| Q | Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater. |
| X | % Recovery and/or RPD out-of-range. |
| Z | Analyte presence was not confirmed by second column or GC/MS analysis. |
| | Solid - Unless otherwise indicated, solid sample data is reported on a wet weight basis, not corrected for % moisture. |

| Print Bull 10 Contact Name | LAB (LOCATION) | | | | | |) | S | hell | $\mathbf{\Omega}$ | il E | ro | de | ict. | ۰ ر | `ha | in 4 | ∩ f ⁄ | ٠ | + | 1., r | | | J | | | | | | |
|--|--|------------|--------------|-----------------|----------|-----------|------------------|--|----------|-------------------|---------------|----------|--|----------|--------------|------------|--------------|--------------|------------|----------|----------|----------|------------|--|--------------|---------------|----------|---|---------------------------------------|------|
| See See See See See See See See See Se | CALSCIENCE () | Passes | | | | ليبا | | <u> </u> | 11611 | | | | | | | | | J1 (| Jus — | | | | | | | | | | | |
| PROJECT PROJ | SPL () | | | | | | | | | Pr | int B | Bill T | o C | onta | ct Na | ame: | | | | | NCID | ENT | # (EN | IV SE | RVICI | ES) | СН | ECK IF NO INCI | DENT # APPLI | ES |
| TEAN PRINCE | ☐ XENCO () | - 1⊱= | | | | | | | | Re | gina | a Bu | issai | rđ | | | | | | | 9 | 7 7 | 9 | 5 | 8 9 | | | | | |
| Contains Find Sample Identification DATE TIME AVERAGE Contains Find Sample Identification Contains Find Sample Identificatio | TEST AMERICA () | | OTIVA SD&C | M | CONS | ULTANT | | LUBES | | | | | | | PO | # | | | | | | | | | | | | | | |
| TEMPORATION Part | OTHER () | ☐ s | HELL PIPELIN | IE 🔲 | ОТНЕ | R | | | | 1 200000 | 1 | 100 2000 | T | 0000000 | | 1000000 | | <u> </u> | <u> </u> | | T | | T I | <u>"" </u> | | | PA | GE: | of _ | |
| BITS 4885 Hactenda Dr. San Ramon Road _ Dub CA | SAMPLING COMPANY. | | | | rog | CODE | | | | SIT | E ADDE | RESS: | Street | and Cit | | <u> </u> | | | | 51-1 | | | GLOD | V 70 NO. | | | <u> </u> | | | |
| 100 | | | | | В | TSS | | | | | | | | | - | San | Ram | on F | oad | | | | 1 | | ነበበ ፊ | 23 | | | | |
| ## FIRST SAMPLING STANDARD S | 1680 Rogers Ave, San Jose, CA 95112 | | | | | | | | | EDF 0 | DELIVER | ABLETO | O (Name) | , Compar | nv. Office I | Location): | | PHO | NE NO: | , , , | <u> </u> | | E-MAIL: | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | 70042 | | | CONSULTA | T PROJECT NO : | |
| ## FIRST SAMPLING STANDARD S | I . | | | | | | | | | Ang | gela F | Pico, | Delta | a, Sa | n Jos | e Off | ce | 40 | 8.826. | 1862 | | | anico | n@deJt | taenv i | com | | 1009 | 305-50 | æ |
| ## FIRST SAMPLING STANDARD S | | | T EMAII: | | | | | | | SAW | IPLER N | AME(S) | (Post): | | | | | | | | | | 1 a p. o c | <u> </u> | uciiv.c | LAB | USE O | NLY | | |
| ## FIRST SAMPLING STANDARD S | (408)573-0555 (408)573-7 | 771 | | ata@blain | etech | n.com | | | | | (| | (m) | يتها | 2 _ | | | | | | | | | | | | 15 | of- | DAI | 7 |
| SPECIAL INSTRUCTIONS OR NOTES: SMELL CONTINUED MATERIAL PRIEST SMELL | | AVC | | | | | RESUL | TS NEEDE | .D | 十一 | | <u> </u> | <u> </u> | (6. | | | | | | | | | | | | | | | | |
| SPECIAL INSTRUCTIONS OR NOTES: SELECTORIZED MATERIAL PROJECTS SELECTORIZED MATERIAL PROJECTS | | | L 2 DAYS | L 24 F | IOURS | | ON W | EEKEND | | ↓_ | | | , | | | , | | | F | REQU | ESTE | D AN | ALYS | IS. | | | | | | |
| SPECIAL INSTRUCTIONS OR NOTES: STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE REPUBLISHED STATE | LA - KWQCB REPORT FORMAT LI UST AGENCY | : | | <u>-</u> | | | | | |] | | | | | | | | | T | | | | | | | T T | \Box | TEMPERATI | PE ON PEO | |
| RUTPH-d wisilica Gel Clean Up Field Sample Identification DATE TIME MATRIX PROSECUTIVE MATRIX MA | SPECIAL INSTRUCTIONS OR NOTES: | | | | | | | | | <u>a</u> | (¥) | | | | | | | | | | 1 | | | | | | . 1 | - Livil Crost U | | · 🚅, |
| RUTPH-d wisilica Gel Clean Up Field Sample Identification DATE TIME MATRIX PROSECUTIVE MATRIX MA | CC Regina Russard w/final annual above and | | | | | | IT RATE A | PPLIES | | 260 | 801 | | e e | | 1 | | | - | | | | | | | | 1 | | | | |
| Field Sample Identification DATE TIME MATTEX MACHINE SC. MIOD 25501 KONE ORNER MACH | O regina bussara williai report roussara@ | gaertaenv. | com | | | | | | | e | ية (| | 3260 | | | | | | | | = | | | | | | L | | | |
| Field Sample Identification DATE TIME MATTEX MACHINE SC. MIOD 25501 KONE ORNER MACH | Run TPH-d w/Silica Gel Clean Up | | | L⊈Z REC | EIPT VE | RIFICATIO | N REQUES | TED | | eab | l g | <u>a</u> | 8) \$ | <u>a</u> | | اءا | a | | ` _ | 9 | 158 | | | ľ | | | . [| | | |
| Field Sample Identification DATE TIME MATTEX MACHINE SC. MIOD 25501 KONE ORNER MACH | | SA | MPLING | | T | PRES | ERVATIVE | | Ι | Į, | xtra | 260 | nate | 1260 | 809 | 909i | 260 | 82 26 | 98 | (856 | 8 | | | | j | | | | | |
| 1 1140 | Field Sample Identification | l DATE | 71145 | MATRIX | | | | | | | ŵ | (8) × | yge | ш Ш | (82 | (82 | 8) E | چ ق | (82 | 뎓 | ano | | | | | | | | | |
| 1 1140 | OMLY | DATE | HIME | ŀ | HCL | HNO3 H2 | SO4 NONE | EOTHER | l . | Ē | Ŧ | 믦 | õ | MTB | ME | 를 | ₹ <u>[</u> | 2.0 | 8 | 靠 | leth | 1 | | - | | | | | | - |
| | 1 MW-1 | 8-5- | 6 1010 | 4 | 3 | | 2 | | | X | V | , | +,- | _ | | | | + | † <u> </u> | ╅ | - | | - | + | + | ++ | + | | · · · · · · · · · · · · · · · · · · · | |
| Howard (Signature) Received by (Signature) R | > MW-2 | | 1140 | | П | | | | 1 | 5 | X | _ | | _ | | | 7 | \dagger | \vdash | \vdash | - | | | + | + | +++ | \dashv | | | |
| Annual State of Signature State | 3 mw-3 | | 1100) | | \top | † † | 1 | 1 | | X | | | + - | - | | + | | | +- | - | _ | \vdash | + | + | ┿ | +++ | \dashv | | | |
| Freewally (Signature) Received by (Signature) | 4 MW 9 | | 1115 | | †† | | - | | | X | 1 | 1. | _ | | | | | | +- | +- | | | \dashv | +- | +- | ┼┼ | + | | - | |
| Received by (Signature) Received by (Signatur | | | | | ++ | 1-1- | - 1 | + | \vdash | <u> </u> | ~ | (_ | ` - | - | | | | | ┼ | | | | | | | ╁┷┼ | | | | |
| Received by: (Signature) Received by: (Sign | | | | | 16 | ╂ | + | - | | 1 | ^ | K | X | <u> </u> | | _ | | \bot | | <u> </u> | | Ш | | | | | | | | |
| Date: Society Signature | 10 MW 16 | _ U | 1025 | - 4 | <u> </u> | | 0,0 | | V | V | X | X | X | | | | - 1 | | | 1 |] | | | ļ | İ | 1 1 | | | | |
| Date: Society Signature | | | | | 1 | | | | | | | | | | | | | \top | | \top | | | | _ | 1 | \Box | \neg | | | |
| Date: Society Signature | | | | | | | | 1 | | | | | | | | | | | + | +- | ļ | \vdash | \dashv | | +- | ╁ | | | | ┯. |
| Date: Society Signature | | →} | | | - | | | | | | | | | | | | | | <u> </u> | | | | | | | | | | | į |
| Date: Society Signature | | | | | 1 | | | | | | | | | | | | | | 1 | 1 | | | | | | П | | | | |
| Date: Society Signature | | | | | 1 | | - - | | | | | | \vdash | | | - | | +- | ┼ | + | | \vdash | \dashv | | + | ┼┼ | | | | |
| Date: Society Signature | Relinquished by: (Signature) | | 1 | Pacei and by (S | 1) | | | | | | |] | | - | | | | | | | | | | | | | | | | - 1 |
| Ton Omale Ct2 B 6 10 1070 | (h) | | | / / | / | | | | | | | | | | | | | | | | | Date: | 0 | <i>t</i> | _ | | Time: | | | |
| Ton Omale Ct2 B 6 10 1070 | Religion (Malabor (S) | | | S | | |) | | | | | | | | | | | | | | | ٦ | かへ | 5- | 10 | / | • | 144 | | |
| #Industrictive: (Signature) - 17 8-6-10 Received by: (Signature) - 17 8-6-10 Received | Training Street By (Significae) | | | Received by: (S | ignature | 1 | 7 | /// | 1 | | - · | | | | | | | | | | | | - | - | | | | 100 | > | |
| #Inaplieshed-by: (Signature) | VI | _ | [| 100 | <u> </u> | M | $\gamma)c$ | M | 2) | (| \mathcal{L} | 2 | | | | | | | | | | | ءاد | , lin | | | , | 67.N | | 9 |
| 8/1/0 0936 05/2/06 Revision | Refinquished by: (Signature) | -60-10 | 5 | | ignature |) | | | 1 | | | | | | | | | | | | | | | | | $-\downarrow$ | | , <u>,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,</u> | | |
| 05/2/06 Revision | (30) | 17 | 30 | | | | 9 | | _ | (| H | | | - | | | | | | | | 8, | ln. | /10 | | | 6 | 926 | | ļ |
| | | | | | | | | | | | | | | | | | | | | | | | -/- | / | | | | <u> </u> | | [|



< WebShip >>>>> 800-322-5555 www.qso.com

Page 12 of 13

Ship From: ALAN KEMP CAL SCIENCE- CONCORD 5063 COMMERCIAL CIRCLE #H CONCORD, CA 94520

ship To: SAMPLE RECEIVING CEL 7440 LINCOLN WAY GARDEN GROVE, CA 92841

COD: \$0.00

Reference:

Delivery Instructions:

Signature Type: SIGNATURE REQUIRED Tracking #: 514699503 | SDS |

Print Date: 08/06/10 13:19 PM Package 1 of 3

| 4 4 <u>44 4</u> 4 4 4 4 | | and the second | | ****** |
|-------------------------|-------|----------------|-------|--------|
| | | | | |
| - C | 10112 | വല | , n r | inter |
| | | | | |
| | | | | |

Print All

Edit Shipment

Finish

LABEL INSTRUCTIONS:

Do not copy or reprint this label for additional shipments - each package must have a unique barcode.

STEP 1 - Use the "Send Label to Printer" button on this page to print the shipping label on a laser or inkjet printer.

STEP 2 - Fold this page in half.

STEP 3 - Securely attach this label to your package, do not cover the barcode.

STEP 4 - Request an on-call pickup for your package, if you do not have scheduled daily pickup service or Drop-off your package at the nearest GSO drop box. Locate nearest GSO dropbox locations using this link.


ADDITIONAL OPTIONS:

Send Label Via Email

Create Return Label

TERMS AND CONDITIONS:

By giving us your shipment to deliver, you agree to all the service terms and conditions described in this section. Our liability for loss or damage to any package is limited to your actual damages or \$100 whichever is less, unless you pay for and declare a higher authorized value. If you declare a higher value and pay the additional charge, our liability will be the lesser of your declared value or the actual value of your loss or damage. In any event, we will not be liable for any damage, whether direct, incidental, special or consequential, in excess of the declared value of a shipment whether or not we had knowledge that such damage might be incurred including but not limited to loss of income or profit. We will not be liable for your acts or omissions, including but not limited to improper or insufficient packaging, securing, marking or addressing. Also, we will not be liable if you or the recipient violates any of the terms of our agreement. We will not be liable for loss, damage or delay caused by events we cannot control, including but not limited to acts of God, perils of the air, weather conditions, act of public enemies, war, strikes, or civil commotion. The highest declared value for our GSO Priority Letter or GSO Priority Package is \$500. For other shipments the highest declared value is \$10,000 unless your package contains items of "extraordinary value", in which case the highest declared value we allow is \$500. Items of "extraordinary value" include, but or not limited to, artwork, jewelry, furs, precious metals, tickets, negotiable instruments and other items with intrinsic value.





WORK ORDER #: 10-08- 2 6 7 2

| SAMPLE REC | CEIPT FORM | Cooler / of / |
|---|--|--|
| CLIENT: BTS | DATE: | : 08/7/10 |
| TEMPERATURE: Thermometer ID: SC1 (Criteria: 0.0 °C Temperature 8 °C + 0.5 °C (CF) = Sample(s) outside temperature criteria (PM/APM contact Sample(s) outside temperature criteria but received on ice Received at ambient temperature, placed on ice fo Ambient Temperature: □ Air □ Filter □ Metals (Contact) | Blank cted by:). ce/chilled on same day of same or transport by Courier. | • |
| CUȘTODY SEALS INTAÇT: | | |
| ☐ Cooler ☐ ☐ No (Not Intact)☐ Sample ☐ ☐ No (Not Intact)☐ ☐ No (Not Intact) | ☐ Not Present ☐ N/A ☑ Not Present | ا Initial: <u>۲۲</u> Initial: <u>۲۲</u> |
| SAMPLE CONDITION: | Yes | |
| Chain-Of-Custody (COC) document(s) received with sam | · · | No N/A □ |
| COC document(s) received complete | | |
| ☐ Collection date/time, matrix, and/or # of containers logged in ba | | |
| ☐ No analysis requested. ☐ Not relinquished. ☐ No date/t | • | |
| Sampler's name indicated on COC | | |
| Sample container label(s) consistent with COC | | |
| Sample container(s) intact and good condition | • | |
| Proper containers and sufficient volume for analyses requ | • | |
| Analyses received within holding time | | |
| pH / Residual Chlorine / Dissolved Sulfide received within | | |
| Proper preservation noted on COC or sample container | <u>\text{\tiny{\text{\tiny{\tiny{\text{\tiny{\tiny{\tiny{\tiny{\text{\tiny{\tiny{\tiny{\tiny{\tiny{\tiny{\text{\text{\text{\text{\text{\text{\tiny{\text{\tiny{\tin}</u> | |
| ☐ Unpreserved vials received for Volatiles analysis | | |
| Volatile analysis container(s) free of headspace | <u>I</u> | |
| Tedlar bag(s) free of condensation CONTAINER TYPE: | 🗆 | |
| Solid: □4ozCGJ □8ozCGJ □16ozCGJ □Sleeve (_ |) □EnCores® □Terra | aCores® □ |
| Water: □VOA □VOAh □VOAna₂ □125AGB □125AG | GBh □125AGBp □1AGB | □1AGBna。□1AGBe |
| □500AGB №508AGJ □500AGJs □250AGB □250C | CGB □250CGBs □1PB | □500PB □500PB na |
| □250PB □250PBn □125PB □125PBznna □100PJ [| □100PJna ₂ □ □ | □. |
| Air: ☐Tedlar® ☐Summa® Other: ☐ Trip Bla Container: C: Clear A: Amber P: Plastic G: Glass J: Jar B: Bottle Z: Zipic Preservative: h: HCL n: HNO3 na2:Na2S2O3 na: NaOH p: HaPO4 s: HaSO | ank Lot#: Labeled/ | /Checked by: KP |