91 APR 23 ANTIO: 15



TRANSMITTAL

42501 Albrae Street, Suite 100, Fremont, California 94538

Phone: (415) 651-1906 Fax: (415) 651-8647

TO: Mr. Scott Seery

Alameda County Health Care Services

Hazardous Materials Division 80 Swan Way, Room 200 Oakland, California 94612

FROM: Rodger C. Witham TITLE: Project Manager

WE ARE SENDING YOU:

DATE: 04/19/91

PROJECT NUMBER: 18061-6

SUBJECT: Letter Report on Ground-Water Monitoring

COPIE	S DATED	DESCRIPTION
1	04/19/91	Letter Report on Quarterly Ground-Water Monitoring for Fourth Quarter 1990, at Unocal Station No. 5484, Lake Chabot Road, Castro Valley, California
1	04/19/91	Letter Report on Quarterly Ground-Water Monitoring for First Quarter 1991, at Unocal Station No. 5484.


THESE ARE TRANSMITTED as checked below:

[] For review and comment	[] Approved as submitted	[] Resubmit copies for approv
[] As requested	[] Approved as noted	[] Submit copies for distribution
[] For approval	[] Return for corrections	[] Return corrected prints
[x] For your files		

REMARKS:

Copies: 1 to AGS project file no. 18061-6

For Ashraf Mirza, Branch Manager



Applied GeoSystems

43255 Mission Boulevard, Fremont, CA 94539 (415) 651-1906

◆ FREMONT
 ◆ IRVINE
 ◆ HOUSTON
 ◆ BOSTON
 ◆ SACRAMENTO
 ◆ CULVER CITY
 ◆ SAN JOSE

LETTER REPORT GROUND-WATER MONITORING FOR FOURTH QUARTER 1990

at

Unocal Station 5484 18950 Lake Chabot Road Castro Valley, California

AGS Report No. 18061-6





43255 Mission Boulevard, Fremont, CA 94539 (415) 651-1906

● FREMONT
 ● IRVINE
 ◆ HOUSTON
 ◆ BOSTON
 ◆ SACRAMENTO
 ◆ CULVER CITY
 ◆ SAN JOSE

April 19, 1991 AGS 18061-6

Mr. Ron Bock Unocal Corporation 2000 Crow Canyon Place, Suite 400 San Ramon, California 94583

Subject:

Letter Report on Ground-Water Monitoring for the Fourth Quarter of 1990 at

Unocal Station 5484, 18950 Lake Chabot Road, Castro Valley, California

Mr. Bock:

This letter report summarizes results of the fourth quarter 1990 ground-water monitoring by Applied GeoSystems (AGS) at the above-referenced Unocal Station. The site is located at 18950 Lake Chabot Road in Castro Valley, California (Plate P-1). The location of the ground-water monitoring wells and pertinent site features are presented on Plate P-2.

Background

At the request of Unocal Corporation (Unocal), AGS first became involved with the site in June 1988, after the unleaded gasoline tank failed pressure tests. AGS installed three ground-water monitoring wells, designated MW-1 through MW-3, in July 1988; and three additional monitoring wells, MW-4 through MW-6, in October 1988.

Under contract to Unocal, Paradiso Construction Company of Oakland, California, in June 1989 excavated and disposed of 1,800 cubic yards of hydrocarbon-impacted soil, and removed and replaced two gasoline underground storage tanks (USTs) and one waste-oil UST. Wells MW-1 and MW-3 were sampled quarterly from July 1988 until June 1989 when these wells were destroyed during tank excavation activities. Well MW-2 has been sampled quarterly since June 1988, wells MW-4 and MW-5 since June 1989, and MW-6 since August 1989.

Sampling Procedures

The quarterly monitoring program conducted by AGS includes measuring depths to water, subjectively evaluating ground-water samples, and purging and sampling ground water for laboratory analysis from monitoring wells MW-2, MW-4, MW-5, and MW-6. This quarterly monitoring episode was performed on November 29, 1990, using the Field Procedures described in Attachment I.

Results of Subjective Evaluations

No evidence of sheen or floating product was noted on ground water in any of the monitoring wells. Cumulative results of subjective evaluations are summarized in Table 1.

Ground-Water Gradient and Flow

The depth-to-ground-water measurements and ground-water elevations were used to calculate ground-water surface elevations in the wells (Table 2). A graphical interpretation of ground-water surface elevation for November 29, 1990, is presented on Plate P-2. The ground water below the site is estimated to flow toward the southwest with a gradient of approximately 0.09. This direction of ground-water flow is consistent with ground-water flow inferred from previous monitoring episodes.

Analytical Methods and Results

Ground-water samples collected from the wells were analyzed for total petroleum hydrocarbons as gasoline (TPHg) by modified Environmental Protection Agency (EPA) Method 8015, and for benzene, toluene, ethylbenzene, and total xylenes (BTEX) by EPA Method 602. Ground-water samples from wells MW-2 and MW-5 were also analyzed for total oil and grease (TOG) by Standard Method 503A/E. These analyses were conducted at the state certified, Applied Analytical Environmental Laboratories (Hazardous Waste Testing Laboratory Certification No. 1211) in Fremont, California. Samples from wells MW-2 and MW-5 were submitted to Chromalab, Inc. (Certification No. E694) of San Ramon, California, and analyzed for volatile organic compounds (VOC) by EPA Method 601. The Chain of Custody Record and laboratory Analysis Reports are in Attachment II.

Results of the laboratory analyses of ground-water samples are as follows:

o No detectable TPHg and BTEX exist in the water samples from wells MW-4, MW-5, and MW-6 (Table 3).

- O The sample from well MW-2 (closest to and downgradient from the gasoline USTs) contains 190 parts per billion (ppb) TPHg and BTEX constituents ranging from nondetectable to 1.6 ppb. The concentrations of TPHg and BTEX are lower than those in previous analyses of well MW-2 (Table 3).
- o No detectable concentrations of TOG and VOC exist in the water samples from wells MW-2 and MW-5 (Table 4).

Recommendations

AGS recommends continuing ground-water monitoring of well MW-2 on a quarterly basis, and wells MW-4, MW-5, and MW-6 on a semiannual basis. In addition, AGS recommends discontinuing analyses for VOC and TOG, because the last four sampling episodes showed nondetectable results for these constituents. AGS also recommends that copies of this report be submitted to Mr. Scott Seery of the Alameda County Health Care Services Agency, Department of Environmental Health, Hazardous Materials Division, 80 Swan Way, Room 200, Oakland, California 94621; and Mr. Lester Feldman of the California Regional Water Quality Control Board, San Francisco Bay Region, 1800 Harrison Street, Suite 700, Oakland, California 94612.

Scheduling

The first quarter 1991 ground-water monitoring of MW-2 is scheduled for February 22, 1991.

Please call if you have any questions.

Sincerely, Applied GeoSystems

Kuth MeVil for

William T. DeLon Staff Geologist

Joan E. Tiernan Registered Civil Engineer No. 044600

Enclosures:

Table 1, Cumulative Results of Subjective Evaluations

Table 2, Ground-Water Elevation Data

Table 3, Cumulative Results of Laboratory Analyses of Ground-Water Samples for TPHg and BTEX

Table 4, Results of Laboratory Analyses of Ground-Water Samples for TOG and VOC

Plate P-1, Site Vicinity Map

Plate P-2, Generalized Site Plan and Ground-Water Surface Elevation Map

Attachment I Field Procedures

Attachment II Chain of Custody Reports Attachment III Laboratory Analysis Reports

Submitted: January 25, 1991 Revised: April 19, 1991

TABLE 1
CUMULATIVE RESULTS OF SUBJECTIVE EVALUATIONS
(page 1 of 3)

Well	Date	Depth to Water*	Inches of Floating Product	Sheen
MW-1	7/88	5.16	NONE	NONE
	10/88	7.10	NONE	NONE
	11/2/88	6.08	NONE	NONE
	11/9/88	6.14	NONE	NONE
	12/15/88	6.51	NONE	SLIGHT
	1/3/89	5.10	NONE	NONE
	1/16/89	4.75	NONE	NONE
	2/15/89	5.13	NONE	NONE
	3/17/89	3.68	NONE	NONE
	4/14/89	3.12	NONE	NONE
	5/19/89	3.46	NONE	NONE
	6/89	Well des	troyed during tank	c excavation
MW-2	7/88	6.85	NONE	NONE
	10/88	7.81	NONE	SLIGHT
	11/2/88	7.83	NONE	NONE
	11/9/88	7.98	NONE	NONE
	12/15/88	7.89	NONE	NONE
	1/3/89	6.50	NONE	NONE
	1/16/89	6.02	NONE	NONE
	2/15/89	5.22	NONE	NONE
	3/17/89	3.98	NONE	NONE
	4/14/89	3.83	NONE	NONE
	5/19/89	4.85	NONE	NONE
	6/29/89	7.24	NONE	NONE
	11/17/89	7.73	NONE	NONE
	11/21/89	7.24	NONE	NONE
	2/28/90	4.53	NONE	SLIGHT
	5/08/90	5.50	NONE	NONE
	8/24/90	6.04	NONE	NONE
	11/29/90	7.48	NONE	NONE

See notes on page 3 of 3.

TABLE 1
CUMULATIVE RESULTS OF SUBJECTIVE EVALUATIONS
(page 2 of 3)

Well	Date	Depth to Water*	Inches of Floating Product	Sheen
MW-3	7/88	7.49	NONE	NONE
	10/88	9.06	9.0	NA
	11/2/88	9.12	11.5	NA
	11/9/88	7.60	0.75	NA
	12/15/88	7.97	6.72	NA
	1/3/89	7.20	1.08	NA
	1/16/89	6.36	2.64	NA
	2/15/89	5.16	0.12	NA
	3/17/89	5.01	0.48	NA
	4/14/89	4.71	<0.01	HEAVY
	5/19/89	5.49	NONE	MODERATE
	6/89	Well destr	oyed during tank	excavation
MW-4	6/29/89	9.95	NONE	NONE
	11/17/89	10.56	NONE	NONE
	11/21/89	10.83	NONE	NONE
	2/28/90	9.40	NONE	NONE
	5/08/90	9.70	NONE	NONE
	8/24/90	10.10	NONE	NONE
	11/29/90	10.90	NONE	NONE
MW-5	6/29/89	9.03	NONE	NONE
	11/17/89		NONE	NONE
	11/21/89	9.56	NONE	NONE
	2/28/90	8.26	NONE	NONE
	5/08/90	8.89	NONE	NONE
	8/24/90	9.93	NONE	NONE
	11/29/90	10.53	NONE	NONE

See notes on page 3 of 3.

TABLE 1
CUMULATIVE RESULTS OF SUBJECTIVE EVALUATIONS
(page 3 of 3)

Well	Date	Depth to Water*	Inches of Floating Product	Sheen
MW-6	8/1/89	7.34	NONE	NONE
	11/17/89	8.36	NONE	NONE
	11/21/89	8.59	NONE	NONE
	2/28/90	7.05	NONE	NONE
	5/08/90	7.35	NONE	NONE
	8/24/90	8.15	NONE	NONE
	11/29/90	9.40	NONE	NONE

* = Depth to water measured in feet below top of casing.

NA = Not applicable

-- = Not recorded

TABLE 2 GROUND-WATER ELEVATION DATA

Monitoring Well Number	Top of Casing (C)	Static Water Depth (W)	Water level Elevation (C - W)
November 29, 19	90		
MW-2	228.88	7.48	221.40
MW-4	227.75	10.90	216.85
MW-5	225.10	10.53	214.57
MW-6	239.00	9.40	229.60

Measurements are in feet. Depth measured from top of casing. Elevations are in feet relative to mean sea level. Well head elevations surveyed by Ron Archer Civil Engineer, Inc.

TABLE 3
CUMULATIVE RESULTS OF LABORATORY ANALYSES
OF GROUND-WATER SAMPLES FOR TPHG AND BTEX
(page 1 of 2)

Sample	Date	TPHg	В	T	E	X
MW-1						
W-7-MW1	7/88	540	6.1	82.7	35.6	180.3
W-8-MW1	10/88	1,420	13.2	4.1	163.8	58.1
W-5-MW1	1/89	410	6.5	10.4	11.8	44.2
	6/89	Well	destroyed du	ring tank	excavati	on
MW-2						
W-9-MW2	7/88	1,080	72	139	33	157.0
W-9-MW2	10/88	1,140	80	10	25	26.0
W-6-MW2	1/89	4,040	103	673	78	527
W-10-MW2	6/89	550	2.7	1.9	10	34
W-15-MW2	11/89	720	1.4	1.4	5.9	34
W-15-MW2	3/90	420	5.0	<0.50	3.0	17
W-11-MW2	5/90	1,100	9.7	0.95	14	48
W-8-MW2	8/90	630	13	1.0	7.2	10
W-7-MW2	11/90	190	1.6	<0.50	0.7	0.8
MW-3						
W-9-MW3	7/88	7,800	385	640	369	2,258
	10/88	•	Well not san	mpled		
	1/89		Well not san	_		
	6/89		Well destroy	-	g tank ex	cavation
MW-4						
W-14-MW4	6/89	<20	<0.50	<0.50	<0.50	<0.5
W-11-MW4		<20	<0.50	<0.50	<0.50	<0.5
W-23-MW4	3/90	<20	<0.50	<0.50	<0.50	<0.5
W-18-MW4	,	<20	<0.50	<0.50	<0.50	<0.5
W-12-MW4	8/90	<20	<0.50	<0.50	<0.50	<0.5
W-11-MW4		<20	<0.50	<0.50	<0.50	<0.5

See notes on page 2 of 2.

TABLE 3 CUMULATIVE RESULTS OF LABORATORY ANALYSES OF GROUND-WATER SAMPLES FOR TPH9 AND BTEX (page 2 of 2)

Sample	Date	TPHg	В	T	E	Х
MW-5						
W-11-MW5	6/89	<20	0.83	<0.50	0.57	0.94
W-16-MW5	11/89	<20	<0.50	<0.50	<0.50	0.63
W-18-MW5	3/90	<20	<0.50	<0.50	<0.50	<0.50
W-13-MW5	5/90	<20	<0.50	<0.50	<0.50	<0.50
W-11-MW5	8/90	<20	<0.50	<0.50	<0.50	<0.50
W-11-MW5	11/90	<20	<0.50	<0.50	<0.50	<0.5
MW-6						
W-12-MW6	8/89	26	<0.50	<0.50	<0.50	<0.5
W-9-MW6	11/89	<20	<0.50	<0.50	<0.50	<0.5
W-22-MW6	3/90	<20	<0.50	<0.50	<0.50	<0.5
W-15-MW6	5/90	<20	<0.50	<0.50	<0.50	<0.5
W-10-MW6	8/90	<20	<0.50	<0.50	<0.50	<0.5
W-09-MW6	11/90	<20	<0.50	<0.50	<0.50	<0.5

Results in part per billion (ppb)

BTEX = benzene, toluene, ethylbenzene, and total xylenes TPHg = total petroleum hydrocarbons as gasoline

= less than the method detection limit

Sample designation: W-22-MW6

> - Monitoring well (MW) number - Approximate depth of sample - Water sample

TABLE 4
RESULTS OF LABORATORY ANALYSES OF
GROUND-WATER SAMPLES FOR TOG AND VOC

Sample	Date	TOG	Voc
MW-2			
W-15-MW2	11/21/89	<5,000	NA
W-8-MW2	11/17/89	NA	ND
W-15-MW2	03/09/90	<5,000	ND
W-8-MW2	08/24/90	<5,000	ND
W-7-MW2	11/29/90	<5,000	ND
MW-5			
W-16-MW5	11/21/89	<5,000	NA
W-7-MW5	11/17/89	NA	ND
W-18-MW5	03/09/90	<5,000	ND
W-11-MW5	08/24/90	<5,000	ND
W-11-MW5	11/29/90	<5,000	ND

Results in parts per billion (ppb)

TOG = Total oil and grease (Standard Method 503A/E)

VOC = Volatile organic compounds (EPA Method 601 or 624)


= Less than the reported limit of detection for the method of analysis used


NA = Not analyzed

ND = No Method 601/624 compounds were detected

Sample designation: W-18-MW5

Monitoring well (MW) number
Approximate depth of sample
Water sample

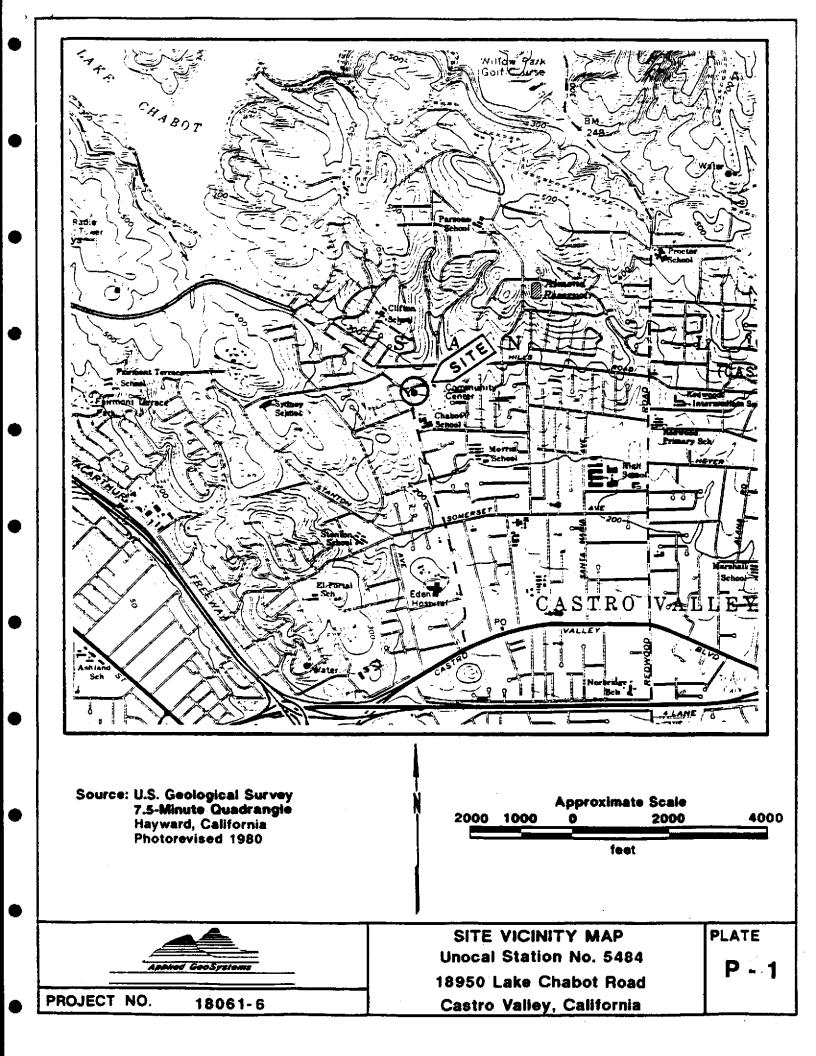

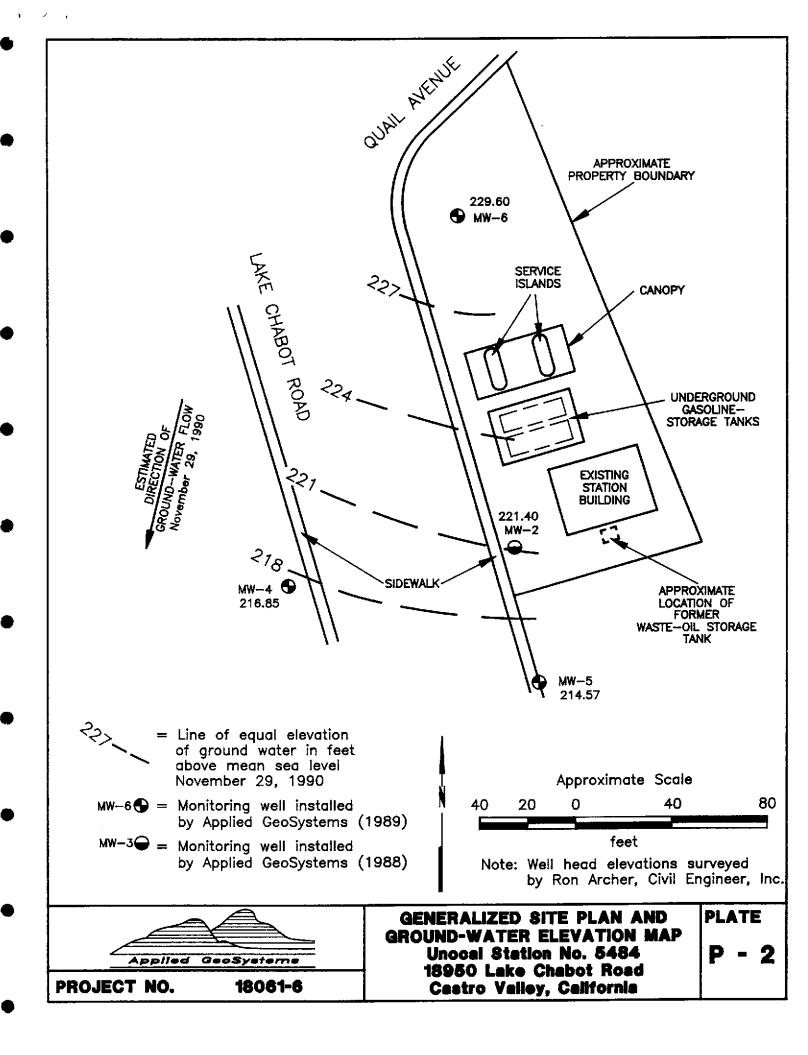

ATTACHMENT I FIELD PROCEDURES

FIELD PROCEDURES

Subjective Evaluations

The static ground-water level in each well (MW-2, MW-4, MW-5, and MW-6) was measured to the nearest 0.01 foot using a Solinst water-level indicator. After static ground-water level was recorded, an initial water sample was collected from each well and subjectively evaluated for floating product and sheen. Each sample was collected by gently lowering approximately half the length of a Teflon bailer past the air-water interface and collecting a sample from near the surface of the water in each well. The bailer was cleaned with Alconox and deionized water after each use.

Ground-Water Sampling

Before ground-water samples were collected, monitoring wells MW-2, MW-4, MW-5 and MW-6 were purged by pumping approximately three well volumes of water from the wells, or until pH, temperature, and conductivity readings stabilized. Water samples were collected when ground water had recovered to at least 80 percent of static water levels. Each sample was collected by gently lowering approximately half the length of a Teflon bailer. The bailer was cleaned with Alconox and deionized water after each use.

Water samples for TPHg, BTEX, and VOC analyses were transferred to 40-milliliter glass vials. Hydrochloric acid was added to the samples to be analyzed for TPHg and BTEX as a preservative, and the vials were sealed promptly with Teflon-lined caps or lids. For TOG analyses, one-liter bottles were used. The samples were labeled and placed in iced storage for transport to the laboratory. Chain-of-custody protocol was observed throughout the process of handling the samples.

Ground-Water Reporting

Concentrations of hydrocarbon constituents in ground-water samples are reported by the laboratory in units of parts per billion (ppb). The maximum contaminant levels listed in Title 22 of the California Code of Regulations for benzene, ethylbenzene, and total xylene isomers are 1.0, 680, and 1,750 ppb, respectively. The action level established by the California Department of Health Services for toluene is 100 ppb. To conform with the laboratory reports we report ground-water chemical data in units of ppb.

Purge Water

Purge water from the ground-water monitoring wells was temporarily stored onsite in properly labelled and secured 17E 55-gallon liquid-waste drums approved for this use by the Department of Transportation. Purge water was disposed of on December 7, 1990, by Armour Petroleum of Vacaville, California.

ATTACHMENT II CHAIN OF CUSTODY RECORD AND LABORATORY ANALYSIS REPORTS

TAPATION BOOK OF NAME	HATN	·OF	- C	บริเ	OD	Y	BEC	O	RD		•	
1806-6 Unocal lake CHARet Pad			7	5/5	17	Al 7	VAL	YS 7	īs / 7			
Laus N M			line (8015)	020	(E)	//_			//			
DATE TIME	No of Cont-	TPHOP	BTEX	TOHOL	18/	3						LABORATORY
1/29/40 N-7-MW-2	alners 6	V	2	_	to	1			HIE	MAN	IARKS Zn VOC TOG	I.D. NUMBER
W-11-MW-4	2	V	7			-			Vel/Ite	7		
W-11-MW-5	6	V		-	V	-	-	-	Helf ze E	NO HO	In voc	
N-9-MW-6	2	V			-		_	_	1 / 26°	1		
				_ - -		-	-	 	120			
				_								
			_		_ _							
				_		 	-					
				_		_						
				_	-	-						× 2000 - 1000 - 1000
DATE / HARE SHEAR DITY [Signature) ONTE / HARE ONTE / HARE ONTE / HARE ONTE / HARE ONTE / HARE				11-2	9-9-	-	Abor Ay	100 J	150)- 2/4/10	n N	42501 Albrae Suite 100 Fremont, Cal (415) 651 198	lifornia 94639
1. 11			 	17:	0.0	I	urn	Ari	oun <mark>d;</mark> '	ZWK	Proj. Mgr.	Kain Minikkac

_

APPLIED ANALYTICAL

Environmental Laboratories

42501 Albrae St., Suite 100 Fremont, CA 94538 Bus: (415) 623-0775 Fax: (415) 651-8647

ANALYSIS REPORT

Attention: Mr. Keith McVicker Applied GeoSystems 42501 Albrae Street Fremont, CA 94538 Project: AGS 18061-6			Dat BTI TPI TPI	te Sampled: te Received: EX Analyzed: Hg Analyzed: Hd Analyzed: trix:	11-29-9 11-29-9 12-12-9 12-12-9 NR Water	0 0	
Detection I	.imit:	Benzene ppb 0.5	Toluene ppb 0.5	Ethyl- benzene ppb 0.5	Total Xylenes <u>ppb</u> 0.5	TPHg <u>ppb</u> 50	TPHd <u>ppb</u> 100
SAMPLE Laboratory Ide	entificat	ion					
W-7-MW2 W1011454		1.6	ND	0.7	0.8	190	NR
W-11-MW4 W1011455		ND	ND	ND	ND	ND	NR
W-11-MW5 W1011456		ND	ND	ND	ND	ND	NR

ND

ND

W-9-MW6

W1011457

ANALYTICAL PROCEDURES

ND

ND

ND

NR

BTEX—Benzene, toluene, ethylbenzene, and total xylene isomers (BTEX) are measured by extraction using EPA Method 5030 followed by analysis using EPA Method 8020/602, which utilizes a gas chromatograph (GC) equipped with a photoionization detector (PID) and a flame-ionization detector (FID) in series.

TPHg-Total petroleum hydrocarbons as gasoline (low-to-medium boiling points) are measured by extraction using EPA Method 5030, followed by analysis using modified EPA Method 8015, which utilizes a GC equipped with an FID.

TPHd-Total petroleum hydrocarbons as diesel (high boiling points) are measured by extraction using EPA Method 3550 for soils and EPA Method 3510 for water, followed by modified EPA Method 8015 with direct sample injection into a GC equipped with an FID.

Zkvek December 14, 1990
Laboratory Representative Date Reported

APPLIED ANALYTICAL LABORATORY IS CERTIFIED BY THE STATE OF CALIFORNIA DEPARTMENT OF HEALTH SERVICES AS A HAZARDOUS WASTE TESTING LABORATORY (Certification No. 1211)

ppb = parts per billion = μg/L = micrograms per liter.

ND = Not detected. Compound(s) may be present at concentrations below the detection limit.

NR = Analysis not requested.

APPLIED ANALYTICAL

Environmental Laboratories

42501 Albrae St., Suite 100 Fremont, CA 94538 Bus: (415) 623-0775 Fax: (415) 651-8647

ANALYSIS REPORT

togwater.rpt

Report Prepared for: Applied GeoSystems 42501 Albrae Street Fremont, CA 94538

Attention: Keith McVicker

Date Received: Laboratory #:

W1011454 Project #: 18061-8 Sample #: W-7-MW2

Matrix:

Water

11-29-90

	Parameter		Result (µg/L)	Detection Limit (µg/L)	Date Analyzed		
TPH	as (oil	and	Grease	ND	5000	12-03-90

 $\mu g/L$ = micrograms per liter = ppb

= Not detected. Compound(s) may be present at concentrations below the detection limit.

PROCEDURES

TPH as Oil and Grease: Total Oil and Grease of mineral or petroleum origin are measured by extraction and gravimetric analysis according to Standard Method 503A/E.

Laura Kuck, Laboratory Manager

December 12, 1990 Date Reported

APPLIED ANALYTICAL

Environmental Laboratories

42501 Albrae St., Suite 100 Fremont, CA 94538 Bus: (415) 623-0775 Fax: (415) 651-8647

ANALYSIS REPORT

togwater.rpt

Report Prepared for: Applied GeoSystems 42501 Albrae Street Fremont, CA 94538 Attention: Keith McVicker Date Received: Laboratory #: Project #: Sample #:

Matrix:

11-29-90 W1011456 18061-8 W-11-MW5

Water

Parameter	Result	Detection Limit	Date
	(µg/L)	(μg/L)	Analyzed
TPH as Oil and Grease	e ND	5000	12-03-90

 $\mu g/L$ = micrograms per liter = ppb

ND = Not detected. Compound(s) may be present at concentrations below the detection limit.

PROCEDURES

TPH as Oil and Grease: Total Oil and Grease of mineral or petroleum origin are measured by extraction and gravimetric analysis according to Standard Method 503A/E.

Laura Kuck, Laboratory Manager

December 12, 1990
Date Reported

CHROMALAB, INC.

Analytical Laboratory Specializing in GC-GC/MS

December 12, 1990

Client: <u>Applied GeoSystem</u>
Date Sampled: <u>Nov. 29 1990</u>

Date of Analysis: Dec. 10, 1990

ChromaLab File # 1290014 A

Drinking Water

Waste Water

Consultation

Attn: Keith McVicker

Date Submitted: Dec. 05, 1990

Environmental AnalysisHazardous Waste (#

(#E694)

(#955)

Project Name: <u>Unocal-Lake Chabot</u> Project No.: 18061-6

Sample i.D.: W-7-MW2

Method of Analysis: EPA 601 Detection Limit: 0.5 µg/L

COMPOUND NAME	<u>ug</u> /L	Spike Recovery
CHLOROMETHANE	N.D	~
VINYL CHLORIDE	N.D.	
BROMOMETHANE	N.D.	
CHLOROETHANE	N.D.	
TRICHLOROFLUOROMETHANE	N.D.	
1,1-DICHLOROETHENE	N.D.	102.5% 96.5%
METHYLENE CHLORIDE	N.D.	
1,2-DICHLOROETHENE (TOTAL)	N.D.	
1,1-DICHLOROETHANE	N.D.	
CHLOROFORM	N.D.	
1,1,1-TRICHLOROETHANE	N.D.	
CARBON TETRACHLORIDE	N.D.	99.7% 93.5%
1,2-DICHLOROETHANE	N.D.	
TRICHLOROETHENE	N.D.	
1,2-DICHLOROPROPANE	N.D.	*
BROMODICHLOROMETHANE	N.D.	
2-CHLOROETHYLV:NYLETHER	N.D.	-
TRANS-1,3-DICHLOROPROPENE	N.D.	98.2% 96 <i>.</i> 1%
CIS-1,3-DICHLOROPROPENE	N.D.	~ =
1,1,2-TRICHLOROETHANE	N.D.	-
TETRACHLOROETHENE	N.D.	
DIBROMOCHLOROMETHANE	N.D.	
CHLOROBENZENE	N.D.	1 0 1.5% 9 6.4%
BROMOFORM	N.D.	
	N.D.	 ,
1,3-DICHLOROBENZENE	N.D.	
1,4-DICHLOROBENZENE	N.D.	
1,2-DICHLOROBENZENE	N.D.	

ChromaLab, inc.

David Duong

Senior Chemist

Eric Tam Lab Director

CHROMALAB, INC.

Analytical Laboratory Specializing in GC-GC/MS

December 12, 1990

Client: Applied GeoSystem Date Sampled: Nov. 29 1990

Date of Analysis: Dec. 10, 1990

Project Name: <u>Unocal-Lake Chabot</u> Project No.: <u>18061-6</u>

Sample I.D.: <u>W-11-MW5</u>

Method of Analysis: EPA 601

 Consultation ChromaLap File # 1290014 B

Drinking Water

Waste Water

Attn: Keith McVicker

Date Submitted: Dec. 05, 1990

 Environmental Analysis Hazardous Waste

(#E694)

(#955)

Detection Limit: 0.5 µg/L

COMPOUND NAME	µg/L	Spike Recovery
CHLOROMETHANE	N.D	
VINYL CHLORIDE	N.D.	
BROMOMETHANE	N.D.	
CHLOROETHANE	N.D.	
TRICHLOROFLUOROMETHANE	N.D.	
1,1-DICHLOROETHENE	N.D.	102.5% 96.5%
METHYLENE CHLORIDE	N.D.	-
1,2-DICHLOROETHENE (TOTAL)	N.D.	
1,1-DICHLOROETHANE	N.D.	
CHLOROFORM	N.D.	
1,1,1-TRICHLOROETHANE	N.D.	
CARBON TETRACHLORIDE	N.D.	99 .7% 93.5%
1,2-DICHLOROETHANE	N.D.	
TRICHLOROETHENE	N.D.	
1,2-DICHLOROPROPANE	N.D.	
BROMODICHLOROMETHANE	N.D.	
2-CHLOROETHYLVINYLETHER	N.D.	~ = -
TRANS-1,3-DICHLOROPROPENE		98.2% 96.1%
CIS-1,3-DICHLOROPROPENE	N.D.	
1,1,2-TRICHLOROETHANE	N.D.	
TETRACHLOROETHENE	N.D.	
DIBROMOCHLOROMETHANE	N.D.	
CHLOROBENZENE	N.D.	101.5% 96.4%
BROMOFORM	N.D.	
	N.D.	-
1,3-DICHLOROBENZENE	N.D.	
1,4-DICHLOROBENZENE	N.D.	
1,2-DICHLOROBENZENE	N.D.	

ChromaLab, Inc.

David Duong

Senior Chemist

Eric Tam Lab Director