

ExxonMobil
Refining & Supply Company
Global Remediation
4096 Piedmont Avenue #194
Oakland, CA 94611
510.547.8196
510.547.8706 FAX
jennifer.c.sedlachek@exxonmobil.com

720-362
Jennifer C. Sedlachek
Project Manager

ExxonMobil
Refining & Supply

February 17, 2005

Mr. Bob Schultz
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway
Alameda, CA 94501-6577

Subject: Former Exxon RAS #7-3399, 2991 Hopyard Road, Pleasanton, California,
ACHCSA File No. RO-362

Dear Mr. Schultz:

Attached for your review and comment is a copy of the *Report of Groundwater Monitoring, Fourth Quarter 2004* for the above-referenced site. The report was prepared by ETIC Engineering, Inc. of Pleasant Hill, California, and summarizes the results of the December 2004 sampling event.

Upon information and belief, I declare, under penalty of perjury, that the information contained in the attached report is true and correct.

If you have any questions or comments, please contact me at 510.547.8196.

Sincerely,



Jennifer C. Sedlachek
Project Manager

Attachment: ETIC Groundwater Monitoring Report dated February 2005

- c: w/ attachment:
Ms. Cherie McMaulou - California Regional Water Quality Control Board, San Francisco Bay Region
Mr. Matthew Katen - Zone 7 Water Agency
Mr. Stephen Cusenza - City of Pleasanton Public Works Department
Mr. Thomas Elson - Luhdorff and Scalmanini Consulting Engineers
Mr. Joseph A. Aldridge - Valero Energy Corporation
- c: w/o attachment:
Ms. Christa Marting - ETIC Engineering, Inc.



368

Report of Groundwater Monitoring Fourth Quarter 2004

**Former Exxon Retail Site 7-3399
2991 Hopyard Road
Pleasanton, California**

ACHCSA File No. RO-362

Prepared for

ExxonMobil Oil Corporation
4096 Piedmont Avenue #194
Oakland, California 94611

RECORDED
FEB 23 2005
EXXONMOBIL U.S.A.
ENVIRONMENTAL SERVICES

Prepared by


ETIC Engineering, Inc.
2285 Morello Avenue
Pleasant Hill, California 94523
(925) 602-4710


Bryan Campbell
Project Manager

February 14, 2005
Date

Heidi Dieffenbach-Carle
Heidi Dieffenbach-Carle, R.G. #6793
Senior Geologist

February 14, 2005
Date

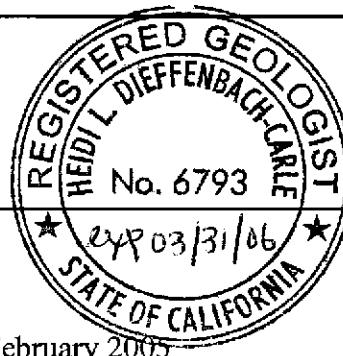

February 2005

SITE CONTACTS

Site Name: Former Exxon Retail Site 7-3399

Site Address: 2991 Hopyard Road
Pleasanton, California

ExxonMobil Project Manager: Jennifer C. Sedlachek
ExxonMobil Refining and Supply Company
4096 Piedmont Avenue #194
Oakland, California 94611
(510) 547-8196

Consultant to ExxonMobil: ETIC Engineering, Inc.
2285 Morello Avenue
Pleasant Hill, California 94523
(925) 602-4710

ETIC Project Manager: Bryan Campbell

Regulatory Oversight: Bob Schultz
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway
Alameda, California 94501-6577
(510) 567-6719

Cherie McMaulou
California Regional Water Quality Control Board
San Francisco Bay Region
1515 Clay Street, Suite 1400
Oakland, California 94612
(510) 622-2342

Matthew Katen
Zone 7 Water Agency
5997 Parkside Drive
Pleasanton, California 94588
(925) 484-2600

INTRODUCTION

At the request of ExxonMobil Oil Corporation, ETIC Engineering, Inc. has prepared this quarterly groundwater monitoring report for former Exxon Retail Site 7-3399. This report presents the results for the most recent groundwater monitoring conducted at the site and summarizes recent site activities. This report covers site activities from 20 and 21 September 2004, the date of the last monitoring event, until 20 December 2004, the dates of the recent monitoring event. The report also presents results for remediation system monitoring. Groundwater monitoring results, well construction details, a groundwater monitoring plan, and system monitoring results are summarized in the attached figures and tables. Groundwater monitoring protocols, field data, and analytical results are provided in the attached appendixes.

GENERAL SITE INFORMATION

| | |
|----------------------------------|---|
| Site name: | Former Exxon Retail Site 7-3399 |
| Site address: | 2991 Hopyard Road, Pleasanton, California |
| Current property owner: | Kirk D. Morrison Trust |
| Current site use: | Active Valero-branded station and auto repair facility operated by Steve Asmann Incorporated; fuel system owned and maintained by Valero Energy Corporation |
| Current phase of project: | Groundwater monitoring, groundwater extraction |
| Tanks at site: | Three underground storage tanks (three grades of gasoline) |
| Number of wells: | 22 (16 onsite, 6 offsite) |

GROUNDWATER MONITORING SUMMARY

| | |
|---|--|
| Gauging and sampling date: | 20 December 2004 |
| Wells gauged and sampled: | MW1, MW4, MW5D, MW5S, MW7, MW12A, MW13, MW14, PMW3-PMW5 |
| Wells gauged only: | MW8, MW9A, MW10, MW11, OW1, OW2, PMW1, PMW2, PMW6, VR1, VR2 |
| Groundwater flow direction (zone 1): | Southwest |
| Groundwater gradient (zone 1): | 0.02 |
| Groundwater flow direction (deeper): | Northwest |
| Groundwater gradient (deeper): | 0.003 |
| Remediation system status during groundwater monitoring event: | Groundwater extraction system operating |
| Well screens submerged: | MW5D, MW8, MW12A, MW13, MW14 |
| Well screens not submerged: | MW1, MW4, MW5S, MW7, MW9A, MW10, MW11, OW1, OW2, PMW1-PMW6, VR1, VR2 |
| Liquid-phase hydrocarbons: | Not observed or detected |
| Laboratory: | TestAmerica, Inc., Nashville, Tennessee |

Analyses performed:

- Total Petroleum Hydrocarbons as gasoline by EPA Method 8015B
- Benzene, toluene, ethylbenzene, total xylenes and methyl t-butyl ether by EPA Method 8021B
- Methyl t-butyl ether by EPA Method 8260B (confirmation samples)
- Ethanol by EPA Method 8260 B (selected samples)

Additional comments:

Wells VR2 and PMW1 were dry on 20 December 2004.

Wells OW1, OW2, PMW1-PMW6, and VR1 are considered to be screened in a perched groundwater zone.

Grab groundwater samples were collected from wells MW5S, MW11 and PMW5 due to low water column. No groundwater sample was collected from well MW9A, MW10, OW1, PMW2 and PMW6 due to low water column.

REMEDIATION SYSTEM SUMMARY

Groundwater Extraction System

System description:

The groundwater extraction system (GES) is capable of extracting groundwater from 4 wells: MW9A, OW1, OW2, and VR1. Groundwater is pumped, using electric submersible pumps for wells MW9A and VR1, and using pneumatic pumps for wells OW1 and OW2, through particulate filters, and through two 1,000-pound activated carbon vessels in series. The treated water is discharged to the sanitary sewer under a discharge permit issued by the Dublin San Ramon Services District.

System startup date: 12 March 2001
Active extraction wells: OW2, VR1 (Until 27 October 2005); None (From 27 October 2005)
Inactive extraction wells/reason: MW9A, OW1 - not operating due to low water levels in MW9A and OW1

Modifications made during reporting period/reasons for modifications:

No modifications were made during the reporting period.

Status of system operation during reporting period/reasons for downtime:

The GES was shut down on 27 October 2004 to monitor groundwater under non-pumping conditions per a conversation with the Alameda County Health Care Services Agency (ACHCSA) on 21 October 2004.

System performance data totals (totals since system startup, as of 27 October 2004):

Groundwater extracted: 1,240,120 gallons
Pounds of TPH removed: 1.403 (calculated as the sum of TPH-g and TPH-d)
Pounds of benzene removed: 0.008
Pounds of MTBE removed: 0.782

GES proposed work:

The GES will remain shut down to monitor groundwater under non-pumping conditions.

ADDITIONAL ACTIVITIES PERFORMED AT SITE

The GES was shut down on 27 October 2004 to monitor groundwater under non-pumping conditions per a conversation with the ACHCSA on 21 October 2004.

ETIC received a letter from the ACHCSA dated 29 December 2004. ETIC will prepare a response to address the specific items in the letter.

WORK PROPOSED FOR NEXT QUARTER


Groundwater will be monitored in accordance with the attached groundwater monitoring plan. The GES will remain shut down to monitor groundwater under non-pumping conditions.

Attachments:

- Figure 1: Site Plan Showing Groundwater Elevations and Analytical Results
- Figure 2: Influent TPH Concentrations and Estimated Mass of TPH Removed by Groundwater Extraction
- Figure 3: Influent Benzene Concentrations and Estimated Mass of Benzene Removed by Groundwater Extraction
- Figure 4: Influent MTBE Concentrations and Estimated Mass of MTBE Removed by Groundwater Extraction


- Table 1: Well Construction Details
- Table 2: Groundwater Monitoring Data
- Table 3: Groundwater Analytical Results for Oxygenates and Additives
- Table 4: Groundwater Monitoring Plan
- Table 5: Operation and Performance Data - Groundwater Extraction System
- Table 6: Summary of Analytical Results - Groundwater Extraction System

- Appendix A: Field Protocols
- Appendix B: Field Documents
- Appendix C: Laboratory Analytical Reports

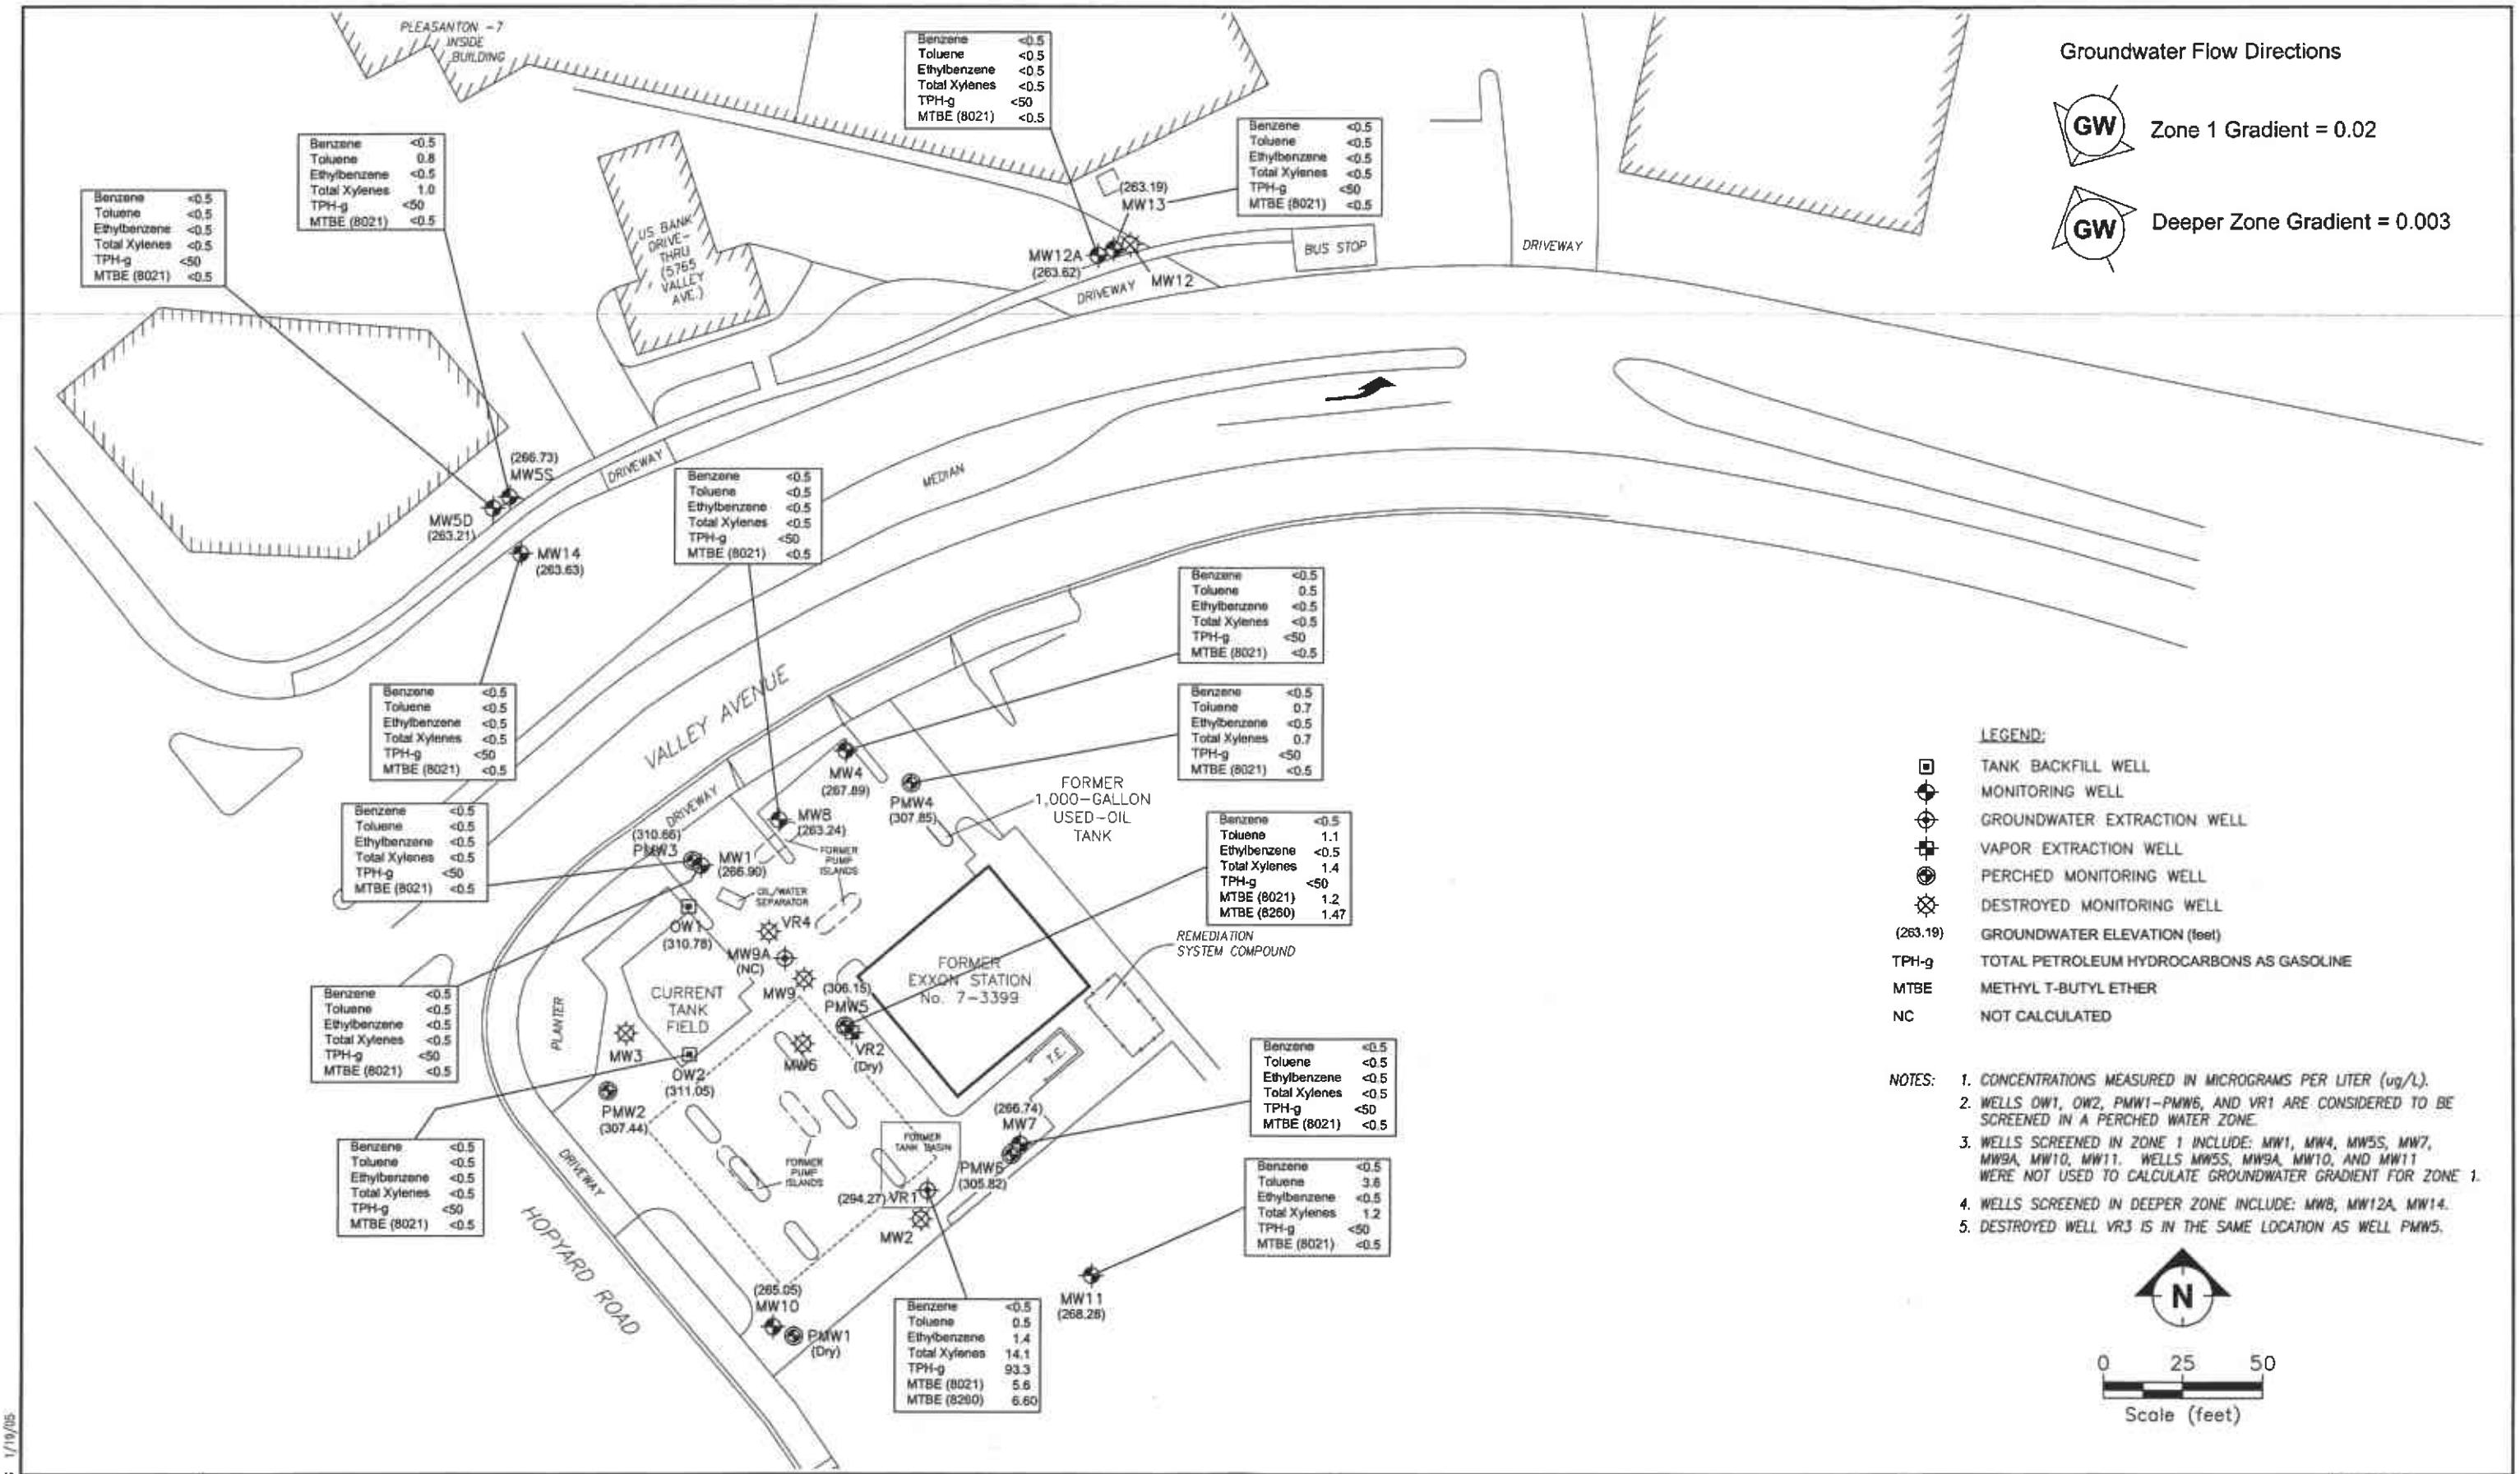


SITE PLAN SHOWING GROUNDWATER ELEVATIONS AND ANALYTICAL RESULTS
FORMER EXXON RS 7-3399
2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA
20 DECEMBER 2004

Figure 2: Influent TPH Concentrations and Estimated Mass of TPH Removed by Groundwater Extraction
Former Exxon RS 7-3399, 2991 Hopyard Road, Pleasanton, CA

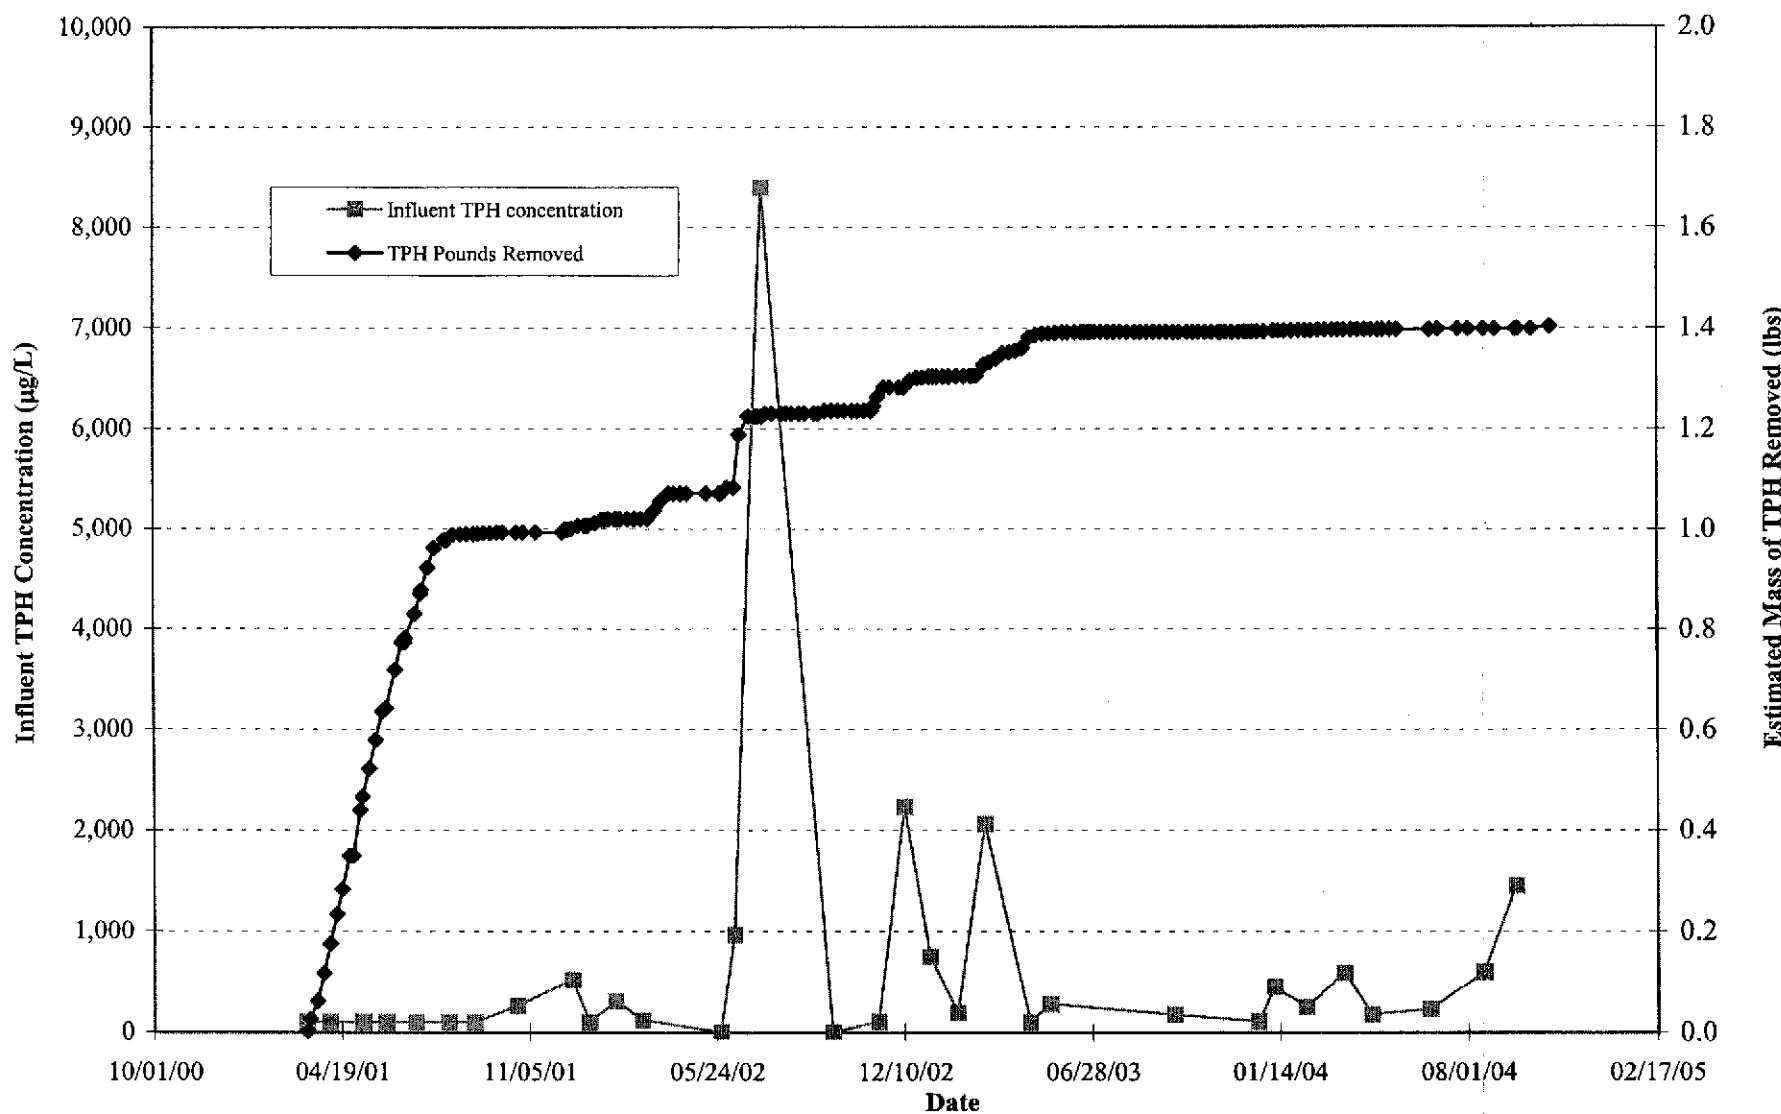

Note: When analyte is not detected, laboratory reporting limit is used for concentration and mass removed calculations.


Figure 3: Influent Benzene Concentrations and Estimated Mass of Benzene Removed by Groundwater Extraction
Former Exxon RS 7-3399, 2991 Hopyard Road, Pleasanton, CA

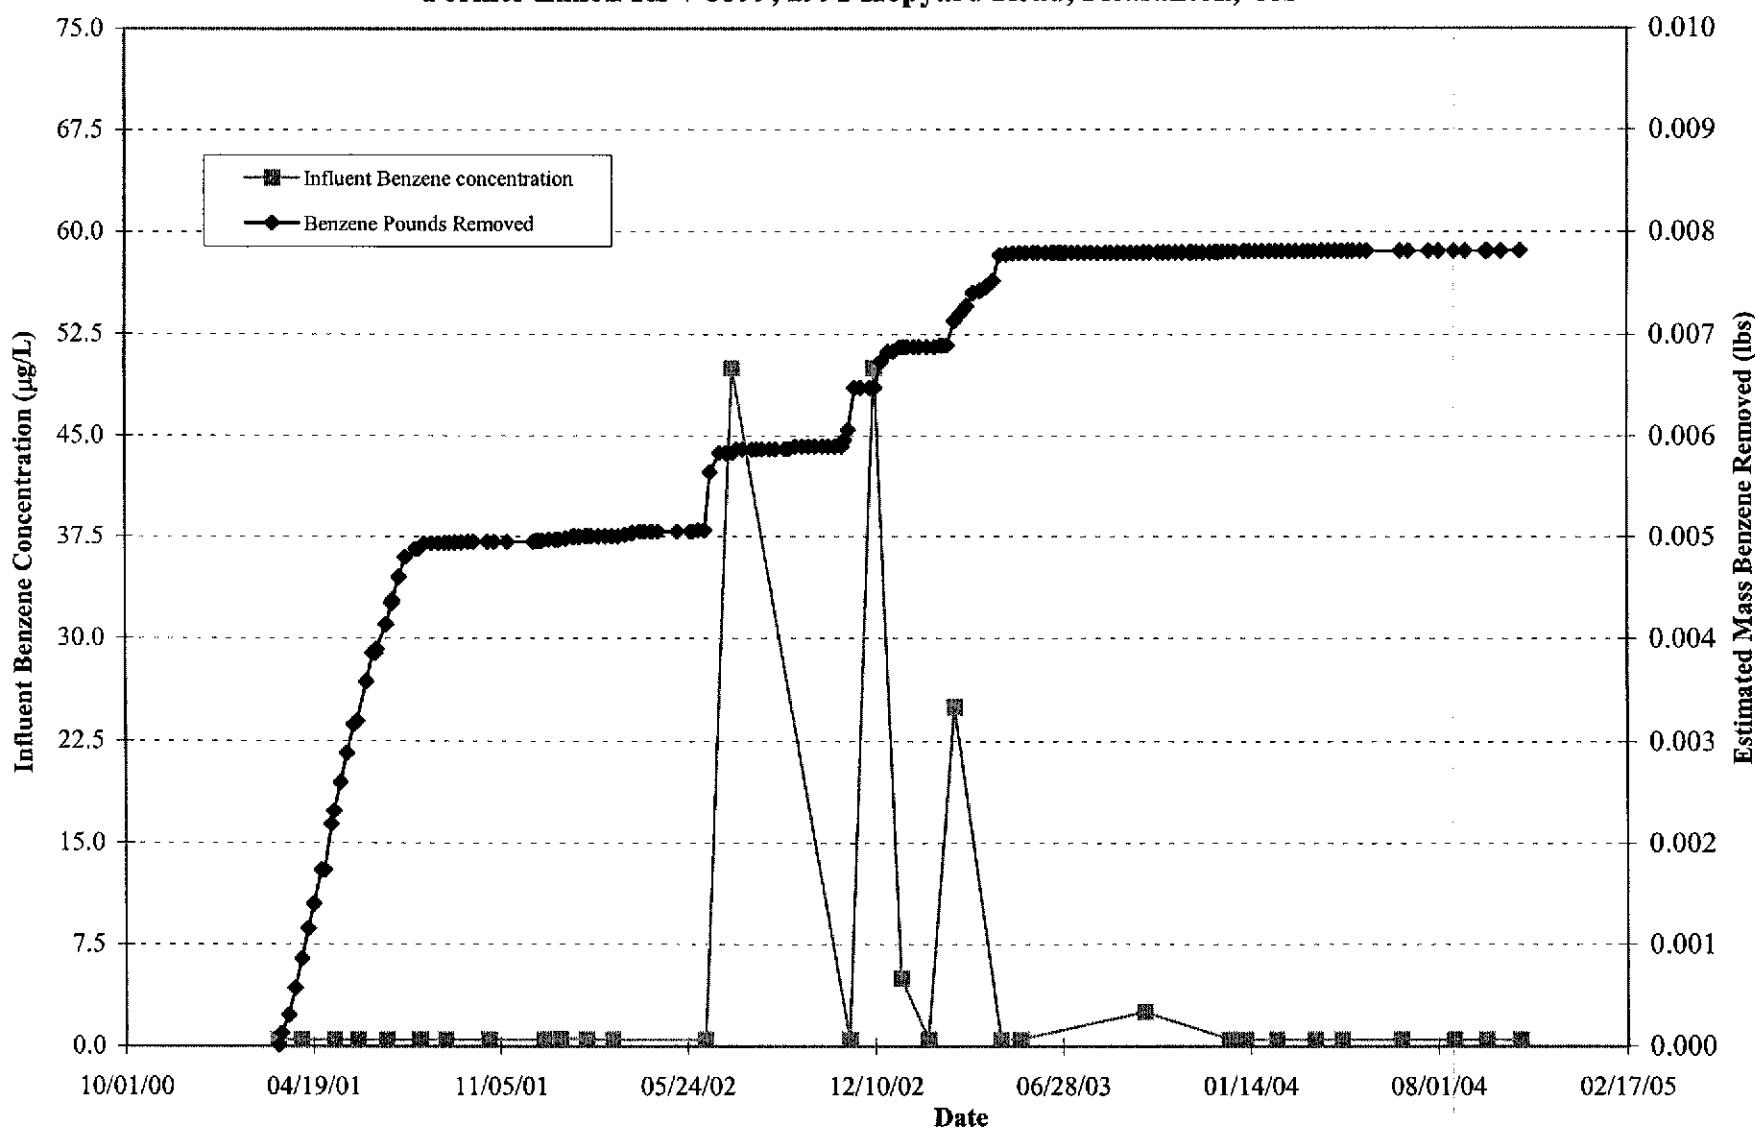

Note: When analyte is not detected, laboratory reporting limit is used for concentration and mass removed calculations.

G:\Projects\73399\MasterO&M\3399_h2o.xls - Benzene Graph

Figure 4: Influent MTBE Concentrations and Estimated Mass of MTBE Removed by Groundwater Extraction
Former Exxon RS 7-3399, 2991 Hopyard Road, Pleasanton, CA

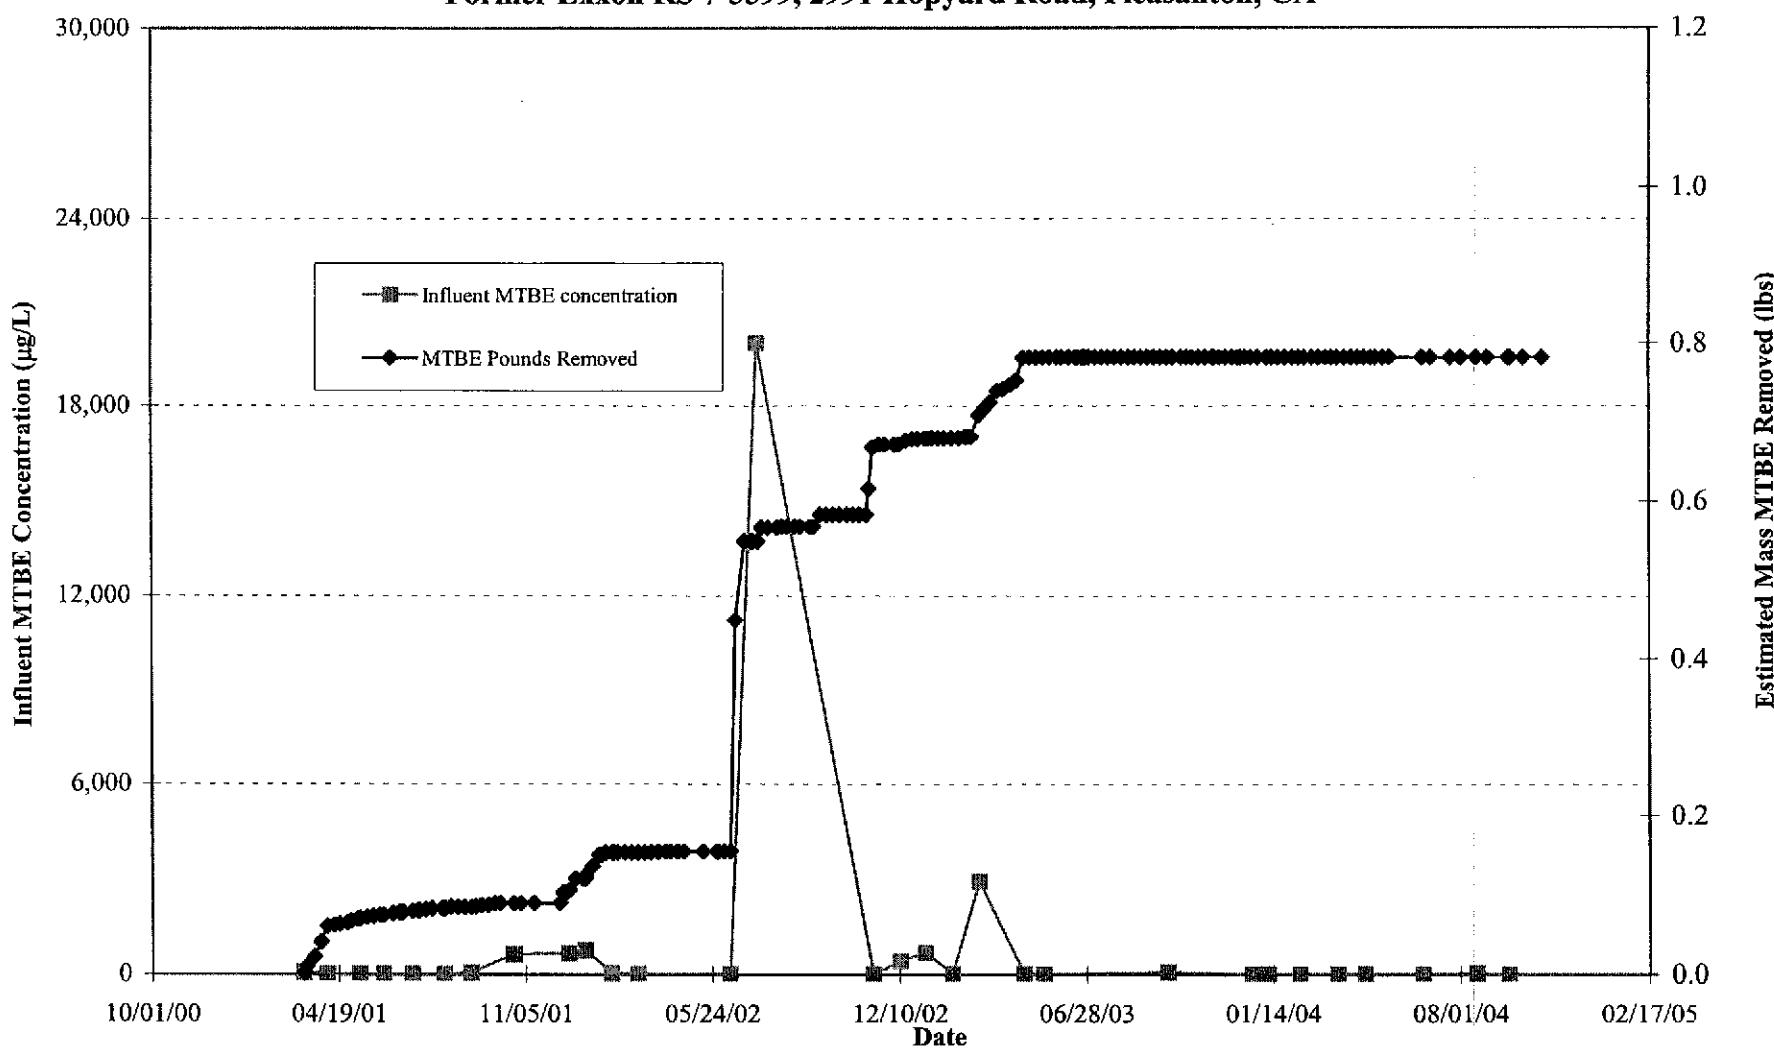

Note: When analyte is not detected, laboratory reporting limit is used for concentration and mass removed calculations.

TABLE 1 WELL CONSTRUCTION DETAILS, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Well Number | | Well Installation Date | Elevation TOC (feet) | Casing Material | Total Depth (feet) | Well Depth (feet) | Borehole Diameter (inches) | Casing Diameter (inches) | Screened Interval (feet) | Slot Size (inches) | Filter Pack Interval (feet) | Filter Pack Material | Water Bearing Zone |
|-------------|------|------------------------|----------------------|-----------------|--------------------|-------------------|----------------------------|--------------------------|--------------------------|--------------------|-----------------------------|----------------------|--------------------|
| MW1 | d | 04/01/88 | 320.52 | -- | 57 | 57 | -- | 4 | 32-57 | 0.020 | 30-57 | -- | Zone 1 |
| MW2 | a | 04/02/88 | | -- | 57 | 57 | -- | 4 | 37-57 | 0.020 | 34-57 | -- | -- |
| MW3 | a | 04/04/88 | | -- | 60 | 56 | -- | 4 | 36-56 | 0.020 | 35-60 | -- | -- |
| MW4 | d | 04/06/88 | 321.56 | -- | 60 | 57 | -- | 4 | 37-57 | 0.020 | 36-60 | -- | Zone 1 |
| MW5D | d | 05/10/88 | 321.79 | -- | 82.0 | 77.5 | -- | 4 | 67.5-77.5 | 0.020 | 64-77.5 | -- | Zone 2 |
| MW5S | d | 05/11/88 | 320.52 | -- | 58 | 55 | -- | 4 | 40-55 | 0.020 | 37.5-58 | -- | Zone 1 |
| MW6 | a | 05/11/88 | | -- | 59 | 55 | -- | 4 | 40-55 | 0.020 | 36-59 | -- | -- |
| MW7 | d | 07/12/88 | 321.27 | -- | 56.5 f | 53 | -- | 5 | 28-53 | 0.020 | 25-56.5 | -- | Zone 1 |
| MW8 | d | 09/30/89 | 321.86 | PVC | 140 | 133 | 14 | 4 | 118-133 | 0.020 | 114-133 | -- | Deeper Zone |
| MW9 | a | 10/04/89 | | PVC | 57.5 | 54.5 | 10 | 4 | 34.5-54.5 | 0.020 | 34-54.5 | -- | -- |
| MW9A | d | 11/03/00 | 321.27 | PVC | 59 | 58 | 12.25 | 6 | 35-55 55-58 c | 0.020 | 33-58 | #3 Sand | Zone 1 |
| MW10 | d | 10/06/89 | 322.99 | PVC | 60.5 | 60 | 10 | 4 | 40-60 | 0.020 | 38-60 | -- | Zone 1 |
| MW11 | d | 11/02/89 | 321.73 | PVC | 55.5 | 55 | 10 | 4 | 35-55 | 0.020 | 33-55 | -- | Zone 1 |
| MW12 | a | 08/17/00 | | PVC | 132 | 131.5 | 8.33 | 2 | 114.5-131.5 | 0.020 | 112.5-132 | #3 Sand | -- |
| MW12A | d | 08/30/00 | 322.62 | PVC | 136 | 130.5 | 8.33 | 2 | 115.5-130.5 | 0.020 | 113.5-130.5 | #3 Sand | Deeper Zone |
| MW13 | d, b | 08/23/00 | 322.71 | PVC and Steel | 73 | 72 | 8.33 | 2 | 61.5-72 | 0.020 | 57.5-73 | #3 Sand | Zone 2 |
| MW14 | d | 08/29/00 | 321.24 | PVC | 143 | 136 | 8.33 | 2 | 121.5-136.5 | 0.020 | 119.5-143 | #3 Sand | Deeper Zone |

TABLE 1 WELL CONSTRUCTION DETAILS, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Well Number | Well Installation Date | Elevation TOC (feet) | Casing Material | Total Depth (feet) | Well Depth (feet) | Borehole Diameter (inches) | Casing Diameter (inches) | Screened Interval (feet) | Slot Size (inches) | Filter Pack Interval (feet) | Filter Pack Material | Water Bearing Zone |
|-------------|------------------------|----------------------|-----------------|--------------------|-------------------|----------------------------|--------------------------|--------------------------|--------------------|-----------------------------|----------------------|--------------------|
| OW1 | tank backfill well | NM | -- | -- | -- | -- | 4 | e | -- | -- | -- | Perched Zone |
| OW2 | d tank backfill well | 321.55 | -- | -- | -- | -- | 4 | e | -- | -- | -- | Perched Zone |
| PMW1 | d 12/16/99 | 322.75 | PVC | 16 | 16 | 10 | 4 | 6-16 | 0.010 | 5.5-16 | #2/12 Sand | Perched Zone |
| PMW2 | d 12/16/99 | 322.37 | PVC | 16 | 16 | 10 | 4 | 6-16 | 0.010 | 5.5-16 | #2/12 Sand | Perched Zone |
| PMW3 | d 12/16/99 | 321.27 | PVC | 16 | 16 | 10 | 4 | 6-16 | 0.010 | 5.5-16 | #2/12 Sand | Perched Zone |
| PMW4 | d 12/16/99 | 321.37 | PVC | 16 | 16 | 10 | 4 | 6-16 | 0.010 | 5.5-16 | #2/12 Sand | Perched Zone |
| PMW5 | d 12/16/99 | 320.04 | PVC | 35.5 | 16 | 10 | 4 | 6-16 | 0.010 | 5.5-16 | #2/12 Sand | Perched Zone |
| PMW6 | d 12/17/99 | 321.38 | PVC | 16 | 16 | 10 | 4 | 6-16 | 0.010 | 5.5-16 | #2/12 Sand | Perched Zone |
| VR1 | d 10/24/88 | 321.00 | PVC | 30 | 30 | 10 | 4 | 10-30 | 0.020 | 10-30 | -- | -- |
| VR2 | a 11/20/89 | NM | PVC | 45.5 | 45 | 8 | 2 | 35-45 | 0.020 | 33-45.5 | -- | -- |
| VR3 | a 11/20/89 | | PVC | 35.5 | 35 | 8 | 2 | 5-35 | 0.020 | 4-35.5 | -- | -- |
| VR4 | a 11/24/89 | | PVC | 35.5 | 32.5 | 8 | 2 | 12.5-32.5 | 0.020 | 4-35.5 | -- | -- |

a Well destroyed.

b PVC screen from 61.5-72, stainless steel blank from 11.5-61.5, PVC blank from surface to 11.5.

c Depth of PVC sump at base of well.

d Well surveyed in October 2001. Elevation is based on City of Pleasanton Benchmark #C-972. Brass disc in concrete abutment, 15 feet north of the southeast corner of the south bound bridge over Mocho Canal. Elevation = 330.55 feet.

e Well screen is visible near surface and is assumed to extend to near total depth.

f The total depth measured in well MW7 does not match the well completion log. On 16 September 2002, the total depth was measured as 59.83 feet below top of casing.

TABLE 1 WELL CONSTRUCTION DETAILS, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Well Number | Well Installation Date | Elevation TOC (feet) | Casing Material | Total Depth (feet) | Well Depth (feet) | Borehole Diameter (inches) | Casing Diameter (inches) | Screened Interval (feet) | Filter Pack Slot Size (inches) | Filter Pack Interval (feet) | Water Bearing Material | Zone |
|-------------|------------------------|----------------------|-----------------|--------------------|-------------------|----------------------------|--------------------------|--------------------------|--------------------------------|-----------------------------|------------------------|------|
|-------------|------------------------|----------------------|-----------------|--------------------|-------------------|----------------------------|--------------------------|--------------------------|--------------------------------|-----------------------------|------------------------|------|

Perched Zone Gradient generally not calculated.
 Zone 1 Gradient calculated quarterly.
 Zone 2 Possible communication with Zone 1. Gradient generally not calculated.
 Deeper Zone Gradient calculated quarterly.

NM Not measured.
 PVC Polyvinyl chloride.
 TOC Top of casing.

-- Information not available.

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW1 | 04/02/88 | 321.44 | NM | NC | NM | <0.5 | 1.7 | <0.5 | <0.5 | <20 | NA |
| MW1 | 04/06/88 | 321.44 | 36.34 | 285.10 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 04/08/88 | 321.44 | 36.29 | 285.15 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 04/19/88 | 321.44 | 36.36 | 285.08 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/06/88 | 321.44 | 38.16 | 283.28 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/23/88 | 321.44 | 38.71 | 282.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/28/88 | 321.44 | 39.16 | 282.28 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 07/06/88 | 321.44 | 39.73 | 281.71 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 07/13/88 | 321.44 | 40.22 | 281.22 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 08/12/88 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 08/26/88 | 321.44 | 41.90 | 279.54 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 09/07/88 | 321.44 | 42.27 | 279.17 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 12/07/88 | 321.44 | 43.94 | 277.50 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 12/19/88 | 321.44 | 43.70 | 277.74 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 02/09/89 | 321.44 | 42.53 | 278.91 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 03/03/89 | 321.44 | NM | NC | NM | 1.6 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 03/08/89 | 321.44 | 41.96 | 279.48 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 04/03/89 | 321.44 | 41.59 | 279.85 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 04/26/89 | 321.44 | 41.67 | 279.77 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/30/89 | 321.44 | 43.79 | 277.65 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 07/17/89 | 321.44 | 44.74 | 276.70 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 23 | NA |
| MW1 | 07/18/89 | 321.44 | 44.76 | 276.68 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 07/19/89 | 321.44 | 44.82 | 276.62 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 07/20/89 | 321.44 | 44.85 | 276.59 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 07/21/89 | 321.44 | 44.95 | 276.49 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 07/26/89 | 321.44 | 45.42 | 276.02 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 08/02/89 | 321.44 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 08/03/89 | 321.44 | 46.18 | 275.26 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethylbenzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW1 | 08/17/89 | 321.44 | 47.12 | 274.32 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 09/13/89 | 321.44 | 49.08 | 272.36 | 0.00 | 39 | 0.6 | <0.5 | 5.1 | 220 | NA |
| MW1 | 11/28/89 | 321.44 | 50.21 | 271.23 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 12/20/89 | 321.44 | NM | NC | NM | 56 | 0.72 | <0.5 | 0.71 | 220 | NA |
| MW1 | 01/09/90 | 321.44 | 49.31 | 272.13 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 01/25/90 | 321.44 | NM | NC | NM | 18 | 1.6 | <0.5 | 1.8 | 57 | NA |
| MW1 | 01/26/90 | 321.44 | 49.29 | 272.15 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 02/23/90 | 321.44 | 49.02 ^a | 272.42 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 02/23/90 | 321.44 | 49.02 | 272.42 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 02/27/90 | 321.44 | NM | NC | NM | 3.2 | 2.3 | <0.5 | 3.2 | 55 | NA |
| MW1 | 03/26/90 | 321.44 | 48.71 ^a | 272.73 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 03/26/90 | 321.44 | 48.70 | 272.74 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 04/18/90 | 321.44 | 48.79 | 272.65 | 0.00 | 1.1 | 1.6 | <0.5 | 3.1 | 25 | NA |
| MW1 | 05/17/90 | 321.44 | 49.40 | 272.04 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 06/11/90 | 321.44 | 50.83 | 270.61 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 07/30/90 | 321.44 | 52.17 | 269.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 08/27/90 | 321.44 | 53.44 | 268.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW1 | 09/28/90 | 321.44 | 53.40 | 268.04 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 12/27/90 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 03/20/91 | 321.44 | 53.35 | 268.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/20/91 | 321.44 | 53.55 | 267.89 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 09/12/91 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 12/30/91 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 01/30/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 02/16/93 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 03/02/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 03/24/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 04/14/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW1 | 05/21/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 06/08/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 07/14/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 08/10/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 09/16/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 10/07/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 11/09/92 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW1 | 12/10/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 01/26/93 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 02/16/93 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 03/11/93 | 321.44 | 53.09 | 268.35 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 04/12/93 | 321.44 | 53.32 | 268.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/01/93 | 321.44 | 53.40 | 268.04 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 07/15/93 | 321.44 | 59.80 | 261.64 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 08/15/93 | 321.44 | 53.45 | 267.99 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 09/29/93 | 321.44 | 53.43 | 268.01 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 09/30/93 | 321.44 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 10/28/93 | 321.44 | 53.38 | 268.06 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 11/23/93 | 321.44 | 53.46 | 267.98 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 11/24/93 | 321.44 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 03/10-11/94 | 321.44 | 53.46 | 267.98 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 05/04-05/94 | 321.44 | 53.34 | 268.10 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 09/01/94 ^e | 321.44 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 11/16/94 | 321.44 | 52.09 | 269.35 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 02/15/95 | 321.44 | 49.41 | 272.03 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 05/09/95 | 321.44 | 39.97 | 281.47 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 08/21/95 | 321.44 | 40.68 | 280.76 | 0.00 | <0.5 | 0.83 | <0.5 | <0.5 | <50 | <2.5 |
| MW1 | 11/30/95 | 321.44 | 38.99 | 282.45 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW1 | 03/28/96 | 321.44 | 35.70 | 285.74 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW1 | 05/31/96 | 321.44 | 34.17 | 287.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 52 | <5.0 |
| MW1 | 08/28/96 | 321.44 | 38.37 | 283.07 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW1 | 11/18/96 | 321.44 | 38.40 | 283.04 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW1 | 02/28/97 | 321.44 | 33.29 | 288.15 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW1 | 05/23/97 | 321.44 | 33.63 | 287.81 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW1 | 09/23/97 | 321.44 | 38.05 | 283.39 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 29 |
| MW1 | 12/30/97 | 321.44 | 36.74 | 284.70 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW1 | 03/24/98 | 321.44 | 31.65 | 289.79 | 0.00 | 1.4 | 2.5 | <0.5 | 1.4 | <50 | 16 |
| MW1 | 06/15/98 | 321.44 | 29.28 | 292.16 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 22 |
| MW1 | 09/11/98 | 321.44 | 34.94 | 286.50 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW1 | 12/09/98 | 321.44 | 31.14 | 290.30 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW1 | 03/31/99 | 321.44 | 28.10 | 293.34 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 124/131 ^f |
| MW1 | 06/30/99 | 321.44 | 33.94 | 287.50 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW1 | 08/03/99 | 321.44 | 37.94 | 283.50 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 09/24/99 | 320.52 | 44.92 | 275.60 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW1 | 12/22/99 | 320.52 | 9.93 | 310.59 | 0.00 | 1.9 | 1.4 | 1.5 | 7.3 | <50 | 990 ^f |
| MW1 | 01/21/00 | 320.52 | 39.35 | 281.17 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW1 | 04/04/00 | 320.52 | 34.70 | 285.82 | 0.00 | <1 | <1 | <1 | <1 | <50 | <1 |
| MW1 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW1 | 06/28/00 | 320.52 | 39.72 | 280.80 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW1 | 09/26/00 | 320.52 | 43.26 | 277.26 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW1 | 12/28/00 | 320.52 | 42.90 | 277.62 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| MW1 | 03/28/01 | 320.52 | 42.36 | 278.16 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/<1.0 ^f |
| MW1 | 06/25/01 | 320.52 | 45.51 | 275.01 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW1 | 09/26/01 | 320.52 | 53.21 | 267.31 | 0.00 | 3.0 | 4.4 | 1.2 | 5.2 | <50 | <2.5 |
| MW1 | 12/17/01 | 320.52 | 53.21 | 267.31 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW1 | 03/18/02 | 320.52 | 52.31 | 268.21 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW1 | 06/17/02 | 320.52 | 52.67 | 267.85 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/18/02 | 320.52 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW1 | 09/16/02 | 320.52 | 53.46 | 267.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW1 | 12/17/02 | 320.52 | 53.53 | 266.99 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 03/28/03 | 320.52 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 06/16/03 | 320.52 | 53.23 | 267.29 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW1 | 09/22/03 | 320.52 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW1 | 12/22/03 | 320.52 | 53.52 | 267.00 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 03/23/04 | 320.52 | 53.45 | 267.07 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/21/04 | 320.52 | 53.47 | 267.05 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 06/22/04 | 320.52 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW1 | 09/20/04 | 320.52 | 53.63 | 266.89 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW1 | 09/21/04 | 320.52 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW1 | 12/20/04 | 320.52 | 53.62 | 266.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW2 | 04/02/88 | NM | NM | NC | 0.25 | NS | NS | NS | NS | NS | NS |
| MW2 | 04/04/88 | NM | NM | NC | 1.5 | NS | NS | NS | NS | NS | NS |
| MW2 | 04/05/88 | NM | NM | NC | 1.5 | NS | NS | NS | NS | NS | NS |
| MW2 | 04/06/88 | NM | 39.31 | NC | 3.2 | NS | NS | NS | NS | NS | NS |
| MW2 | 04/08/88 | NM | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW2 | 04/19/88 | NM | 38.90 | NC | 2.48 | NS | NS | NS | NS | NS | NS |
| MW2 | 06/06/88 | NM | 38.78 | NC | 0.26 | NS | NS | NS | NS | NS | NS |
| MW2 | 06/23/88 | NM | 39.23 | NC | 0.13 | NS | NS | NS | NS | NS | NS |
| MW2 | 06/28/88 | NM | 39.72 | NC | NM | NS | NS | NS | NS | NS | NS |
| MW2 | 07/06/88 | NM | 40.31 | NC | Slight sheen | 25,700 | 18,500 | 2,900 | 21,400 | 62,000 | NA |
| MW2 | 07/12/88 | | | Well destroyed | | | | | | | |
| MW3 | 04/06/88 | NM | 37.19 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 20 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW3 | 04/08/88 | NM | 37.14 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW3 | 04/19/88 | NM | 37.22 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW3 | 06/06/88 | NM | 39.02 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW3 | 06/23/88 | NM | 39.58 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW3 | 06/28/88 | NM | 40.04 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW3 | 07/06/88 | NM | 40.60 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW3 | 07/13/88 | NM | 41.09 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW3 | 08/12/88 | NM | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW3 | 08/26/88 | NM | 42.77 | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW3 | 08/29/88 | Well destroyed | | | | | | | | | |
| MW4 | 04/08/88 | 321.56 | 36.41 | 285.15 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 04/11/88 | 321.56 | NM | NC | NM | 1.8 | 16.3 | 0.6 | 7.1 | 80 | NA |
| MW4 | 04/19/88 | 321.56 | 36.51 | 285.05 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 06/06/88 | 321.56 | 38.26 | 283.30 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 06/23/88 | 321.56 | 38.83 | 282.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 06/28/88 | 321.56 | 39.28 | 282.28 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 07/06/88 | 321.56 | 39.85 | 281.71 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW4 | 07/13/88 | 321.56 | 40.31 | 281.25 | 0.00 | <0.5 | 0.9 | <0.5 | <0.5 | <20 | NA |
| MW4 | 08/12/88 | 321.56 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW4 | 08/26/88 | 321.56 | 42.01 | 279.55 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/07/88 | 321.56 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW4 | 12/07/88 | 321.56 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW4 | 12/19/88 | 321.56 | 43.83 | 277.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 02/09/89 | 321.56 | 42.67 | 278.89 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 03/08/89 | 321.56 | 42.11 | 279.45 | 0.00 | 3.8 | 1.0 | <0.5 | <0.5 | 440 | NA |
| MW4 | 04/03/89 | 321.56 | 41.73 | 279.83 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 04/26/89 | 321.56 | 41.79 | 279.77 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW4 | 06/30/89 | 321.56 | 43.88 | 277.68 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 100 | NA |
| MW4 | 07/17/89 | 321.56 | 44.85 | 276.71 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 390 | NA |
| MW4 | 07/18/89 | 321.56 | 44.88 | 276.68 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 07/19/89 | 321.56 | 44.92 | 276.64 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 07/20/89 | 321.56 | 44.98 | 276.58 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 200 | NA |
| MW4 | 07/21/89 | 321.56 | 45.04 | 276.52 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 07/26/89 | 321.56 | 45.50 | 276.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 66 | NA |
| MW4 | 08/02/89 | 321.56 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW4 | 08/03/89 | 321.56 | 46.28 | 275.28 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 08/17/89 | 321.56 | 47.22 | 274.34 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/13/89 | 321.56 | 49.19 | 272.37 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW4 | 11/28/89 | 321.56 | 50.34 | 271.22 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 12/20/89 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW4 | 01/09/90 | 321.56 | 49.47 | 272.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 01/26/90 | 321.56 | 49.36 | 272.20 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 02/23/90 | 321.56 | 49.18 ^a | 272.38 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 02/23/90 | 321.56 | 49.15 | 272.41 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 03/26/90 | 321.56 | 48.84 ^a | 272.72 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW4 | 03/26/90 | 321.56 | 48.83 | 272.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 04/18/90 | 321.56 | 48.90 | 272.66 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 05/17/90 | 321.56 | 50.03 | 271.53 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 06/11/90 | 321.56 | 50.98 | 270.58 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 07/30/90 | 321.56 | 53.57 | 267.99 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 08/01/90 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW4 | 08/27/90 | 321.56 | 53.61 | 267.95 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/28/90 | 321.56 | 53.57 | 267.99 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 12/27/90 | 321.56 | 53.68 | 267.88 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 03/20/91 | 321.56 | 53.56 | 268.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-------------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW4 | 06/20/91 | 321.56 | 53.75 | 267.81 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/12/91 | 321.56 | 53.70 | 267.86 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 12/30/91 | 321.56 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW4 | 01/30/92 | 321.56 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW4 | 03/02/92 | 321.56 | 53.83 | 267.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 03/24/92 | 321.56 | 53.73 | 267.83 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 04/14/92 | 321.56 | 53.76 | 267.80 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 05/21/92 | 321.56 | 54.73 | 266.83 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 06/08/92 | 321.56 | 53.80 | 267.76 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 07/14/92 | 321.56 | 53.60 | 267.96 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 08/10/92 | 321.56 | 53.71 | 267.85 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/16/92 | 321.56 | 53.89 | 267.67 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 10/07/92 | 321.56 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW4 | 11/09/92 | 321.56 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW4 | 12/10/92 | 321.56 | 53.83 | 267.73 | 0.00 | 57 | 34 | 11 | 200 | 600 | NA |
| MW4 | 01/26/93 | 321.56 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW4 | 02/16/93 | 321.56 | 53.64 | 267.92 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 03/11/93 | 321.56 | 53.54 | 268.02 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 04/12/93 | 321.56 | 53.62 | 267.94 | 0.00 | 20 | 10 | 22 | 80 | 360 | NA |
| MW4 | 06/01/93 | 321.56 | 53.52 | 268.04 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 07/15/93 | 321.56 | 53.80 | 267.76 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 08/15/93 | 321.56 | 53.65 | 267.91 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/29/93 | 321.56 | 54.23 | 267.33 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/30/93 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 10/28/93 | 321.56 | 53.54 | 268.02 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 11/23/93 | 321.56 | 53.57 | 267.99 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 11/24/93 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 03/10-11/94 | 321.56 | 53.64 | 267.92 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW4 | 05/04-05/94 | 321.56 | 53.54 | 268.02 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 09/01/94 ^e | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 11/16/94 | 321.56 | 52.96 | 268.60 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 02/15/95 | 321.56 | 50.37 | 271.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 05/09/95 | 321.56 | 44.86 | 276.70 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW4 | 08/21/95 | 321.56 | 41.71 | 279.85 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 2.6 |
| MW4 | 11/30/95 | 321.56 | 39.95 | 281.61 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW4 | 03/28/96 | 321.56 | 36.76 | 284.80 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW4 | 05/31/96 | 321.56 | 35.19 | 286.37 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW4 | 08/28/96 | 321.56 | 39.39 | 282.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 11/18/96 | 321.56 | 39.42 | 282.14 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 02/28/97 | 321.56 | 34.38 | 287.18 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 05/23/97 | 321.56 | 34.66 | 286.90 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/23/97 | 321.56 | 39.05 | 282.51 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW4 | 12/30/97 | 321.56 | 37.78 | 283.78 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 03/24/98 | 321.56 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW4 | 06/15/98 | 321.56 | 30.32 | 291.24 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/11/98 | 321.56 | 35.97 | 285.59 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW4 | 12/09/98 | 321.56 | 32.93 | 288.63 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 03/31/99 | 321.56 | 29.71 | 291.85 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |
| MW4 | 06/30/99 | 321.56 | 34.99 | 286.57 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 2.65/3.12 ^{f,h} |
| MW4 | 08/03/99 | 321.56 | 38.52 | 283.04 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/24/99 | 321.56 | 42.93 | 278.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1.12 ^f |
| MW4 | 12/22/99 | 321.56 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW4 | 04/04/00 | 321.56 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW4 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW4 | 06/28/00 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW4 | 09/26/00 | 321.56 | 44.24 | 277.32 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethylbenzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW4 | 12/28/00 | 321.56 | 43.92 | 277.64 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| MW4 | 03/28/01 | 321.56 | 43.39 | 278.17 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/<1.0 ^f |
| MW4 | 06/25/01 | 321.56 | 46.56 | 275.00 | 0.00 | <0.5 | <0.5 | <0.5 | 0.66 | <50 | <2.5 |
| MW4 | 09/26/01 | 321.56 | 53.51 | 268.05 | 0.00 | <0.5 | 0.69 | <0.5 | 0.96 | <50 | <2.5 |
| MW4 | 12/17/01 | 321.56 | 53.51 | 268.05 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW4 | 03/18/02 | 321.56 | 53.28 | 268.28 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 03/19/02 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 06/17/02 | 321.56 | 53.57 | 267.99 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 09/16/02 | 321.56 | 53.63 | 267.93 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW4 | 12/17/02 | 321.56 | 53.68 | 267.88 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 03/28/03 | 321.56 | 53.70 | 267.86 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 06/16/03 | 321.56 | 53.56 | 268.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 09/22/03 | 321.56 | 53.69 | 267.87 | 0.00 | <0.5 | 1.0 | <0.5 | 0.8 | <50 | <0.5 |
| MW4 | 12/22/03 | 321.56 | 53.66 | 267.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 03/23/04 | 321.56 | 53.61 | 267.95 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 06/21/04 | 321.56 | 53.64 | 267.92 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 06/22/04 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW4 | 09/20/04 | 321.56 | 53.75 | 267.81 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW4 | 09/21/04 | 321.56 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW4 | 12/20/04 | 321.56 | 53.67 | 267.89 | 0.00 | <0.5 | 0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 05/25/88 | 321.79 | 38.55 | 283.24 | 0.00 | <0.5 | 3.1 | <0.5 | <0.5 | <20 | NA |
| MW5D | 06/06/88 | 321.79 | 38.90 | 282.89 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 06/23/88 | 321.79 | 39.56 | 282.23 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 06/28/88 | 321.79 | 40.23 | 281.56 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 07/06/88 | 321.79 | 40.69 | 281.10 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 07/13/88 | 321.79 | 41.22 | 280.57 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 40 | NA |
| MW5D | 08/12/88 | 321.79 | 42.34 | 279.45 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW5D | 08/26/88 | 321.79 | 42.60 | 279.19 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 09/07/88 | 321.79 | 42.99 | 278.80 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 12/07/88 | 321.79 | 44.58 | 277.21 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 02/09/89 ^c | 321.79 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW5D | 03/08/89 ^d | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 03/08/89 | 321.79 | 42.49 | 279.30 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 04/03/89 | 321.79 | 42.21 | 279.58 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 04/26/89 | 321.79 | 42.36 | 279.43 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 06/30/89 | 321.79 | 44.79 | 277.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 07/17/89 | 321.79 | 45.73 | 276.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 07/18/89 | 321.79 | 45.75 | 276.04 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 07/19/89 | 321.79 | 44.89 | 276.90 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 07/20/89 | 321.79 | 46.02 | 275.77 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 07/21/89 | 321.79 | 46.18 | 275.61 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 07/26/89 | 321.79 | 46.83 | 274.96 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 08/02/89 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 08/03/89 | 321.79 | 47.67 | 274.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 08/17/89 | 321.79 | 48.27 | 273.52 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 09/13/89 | 321.79 | 50.60 | 271.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 11/28/89 | 321.79 | 51.16 | 270.63 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 12/20/89 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 01/09/90 | 321.79 | 50.42 | 271.37 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 01/26/90 | 321.79 | 50.10 | 271.69 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 02/23/90 | 321.79 | 50.08 | 271.71 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 03/26/90 | 321.79 | 49.77 | 272.02 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 04/18/90 | 321.79 | 49.80 | 271.99 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 05/17/90 | 321.79 | 51.32 | 270.47 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 06/11/90 | 321.79 | 52.10 | 269.69 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW5D | 07/30/90 | 321.79 | 53.47 | 268.32 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 08/01/90 | 321.79 | NM | NM | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5D | 08/27/90 | 321.79 | 58.24 | 263.55 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 09/29/90 | 321.79 | 60.70 | 261.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 12/27/90 | 321.79 | 62.52 | 259.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 03/20/91 | 321.79 | 59.18 | 262.61 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 06/20/91 | 321.79 | 65.02 | 256.77 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 09/12/91 | 321.79 | DRY | DRY | NM | NS | NS | NS | NS | NS | NS |
| MW5D | 12/30/91 | 321.79 | DRY | DRY | NM | NS | NS | NS | NS | NS | NS |
| MW5D | 01/30/92 | 321.79 | DRY | DRY | NM | NS | NS | NS | NS | NS | NS |
| MW5D | 03/02/92 | 321.79 | DRY | DRY | NM | NS | NS | NS | NS | NS | NS |
| MW5D | 03/24/92 | 321.79 | 74.98 | 246.81 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 04/14/92 | 321.79 | 74.42 | 247.37 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 05/21/92 | 321.79 | 75.67 | 246.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 06/08/92 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 07/14/92 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 08/10/92 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 09/16/92 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 10/07/92 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 11/09/92 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 12/10/92 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 01/26/93 | 321.79 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5D | 02/16/93 | 321.79 | 76.47 | 245.32 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 03/11/93 | 321.79 | 74.03 | 247.76 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 04/12/93 | 321.79 | 70.96 | 250.83 | 0.00 | 1.0 | 1.0 | 2.5 | 7.4 | <50 | NA |
| MW5D | 06/01/93 | 321.79 | 67.64 | 254.15 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 07/15/93 | 321.79 | 54.40 | 267.39 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 08/15/93 | 321.79 | 67.85 | 253.94 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-------------------|-----------------------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW5D | 09/29/93 | 321.79 | 67.62 | 254.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 09/30/93 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 10/28/93 | 321.79 | 66.15 | 255.64 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 11/23/93 | 321.79 | 64.80 | 256.99 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 03/10-11/94 | 321.79 | 59.10 | 262.69 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 05/04-05/94 | 321.79 | 55.66 | 266.13 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 09/01/94 ^e | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 11/16/94 | 321.79 | 54.36 | 267.43 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 02/15/95 | 321.79 | 51.20 | 270.59 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 05/09/95 | 321.79 | 45.49 | 276.30 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5D | 05/12/95 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 08/21/95 | 321.79 | 42.35 | 279.44 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 11/30/95 | 321.79 | 43.60 | 278.19 | 0.00 | 5.4 | 10 | 1.4 | 12 | 77 | <5.0 |
| MW5D | 03/28/96 | 321.79 | 37.12 | 284.67 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5D | 05/31/96 | 321.79 | 35.67 | 286.12 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5D | 08/28/96 | 321.79 | 40.22 | 281.57 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5D | 11/18/96 | 321.79 | 39.89 | 281.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5D | 02/28/97 | 321.79 | 34.75 | 287.04 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^D | 02/28/97 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^R | 02/28/97 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 05/23/97 | 321.79 | 35.21 | 286.58 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^D | 05/23/97 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^R | 05/23/97 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 09/23/97 | 321.79 | 39.58 | 282.21 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^D | 09/23/97 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^R | 09/23/97 | 321.79 | NM | NC | NM | <0.5 | 1.5 | <0.5 | <0.5 | <50 | 3.0 |
| MW5D | 12/30/97 | 321.79 | 38.30 | 283.49 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D ^D | 12/30/97 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-------------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW5D ^R | 12/30/97 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5D | 03/24/98 | 321.79 | 32.77 | 289.02 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 06/15/98 | 321.79 | 30.69 | 291.10 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^D | 06/15/98 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 09/11/98 | 321.79 | 36.68 | 285.11 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 33 |
| MW5D ^D | 09/11/98 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 35 |
| MW5D | 10/28/98 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW5D | 12/09/98 | 321.79 | 32.70 | 289.09 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW5D ^D | 12/09/98 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW5D ^R | 12/09/98 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW5D | 03/31/99 | 321.79 | 28.91 | 292.88 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |
| MW5D ^D | 03/31/99 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |
| MW5D | 06/30/99 | 321.79 | 35.90 | 285.89 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D ^D | 06/30/99 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 3.3/<0.5 ^{fh} |
| MW5D ^R | 06/30/99 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 08/03/99 | 321.79 | 40.39 | 281.40 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5D ^D | 08/03/99 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5D | 09/24/99 | 321.79 | 44.25 | 277.54 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5D ^D | 09/24/99 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5D ^R | 09/24/99 | 321.79 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5D | 12/22/99 | 321.79 | 38.51 | 283.28 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW5D ^D | 12/22/99 | 321.79 | NM | NC | NM | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW5D | 04/04/00 | 321.79 | 30.05 | 291.74 | 0.00 | <1 | <1 | <1 | <1 | <50 | <1 |
| MW5D | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW5D | 06/28/00 | 321.79 | 42.00 | 279.79 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1.47 ^f |
| MW5D | 09/26/00 | 321.79 | 45.05 | 276.74 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW5D | 12/28/00 | 321.79 | 44.44 | 277.35 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| MW5D | 03/28/01 | 321.80 | 43.90 | 277.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/<1.0 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g}/\text{L}$) | Toluene ($\mu\text{g}/\text{L}$) | Ethyl-benzene ($\mu\text{g}/\text{L}$) | Total Xylenes ($\mu\text{g}/\text{L}$) | TPH as gasoline ($\mu\text{g}/\text{L}$) | MTBE ($\mu\text{g}/\text{L}$) |
|-----------------|-----------------|----------------------------|-----------------------|------------------------------|----------------------|------------------------------------|------------------------------------|--|--|--|---------------------------------|
| MW5D | 06/25/01 | 321.80 | 48.19 | 273.61 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 09/26/01 | 321.80 | 55.78 | 266.02 | 0.00 | 1.3 | 1.9 | 0.55 | 2.7 | <50 | <2.5 |
| MW5D | 12/17/01 | 321.79 | 55.89 | 265.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5D | 03/18/02 | 321.79 | 54.60 | 267.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 06/17/02 | 321.79 | 54.92 | 266.87 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 09/16/02 | 321.79 | 59.66 | 262.13 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5D | 12/17/02 | 321.79 | 61.56 | 260.23 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 03/28/03 | 321.79 | 58.90 | 262.89 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 06/16/03 | 321.79 | 55.73 | 266.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 09/22/03 | 321.79 | 60.57 | 261.22 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 12/22/03 | 321.79 | 60.24 | 261.55 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 03/23/04 | 321.79 | 58.65 | 263.14 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5D | 06/21/04 | 321.79 | 57.54 | 264.25 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5D | 09/20/04 | 321.79 | 61.56 | 260.23 | 0.00 | <0.5 | 6.1 | 0.9 | 6.8 | <50 | <0.5 |
| MW5D | 12/20/04 | 321.79 | 58.58 | 263.21 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5S | 05/25/88 | 321.64 | 38.46 | 283.18 | 0.00 | <0.5 | 0.9 | <0.5 | <0.5 | <20 | NA |
| MW5S | 06/06/88 | 321.64 | 38.86 | 282.78 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 06/23/88 | 321.64 | 39.52 | 282.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 06/28/88 | 321.64 | 39.84 | 281.80 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 07/06/88 | 321.64 | 40.45 | 281.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 07/13/88 | 321.64 | 40.90 | 280.74 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 07/22/88 | 321.64 | 41.30 | 280.34 | 0.00 | 0.9 | 4.1 | 1.3 | 8.7 | 50 | NA |
| MW5S | 08/05/88 | 321.64 | 23.84 ^b | 297.80 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 08/12/88 | 321.64 | 42.21 | 279.43 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 08/26/88 | 321.64 | 42.55 | 279.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/07/88 | 321.64 | 42.94 | 278.70 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 12/07/88 | 321.64 | 44.67 | 276.97 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|-------------|
| MW5S | 02/09/89 | 321.64 | 43.19 | 278.45 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 03/08/89 | 321.64 | 42.11 | 279.53 | 0.00 | <0.5 | <0.5 | <0.5 | <1.0 | <20 | NA |
| MW5S | 04/26/89 | 321.64 | 41.84 | 279.80 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 06/30/89 | 321.64 | 43.95 | 277.69 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 07/17/89 | 321.64 | 44.91 | 276.73 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 07/18/89 | 321.64 | 44.93 | 276.71 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 07/19/89 | 321.64 | 44.98 | 276.66 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 07/20/89 | 321.64 | 45.02 | 276.62 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 07/21/89 | 321.64 | 45.10 | 276.54 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 07/26/89 | 321.64 | 45.57 | 276.07 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 08/02/89 | 321.64 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 08/03/89 | 321.64 | 46.31 | 275.33 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 08/17/89 | 321.64 | 47.25 | 274.39 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/13/89 | 321.64 | 49.22 | 272.42 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 11/28/89 | 321.64 | 50.39 | 271.25 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 12/20/89 | 321.64 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 01/09/90 | 321.64 | 49.51 | 272.13 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 01/26/90 | 321.64 | 49.40 | 272.24 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 02/23/90 | 321.64 | 49.20 ^a | 272.44 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 02/23/90 | 321.64 | 49.20 | 272.44 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 03/26/90 | 321.64 | 48.89 ^a | 272.75 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW5S | 03/26/90 | 321.64 | 48.88 | 272.76 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 04/18/90 | 321.64 | 48.95 | 272.69 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 05/17/90 | 321.64 | 50.06 | 271.58 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 06/11/90 | 321.64 | 50.98 | 270.66 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 07/30/90 | 321.64 | 53.40 | 268.24 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 08/01/90 | 321.64 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 08/27/90 | 321.64 | 53.60 | 268.04 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | TPH as MTBE (µg/L) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|--------------------|
| MW5S | 09/28/90 | 321.64 | 53.55 | 268.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 12/27/90 | 321.64 | 53.61 | 268.03 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 03/20/91 | 321.64 | 53.56 | 268.08 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 06/20/91 | 321.64 | 53.73 | 267.91 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/12/91 | 321.64 | 53.78 | 267.86 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 12/30/91 | 321.64 | 53.80 | 267.84 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 01/30/92 | 321.64 | 53.82 | 267.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 03/02/92 | 321.64 | 53.82 | 267.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 04/14/92 | 321.64 | 53.74 | 267.90 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 05/21/92 | 321.64 | 53.77 | 267.87 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 06/08/92 | 321.64 | 53.81 | 267.83 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 07/14/92 | 321.64 | 53.74 | 267.90 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 08/10/92 | 321.64 | 53.78 | 267.86 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/16/92 | 321.64 | 53.90 | 267.74 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 10/07/92 | 321.64 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW5S | 11/09/92 | 321.64 | 53.87 | 267.77 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 12/10/92 | 321.64 | 53.78 | 267.86 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 01/26/93 | 321.64 | 53.38 | 268.26 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 02/16/93 | 321.64 | 53.44 | 268.20 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 03/11/93 | 321.64 | 53.28 | 268.36 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 04/12/93 | 321.64 | 53.42 | 268.22 | 0.00 | 11 | 5.9 | 13 | 48 | 220 | NA |
| MW5S | 06/01/93 | 321.64 | 53.56 | 268.08 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 07/15/93 | 321.64 | 53.00 | 268.64 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 08/15/93 | 321.64 | 53.60 | 268.04 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/29/93 | 321.64 | 53.62 | 268.02 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/30/93 | 321.64 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 10/28/93 | 321.64 | 54.62 | 267.02 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 11/23/93 | 321.64 | 53.62 | 268.02 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|-----------------------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|-------------------|
| MW5S | 03/10-11/94 | 321.64 | 53.61 | 268.03 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 05/04-05/94 | 321.64 | 53.52 | 268.12 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 09/01/94 ^e | 321.64 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 11/16/94 | 321.64 | 53.05 | 268.59 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 09/01/94 | 321.64 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 11/16/94 | 321.64 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 02/15/95 | 321.64 | 50.55 | 271.09 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 05/09/95 | 321.64 | 44.96 | 276.68 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 08/21/95 | 321.64 | 41.77 | 279.87 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 11/30/95 | 321.64 | 39.95 | 281.69 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5S | 03/28/96 | 321.64 | 36.80 | 284.84 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5S | 05/31/96 | 321.64 | 35.28 | 286.36 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5S | 08/28/96 | 321.64 | 39.46 | 282.18 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5S | 11/18/96 | 321.64 | 39.47 | 282.17 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW5S | 02/28/97 | 321.64 | 34.44 | 287.20 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 05/23/97 | 321.64 | 34.72 | 286.92 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 09/23/97 | 321.64 | 39.09 | 282.55 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 12/30/97 | 321.64 | 37.83 | 283.81 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW5S | 03/24/98 | 321.64 | 32.76 | 288.88 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 06/15/98 | 321.64 | 30.46 | 291.18 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 09/11/98 | 321.64 | 36.04 | 285.60 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 12/09/98 | 321.64 | 33.00 | 288.64 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW5S | 03/31/99 | 321.64 | 29.20 | 292.44 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |
| MW5S | 06/30/99 | 321.64 | 35.08 | 286.56 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 08/03/99 | 321.64 | 38.62 | 283.02 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/24/99 | 320.52 | 42.89 | 277.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5S | 12/22/99 | 320.52 | 42.05 | 278.47 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW5S | 04/04/00 | 320.52 | 35.91 | 284.61 | 0.00 | <1 | <1 | <1 | <1 | <50 | <1 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|--|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW5S 06/15/00 STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | | | |
| MW5S | 06/28/00 | 320.52 | 40.75 | 279.77 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW5S | 09/26/00 | 320.52 | 44.34 | 276.18 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW5S | 12/28/00 | 320.52 | 43.95 | 276.57 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| MW5S | 03/28/01 | 320.52 | 43.41 | 277.11 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/<1.0 ^f |
| MW5S | 06/25/01 | 320.52 | 46.58 | 273.94 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 09/26/01 | 320.52 | 53.47 | 267.05 | 0.00 | 1.8 | 2.8 | 0.94 | 4.4 | <50 | <2.5 |
| MW5S | 12/17/01 | 320.52 | 53.52 | 267.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW5S | 03/18/02 | 320.52 | 53.25 | 267.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5S | 06/17/02 | 320.52 | 53.49 | 267.03 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5S | 09/16/02 | 320.52 | 53.62 | 266.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW5S | 12/17/02 | 320.52 | 53.67 | 266.85 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5S | 03/28/03 | 320.52 | 53.60 | 266.92 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5S | 06/16/03 | 320.52 | 53.49 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 09/22/03 | 320.52 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW5S | 12/22/03 | 320.52 | 53.63 | 266.89 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW5S | 03/23/04 | 320.52 | 53.61 | 266.91 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW5S | 06/21/04 | 320.52 | 53.57 | 266.95 | 0.00 | <0.5 | 1.0 | <0.5 | 1.4 | <50 | <0.5 ^f |
| MW5S ^j | 09/20/04 | 320.52 | 53.80 | 266.72 | 0.00 | <0.5 | 2.2 | <0.5 | 2.2 | <50 | <0.5 |
| MW5S ^j | 12/20/04 | 320.52 | 53.79 | 266.73 | 0.00 | <0.5 | 0.8 | <0.5 | 1.0 | <50 | <0.5 |
| MW6 | 05/11/88 | NM | 37.31 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW6 | 05/17/88 | NM | NM | NM | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW6 | 06/06/88 | NM | 38.70 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW6 | 06/23/88 | NM | 39.23 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW6 | 06/28/88 | NM | 39.74 | NC | 0.00 | 31.8 | 7.5 | 5.4 | 6.7 | 440 | NA |
| MW6 | 07/13/88 | NM | 40.78 | NC | 0.00 | 162.3 | 7.7 | 22.5 | 14.1 | 290 | NA |
| MW6 | 08/05/88 | NM | 41.72 | NC | 0.00 | 245 | 5.2 | 47.1 | 23.7 | 1,180 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|-------------|
| MW6 | 08/12/88 | NM | 42.14 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW6 | 08/17/88 | NM | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW6 | 08/26/88 | NM | 42.51 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW6 | 09/07/88 | NM | 42.85 | NC | 0.00 | 474 | 16 | 262 | 136 | 2,920 | NA |
| MW6 | 10/24/88 | Well destroyed | | | | | | | | | |
| MW7 | 07/13/88 | 321.27 | 40.50 | 280.77 | 0.00 | 860 | 1,910 | 710 | 4,420 | 16,700 | NA |
| MW7 | 07/22/88 | 321.27 | 41.85 ^a | 279.42 | 0.00 | 136 | 85 | 5 | 58 | 460 | NA |
| MW7 | 08/05/88 | 321.27 | 41.45 ^a | 279.82 | 0.00 | 73.3 | 52.8 | 2.3 | 28.1 | 270 | NA |
| MW7 | 08/12/88 | 321.27 | 42.69 | 278.58 | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 09/07/88 | 321.27 | 42.60 | 278.67 | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 12/07/88 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 01/17/89 | 321.27 | 43.20 | 278.07 | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 02/09/89 | 321.27 | NM | NC | NM | 600 | 688 | 10 | 448 | 6,700 | NA |
| MW7 | 06/30/89 | 321.27 | NM | NC | NM | 180 | 50 | 13 | 40 | 1,100 | NA |
| MW7 | 08/02/89 | 321.27 | NM | NC | NM | 1.6 | <0.5 | <0.5 | 0.6 | 31 | NA |
| MW7 | 09/13/89 | 321.27 | NM | NC | NM | <0.5 | 2.6 | <0.5 | 12 | 87 | NA |
| MW7 | 10/12/89 | 321.27 | 49.93 | 271.34 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 11/28/89 | 321.27 | 57.61 ^a | 263.66 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 12/20/89 | 321.27 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW7 | 01/09/90 | 321.27 | 57.57 ^a | 263.70 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 01/26/90 | 321.27 | 57.54 ^a | 263.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 01/26/90 | 321.27 | 49.08 | 272.19 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 02/23/90 | 321.27 | 55.26 ^a | 266.01 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 02/23/90 | 321.27 | 48.93 | 272.34 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 03/26/90 | 321.27 | 57.52 ^a | 263.75 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 03/26/90 | 321.27 | 48.60 | 272.67 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 04/18/90 | 321.27 | 57.55 ^a | 263.72 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethylbenzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|---------------------|----------------------|------------------------|-------------|
| MW7 | 05/17/90 | 321.27 | 57.40 ^a | 263.87 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 06/11/90 | 321.27 | 50.68 | 270.59 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 07/30/90 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 08/27/90 | 321.27 | 53.05 | 268.22 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/28/90 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 12/27/90 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 03/20/91 | 321.27 | 54.11 | 267.16 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 06/20/91 | 321.27 | 55.14 | 266.13 | 0.00 | <0.5 | 1.8 | 0.6 | 4.1 | 74 | NA |
| MW7 | 09/12/91 | 321.27 | 55.84 | 265.43 | 0.00 | 3.5 | <0.5 | 1.7 | 6.8 | <50 | NA |
| MW7 | 12/30/91 | 321.27 | 55.21 | 266.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 01/30/92 | 321.27 | 54.88 | 266.39 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 03/02/92 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 03/24/92 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 04/14/92 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 05/21/92 | 321.27 | 53.36 | 267.91 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 06/08/92 | 321.27 | 54.20 | 267.07 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 07/14/92 | 321.27 | 53.31 | 267.96 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 08/10/92 | 321.27 | 54.01 | 267.26 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/16/92 | 321.27 | 55.97 | 265.30 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 10/07/92 | 321.27 | 56.09 | 265.18 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 11/09/92 | 321.27 | 54.16 | 267.11 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 12/10/92 | 321.27 | 56.02 | 265.25 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 01/26/93 | 321.27 | 56.15 | 265.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 02/16/93 | 321.27 | 56.23 | 265.04 | 0.00 | 28 | 30 | 17 | 200 | 600 | NA |
| MW7 | 03/11/93 | 321.27 | 55.82 | 265.45 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 04/12/93 | 321.27 | 55.45 | 265.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 06/01/93 | 321.27 | 54.90 | 266.37 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 07/15/93 | 321.27 | 54.50 | 266.77 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW7 | 08/15/93 | 321.27 | 54.25 | 267.02 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/29/93 | 321.27 | 54.55 | 266.72 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/30/93 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 10/28/93 | 321.27 | 54.94 | 266.33 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 11/23/93 | 321.27 | 54.73 | 266.54 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 11/24/93 | 321.27 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 03/10-11-94 | 321.27 | 52.83 | 268.44 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 05/04-05/94 | 321.27 | 52.77 | 268.50 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 09/01/94 ^e | 321.27 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 11/16/94 | 321.27 | 52.74 | 268.53 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 02/15/95 | 321.27 | 50.05 | 271.22 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 05/09/95 | 321.27 | 44.61 | 276.66 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW7 | 08/21/95 | 321.27 | 41.40 | 279.87 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 4.1 |
| MW7 | 11/30/95 | 321.27 | 39.64 | 281.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW7 | 03/28/96 | 321.27 | 36.42 | 284.85 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW7 | 05/31/96 | 321.27 | 34.87 | 286.40 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW7 | 08/28/96 | 321.27 | 39.11 | 282.16 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 11/18/96 | 321.27 | 39.10 | 282.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 02/28/97 | 321.27 | 34.03 | 287.24 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 05/23/97 | 321.27 | 34.36 | 286.91 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/23/97 | 321.27 | 38.66 | 282.61 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 4.4 |
| MW7 | 12/30/97 | 321.27 | 37.45 | 283.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 03/24/98 | 321.27 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 06/15/98 | 321.27 | 30.05 | 291.22 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/11/98 | 321.27 | 35.63 | 285.64 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW7 | 12/09/98 | 321.27 | 21.54 | 299.73 | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 03/31/99 | 321.27 | 28.84 | 292.43 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |
| MW7 | 06/30/99 | 321.27 | 34.68 | 286.59 | 0.00 | 5.96 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW7 | 08/03/99 | 321.27 | 38.22 | 283.05 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/24/99 | 321.27 | 42.59 | 278.68 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 11.7 ^f |
| MW7 | 12/22/99 | 321.27 | 41.69 | 279.58 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <5.0 ^f |
| MW7 | 04/04/00 | 321.27 | 35.45 | 285.82 | 0.00 | <1 | <1 | <1 | <1 | <50 | <1 |
| MW7 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW7 | 06/28/00 | 321.27 | 40.46 | 280.81 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 4.88 ^f |
| MW7 | 09/26/00 | 321.27 | 44.00 | 277.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW7 | 12/28/00 | 321.27 | 44.63 | 276.64 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| MW7 | 03/28/01 | 321.27 | 43.04 | 278.23 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/1.17 ^f |
| MW7 | 06/25/01 | 321.27 | 46.31 | 274.96 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW7 | 09/26/01 | 321.27 | 52.90 | 268.37 | 0.00 | 0.62 | 0.84 | <0.5 | 1.0 | <50 | <2.5 |
| MW7 | 12/17/01 | 321.27 | 53.17 | 268.10 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW7 | 03/18/02 | 321.27 | 53.10 | 268.17 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW7 | 06/17/02 | 321.27 | 53.12 | 268.15 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 8.2/6.40 ^f |
| MW7 | 09/16/02 | 321.27 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW7 | 12/17/02 | 321.27 | 54.17 | 267.10 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 03/28/03 | 321.27 | 54.45 | 266.82 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW7 | 06/16/03 | 321.27 | 53.33 | 267.94 | 0.00 | -- | -- | -- | -- | -- | -- |
| MW7 | 06/17/03 | 321.27 | -- | -- | -- | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW7 | 09/22/03 | 321.27 | 54.57 | 266.70 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW7 | 12/22/03 | 321.27 | 54.70 | 266.57 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW7 | 03/23/04 | 321.27 | 54.36 | 266.91 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW7 | 06/21/04 | 321.27 | 53.92 | 267.35 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 06/22/04 | 321.27 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW7 | 09/20/04 | 321.27 | 55.09 | 266.18 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW7 | 09/21/04 | 321.27 | NM | NC | NM | <0.5 | 2.1 | <0.5 | 3.6 | <50 | <0.5 |
| MW7 | 12/20/04 | 321.27 | 54.53 | 266.74 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|-------------|
| MW8 | 10/01/89 | 321.86 | 53.88 | 267.98 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 10/03/89 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW8 | 11/28/89 | 321.86 | 53.74 | 268.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 12/20/89 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | 0.61 | <20 | NA |
| MW8 | 01/09/90 | 321.86 | 57.90 | 263.96 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 01/26/90 | 321.86 | 53.57 | 268.29 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 01/31/90 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | 0.87 | <20 | NA |
| MW8 | 02/09/90 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | 1.1 | <20 | NA |
| MW8 | (Blank) | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW8 | 02/23/90 | 321.86 | 52.16 | 269.70 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 03/26/90 | 321.86 | 52.80 ^a | 269.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW8 | (Blank) | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW8 | 04/18/90 | 321.86 | 51.60 | 270.26 | 0.00 | <0.5 | 0.58 | <0.5 | 1.1 | <20 | NA |
| MW8 | 05/17/90 | 321.86 | 58.21 | 263.65 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW8 | 06/11/90 | 321.86 | 58.65 | 263.21 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW8 | 07/30/90 | 321.86 | 64.33 | 257.53 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 08/01/90 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW8 | 08/27/90 | 321.86 | 70.41 | 251.45 | 0.00 | <0.5 | <0.5 | <0.5 | 0.5 | <20 | NA |
| MW8 | 09/28/90 | 321.86 | 71.93 | 249.93 | 0.00 | <0.5 | <0.5 | <0.5 | 0.5 | <50 | NA |
| MW8 | 12/27/90 | 321.86 | 66.60 | 255.26 | 0.00 | <0.5 | <0.5 | <0.5 | 0.6 | <50 | NA |
| MW8 | 03/20/91 | 321.86 | 60.75 | 261.11 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 06/20/91 | 321.86 | 88.77 | 233.09 | 0.00 | <0.5 | <0.5 | <0.5 | 0.6 | <50 | NA |
| MW8 | 09/12/91 | 321.86 | 103.17 | 218.69 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 10/14/91 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 12/30/91 | 321.86 | 81.15 | 240.71 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 01/30/92 | 321.86 | 81.69 | 240.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 03/02/92 | 321.86 | 78.45 | 243.41 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 03/24/92 | 321.86 | 76.55 | 245.31 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW8 | 04/14/92 | 321.86 | 75.56 | 246.30 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 05/21/92 | 321.86 | 86.99 | 234.87 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 06/08/92 | 321.86 | 91.69 | 230.17 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 07/14/92 | 321.86 | 94.65 | 227.21 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 08/10/92 | 321.86 | 95.02 | 226.84 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 09/16/92 | 321.86 | 91.90 | 229.96 | 0.00 | <0.5 | 0.9 | <0.5 | <0.5 | <50 | NA |
| MW8 | 10/07/92 | 321.86 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW8 | 11/09/92 | 321.86 | 84.35 | 237.51 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 12/10/92 | 321.86 | 82.20 | 239.66 | 0.00 | <0.5 | 0.6 | <0.5 | <0.5 | <50 | NA |
| MW8 | 01/26/93 | 321.86 | 78.63 | 243.23 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 02/16/93 | 321.86 | 76.90 | 244.96 | 0.00 | 0.7 | 0.6 | <0.5 | 2.3 | <50 | NA |
| MW8 | 03/11/93 | 321.86 | 74.39 | 247.47 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 04/12/93 | 321.86 | 71.20 | 250.66 | 0.00 | 26 | 7.3 | 11 | 38 | 230 | NA |
| MW8 | 06/01/93 | 321.86 | 68.04 | 253.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 07/15/93 | 321.86 | 78.05 | 243.81 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 08/15/93 | 321.86 | 78.45 | 243.41 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 09/29/93 | 321.86 | 73.64 | 248.22 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 09/30/93 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 10/28/93 | 321.86 | 67.53 | 254.33 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 11/23/93 | 321.86 | 64.68 | 257.18 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 11/24/93 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 03/10-11/94 | 321.86 | 59.26 | 262.60 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 05/04-05/94 | 321.86 | 56.84 | 265.02 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 09/01/94 ^e | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 11/16/94 | 321.86 | 55.47 | 266.39 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 02/15/95 | 321.86 | 52.00 | 269.86 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 05/09/95 | 321.86 | 46.60 | 275.26 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 05/12/95 | 321.86 | NM | NC | NM | 2.3 | 1.2 | 2.0 | 7.4 | <50 | NA |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|------------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW8 | 08/21/95 | 321.86 | 43.86 | 278.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 11/30/95 | 321.86 | 41.25 | 280.61 | 0.00 | <0.5 | <0.5 | 0.69 | 2.7 | <50 | <5.0 |
| MW8 | 03/28/96 | 321.86 | 37.71 | 284.15 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW8 | 05/31/96 | 321.86 | 36.71 | 285.15 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW8 | 08/28/96 | 321.86 | 42.80 | 279.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW8 | 11/18/96 | 321.86 | 40.78 | 281.08 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW8 | 02/28/97 | 321.86 | 35.14 | 286.72 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^D | 02/28/97 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^R | 02/28/97 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 05/23/97 | 321.86 | 36.41 | 285.45 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^D | 05/23/97 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^R | 05/23/97 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 09/23/97 | 321.86 | 41.22 | 280.64 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^D | 09/23/97 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^R | 09/23/09 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 12/30/97 | 321.86 | 39.81 | 282.05 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 ^D | 12/30/97 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 ^R | 12/30/97 | 321.86 | NM | NC | NM | <0.5 | 0.52 | <0.5 | <0.5 | <50 | 3.2 ^f |
| MW8 | 03/24/98 | 321.86 | 31.46 | 290.40 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 06/15/98 | 321.86 | 31.43 | 290.43 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 ^D | 06/15/98 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW8 | 09/11/98 | 321.86 | 38.73 | 283.13 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^D | 09/11/98 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 12/09/98 | 321.86 | 28.96 | 292.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW8 ^D | 12/09/98 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW8 ^R | 12/09/98 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 ^f |
| MW8 | 03/31/99 | 321.86 | 25.05 | 296.81 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |
| MW8 ^D | 03/31/99 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|------------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW8 ^R | 03/31/99 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |
| MW8 | 06/30/99 | 321.86 | 42.62 | 279.24 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 ^D | 06/30/99 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 13.1/1.18 ^{f,h} |
| MW8 ^R | 06/30/99 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 08/03/99 | 321.86 | 51.59 | 270.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.672 ^f |
| MW8 ^D | 08/03/99 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.659 ^f |
| MW8 ^R | 08/03/99 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW8 | 09/24/99 | 321.86 | 50.95 | 270.91 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.777 ^f |
| MW8 ^D | 09/24/99 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.776 ^f |
| MW8 | 12/22/99 | 321.86 | 38.59 | 283.27 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW8 ^D | 12/22/99 | 321.86 | NM | NC | NM | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW8 ^R | 12/22/99 | 321.86 | NM | NC | NM | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW8 | 04/04/00 | 321.86 | 36.21 | 285.65 | 0.00 | <1 | <1 | <1 | <1 | <50 | 3.3/<5 ^f |
| MW8 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW8 | 06/28/00 | 321.86 | 46.51 | 275.35 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW8 | 09/26/00 | 321.86 | 47.55 | 274.31 | 0.00 | <0.5 | <0.5 | <0.5 | 0.528 | <50 | <1 ^f |
| MW8 | 12/28/00 | 321.86 | 45.68 | 276.18 | 0.00 | 1.03 | 1.25 | <0.5 | 1.76 | <50 | <2 ^f |
| MW8 | 03/28/01 | 321.86 | 45.40 | 276.46 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/1.00 ^f |
| MW8 | 06/25/01 | 321.86 | 57.84 | 264.02 | 0.00 | 0.71 | 1.0 | <0.5 | 1.4 | <50 | <2.5 |
| MW8 | 09/26/01 | 321.86 | 60.08 | 261.78 | 0.00 | <0.5 | 0.53 | <0.5 | 0.75 | <50 | <2.5 |
| MW8 | 12/17/01 | 321.86 | 61.24 | 260.62 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW8 | 03/18/02 | 321.86 | 57.53 | 264.33 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 03/19/02 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW8 | 06/17/02 | 321.86 | 58.25 | 263.61 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW8 | 09/16/02 | 321.86 | 70.68 | 251.18 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW8 | 12/17/02 | 321.86 | 67.76 | 254.10 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW8 | 03/28/03 | 321.86 | 62.40 | 259.46 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW8 | 06/16/03 | 321.86 | 62.99 | 258.87 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW8 | 09/22/03 | 321.86 | 74.94 | 246.92 | 0.00 | <0.5 | 2.4 | <0.5 | 1.1 | <50 | <0.5 |
| MW8 | 12/22/03 | 321.86 | 67.09 | 254.77 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.7/0.5 ^f |
| MW8 | 03/23/04 | 321.86 | 68.27 | 253.59 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.6/0.60 ^f |
| MW8 | 06/21/04 | 321.86 | 62.18 | 259.68 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 06/22/04 | 321.86 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.80 ^f |
| MW8 | 09/20/04 | 321.86 | 69.10 | 252.76 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW8 | 12/20/04 | 321.86 | 58.62 | 263.24 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW9 | 10/03/89 | 321.44 | NM | NC | NM | 1,000 | 9,200 | 3,000 | 13,000 | 89,000 | NA |
| MW9 | 10/12/89 | 321.44 | 50.24 | 271.20 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW9 | 11/28/89 | 321.44 | 50.59 | 270.85 | 0.10 | NS | NS | NS | NS | NS | NS |
| MW9 | 12/01/89 | 321.44 | 50.32 | 271.12 | 0.02 | NS | NS | NS | NS | NS | NS |
| MW9 | 12/07/89 | 321.44 | 50.13 | 271.31 | 0.16 | NS | NS | NS | NS | NS | NS |
| MW9 | 12/13/89 | 321.44 | 49.91 | 271.53 | Slight Sheen | NS | NS | NS | NS | NS | NS |
| MW9 | 12/20/89 | 321.44 | 49.78 | 271.66 | Slight Sheen | 6,300 | 31,000 | 9,500 | 55,000 | 190,000 | NA |
| MW9 | 01/02/90 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 01/09/90 | 321.44 | 49.39 | 272.05 | Slight Sheen | NS | NS | NS | NS | NS | NS |
| MW9 | 01/25/90 | 321.44 | NM | NC | NM | 2,400 | 9,400 | 2,700 | 15,000 | 77,000 | NA |
| MW9 | 01/26/90 | 321.44 | 49.30 | 272.14 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW9 | 02/23/90 | 321.44 | 49.06 ^a | 272.38 | 0.00 | 1,200 | 7,100 | 2,300 | 14,000 | 97,000 | NA |
| MW9 | 02/23/90 | 321.44 | 49.05 | 272.39 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW9 | 03/26/90 | 321.44 | 48.75 ^a | 272.69 | 0.00 | 1,800 | 7,700 | 2,000 | 11,000 | 89,000 | NA |
| MW9 | 03/26/90 | 321.44 | 48.73 | 272.71 | Slight sheen | NS | NS | NS | NS | NS | NS |
| MW9 | 04/18/90 | 321.44 | 48.81 | 272.63 | 0.00 | 2,000 | 7,500 | 2,500 | 16,000 | 110,000 | NA |
| MW9 | 05/17/90 | 321.44 | 49.96 | 271.48 | 0.00 | 1,500 | 5,700 | 2,300 | 14,000 | 81,000 | NA |
| MW9 | 06/11/90 | 321.44 | 51.58 | 269.86 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW9 | 06/20/90 | 321.44 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | 430 | NA |
| MW9 | 07/30/90 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|-------------|
| MW9 | 08/27/90 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 09/28/90 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 12/27/90 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 03/20/91 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 06/20/91 | 321.44 | 49.63 | 271.81 | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 09/12/91 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 12/30/91 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 01/30/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 03/02/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 03/24/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 04/14/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 05/21/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 06/08/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 07/14/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 08/10/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 09/16/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 10/07/92 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 11/09/92 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 12/10/92 | 321.44 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW9 | 01/26/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 02/16/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 03/11/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 04/12/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 06/01/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 07/15/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 08/15/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 09/29/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 10/28/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-------------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW9 | 11/23/93 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 03/10-11/94 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 05/04-05/94 | 321.44 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW9 | 11/16/94 | 321.44 | 52.62 | 268.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW9 | 02/15/95 | 321.44 | 49.76 | 271.68 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW9 | 05/09/95 | 321.44 | 44.30 | 277.14 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW9 | 08/21/95 | 321.44 | 41.11 | 280.33 | 0.00 | 270 | 51 | 5.2 | 140 | 1,100 | <25 |
| MW9 | 11/30/95 | 321.44 | 39.40 | 282.04 | 0.00 | 920 | 680 | 120 | 870 | 6,600 | <100 |
| MW9 | 03/28/96 | 321.44 | 36.13 | 285.31 | 0.00 | 72 | 28 | 1.8 | 49 | 360 | <10 |
| MW9 | 05/31/96 | 321.44 | 34.56 | 286.88 | 0.00 | 2,800 | 510 | <50 | 400 | 8,200 | <5.0 |
| MW9 | 08/28/96 | 321.44 | 38.80 | 282.64 | 0.00 | 1.6 | <0.5 | <0.5 | 9.6 | 160 | 28 |
| MW9 | 11/18/96 | 321.44 | 38.74 | 282.70 | 0.00 | 2,000 | 610 | 130 | 790 | 7,100 | <200 |
| MW9 | 02/28/97 | 321.44 | 33.74 | 287.70 | 0.00 | 2,900 | 2,600 | 280 | 2,400 | 22,000 | 4,200 |
| MW9 | 05/23/97 | 321.44 | 33.77 | 287.67 | 0.00 | 5,300 | 5,200 | 800 | 3,900 | 32,000 | 1,600 |
| MW9 | 09/23/97 | 320.68 | 38.17 | 282.51 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 20 |
| MW9 | 12/30/97 | 320.68 | 38.83 | 281.85 | 0.00 | 840 | 750 | 80 | 310 | 4,600 | 1,100 ^f |
| MW9 | 03/24/98 | 320.68 | 31.32 | 289.36 | 0.00 | 11,000 | 16,000 | 1,200 | 6,200 | 62,000 | 7,000 |
| MW9 | 06/15/98 | 320.68 | 28.72 | 291.96 | 0.00 | 1.8 | 2.7 | <0.5 | 3.8 | <50 | 8.1 |
| MW9 | 09/11/98 | 320.68 | 31.52 | 289.16 | 0.00 | 1.5 | 0.97 | <0.5 | 1.1 | <50 | 7.1 |
| MW9 | 12/09/98 | 320.68 | 28.92 | 291.76 | 0.00 | 1.4 | 2.9 | <0.5 | <0.5 | <50 | 7.9 ^f |
| MW9 | 03/31/99 | 320.68 | 27.77 | 292.91 | 0.00 | 2,560 | 4,100 | 118 | 3,090 | 18,400 | 3,850/4,950 ^f |
| MW9 | 06/30/99 | 320.68 | 32.57 | 288.11 | 0.00 | 0.883 | 1.43 | <0.5 | 1.24 | <50 | 7.05/5.81 th |
| MW9 | 08/03/99 | 320.68 | 36.24 | 284.44 | 0.00 | 1.20 | 1.70 | <0.5 | 0.60 | 91.1 | <0.5 ^f |
| MW9 | 09/24/99 | 320.26 | 41.65 | 278.61 | 0.00 | 2.60/3.13 ⁱ | 1.06 | <0.5 | 1.17 | <50 | 3.92 ^f |
| MW9 | 12/22/99 | 320.26 | 40.55 | 279.71 | 0.00 | 860/870 ^j | 380/380 ^j | <5.0/<5.0 ⁱ | 2,190/2,170 ^j | 7,300 | 4,300 ^f |
| MW9 | 04/04/00 | 320.26 | 34.69 | 285.57 | 0.00 | 2.7 | 2.5 | <1 | 9 | <50 | 310/300 ^f |
| MW9 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW9 | 06/28/00 | 320.26 | 39.31 | 280.95 | 0.00 | 111 | 2.98 | <0.5 | 14.9 | 207 | 488 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) | |
|--|-----------------|----------------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|------------------------|--|
| MW9 | 09/26/00 | 320.26 | 43.14 | 277.12 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 77.2 ^f | |
| MW9 | 11/03/00 | | Well destroyed | | | | | | | | | |
| MW9A 06/15/00 STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | | | | |
| MW9A | 12/28/00 | NM | 43.72 | NC | 0.00 | 14.5 | 3.75 | 26.4 | 37.4 | 1,040 | 65.5 ^f | |
| MW9A | 03/28/01 | 321.17 | 43.90 | 277.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5-<1.0 ^f | |
| MW9A | 06/25/01 | 321.17 | 49.84 | 271.33 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 | |
| MW9A | 09/26/01 | 321.17 | 56.35 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 12/17/01 | 321.27 | 55.13 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 03/18/02 | 321.27 | 53.02 | 268.25 | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 06/17/02 | 321.27 | 56.70 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 09/16/02 | 321.27 | DRY | NC | NM | NS | NS | NS | NS | NS | NS | |
| MW9A | 12/17/02 | 321.27 | DRY | NC | NM | NS | NS | NS | NS | NS | NS | |
| MW9A | 03/28/03 | 321.27 | DRY | NC | NM | NS | NS | NS | NS | NS | NS | |
| MW9A | 06/16/03 | 321.27 | 56.17 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 09/22/03 | 321.27 | DRY | NC | NM | NS | NS | NS | NS | NS | NS | |
| MW9A | 12/22/03 | 321.27 | 56.28 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 03/23/04 | 321.27 | 56.42 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 06/21/04 | 321.27 | 56.33 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 09/20/04 | 321.27 | 56.45 | NC ⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW9A | 12/20/04 | 321.27 | 56.50 | NCⁱ | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW10 | 10/12/89 | 322.99 | 51.93 | 271.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 20 | NA | |
| MW10 | 11/28/89 | 322.99 | 51.88 | 271.11 | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW10 | 12/20/89 | 322.99 | 51.47 | 271.52 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA | |
| MW10 | 01/09/90 | 322.99 | 50.98 | 272.01 | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW10 | 01/26/90 | 322.99 | 50.87 | 272.12 | 0.00 | NS | NS | NS | NS | NS | NS | |
| MW10 | 02/23/90 | 322.99 | 50.67 ^a | 272.32 | 0.00 | NS | NS | NS | NS | NS | NS | |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW10 | 02/23/90 | 322.99 | 50.65 | 272.34 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 03/26/90 | 322.99 | 50.36 ^a | 272.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW10 | 03/26/90 | 322.99 | 50.35 | 272.64 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 04/18/90 | 322.99 | 50.45 | 272.54 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 06/11/90 | 322.99 | 51.16 | 271.83 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 07/30/90 | 322.99 | 55.72 | 267.27 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 08/27/90 | 322.99 | 57.75 | 265.24 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <20 | NA |
| MW10 | 09/28/90 | 322.99 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW10 | 12/27/90 | 322.99 | 58.08 | 264.91 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 03/20/91 | 322.99 | 57.80 | 265.19 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 06/20/91 | 322.99 | 58.00 | 264.99 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 09/12/91 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 12/30/91 | 322.99 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW10 | 01/30/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 03/02/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 03/24/92 | 322.99 | 58.53 | 264.46 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 04/14/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 05/21/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 06/08/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 07/14/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 08/10/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 09/16/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 10/07/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 11/09/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 12/10/92 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 01/26/93 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 02/16/93 | 322.99 | 58.23 | 264.76 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 03/11/93 | 322.99 | 57.81 | 265.18 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|-----------------------|---------------------|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|-------------|
| MW10 | 04/12/93 | 322.99 | 57.84 | 265.15 | 0.00 | 21 | 11 | 21 | 75 | 350 | NA |
| MW10 | 06/01/93 | 322.99 | 57.88 | 265.11 | NM | NS | NS | NS | NS | NS | NS |
| MW10 | 07/15/93 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 08/15/93 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 09/29/93 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 10/28/93 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 11/23/93 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 03/10-11/94 | 322.99 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 05/04-05/94 | 322.99 | 57.21 | 265.78 | Dry | NS | NS | NS | NS | NS | NS |
| MW10 | 09/01/94 ^e | 322.99 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW10 | 11/16/94 | 322.99 | 54.82 | 268.17 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW10 | 02/15/95 | 322.99 | 51.90 | 271.09 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW10 | 05/09/95 | 322.99 | 46.32 | 276.67 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW10 | 08/21/95 | 322.99 | 43.06 | 279.93 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW10 | 11/30/95 | 322.99 | 41.34 | 281.65 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW10 | 03/28/96 | 322.99 | 38.15 | 284.84 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW10 | 05/31/96 | 322.99 | 36.61 | 286.38 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW10 | 08/28/96 | 322.99 | 40.86 | 282.13 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 11/18/96 | 322.99 | 40.90 | 282.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 02/28/97 | 322.99 | 35.75 | 287.24 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 05/23/97 | 322.99 | 36.07 | 286.92 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 09/23/97 | 322.99 | 40.41 | 282.58 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 12/30/97 | 322.99 | 38.20 | 284.79 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 03/24/98 | 322.99 | 34.12 | 288.87 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 06/15/98 | 322.99 | 31.79 | 291.20 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 09/11/98 | 322.99 | 35.40 | 287.59 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 12/09/98 | 322.99 | 34.32 | 288.67 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 03/31/99 | 322.99 | 30.55 | 292.44 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.0 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW10 | 06/30/99 | 322.99 | 36.36 | 286.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW10 | 08/03/99 | 322.99 | 39.95 | 283.04 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 09/24/99 | 322.99 | 44.40 | 278.59 | 0.00 | <0.5 | <0.5 | <0.5 | 0.87 | <50 | 19.30 ^f |
| MW10 | 12/22/99 | 322.99 | 43.39 | 279.60 | 0.00 | 9.5 | 5.3 | 3.9 | 25.1 | 140 | <5.0 ^f |
| MW10 | 04/04/00 | 322.99 | 37.18 | 285.81 | 0.00 | <1 | <1 | <1 | <1 | <50 | <1 |
| MW10 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW10 | 06/28/00 | 322.99 | 42.19 | 280.80 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW10 | 09/26/00 | 322.99 | 45.80 | 277.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 3.39 ^f |
| MW10 | 12/28/00 | 322.99 | 45.41 | 277.58 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| MW10 | 03/28/01 | 322.99 | 44.89 | 278.10 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/<1.0 ^f |
| MW10 | 06/25/01 | 322.99 | 48.13 | 274.86 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW10 | 09/26/01 | 322.99 | 56.45 | 266.54 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW10 | 12/17/01 | 322.99 | 56.61 | 266.38 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW10 | 03/18/02 | 322.99 | 54.99 | 268.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW10 | 06/17/02 | 322.99 | 55.36 | 267.63 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 06/18/02 | 322.99 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW10 | 09/16/02 | 322.99 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW10 | 12/17/02 | 322.99 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW10 | 03/28/03 | 322.99 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW10 | 06/16/03 | 322.99 | 56.89 | 266.10 | 0.00 | -- | -- | -- | -- | -- | -- |
| MW10 | 06/17/03 | 322.99 | -- | -- | -- | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW10 | 09/22/03 | 322.99 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW10 | 12/22/03 | 322.99 | 58.10 | 264.89 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 03/23/04 | 322.99 | 57.60 | 265.39 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 06/21/04 | 322.99 | 57.72 | 265.27 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 09/20/04 | 322.99 | 58.26 | 264.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW10 | 12/20/04 | 322.99 | 57.94 | 265.05 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW11 | 11/10/89 | 321.77 | 50.64 | 271.13 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 11/16/89 | 321.77 | NM | NC | NM | 4.1 | 9.4 | 0.74 | 20 | 150 | NA |
| MW11 | 11/28/89 | 321.77 | 50.51 | 271.26 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 12/20/89 | 321.77 | 51.47 | 270.30 | 0.00 | 7.2 | 7.5 | 2.9 | 13 | 150 | NA |
| MW11 | 01/09/90 | 321.77 | 49.68 | 272.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 01/26/90 | 321.77 | 49.55 | 272.22 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 02/23/90 | 321.77 | 49.37 ^a | 272.40 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 02/23/90 | 321.77 | 49.35 | 272.42 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 03/26/90 | 321.77 | 49.03 ^a | 272.74 | 0.00 | <0.5 | <0.5 | <0.5 | 2.7 | 32 | NA |
| MW11 | 04/18/90 | 321.77 | 49.12 | 272.65 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 05/17/90 | 321.77 | 50.30 | 271.47 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 06/11/90 | 321.77 | 51.16 | 270.61 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 07/30/90 | 321.77 | 53.50 | 268.27 | 0.00 | <0.5 | <0.5 | <0.5 | 3.8 | 26 | NA |
| MW11 | 08/27/90 | 321.77 | 53.65 | 268.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/28/90 | 321.77 | 53.62 | 268.15 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 12/27/90 | 321.77 | 53.63 | 268.14 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 03/20/91 | 321.77 | 53.26 | 268.51 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 06/20/91 | 321.77 | 53.60 | 268.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/12/91 | 321.77 | 53.60 | 268.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 12/30/91 | 321.77 | 53.95 | 267.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 01/30/92 | 321.77 | 53.65 | 268.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 03/02/92 | 321.77 | 53.68 | 268.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 03/24/92 | 321.77 | 53.70 | 268.07 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 04/14/92 | 321.77 | 53.66 | 268.11 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 05/21/92 | 321.77 | 53.62 | 268.15 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 06/08/92 | 321.77 | 53.61 | 268.16 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 07/14/92 | 321.77 | 53.53 | 268.24 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 08/10/92 | 321.77 | 53.58 | 268.19 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g}/\text{L}$) | Toluene ($\mu\text{g}/\text{L}$) | Ethyl-benzene ($\mu\text{g}/\text{L}$) | Total Xylenes ($\mu\text{g}/\text{L}$) | TPH as gasoline ($\mu\text{g}/\text{L}$) | TPH as MTBE ($\mu\text{g}/\text{L}$) |
|-----------------|-------------|----------------------------|-----------------------|------------------------------|----------------------|------------------------------------|------------------------------------|--|--|--|--|
| MW11 | 09/16/92 | 321.77 | 53.60 | 268.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 10/07/92 | 321.77 | DRY | DRY | NM | NS | NS | NS | NS | NS | NS |
| MW11 | 11/09/92 | 321.77 | DRY | DRY | NM | NS | NS | NS | NS | NS | NS |
| MW11 | 12/10/92 | 321.77 | 53.59 | 268.18 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 01/26/93 | 321.77 | 53.67 | 268.10 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 02/16/93 | 321.77 | 53.60 | 268.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 03/11/93 | 321.77 | 53.58 | 268.19 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 04/12/93 | 321.77 | 53.54 | 268.23 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW11 | 06/01/93 | 321.77 | 53.52 | 268.25 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 07/15/93 | 321.77 | 53.60 | 268.17 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 08/15/93 | 321.77 | 53.55 | 268.22 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/29/93 | 321.77 | 53.62 | 268.15 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/30/93 | 321.77 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| MW11 | 10/28/93 | 321.77 | 53.63 | 268.14 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 11/23/93 | 321.77 | 53.58 | 268.19 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 11/24/93 | 321.77 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW11 | 03/10-11/94 | 321.77 | 53.61 | 268.16 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 05/04-05/94 | 321.77 | 53.51 | 268.26 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 11/16/94 | 321.77 | 53.46 | 268.31 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 02/15/95 | 321.77 | 50.57 | 271.20 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW11 | 05/09/95 | 321.77 | 45.05 | 276.72 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | NA |
| MW11 | 08/21/95 | 321.77 | 41.88 | 279.89 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 2.8 |
| MW11 | 11/30/95 | 321.77 | 40.04 | 281.73 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW11 | 03/28/96 | 321.77 | 36.90 | 284.87 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW11 | 05/31/96 | 321.77 | 35.34 | 286.43 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <5.0 |
| MW11 | 08/28/96 | 321.77 | 39.56 | 282.21 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 11/18/96 | 321.77 | 39.56 | 282.21 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 02/28/97 | 321.77 | 34.50 | 287.27 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW11 | 05/23/97 | 321.77 | 34.80 | 286.97 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/23/97 | 321.77 | 39.18 | 282.59 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 12/30/97 | 321.77 | 37.94 | 283.83 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 03/24/98 | 321.77 | 32.86 | 288.91 | NM | NS | NS | NS | NS | NS | NS |
| MW11 | 06/15/98 | 321.77 | 30.49 | 291.28 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/11/98 | 321.77 | 35.96 | 285.81 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 12/09/98 | 321.77 | 33.06 | 288.71 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 03/31/99 | 321.77 | 29.31 | 292.46 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 2.79/2.64 ^f |
| MW11 | 06/30/99 | 321.77 | 35.15 | 286.62 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW11 | 08/03/99 | 321.77 | 38.65 | 283.12 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/24/99 | 321.73 | 43.08 | 278.65 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 3.93 ^f |
| MW11 | 12/22/99 | 321.73 | 40.94 | 280.79 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | <5.0 ^f |
| MW11 | 04/04/00 | 321.73 | 35.91 | 285.82 | 0.00 | <1 | <1 | <1 | <1 | <50 | <1 |
| MW11 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW11 | 06/28/00 | 321.73 | 40.46 | 281.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW11 | 09/26/00 | 321.73 | 44.45 | 277.28 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW11 | 12/28/00 | 321.73 | 44.11 | 277.62 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 5.71 ^f |
| MW11 | 03/28/01 | 321.73 | 43.60 | 278.13 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/<1.0 ^f |
| MW11 | 06/25/01 | 321.73 | 46.78 | 274.95 | 0.00 | 3.0 | 7.3 | 2.0 | 11 | 59 | <2.5 |
| MW11 | 09/26/01 | 321.73 | 53.54 | 268.19 | 0.00 | 3.8 | 3.7 | 0.65 | 3.2 | <50 | <2.5 |
| MW11 | 12/17/01 | 321.73 | 53.56 | 268.17 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW11 | 03/18/02 | 321.73 | 53.50 | 268.23 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW11 | 06/17/02 | 321.73 | 53.67 | 268.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW11 | 09/16/02 | 321.73 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW11 | 12/17/02 | 321.73 | 53.20 | 268.53 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.7/0.70 ^f |
| MW11 | 03/28/03 | 321.73 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| MW11 | 06/16/03 | 321.73 | 53.63 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 | 09/22/03 | 321.73 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|--------------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW11 | 12/22/03 | 321.73 | 53.67 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 ^j | 03/23/04 | 321.73 | 53.64 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW11 | 06/21/04 | 321.73 | 53.57 | 268.16 | 0.00 | <0.5 | <0.5 | <0.5 | 2.4 | <50 | 0.5 ^f |
| MW11 | 09/20/04 | 321.73 | 53.11 | 268.62 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW11 ⁱ | 12/20/04 | 321.73 | 53.45 | 268.28 | 0.00 | <0.5 | 3.6 | <0.5 | 1.2 | <50 | <0.5 |
| MW12 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW12 | 08/30/00 | Well destroyed | | | | | | | | | |
| MW12A | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| MW12A | 09/26/00 | NM | 48.26 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| MW12A | 12/28/00 | NM | 46.45 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| MW12A | 03/28/01 | 322.53 | 46.07 | 276.46 | 0.00 | 0.622 | 0.823 | <0.5 | 0.526 | <50 | <2.5/<1.0 ^f |
| MW12A | 06/25/01 | 322.53 | 50.20 | 272.33 | 0.00 | <0.5 | 0.82 | <0.5 | 1.0 | <50 | <2.5 |
| MW12A | 09/26/01 | 322.53 | 60.83 | 261.70 | 0.00 | 1.6 | 2.0 | 0.5 | 2.6 | <50 | <2.5 |
| MW12A | 12/17/01 | 322.62 | 62.20 | 260.42 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| MW12A | 03/18/02 | 322.62 | 58.35 | 264.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW12A | 06/17/02 | 322.62 | 58.85 | 263.77 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW12A | 09/16/02 | 322.62 | 71.56 | 251.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW12A | 12/17/02 | 322.62 | 68.54 | 254.08 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW12A | 03/28/03 | 322.62 | 62.78 | 259.84 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW12A | 06/16/03 | 322.62 | 63.85 | 258.77 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW12A ^j | 09/22/03 | 322.62 | 76.30 | 246.32 | 0.00 | <0.5 | 2.3 | <0.5 | 1.9 | <50 | <0.5 |
| MW12A | 12/22/03 | 322.62 | 88.71 | 233.91 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW12A | 03/23/04 | 322.62 | 68.16 | 254.46 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW12A | 06/21/04 | 322.62 | 63.12 | 259.50 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW12A | 09/20/04 | 322.62 | 70.15 | 252.47 | 0.00 | <0.5 | 4.2 | 0.6 | 4.9 | <50 | <0.5 |
| MW12A | 12/20/04 | 322.62 | 59.00 | 263.62 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|--|---------------|---------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| MW13 06/15/00 STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | | | |
| MW13 09/26/00 | NM | 45.62 | NC | 0.00 | 0.504 | 0.594 | <0.5 | 0.982 | <50 | 1.62 ^f | |
| MW13 12/28/00 | NM | 45.15 | NC | 0.00 | 1.19 | 1.05 | <0.5 | 1.25 | <50 | 2.17 ^f | |
| MW13 03/28/01 | 322.62 | 44.57 | 278.05 | 0.00 | 0.769 | 1.45 | <0.5 | 0.594 | <50 | <2.5/<1.0 ^f | |
| MW13 06/25/01 | 322.62 | 48.24 | 274.38 | 0.00 | <0.5 | 1.1 | <0.5 | 1.1 | <50 | <2.5 | |
| MW13 09/26/01 | 322.62 | 56.05 | 266.57 | 0.00 | 1.3 | 1.7 | 0.54 | 3.0 | <50 | <2.5 | |
| MW13 12/17/01 | 322.71 | 56.40 | 266.31 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 | |
| MW13 03/18/02 | 322.71 | 55.20 | 267.51 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 06/17/02 | 322.71 | 55.38 | 267.33 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 09/16/02 | 322.71 | 59.80 | 262.91 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f | |
| MW13 12/17/02 | 322.71 | 62.05 | 260.66 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 03/28/03 | 322.71 | 59.50 | 263.21 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 06/16/03 | 322.71 | 56.33 | 266.38 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 09/22/03 | 322.71 | 60.71 | 262.00 | 0.00 | <0.5 | 2.3 | <0.5 | 2.0 | <50 | <0.5 | |
| MW13 12/22/03 | 322.71 | 60.83 | 261.88 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 03/23/04 | 322.71 | 59.21 | 263.50 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 06/21/04 | 322.71 | 57.99 | 264.72 | 0.00 | <0.5 | 0.5 | <0.5 | 0.9 | <50 | <0.5 ^f | |
| MW13 09/20/04 | 322.71 | 61.78 | 260.93 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW13 12/20/04 | 322.71 | 59.52 | 263.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 | |
| MW14 06/15/00 STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | | | |
| MW14 09/26/00 | NM | 46.90 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f | |
| MW14 12/28/00 | NM | 45.09 | NC | 0.00 | 2.04 | <0.5 | 0.740 | 1.78 | <50 | <2 ^f | |
| MW14 03/28/01 | 321.16 | 44.70 | 276.46 | 0.00 | 0.516 | 0.978 | <0.5 | 0.919 | <50 | <2.5/<1.0 ^f | |
| MW14 06/25/01 | 321.16 | 56.74 | 264.42 | 0.00 | <0.5 | 0.66 | <0.5 | 0.87 | <50 | <2.5 | |
| MW14 09/26/01 | 321.16 | 59.43 | 261.73 | 0.00 | 3.4 | 4.1 | 1.1 | 5.3 | <50 | <2.5 | |
| MW14 12/17/01 | 321.24 | 60.78 | 260.46 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 | |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-------------------|----------|---|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|--------------------------|
| MW14 | 03/18/02 | 321.24 | 57.50 | 263.74 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW14 | 06/17/02 | 321.24 | 57.51 | 263.73 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW14 | 09/16/02 | 321.24 | 70.06 | 251.18 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| MW14 | 12/17/02 | 321.24 | 67.05 | 254.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW14 | 03/28/03 | 321.24 | 61.70 | 259.54 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW14 | 06/16/03 | 321.24 | 62.34 | 258.90 | 0.00 | -- | -- | -- | -- | -- | -- |
| MW14 | 06/17/03 | 321.24 | -- | -- | -- | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW14 ^j | 09/22/03 | 321.24 | 74.50 | 246.74 | 0.00 | <0.5 | 0.9 | <0.5 | 0.8 | <50 | <0.5 |
| MW14 | 12/22/03 | 321.24 | 66.61 | 254.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW14 | 03/23/04 | 321.24 | 66.91 | 254.33 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| MW14 | 06/21/04 | 321.24 | 61.18 | 260.06 | 0.00 | <0.5 | 0.6 | <0.5 | 0.8 | <50 | <0.5 ^f |
| MW14 | 09/20/04 | 321.24 | 68.51 | 252.73 | 0.00 | NS | NS | NS | NS | NS | NS |
| MW14 | 09/21/04 | 321.24 | NM | NC | NM | <0.5 | 5.0 | 0.7 | 5.9 | <50 | <0.5 |
| MW14 | 12/20/04 | 321.24 | 57.61 | 263.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| OW1 | 09/24/99 | 322.45 | 10.37 | 312.08 | 0.00 | 2.10 | 1.41 | <0.5 | 7.22 | 119 | 7,810 ^f |
| OW1 | 12/22/99 | 322.45 | 10.93 | 311.52 | 0.00 | 12 | <5.0 | <5.0 | 5.2 | 360 | 44,000 ^f |
| OW1 | 04/04/00 | 322.45 | 10.83 | 311.62 | 0.00 | 1 | <1 | <1 | <1 | 120 | 5,300/6,800 ^f |
| OW1 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| OW1 | 06/28/00 | 322.45 | 11.91 | 310.54 | 0.00 | 1.20 | <1 | <1 | <1 | <100 | 1,530 ^f |
| OW1 | 09/26/00 | 322.45 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW1 | 12/28/00 | 322.45 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW1 | 03/28/01 | 321.44 | 9.65 | 311.79 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 8.27/7.97 ^f |
| OW1 | 06/25/01 | 321.44 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW1 | 09/26/01 | 321.44 | 11.37 | 310.07 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 250/220 ^f |
| OW1 | 12/17/01 | 321.44 | 9.28 | 312.16 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/1.0 ^f |
| OW1 | 03/18/02 | 321.44 | 11.05 | 310.39 | 0.00 | 0.70 | 0.70 | <0.5 | <0.5 | <50 | 13.7/14.5 ^f |
| OW1 | 06/17/02 | 321.44 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g}/\text{L}$) | Toluene ($\mu\text{g}/\text{L}$) | Ethyl-benzene ($\mu\text{g}/\text{L}$) | Total Xylenes ($\mu\text{g}/\text{L}$) | TPH as gasoline ($\mu\text{g}/\text{L}$) | MTBE ($\mu\text{g}/\text{L}$) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|------------------------------------|------------------------------------|--|--|--|---------------------------------|
| OW1 | 09/16/02 | 321.44 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW1 | 12/17/02 | 321.44 | 9.24 | 312.20 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 4.1/4.80 ^f |
| OW1 | 03/28/03 | 321.44 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW1 | 06/16/03 | 321.44 | 11.40 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| OW1 | 09/22/03 | 321.44 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW1 | 12/22/03 | 321.44 | 9.65 | 311.79 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| OW1 | 03/23/04 | 321.44 | 10.56 | 310.88 | 0.00 | NS | NS | NS | NS | NS | NS |
| OW1 | 06/21/04 | 321.44 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW1 | 09/20/04 | 321.44 | 10.69 | 310.75 | 0.00 | NS | NS | NS | NS | NS | NS |
| OW1 | 12/20/04 | 321.44 | 10.66 | 310.78 | 0.00 | NS | NS | NS | NS | NS | NS |
| OW2 | 09/24/99 | 321.55 | 9.48 | 312.07 | 0.00 | 31.1 | <0.5 | <0.5 | 20.6 | 275 ^g | 177,000 ^f |
| OW2 | 12/22/99 | 321.55 | 10.13 | 311.42 | 0.00 | <5.0 | <5.0 | <5.0 | 5.2 | 410 | 85,000 ^f |
| OW2 | 04/04/00 | 321.55 | 10.00 | NC | NM | NS | NS | NS | NS | NS | NS |
| OW2 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| OW2 | 06/28/00 | 321.55 | 11.00 | 310.55 | 0.00 | <50 | <50 | <50 | <50 | <5,000 | 45,400 ^f |
| OW2 | 09/26/00 | 321.55 | 11.11 | 310.44 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1,690 ^f |
| OW2 | 12/28/00 | 321.55 | 11.11 | 310.44 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 4,520 ^f |
| OW2 | 03/28/01 | 321.33 | 6.59 | 314.74 | 0.00 | 3.92 | 1.16 | 0.692 | 2.71 | <50 | 9,130/5,650 ^f |
| OW2 | 06/25/01 | 321.33 | 11.93 | 309.40 | 0.00 | <2.0 | <2.0 | <2.0 | 3.1 | <200 | 4,000/4,000 ^f |
| OW2 | 09/26/01 | 321.33 | 12.01 | 309.32 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 160/130 ^f |
| OW2 | 12/17/01 | 321.55 | 5.96 | 315.59 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1,300/630 ^f |
| OW2 | 03/18/02 | 321.55 | 10.96 | 310.59 | 0.00 | NS | NS | NS | NS | NS | NS |
| OW2 | 03/19/02 | 321.55 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | 1,290 | 1,560/1,720 ^f |
| OW2 | 06/17/02 | 321.55 | 11.78 | 309.77 | 0.00 | NS | NS | NS | NS | NS | NS |
| OW2 | 06/18/02 | 321.55 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | 1,310 | 1,910/1,800 ^f |
| OW2 | 09/16/02 | 321.55 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW2 | 12/17/02 | 321.55 | 6.14 | 315.41 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 6.3/5.00 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|------------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| OW2 | 03/28/03 | 321.55 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW2 | 06/16/03 | 321.55 | 12.08 | 309.47 | 0.00 | -- | -- | -- | -- | -- | -- |
| OW2 ^j | 06/17/03 | 321.55 | -- | -- | -- | <0.5 | <0.5 | <0.5 | <0.5 | 587 | 552/575 ^f |
| OW2 | 09/22/03 | 321.55 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW2 | 12/22/03 | 321.55 | 9.46 | 312.09 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 50.2/59.6 ^f |
| OW2 | 03/23/04 | 321.55 | 10.42 | 311.13 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 3.4/3.70 ^f |
| OW2 | 06/21/04 | 321.55 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| OW2 | 09/20/04 | 321.55 | 12.22 | 309.33 | 0.00 | NS | NS | NS | NS | NS | NS |
| OW2 | 12/20/04 | 321.55 | 10.50 | 311.05 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW1 | 12/22/99 | 322.75 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |
| PMW1 | 04/04/00 | 322.75 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| PMW1 | 06/28/00 | 322.75 | 13.72 | 309.03 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <1 ^f |
| PMW1 | 09/26/00 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 12/28/00 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 03/28/01 | 322.74 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 06/25/01 | 322.74 | 15.09 | 307.65 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| PMW1 | 09/26/01 | 322.74 | 15.56 | 307.18 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW1 | 12/17/01 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 03/18/02 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 06/17/02 | 322.75 | 14.91 | 307.84 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW1 | 09/16/02 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 12/17/02 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 03/28/03 | 322.75 | 13.25 | 309.50 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW1 | 06/16/03 | 322.75 | 13.90 | 308.85 | 0.00 | -- | -- | -- | -- | -- | -- |
| PMW1 | 06/17/03 | 322.75 | -- | -- | -- | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.6/<0.5 ^f |
| PMW1 | 09/22/03 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene (µg/L) | Toluene (µg/L) | Ethyl-benzene (µg/L) | Total Xylenes (µg/L) | TPH as gasoline (µg/L) | MTBE (µg/L) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|----------------|----------------|----------------------|----------------------|------------------------|------------------------|
| PMW1 | 12/22/03 | 322.75 | 12.69 | 310.06 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW1 | 03/23/04 | 322.75 | 13.42 | 309.33 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW1 | 06/21/04 | 322.75 | 15.35 | 307.40 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW1 | 09/20/04 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW1 | 12/20/04 | 322.75 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW2 | 12/22/99 | 322.37 | 12.85 | 309.52 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW2 | 04/04/00 | 322.37 | 10.65 | 311.72 | 0.00 | <1 | <1 | <1 | <1 | <50 | 740/720 ^f |
| PMW2 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| PMW2 | 06/28/00 | 322.37 | 11.50 | 310.87 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1,570 ^f |
| PMW2 | 09/26/00 | 322.37 | 12.36 | 310.01 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 157 ^f |
| PMW2 | 12/28/00 | 322.37 | 11.85 | 310.52 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 445 | 234 ^f |
| PMW2 | 03/28/01 | 322.07 | 10.68 | 311.39 | 0.00 | <0.5 | 0.632 | <0.5 | 1.88 | <50 | 400/284 ^f |
| PMW2 | 06/25/01 | 322.07 | 12.10 | 309.97 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 6.6/5.7 ^f |
| PMW2 | 09/26/01 | 322.07 | 12.26 | 309.81 | 0.00 | 1.6 | 2.9 | 1.0 | 4.7 | <50 | 59/46 ^f |
| PMW2 | 12/17/01 | 322.37 | 10.08 | 312.29 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 23/10 ^f |
| PMW2 | 03/18/02 | 322.37 | 11.90 | 310.47 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW2 | 03/19/02 | 322.37 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 6.50/1.8 ^f |
| PMW2 | 06/17/02 | 322.37 | 13.00 | 309.37 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW2 | 06/18/02 | 322.37 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 5.6/4.30 ^f |
| PMW2 | 09/16/02 | 322.37 | 14.73 | 307.64 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| PMW2 | 12/17/02 | 322.37 | 14.14 | 308.23 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 0.5/<0.5 ^f |
| PMW2 | 03/28/03 | 322.37 | 13.05 | 309.32 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 6.4/6.50 ^f |
| PMW2 | 06/16/03 | 322.37 | 13.89 | 308.48 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW2 | 09/22/03 | 322.37 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW2 | 12/22/03 | 322.37 | 10.86 | 311.51 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW2 | 03/23/04 | 322.37 | 11.33 | 311.04 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 13.0/11.2 ^f |
| PMW2 | 06/21/04 | 322.37 | 14.09 | 308.28 | 0.00 | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| PMW2 | 06/22/04 | 322.37 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 2.70 ^f |
| PMW2 | 09/20/04 | 322.37 | 15.39 | 306.98 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW2 | 12/20/04 | 322.37 | 14.93 | 307.44 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW3 | 12/22/99 | 321.27 | 12.61 | 308.66 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW3 | 04/04/00 | 321.27 | 9.78 | 311.49 | 0.00 | <1 | <1 | <1 | <1 | <50 | 250/310 ^f |
| PMW3 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| PMW3 | 06/28/00 | 321.27 | 10.52 | 310.75 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 31.5 ^f |
| PMW3 | 09/26/00 | 321.27 | 10.39 | 310.88 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 13.6 ^f |
| PMW3 | 12/28/00 | 321.27 | 12.20 | 309.07 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2 ^f |
| PMW3 | 03/28/01 | 321.27 | 9.37 | 311.90 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/1.08 ^f |
| PMW3 | 06/25/01 | 321.27 | 12.47 | 308.80 | 0.00 | 2.1 | 6.8 | 2.4 | 11 | 63 | <2.5 |
| PMW3 | 09/26/01 | 321.27 | 9.81 | 311.46 | 0.00 | 2.0 | 3.7 | 1.4 | 5.9 | <50 | <2.5 |
| PMW3 | 12/17/01 | 321.27 | 7.16 | 314.11 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| PMW3 | 03/18/02 | 321.27 | 9.89 | 311.38 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 2.30/0.7 ^f |
| PMW3 | 06/17/02 | 321.27 | 10.35 | 310.92 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW3 | 06/18/02 | 321.27 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW3 | 09/16/02 | 321.27 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW3 | 12/17/02 | 321.27 | 7.76 | 313.51 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW3 | 03/28/03 | 321.27 | 11.00 | 310.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW3 | 06/16/03 | 321.27 | 10.76 | 310.51 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW3 | 09/22/03 | 321.27 | 10.17 | 311.10 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW3 | 12/22/03 | 321.27 | 9.11 | 312.16 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW3 | 03/23/04 | 321.27 | 10.27 | 311.00 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW3 | 06/21/04 | 321.27 | 10.94 | 310.33 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW3 | 06/22/04 | 321.27 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| PMW3 | 09/20/04 | 321.27 | 10.44 | 310.83 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW3 | 09/21/04 | 321.27 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1.5/1.30 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g}/\text{L}$) | Toluene ($\mu\text{g}/\text{L}$) | Ethyl-benzene ($\mu\text{g}/\text{L}$) | Total Xylenes ($\mu\text{g}/\text{L}$) | TPH as gasoline ($\mu\text{g}/\text{L}$) | MTBE ($\mu\text{g}/\text{L}$) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|------------------------------------|------------------------------------|--|--|--|---------------------------------|
| PMW3 | 12/20/04 | 321.27 | 10.61 | 310.66 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW4 | 12/22/99 | 321.37 | 15.32 | 306.05 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 04/04/00 | 321.37 | 10.60 | 310.77 | 0.00 | <1 | <1 | <1 | <1 | <50 | 28/27 ^f |
| PMW4 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| PMW4 | 06/28/00 | 321.37 | 14.00 | 307.37 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 3.73 ^f |
| PMW4 | 09/26/00 | 321.37 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW4 | 12/28/00 | 321.37 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW4 | 03/28/01 | 321.37 | 14.11 | 307.26 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5/1.11 ^f |
| PMW4 | 06/25/01 | 321.37 | 15.07 | 306.30 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| PMW4 | 09/26/01 | 321.37 | 14.11 | 307.26 | 0.00 | 7.4 | 13 | 4.2 | 18 | 110 | <2.5 |
| PMW4 | 12/17/01 | 321.37 | 11.86 | 309.51 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| PMW4 | 03/18/02 | 321.37 | 14.17 | 307.20 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 03/19/02 | 321.37 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW4 | 06/17/02 | 321.37 | 15.55 | 305.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 09/15/02 | 321.37 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW4 | 12/17/02 | 321.37 | 15.22 | 306.15 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW4 | 03/28/03 | 321.37 | 14.95 | 306.42 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW4 | 06/16/03 | 321.37 | 14.80 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 09/22/03 | 321.37 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW4 | 12/22/03 | 321.37 | 15.28 | 306.09 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 03/23/04 | 321.37 | 14.40 | 306.97 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 06/21/04 | 321.37 | 15.32 | 306.05 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 06/22/04 | 321.37 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 ^f |
| PMW4 | 09/20/04 | 321.37 | 15.50 | 305.87 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW4 | 09/21/04 | 321.37 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW4 | 12/20/04 | 321.37 | 13.52 | 307.85 | 0.00 | <0.5 | 0.7 | <0.5 | 0.7 | <50 | <0.5 |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|---|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| PMW5 | 12/22/99 | 320.04 | 13.19 | 306.85 | 0.00 | 1.0 | <1.0 | <1.0 | <1.0 | <50 | 810 ^f |
| PMW5 | 04/04/00 | 320.04 | 9.61 | 310.43 | 0.00 | <1 | <1 | <1 | <1 | <50 | 680/890 ^f |
| PMW5 06/15/00 STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | | | |
| PMW5 | 06/28/00 | 320.04 | 10.10 | 309.94 | 0.00 | 1.79 | <0.5 | <0.5 | <0.5 | <50 | 629 ^f |
| PMW5 | 09/26/00 | 320.04 | 12.15 | 307.89 | 0.00 | 1.83 | <0.5 | <0.5 | <0.5 | <50 | 743 ^f |
| PMW5 | 12/28/00 | 320.04 | 12.48 | 307.56 | 0.00 | 1.93 | <0.5 | <0.5 | <0.5 | <50 | 919 ^f |
| PMW5 | 03/28/01 | 320.04 | 6.90 | 313.14 | 0.00 | 1.38 | 0.790 | <0.5 | <0.5 | <50 | 420/304 ^f |
| PMW5 | 06/25/01 | 320.04 | 11.74 | 308.30 | 0.00 | 1.1 | <0.5 | <0.5 | <0.5 | <50 | 540/560 ^f |
| PMW5 | 09/26/01 | 320.04 | 12.30 | 307.74 | 0.00 | 3.8 | 3.6 | 1.2 | 5.9 | <50 | 500/440 ^f |
| PMW5 | 12/17/01 | 320.04 | 8.89 | 311.15 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 230/94 ^f |
| PMW5 | 03/18/02 | 320.04 | 10.70 | 309.34 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW5 | 03/19/02 | 320.04 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | 179 | 152/35 ^f |
| PMW5 | 06/17/02 | 320.04 | 12.82 | 307.22 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW5 | 06/18/02 | 320.04 | NM | NC | NM | 1.1 | 0.5 | <0.5 | <0.5 | 167 | 260/226 ^f |
| PMW5 | 09/16/02 | 320.04 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW5 | 12/17/02 | 320.04 | 13.05 | 306.99 | 0.00 | 1.2 | <0.5 | <0.5 | <0.5 | 172 | 228/192 ^f |
| PMW5 | 03/28/03 | 320.04 | 14.95 | 305.09 | 0.00 | 0.80 | <0.5 | <0.5 | <0.5 | 192 | 234/244 ^f |
| PMW5 | 06/16/03 | 320.04 | 12.94 | 307.10 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW5 | 09/22/03 | 320.04 | 14.10 | 305.94 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW5 | 12/22/03 | 320.04 | 13.55 | 306.49 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW5 | 03/23/04 | 320.04 | 10.85 | 309.19 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 34.7/34.5 ^f |
| PMW5 | 06/21/04 | 320.04 | 13.25 | 306.79 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW5 | 06/22/04 | 320.04 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 18.8 ^f |
| PMW5 ^j | 09/21/04 | 320.04 | NM | NC | NM | <0.5 | 5.7 | 0.9 | 6.8 | <50 | <0.5 |
| PMW5 ^j | 12/20/04 | 320.04 | 13.89 | 306.15 | 0.00 | <0.5 | 1.1 | <0.5 | 1.4 | <50 | 1.2/1.47 ^f |
| PMW6 | 12/22/99 | 321.38 | NM | NC | Dry | NS | NS | NS | NS | NS | NS |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethylbenzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| PMW6 | 04/04/00 | 321.38 | 15.10 | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| PMW6 | 06/28/00 | 321.38 | 14.60 | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 09/26/00 | 321.38 | NM | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 12/28/00 | 321.38 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 03/28/01 | 321.38 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 06/25/01 | 321.38 | 14.82 | 306.56 | NM | <0.5 | <0.5 | <0.5 | <0.5 | <50 | <2.5 |
| PMW6 | 09/26/01 | 321.38 | 15.42 | 305.96 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 12/17/01 | 321.38 | 15.12 | 306.26 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 03/18/02 | 321.38 | 15.51 | 305.87 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 06/17/02 | 321.38 | 15.56 | 305.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 09/16/02 | 321.38 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 12/17/02 | 321.38 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 03/28/03 | 321.38 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 06/16/03 | 321.38 | 14.88 | NC | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 09/22/03 | 321.38 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| PMW6 | 12/22/03 | 321.38 | 15.48 | 305.90 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 03/23/04 | 321.38 | 14.39 | 306.99 | 0.00 | 0.50 | <0.5 | <0.5 | <0.5 | <50 | <0.5 |
| PMW6 | 06/21/04 | 321.38 | 15.45 | 305.93 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 06/22/04 | 321.38 | NM | NC | NM | <0.5 | 0.6 | <0.5 | 0.8 | <50 | <0.5 ^f |
| PMW6 | 09/20/04 | 321.38 | 15.57 | 305.81 | 0.00 | NS | NS | NS | NS | NS | NS |
| PMW6 | 12/20/04 | 321.38 | 15.56 | 305.82 | 0.00 | NS | NS | NS | NS | NS | NS |
| VR1 | 03/24/92 | NM | NM | NC | NM | 1.7 | <0.5 | <0.5 | <0.5 | <50 | NA |
| VR1 | 06/30/99 | NM | 19.52 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 6.83/7.31 ^{f,h} |
| VR1 | 08/03/99 | NM | 19.53 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 2.49 ^f |
| VR1 | 09/24/99 | 321.00 | 19.73 | 301.27 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 5.94 ^f |
| VR1 | 12/22/99 | 321.00 | 21.35 | 299.65 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | 10 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethylbenzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|-----------------|---|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|----------------------------------|-----------------------------------|-------------------------------------|-----------------------------|
| VR1 | 04/04/00 | 321.00 | 19.23 | 301.77 | 0.00 | <1 | <1 | <1 | <1 | <50 | 4,500/5,500 ^f |
| VR1 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| VR1 | 06/28/00 | 321.00 | 20.42 | 300.58 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1,370 ^f |
| VR1 | 09/26/00 | 321.00 | 21.92 | 299.08 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 387 ^f |
| VR1 | 12/28/00 | 321.00 | 21.85 | 299.15 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 200 ^f |
| VR1 | 03/28/01 | 320.90 | 23.99 | 296.91 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 86.6/55.9 ^f |
| VR1 | 06/25/01 | 320.90 | 23.84 | 297.06 | 0.00 | NS | NS | NS | NS | NS | NS |
| VR1 | 09/26/01 | 320.90 | 23.96 | 296.94 | 0.00 | <0.5 | 0.53 | <0.5 | <0.5 | <50 | 140/130 ^f |
| VR1 | 12/17/01 | 321.00 | 24.12 | 296.88 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 100/39 ^f |
| VR1 | 03/18/02 | 321.00 | 23.07 | 297.93 | 0.00 | NS | NS | NS | NS | NS | NS |
| VR1 | 03/19/02 | 321.00 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | 1,240 | 1,340/1,450 ^f |
| VR1 | 06/17/02 | 321.00 | 24.46 | 296.54 | 0.00 | NS | NS | NS | NS | NS | NS |
| VR1 | 06/18/02 | 321.00 | NM | NC | NM | <0.5 | <0.5 | <0.5 | <0.5 | 122 | 188/160 ^f |
| VR1 | 09/16/02 | 321.00 | 27.07 | 293.93 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 135 | 175 ^f |
| VR1 | 12/17/02 | 321.00 | 24.25 | 296.75 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 3.3/2.50 ^f |
| VR1 | 03/28/03 | 321.00 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR1 | 06/16/03 | 321.00 | 25.85 | 295.15 | 0.00 | -- | -- | -- | -- | -- | -- |
| VR1 | 06/17/03 | 321.00 | -- | -- | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | 90.2 | 42.8/34.8 ^f |
| VR1 | 09/22/03 | 321.00 | 28.07 | 292.93 | 0.00 | <0.5 | 0.5 | <0.5 | <0.5 | 78.1 | 80.7/85.6 ^f |
| VR1 | 12/22/03 | 321.00 | 24.86 | 296.14 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 42.5/42.1 ^f |
| VR1 | 03/23/04 | 321.00 | 25.86 | 295.14 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 4.7/4.70 ^f |
| VR1 | 06/21/04 | 321.00 | 27.73 | 293.27 | 0.00 | NS | NS | NS | NS | NS | NS |
| VR1 | 06/22/04 | 321.00 | NM | NC | NM | 2.20 | 2.6 | 8.6 | 77.4 | 988 | 43.3 ^f |
| VR1 | 09/20/04 | 321.00 | 27.86 | 293.14 | 0.00 | NS | NS | NS | NS | NS | NS |
| VR1 | 12/20/04 | 321.00 | 26.73 | 294.27 | 0.00 | <0.5 | 0.5 | 1.4 | 14.1 | 93.3 | 5.6/6.60^f |
| VR2 | 06/30/99 | NM | 33.63 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1,080/1,160 ^{fb} |
| VR2 | 08/03/99 | NM | 37.19 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 3,390 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g}/\text{L}$) | Toluene ($\mu\text{g}/\text{L}$) | Ethyl-benzene ($\mu\text{g}/\text{L}$) | Total Xylenes ($\mu\text{g}/\text{L}$) | TPH as gasoline ($\mu\text{g}/\text{L}$) | MTBE ($\mu\text{g}/\text{L}$) |
|-----------------|----------|---|-----------------------|------------------------------|----------------------|------------------------------------|------------------------------------|--|--|--|---------------------------------|
| VR2 | 09/24/99 | 320.18 | 41.54 | 278.64 | 0.00 | 2,650 | <50 | <50 | 309 | 5,170 | 1,030 ^f |
| VR2 | 12/22/99 | 320.18 | 40.63 | 279.55 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | 34 ^f |
| VR2 | 01/21/00 | 320.18 | 39.04 | 281.14 | 0.00 | <1.0 | <1.0 | <1.0 | <1.0 | <50 | 17 ^f |
| VR2 | 04/04/00 | 320.18 | 35.63 | 284.55 | 0.00 | <1 | <1 | <1 | <1 | <50 | 370/400 ^f |
| VR2 | 06/15/00 | STATION OPERATIONS TRANSFERRED TO VALERO ENERGY CORPORATION | | | | | | | | | |
| VR2 | 06/28/00 | 320.18 | 39.28 | 280.90 | 0.00 | 1.12 | <1 | <1 | <1 | <50 | 268 ^f |
| VR2 | 09/26/00 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 12/28/00 | 320.18 | 42.55 | 277.63 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 10.6 ^f |
| VR2 | 03/28/01 | 320.18 | 42.00 | 278.18 | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 5.85/2.98 ^f |
| VR2 | 06/25/01 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 09/26/01 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 12/17/01 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 03/18/02 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 06/17/02 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 09/16/02 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 12/17/02 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 03/28/03 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 06/16/03 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 09/22/03 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 12/22/03 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 03/23/04 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 06/21/04 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 09/20/04 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR2 | 09/20/04 | 320.18 | DRY | NC | NM | NS | NS | NS | NS | NS | NS |
| VR3 | 06/30/99 | NM | 9.15 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 1,220/1,380 ^{fh} |
| VR3 | 08/03/99 | NM | 8.19 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 16,100 ^f |
| VR3 | 09/24/99 | 318.73 | 8.97 | 309.76 | 0.00 | 7.20 | 1.14 | <1.0 | 1.94 | 122 | 10,900 ^f |

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl-benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | MTBE ($\mu\text{g/L}$) |
|-----------------|----------|----------------------------|-----------------------|------------------------------|----------------------|-----------------------------|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------------|--------------------------|
| VR3 | 11/05/99 | | | Well destroyed | | | | | | | |
| VR4 | 06/30/99 | NM | 8.50 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | <50 | 146 |
| VR4 | 08/03/99 | NM | 8.69 | NC | 0.00 | <0.5 | <0.5 | <0.5 | <0.5 | 71.7 ^e | 3.96 ^f |
| VR4 | 09/24/99 | 321.19 | 9.10 | 312.09 | 0.00 | 0.890 | 2.22 | 0.800 | 3.15 | 79.6 | 90.6 ^f |
| VR4 | 11/05/99 | | | Well destroyed | | | | | | | |

a = Water level recorded during pumping of MW7.

b = Anomalous water level possibly due to recharge from a perched water zone.

c = Casing head cut to lower elevation.

d = Casing head damaged by construction.

e = Results obtained past the technical holding time.

f = Analysis of MTBE by EPA Method 8260.

g = Unidentified Hydrocarbon C6-C12.

h = Analysis performed outside of EPA recommended hold time.

i = Groundwater level measured is in sump for groundwater extraction pump, near the bottom of the well and below the screened interval, and is not considered representative of groundwater elevation.

j = Grab groundwater sample collected.

D = Duplicate.

R = Rinseate.

LPH = Liquid-phase hydrocarbons.

TPH = Total Petroleum Hydrocarbons.

MTBE = Methyl tertiary butyl ether.

NA = Not analyzed.

NC = Not calculated.

ND = Not detected at or above the laboratory reporting limits.

NM = Not measured.

NS = Not sampled.

TABLE 2 GROUNDWATER MONITORING DATA, FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Monitoring Well | Date | Reference Elevation (feet) | Depth to Water (feet) | Groundwater Elevation (feet) | LPH Thickness (feet) | Benzene ($\mu\text{g/L}$) | Toluene ($\mu\text{g/L}$) | Ethyl- benzene ($\mu\text{g/L}$) | Total Xylenes ($\mu\text{g/L}$) | TPH as gasoline ($\mu\text{g/L}$) | TPH as MTBE ($\mu\text{g/L}$) |
|--------------------|------|----------------------------------|-----------------------------|------------------------------------|----------------------------|--------------------------------|--------------------------------|--|---|---|---------------------------------------|
|--------------------|------|----------------------------------|-----------------------------|------------------------------------|----------------------------|--------------------------------|--------------------------------|--|---|---|---------------------------------------|

$\mu\text{g/L}$ = Micrograms per liter.

Note: TPH-g results beginning March 2002 include MTBE.

Groundwater elevations adjusted for LPH, when present, using an average specific gravity of 0.75 for gasoline.

TABLE 3 GROUNDWATER ANALYTICAL RESULTS FOR OXYGENATES AND ADDITIVES,
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Well Number | Date | Ethanol | Concentration ($\mu\text{g/L}$) | | | | | | |
|-------------------|----------|---------|-----------------------------------|----------------------|-------------------|---------------------|---------------------|--------------------|-------------------|
| | | | t-Butyl alcohol | Methyl t-butyl ether | Diisopropyl ether | Ethyl t-butyl ether | t-Amyl methyl ether | 1,2-Dichloroethane | 1,2-Dibromoethane |
| MW1 | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW1 | 06/22/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW1 | 09/21/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| MW1 | 12/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| MW4 | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW4 | 06/22/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW4 | 09/21/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| MW5D | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW5D | 06/21/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW5D | 09/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| MW5S | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW5S | 06/21/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW5S ^a | 09/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| MW7 | 06/22/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW7 | 09/21/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| MW8 | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW8 | 12/22/03 | -- | -- | 0.5 | -- | -- | -- | -- | -- |
| MW8 | 03/23/04 | -- | -- | 0.60 | -- | -- | -- | -- | -- |
| MW8 | 06/22/04 | <100 | <10 | 0.80 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW8 | 12/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- |

TABLE 3 GROUNDWATER ANALYTICAL RESULTS FOR OXYGENATES AND ADDITIVES,
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Well Number | Date | Ethanol | t-Butyl alcohol | Concentration (µg/L) | | | | | | |
|------------------|----------|---------|-----------------|----------------------|-------------------|---------------------|---------------------|--------------------|-------------------|------|
| | | | | Methyl t-butyl ether | Diisopropyl ether | Ethyl t-butyl ether | t-Amyl methyl ether | 1,2-Dichloroethane | 1,2-Dibromoethane | |
| MW11 | 12/17/02 | -- | -- | 0.70 | -- | -- | -- | -- | -- | -- |
| MW11 | 06/21/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW12A | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW12A | 06/21/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW12A | 09/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- | -- |
| MW13 | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW13 | 06/21/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW13 | 09/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- | -- |
| MW14 | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW14 | 06/21/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| MW14 | 09/21/04 | <100 | -- | -- | -- | -- | -- | -- | -- | -- |
| OW1 | 12/17/02 | -- | -- | 4.80 | -- | -- | -- | -- | -- | -- |
| OW2 | 12/17/02 | -- | -- | 5.00 | -- | -- | -- | -- | -- | -- |
| OW2 ^a | 06/17/03 | -- | -- | 575 | -- | -- | -- | -- | -- | -- |
| OW2 | 12/22/03 | -- | -- | 59.6 | -- | -- | -- | -- | -- | -- |
| OW2 | 03/23/04 | -- | -- | 3.70 | -- | -- | -- | -- | -- | -- |
| OW2 | 12/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- | -- |
| PMW1 | 06/17/03 | -- | -- | <0.5 | -- | -- | -- | -- | -- | -- |
| PMW2 | 09/16/02 | -- | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| PMW2 | 12/17/02 | -- | -- | <0.5 | -- | -- | -- | -- | -- | -- |

TABLE 3 GROUNDWATER ANALYTICAL RESULTS FOR OXYGENATES AND ADDITIVES,
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Well Number | Date | Ethanol | t-Butyl alcohol | Concentration (µg/L) | | | | | |
|-------------------|----------|---------|-----------------|----------------------|-------------------|---------------------|---------------------|--------------------|-------------------|
| | | | | Methyl t-butyl ether | Diisopropyl ether | Ethyl t-butyl ether | t-Amyl methyl ether | 1,2-Dichloroethane | 1,2-Dibromoethane |
| PMW2 | 03/28/03 | -- | -- | 6.50 | -- | -- | -- | -- | -- |
| PMW2 | 03/23/04 | -- | -- | 11.2 | -- | -- | -- | -- | -- |
| PMW2 | 06/22/04 | <100 | <10 | 2.70 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| PMW3 | 06/22/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| PMW3 | 09/21/04 | <100 | -- | 1.30 | -- | -- | -- | -- | -- |
| PMW3 | 12/20/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| PMW4 | 06/22/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| PMW4 | 09/21/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| PMW5 | 12/17/02 | -- | -- | 192 | -- | -- | -- | -- | -- |
| PMW5 | 03/28/03 | -- | -- | 244 | -- | -- | -- | -- | -- |
| PMW5 | 03/23/04 | -- | -- | 34.5 | -- | -- | -- | -- | -- |
| PMW5 ^a | 06/22/04 | <100 | <10 | 18.8 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| PMW5 ^a | 09/21/04 | <100 | -- | -- | -- | -- | -- | -- | -- |
| PMW5 ^a | 12/20/04 | <100 | -- | 1.47 | -- | -- | -- | -- | -- |
| PMW6 | 06/22/04 | <100 | <10 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| VR1 | 09/16/02 | -- | <10 | 175 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| VR1 | 12/17/02 | -- | -- | 2.50 | -- | -- | -- | -- | -- |
| VR1 | 06/17/03 | -- | -- | 34.8 | -- | -- | -- | -- | -- |
| VR1 | 09/22/03 | -- | -- | 85.6 | -- | -- | -- | -- | -- |
| VR1 | 12/22/03 | -- | -- | 42.1 | -- | -- | -- | -- | -- |
| VR1 | 03/23/04 | -- | -- | 4.70 | -- | -- | -- | -- | -- |
| VR1 | 06/22/04 | <100 | <10 | 43.3 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |

TABLE 3 GROUNDWATER ANALYTICAL RESULTS FOR OXYGENATES AND ADDITIVES,
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA

| Well Number | Date | Ethanol | Concentration ($\mu\text{g/L}$) | | | | | | |
|----------------|----------|---------|-----------------------------------|-------------------------|----------------------|------------------------|------------------------|-------------------------|------------------------|
| | | | t-Butyl alcohol | Methyl t-butyl ether | Diisopropyl ether | Ethyl t-butyl ether | t-Amyl methyl ether | 1,2-Dichloro- ethane | 1,2-Dibromo- ethane |
| VR1 | 12/20/04 | <100 | — | 6.60 | — | — | — | — | — |

a Grab sample collected.

-- Not analyzed.

$\mu\text{g/L}$ Micrograms per liter.

Notes: All analyses by EPA Method 8260, unless otherwise noted.

Analytical results prior to 16 September 2002 are not presented in this table.

**TABLE 4 GROUNDWATER MONITORING PLAN,
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Well Number | Groundwater Gauging Frequency | Groundwater Sampling and Analysis Frequency | |
|-------------|-------------------------------|---|------|
| | | BTEX and TPH-g | MTBE |
| MW1 | Q | Q | Q |
| MW4 | Q | Q | Q |
| MW5D | Q | Q | Q |
| MW5S | Q | Q | Q |
| MW7 | Q | Q | Q |
| MW8 | Q | Q | Q |
| MW9A | Q | Q | Q |
| MW10 | Q | Q | Q |
| MW11 | Q | Q | Q |
| MW12A | Q | Q | Q |
| MW13 | Q | Q | Q |
| MW14 | Q | Q | Q |
| OW1 | Q | Q | Q |
| OW2 | Q | Q | Q |
| PMW1 | Q | Q | Q |
| PMW2 | Q | Q | Q |
| PMW3 | Q | Q | Q |
| PMW4 | Q | Q | Q |
| PMW5 | Q | Q | Q |
| PMW6 | Q | Q | Q |
| VR1 | Q | Q | Q |
| VR2 | Q | Q | Q |

Q = Quarterly.

BTEX = Benzene, toluene, ethylbenzene, total xylenes.

TPH-g = Total Petroleum Hydrocarbons as gasoline.

MTBE = Methyl tertiary butyl ether.

**TABLE 5: OPERATION AND PERFORMANCE DATA - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Date | Days of Operation | Percent Operational | Flow Total (gallons) | Average Operational Flow rate (gpm) | Influent Conc. (µg/L) Total TPH | Influent Conc. (µg/L) Benzene | Influent Conc. (µg/L) MTBE | Est. Pounds Removed* Total TPH | Cumulative Pounds Removed Total TPH | Est. Pounds Removed* Benzene | Cumulative Pounds Removed Benzene | Est. Pounds Removed* MTBE | Cumulative Pounds Removed MTBE |
|----------|-------------------|---------------------|----------------------|-------------------------------------|---------------------------------|-------------------------------|----------------------------|--------------------------------|-------------------------------------|------------------------------|-----------------------------------|---------------------------|--------------------------------|
| 03/12/01 | 0 | 0% | 185 | 0.0 | | | | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| 03/12/01 | 0.26 | 100% | 2,390 | 5.8 | 102.5 | < 0.500 | 66.3 | 0.002 | 0.002 | 0.000 | 0.000 | 0.001 | 0.001 |
| 03/15/01 | 2.80 | 100% | 30,740 | 7.0 | | | | 0.024 | 0.026 | 0.000 | 0.000 | 0.008 | 0.009 |
| 03/23/01 | 5.44 | 67% | 73,030 | 5.4 | | | | 0.036 | 0.062 | 0.000 | 0.000 | 0.012 | 0.021 |
| 03/30/01 | 6.94 | 100% | 137,670 | 6.5 | | | | 0.055 | 0.116 | 0.000 | 0.001 | 0.019 | 0.040 |
| 04/06/01 | 7.03 | 100% | 206,240 | 6.8 | < 100 | < 0.500 | < 2.5 | 0.058 | 0.174 | 0.000 | 0.001 | 0.020 | 0.060 |
| 04/13/01 | 7.02 | 100% | 276,970 | 7.0 | | | | 0.059 | 0.233 | 0.000 | 0.001 | 0.001 | 0.061 |
| 04/19/01 | 5.97 | 100% | 335,570 | 6.8 | | | | 0.049 | 0.282 | 0.000 | 0.001 | 0.001 | 0.062 |
| 04/27/01 | 8.04 | 100% | 415,750 | 6.9 | | | | 0.067 | 0.349 | 0.000 | 0.002 | 0.002 | 0.064 |
| 05/01/01 | 3.92 | 100% | NM | NC | | | | 0.000 | 0.349 | 0.000 | 0.002 | 0.002 | 0.066 |
| 05/08/01 | 7.10 | 100% | 525,007 | 6.9 | | | | 0.091 | 0.440 | 0.000 | 0.002 | 0.002 | 0.069 |
| 05/11/01 | 2.86 | 100% | 555,840 | 7.5 | < 100 | < 0.500 | < 2.5 | 0.026 | 0.465 | 0.000 | 0.002 | 0.001 | 0.069 |
| 05/18/01 | 7.08 | 100% | 623,650 | 6.6 | | | | 0.057 | 0.522 | 0.000 | 0.003 | 0.001 | 0.071 |
| 05/25/01 | 7.02 | 100% | 691,110 | 6.7 | | | | 0.056 | 0.578 | 0.000 | 0.003 | 0.001 | 0.072 |
| 06/01/01 | 7.06 | 100% | 758,630 | 6.6 | | | | 0.056 | 0.634 | 0.000 | 0.003 | 0.001 | 0.073 |
| 06/05/01 | 3.96 | 100% | 766,070 | 1.3 | < 100 | < 0.50 | < 2.5 | 0.006 | 0.641 | 0.000 | 0.003 | 0.000 | 0.074 |
| 06/15/01 | 9.96 | 100% | 859,280 | 6.5 | | | | 0.078 | 0.718 | 0.000 | 0.004 | 0.002 | 0.076 |
| 06/22/01 | 3.53 | 50% | 924,570 | 12.8 | | | | 0.054 | 0.773 | 0.000 | 0.004 | 0.001 | 0.077 |
| 06/25/01 | 1.38 | 50% | 924,578 | 0.0 | | | | 0.000 | 0.773 | 0.000 | 0.004 | 0.000 | 0.077 |
| 06/26/01 | 1.19 | 100% | 934,690 | 5.9 | | | | 0.008 | 0.781 | 0.000 | 0.004 | 0.000 | 0.077 |
| 07/06/01 | 5.02 | 50% | 992,100 | 7.9 | < 100 | < 0.50 | < 2.5 | 0.048 | 0.829 | 0.000 | 0.004 | 0.001 | 0.078 |
| 07/12/01 | 6.04 | 100% | 1,040,560 | 5.6 | | | | 0.040 | 0.870 | 0.000 | 0.004 | 0.001 | 0.079 |
| 07/13/01 | 0.94 | 100% | 1,048,180 | 5.6 | | | | 0.006 | 0.876 | 0.000 | 0.004 | 0.000 | 0.080 |
| 07/20/01 | 6.99 | 100% | 1,102,500 | 5.4 | | | | 0.045 | 0.921 | 0.000 | 0.005 | 0.001 | 0.081 |
| 07/27/01 | 6.88 | 100% | 1,150,270 | 4.8 | | | | 0.040 | 0.961 | 0.000 | 0.005 | 0.001 | 0.082 |
| 08/07/01 | 11.01 | 100% | 1,169,700 | 1.2 | | | | 0.016 | 0.977 | 0.000 | 0.005 | 0.000 | 0.082 |
| 08/10/01 | 3.13 | 100% | 1,170,090 | 0.1 | < 100 | < 0.50 | < 2.5 | 0.000 | 0.978 | 0.000 | 0.005 | 0.000 | 0.082 |
| 08/16/01 | 6.07 | 100% | 1,182,500 | 1.4 | | | | 0.010 | 0.988 | 0.000 | 0.005 | 0.002 | 0.084 |
| 08/24/01 | 7.78 | 100% | 1,183,080 | 0.1 | | | | 0.000 | 0.988 | 0.000 | 0.005 | 0.000 | 0.084 |
| 08/31/01 | 7.14 | 100% | 1,183,450 | 0.0 | | | | 0.000 | 0.989 | 0.000 | 0.005 | 0.000 | 0.084 |
| 09/07/01 | 7.11 | 100% | 1,183,920 | 0.0 | < 100 | < 0.50 | < 2.5 | 0.000 | 0.989 | 0.000 | 0.005 | 0.000 | 0.084 |
| 09/12/01 | 4.71 | 100% | 1,184,270 | 0.1 | | | | 0.001 | 0.990 | 0.000 | 0.005 | 0.001 | 0.085 |
| 09/18/01 | 5.99 | 100% | 1,184,840 | 0.1 | | | | 0.001 | 0.990 | 0.000 | 0.005 | 0.001 | 0.086 |
| 09/25/01 | 7.23 | 100% | 1,185,000 | 0.0 | | | | 0.000 | 0.991 | 0.000 | 0.005 | 0.000 | 0.086 |
| 10/02/01 | 7.06 | 100% | 1,186,110 | 0.1 | | | | 0.002 | 0.992 | 0.000 | 0.005 | 0.002 | 0.088 |
| 10/08/01 | 0.00 | 0% | 1,186,110 | 0.0 | | | | 0.000 | 0.992 | 0.000 | 0.005 | 0.000 | 0.088 |
| 10/23/01 | 0.00 | 0% | 1,186,110 | 0.0 | 260 | < 0.50 | 460 | 0.000 | 0.992 | 0.000 | 0.005 | 0.000 | 0.088 |
| 10/30/01 | 7.23 | 100% | 1,186,120 | 0.0 | | | | 0.000 | 0.992 | 0.000 | 0.005 | 0.000 | 0.088 |
| 11/13/01 | 0.00 | 0% | 1,186,150 | 0.0 | | | | 0.000 | 0.992 | 0.000 | 0.005 | 0.000 | 0.089 |

**TABLE 5: OPERATION AND PERFORMANCE DATA - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Date | Days of Operation | Percent Operational | Flow Total (gallons) | Average Operational Flow rate (gpm) | Influent Conc. | | | Est. Pounds Removed* | Cumulative Pounds Removed Total TPH | Est. Pounds Removed* Benzene | Cumulative Pounds Removed Benzene | Est. Pounds Removed* MTBE | Cumulative Pounds Removed MTBE |
|----------|-------------------|---------------------|----------------------|-------------------------------------|----------------|----------------|-------------|----------------------|-------------------------------------|------------------------------|-----------------------------------|---------------------------|--------------------------------|
| | | | | | Total TPH | (µg/L) Benzene | (µg/L) MTBE | | | | | | |
| 12/11/01 | 0.00 | 0% | 1,186,150 | 0.0 | | | | 0.000 | 0.992 | 0.000 | 0.005 | 0.000 | 0.089 |
| 12/14/01 | 3.01 | 100% | 1,188,700 | 0.6 | | | | 0.006 | 0.998 | 0.000 | 0.005 | 0.013 | 0.102 |
| 12/17/01 | 2.31 | 100% | NM | NC | | | | NC | 0.998 | NC | 0.005 | NC | 0.102 |
| 12/18/01 | 0.00 | 0% | NM | NC | | | | NC | 0.998 | NC | 0.005 | NC | 0.102 |
| 12/21/01 | 0.00 | 0% | 1,189,280 | 0.2 | < 520 | < 0.50 | 800 | 0.002 | 1.000 | 0.000 | 0.005 | 0.003 | 0.105 |
| 12/28/01 | 3.59 | 50% | 1,191,340 | 0.4 | | | | 0.005 | 1.005 | 0.000 | 0.005 | 0.015 | 0.120 |
| 01/04/02 | 0.00 | 0% | 1,191,350 | 0.0 | | | | 0.000 | 1.005 | 0.000 | 0.005 | 0.000 | 0.120 |
| 01/07/02 | 0.00 | 0% | 1,191,350 | 0.0 | | | | 0.000 | 1.005 | 0.000 | 0.005 | 0.000 | 0.120 |
| 01/08/02 | 0.96 | 100% | 1,191,940 | 0.4 | < 98 | 0.57 | 920 | 0.002 | 1.007 | 0.000 | 0.005 | 0.004 | 0.124 |
| 01/15/02 | 3.50 | 50% | 1,194,700 | 0.5 | | | | 0.005 | 1.011 | 0.000 | 0.005 | 0.011 | 0.135 |
| 01/22/02 | 3.48 | 50% | 1,198,310 | 0.7 | | | | 0.006 | 1.018 | 0.000 | 0.005 | 0.014 | 0.149 |
| 01/25/02 | 0.00 | 0% | 1,198,310 | 0.0 | | | | 0.000 | 1.018 | 0.000 | 0.005 | 0.000 | 0.149 |
| 01/29/02 | 4.09 | 100% | 1,198,950 | 0.1 | | | | 0.001 | 1.019 | 0.000 | 0.005 | 0.003 | 0.152 |
| 01/30/02 | 0.70 | 100% | NM | NC | | | | NC | 1.019 | NC | 0.005 | NC | 0.152 |
| 02/05/02 | 6.30 | 100% | 1,199,110 | 0.02 | < 310 | < 0.50 | 38 | 0.000 | 1.019 | 0.000 | 0.005 | 0.001 | 0.153 |
| 02/08/02 | 2.36 | 100% | NM | NC | | | | NC | 1.019 | NC | 0.005 | NC | 0.153 |
| 02/11/02 | 3.60 | 100% | 1,199,310 | 0.0 | | | | 0.000 | 1.019 | 0.000 | 0.005 | 0.000 | 0.153 |
| 02/19/02 | 8.00 | 100% | 1,199,420 | 0.0 | | | | 0.000 | 1.019 | 0.000 | 0.005 | 0.000 | 0.153 |
| 02/26/02 | 7.03 | 100% | 1,199,590 | 0.0 | | | | 0.000 | 1.020 | 0.000 | 0.005 | 0.000 | 0.153 |
| 03/05/02 | 6.99 | 100% | 1,199,590 | 0.0 | < 120 | < 0.50 | 14 | 0.000 | 1.020 | 0.000 | 0.005 | 0.000 | 0.153 |
| 03/12/02 | 3.49 | 50% | 1,199,600 | 0.0 | | | | 0.000 | 1.020 | 0.000 | 0.005 | 0.000 | 0.153 |
| 03/19/02 | 3.51 | 50% | 1,203,100 | 0.7 | | | | 0.016 | 1.036 | 0.000 | 0.005 | 0.000 | 0.153 |
| 03/26/02 | 6.99 | 100% | 1,207,200 | 0.4 | | | | 0.018 | 1.054 | 0.000 | 0.005 | 0.000 | 0.154 |
| 03/27/02 | 0.97 | 100% | 1,207,768 | 0.4 | | | | 0.003 | 1.057 | 0.000 | 0.005 | 0.000 | 0.154 |
| 04/04/02 | 7.82 | 100% | 1,210,690 | 0.3 | | | | 0.013 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 04/09/02 | 0.00 | 0% | 1,210,690 | 0.0 | | | | 0.000 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 04/16/02 | 0.00 | 0% | 1,210,690 | 0.0 | | | | 0.000 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 04/17/02 | 0.00 | 0% | 1,210,696 | 0.0 | | | | 0.000 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 04/23/02 | 0.00 | 0% | 1,210,690 | 0.0 | | | | 0.000 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 05/14/02 | 0.00 | 0% | 1,210,840 | 0.0 | | | | 0.001 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 05/28/02 | 0.00 | 0% | 1,210,840 | 0.0 | | | | 0.000 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 05/29/02 | 0.00 | 0% | 1,210,850 | 0.0 | | | | 0.000 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 05/30/02 | 0.88 | 100% | 1,210,850 | 0.0 | | | | 0.000 | 1.070 | 0.000 | 0.005 | 0.000 | 0.154 |
| 06/05/02 | 6.13 | 100% | 1,213,350 | 0.3 | | | | 0.011 | 1.082 | 0.000 | 0.005 | 0.000 | 0.154 |
| 06/12/02 | 7.02 | 100% | 1,213,400 | 0.0 | < 960 | < 0.50 | 9.2 | 0.000 | 1.082 | 0.000 | 0.005 | 0.000 | 0.154 |
| 06/18/02 | 5.98 | 100% | 1,216,120 | 0.3 | | | | 0.106 | 1.188 | 0.001 | 0.006 | 0.295 | 0.449 |
| 06/28/02 | 10.02 | 100% | 1,217,040 | 0.1 | | | | 0.036 | 1.224 | 0.000 | 0.006 | 0.100 | 0.549 |
| 07/05/02 | 6.99 | 100% | 1,217,040 | 0.0 | | | | 0.000 | 1.224 | 0.000 | 0.006 | 0.000 | 0.549 |
| 07/08/02 | 2.43 | 100% | 1,217,040 | 0.0 | | | | 0.000 | 1.224 | 0.000 | 0.006 | 0.000 | 0.549 |

**TABLE 5: OPERATION AND PERFORMANCE DATA - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Date | Days of Operation | Percent Operational | Average Operational | | | Influent Conc. (µg/L) | Influent Conc. (µg/L) | Influent Conc. (µg/L) | Est. Pounds Removed* | Cumulative Pounds Removed | Cumulative Est. Pounds Removed* | Cumulative Pounds Removed | Cumulative Est. Pounds Removed* | Cumulative Pounds Removed |
|----------|-------------------|---------------------|----------------------|-----------------|-----------|-----------------------|-----------------------|-----------------------|----------------------|---------------------------|---------------------------------|---------------------------|---------------------------------|---------------------------|
| | | | Flow Total (gallons) | Flow rate (gpm) | Total TPH | | | | | | | | | |
| 07/12/02 | 4.54 | 100% | 1,217,040 | 0.0 | 8,400 | < 50.00 | 26000 | 0.000 | 1.224 | 0.000 | 0.006 | 0.000 | 0.549 | |
| 07/16/02 | 4.04 | 100% | 1,217,200 | 0.0 | | | | 0.006 | 1.230 | 0.000 | 0.006 | 0.017 | 0.566 | |
| 07/23/02 | 7.05 | 100% | 1,217,200 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.000 | 0.566 | |
| 08/02/02 | 9.87 | 100% | 1,217,200 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.000 | 0.566 | |
| 08/07/02 | 5.18 | 100% | 1,217,210 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.001 | 0.567 | |
| 08/13/02 | 5.74 | 100% | 1,217,210 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.000 | 0.567 | |
| 08/21/02 | 8.19 | 100% | 1,217,210 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.000 | 0.567 | |
| 08/27/02 | 5.79 | 100% | 1,217,210 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.000 | 0.567 | |
| 09/06/02 | 10.21 | 100% | 1,217,210 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.000 | 0.567 | |
| 09/10/02 | 4.00 | 100% | 1,217,210 | 0.0 | | | | 0.000 | 1.230 | 0.000 | 0.006 | 0.000 | 0.567 | |
| 09/17/02 | 7.04 | 100% | 1,217,350 | 0.0 | | | | 0.005 | 1.235 | 0.000 | 0.006 | 0.015 | 0.582 | |
| 09/24/02 | 6.98 | 100% | 1,217,350 | 0.0 | | NA | NA | NA | 0.000 | 1.235 | 0.000 | 0.006 | 0.000 | 0.582 |
| 10/01/02 | 7.03 | 100% | 1,217,350 | 0.0 | | | | 0.000 | 1.235 | 0.000 | 0.006 | 0.000 | 0.582 | |
| 10/08/02 | 6.69 | 100% | 1,217,350 | 0.0 | | | | 0.000 | 1.235 | 0.000 | 0.006 | 0.000 | 0.582 | |
| 10/16/02 | 6.32 | 79% | 1,217,350 | 0.0 | | | | 0.000 | 1.235 | 0.000 | 0.006 | 0.000 | 0.582 | |
| 10/22/02 | 6.03 | 100% | 1,217,350 | 0.0 | | | | 0.000 | 1.235 | 0.000 | 0.006 | 0.000 | 0.582 | |
| 10/29/02 | 7.16 | 100% | 1,217,350 | 0.0 | | | | 0.000 | 1.235 | 0.000 | 0.006 | 0.000 | 0.582 | |
| 11/05/02 | 7.03 | 100% | 1,217,350 | 0.0 | | | | 0.000 | 1.235 | 0.000 | 0.006 | 0.000 | 0.582 | |
| 11/08/02 | 2.19 | 78% | 1,217,650 | 0.1 | | | | 0.011 | 1.246 | 0.000 | 0.006 | 0.033 | 0.615 | |
| 11/12/02 | 4.21 | 100% | 1,218,130 | 0.1 | < 105 | < 0.50 | < 2.5 | 0.017 | 1.263 | 0.000 | 0.006 | 0.052 | 0.667 | |
| 11/19/02 | 6.92 | 100% | 1,220,110 | 0.2 | | | | 0.019 | 1.282 | 0.000 | 0.006 | 0.003 | 0.670 | |
| 11/25/02 | 6.04 | 100% | 1,220,110 | 0.0 | | | | 0.000 | 1.282 | 0.000 | 0.006 | 0.000 | 0.670 | |
| 12/05/02 | 10.06 | 100% | 1,220,110 | 0.0 | | | | 0.000 | 1.282 | 0.000 | 0.006 | 0.000 | 0.670 | |
| 12/10/02 | 4.97 | 100% | 1,220,120 | 0.0 | 2,230 | < 50 | 420 | 0.000 | 1.282 | 0.000 | 0.006 | 0.000 | 0.670 | |
| 12/17/02 | 7.00 | 100% | 1,221,220 | 0.1 | | | | 0.014 | 1.296 | 0.000 | 0.007 | 0.005 | 0.676 | |
| 12/24/02 | 7.01 | 100% | 1,221,640 | 0.0 | | | | 0.005 | 1.301 | 0.000 | 0.007 | 0.002 | 0.677 | |
| 12/30/02 | 6.00 | 100% | 1,221,670 | 0.0 | | | | 0.000 | 1.301 | 0.000 | 0.007 | 0.000 | 0.678 | |
| 01/06/03 | 6.96 | 100% | 1,221,850 | 0.0 | 745 | < 5.0 | 690 | 0.002 | 1.303 | 0.000 | 0.007 | 0.001 | 0.678 | |
| 01/10/03 | 3.42 | 84% | 1,221,880 | 0.0 | | | | 0.000 | 1.304 | 0.000 | 0.007 | 0.000 | 0.679 | |
| 01/14/03 | 3.90 | 100% | 1,221,890 | 0.0 | | | | 0.000 | 1.304 | 0.000 | 0.007 | 0.000 | 0.679 | |
| 01/21/03 | 7.02 | 100% | 1,221,900 | 0.0 | | | | 0.000 | 1.304 | 0.000 | 0.007 | 0.000 | 0.679 | |
| 01/27/03 | 6.04 | 100% | 1,221,910 | 0.0 | | | | 0.000 | 1.304 | 0.000 | 0.007 | 0.000 | 0.679 | |
| 02/04/03 | 7.91 | 100% | 1,221,920 | 0.0 | < 190 | < 0.50 | 8.6 | 0.000 | 1.304 | 0.000 | 0.007 | 0.000 | 0.679 | |
| 02/12/03 | 8.05 | 100% | 1,221,920 | 0.0 | | | | 0.000 | 1.304 | 0.000 | 0.007 | 0.000 | 0.679 | |
| 02/19/03 | 6.94 | 100% | 1,222,060 | 0.0 | | | | 0.001 | 1.305 | 0.000 | 0.007 | 0.002 | 0.680 | |
| 02/20/03 | 0.00 | 0% | 1,222,060 | 0.0 | | | | 0.000 | 1.305 | 0.000 | 0.007 | 0.000 | 0.680 | |
| 02/25/03 | 5.04 | 100% | 1,222,060 | 0.0 | | | | 0.000 | 1.305 | 0.000 | 0.007 | 0.000 | 0.680 | |
| 03/05/03 | 7.97 | 100% | 1,224,310 | 0.2 | 2,061 | < 25 | 2900 | 0.021 | 1.326 | 0.000 | 0.007 | 0.027 | 0.708 | |
| 03/11/03 | 5.94 | 100% | 1,224,930 | 0.1 | | | | 0.006 | 1.332 | 0.000 | 0.007 | 0.008 | 0.715 | |

**TABLE 5: OPERATION AND PERFORMANCE DATA - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Date | Days of Operation | Percent Operational | Flow Total (gallons) | Average Operational Flow rate (gpm) | Influent Conc. (µg/L) Total TPH | Influent Conc. (µg/L) Benzene | Influent Conc. (µg/L) MTBE | Est. Pounds Removed* Total TPH | Cumulative Pounds Removed | | Cumulative Pounds Removed | | Cumulative Pounds Removed | |
|----------|-------------------|---------------------|----------------------|-------------------------------------|------------------------------------|----------------------------------|-------------------------------|-----------------------------------|--------------------------------|--------------------------------|-----------------------------|-----------------------------|--------------------------------------|-----------------------------------|
| | | | | | | | | | Est. Pounds Removed Benzene | Est. Pounds Removed Benzene | Est. Pounds Removed MTBE | Est. Pounds Removed MTBE | Cumulative Pounds Removed Benzene | Cumulative Pounds Removed MTBE |
| 03/18/03 | 7.04 | 100% | 1,225,680 | 0.1 | | | | 0.007 | 1.338 | 0.000 | 0.007 | 0.009 | 0.724 | |
| 03/25/03 | 7.00 | 100% | 1,226,890 | 0.1 | | | | 0.011 | 1.349 | 0.000 | 0.007 | 0.015 | 0.739 | |
| 04/01/03 | 7.04 | 100% | 1,227,060 | 0.0 | | | | 0.002 | 1.351 | 0.000 | 0.007 | 0.002 | 0.741 | |
| 04/08/03 | 3.52 | 50% | 1,227,470 | 0.1 | | | | 0.004 | 1.355 | 0.000 | 0.007 | 0.005 | 0.746 | |
| 04/15/03 | 3.45 | 50% | 1,227,990 | 0.1 | | | | 0.005 | 1.359 | 0.000 | 0.008 | 0.006 | 0.752 | |
| 04/22/03 | 7.06 | 100% | 1,230,320 | 0.2 | < 102 | < 0.50 | 25 | 0.021 | 1.380 | 0.000 | 0.008 | 0.028 | 0.781 | |
| 04/29/03 | 7.00 | 100% | 1,233,510 | 0.3 | | | | 0.005 | 1.385 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 05/06/03 | 6.99 | 100% | 1,235,160 | 0.2 | | | | 0.003 | 1.388 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 05/13/03 | 6.99 | 100% | 1,235,490 | 0.0 | < 280 | < 0.50 | < 2.5 | 0.001 | 1.389 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 05/20/03 | 7.06 | 100% | 1,235,950 | 0.0 | | | | 0.001 | 1.390 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 05/28/03 | 7.98 | 100% | 1,236,460 | 0.0 | | | | 0.001 | 1.391 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 06/02/03 | 4.99 | 100% | 1,236,480 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 06/10/03 | 7.99 | 100% | 1,236,480 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 06/17/03 | 6.81 | 100% | 1,236,490 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.781 | |
| 06/20/03 | 3.19 | 100% | 1,236,650 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 06/24/03 | 4.08 | 100% | 1,236,650 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 06/25/03 | 1.00 | 100% | 1,236,650 | 0.0 | NA | NA | NA | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 06/27/03 | 1.92 | 100% | 1,236,680 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 07/01/03 | 4.01 | 100% | 1,236,680 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 07/08/03 | 6.99 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 07/15/03 | 6.98 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 07/22/03 | 7.02 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 07/29/03 | 6.81 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 08/05/03 | 7.17 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 08/13/03 | 8.06 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 08/19/03 | 6.02 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 08/26/03 | 6.98 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 09/02/03 | 6.99 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 09/09/03 | 6.96 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 09/16/03 | 7.03 | 100% | 1,236,690 | 0.0 | | | | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 09/23/03 | 7.00 | 100% | 1,236,780 | 0.0 | 175 | < 2.5 | 60 | 0.000 | 1.391 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 09/29/03 | 1.51 | 25% | 1,236,810 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 10/08/03 | 0.00 | 0% | 1,236,810 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 10/14/03 | 0.00 | 0% | 1,236,810 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 10/20/03 | 5.77 | 100% | 1,236,810 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 10/27/03 | 0.00 | 0% | 1,236,810 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 11/03/03 | 0.00 | 0% | 1,236,810 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 11/11/03 | 8.15 | 100% | 1,236,950 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |
| 11/13/03 | 0.82 | 43% | 1,236,950 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 | |

**TABLE 5: OPERATION AND PERFORMANCE DATA - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Date | Days of Operation | Percent Operational | Flow Total (gallons) | Average Operational Flow rate (gpm) | Influent Conc. | | | Est. Pounds Removed* | Cumulative Pounds Removed | Cumulative Pounds Removed | | | Cumulative Est. Pounds MTBE Removed |
|----------|-------------------|---------------------|----------------------|-------------------------------------|------------------|----------------|-------------|----------------------|---------------------------|---------------------------|--------------------------------|------------------------|-------------------------------------|
| | | | | | (µg/L) Total TPH | (µg/L) Benzene | (µg/L) MTBE | | | Est. Pounds Benzene | Cumulative Est. Pounds Benzene | Cumulative Pounds MTBE | |
| 11/18/03 | 5.12 | 100% | 1,236,960 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 |
| 11/25/03 | 7.04 | 100% | 1,236,960 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 |
| 12/02/03 | 6.97 | 100% | 1,236,970 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 |
| 12/08/03 | 5.85 | 100% | 1,237,060 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 |
| 12/11/03 | 3.08 | 100% | 1,237,160 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 |
| 12/16/03 | 4.79 | 100% | 1,237,310 | 0.0 | | | | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 |
| 12/22/03 | 6.13 | 100% | 1,237,580 | 0.0 | 108 | < 0.5 | 2.5 | 0.000 | 1.392 | 0.000 | 0.008 | 0.000 | 0.782 |
| 12/29/03 | 7.14 | 100% | 1,237,740 | 0.0 | | | | 0.000 | 1.393 | 0.000 | 0.008 | 0.000 | 0.782 |
| 01/08/04 | 9.96 | 100% | 1,238,160 | 0.0 | 450 | < 0.50 | < 2.5 | 0.001 | 1.394 | 0.000 | 0.008 | 0.000 | 0.782 |
| 01/13/04 | 4.99 | 100% | 1,238,160 | 0.0 | | | | 0.000 | 1.394 | 0.000 | 0.008 | 0.000 | 0.782 |
| 01/20/04 | 7.00 | 100% | 1,238,160 | 0.0 | | | | 0.000 | 1.394 | 0.000 | 0.008 | 0.000 | 0.782 |
| 01/27/04 | 7.00 | 100% | 1,238,200 | 0.0 | | | | 0.000 | 1.394 | 0.000 | 0.008 | 0.000 | 0.782 |
| 02/04/04 | 8.01 | 100% | 1,238,360 | 0.0 | | | | 0.000 | 1.394 | 0.000 | 0.008 | 0.000 | 0.782 |
| 02/11/04 | 7.03 | 100% | 1,238,360 | 0.0 | 250 | < 0.50 | < 2.5 | 0.000 | 1.394 | 0.000 | 0.008 | 0.000 | 0.782 |
| 02/17/04 | 5.96 | 100% | 1,238,410 | 0.0 | | | | 0.000 | 1.395 | 0.000 | 0.008 | 0.000 | 0.782 |
| 02/25/04 | 8.06 | 100% | 1,238,700 | 0.0 | | | | 0.001 | 1.396 | 0.000 | 0.008 | 0.000 | 0.782 |
| 03/03/04 | 7.01 | 100% | 1,238,770 | 0.0 | | | | 0.000 | 1.396 | 0.000 | 0.008 | 0.000 | 0.782 |
| 03/11/04 | 7.96 | 100% | 1,238,770 | 0.0 | | | | 0.000 | 1.396 | 0.000 | 0.008 | 0.000 | 0.782 |
| 03/17/04 | 6.00 | 100% | 1,238,770 | 0.0 | | | | 0.000 | 1.396 | 0.000 | 0.008 | 0.000 | 0.782 |
| 03/23/04 | 6.02 | 100% | 1,238,770 | 0.0 | 590 | < 0.50 | < 2.5 | 0.000 | 1.396 | 0.000 | 0.008 | 0.000 | 0.782 |
| 03/31/04 | 7.96 | 100% | 1,239,030 | 0.0 | | | | 0.001 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 04/07/04 | 7.04 | 100% | 1,239,030 | 0.0 | | | | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 04/14/04 | 6.96 | 100% | 1,239,030 | 0.0 | | | | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 04/21/04 | 7.02 | 100% | 1,239,050 | 0.0 | 180 | < 0.50 | 7.8 | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 04/28/04 | 7.04 | 100% | 1,239,050 | 0.0 | | | | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 05/03/04 | 4.94 | 100% | 1,239,050 | 0.0 | | | | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 05/11/04 | 7.92 | 100% | 1,239,050 | 0.0 | | | | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 05/18/04 | 7.08 | 100% | 1,239,050 | 0.0 | | | | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 06/22/04 | 34.81 | 100% | 1,239,050 | 0.0 | 230 | < 0.50 | < 2.5 | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 07/01/04 | 9.02 | 100% | 1,239,270 | 0.0 | | | | 0.001 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 07/22/04 | 21.17 | 100% | 1,239,270 | 0.0 | | | | 0.000 | 1.397 | 0.000 | 0.008 | 0.000 | 0.782 |
| 08/02/04 | 10.96 | 100% | 1,239,300 | 0.0 | | | | 0.000 | 1.398 | 0.000 | 0.008 | 0.000 | 0.782 |
| 08/18/04 | 16.06 | 100% | 1,239,320 | 0.0 | 600 | < 0.50 | 33 | 0.000 | 1.398 | 0.000 | 0.008 | 0.000 | 0.782 |
| 08/30/04 | 10.81 | 92% | 1,239,320 | 0.0 | | | | 0.000 | 1.398 | 0.000 | 0.008 | 0.000 | 0.782 |
| 09/21/04 | 22.04 | 100% | 1,239,370 | 0.0 | 1,450 | < 0.50 | < 2.5 | 0.000 | 1.398 | 0.000 | 0.008 | 0.000 | 0.782 |
| 09/23/04 | 2.15 | 100% | 1,239,380 | 0.0 | | | | 0.000 | 1.398 | 0.000 | 0.008 | 0.000 | 0.782 |
| 10/07/04 | 14.05 | 100% | 1,239,380 | 0.0 | | | | 0.000 | 1.398 | 0.000 | 0.008 | 0.000 | 0.782 |
| 10/27/04 | 20.00 | 100% | 1,240,120 | 0.0 | 104 | < 0.50 | < 2.5 | 0.005 | 1.403 | 0.000 | 0.008 | 0.000 | 0.782 |

The GES was shut down on 10/27/04

**TABLE 5: OPERATION AND PERFORMANCE DATA - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Date | Days of Operation | Percent Operational | Flow Total (gallons) | Average Operational Flow rate (gpm) | Influent Conc. (µg/L) Total TPH | Influent Conc. (µg/L) Benzene | Influent Conc. (µg/L) MTBE | Est. Pounds Removed* Total TPH | Cumulative Pounds Removed Total TPH | Est. Pounds Removed* Benzene | Cumulative Pounds Removed Benzene | Est. Pounds Removed* MTBE | Cumulative Pounds Removed MTBE |
|-----------------|-------------------|---------------------|----------------------|-------------------------------------|---------------------------------|-------------------------------|----------------------------|--------------------------------|-------------------------------------|------------------------------|-----------------------------------|---------------------------|--------------------------------|
| Total / Average | 1113.04 | | 1,240,120 | | | | | 1.403 | 1.403 | 0.008 | 0.008 | 0.782 | 0.782 |

Note: When analyte is not detected, laboratory reporting limit is used for concentration and mass removed calculations.

* Est. Pounds Removed = Average influent conc. (µg/L) * period flow total (gallons) * 1 lb/454 g * 1g/1,000,000µg * 3.785 L/gallon

gpm - Gallons per minute.

MTBE - Methyl tertiary butyl ether.

NC - Not calculated.

µg/L - Micrograms per liter.

NM - Not measured.

TPH - Total Petroleum Hydrocarbons as gasoline and diesel.

NM - Not analysed.

G:\Projects\73399\MasterO&M\{3399_h2o.xls]Report Table

**TABLE 6: SUMMARY OF ANALYTICAL RESULTS - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Sample | Concentration (µg/L) | | | | | | | | |
|---|----------------------|--------|---------|---------|---------------|---------------|--------|--------|---------------|
| Location | Date | TPH-g | Benzene | Toluene | Ethyl-benzene | Total Xylenes | TPH-d | MTBE | MTBE by 8260B |
| Influent | | | | | | | | | |
| | 03/12/01 | 52.5 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | 66.3 | 65.7 |
| | 04/06/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 | NA |
| | 05/11/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 | < 1.00 |
| | 06/05/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 1.0 |
| | 07/06/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 2.0 |
| | 08/10/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 1.0 |
| | 09/07/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | 29 | 52 |
| | 10/23/01 | 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 210 | 460 | 620 |
| | 12/21/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 470 | 800 | 650 |
| | 01/08/02 | < 50 | 0.57 | < 0.50 | < 0.50 | < 0.50 | < 48 | 920 | 750 |
| | 02/05/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 260 | 38 | 35 |
| | 03/05/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 70 | 14 | 16 |
| | 05/28/02 | NA | NA | NA | NA | NA | NA | NA | NA |
| | 06/12/02 | < 50 | < 0.50 | 0.62 | < 0.50 | < 0.50 | 910 | 9.2 | 10 |
| | 07/12/02 | 7,900 | < 50 | 78 | < 50 | < 50 | 500 | 26,000 | 20,000 |
| | 09/24/02 | NA | NA | NA | NA | NA | NA | NA | NA |
| | 11/12/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 55 | < 2.5 | 3.0 |
| | 12/10/02 | 230 | < 50 | < 50 | < 50 | < 50 | 2,000 | NA | 420 |
| | 01/06/03 | 670 | < 5.0 | < 5.0 | < 5.0 | < 5.0 | 75 | 690 | 670 |
| | 02/04/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 140 | 8.6 | 8.7 |
| | 03/05/03 | 2,000 | < 25 | < 25 | < 25 | < 25 | 61 | NA | 2,900 |
| | 04/22/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 52 | NA | 25 |
| | 05/13/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 230 | < 2.5 | NA |
| | 06/25/03 | NA | NA | NA | NA | NA | NA | NA | NA |
| | 09/23/03 | 55 | < 2.5 | < 2.5 | < 2.5 | < 2.5 | 120 | 60 | NA |
| | 12/22/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | 1.1 | 58 | 2.5 | NA |
| | 01/08/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 400 | < 2.5 | NA |
| | 02/11/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 200 | < 2.5 | NA |
| | 03/23/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 540 | < 2.5 | NA |
| | 04/21/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 130 | 7.8 | NA |
| | 06/22/04 | < 50 | < 0.50 | 2.5 | < 0.50 | 2.6 | 180 | < 2.5 | NA |
| | 08/18/04 | 150 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 450 | 33 | NA |
| | 09/21/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 1,400 | < 2.5 | NA |
| | 10/27/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 54 | < 2.5 | NA |
| After First Carbon Vessel (Intermediate) | | | | | | | | | |
| | 03/12/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 | < 1.00 |
| | 04/06/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 | NA |
| | 05/11/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 | < 1.00 |
| | 06/05/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 1.0 |
| | 07/06/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 2.0 |
| | 08/10/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 1.0 |
| | 09/07/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 1.0 |
| | 10/23/01 | < 50 | < 0.50 | 0.50 | 2.7 | 2.9 | 200 | < 2.5 | < 2.0 |
| | 12/21/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 48 | < 2.5 | < 0.50 |
| | 01/08/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 48 | < 2.5 | < 0.50 |
| | 02/05/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 290 | < 2.5 | < 0.50 |
| | 03/05/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 320 | < 2.5 | < 0.50 |
| | 05/28/02 | NA | NA | NA | NA | NA | NA | NA | NA |
| | 06/12/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 760 | < 2.5 | < 0.50 |
| | 07/12/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 62 | < 2.5 | < 0.50 |

**TABLE 6: SUMMARY OF ANALYTICAL RESULTS - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Sample Location | Date | Concentration (µg/L) | | | | | | |
|--------------------|----------|--|---------|---------|---------------|---------------|--------|--------|
| | | TPH-g | Benzene | Toluene | Ethyl-benzene | Total Xylenes | TPH-d | MTBE |
| | 09/24/02 | NS | NS | NS | NS | NS | NS | NS |
| | 11/12/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 48 | < 2.5 |
| | 12/10/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 71 | NA |
| | 01/06/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 81 | < 2.5 |
| | 02/04/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 120 | < 2.5 |
| | 03/05/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | NA |
| | 04/22/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | NA |
| | 05/13/03 | < 50 | < 0.50 | < 1.0 | < 1.0 | < 1.7 | 100 | < 2.5 |
| | 06/25/03 | NA | NA | NA | NA | NA | NA | NA |
| | 09/23/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 91 | NA |
| | 12/22/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 2.5 |
| | 01/08/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 2.5 |
| | 02/11/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 91 | < 2.5 |
| | 03/23/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 |
| | 04/21/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 2.5 |
| | 06/22/04 | < 50 | < 0.50 | 2.1 | < 0.50 | 2.4 | < 50 | < 2.5 |
| | 08/18/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 97 | < 2.5 |
| | 09/21/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 |
| | 10/27/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 2.5 |
| Effluent | | | | | | | | |
| | 03/12/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 |
| | 04/06/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 |
| | 05/11/01 | < 50.0 | < 0.500 | < 0.500 | < 0.500 | < 0.500 | < 50.0 | < 2.50 |
| | 06/05/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 |
| | 07/06/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 60 | < 2.5 |
| | 07/06/01 | TPH-d result confirmed with spare sample | | | | | < 50 | |
| | 08/10/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 1.00 |
| | 09/07/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | NA |
| | 10/23/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 700 | < 2.5 |
| | 12/21/01 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 48 | < 0.50 |
| | 01/08/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 48 | < 0.50 |
| | 02/05/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 58 | < 0.50 |
| | 03/05/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 400 | < 0.50 |
| | 05/28/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 1,200 | < 0.50 |
| | 06/12/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 51 | < 0.50 |
| | 07/12/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 51 | < 0.50 |
| | 09/24/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 460 | < 0.50 |
| | 11/12/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 48 | < 0.50 |
| | 12/10/02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 59 | NA |
| | 01/06/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 73 | < 0.50 |
| | 02/04/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 74 | < 0.50 |
| | 03/05/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | NA |
| | 04/22/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | NA |
| | 05/13/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 75 | < 0.50 |
| | 06/25/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 470 | < 0.50 |
| | 09/23/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 150 | < 0.50 |
| | 11/26/03 | < 50 | < 0.50 | 1.5 | < 0.50 | 1.4 | < 47 | < 0.50 |
| | 12/22/03 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 0.50 |
| | 01/08/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 0.50 |
| | 02/11/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 0.50 |
| | 03/23/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 0.50 |
| | 04/21/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 54 | NA |
| | 06/22/04 | < 50 | < 0.50 | 3.1 | < 0.50 | 3.6 | 100 | < 0.50 |

**TABLE 6: SUMMARY OF ANALYTICAL RESULTS - GROUNDWATER EXTRACTION SYSTEM
FORMER EXXON RS 7-3399, 2991 HOPYARD ROAD, PLEASANTON, CALIFORNIA**

| Sample Location | Date | TPH-g | Concentration ($\mu\text{g/L}$) | | | | | MTBE | MTBE by 8260B |
|--------------------|----------|-------|-----------------------------------|---------|---------------|---------------|-------|-------|---------------|
| | | | Benzene | Toluene | Ethyl-benzene | Total Xylenes | TPH-d | | |
| | 08/18/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 47 | < 2.5 | < 0.50 |
| | 09/21/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 50 | < 2.5 | < 0.50 |
| | 10/27/04 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 48 | < 2.5 | < 0.50 |

NA - Not Analyzed

$\mu\text{g/L}$ - Micrograms per liter

TPH-g - Total Petroleum Hydrocarbons as gasoline

TPH-d - Total Petroleum Hydrocarbons as diesel

MTBE - Methyl tertiary butyl ether

G:\Projects\73399\MasterO&M[3399_h2o.xls]Analytical

Appendix A

Field Protocols

PROTOCOLS FOR QUARTERLY GROUNDWATER MONITORING

GROUNDWATER GAUGING

Wells are opened prior to gauging to allow the groundwater level in the wells to equilibrate with atmospheric pressure. The depth to groundwater and depth to liquid-phase hydrocarbons, if present, are then measured to the nearest 0.01 feet using an electronic water level meter or optical interface probe. The measurements are made from a permanent reference point at the top of the well casing. If less than 1 foot of water is measured in a well, the water is bailed from the well and, if the well does not recover, the well is considered "functionally dry." Wells with a sheen or measurable liquid-phase hydrocarbons are generally not purged or sampled.

WELL PURGING

After the wells are gauged, each well is purged of approximately 3 well casing volumes of water to provide representative groundwater samples for analysis. Field parameters of pH, temperature, and electrical conductance are measured during purging to ensure that these parameters have stabilized before groundwater in a well is sampled. Groundwater in each well is purged using an inertial pump (WaTerra), an electric submersible pump, or a bailer. After the well is purged, the water level is checked to ensure that the well has recharged to at least 80 percent of its original water level.

GROUNDWATER SAMPLING

After purging, groundwater in each well is sampled using dedicated tubing and an inertial pump (WaTerra) or a factory-cleaned disposable bailer. Samples from extraction wells are typically collected from sample ports associated with the groundwater remediation system. Samples collected for volatile organic analysis are placed in Teflon septum-sealed 40-milliliter glass vials. Samples collected for diesel analysis are placed in 1-liter amber glass bottles. Each sample bottle is labeled with the site name, well number, date, sampler's initials, and preservative. The samples are placed in a cooler with ice for delivery to a state-certified laboratory. The information for each sample is entered on a chain-of-custody form prior to transport to the laboratory.

Appendix B

Field Documents

MONITORING WELL DATA FORM

Client: ExxonMobil

Date: 12-20-04

Project Number: UP3399.1

Station Number: 7-3399

 Site Location:
 2991 Hopyard Rd, Pleasanton, CA

Samplers: WP/CM/T1

| MONITORING WELL NUMBER | DEPTH TO WATER (TOC) FT | DEPTH TO PRODUCT (TOC) FT | APPARENT PRODUCT THICKNESS(FT) | AMOUNT OF PRODUCT REMOVED(L) | Well Completion Depth | DEPTH TO BOTTOM (TOC) | WELL CASING DIAMETER |
|------------------------------|-------------------------------|---------------------------------|--------------------------------------|------------------------------------|-----------------------------|-----------------------------|----------------------------|
| MW1 | 53.62 | | | | 57.00 | 55.00 | 4" |
| MW4 | 53.67 | | | | 57.00 | 56.70 | 4" |
| MW5D | 58.58 | | | | 77.50 | 77.50 | 4" |
| MW5S | 53.79 | | | | 55.00 | 54.55 | 4" |
| MW7 | 54.53 | | | | 53.00 | 59.65 | 6" |
| MW8 | 58.62 | | | | 133.00 | 132.90 | 4" |
| MW9A | 56.50 | | | | 58.00 | 57.05 | 6" |
| MW10 | 57.94 | | | | 60.00 | 58.40 | 4" |
| MW11 | 53.45 | | | | 55.00 | 54.40 | 4" |
| MW12A | 59.00 | | | | 130.50 | 128.50 | 2" |
| MW13 | 59.52 | | | | 72.00 | 70.35 | 2" |
| MW14 | 57.61 | | | | 136.00 | 135.10 | 2" |
| OW1 | 10.66 | | | | | 11.55 | 4" |
| OW2 | 10.50 | | | | | 12.15 | 4" |
| VR1 | 26.73 | | | | 30.00 | 28.00 | 4" |
| VR2 | 43.30 | DP1 | | | 45.00 | 43.30 | 2" |
| PMW1 | 15.62 | DP1 | | | 16.00 | 15.62 | 4" |
| PMW2 | 14.93 | | | | 16.00 | 15.55 | 4" |
| PMW3 | 10.61 | | | | 16.00 | 15.90 | 4" |
| PMW4 | 13.52 | | | | 16.00 | 15.85 | 4" |
| PMW5 | 13.89 | | | | 16.00 | 14.6 | 4" |
| PMW6 | 15.56 | | | | 16.00 | 15.82 | 4" |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: MW1

Date: 12/20/04

Project No: UP3399.1

Personnel: **GAUGING DATA**Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) | | | |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|---|------------------------|-----------------------------|------|------|-----|
| | 55.00 | 53.62 | 1.38 | 1 | 2 | 4 | 6 | 0.04 | 0.16 | 0.64 | 1.44 | .88 |

PURGING DATAPurge Method: WATERRA / BAILER / SUB Purge Depth: Screen Purge Rate: 1.0 (gpm)

| | | | | | | | |
|--------------------|------------|------------|------------|--|--|--|--|
| Time | 11:01 | 11:02 | 11:03 | | | | |
| Volume Purge (gal) | 1 | 2 | 3 | | | | |
| Temperature (°C) | 17.8 | 18.4 | 18.5 | | | | |
| pH | 7.12 | 7.06 | 7.11 | | | | |
| Spec Cond (umhos) | 1643 | 1646 | 1656 | | | | |
| Turbidity/Color | clear/gray | clear/gray | clear/gray | | | | |
| Odor/Taste | N | N | N | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | |
| Dewatered (Y/N) | N | N | N | | | | |

Comments/Observations:

| | | |
|--|--|--|
| | | |
|--|--|--|

SAMPLING DATA

Time Sampled: 11:10

Approximate Depth to Water During Sampling: 54 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| MW1 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 3 (gallons)

Disposal: SYSTEM

Weather Conditions: ok.

BOLTS / N

Condition of Well Box and Casing at Time of Sampling: ok.

CAP & LOCK / N

Well Head Conditions Requiring Correction: none

GROUT / N

Problems Encountered During Purgung and Sampling: none

WELL BOX / N

Comments:

SECURED / N

GROUNDWATER PURGE AND SAMPLE

| | | | | | |
|---------------|--------------|------------|-----|-------|----------|
| Project Name: | Exxon 7-3399 | Well No: | MW4 | Date: | 12/20/04 |
| Project No: | UP3399.1 | Personnel: | TI | | |

GAUGING DATA

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|------|------|------|------------------------|-----------------------------|
| | | | | 1 | 2 | 4 | 6 | | |
| | 56.70 | 53.67 | 3.03 | 0.04 | 0.16 | 0.64 | 1.44 | 1.94 | 5.82 |

PURGING DATA

| Purge Method: | WATERRA / BAILER / SUB | Purge Depth: | Screen | Purge Rate: | (gpm) |
|-----------------------|------------------------|--------------|--------|-------------|-------|
| Date: | 11/30 | | / | | |
| Volume Purge (gal): | 2 | 4 | / | | |
| Temperature (°C): | 17.6 | | / | | |
| pH: | 7.18 | | / | | |
| Spec Conduct (μmhos): | 1647 | | / | | |
| Turbidity/color: | clear/clear | | / | | |
| Over Dyn: | N | | / | | |
| Casing Volumes: | 1 | 2 | 3 | | |
| Dewatered (Y/N): | N | | / | | |

Comments/Observations: Dewatered at 2.5 gallons

Recharged and Sampled

SAMPLING DATA

| | | | | |
|---------------|-------|---|----|--------|
| Time Sampled: | 11/30 | Approximate Depth to Water During Sampling: | 54 | (feet) |
|---------------|-------|---|----|--------|

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|-----------------|-------------------|
| MW4 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 2.5 (gallons) Disposal: SYSTEM

Weather Conditions: OK BOLTS / N

Condition of Well Box and Casing at Time of Sampling: OK CAP & LOCK / N

Well Head Conditions Requiring Correction: NONE GROUT / N

Problems Encountered During Purgung and Sampling: Dewatered WELL BOX / N

Comments: SECURED / N

GROUNDWATER PURGE AND SAMPLE

Well No: MWSD

Date: 12.25.04

Project Name: Exxon 7-3399

Project No: UP3399.1

Personnel: T1

GAUGING DATA

Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gall) |
|-------------------------------|--------------------|-----------------------|---------------------|--------------------------------|---------------------|---------------------------|
| | 77.50 | 58.58 | 18.92 | 1 2 4 6 0.04 0.16 0.64 1.44 | 12.11 | 36.33 |

PURGING DATA

Purge Method: WATERRA BAILER / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | |
|---------------------|-----------|-----------|-----------|--|--|--|
| Time Elapsed | 9:10 | 9:20 | 9:30 | | | |
| Volume Purged (gal) | 12 | 24 | 36 | | | |
| Temperature (C) | 15.3 | 17.2 | 16.6 | | | |
| pH | 7.59 | 7.46 | 7.46 | | | |
| Specific Gravity | 1.015 | 1.014 | 1.011 | | | |
| Turbidity/Color | clear/unc | clear/unc | clear/unc | | | |
| Odometer | N | N | N | | | |
| Casing Volumes | 1 | 2 | 3 | | | |
| Dewatered (Y/N) | N | N | N | | | |

Comments/Observations:

SAMPLING DATA

Time Sampled: 9:35

Approximate Depth to Water During Sampling: 59 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml. or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|--------------------------|------------------|-------------------|
| MWSD | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 36 (gallons)

Disposal:

SYSTEM

BOLTS / NCAP & LOCK / NGROUT / NWELL BOX / NSECURED / N

Weather Conditions: OK

Condition of Well Box and Casing at Time of Sampling: OK

Well Head Conditions Requiring Correction: None

Problems Encountered During Purgung and Sampling: None

Comments:

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: MWS

Date: 12-20-04

Project No: UP3399.1

Personnel: MM**GAUGING DATA**Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) | | | |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|---|------------------------|-----------------------------|------|------|-----|
| | 54.55 | 53.79 | .76 | 1 | 2 | 4 | 6 | 0.04 | 0.16 | 0.64 | 1.44 | ,48 |

PURGING DATAPurge Method: WATERRA / BAILER / SUB Purge Depth: Screen Purge Rate: _____ (gpm)

| | | | | | | | | | | | | |
|---------------------|----|-----|-----|--|--|--|--|--|--|--|--|--|
| Initial | | | | | | | | | | | | |
| Volume Purged (gal) | .5 | 1.0 | 1.5 | | | | | | | | | |
| Temperature (°F) | | | | | | | | | | | | |
| pH | | | | | | | | | | | | |
| Specific Gravity | | | | | | | | | | | | |
| Turbidity/Color | | | | | | | | | | | | |
| Odor (Y/N) | | | | | | | | | | | | |
| Casing Volumes: | 1 | 2 | 3 | | | | | | | | | |
| De-watered (Y/N) | | | | | | | | | | | | |

Comments/Observations:

*GRAB SAMPLED DUE TO LOW
WATER COLUMN*

SAMPLING DATATime Sampled: 8:45Approximate Depth to Water During Sampling: 54 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/Color | Analysis Method |
|---------------|-------------------------|----------------|--------------|----------------------------|-----------------|-------------------|
| MWS | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: _____ (gallons)

Disposal: SYSTEM

Weather Conditions: OKBOLTS / NCondition of Well Box and Casing at Time of Sampling: OKCAP & LOCK / NWell Head Conditions Requiring Correction: NONEGROUT / NProblems Encountered During Purgung and Sampling: NONEWELL BOX / N

Comments:

SECURED / N

GROUNDWATER PURGE AND SAMPLE

Well No: MW7

Date: 12-2004

Project Name: Exxon 7-3399

Project No: UP3399.1

Personnel: **GAUGING DATA**Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) | | | |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|---|------------------------|-----------------------------|------|------|------|
| | 51.65 | 54.53 | 5.12 | 1 | 2 | 4 | 6 | 0.04 | 0.16 | 0.64 | 1.44 | 7.37 |

PURGING DATAPurge Method: WATERRA 7 BAILER / SUB Purge Depth: Screen Purge Rate: _____ (gpm)

| | | | | | | | | | | | |
|--------------------|---|----|----|--|--|--|--|--|--|--|--|
| Time | / | / | / | | | | | | | | |
| Volume Purge (gal) | 7 | 14 | 21 | | | | | | | | |
| Temperature (°C) | | | | | | | | | | | |
| pH | | | | | | | | | | | |
| Spec Cond (µmos) | | | | | | | | | | | |
| Turbidity/Color | | | | | | | | | | | |
| Dust (Y/N) | | | | | | | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | | | | | |
| Dewatered (Y/N) | | | | | | | | | | | |

Comments/Observations:

WELL Dewatered 5 gallon

TECH RECD & SAMPLER

SAMPLING DATATime Sampled: 10

Approximate Depth to Water During Sampling: 50 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/ Color | Analysis Method |
|---------------|-------------------------|----------------|--------------|----------------------------|------------------|-------------------|
| MW7 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 5 (gallons)

Disposal: SYSTEM

BOLTS / NWeather Conditions: CAP & LOCK / NCondition of Well Box and Casing at Time of Sampling: GROUT / NWell Head Conditions Requiring Correction: WELL BOX / NProblems Encountered During Purging and Sampling: SECURED / N

Comments:

GROUNDWATER PURGE AND SAMPLE

Well No: MWY

Date: 12-20-04

Project Name: Exxon 7-3399

Project No: UP3399.1

Personnel: CM

GAUGING DATA

Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|------------------------|-----------------------------|
| | 132.90 | 58.62 | 74.28 | 1 | 2 | 4 | 6 | 0.04 0.16 0.64 1.44 |
| | | | | | | | 47.53 | 142.61 |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB Purge Depth: Screen Purge Rate: (gpm)

| | | | | | | | |
|----------------------|-------------|---------------------|---------------------|--|--|--|--|
| Time | 13:28 | 14:24 | 15:28 | | | | |
| Volume Purged (gal) | 48 | 96 | 144 | | | | |
| Temperature (°C) | 16.3 | 16.8°C | 16.8°C | | | | |
| pH | 7.58 | 7.18 | 7.38 | | | | |
| Specific Conductance | 1175 | 1260 _μ S | 1273 _μ S | | | | |
| Turbidity/Color | clear/clear | Clear | Clear | | | | |
| Odor (Y/N) | N | N | N | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | |
| De-watered (Y/N) | N | N | N | | | | |

Comments/Observations:

| | | |
|--|--|--|
| | | |
|--|--|--|

SAMPLING DATA

Time Sampled: 15:35

Approximate Depth to Water During Sampling: 59 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| MWY | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 144 (gallons)

Disposal:

SYSTEM

BOLTS Y / N

CAP & LOCK Y / N

GROUT Y / N

WELL BOX Y / N

SECURED Y / N

Weather Conditions:

Condition of Well Box and Casing at Time of Sampling:

Well Head Conditions Requiring Correction:

Problems Encountered During Purging and Sampling:

Comments:

GROUNDWATER PURGE AND SAMPLE

| | | | | | |
|---------------|--------------|------------|------|-------|---------|
| Project Name: | Exxon 7-3399 | Well No: | MW9A | Date: | 12/20/4 |
| Project No: | UP3399.1 | Personnel: | TI | | |

GAUGING DATA

Water Level Measuring Method: WLM / IP Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) | | | |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|---|------------------------|-----------------------------|------|------|------|
| | 57.05 | 56.50 | 0.55 | 1 | 2 | 4 | 6 | 0.04 | 0.16 | 0.64 | 1.44 | 0.79 |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB Purge Depth: Screen Purge Rate: (gpm)

| | | | | | | | |
|----------------------|---|---|---|---|---|--|--|
| Time | / | / | / | | | | |
| Volume Purge (gal) | 1 | / | 2 | 3 | / | | |
| Temperature (°C) | | | | | | | |
| pH | | | | | | | |
| Specific Conductance | | | | | | | |
| Turbidity/Color | | | | | | | |
| Dissolved MN | | | | | | | |
| Casing Volumes | 1 | | 2 | 3 | | | |
| Deviated MN | | | | | | | |

 Comments/Observations: *No sample taken due to low water volume in the well casing. Pump in well.*
SAMPLING DATA

Time Sampled: Approximate Depth to Water During Sampling: (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| MW9A | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: _____ (gallons) Disposal: SYSTEM

 Weather Conditions: *ok* BOLTS / N

 Condition of Well Box and Casing at Time of Sampling: *ok* CAP & LOCK / N

 Well Head Conditions Requiring Correction: *none* GROUT / N

 Problems Encountered During Purgung and Sampling: *low Water Volume* WELL BOX / N

 Comments: SECURED / N

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: MW

Date: 12-20-04

Project No: UP3399.1

Personnel: **GAUGING DATA**Water Level Measuring Method WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) | | | |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|---|------------------------|-----------------------------|------|------|-----|
| | 58.40 | 57.96 | .44 | 1 | 2 | 4 | 6 | 0.04 | 0.16 | 0.64 | 1.44 | .29 |

PURGING DATAPurge Method: WATERRA BAILER / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | | | | | | |
|-----------------------|----|-----|-----|--|--|--|--|--|--|--|--|
| Time | | | | | | | | | | | |
| Volume Purge (gal) | .5 | 1.0 | 1.5 | | | | | | | | |
| Temperature (°C) | | | | | | | | | | | |
| pH | | | | | | | | | | | |
| Specific Gravity (SG) | | | | | | | | | | | |
| Turbidity/Color | | | | | | | | | | | |
| Odom (Y/N) | | | | | | | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | | | | | |
| Dewatered (Y/N) | | | | | | | | | | | |

Comments/Observations:

No purge or sample due to low water column

SAMPLING DATATime Sampled: Approximate Depth to Water During Sampling: (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
|--------------------------|-------------------------|----------------|--------------|----------------------------|------------------|-------------------|
| <input type="checkbox"/> | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: (gallons)

Disposal:

SYSTEM

BOLTS / NCAP & LOCK / NGROUT / NWELL BOX / NSECURED / NWeather Conditions: Condition of Well Box and Casing at Time of Sampling: Well Head Conditions Requiring Correction: Problems Encountered During Puring and Sampling: Low water columnComments:

C:\Projects\73399\Public\QM Pre-Field Folder\purge form.xls\Sheet1

GROUNDWATER PURGE AND SAMPLE

Well No: MW11

Date: 12/20/04

Project Name: Exxon 7-3399

Project No: UP3399.1

Personnel: **GAUGING DATA**Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) | | | |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|---|------------------------|-----------------------------|------|------|-----|
| | 54.40 | 53.45 | .95 | 1 | 2 | 4 | 6 | 0.04 | 0.16 | 0.64 | 1.44 | .60 |

PURGING DATAPurge Method: WATERRA BAILEY SUB Purge Depth: Screen Purge Rate: (gpm)

| | | | | | | | | | | | | |
|----------------------------|-----|-----|------|--|--|--|--|--|--|--|--|--|
| Top | | | | | | | | | | | | |
| Volume Purge (gal) | .75 | 1.5 | 2.25 | | | | | | | | | |
| Temperature (°C) | | | | | | | | | | | | |
| Date | | | | | | | | | | | | |
| Screen Condition (0=0.000) | | | | | | | | | | | | |
| Turbidity/Color | | | | | | | | | | | | |
| Odor (Y/N) | | | | | | | | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | | | | | | |
| Dewatered (Y/N) | | | | | | | | | | | | |

Comments/Observations:

GRAB SAMPLE DUE TO LOW WATER COLUMN
& HISTORY OF WELL

SAMPLING DATATime Sampled: 7:30Approximate Depth to Water During Sampling: 54 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/Color | Analysis Method |
|---------------|-------------------------|----------------|--------------|----------------------------|-----------------|-------------------|
| MW11 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: (gallons)

Disposal: SYSTEM

Weather Conditions: BOLTS / NCondition of Well Box and Casing at Time of Sampling: CAP & LOCK / NWell Head Conditions Requiring Correction: NONEGROUT / NProblems Encountered During Puring and Sampling: NONEWELL BOX / N

Comments:

SECURED / N

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: MW12A Date: 12/20/04

Project No: UP3399.1

Personnel: C.M. Yche /

GAUGING DATA

Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------|--------------------|-----------------------|---------------------|--------------------------------|---------------------|--------------------------|
| | 128.50 | - 59.00 | = 69.50 | 1 2 4 6 0.04 0.16 0.64 1.44 | 11.12 | = 33.36 |

PURGING DATA

Purge Method: WATERRA/ BAILER / SUB Purge Depth: Screen Purge Rate: (gpm)

| | | | | | | |
|--------------------|--------|---------|--------|--|--|--|
| Time | 10:23 | 10:57 | 11:30 | | | |
| Volume Purge (gal) | 11 | 22 | 33 | | | |
| Temperature (°C) | 17.3°C | 18.1°C | 18.3°C | | | |
| pH | 7.47 | 7.53 | 7.42 | | | |
| Spec Cond (µmhos) | 107 µS | 1065 µS | 108 µS | | | |
| Turbidity/Color | Clear | Clear | Clear | | | |
| Color (Y/N) | N | N | N | | | |
| Casing Volumes | 1 | 2 | 3 | | | |
| Dewatered (Y/N) | N | N | N | | | |

Comments/Observations:

| SAMPLING DATA | | | | | | |
|---------------|----------------------|---|--------------|-------------------------|------------------|-------------------|
| Time Sampled: | | Approximate Depth to Water During Sampling: | | | | |
| Comments: | | | | | | |
| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
| MW12A | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 33 (gallons)

Disposal: SYSTEM

Weather Conditions:

BOLTS Y / N

Condition of Well Box and Casing at Time of Sampling:

CAP & LOCK Y / N

Well Head Conditions Requiring Correction:

GROUT Y / N

Problems Encountered During Puring and Sampling:

WELL BOX Y / N

Comments:

SECURED Y / N

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: MW13

Date: 12-20-04

Project No: UP3399.1

Personnel: **GAUGING DATA**Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|------------------------|-----------------------------|
| | 70.35 | 59.52 | 10.83 | 1 2 4 6 0.04 0.16 0.64 1.44 | 1.73 | 5.19 |

PURGING DATAPurge Method: WATERRA / BAILER / SUB

Purge Depth: Screen

Purge Rate: 1.0 (gpm)

| | | | | | | |
|--------------------|------------------|------------------|------------------|--|--|--|
| Time Sampled | 9:54 | 9:56 | 9:58 | | | |
| Volume Purge (gal) | 2 | 4 | 6 | | | |
| Temperature (°C) | 17.8 | 17.9 | 18.0 | | | |
| pH | 7.02 | 7.04 | 7.06 | | | |
| Spec Conductance | 2001 | 1995 | 1995 | | | |
| Turbidity/Color | slight /brown | slight /brown | slight /brown | | | |
| Odor (Y/N) | N | N | N | | | |
| Casing Volume | 1 | 2 | 3 | | | |
| Dewatered (Y/N) | N | N | N | | | |

Comments/Observations:

SAMPLING DATA

Time Sampled: 10:05

Approximate Depth to Water During Sampling: 60 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|-----------------|-------------------|
| MW13 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 6 (gallons)

Disposal: SYSTEM

BOLTS / NWeather Conditions: OKCAP & LOCK / NCondition of Well Box and Casing at Time of Sampling: OKGROUT / NWell Head Conditions Requiring Correction: NoneWELL BOX / NProblems Encountered During Purging and Sampling: NoneSECURED / N

Comments:

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: NW14

Date: 12/20/04

Project No: UP3399.1

Personnel: *[Signature]***GAUGING DATA**

Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|------|------|------|------------------------|-----------------------------|
| | | | | 1 | 2 | 4 | 6 | | |
| | 135.10 | 37.61 | 77.49 | X | 1 | 2 | 4 | 6 | 1231 = 3719 |
| | | | | | 0.04 | 0.16 | 0.64 | 1.44 | |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | | |
|---------------------|-------------|-------------|-------------|--|--|--|--|
| Time | 0919 | 0950 | 1021 | | | | |
| Volume Purge (gal) | 12 | 24 | 36 | | | | |
| Temperature (°C) | 15.7 | 15.4 | 15.4 | | | | |
| pH | 7.50 | 7.49 | 7.45 | | | | |
| Spec. Cond. (μmhos) | 1037 | 1041 | 1049 | | | | |
| Turbidity/Color | clear/clear | clear/clear | clear/clear | | | | |
| Odor (N/N) | N | N | N | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | |
| Dewatered (Y/N) | N | N | N | | | | |

Comments/Observations:

SAMPLING DATA

Time Sampled: 1030

Approximate Depth to Water During Sampling: 58 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| NW14 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 36 (gallons)

Disposal: SYSTEM

BOLTS (Y) / N

Weather Conditions: OK

CAP & LOCK (Y) / N

Condition of Well Box and Casing at Time of Sampling: OK

GROUT (Y) / N

Well Head Conditions Requiring Correction: N/A

WELL BOX (Y) / N

Problems Encountered During Puring and Sampling: NONE

SECURED (Y) / N

Comments:

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: ON1

Date: 12-26-04

Project No: UP3399.1

Personnel: AM**GAUGING DATA**Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|----------------------------------|--------------------|-----------------------|---------------------|--------------------------------|---------------------|--------------------------|
| | 11.55 | 10.66 | .89 | 1 2 4 6 0.04 0.16 0.64 1.44 | .56 | 1.70 |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB

Purge Depth: Screen

Purge Rate: — (gpm)

| | | | | | | |
|--------------------|------------|------------|-------------|--|--|--|
| Time | | | | | | |
| Volume Purge (gal) | <u>.75</u> | <u>1.5</u> | <u>2.25</u> | | | |
| Temperature (°C) | | | | | | |
| pH | | | | | | |
| Spec Conductance | | | | | | |
| Turbidity/Color | | | | | | |
| Odor (Y/N) | | | | | | |
| Casing Volumes | <u>1</u> | <u>2</u> | <u>3</u> | | | |
| Dewatered (Y/N) | | | | | | |

Comments/Observations:

WATER LEVEL DROPPED AFTER GAUGING
NO PURGE OR SAMPLE DUE TO LOW WATER
COLUMN.

SAMPLING DATATime Sampled: —Approximate Depth to Water During Sampling: — (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| <u>ON1</u> | <u>8</u> | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: — (gallons)

Disposal: SYSTEM

BOLTS / NWeather Conditions: OKCAP & LOCK / NCondition of Well Box and Casing at Time of Sampling: OKGROUT / NWell Head Conditions Requiring Correction: NONEWELL BOX / NProblems Encountered During Purgung and Sampling: LOW WATER COLUMNSECURED / N

Comments:

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: OW2

Date: 12/20/04

Project No: UP3399.1

Personnel: C. M. + C. G.

GAUGING DATA

Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|------------------------|-----------------------------|
| | 12.15 | 10.50 | 1.65 | 1 2 4 6 0.04 0.16 0.64 1.44 | 1.05 | 3.16 |

PURGING DATA

Purge Method: WATERRA / BAILEY / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | |
|----------------------|---------|---------|---------|--|--|--|
| Time: | 13:15 | 13:19 | 13:24 | | | |
| Volume Purge (gal) | 1 | 2 | 3 | | | |
| Temperature (°C) | 18.1°C | 18.4°C | 18.4°C | | | |
| pH | 7.03 | 6.94 | 6.88 | | | |
| Spec Conduct (µmhos) | 654.95 | 649.09 | 648.15 | | | |
| Turbidity/Color | S. 1 Fy | S. 1 Fy | S. 1 Fy | | | |
| Odom (Y/N) | N | N | N | | | |
| Casing Volumes | 1 | 2 | 3 | | | |
| De-watered (Y/N) | N | N | N | | | |

Comments/Observations:

SAMPLING DATA

Time Sampled: 13:30

Approximate Depth to Water During Sampling:

11 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| OW2 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 3 (gallons)

Disposal: SYSTEM

Weather Conditions:

Condition of Well Box and Casing at Time of Sampling:

Well Head Conditions Requiring Correction:

Problems Encountered During Puring and Sampling:

Comments:

MISSING
STUFF
BOLTS
CAP & LOCK
GROUT
WELL BOX
SECUREDN
N
N
N
N
N

GROUNDWATER PURGE AND SAMPLE

Well No: VR1

Date: 12/20/04

Project Name: Exxon 7-3399

Project No: UP3399.1

Personnel: C.M. tchep /

GAUGING DATA

Water Level Measuring Method: WLM IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------|--------------------|-----------------------|---------------------|--------------------------------|---|---|---------------------|--------------------------|
| | 28.00 | 26.73 | 1.27 | 1 | 2 | 4 | 6 | 0.04 0.16 0.64 1.44 |
| | | | | | | | .81 | 2.43 |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | | |
|---------------------|---------|---------|---------|--|--|--|--|
| Time | 12:07 | 12:08 | 12:09 | | | | |
| Volume Purge (gal) | 1 | 2 | 3 | | | | |
| Temperature (C) | 20.3°C | 20.5°C | 20.4°C | | | | |
| pH | 7.15 | 6.75 | 6.69 | | | | |
| Spec. Cond. (micro) | 722.1μS | 702.4μS | 720.7μS | | | | |
| Turbidity/Color | S. T/ | S. T/ | S. T/ | | | | |
| Odor (Y/N) | N/Y | N/Y | N/Y | | | | |
| Casing Volumes: | 1 | 2 | 3 | | | | |
| Dewatered (Y/N) | N | N | N | | | | |

Comments/Observations:

Dewatered while Sampling

SAMPLING DATA

Time Sampled: 12:15

Approximate Depth to Water During Sampling: 27 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|-----------------|-------------------|
| VR1 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 3 (gallons)

Disposal:

SYSTEM

Weather Conditions:

BOLTS

/ N

Condition of Well Box and Casing at Time of Sampling:

CAP & LOCK

/ N

Well Head Conditions Requiring Correction:

GROUT

/ N

Problems Encountered During Purgung and Sampling:

WELL BOX

/ N

Comments:

SECURED

/ N

GROUNDWATER PURGE AND SAMPLE
Well No: **VZ**Date: **12-2-04**Project Name: **Exxon 7-3399**Project No: **UP3399.1**Personnel: **(✓)**
GAUGING DATA
Water Level Measuring Method: **WLM** / **IP**Measuring Point Description: **TOC**

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | Casing Volume (gal) | Total Purge Volume (gal) |
|--------------------------------------|--------------------|-----------------------|---------------------|--------------------------------|------|------|---------------------|--------------------------|
| | 43.30 | 24 | — | 1 | 2 | 4 | 6 | — |
| | | | | 0.04 | 0.16 | 0.64 | 1.44 | |

PURGING DATA
Purge Method: **WATERRA / BAILER / SUB**Purge Depth: **Screen**Purge Rate: **(gpm)**

| | | | | | | | |
|---------------------|---|---|---|--|--|--|--|
| Time | | | | | | | |
| Volume Purged (gal) | | | | | | | |
| Temperature (°C) | | | | | | | |
| pH | | | | | | | |
| Spec. Cond. (micro) | | | | | | | |
| Turbidity/Color | | | | | | | |
| Odor (TNT) | | | | | | | |
| Casing volumes | 1 | 2 | 3 | | | | |
| Dewatered (Y/N) | | | | | | | |

Comments/Observations:

WELL IS DRY
SAMPLING DATA
Time Sampled: **—**Approximate Depth to Water During Sampling: **— (feet)**

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|-----------------|-------------------|
| — | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: **—** (gallons)Disposal: **SYSTEM**BOLTS **(Y) / N**Weather Conditions: **OK**CAP & LOCK **(Y) / N**Condition of Well Box and Casing at Time of Sampling: **OK**GROUT **(Y) / N**Well Head Conditions Requiring Correction: **NONE**WELL BOX **(Y) / N**Problems Encountered During Purgung and Sampling: **dry well**SECURED **(Y) / N**

Comments:

GROUNDWATER PURGE AND SAMPLE

Well No: PW1

Date: 12.26.04

Project Name: Exxon 7-3399

Project No: UP3399.1

Personnel: (initials)

GAUGING DATAWater Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|------------------------|-----------------------------|
| | 15.62 | dry | — | x 1 2 4 6 0.04 0.16 0.64 1.44 | — | — |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB

Purge Depth: Screen

Purge Rate: — (gpm)

| | | | | | | | |
|--------------------|---------|---|---|---|---|---|---|
| Date | 1/26/04 | 1 | 2 | 3 | 4 | 5 | 6 |
| Volume Purge (gal) | | | | | | | |
| Temperature (C) | | | | | | | |
| pH | | | | | | | |
| Specific Gravity | | | | | | | |
| Turbidity/Color | | | | | | | |
| Odor (N/A) | | | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | |
| Dewatered (Y/N) | | | | | | | |

Comments/Observations:

WELL IS DRY

SAMPLING DATA

Time Sampled: —

Approximate Depth to Water During Sampling: — (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/ Color | Analysis Method |
|---------------|-------------------------|----------------|--------------|----------------------------|------------------|-------------------|
| — | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: — (gallons)

Disposal: SYSTEM

Weather Conditions: dry

BOLTS / N

Condition of Well Box and Casing at Time of Sampling: dry

CAP & LOCK / N

Well Head Conditions Requiring Correction: None

GROUT / N

Problems Encountered During Purgung and Sampling: dry well

WELL BOX / N

Comments:

SECURED / N

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: PMW2

Date: 12/20/04

Project No: UP3399.1

Personnel: C. Mitchell

GAUGING DATA

Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|----------------------------------|--------------------|-----------------------|---------------------|----------------------------------|---------------------|--------------------------|
| | 15.55 | 14.93 | .62 | X 1 2 4 6 0.04 0.16 0.64 1.44 | 1.39 | 1.19 |

PURGING DATA

Purge Method: WATERRA BAILER / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | |
|----------------------|----|---|-----|--|--|--|
| Time (hrs) | | | | | | |
| Volumes Purge (gal) | .5 | 1 | 1.5 | | | |
| Temperature (°C) | | | | | | |
| pH | | | | | | |
| Spec Conduct (µmhos) | | | | | | |
| Turbidity/Color | | | | | | |
| Odor (Y/N) | | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | |
| Dewatered (Y/N) | Y | | | | | |

Comments/Observations:

Dewatered at less than a ~~half~~ half
 gallon Well would not recharge
 No sample for C-1.

SAMPLING DATA

Time Sampled: _____

Approximate Depth to Water During Sampling: _____ (feet)

Comments: _____

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|-----------------|-------------------|
| 1 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: .5 (gallons)

Disposal: _____

SYSTEM

BOLTS

stripped

Weather Conditions: OK

Y / N

Condition of Well Box and Casing at Time of Sampling: Bolt stripped

CAP & LOCK

Y / N

Well Head Conditions Requiring Correction: GROUT

Y / N

Problems Encountered During Purgung and Sampling: Dewatered

WELL BOX

Y / N

Comments: SECURED

SECURED

Y / N

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: PMW3

Date: 12/20/04

Project No: UP3399.1

Personnel: TS

GAUGING DATA
Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|------------------------|-----------------------------|
| | 15.90 | 10.61 | 5.29 | X 1 2 4 6 0.04 0.16 0.64 1.44 | 3.39 | 10.16 |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | |
|--------------------|-------------|---|---|--|--|--|
| Time | 1051 | | | | | |
| Volume Purge (gal) | 3 | 6 | 9 | | | |
| Temperature (°C) | 18.4 | | | | | |
| pH | 7.38 | | | | | |
| Spec Conductance | 939.5 | | | | | |
| Turbidity/Color | clear/clear | | | | | |
| Odor (MN) | N | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | |
| Dewatered (MN) | N | | | | | |

Comments/Observations: Dewatered at 5 Gallons

Recharged and Sampled

SAMPLING DATA

Time Sampled: 1105

Approximate Depth to Water During Sampling:

11

(feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/Color | Analysis Method |
|---------------|-------------------------|----------------|--------------|----------------------------|-----------------|-------------------|
| PMW3 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 9 (gallons)

Disposal: SYSTEM

Weather Conditions: CK

BOLTS / N

Condition of Well Box and Casing at Time of Sampling: CK

CAP & LOCK / N

Well Head Conditions Requiring Correction: NA

GROUT / N

Problems Encountered During Purgung and Sampling: None

WELL BOX / N

Comments:

SECURED / N

GROUNDWATER PURGE AND SAMPLE

Project Name: Exxon 7-3399

Well No: PMW4

Date: 12-20-04

Project No: UP3399.1

Personnel: **GAUGING DATA**Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | | | | Casing Volume (gal) | Total Purge Volume (gal) | | | |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|---|---|---|------------------------|-----------------------------|------|------|------|
| | 15.85 | 13.52 | 2.33 | X 1 | 2 | 4 | 6 | 0.04 | 0.16 | 0.64 | 1.44 | 1.49 |

PURGING DATAPurge Method: WATERRA BAILER / SUB

Purge Depth: Screen

Purge Rate: .50 (gpm)

| | | | | | | | |
|--------------------|-------------|-------------|---|--|--|--|--|
| Time (11:33) | 11:33 | 11:35 | | | | | |
| Volume Purge (gal) | 1 | 2 | 3 | | | | |
| Temperature (°F) | 70.6 | 71.3 | | | | | |
| pH | 7.12 | 7.12 | | | | | |
| Spec. Gravity (SG) | 1.042 | 1.051 | | | | | |
| Turbidity/Color | clear/clear | clear/clear | | | | | |
| Dow/DYN | N | N | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | | |
| De-watered (Y/N) | Y | Y | Y | | | | |

Comments/Observations:

Well de-watered @ 2.25 gallons recovered & vented

SAMPLING DATA

Time Sampled: 11:45

Approximate Depth to Water During Sampling: 14 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (mL or L) | Turbidity/Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|-----------------|-------------------|
| PMW4 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: 2.25 (gallons)

Disposal: SYSTEM

BOLTS / NCAP & LOCK Y / NGROUT Y / NWELL BOX Y / NSECURED Y / NWeather Conditions: Condition of Well Box and Casing at Time of Sampling: Well Head Conditions Requiring Correction: Problems Encountered During Purgung and Sampling:

Comments:

GROUNDWATER PURGE AND SAMPLE

Well No: PMW 5

Date: 12/20/4

Project Name: Exxon 7-3399

Project No: UP3399.1

Personnel: TJ

GAUGING DATA

Water Level Measuring Method: WLM / IP

Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multiplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|-----------------------------------|------------------------|-----------------------------|
| | 14.60 | 13.89 | 0.71 | 1 2 4 6 0.04 0.16 0.64 1.44 | 0.45 | 1.36 |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB

Purge Depth: Screen

Purge Rate: (gpm)

| | | | | | | |
|--------------------|---|---|---|--|--|--|
| Time | | | | | | |
| Volume Purge (gal) | | | | | | |
| Temperature (°C) | | | | | | |
| pH | | | | | | |
| Specific Gravity | | | | | | |
| Turbidity/Color | | | | | | |
| Odor (Y/N) | | | | | | |
| Casing Volumes | 1 | 2 | 3 | | | |
| Dewatered (Y/N) | | | | | | |

Comments/Observations:

GRAB SAMPLED w/ BAILER DUE TO

LOW CASING VOLUME

SAMPLING DATA

Time Sampled: 1210

Approximate Depth to Water During Sampling: 14 (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| PMW5 | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: (gallons)

Disposal: SYSTEM

Weather Conditions: OK

BOLTS Y / N

Condition of Well Box and Casing at Time of Sampling: OK

CAP & LOCK Y / N

Well Head Conditions Requiring Correction: NA

GROUT Y / N

Problems Encountered During Purgung and Sampling: None

WELL BOX Y / N

Comments:

SECURED Y / N

GROUNDWATER PURGE AND SAMPLE

| | | | | | | | | |
|---------------|--------------|--|------------|-------------------------------------|--|-------|----------|--|
| Project Name: | Exxon 7-3399 | | Well No: | PMW6 | | Date: | 12.20.04 | |
| Project No: | UP3399.1 | | Personnel: | <input checked="" type="checkbox"/> | | | | |

GAUGING DATA

Water Level Measuring Method: WLM / IP Measuring Point Description: TOC

| WELL PURGE VOLUME CALCULATION | Total Depth (feet) | Depth to Water (feet) | Water Column (feet) | Multipplier for Casing Diameter | Casing Volume (gal) | Total Purge Volume (gal) |
|-------------------------------------|-----------------------|--------------------------|------------------------|------------------------------------|------------------------|-----------------------------|
| | 15.82 | 15.56 | .26 | Y 1 2 4 6 0.04 0.16 0.64 1.44 | .16 | .49 |

PURGING DATA

Purge Method: WATERRA / BAILER / SUB Purge Depth: Screen Purge Rate: (gpm)

| | | | | | | |
|---------------------|-----|-----|-----|--|--|--|
| Name | | | | | | |
| Volume Purge (gal) | .25 | .50 | .75 | | | |
| Temperature (°C) | | | | | | |
| pH | | | | | | |
| Spec. Cond. (micro) | | | | | | |
| Turbidity/Color | | | | | | |
| Color (Y/N) | | | | | | |
| Casing Volume | 1 | 2 | 3 | | | |
| Dewatered (Y/N) | | | | | | |

Comments/Observations:

NO PURGE OR SAMPLE DUE TO LOW WATER
COLUMN

SAMPLING DATA

Time Sampled: → Approximate Depth to Water During Sampling: → (feet)

Comments:

| Sample Number | Number of Containers | Container Type | Preservative | Volume Filled (ml or L) | Turbidity/ Color | Analysis Method |
|---------------|----------------------|----------------|--------------|-------------------------|------------------|-------------------|
| → | 6 | Voa | HCL | 40 ml | | TPH-g, BTEX, MTBE |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Total Purge Volume: → (gallons) Disposal: SYSTEM

Weather Conditions: BOLTS / N

Condition of Well Box and Casing at Time of Sampling: CAP & LOCK / N

Well Head Conditions Requiring Correction: GROUT / N

Problems Encountered During Puring and Sampling: WELL BOX / N

Comments: SECURED / N

Appendix C

Laboratory Analytical Reports

12/30/04

RECEIVED

JAN 18 2005

ETIC ENGINEERING

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

This report includes the analytical certificates of analysis for all samples listed below. These samples relate to your project identified below:

Project Name: EXXONMOBIL 7-3399
Project Number: .
Laboratory Project Number: 401117.

An executed copy of the chain of custody, the project quality control data, and the sample receipt form are also included as an addendum to this report. Any QC recoveries outside laboratory control limits are flagged individually with an #. Sample specific comments and quality control statements are included in the Laboratory notes section of the analytical report for each sample report. If you have any questions relating to this analytical report, please contact your Laboratory Project Manager at 1-800-765-0980. Any opinions, if expressed, are outside the scope of the Laboratory's accreditation.

Page 1

| Sample Identification | Lab Number | Collection Date |
|-----------------------|------------|-----------------|
| MW1 | 04-A199756 | 12/20/04 |
| MW4 | 04-A199757 | 12/20/04 |
| MW5D | 04-A199758 | 12/20/04 |
| MW5S | 04-A199759 | 12/20/04 |
| MW7 | 04-A199760 | 12/20/04 |
| MW8 | 04-A199761 | 12/20/04 |
| MW11 | 04-A199762 | 12/20/04 |
| MW12A | 04-A199763 | 12/20/04 |
| MW13 | 04-A199764 | 12/20/04 |
| MW14 | 04-A199765 | 12/20/04 |
| OW2 | 04-A199766 | 12/20/04 |
| VR1 | 04-A199767 | 12/20/04 |
| PMW3 | 04-A199768 | 12/20/04 |
| PMW4 | 04-A199769 | 12/20/04 |
| PMW5 | 04-A199770 | 12/20/04 |

TestAmerica

ANALYTICAL TESTING CORPORATION

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

Sample Identification


Lab Number

Page 2
Collection Date

These results relate only to the items tested.

This report shall not be reproduced except in full and with
permission of the laboratory.

Report Approved By:

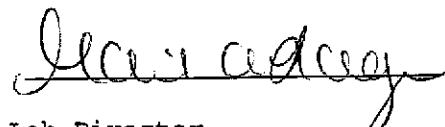

Report Date: 12/29/04

Johnny A. Mitchell, Lab Director

Michael H. Dunn, M.S., Technical Director

Pamela A. Langford, Technical Services

Eric S. Smith, QA/QC Director

Sandra McMillin, Technical Services

Gail A. Lage, Technical Services

Glenn L. Norton, Technical Services

Kelly S. Comstock, Technical Services

Roxanne L. Connor, Technical Services

Laboratory Certification Number: 01168CA

This material is intended only for the use of the individual(s) or entity to whom it is addressed,
and may contain information that is privileged and confidential. If you are not the intended recipient,
or the employee or agent responsible for delivering this material to the intended recipient, you are
hereby notified that any dissemination, distribution, or copying of this material is strictly prohibited.
If you have received this material in error, please notify us immediately at 615-726-0177.

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

ETIC ENGINEERING 10236
 BRYAN CAMPBELL
 2285 MORELLO AVENUE
 PLEASANT HILL, CA 94523

Lab Number: 04-A199756
 Sample ID: MW1
 Sample Type: Water
 Site ID: 7-3399

Project:
 Project Name: EXXONMOBIL 7-3399
 Sampler: WYNN PACULEA

Date Collected: 12/20/04
 Time Collected: 11:10
 Date Received: 12/22/04
 Time Received: 9:03
 Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|---------|--------|-------|--------------|------------|---------------|---------------|---------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |

ORGANIC PARAMETERS

| | | | | | | | | | |
|------------------------|----|------|------|-----|----------|------|----------|-------|------|
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 0:37 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 0:37 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 0:37 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 0:37 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 0:37 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 0:37 | I. Ahmed | 8015B | 6141 |

VOLATILE ORGANICS

| | | | | | | | | | |
|---------|----|------|------|-----|----------|-------|------------|-------|------|
| Ethanol | ND | ug/L | 100. | 1.0 | 12/27/04 | 13:02 | T McCollum | 8260B | 9527 |
|---------|----|------|------|-----|----------|-------|------------|-------|------|

Surrogate % Recovery Target Range

| | | |
|---------------------------|------|------------|
| BTEX/GRO Surr., a,a,a-TFT | 90. | 69. - 132. |
| VOA Surr 1,2-DCA-d4 | 92. | 73. - 127. |
| VOA Surr Toluene-d8 | 96. | 79. - 113. |
| VOA Surr, 4-BFE | 106. | 79. - 125. |
| VOA Surr, DBFM | 88. | 75. - 134. |

Sample report continued . . .

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

Laboratory Number: 04-A199756
Sample ID: MW1
Project:
Page 2

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199757
Sample ID: MW4
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 11:40
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|---------------|---------------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 0:52 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 0:52 | I. Ahmed | 8021B | 6141 |
| **Toluene | 0.5 | ug/l | 0.5 | 1.0 | 12/25/04 | 0:52 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 0:52 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 0:52 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 0:52 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| ----- | ----- | ----- |
| BTEX/GRO Surr., a,a,a-TFT | 86. | 69. - 132. |

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199758
Sample ID: MW5D
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 9:35
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Date | Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|----------|-------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 1:06 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:06 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:06 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:06 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:06 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 1:06 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| ----- | ----- | ----- |
| BTEX/GRO Surr., a,a,a-TFT | 90. | 69. - 132. |

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

ETIC ENGINEERING 10236
 BRYAN CAMPBELL
 2285 MORELLO AVENUE
 PLEASANT HILL, CA 94523

Lab Number: 04-A199759
 Sample ID: MW5S
 Sample Type: Water
 Site ID: 7-3399

Project:
 Project Name: EXXONMOBIL 7-3399
 Sampler: WYNN PACULEA

Date Collected: 12/20/04
 Time Collected: 8:45
 Date Received: 12/22/04
 Time Received: 9:03
 Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|-----------------------------|--------|-------|--------------|------------|---------------|---------------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 1:21 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:21 | I. Ahmed | 8021B | 6141 |
| **Toluene | 0.8 | ug/l | 0.5 | 1.0 | 12/25/04 | 1:21 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | 1.0 | ug/l | 0.5 | 1.0 | 12/25/04 | 1:21 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:21 | I. Ahmed | 8021B | 6141 |
| ***TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 1:21 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|-----------|------------|--------------|
| ----- | ----- | ----- |

BTEX/GRO Surr., a,a,a-TFT 81. 69. - 132.

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199760
Sample ID: MW7
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 8:10
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|----------|---------------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 1:36 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:36 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:36 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:36 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:36 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 1:36 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| ----- | ----- | ----- |
| BTEX/GRO Surr., a,a,a-TFT | 90. | 69. - 132. |

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199761
Sample ID: MW8
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 15:35
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|---------------|---------------|------------|--------|-------|
| <hr/> | | | | | | | | | |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 1:51 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:51 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:51 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:51 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 1:51 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 1:51 | I. Ahmed | 8015B | 6141 |
| <hr/> | | | | | | | | | |
| *VOLATILE ORGANICS* | | | | | | | | | |
| Ethanol | ND | ug/L | 100. | 1.0 | 12/27/04 | 13:39 | T McCollum | 8260B | 9527 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| BTEX/GRO Surr., a,a,a-TFT | 85. | 69. - 132. |
| VOA Surr 1,2-DCA-d4 | 92. | 73. - 127. |
| VOA Surr Toluene-d8 | 96. | 79. - 113. |
| VOA Surr, 4-BFE | 106. | 79. - 125. |
| VOA Surr, DBFM | 87. | 75. - 134. |

Sample report continued . . .

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204
800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

Laboratory Number: 04-A199761
Sample ID: MW8
Project:
Page 2

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
= Recovery outside Laboratory historical or method prescribed limits.
** = NELAC E87358 Certified Analyte

End of Sample Report.

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

ETIC ENGINEERING 10236
 BRYAN CAMPBELL
 2285 MORELLO AVENUE
 PLEASANT HILL, CA 94523

Lab Number: 04-A199762
 Sample ID: MW11
 Sample Type: Water
 Site ID: 7-3399

Project:
 Project Name: EXXONMOBIL 7-3399
 Sampler: WYNN PACULEA

Date Collected: 12/20/04
 Time Collected: 7:30
 Date Received: 12/22/04
 Time Received: 9:03
 Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|-----------------------------|--------|-------|--------------|------------|---------------|---------------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 2:05 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:05 | I. Ahmed | 8021B | 6141 |
| **Toluene | 3.6 | ug/l | 0.5 | 1.0 | 12/25/04 | 2:05 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | 1.2 | ug/l | 0.5 | 1.0 | 12/25/04 | 2:05 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:05 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 2:05 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| ----- | ----- | ----- |
| BTEX/GRO Surr., a,a,a-TFT | 90. | 69. - 132. |

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199763
Sample ID: MW12A
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 11:35
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|----------|---------------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 2:20 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:20 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:20 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:20 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:20 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 2:20 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| ----- | ----- | ----- |
| BTEX/GRO Surr., a,a,a-TFT | 83. | 69. - 132. |

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199764
Sample ID: MW13
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 10:05
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|----------|---------------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 2:35 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:35 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:35 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:35 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:35 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 2:35 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|-----------|------------|--------------|
| ----- | ----- | ----- |

BTEX/GRO Surr., a,a,a-TFT 90. 69. - 132.

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

TestAmerica

ANALYTICAL TESTING CORPORATION

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204
800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199765
Sample ID: MW14
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 10:30
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|----------|---------------|----------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 2:50 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:50 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:50 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:50 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 2:50 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 2:50 | I. Ahmed | 8015B | 6141 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| ----- | ----- | ----- |
| BTEX/GRO Surr., a,a,a-TFT | 80. | 69. - 132. |

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
 BRYAN CAMPBELL
 2285 MORELLO AVENUE
 PLEASANT HILL, CA 94523

Lab Number: 04-A199766
 Sample ID: OW2
 Sample Type: Water
 Site ID: 7-3399

Project:
 Project Name: EXXONMOBIL 7-3399
 Sampler: WYNN PACULEA

Date Collected: 12/20/04
 Time Collected: 13:30
 Date Received: 12/22/04
 Time Received: 9:03
 Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|---------------|---------------|------------|--------|-------|
| <hr/> | | | | | | | | | |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 3:04 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:04 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:04 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:04 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:04 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 3:04 | I. Ahmed | 8015B | 6141 |
| <hr/> | | | | | | | | | |
| *VOLATILE ORGANICS* | | | | | | | | | |
| Ethanol | ND | ug/L | 100. | 1.0 | 12/27/04 | 14:12 | T McCollum | 8260B | 9527 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| BTEX/GRO Surr., a,a,a-TFT | 93. | 69. - 132. |
| VOA Surr 1,2-DCA-d4 | 93. | 73. - 127. |
| VOA Surr Toluene-d8 | 97. | 79. - 113. |
| VOA Surr, 4-BFB | 101. | 79. - 125. |
| VOA Surr, DBFM | 89. | 75. - 134. |

Sample report continued . . .

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204
800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

Laboratory Number: 04-A199766
Sample ID: OW2
Project:
Page 2

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
= Recovery outside Laboratory historical or method prescribed limits.
** = NELAC E87358 Certified Analyte

End of Sample Report.

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204
800-765-0980 • 615-726-3404 FAX

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199767
Sample ID: VR1
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 12:15
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|---------------|---------------|------------|--------|-------|
| <hr/> | | | | | | | | | |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 3:19 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | 1.4 | ug/l | 0.5 | 1.0 | 12/25/04 | 3:19 | I. Ahmed | 8021B | 6141 |
| **Toluene | 0.5 | ug/l | 0.5 | 1.0 | 12/25/04 | 3:19 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | 14.1 | ug/l | 0.5 | 1.0 | 12/25/04 | 3:19 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | 5.6 | ug/l | 0.5 | 1.0 | 12/25/04 | 3:19 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | 93.3 | ug/l | 50.0 | 1.0 | 12/25/04 | 3:19 | I. Ahmed | 8015B | 6141 |
| <hr/> | | | | | | | | | |
| *VOLATILE ORGANICS* | | | | | | | | | |
| **Methyl-t-butyl ether | 6.60 | ug/l | 0.50 | 1.0 | 12/27/04 | 14:45 | T McCollum | 8260B | 9527 |
| Ethanol | ND | ug/L | 100. | 1.0 | 12/27/04 | 14:45 | T McCollum | 8260B | 9527 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| BTEX/GRO Surr., a,a,a-TFT | 81. | 69. - 132. |
| VOA Surr 1,2-DCA-d4 | 94. | 73. - 127. |
| VOA Surr Toluene-d8 | 95. | 79. - 113. |
| VOA Surr, 4-BFB | 101. | 79. - 125. |
| VOA Surr, DBFM | 88. | 75. - 134. |

Sample report continued . . .

ANALYTICAL REPORT

Laboratory Number: 04-A199767
Sample ID: VR1
Project:
Page 2

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199768
Sample ID: PMW3
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 11:05
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|---------------|---------------|------------|--------|-------|
| <hr/> | | | | | | | | | |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/25/04 | 3:34 | I. Ahmed | 8021B | 6141 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:34 | I. Ahmed | 8021B | 6141 |
| **Toluene | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:34 | I. Ahmed | 8021B | 6141 |
| **Xylenes (Total) | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:34 | I. Ahmed | 8021B | 6141 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/25/04 | 3:34 | I. Ahmed | 8021B | 6141 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/25/04 | 3:34 | I. Ahmed | 8015B | 6141 |
| <hr/> | | | | | | | | | |
| *VOLATILE ORGANICS* | | | | | | | | | |
| Ethanol | ND | ug/L | 100. | 1.0 | 12/27/04 | 15:18 | T McCollum | 8260B | 9527 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| BTEX/GRO Surr., a,a,a-TFT | 90. | 69. - 132. |
| VOA Surr 1,2-DCA-d4 | 96. | 73. - 127. |
| VOA Surr Toluene-d8 | 95. | 79. - 113. |
| VOA Surr, 4-BFB | 102. | 79. - 125. |
| VOA Surr, DBFM | 88. | 75. - 134. |

Sample report continued . . .

ANALYTICAL REPORT

Laboratory Number: 04-A199768
Sample ID: PMW3
Project:
Page 2

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
= Recovery outside Laboratory historical or method prescribed limits.
** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199769
Sample ID: PMW4
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 11:45
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|---------------|---------------|---------|--------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/28/04 | 2:42 | F.Gundi | 8021B | 6156 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/28/04 | 2:42 | F.Gundi | 8021B | 6156 |
| **Toluene | 0.7 | ug/l | 0.5 | 1.0 | 12/28/04 | 2:42 | F.Gundi | 8021B | 6156 |
| **Xylenes (Total) | 0.7 | ug/l | 0.5 | 1.0 | 12/28/04 | 2:42 | F.Gundi | 8021B | 6156 |
| **Methyl-t-butylether | ND | ug/l | 0.5 | 1.0 | 12/28/04 | 2:42 | F.Gundi | 8021B | 6156 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/28/04 | 2:42 | F.Gundi | 8015B | 6156 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| ----- | ----- | ----- |
| BTEX/GRO Surr., a,a,a-TFT | 85. | 69. - 132. |

LABORATORY COMMENTS:

ND = Not detected at the report limit.

B = Analyte was detected in the method blank.

J = Estimated Value below Report Limit.

E = Estimated Value above the calibration limit of the instrument.

= Recovery outside Laboratory historical or method prescribed limits.

** = NELAC E87358 Certified Analyte

End of Sample Report.

ANALYTICAL REPORT

ETIC ENGINEERING 10236
BRYAN CAMPBELL
2285 MORELLO AVENUE
PLEASANT HILL, CA 94523

Lab Number: 04-A199770
Sample ID: PMW5
Sample Type: Water
Site ID: 7-3399

Project:
Project Name: EXXONMOBIL 7-3399
Sampler: WYNN PACULEA

Date Collected: 12/20/04
Time Collected: 12:10
Date Received: 12/22/04
Time Received: 9:03
Page: 1

| Analyte | Result | Units | Report Limit | Dil Factor | Analysis Date | Analysis Time | Analyst | Method | Batch |
|------------------------|--------|-------|--------------|------------|---------------|---------------|------------|--------|-------|
| <hr/> | | | | | | | | | |
| *ORGANIC PARAMETERS* | | | | | | | | | |
| **Benzene | ND | ug/l | 0.50 | 1.0 | 12/28/04 | 3:12 | F.Gundi | 8021B | 6156 |
| **Ethylbenzene | ND | ug/l | 0.5 | 1.0 | 12/28/04 | 3:12 | F.Gundi | 8021B | 6156 |
| **Toluene | 1.1 | ug/l | 0.5 | 1.0 | 12/28/04 | 3:12 | F.Gundi | 8021B | 6156 |
| **Xylenes (Total) | 1.4 | ug/l | 0.5 | 1.0 | 12/28/04 | 3:12 | F.Gundi | 8021B | 6156 |
| **Methyl-t-butylether | 1.2 | ug/l | 0.5 | 1.0 | 12/28/04 | 3:12 | F.Gundi | 8021B | 6156 |
| **TPH (Gasoline Range) | ND | ug/l | 50.0 | 1.0 | 12/28/04 | 3:12 | F.Gundi | 8015B | 6156 |
| <hr/> | | | | | | | | | |
| *VOLATILE ORGANICS* | | | | | | | | | |
| **Methyl-t-butyl ether | 1.47 | ug/l | 0.50 | 1.0 | 12/27/04 | 15:51 | T McCollum | 8260B | 9527 |
| Ethanol | ND | ug/L | 100. | 1.0 | 12/27/04 | 15:51 | T McCollum | 8260B | 9527 |

| Surrogate | % Recovery | Target Range |
|---------------------------|------------|--------------|
| BTEX/GRO Surr., a,a,a-TFT | 85. | 69. - 132. |
| VOA Surr 1,2-DCA-d4 | 96. | 73. - 127. |
| VOA Surr Toluene-d8 | 95. | 79. - 113. |
| VOA Surr, 4-BFB | 101. | 79. - 125. |
| VOA Surr, DBFM | 88. | 75. - 134. |

Sample report continued . . .

ANALYTICAL REPORT

Laboratory Number: 04-A199770
Sample ID: PMW5
Project:
Page 2

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
= Recovery outside Laboratory historical or method prescribed limits.
** = NELAC E87358 Certified Analyte

End of Sample Report.

PROJECT QUALITY CONTROL DATA

Project Number:

Project Name: EXXONMOBIL 7-3399

Page: 1

Laboratory Receipt Date: 12/22/04

Matrix Spike Recovery

Note: If Blank is referenced as the sample spiked, insufficient volume was received for the defined analytical batch for MS/MSD analysis on an true sample matrix. Laboratory reagent water was used for QC purposes.

| Analyte | units | Orig. Val. | MS Val | Spike Conc | Recovery | Target Range | Q.C. | Batch | Sample |
|---------|-------|------------|--------|------------|----------|--------------|-------|-------|--------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |

UST ANALYSIS

| | | | | | | | | |
|---------------------------|------------|-----------|--------|--------|-----|------------|------|------------|
| Benzene | mg/l | < 0.00050 | 0.0483 | 0.0500 | 97 | 50. - 160. | 6141 | 04-A199638 |
| Benzene | mg/l | 0.00520 | 0.0517 | 0.0500 | 93 | 50. - 160. | 6156 | '198952 |
| Toluene | mg/l | < 0.0005 | 0.0480 | 0.0500 | 96 | 51. - 157. | 6141 | 04-A199638 |
| Toluene | mg/l | 0.0409 | 0.0829 | 0.0500 | 84 | 51. - 157. | 6156 | '198952 |
| Ethylbenzene | mg/l | < 0.0005 | 0.0483 | 0.0500 | 97 | 47. - 159. | 6141 | 04-A199638 |
| Ethylbenzene | mg/l | 0.0035 | 0.0493 | 0.0500 | 92 | 47. - 159. | 6156 | '198952 |
| Xylenes (Total) | mg/l | < 0.0005 | 0.0934 | 0.100 | 93 | 51. - 152. | 6156 | '198952 |
| Xylenes (Total) | mg/l | 0.0541 | 0.140 | 0.100 | 86 | 51. - 152. | 6141 | 04-A199638 |
| Methyl-t-butylether | mg/l | 0.116 | 0.158 | 0.0500 | 84 | 36. - 159. | 6141 | 04-A199638 |
| Methyl-t-butylether | mg/l | < 0.0005 | 0.0409 | 0.0500 | 82 | 36. - 159. | 6156 | '198952 |
| TPH (Gasoline Range) | mg/l | 0.108 | 0.978 | 1.00 | 87 | 43. - 150. | 6141 | 04-A199638 |
| TPH (Gasoline Range) | mg/l | 0.255 | 0.976 | 1.00 | 72 | 43. - 150. | 6156 | '198952 |
| BTEX/GRO Surr., a,a,a-TFT | % Recovery | | | | 83 | 69 - 132 | 6141 | |
| BTEX/GRO Surr., a,a,a-TFT | % Recovery | | | | 95 | 69 - 132 | 6156 | |
| VOA Surr 1,2-DCA-d4 | % Rec | | | | 94 | 73 - 127 | 9527 | |
| VOA Surr Toluene-d8 | % Rec | | | | 95 | 79 - 113 | 9527 | |
| VOA Surr, 4-BFB | % Rec | | | | 106 | 79 - 125 | 9527 | |
| VOA Surr, DBFM | % Rec | | | | 92 | 75 - 134 | 9527 | |

Matrix Spike Duplicate

| Analyte | units | Orig. Val. | Duplicate | RPD | Limit | Q.C. | Batch |
|---------|-------|------------|-----------|-------|-------|-------|-------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |

Project QC continued . . .

TestAmerica

ANALYTICAL TESTING CORPORATION

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204
800-765-0980 • 615-726-3404 FAX

PROJECT QUALITY CONTROL DATA

Project Number:

Project Name: EXXONMOBIL 7-3399

Page: 2

Laboratory Receipt Date: 12/22/04

Matrix Spike Duplicate

| Analyte | units | Orig. Val. | Duplicate | RPD | Limit | Q.C. Batch |
|---------------------------|------------|------------|-----------|-------|-------|------------|
| **UST PARAMETERS** | | | | | | |
| Benzene | mg/l | 0.0483 | 0.0553 | 13.51 | 30. | 6141 |
| Benzene | mg/l | 0.0517 | 0.0544 | 5.09 | 30. | 6156 |
| Toluene | mg/l | 0.0480 | 0.0554 | 14.31 | 37. | 6141 |
| Toluene | mg/l | 0.0829 | 0.0833 | 0.48 | 37. | 6156 |
| Ethylbenzene | mg/l | 0.0483 | 0.0565 | 15.65 | 38. | 6141 |
| Ethylbenzene | mg/l | 0.0493 | 0.0531 | 7.42 | 38. | 6156 |
| Xylenes (Total) | mg/l | 0.0934 | 0.110 | 16.32 | 33. | 6141 |
| Xylenes (Total) | mg/l | 0.140 | 0.143 | 2.12 | 33. | 6156 |
| Methyl-t-butylether | mg/l | 0.158 | 0.192 | 19.43 | 34. | 6141 |
| Methyl-t-butylether | mg/l | 0.0409 | 0.0433 | 5.70 | 34. | 6156 |
| TPH (Gasoline Range) | mg/l | 0.978 | 0.960 | 1.86 | 27. | 6141 |
| TPH (Gasoline Range) | mg/l | 0.976 | 0.904 | 7.66 | 27. | 6156 |
| BTEX/GRO Surr., a,a,a-TFT | % Recovery | 90. | | | | 6141 |
| BTEX/GRO Surr., a,a,a-TFT | % Recovery | 92. | | | | 6156 |
| VOA Surr 1,2-DCA-d4 | % Rec | 91. | | | | 9527 |
| VOA Surr Toluene-d8 | % Rec | 96. | | | | 9527 |
| VOA Surr, 4-BFB | % Rec | 105. | | | | 9527 |
| VOA Surr, DBFM | % Rec | 90. | | | | 9527 |

Laboratory Control Data

| Analyte | units | Known Val. | Analyzed Val | % Recovery | Target Range | Q.C. Batch |
|--------------------|-------|------------|--------------|------------|--------------|------------|
| **UST PARAMETERS** | | | | | | |
| Benzene | mg/l | 0.100 | 0.0953 | 95 | 72 - 118 | 6141 |
| Benzene | mg/l | 0.100 | 0.103 | 103 | 72 - 118 | 6156 |
| Toluene | mg/l | 0.100 | 0.0960 | 96 | 72 - 119 | 6141 |

Project QC continued . . .

PROJECT QUALITY CONTROL DATA

Project Number:

Project Name: EXXONMOBIL 7-3399

Page: 3

Laboratory Receipt Date: 12/22/04

Laboratory Control Data

| Analyte | units | Known Val. | Analyzed Val | % Recovery | Target Range | Q.C. Batch |
|---------------------------|------------|------------|--------------|------------|--------------|------------|
| Toluene | mg/l | 0.100 | 0.0995 | 100 | 72 - 119 | 6156 |
| Ethylbenzene | mg/l | 0.100 | 0.0957 | 96 | 71 - 119 | 6141 |
| Ethylbenzene | mg/l | 0.100 | 0.102 | 102 | 71 - 119 | 6156 |
| Xylenes (Total) | mg/l | 0.200 | 0.185 | 92 | 70 - 117 | 6141 |
| Xylenes (Total) | mg/l | 0.200 | 0.201 | 100 | 70 - 117 | 6156 |
| Methyl-t-butylether | mg/l | 0.100 | 0.0945 | 94 | 57 - 127 | 6141 |
| Methyl-t-butylether | mg/l | 0.100 | 0.0902 | 90 | 57 - 127 | 6156 |
| TPH (Gasoline Range) | mg/l | 1.00 | 0.978 | 98 | 64 - 130 | 6141 |
| TPH (Gasoline Range) | mg/l | 1.00 | 0.976 | 98 | 64 - 130 | 6156 |
| BTEX/GRO Surr., a,a,a-TFT | % Recovery | | | 84 | 69 - 132 | 6141 |
| BTEX/GRO Surr., a,a,a-TFT | % Recovery | | | 95 | 69 - 132 | 6156 |
| **VOA PARAMETERS** | | | | | | |
| Methyl-t-butyl ether | mg/l | 0.0500 | 0.0502 | 100 | 69 - 136 | 9527 |
| Ethanol | mg/L | 5.00 | 4.58 | 92 | 48 - 164 | 9527 |
| VOA Surr 1,2-DCA-d4 | % Rec | | | 90 | 73 - 127 | 9527 |
| VOA Surr Toluene-d8 | % Rec | | | 95 | 79 - 113 | 9527 |
| VOA Surr, 4-BFB | % Rec | | | 105 | 79 - 125 | 9527 |
| VOA Surr, DBFM | % Rec | | | 89 | 75 - 134 | 9527 |

Duplicates

| Analyte | units | Orig. Val. | Duplicate | RPD | Limit | Q.C. Batch | Sample Dup'd |
|---------|-------|------------|-----------|-----|-------|------------|--------------|
| | | | | | | | |

Project QC continued . . .

2960 FOSTER CREIGHTON DRIVE • NASHVILLE, TENNESSEE 37204

800-765-0980 • 615-726-3404 FAX

PROJECT QUALITY CONTROL DATA

Project Number:

Project Name: EXXONMOBIL 7-3399

Page: 4

Laboratory Receipt Date: 12/22/04

Blank Data

| Analyte | Blank Value | Units | Q.C. Batch | Date Analyzed | Time Analyzed |
|---------------------------|-------------|------------|------------|---------------|---------------|
| Benzene | < 0.00050 | mg/l | 6141 | 12/24/04 | 17:29 |
| Benzene | < 0.00050 | mg/l | 6156 | 12/27/04 | 18:30 |
| Toluene | < 0.0005 | mg/l | 6141 | 12/24/04 | 17:29 |
| Toluene | < 0.0005 | mg/l | 6156 | 12/27/04 | 18:30 |
| Ethylbenzene | < 0.0005 | mg/l | 6141 | 12/24/04 | 17:29 |
| Ethylbenzene | < 0.0005 | mg/l | 6156 | 12/27/04 | 18:30 |
| Xylenes (Total) | < 0.0005 | mg/l | 6141 | 12/24/04 | 17:29 |
| Xylenes (Total) | < 0.0005 | mg/l | 6156 | 12/27/04 | 18:30 |
| Methyl-t-butylether | < 0.0005 | mg/l | 6141 | 12/24/04 | 17:29 |
| Methyl-t-butylether | < 0.0005 | mg/l | 6156 | 12/27/04 | 18:30 |
| TPH (Gasoline Range) | < 0.0500 | mg/l | 6141 | 12/24/04 | 17:29 |
| TPH (Gasoline Range) | < 0.0500 | mg/l | 6156 | 12/27/04 | 18:30 |
| BTEX/GRO Surr., a,a,a-TFT | 84. | % Recovery | 6141 | 12/24/04 | 17:29 |
| BTEX/GRO Surr., a,a,a-TFT | 86. | % Recovery | 6156 | 12/27/04 | 18:30 |
| **VOA PARAMETERS** | | | | | |
| Methyl-t-butyl ether | < 0.00023 | mg/l | 9527 | 12/27/04 | 12:29 |
| Ethanol | < 0.0307 | mg/L | 9527 | 12/27/04 | 12:29 |
| VOA Surr 1,2-DCA-d4 | 92. | % Rec | 9527 | 12/27/04 | 12:29 |
| VOA Surr Toluene-d8 | 96. | % Rec | 9527 | 12/27/04 | 12:29 |
| VOA Surr, -4-BFB | 103. | % Rec | 9527 | 12/27/04 | 12:29 |
| VOA Surr, DBFM | 87. | % Rec | 9527 | 12/27/04 | 12:29 |

= Value outside Laboratory historical or method prescribed QC limits.

End of Report for Project 401117



Nashville Division
2960 Foster Creighton
Nashville, TN 37204

CHAIN OF CUSTODY RECORD

Phone: 615-726-0177
Toll Free: 800-765-0980
Fax: 615-726-3404



401117

Consultant Name: ETIC ENGINEERING

Address: 2285 MORELLO AVENUE

City/State/Zip: PLEASANT HILL, CA. 94523

ExxonMobil Project Mgr: BRYAN CAMPBELL

Telephone Number: (925) 602-4710 EXT. 24

Fax No.: (925) 602-4720

Sampler Name: (Print) MNTN PARKS A

Sampler Signature:

Report To: BRYAN CAMPBELL

Invoice To: JENNIFER SEDLACHEK (EXXONMOBIL TM)

Account #: 10236

PO #: 4505802133

Facility ID # 7-3399

Site Address 2991 HOPYARD ROAD

City, State Zip PLEASANTON, CA

| Sample ID / Description | Date Sampled | Time Sampled | No. of Containers Shipped | Grab | Composite | Field Filtered | Preservative | | Matrix | | | Analyze For: | | | RUSH TAT (Pre-Schedule) | TAT request (in Bus. Days) | STD TAT | Fax Results | |
|-------------------------|--------------|--------------|---------------------------|------|-----------|----------------|--------------|------------------------------|------------------|---------------------|---|---|--------------------|-----------------|---|----------------------------|----------------|-------------|------|
| | | | | | | | Ice | HNO ₃ (Red Label) | HCl (Blue Label) | NaOH (Orange Label) | H ₂ SO ₄ Plastic (Yellow Label) | H ₂ SO ₄ Glass (Yellow Label) | None (Black Label) | Other (Specify) | Groundwater | Wastewater | Drinking Water | Sludge | Soil |
| MW1 | 12/2/04 | 11:10 | 6 | | | | X | X | | | | | | X | TPH+G+STEX BY 8015/8021B MTBE BY 8021B | X | X | 199756 | |
| MW4 | | 11:40 | 6 | | | | X | X | | | | | | X | X | | | 57 | |
| MW5D | | 9:35 | 6 | | | | X | X | | | | | | X | X | | | 58 | X |
| MW5S | | 8:45 | 6 | | | | X | X | | | | | | X | X | | | 59 | X |
| MW7 | | 8:10 | 6 | | | | X | X | | | | | | X | X | | | 60 | X |
| MW8 | | 15:35 | 6 | | | | X | X | | | | | | X | X | | | 199761 | X |
| MW9A | | 6 | | | | | X | X | | | | | | X | X | | | | X |
| MW10 | | 6 | | | | | X | X | | | | | | X | X | | | | X |
| MW11 | | 7:30 | 6 | | | | X | X | | | | | | X | X | | | 199762 | X |
| MW12A | | 11:35 | 6 | | | | X | X | | | | | | X | | | | 199763 | X |

Special Instructions:

GLOBAL ID# T0600100537

EDF FILE REQUIRED

Laboratory Comments:

7 OXYGENATES INCLUDE MTBE, TBA, TAME, ETBE, DIPE, EDB, AND 1,2-DCA.

Relinquished by:

Date 12/2/04 Time 17:00

Received by:

Date

Time

Relinquished by:

Date

Time

Received by TestAmerica:

Date 12/27/04

Time 9:05

CHAIN OF CUSTODY RECORD

TestAmerica
INCORPORATED
401117

Nashville Division
2960 Foster Creighton
Nashville, TN 37204

Phone: 615-726-0177
Toll Free: 800-765-0980
Fax: 615-726-3404

ExxonMobil

Consultant Name: ETIC ENGINEERING
Address: 2285 MORELLO AVENUE
City/State/Zip: PLEASANT HILL, CA. 94523
ExxonMobil Project Mgr: BRYAN CAMPBELL
Telephone Number: (925) 602-4710 EXT. 24
Sampler Name: (Print) MILIN TIRUMALA
Sampler Signature: [Signature]

Report To: BRYAN CAMPBELL
Invoice To: JENNIFER SEDLACHEK (EXXONMOBIL TM)
Account #: 10236
PO #: 4505802133
Facility ID # 7-3399
Site Address 2991 HOPYARD ROAD
City, State Zip PLEASANTON, CA

| Sample ID / Description | Date Sampled | Time Sampled | No. of Containers Shipped | Preservative | Matrix | Analyze For: | | RUSH TAT (Pre-Schedule) | TAT request (in Bus. Days) | |
|---|---------------|------------------------|---------------------------|-----------------------|--------|---------------|------------------------------|--|----------------------------|------------------|
| | | | | | | Ice | HNO ₃ (Red Label) | | | HCl (Blue Label) |
| MW13 | 12/20 | 10:05 | 6 | X | X | | X | X | X | 199764 |
| MW14 | | 10:30 | 6 | X | X | | X | X | X | 199765 |
| OW1 | | | 6 | X | X | | X | X | | |
| OW2 | | 13:30 | 6 | X | X | | X | X | X | 199766 |
| VR1 | | 12:15 | 6 | X | X | | X | X | X | 199767 |
| VR2 | | | 6 | X | X | | X | X | | |
| PMW1 | | | 6 | X | X | | X | X | | |
| PMW2 | | | 6 | X | X | | X | X | | |
| PMW3 | | 11:05 | 6 | X | X | | X | X | X | 199768 |
| PMW4 | | 11:45 | 6 | X | X | | X | X | X | 199769 |
| Special Instructions: | | GLOBAL ID# T0600100537 | | EDF FILE REQUIRED | | | | Laboratory Comments: Temperature Upon Receipt: <input checked="" type="checkbox"/> 3°C Sample Containers Intact? <input checked="" type="checkbox"/> 100% VOCs Free of Headspace? <input checked="" type="checkbox"/> 22% | | |
| 7 OXYGENATES INCLUDE MTBE, TBA, TAME, ETBE, DIPE, EDB, AND 1,2-DCA. | | | | | | | | | | |
| Relinquished by: <u>MILIN TIRUMALA</u> | Date 12/20/04 | Time 17:00 | Received by: | | | Date 12/22/04 | Time 9:05 | | | |
| Relinquished by: | Date | Time | Received by TestAmerica: | <u>Bryan Campbell</u> | | Date 12/22/04 | Time 9:05 | | | |



COOLER RECEIPT FORM

BC#

401117

Client Name : ETIC Engineering

Cooler Received/Opened On: 12/22/04 Accessioned By: James D. Jacobs


Log-in Personnel Signature

1. Temperature of Cooler when triaged: 3 Degrees Celsius
2. Were custody seals on outside of cooler?..... YES...NO...NA
3. a. If yes, how many and where: 1 Front
3. Were custody seals on containers?..... NO...YES...NA
4. Were the seals intact, signed, and dated correctly?..... YES...NO...NA
5. Were custody papers inside cooler?..... YES...NO...NA
6. Were custody papers properly filled out (ink, signed, etc)?..... YES...NO...NA
7. Did you sign the custody papers in the appropriate place?..... YES...NO...NA
8. What kind of packing material used? Bubblewrap Peanuts Vermiculite Other None
9. Cooling process: Ice Ice-pack Ice (direct contact) Dry ice Other None
10. Did all containers arrive in good condition (unbroken)?..... YES...NO...NA
11. Were all container labels complete (#, date, signed, pres., etc)?..... YES...NO...NA
12. Did all container labels and tags agree with custody papers?..... YES...NO...NA
13. Were correct containers used for the analysis requested?..... YES...NO...NA
14. a. Were VOA vials received?..... YES...NO...NA
- b. Was there any observable head space present in any VOA vial?..... NO...YES...NA
15. Was sufficient amount of sample sent in each container?..... YES...NO...NA
16. Were correct preservatives used?..... YES...NO...NA

If not, record standard ID of preservative used here _____

17. Was residual chlorine present?..... NO...YES...NA
18. Indicate the Airbill Tracking Number (last 4 digits for Fedex only) and Name of Courier below:

7172

Fed-Ex

UPS

Velocity

DHL

Route

Off-street

Misc.

19. If a Non-Conformance exists, see attached or comments below: