2201 Broadway, Suite 101 Oakland, CA 94612-3023 Tel. 510.740.5800 Fax. 510.663.3315



December 8, 1999 Project 791668

Mr. Paul Supple ARCO Products Company PO Box 6549 Moraga, California 94570 MAPE are at 15,000 - 20,000 at Multo + MW? looking od the gologic x-sec. - MASE and more in Sand line to BP orthe across street.

Re: Semi-Annual Groundwater Monitoring Report, Third Quarter 1999, for ARCO Service Station No. 6041, located at 7249 Village Parkway, Dublin, California

Dear Mr. Supple:

Pinnacle Environmental Solutions, a member of The IT Group (Pinnacle), is submitting the attached report which presents the results of the third quarter 1999 groundwater monitoring program at ARCO Products Company (ARCO) Service Station No. 6041, located at 7249 Village Parkway, Dublin, California. The monitoring program complies with the Alameda County Health Care Services Agency (ACHCSA) requirements regarding underground tank investigations.

LIMITATIONS

No monitoring event is thorough enough to describe all geologic and hydrogeologic conditions of interest at a given site. If conditions have not been identified during the monitoring event, results should not be construed as a guarantee of the absence of such conditions at the site, but rather as the product of the scope and limitations of work performed during the monitoring event.

Please call if you have questions.

Sincerely,

Pinnacle

Glen VanderVeen Project Manager Dan Easter, R.G. Project Geologist

Attachment: Semi-Annual Groundwater Monitoring Report, Third Quarter 1999

cc: Eva Chu, ACHCSA

69 DEC 13 VW 8: 23

BROLECTION ENAIGOBREMINT

Date:

December 8, 1999

ARCO SEMI-ANNUAL GROUNDWATER MONITORING REPORT

Station No.:	6041	Address:	7249 Village Parkway, Dublin, California	
		Pinnacle Project No.	791668	
ARCO E	nvironmental	Engineer/Phone No.:	Paul Supple /(925) 299-8891	
Pin	nacle Project	Manager/Phone No.:	Gien VanderVeen/(510) 740-5807	
F	Primary Agen	cy/Regulatory ID No.:	ACHCSA	

WORK PERFORMED THIS QUARTER (THIRD - 1999):

- 1. Prepared and submitted status report for second quarter 1999.
- 2. Performed semi-annual groundwater monitoring and sampling for third quarter 1999.
- 3. Repaired well boxes.

WORK PROPOSED FOR NEXT QUARTER (FOURTH - 1999):

- 1. Prepare and submit semi-annual groundwater monitoring report for third quarter 1999.
- 2. Prepare and submit a report of utility survey, including a cross section to BP site.

dane

MONITORING:

Current Phase of Project:	Monitoring
Frequency of Groundwater Sampling	Semi-annual (1st/3rd quarter): MW-1, MW-2, MW-3
Frequency of Groundwater Monitoring	Semi-annual
Is Floating Product (FP) Present On-site:	☐ Yes ⊠ No
Bulk Soil Removed to Date:	15 cubic yards of TPH impacted soil
Bulk Soil Removed This Quarter:	None
Water Wells or Surface Waters,	
within 2000 ft., impacted by site:	None
Current Remediation Techniques:	None
Average Depth to Groundwater:	9.1 feet
Groundwater Flow Direction and Gradient	
(Average):	0.013 ft/ft toward south-southwest

ATTACHMENTS:

- Table 1 Historical Groundwater Elevation and Analytical Data (Petroleum Hydrocarbons and Their Constituents)
- Table 2 Groundwater Flow Direction and Gradient
- Figure 1 Groundwater Analytical Summary Map
- Figure 2 Groundwater Elevation Contour Map
- Appendix A Sampling and Analysis Procedures
- Appendix B Certified Analytical Reports and Chain-of-Custody Documentation
- Appendix C Field Data Sheets

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present*

ARCO Service Station 6041 7249 Village Parkway, Dublin, California

	<u></u>	TOC	Depth	FP	Groundwater		TPH			Ethyl-	Total	МТВЕ	MTBE	Purged/
Well	Date	Elevation	to Water	Thickness	Elevation	Date	Gasoline		Toluene	benzene	Xylenes	8020		Not Purged
Number	Gauged	(ft-MSL)	(feet)	(feet)	(ft-MSL)	Sampled	(μg/L)	(μg/L)	(μg/L)	(μg/L)	(μg/L)	(μg/L)	(μg/L)	(P/NP)
MW-1	02-15-95	336.56	8.53	ND	328.03	02-15-95	820	15	<1	5.2	1.4			
MW-1	05-24-95	336.56	9.00	ND	327.56	05-24-95	640	12	<1	7.3	<1			1
MW-1	08-25-95	336.56	10.30	ND	326.26	08-25-95	780	2	<1	2	2	2,500		
MW-1	11-28-95	336.56	11.01	ND	325.55	11-28-95	570	2.2	< 0.5	1.4	0.9			
MW-1	02-26-96	336.56	7.35	ND	329.21	03-13-96	1,100	28	<7	13	7	3,400		
MW-1	05-23-96	336.56	8.73	ND	327.83	05 - 23-96	5.60	8.5	<1	1.1	<1	3,900		
MW-1	08-23-96	336.56	10.25	ND	326.31	08-23-96	860	<1	<1	<4	. 2	5,600		
MW-1	03-21-97	336.56	9.35	ND	327.21	03-21-97	520	12	<0.5	2.7	1.5	6,200		
MW-1	08-20-97	336.56	10.75	ND	325.81	08-20-97	<5,000	<50	<50			7,400		1
MW-1	11-21-97	336.56	11.10	ND	325.46	11-21-97	<5,000	<50	<50			8,500		
MW-1	02-12-98	336.56	7.05	ND	329.51	02-12-98	210	<0.5	<0.5	<0.5	<0.5	8,900		
MW-1	07-31-98	336.56	10.04	ND	326.52	07-31-98	<20,000	<200	<200			18,000		
MW-1	02-17-99	336.56	8.50	ND	328.06	02-17-99	<20,000	<200	<200			16,000		
MW-1	08-24-99	336.56	10.40	ND	326.16	08-24-99	190	`<0.5	4.4	<0.5	1.1	15,000		P
MW-2	02-15-95	334.80	6.75	ND	328.05	02-15-95	730	110	1.7	25	66			
MW-2	05-24-95	334.80	6.88	ND	327.92	05-24-95	370	110	<1	17	1.9			
MW-2	08-25-95	334.80	7.91	ND	326.89	08-25-95	150	6	<1	<1	<1	2,700	·	
MW-2	11-28-95	334.80	9.06	ND	325.74	11-28-95	<50	< 0.5	<0.5	<0.5	0.8			
MW-2	02-26-96	334.80	6.65	ND	328.15	03-13-96	350	66	< 0.5	11	1.7	<3		
MW-2	05-23-96	334.80	6.90	ND	327.90	05-23-96	540	140	<2.5	13	<2.5	4,600		
MW-2	08-23-96	334.80	8.45	ND	326.35	08-23-96	180	0.8	2	0.7	2.6	4,000		
MW-2	03-21-97	334.80	7.28	ND	327.52	03-21-97	410	90	, <1	14	4	3,800		
MW-2	08-20-97	334.80	8.87	ND	325.93	08-20-97	<5,000	<50	< 50	<50	<50	3,100		
MW-2	11-21-97	334.80	9.28	ND	325.52	11-21-97	<2,000		<20	<20	<20	2,600		
MW-2	02-12-98	334.80	5.90	ND	328.90	02-12-98	310		<0.5	6.2	1.1	3,800		
MW-2	07-31-98	334.80	8.12	ND	326.68	07-31-98	6,100				1100	7,700		

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present*

ARCO Service Station 6041 7249 Village Parkway, Dublin, California

		TOC	Depth	FP	Groundwater		TPH		· · · · · · · · · · · · · · · · · · ·	Ethyl-	Total	МТВЕ	МТВЕ	Purged/
Well	Date	Elevation	to Water	Thickness	Elevation	Date		Benzene			Xylenes	8020	8240/8260 1	•
Number	Gauged	(ft-MSL)	(feet)	(feet)	(ft-MSL)	Sampled	(µg/L)	(μ <u>g</u> /L)	(μg/L)	(μg/L)	(μg/L)	(µg/L)	(μg/L)	(P/NP)
MW-2	02-17-99	334.80	7.18	ND	327.62	02-17-99	<5,000	<50	<50	<50	<50	4,200		
MW-2	08-24-99	334.80	8.68	ND	326.12	08-24-99	200	1.8	16	3.0	32	3,100		P
MW-3	02-15-95	335.53	8.55	ND	. 326.98	02-15-95	100	. 14	<0.5	6.3	<0.5		• •	
MW-3	05-24-95	335.53	8.17	ND	327.36	05-24-95	110	8	<0.5	2.7	< 0.5			
MW-3	08-25-95	335.53	9.27	ND	326.26	08-25-95	210	3.6	<0.5	2.9	0.6	20,000		
MW-3	11-28-95	335.53	9.91	ND	325.62	11-28-95	81	1.5	<0.5	- 1.4	< 0.5		15,000	
MW-3	02-26-96	335.53	8.42	ND	327.11	03-13-96	16,000	1,600	1,200	300	2,000	9,500		
MW-3	05-23-96	335.53	7.70	ND	327.83	05-23-96	6,500	690	<10	120	14	8,600		
MW-3	08-23-96	335.53	9.25	ND	326.28	08-23-96	1,700	85	2	61	5.3	11,000		
MW-3	03-21-97	335.53	8.72	ND	326.81	03-21-97	100	2	<1	1	<1	6,600		
MW-3	08-20-97	335.53	9.73	ND	325.80	08-20-97	<5,000	< 50	<50	<50	<50	7,700		
MW-3	11-21-97	335.53	10.10	ND	325.43	11-21-97	<5,000	<50	<50	<50	<50	9,700		
MW-3	02-12-98	335.53	6.68	ND	328.85	02-12-98	110	11	<0.5	< 0.5	1.9	10,000		
MW-3	07-31-98	335.53	7.98	ND	327.55	07-31-98	<10,000	<100	<100	<100	<100	13,000		
MW-3	02-17-99	335.53	8.40	ND	327.13	02-17-99	<20,000	<200	<200	<200	<200	23,000		•
MW-3	08-24-99	335.53	9.45	ND	326.08	08-24-99	200	0.6	5.6	0.6	1.7	22,000		P
MW-4	02-15-95	334.22	7.85	ND	326.37	02-15-95	<50	<0.5	<0.5	<0.5	<0.5			
MW-4	05-24-95	334.22	6.68	ND:	327.54	05-24-95	Not samp	led: well s	ampled sea	mi-annually	y, during th	ne first an	d third quarte	rs
MW-4	08-25-95	334.22	6.93	ND	327.29	08-25-95	<50		-		<0.5	. <3	_	
MW-4	11-28-95	334.22	8.21	ND	326.01	11-28-95	Not samp	led: well s	ampled ser	mi-annually	y, during th	ne first an	d third quarte	rs
MW-4	02-26-96	334.22	6.65	ND	327.57	03-13-96	<50	<0.5	<0.5	< 0.5	< 0.5	<3		
MW-4	05-23-96	334.22	6.47	ND	327.75	05-23-96	Not samp	led: well s	ampled se	mi-annuall	y, during tl	ne first an	d third quarte	rs
MW-4	08-23-96	334.22	7.66	ND	326.56	08-23-96	Not samp	led: well n	ot part of	sampling p	rogram			
MW-4	03-21-97	334.22	6.84	ND	327.38	03-21-97	Not samp	led: well n	ot part of	sampling p	rogram			
MW-4	08-20-97	334.22	8.32	ND	325.90	08-20-97	Not samp	led: well n	ot part of	sampling p	rogram			

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present*

ARCO Service Station 6041 7249 Village Parkway, Dublin, California

		TOC	Depth	FP	Groundwater		TPH			Ethyl-	Total	MTBE	МТВЕ	Purged/
Well	Date			Thickness	Elevation	Date	Gasoline	Benzene	Toluene	benzene	Xylenes	8020	8240/8260	Not Purged
Number	Gauged	(ft-MSL)	(feet)	(feet)	(ft-MSL)	Sampled	(µg/L)	(μg/L)	(µg/L)	(μg/L)	(μg/L)	(μg/L)	(μg/L)	(P/NP)
MW-4	11-21-97	334.22	8.65	ND	325.57	11-21-97	Not sampl	led: well n	ot part of	sampling p	rogram		•	
MW-4	02-12-98	334.22	6.35	ND	327.87	02-12-98	Not sampl		-		-			
MW-4	07-31-98	334.22	6.84	ND	327.38	07-31-98	-	led: well n	-		_			
MW-4	02-17-99	334.22	7.50	ND	326.72	02-17-99		led: well n	-		_			
MW-4	08-24-99	334.22	9.50	ND	324.72	08-24-99	Not sampl		-		_			
]														
MW-5	02-15-95	335.87	7.80	ND	328.07	02-15-95	<50	< 0.5	< 0.5	< 0.5	< 0.5			
MW-5	05-24-95	335.87	8.10	ND	327.77	05-24-95	Not sample	led: well sa	ampled an	nually, dui	ing the firs	st quarter		
MW-5	08-25-95	335.87	9.43	ND	326.44	08-25-95	Not samp!	led: well sa	ampled an	nually, dui	ing the firs	st quarter		
MW-5	11-28-95	335.87	10.12	ND	325.75	11-28-95	Not samp	led: well sa	ampled an	nually, dui	ing the firs	st quarter		
MW-5	02-26-96	335.87	6.73	ND	329.14	03-13-96	<50	<0.5	< 0.5	<0.5	<0.5	<3		
MW-5	05-23-96	335.87	7.87	ND	328.00	05-23-96	Not sampl	led: well sa	ampled an	nually, dui	ing the firs	st quarter		
MW-5	08-23-96	335.87	9.46	ND	326.41	08-23-96	Not samp	led: well n	ot part of	sampling p	rogram			
MW-5	03-21-97	335.87	8.23	ND	327.64	03-21-97	Not samp	led: well n	ot part of	sampling p	rogram			
MW-5	08-20-97	335.87	9.92	ND	325.95	08-20-97	Not samp	led: well n	ot part of	sampling p	rogram			
MW-5	11-21-97	335.87	10.18	ND	325.69	11-21-97	Not samp	led: well n	ot part of	sampling p	rogram			
MW-5	02-12-98	335.87	6.45	ND	329.42	02-12-98	Not samp	led: well n	ot part of	sampling p	rogram			
MW-5	07-31-98	335.87	8.98	ND	326.89	07-31-98	Not samp	led: well n	ot part of	sampling p	rogram			,
MW-5	02-17-99	335.87	7.65	ND	328.22	02-17-99	Not samp	led: well n	ot part of	sampling p	rogram			
MW-5	08-24-99	335.87	8.10	ND	327.77	08-24-99	Not samp	led: well n	ot part of	sampling p	rogram			
MW-6	02-15-95	335.84	7.81	ND	328.03	02-15-95	<50	<0.5	<0.5	<0.5	<0.5			-
MW-6	05-24-95	335.84	8.35	ND	327.49	05-24-95	Not samp	led: well s	ampled an	nually, du	ring the fire	st quarter		
MW-6	08-25-95	335.84	9.71	ND	326.13	08-25-95	Not samp	led: well s	ampled an	nually, du	ring the fir	st quarter		
MW-6	11-28-95	335.84	10.28	ND	325.56	11-28-95	Not samp	led: well s	ampled an	nually, du	ring the firs	st quarter		
MW-6	02-26-96	335.84	6.60	ND	329.24	03-13-96	<50	<0.5	<0.5	<0.5	<0.5	<3	3	
MW-6	05-23-96	335.84	8.05	ND	327.79	05-23-96	Not samp	led: well s	ampled an	nually, du	ring the fire	st quarter		

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present*

ARCO Service Station 6041 7249 Village Parkway, Dublin, California

		TOC	Depth	FP	Groundwater		TPH		<u> </u>	Ethyl-	Total	MTBE	MTBE	Purged/
Well	Date	Elevation	to Water	Thickness	Elevation	Date	Gasoline	Benzene	Toluene	benzene	Xylenes	8020	8240/8260	Not Purged
Number	Gauged	(ft-MSL)	(feet)	(feet)	(ft-MSL)	Sampled	(μg/L)	(μg/L)	(µg/L)	(μg/L)	(μg/L)	(μg/L)	(µg/L)	(P/NP)
MW-6	08-23-96	335.84	. 9.58	ND	326.26	08-23-96	Not sampl	ed: well n	ot part of s	ampling p	rogram			
MW-6	03-21-97	335.84	8.39	ND	327.45	03-21-97	•	ed: well n	-	,	-			
MW-6	08-20-97	335.84	9.98	ND	325.86	08-20-97	Not samp	led: well n	ot part of s	ampling p	rogram			
MW-6	11-21-97	335.84	10.31	ND	325.53	11-21-97	Not sampl	led: well n	ot part of s	ampling p	rogram			
MW-6	02-12-98	335.84	3.15	ND	332.69	02-12-98	Not samp	ed: well n	ot part of s	ampling p	rogram			
MW-6	07-31-98	335.84	9.29	ND	326.55	07-31-98	Not samp	led: well n	ot part of s	ampling p	rogram			
MW-6	02-17-99	335.84	7.72	ND	328.12	02-17-99	Not samp	led: well n	ot part of s	ampling p	rogram			
MW-6	08-24-99	335.84	9.65	ND	326.19	08-24-99	Not samp	led: well n	ot part of s	ampling p	rogram			
VW-2	03-21-97	NR	8.22	ND	NR	03-21-97	150	8.9	<0.5	<0.5	0.6	270		
VW-2	08-20-97	NR	9.16	ND	NR	08-20-97	Not sampl	led: well n	ot part of s	ampling p	rogram			
VW-2	11-21-97	NR	8.27	ND	NR	11-21-97	<200	3	<2	<2	<2	180)	
VW-2	02-12-98	NR	6.65	ND	NR	02-12-98	200	19	<0.5	0.6	<0.5	2,200		
VW-2	07-31-98	NR	7.01	ND	NR	07-31-98	Not samp	led: well n	ot part of s	ampling p	rogram			
VW-2	02-17-99	NR	8.47	ND	NR	02-17-99	Not samp	leđ: well n	ot part of s	ampling p	rogram			
VW-2	08-24-99	NR	8.20	ND	NR	08-24-99	Not samp	led: well n	ot part of s	ampling p	rogram			
								<u> </u>						

Table 1

Historical Groundwater Elevation and Analytical Data Petroleum Hydrocarbons and Their Constituents 1995 - Present*

ARCO Service Station 6041 7249 Village Parkway, Dublin, California

		TOC	Depth	FP	Groundwater		TPH			Ethyl-	Total	MTBE	MTBE	Purged/
Well	Date	Elevation	to Water	Thickness	Elevation	Date	Gasoline	Benzene	Toluene	benzene	Xylenes	8020	8240/8260	Not Purged
Number	Gauged	(ft-MSL)	(feet)	(feet)	(ft-MSL)	Sampled	(μg/L)	(μg/L)	(μg/L)	(μg/L)	(μg/L)	(µg/L)	(μg/L)	(P/NP)

TOC: top of casing

ft-MSL: elevation in feet, relative to mean sea level

TPH: total petroleum hydrocarbons, California DHS LUFT Method BTEX: benzene, toluene, ethylbenzene, xylenes by EPA method 8020

MTBE: Methyl tert-butyl ether

EPA: United States Environmental Protection Agency

μg/L: micrograms per liter mg/L: milligrams per liter

ND: none detected

NR: not reported; data not available or not measurable

- -: not analyzed or not applicable
- <; denotes concentration not present at or above laboratory detection limit stated to the right.
- *: For previous historical groundwater elevation and analytical data please refer to Fourth Quarter 1995 Groundwater Monitoring Program Results, ARCO Service Station 6041, Dublin, California, (EMCON, February 26, 1996).

Table 2 Groundwater Flow Direction and Gradient

ARCO Service Station 6041 7249 Village Parkway, Dublin, California


Date	Average	Average
Measured	Flow Direction	Hydraulic Gradient
02-15-95	NR.	NR
05-24-95	East-Southeast	0.002
08-25-95	Northwest	0.006
11-28-95	North	0.006
02-26-96	East	0.012
05-23-96	Flat Gradient	Flat Gradient
08-23-96	Flat Gradient	Flat Gradient
03-21-97	South-Southeast	0.005
08-20-97	South-Southwest	0.001
11-21-97	South-Southwest	0.002
02-12-98	East	0.024
07-31-98	Northwest	0.01
02-17-99	Southeast	0.007
08-24-99	South-Southwest	0.013

Not sampled

NS

FIGURE 1
GROUNDWATER ANALYTICAL SUMMARY

THIRD QUARTER 1999
7249 VILLAGE PARKWAY
DUBLIN, CALIFORNIA

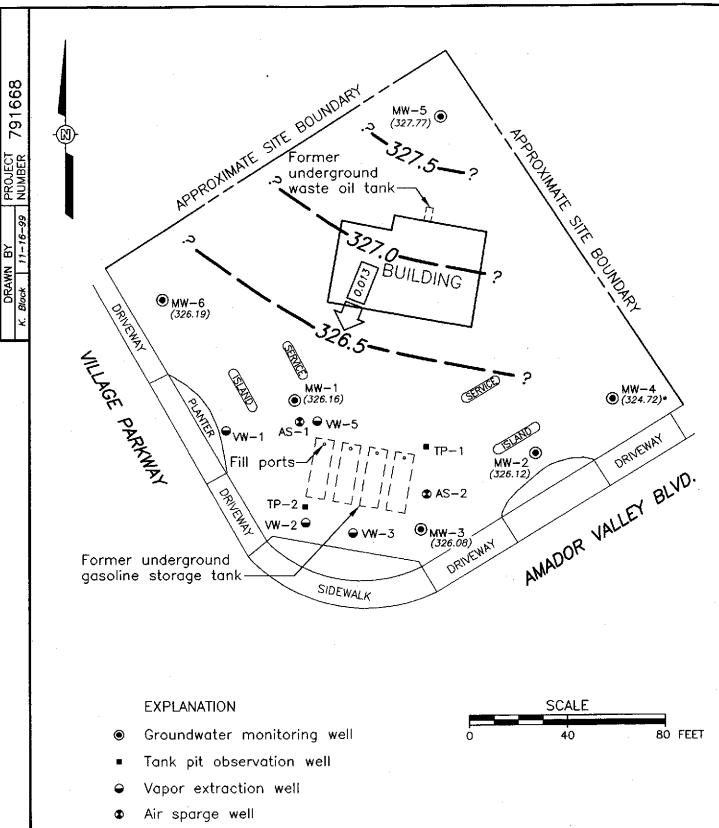

(326.08) Groundwater elevation (Ft.-MSL);

Approx. direction of groundwater

Groundwater elevation contour

Not used for contouring; water

level recording error suspected

measured 8/24/99

(Ft.-MSL)

flow showing gradient



ARCO PRODUCTS COMPANY SERVICE STATION 6041

FIGURE 2

GROUNDWATER ELEVATION CONTOURS
THIRD QUARTER 1999

7249 VILLAGE PARKWAY DUBLIN, CALIFORNIA

APPENDIX A SAMPLING AND ANALYSIS PROCEDURES

APPENDIX A

SAMPLING AND ANALYSIS PROCEDURES

The sampling and analysis procedures for water quality monitoring programs are contained in this appendix. The procedures provided for consistent and reproducible sampling methods, proper application of analytical methods, and accurate and precise analytical results. Finally, these procedures provided guidelines so that the overall objectives of the monitoring program were achieved.

The following documents have been used as guidelines for developing these procedures:

- Procedures Manual for Groundwater Monitoring at Solid Waste Disposal Facilities, Environmental Protection Agency (EPA)-530/SW-611, August 1977
- Resource Conservation and Recovery Act (RCRA) Groundwater Monitoring Technical Enforcement Guidance Document, Office of Solid Waste and Emergency Response (OSWER) 9950.1, September 1986
- Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, EPA SW-846, 3rd edition, November 1986
- Methods for Organic Chemical Analysis of Municipal and Industrial Waste Water, EPA-600/4-82-057, July 1982
- Methods for Organic Chemical Analysis of Water and Wastes, EPA-600/4-79-020, revised March 1983
- Leaking Underground Fuel Tank (LUFT) Field Manual, California State Water Resources Control Board, revised October 1989

Sample Collection

Sample collection procedures include equipment cleaning, water level and total well depth measurements, and well purging and sampling.

Equipment Cleaning

Before the sampling event was started, equipment that was used to sample groundwater was disassembled and cleaned with detergent water and then rinsed with deionized water. During field sampling, equipment surfaces that were placed in the well or came into contact with groundwater during field sampling were steam cleaned with deionized water before the next well was purged or sampled.

Water Level, Floating Hydrocarbon, and Total Well Depth Measurements

Before purging and sampling occurred, the depth to water, floating hydrocarbon thickness, and total well depth were measured using an oil/water interface measuring system. The oil/water interface measuring system consists of a probe that emits a continuous audible tone when immersed in a nonconductive fluid, such as oil or gasoline, and an intermittent tone when immersed in a conductive fluid, such as water. The floating hydrocarbon thickness and water level were measured by lowering the probe into the well. Liquid levels were recorded relative to the tone emitted at the groundwater surface. The sonic probe was decontaminated by being rinsed with deionized water or steam cleaned after each use. A bottom-filling, clear Teflon® bailer was used to verify floating hydrocarbon thickness measurements of less than 0.02 foot. Alternatively, an electric sounder and a bottom-filling Teflon bailer may have been used to record floating hydrocarbon thickness and depth to water.

The electric sounder is a transistorized instrument that uses a reel-mounted, two-conductor, coaxial cable that connects the control panel to the sensor. Cable markings are stamped at 1-foot intervals. The water level was measured by lowering the sensor into the monitoring well. A low-current circuit was completed when the sensor contacted the water, which served as an electrolyte. The current was amplified and fed into an indicator light and audible buzzer, signaling when water had been contacted. A sensitivity control compensated for highly saline or conductive water. The electric sounder was decontaminated by being rinsed with deionized water after each use. The bailer was lowered to a point just below the liquid level, retrieved, and observed for floating hydrocarbon.

Liquid measurements were recorded to the nearest 0.01 foot on the depth to water/floating product survey form. The groundwater elevation at each monitoring well was calculated by subtracting the measured depth to water from the surveyed elevation of the top of the well casing. (Every attempt was made to measure depth to water for all wells on the same day.) Total well depth was then measured by lowering the sensor to the bottom of the well. Total well depth, used to calculate purge volumes and to determine whether the well screen was partially obstructed by silt, was recorded to the nearest 0.1 foot on the depth to water/floating product survey form.

Well Purging

If the depth to groundwater was above the top of screens of the monitoring wells, then the wells were purged. Before sampling occurred, a polyvinyl chloride (PVC) bailer, centrifugal pump, low-flow submersible pump, or Teflon bailer was used to purge standing water in the casing and gravel pack from the monitoring well. Monitoring wells were purged according to the protocol presented in Figure A-1. In most monitoring wells, the amount of water purged before sampling was greater than or equal to three casing volumes. Some monitoring wells were expected to be evacuated to dryness after removing fewer than three casing volumes. These low-yield monitoring wells were allowed to recharge for up to 24 hours. Samples were obtained as soon as the monitoring wells recharged to a level sufficient for sample collection. If insufficient water recharged after 24 hours, the monitoring well was recorded as dry for the sampling event.

Groundwater purged from the monitoring wells was transported in a 500-gallon water trailer, 55-gallon drum, or a 325-gallon truck-mounted tank to IT's San Jose or Sacramento office location for temporary storage. IT arranged for transport and disposal of the purged groundwater through Integrated Waste Stream Management, Inc.

Field measurements of pH, specific conductance, and temperature were recorded in a waterproof field logbook. Figure A-2 shows an example of the water sample field data sheet on which field data are recorded. Field data sheets were reviewed for completeness by the sampling coordinator after the sampling event was completed.

The pH, specific conductance, and temperature meter were calibrated each day before field activities were begun. The calibration was checked once each day to verify meter performance. Field meter calibrations were recorded on the water sample field data sheet.

Well Sampling

A Teflon bailer was the only equipment acceptable for well sampling. When samples for volatile organic analysis were being collected, the flow of groundwater from the bailer was regulated to minimize turbulence and aeration. Glass bottles of at least 40-milliliters volume and fitted with Teflon-lined septa were used in sampling for volatile organics. These bottles were filled completely to prevent air from remaining in the bottle. A positive meniscus formed when the bottle was completely full. A convex Teflon septum was placed over the positive meniscus to eliminate air. After the bottle was capped, it was inverted and tapped to verify that it contained no air bubbles. The sample containers for other parameters were filled, filtered as required, and capped.

When required, dissolved concentrations of metals were determined using appropriate field filtration techniques. The sample was filtered by emptying the contents of the Teflon bailer into a pressure transfer vessel. A disposable 0.45-micron acrylic copolymer filter was threaded onto the transfer vessel at the discharge point, and the vessel was sealed. Pressure was applied to the vessel with a hand pump and the filtrate directed into the appropriate containers. Each filter was used once and discarded.

Sample Preservation and Handling

The following section specifies sample containers, preservation methods, and sample handling procedures.

Sample Containers and Preservation

Sample containers vary with each type of analytical parameter. Container types and materials were selected to be nonreactive with the particular analytical parameter tested.

Sample Handling

Sample containers were labeled immediately prior to sample collection. Samples were kept cool with cold packs until received by the laboratory. At the time of sampling, each sample was logged on an ARCO chain-of-custody record that accompanied the sample to the laboratory.

Samples that required overnight storage prior to shipping to the laboratory were kept cool (4° C) in a refrigerator. The refrigerator was kept in a warehouse, which was locked when not occupied by an IT employee. A sample/refrigerator log was kept to record the date and time that samples were placed into and removed from the refrigerator.

Samples were transferred from IT to an ARCO-approved laboratory by courier or taken directly to the laboratory by the environmental sampler. Sample shipments from IT to laboratories performing the selected analyses routinely occurred within 24 hours of sample collection.

Sample Documentation

The following procedures were used during sampling and analysis to provide chain-of-custody control during sample handling from collection through storage. Sample documentation included the use of the following:

- Water sample field data sheets to document
 sampling activities in the field
- Labels to identify individual samples
- Chain-of-custody record sheets for documenting possession and transfer of samples
- Laboratory analysis request sheets for documenting analyses to be performed

Field Logbook

In the field, the sampler recorded the following information on the water sample field data sheet (see Figure A-2) for each sample collected:

- Project number
- Client's name
- Location
- Name of sampler
- Date and time
- Well accessibility and integrity
- Pertinent well data (e.g., casing diameter, depth to water, well depth)

- · Calculated and actual purge volumes
- Purging equipment used
- Sampling equipment used
- Appearance of each sample (e.g., color, turbidity, sediment)
- Results of field analyses (temperature, pH, specific conductance)
- General comments

The water sample field data sheet was signed by the sampler and reviewed by the sampling coordinator.

Labels

Sample labels contained the following information:

- Project number
- Sample number (i.e., well designation)
- Sample depth

- Sampler's initials
- Date and time of collection
- Type of preservation used (if any)

Sampling and Analysis Chain-of-Custody Record


The ARCO chain-of-custody record initiated at the time of sampling contained, at a minimum, the sample designation (including the depth at which the sample was collected), sample type, analytical request, date of sampling, and the name of the sampler. The record sheet was signed, timed, and dated by the sampler when transferring the samples. The number of custodians in the chain of possession was minimized. A copy of the ARCO chain-of-custody record was returned to IT with the analytical results.

Groundwater Sampling and Analysis Request Form

A groundwater sampling and analysis request form (see Figure A-3) was used to communicate to the environmental sampler the requirements of the monitoring event. At a minimum, the groundwater sampling and analysis request form included the following information:

- · Date scheduled
- Site-specific instructions
- Specific analytical parameters

- Well number
- Well specifications (expected total depth, depth of water, and product thickness)

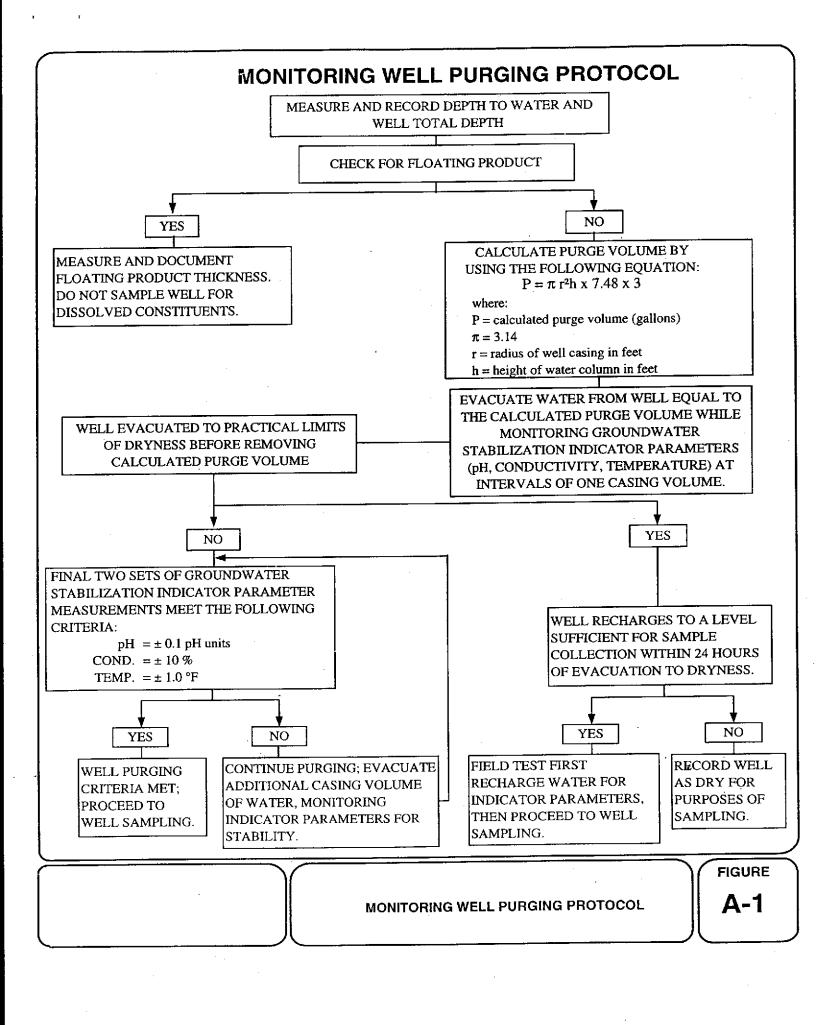

WATER SAMPLE FIELD DATA SHEET SAMPLE ID: PROJECT NO: CLIENT NAME : PURGED BY: LOCATION: SAMPLED BY : Leachate ____ Other _____ Surface Water TYPE: Groundwater 4.5 ____ 6 ___ Other ____ CASING DIAMETER (inches): 2_____3___4__ VOLUME IN CASING (gal.): CASING ELEVATION (feet/MSL): CALCULATED PURGE (gal.): DEPTH OF WELL (feet): ACTUAL PURGE VOL. (gal.): ___ DEPTH OF WATER (feet): END PURGE: DATE PURGED : DATE SAMPLED : SAMPLING TIME: TEMPERATURE TURBIDITY TIME pН E.C. TIME VOLUME (2400 HR) (visual/NTU) (°F) (µmhos/cm@25°c) (units) (2400 HR) (gal.) ODOR: OTHER: (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT **PURGING EQUIPMENT** Bailer (Teflon) 2" Bladder Pump Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Bailer (Stainless Steel) Dipper Submersible Pump Dedicated _____ Dedicated Well Wizard™ ____ Well Wizard™ Other: _____ Other: _____ LOCK:_____ WELL INTEGRITY: REMARKS: Meter Serial No.: pH, E.C., Temp. Meter Calibration: Date: _____ Time: pH 7____/ pH 10___/ pH 4___/ Temperature °F SIGNATURE: ____ REVIEWED BY: ____ PAGE ___ OF ____ **FIGURE**

WATER SAMPLE FIELD DATA SHEET

A-2

	Gi	ROUNDWATE	ER SAMPLING	AND ANALYS	SIS REQUE	ST FORM	
	PRO	JECT NAME :					•
	SCHED	ULED DATE :					Delini
ECIAL INST	TRUCTIONS /	CONSIDERAT	ΓΙΟΝS :			EMCON Pro OWT Pro Ta	Project prization: ject No.: ject No.: sk Code: inals To:
•							cc:
•							Well Lock Number (s
						•	
		·					
СНЕСК ВО	X TO AUTHOF	RIZE DATA EN	TTRY	Sid	te Contact:	Name	Phone #
Well Yumber or	Casing Diameter	Casing Length	Depth to Water	Sit		Name YSES REQUEST	
Well	Casing	Casing	Depth to	Sit			
Well Iumber or	Casing Diameter	Casing Length	Depth to Water	Sid			
Well lumber or	Casing Diameter	Casing Length	Depth to Water	Sid			
Well lumber or	Casing Diameter	Casing Length	Depth to Water	Sid			
Well Yumber or	Casing Diameter	Casing Length	Depth to Water	Sit			

SAMPLING AND ANALYSIS REQUEST FORM

FIGURE

Δ-3

APPENDIX B

CERTIFIED ANALYTICAL REPORTS, AND CHAIN-OF-CUSTODY DOCUMENTATION



September 8, 1999

Service Request No.: S9902594

Mr. Glen Vanderveen IT/EMCON 2201 Broadway, Suite 101 Oakland, CA 94612

RE:

TO#24118.00/RAT8/6041 DUBLIN

Dear Mr. Vanderveen:

Enclosed are the results of the sample(s) submitted to our laboratory on August 25, 1999. All analyses were performed in accordance with our laboratory's quality assurance program. Results are intended to be considered in their entirety and apply to the sample(s) analyzed. Columbia Analytical Services is not responsible for use of less than the complete report. Signature of this CAS Analytical Report confirms that pages 2 through 11, following, have been thoroughly reviewed and approved for release.

Columbia Analytical Services is certified for environmental analyses by the California Department of Health Services (certificate number: 1496, expiration: January 31, 2001).

If you have any questions, please call me at (408) 748-9700.

ernadetti Troneales)

Respectfully submitted,

Columbia Analytical Services, Inc.

Bernadette Troncales

Project Chemist

Laboratory Director

SEP 1 4 1999

Acronyms

A2LA American Association for Laboratory Accreditation

ASTM American Society for Testing and Materials

BOD Biochemical Oxygen Demand

BTEX Benzene, Toluene, Ethylbenzene, Xylenes

CAM California Assessment Metals
CARB California Air Resources Board

CAS Number Chemical Abstract Service registry Number

CFC Chlorofluorocarbon
CFU Colony-Forming Unit
COD Chemical Oxygen Demand

DEC Department of Environmental Conservation
DEQ Department of Environmental Quality
DHS Department of Health Services
DLCS Duplicate Laboratory Control Sample

DMS Duplicate Matrix Spike
DOE Department of Ecology
DOH Department of Health

EPA U. S. Environmental Protection Agency

ELAP Environmental Laboratory Accreditation Program

GC Gas Chromatography

GC/MS . Gas Chromatography/Mass Spectrometry

IC Ion Chromatography

ICB Initial Calibration Blank sample

ICP Inductively Coupled Plasma atomic emission spectrometry

ICV Initial Calibration Verification sample

J Estimated concentration. The value is less than the MRL, but greater than or equal to

the MDL. If the value is equal to the MRL, the result is actually <MRL before rounding.

LUFT Laboratory Control Sample
Luft Leaking Underground Fuel Tank

M Modified

MBAS Methylene Blue Active Substances

MCL . Maximum Contaminant Level. The highest permissible concentration of a

substance allowed in drinking water as established by the U. S. EPA.

MDL Method Detection Limit
MPN Most Probable Number
MRL Method Reporting Limit

MS Matrix Spike

MTBE Methyl tert-Butyl Ether

NA Not Applicable
NAN Not Analyzed
NC Not Calculated

NCASI National Council of the paper industry for Air and Stream Improvement
ND Not Detected at or above the method reporting/detection limit (MRL/MDL)

NIOSH National Institute for Occupational Safety and Health

NTU Nephelometric Turbidity Units

ppb Parts Per Billion ppm Parts Per Million

PQL Practical Quantitation Limit
QA/QC Quality Assurance/Quality Control
RCRA Resource Conservation and Recovery Act

RPD Relative Percent Difference

SIM Selected Ion Monitoring

SM Standard Methods for the Examination of Water and Wastewater, 18th Ed., 1992

STLC Solubility Threshold Limit Concentration

SW Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, SW-846,

3rd Ed., 1986 and as amended by Updates I, II, IIA, and IIB.

TCLP Toxicity Characteristic Leaching Procedure

TDS Total Dissolved Solids

TPH Total Petroleum Hydrocarbons

tr Trace level. The concentration of an analyte that is less than the PQL but greater than or equal

to the MDL. If the value is equal to the PQL, the result is actually <PQL before rounding.

TRPH Total Recoverable Petroleum Hydrocarbons

TSS Total Suspended Solids

TTLC Total Threshold Limit Concentration

VOA Volatile Organic Analyte(s) Page 2 ACRONLST.DOC 7/14/95

Analytical Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Sample Matrix:

Water

Service Request: S9902594

Date Collected: 8/24/99

Date Received: 8/25/99

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-2(13)

Lab Code:

Test Notes:

S9902594-001

Units: ug/L (ppb)

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	9/4/99	200	
Benzene	EPA 5030	8020	0.5	1 .	NA	9/4/99	1.8	
Toluene	EPA 5030	8020	0.5	1	NA	9/4/99	16	•
Ethylbenzene	EPA 5030	8020	0.5	1	NA	9/4/99	3.0	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	9/4/99	32	
Methyl tert -Butyl Ether	EPA 5030	8020	3	100	NA	9/3/99	3100	

Approved By:	PG	Date: 09/08/99
11 ,		

IS22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Sample Matrix:

Water

Service Request: S9902594

Date Collected: 8/24/99

Date Received: 8/25/99

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-1(17)

Lab Code:

S9902594-002

Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	9/4/99	190	
Benzene	EPA 5030	8020	0.5	1	NA	9/4/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	9/4/99	4.4	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	9/4/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	9/4/99	1.1	
Methyl tert -Butyl Ether	EPA 5030	8020	3	250	NA	9/3/99	15000	٠

	MI	Date: D9/08/99
Approved By:	701	Date. O 17001 (

1S22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Service Request: \$9902594 Date Collected: 8/24/99

Sample Matrix:

Water

Date Received: 8/25/99

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-3(14)

Lab Code:

S9902594-003

Test Notes:

Units: ug/L (ppb)

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	9/4/99	200	
Benzene	EPA 5030	8020	0.5	1	NA	9/4/99	0.6	
Toluene	EPA 5030	8020	0.5	1	NA	9/4/99	5.6	
Ethylbenzene	EPA 5030	8020	0.5	ī	NA	9/4/99	0.6	
Xylenes, Total	EPA 5030	8020	0.5	i	NA	9/4/99	1.7	
Methyl tert -Butyl Ether	EPA 5030	8020	3	250	NA	9/3/99	22000	

pproved By:	M	Date:	09/02/99
Tr			

1S22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Sample Matrix:

Water

Service Request: S9902594

Date Collected: NA

Date Received: NA

BTEX, MTBE and TPH as Gasoline

Sample Name:

Method Blank

Lab Code:

S990902-WB1

Test Notes:

Units: ug/L (ppb)

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	9/2/99	ND	
Benzene	EPA 5030	8020	0.5	1	NA	9/2/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	9/2/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	9/2/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	9/2/99	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	3	1	NA	9/2/99	ND	

Approved By:	n	Í	Date:	09/08/99
11		T.		

tS22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Sample Matrix:

Water

Service Request: S9902594

Date Collected: NA

Date Received: NA

BTEX, MTBE and TPH as Gasoline

Sample Name:

Method Blank

Lab Code:

S990904-WB2

Test Notes:

Units: ug/L (ppb)

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	9/4/99	ND	
Benzene	EPA 5030	8020 .	0.5	1	NA	9/4/99	ND	
Toluene	EPA 5030	8020	0.5	1	NA	9/4/99	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	9/4/99	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	9/4/99	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	3	1	NA	9/4/99	ND	

Approved By:	M	Date:	09/08/99	-
approved By:	(M	Date:	04108 99	-

IS22/020597p

QA/QC Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Sample Matrix:

Water

Service Request: S9902594 Date Collected: NA

Date Received: NA

Date Extracted: NA

Date Analyzed: NA

Surrogate Recovery Summary BTEX, MTBE and TPH as Gasoline

Prep Method: Analysis Method:

EPA 5030

8020

CA/LUFT

Units: PERCENT

Basis: NA

Sample Name	Lab Code	Test Notes	Percent 4-Bromofluorobenzene	Recovery a,a,a-Trifluorotoluene
MW-2(13)	\$9902594-001	•	102	100
MW-1(17)	S9902594-002		106	93
MW-3(14)	S9902594-003		111	93
Lab Control Sample	S990904-LCS		105	102
Lab Control Sample	S990904-DLCS		99	102
Lab Control Sample	S990904-LCS		91	113
Lab Control Sample	S990904-DLCS		87	113
Method Blank	S990902-WB1	•	93	115
Method Blank	S990904-WB2		93	100

CAS Acceptance Limits:

69-116

72-139

Approved By:	M	Date: _	09/09/99
	¥ -		

SUR2/020397p

QA/QC Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Sample Matrix:

Water

Service Request: S9902594

Date Collected: NA Date Received: NA Date Extracted: NA

Date Analyzed: 9/2/99

Laboratory Control /Duplicate Laboratory Control Sample Summary

BTE

Sample Name:

Lab Control Sample

Units: ug/L (ppb)

Lab Code:

S990904-LCS,

Basis: NA

Test Notes:

S990904-DLCS

Percent Recovery

Analyte	Prep Method	Analysis Method	MRL	Spike MS	e Level DMS	Sample Result	Spike MS	Result DMS	MS	DMS	CAS Acceptance Limits	Relative Percent Difference
Benzene	EPA 5030	8020	0.5	25	25	ND	27	26	108	104	75-135	4
Toluene	EPA 5030	8020	0.5	25	25	ND	24	24	96	96	73-136	<1
Ethylbenzene	EPA 5030	8020	0.5	25	25	ND	26	26	104	104	69-142	<1

Approved By:	(AT	Date:	09/08/99
tpproved 23.			

DMS/020597p

QA/QC Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Sample Matrix: Water

Service Request: S9902594

Date Collected: NA

Date Received: NA

Date Extracted: NA

Date Analyzed: 9/4/99

Laboratory Control /Duplicate Laboratory Control Sample Summary

TPH as Gasoline

Sample Name: Lab Control Sample

Units: ug/L (ppb)

Lab Code:

S990904-LCS,

S990904-DLCS

Basis: NA

Test Notes:

Percent Recovery

											CAS	Relative	
	Prep	Analysis		Spike	Level	Sample	Spike	Result			Acceptance	Percent	Result
Analyte	Method	Method	MRL	MS	DMS	Result	MS	DMS	MS	DMS	Limits	Difference	Notes
Gasoline	EPA 5030	CA/LUFT	50	250	250	ND	253	24 1	101	96	75-135	5	

Approved By:	M	Date:	09/04/99

DMS/020597p

QA/QC Report

Client:

ARCO Products Company

Project:

TO#24118.00/RAT8/6041 DUBLIN

Service Request: S9902594

Date Analyzed: 9/2/99

Initial Calibration Verification (ICV) Summary BTEX, MTBE and TPH as Gasoline

Sample Name:

ICV

Units: ug/L (ppb)

Lab Code:

ICVI

Test Notes:

Basis: NA

ICV Source:					CAS								
	Percent Recovery												
	Prep	Analysis	True		Acceptance	Percent	Result						
Analyte	Method	Method	Value	Result	Limits	Recovery	Notes						
TPH as Gasoline	EPA 5030	CA/LUFT	250	240	85-115	96							
Benzene	EPA 5030	8020	25	26	85-115	104							
Toluene	EPA 5030	8020	25	24	85-115	96							
Ethylbenzene	EPA 5030	8020	25	25	85-115	100							
Xylenes, Total	EPA 5030	8020	75	74	85-115	99							
Methyl tert -Butyl Ether	EPA 5030	8020	25	22	85-115	. 88							

Approved By:	fr	Date:	09/08/99
	V		

ICV/032196

ARCC	Division of Atlantic/Hichrield Company															of Custody								
ARCO Fac			741			DUK			•	Proj. (Cor	ect ma	nager	6	on	1/0	101	100	-1/4	00	·/				Laboratory Name
ARCO eng	gineer	Do	///					phone no. CO)		Tele	phone	no	100	1/10	77	7/7/	Fax	no.	Suc	$(\mathcal{Z})_{\ell}$	1,27	2-0	:71	Contract Number
Consultani	name	PG	<u> </u>		$\frac{1}{2}$	-x1/-	Tele (AR	Ad	dress onsultant) Z	7/001	I D	9 64		142	$\frac{570}{4}$		1 (0011		100	201°	7.7.	0/1	(17	
		OI	<i>⊖γ''</i> Γ	VCAY	1 <i>CA</i> E	21 V	250	(Cc	onsultant)/	70	135 C	IO		WCA1	/ 4	-/(/	// <u>U</u>	CIIC.	CIN/	7	-/ /	740	016	Method of shipment
		_*		Matrix		Prese	rvation				II ME			ш				ō	7/010	74210				Sampler
.D.		Container no						왕	22	50	BTEXTPH 1 AC LOT EPA MGOZIBEZODO I	ad 8016 sel 🗇	ase 13.2 O	TPH EPA 418.1/SM 503E	10	Q	e	Page 1	CAM Metals EPA 6010/7000 TTLCID STLCID	HSC 7420				Sampler Will deliver
Sample I.D	Lab no.	itain	Soil	Water	Other	Ice	Acid	Sampling date	Sampling time	BTEX 602/EPA 8020	M602/	Modifie D Die	d Green	418.1/	501/80	EPA 624/8240	625/B2	_ ≥ 	Metal:	Org/ d EPA				deliver
San	Lab	S						Samp	Samp	BTE 602/E		TPH Gas	<u>8</u> 5	FPA	EPA	EPA	a.	10 E	CAM T	Lead				Special Detection
11W-20	(3)	2	0	V		×	40	8/24/59	1050		X							_						Limit/reporting
41X-10		2	(g)			$\frac{1}{2}$	HCL		1115		X						,							Lowest
1,11/.2	· /	$\frac{2}{2}$	(a)				HCL						_											Possible
MW-31	19)			×		<u> </u>	176	- V -	1140		×-		 											Special QA/QC
																								As
									ļ			-						-						Normal
			ļ	ļ							<u> </u>					<u> </u>		ļ	<u> </u>					100111101
													ļ		<u> </u>		<u> </u>		ļ <u>.</u>					Remarks
								ļ									<u> </u>							RAT 8
																<u> </u>								2-100 1110
									1								İ							RAT 8 2-40m1/400 VOAS
		1	1																					VOAS
				†				<u> </u>																· ·
			 		<u> </u>		<u> </u>		1									1						#791668
		├─	-	 	 		 			-	-				_		-	┧┈┈	t					Lab Number
		 	 	 	 		 	-	-	-	-	-	ļ	 			\vdash	-	-	 				Turnaround Time:
	ļ	<u> </u>	—		 	ļ			<u> </u>	-	ļ	-	-	<u> </u>	<u> </u>	-		-	ļ		<u> </u>		<u> </u>	-
			<u> </u>		<u> </u>				ļ	ļ		<u> </u>	ļ	<u> </u>	ļ	_		┞						Priority Rush 1 Business Day □
		l					<u></u>									<u> </u>		<u> </u>	<u> </u>					Rush
					Ī				6								1							2 Business Days
	<u> </u>	Ь		<u> </u>	<u> </u>	!	<u> </u>	<u>. l</u>	<u> </u>	T	peratu	** ***	sissads	- T		$\frac{1}{\sqrt{a}}$	ارا	44	<u> </u>	I	<u> </u>		<u> </u>	Expedited
Condition of sample:											·		:DAA	37	ul.	ن ز	19	7	,					5 Business Days
Relinguished by sampler Date Time										Received by Flastes 9;							150) c ~~		Standard				
										Received by								-				10 Business Days		
Relinguis	hed by						Date		Time	Rece	eived t	y labo	ratory				Date		·	Time				

APPENDIX C FIELD DATA SHEETS

FIELD REPORT DEPTH TO WATER/FLOATING PRODUCT SURVEY

PROJECT #: 792239 STATION ADDRESS: 7249 Village Parkway, Dublin DATE: 8/24/99

ARCO STATION #: 6041 FIELD TECHNICIAN: Manuel Gallegos DAY: Tuesday

ļ												
		Well	Welt			Туре	FIRST	SECOND	DEPTH TO	FLOATING	WELL	
DTW	WELL	Вох	Lid	Gasket	Lock	Of Well	DEPTH TO	DEPTH TO	FLOATING	PRODUCT	TOTAL	
Order	ID	Seal	Secure	Present	Number	Cap	WATER	WATER	PRODUCT	THICKNESS	DEPTH	COMMENTS
<u>. </u>					.,		(feet)	(feet)	(feet)	(feet)	(feet)	
1	MW-4	OK	15/16	YES	ARCO	LWC	9,50	9,50	ND	NI	17.3	
2	MW-5	OIC	G- 5	NO	3900	LWC	8:10	5,10	1/)	ND	14.3	Installed new lock organ
3	MW-6	CIC	G-5	NO	3900	LWC	9,65	9.65	_	$N_l)$	15.4	installed new lock + can
4	VW-2	OIC	15/16	YES	3900	LWC	9.20	\$.20	ND	ND	8.8	Installed new lock + cap Installed new lock + cap Installed new lock + cap
5	MW-2	OK	15/16	YES	NONE	LWC	8.68	8.68	ND	1/1)		needs new well box
6	MW-1	OK	15/16	YES	E-KEY	envcap	10.40	10.40	ND	NI		
7	MW-3	OK	15/16	YES	E-KEY	envcap	9,45	9.45	ND	ND	14,5	installed new cap
												,

SURVEY POINTS ARE TOP OF WELL CASINGS

RECEIVED
AUG 3 1 1999

WATER SAMPLE FIELD DATA SHEET Rev. 1/107 PROJECT NO: 792239 SAMPLE ID: MW-1(17) PURGED BY : Manuel Gallegos CLIENT NAME: ARCO #6041 EMCON SAMPLED BY: Manuel Gallegos LOCATION: Dublin, California Leachate ____ TYPE: Groundwater X Surface Water _____ CASING ELEVATION (feet/MSL): N/A VOLUME IN CASING (gal.): 4,50 DEPTH OF WELL (feet): 17,3 CALCULATED PURGE (gal.): 13,52 DEPTH OF WATER (feet): 10,40 ACTUAL PURGE VOL. (gal.): DATE PURGED: 8-24-99 END PURGE: DATE SAMPLED : ______ SAMPLING TIME : ____ / / ___ TURBIDITY VOLUME TEMPERATURE COLOR TIME E.C. (µmhos/cm@25°c) (visual) (visual) (2400 HR) (gal.) (units) 1108 odor: Slish + OTHER: N/A (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump Bailer (Teflon) 2" Bladder Pump Bailer (Teflon) Bomb Sampler Bailer (Stainless Steel) ✓ Bailer (PVC) Centrifugal Pump Submersible Pump Dipper Submersible Pump Bailer (Stainless Steel) Dedicated Well WizardÖ Well WizardÔ Dedicated Other: ___ Disposable Teflon Bailer Other: WELL INTEGRITY: OK LOCK: **3**500 REMARKS: all samples taken pH, E.C., Temp. Meter Calibration: Date: 8/24/99 Time: Meter Serial No.: 87m E.C. 1000 / pH 7 / pH 10 / pH 4 / Temperature °F SIGNATURE THE PAGE 1 OF 3

WATER SAMPLE FIELD DATA SHEET Rev. 1/107 PROJECT NO : 792239 SAMPLE ID : MW-2 (*j* ξⁱ) CLIENT NAME: ARCO #6041 PURGED BY : Manuel Gallegos EMCON SAMPLED BY: Manuel Gallegos LOCATION: Dublin, California Surface Water Leachate TYPE: Groundwater X CASING DIAMETER (inches): 2 _____ 3 ___ 4 __X 4.5 6 Other CASING ELEVATION (feet/MSL) : N/A VOLUME IN CASING (gal.) : ____ DEPTH OF WELL (feet): 13.9 CALCULATED PURGE (gal.): ACTUAL PURGE VOL. (gal.): END PURGE: 1045 DATE PURGED: 56-24-99 SAMPLING TIME: _____/050 DATE SAMPLED: TURBIDITY E.C. TEMPERATURE COLOR TIME VOLUME (°F) (visual) (visual) (2400 HR) (units) (µmhos/cm@25°c) (gal.) 6.36 308 recharge 6.112 ODOR: Strong N/A OTHER: (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-i): SAMPLING EQUIPMENT **PURGING EQUIPMENT** 2" Bladder Pump Bailer (Teflon) 2" Bladder Pump Bailer (Teflon) Bailer (Stainless Steel) ✓ Bailer (PVC) Bomb Sampler Centrifugal Pump Dipper Submersible Pump Submersible Pump Bailer (Stainless Steel) Well WizardÔ _____ Dedicated Well WizardÔ Dedicated Other: Disposable Teflon Bailer Other: LOCK: NONE. WELL INTEGRITY: OKREMARKS: all Samples taken pH. E.C., Temp. Meter Calibration: Date: 8/24/95 Time: 1040 Meter Scrial No.: \$7m PH 7 707 700 PH 10 1000 1 1000 PH 4 400 1400 E.C. 1000 10 21 / 1000 Temperature °F 74. REVIEWED BY: MAP PAGE Z OF 3 SIGNATURE:

Rev. 1/107 WATER SAMPLE FIELD DATA SHEET PROJECT NO : 792239 SAMPLE ID : MW-3 (141) CLIENT NAME : ARCO #6041 PURGED BY : Manuel Gallegos EMCON SAMPLED BY : Manuel Gallegos LOCATION : Dublin, California TYPE: Groundwater X Surface Water Leachate Other CASING DIAMETER (inches): 2 3 4 X 4.5 6 Other ELEVATION (feet/MSL): N/A VOLUME IN CASING (gal.): 3.6 DEPTH OF WELL (feet): 74.5 CALCULATED PURGE (gal.): 9, CASING ELEVATION (feet/MSL): DEPTH OF WATER (feet): 645 ACTUAL PURGE VOL. (gal.): 4/. 0 DATE PURGED: 8-24-99 END PURGE: //35 SAMPLING TIME: //40 DATE SAMPLED: TURBIDITY VOLUME E.C. TEMPERATURE COLOR TIME (µmhos/cm@25°c) (visual) (visual) (2400 HR) (gal.) (units) 3.5 6.70 2253 82./ well Dry at 11:0 gallors OTHER: N/A ODOR: Moderak (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT **PURGING EQUIPMENT** 2" Bladder Pump Bailer (Teflon) 2" Bladder Pump Bailer (Teflon) Bomb Sampler X Bailer (PVC) Bailer (Stainless Steel) Centrifugal Pump Submersible Pump Dipper Submersible Pump Bailer (Stainless Steel) Well WizardŌ Dedicated Well WizardÔ Dedicated Other: ____ Disposable Teflon Bailer Other: WELL INTEGRITY: OK REMARKS: all samples taken pH, E.C., Temp. Meter Calibration: Date: \(\frac{\frac{9}{24/99}}{\frac{1}{24/99}} \) Time: \(\text{Meter Serial No.: } \frac{\frac{5}{27}}{\frac{1}{2}} \) E.C. 1000 \(\frac{7}{2} \) pH 7 \(\frac{1}{2} \) pH 10 \(\frac{7}{2} \) pH 4 \(\frac{7}{2} \) Time: Meter Serial No.: 87m Temperature °F SIGNATURE: Man 1 April REVIEWED BY: 27 PAGE 3 OF 3

EMCON A	Associates -	Field Service	es			Hist	orical Monit	oring Well Data
1921 Ring	jwood Avenu	ie		1999)			ARCO 6041
_	California							792239
Well ID	Quarter	Date	Purge Volume (gallons)	Did well dry	Well Contained Product	First Second Third Fourth	Gallons 25.50 0.00 16.50 0.00	
MW-1	First	02/17/99	7.50	YES	NO			
	Second Third Fourth	NA 08/24/99	0.00 7.00	NA YES	NA NO			
MW-2	First Second Third Fourth	02/17/99 NA 08/24/99	13.50 0.00 5.50	NO NA YES	NO NA NO			
MW-3	First Second Third Fourth	02/17/99 NA 08/24/99	4.50 0.00 4.00	YES NA YES	NO NA NO			
MW-4	First Second Third Fourth	02/17/99 NA 08/24/99	0.00 0.00 0.00	NA NA NA	NO NA NO			
MW-5	First Second Third Fourth	02/17/99 NA 08/24/99	0.00 0.00 0.00	NA NA NA	NO NA NO			
MW-6	First Second Third Fourth	02/17/99 NA 08/24/99	0.00 0.00 0.00	NA NA NA	NO NA NO			
VW-2	First Second Third Fourth	02/17/99 NA 08/24/99	0.00 0.00 0.00	NA NA NA	NO NA NO			
					S	team water (gal)		
1.	1			1				

ARCC	Pro	oduc	ts C	om _l	pany ompany			 T	ask Order I	vo. 7	41	18	0	0								Cha	ain	of Custody
ARCO Fac			741			Ded	din			Proje	ect ma	nager t)	6	01	1/	1/1/	10	1/2	00	~/\				Laboratory Name
ARCO en	gineer	Da	(1)		ole		Teler (AR	ohone no.		Tele _l (Con	phone	no t)	16	110	2.7	// !\ ?/`}	Fax (Con	no. sultani	SUC	TG 10	1,7.7	<u>'-05</u>	2/	Contract Number
Consultan	t name	Glo	=11	ICIV	1/16	211/6	-en		iress nsultant) /	70	1 R	10	المهال	1 /()]	i H	10	10	ak	on	d (7 <u>57</u>	046	17	
				Matrix	11.41		rvation		, <u>,</u>		inee.		1		/				7000	تِ ا			, ,	Method of shipment
Ċ.		jo.					1				17, /1 18015	<u>5</u>	02	503E				J VOA	% 6010 X7	120742				Sampler
Sample f.D	no.	Container no.	Soil	Water	Other	lce	Acid	date	g bime	A 8020	PHIN	odified 8 Diesel	Grease 7 413.	8.1/SM	1/8010	4/8240	5/8270	VOA!	etals El	PP 7				Sampler Will deliver
Samı	Labr	Cont					•	Sampling date	Sampling time	BTEX 602/EPA 8020	BTEX/I EPA ME	TPH MA Gas 🗖	Oil and Grease 413.1 🖸 413.2 🗇	TPH EPA 41	EPA 601/8010	EPA 624/8240	EPA 625/8270	TCLP Metals(SA E	Lead Org/DHSCI Lead EPA 7420/7421CI				Special Detection
ИW-20	マ)	7		X		×	HCL	8/24/54			X													Limit/reporting
411/-10		7		×		\ \	HCL		1115		X													Lowest
41W-30		2				$\langle \cdot \rangle$	HCI		1140															Possible
- 1/2/	1-1-4	-6					1	\/	7.6.1.3				 											Special QA/QC
																	 	 						As
						 																		Normal
						, , ,			<u>.</u>							<u> </u>	<u> </u>		<u> </u>					Remarks
									<u> </u>				<u> </u>			ļ	<u> </u>			<u> </u>			-	RAT &
	<u></u>										<u>.</u>						-	_		_				2-40m1/140
<u>,</u>			1							\vdash	<u> </u>				 	 	 			\vdash				2-40m1HCC VOAs
																								H791668
					1																			Lab Number
																								-
																							•	Tumaround Time;
																								Priority Rush
							,																	1 Business Day
																								Rush 2 Business Days □
Condition of sample:											Temperature received:									Expedited				
										Rece	Received by							·	5 Business Days 🗆					
										Received by \$125/85 9:50								Standard 10 Business Days						
ļ · ·										Rece	Received by laboratory Date Time							i						