

99 MM - 5 AM 2-22

December 30, 1998 Project 20805-127.006

Mr. Paul Supple **ARCO Products Company** P.O. Box 6549 Moraga, California 94570

Quarterly Groundwater Monitoring Report, Third Quarter 1998, for ARCO Service

Station No. 2111, located at 1156 Davis Street, San Leandro, California

Dear Mr. Supple:

Pinnacle Environmental Solutions, a division of EMCON (Pinnacle), is submitting the attached report which presents the results of the third quarter 1998 groundwater monitoring program at ARCO Products Company (ARCO) Service Station No. 2111, located at 1156 Davis Street, San Leandro, California. The monitoring program complies with Alameda County Health Care Services Agency (ACHCSA) requirements regarding underground tank investigations.

LIMITATIONS

No monitoring event is thorough enough to describe all geologic and hydrogeologic conditions of interest at a given site. If conditions have not been identified during the monitoring event, results should not be construed as a guarantee of the absence of such conditions at the site, but rather as the product of the scope and limitations of work performed during the monitoring event.

Please call if you have questions.

Sincerely,

Pinnacle

cc:

Project Manager

son, R.G. Joh enior Project Supervisor

Quarterly Groundwater Monitoring Report, Third Quarter 1998

Kevin Tinsley, ACHCSA

Mike Bakaldin, San Leandro Hazardous Materials Program

WC\S:\ARCO\2111\QTRLY\2111Q398.DOC\GV:1

ARCO QUARTERLY MONITORING REPORT

Station No.:	2111	Address:	1156 Davis Street, San Leandro, California	
		Pinnacle Project No.		
			Paul Supple /(925) 299-8891	
P	'innacle Project	t Manager/Phone No.:	Glen VanderVeen /(925) 977-9020	
	Primary Agen	cy/Regulatory ID No.:	ACHCSA /Kevin Tinsley	

WORK PERFORMED THIS QUARTER (THIRD - 1998):

- 1. Prepared and submitted quarterly groundwater monitoring report for second quarter 1998.
- 2. Performed quarterly groundwater monitoring and sampling for third quarter 1998.

WORK PROPOSED FOR NEXT QUARTER (FOURTH - 1998):

- 1. Prepare and submit quarterly groundwater monitoring report for third quarter 1998.
- 2. Perform quarterly groundwater monitoring and sampling for fourth quarter 1998.

QUARTERLY MONITORING:

Current Phase of Project:	Quarterly Groundwater Monitoring
Frequency of Sampling:	Quarterly: MW-1 through MW-7
Frequency of Monitoring:	Quarterly (groundwater)
Is Floating Product (FP) Present On-site:	☐ Yes ☒ No
Bulk Soil Removed to Date:	Unknown
Bulk Soil Removed This Quarter:	None
Water Wells or Surface Waters,	
within 2000 ft., impacted by site:	None
Current Remediation Techniques:	None
Average Depth to Groundwater:	14.7 feet
Groundwater Flow Direction and Gradient (Average):	0.01 ft/ft toward Northwest

ATTACHMENTS:

- Table 1 Historical Groundwater Elevation and Analytical Data, Petroleum Hydrocarbons and Their Constituents
- Figure 1 Groundwater Analytical Summary Map
- Figure 2 Groundwater Elevation Contour Map
 Appendix A Sampling and Analysis Procedures
- Appendix B Certified Analytical Report and Chain-of-Custody Documentation
- Appendix C Field Data Sheets

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents

Well Designation	Water Level Field Date	Top of Casing Elevation	Depth to Water	Groundwater Elevation	Floating Product Thickness	Groundwater Flow Direction	Hydraulic Gradient	Water Sample Field Date	TPHG LUFT Method	Bearene EPA 8020	Toluene EPA 8020	Ethylbenzene EPA 8020	Total Xylenes EPA 8020	MTBE EPA 8020	TRPII EPA 418.1	TPHD LUFT Method
		n-MSL	feet	ft-MSL	[eet	MWN	n/n		μg/L	μg/L	μg/L	µg/L	μg/L	μg/L	µg/L	μg/I
MW-1	08-01-95	39,60	17.45	22.15	ND	NR	NR	05-01-95	<50	<0.5	<0.5	<0.5	<0.5			
MW-1	12-14-95	39.60	17.09	22.51	ND	W	0.002	12-14-95	<50	< 0.5	< 0.5	< 0.5	<0.5	<3		
MW-1	03-21-96	39.60	14.72	24.88	ND	wsw	0.065	03-21-96	<50	< 0.5	<0.5	< 0.5	<0.5	<3		
MW-I	05-24-96	39,60	15.94	23.66	ND	W	0.003	05-24-96	<50	< 0.5	<0.5	< 0.5	<0.5	<3		
MW-I	08-09-96	39.60	17.89	21.71	ND	WNW	0.01	08-09-96	<50	< 0.5	<0.5	<0.5	< 0.5	<3		- 8
MW-1	11-06-96	39.60	13.66	20.94	ND	WNW	0.007	11-06-96	<50	< 0.5	<0.5	<0.5	<0.5	<3		11.5
MW-1	03-24-97	39.60	16.13	23.47	ND	w	0.005	03-24-97	<50	< 0.5	<0.5	< 0.5	< 0.5	<3		
MW-1	05-27-97	39.60	17.23	22.37	ND	NNW	0.006	05-28-97	< 50	< 0.5	< 0.5	< 0.5	<0.5	<3		=0
MW-1	08-07-97	39.60	13.65	20.92	ND	W	0:009	05-07-97	<50	< 0.5	< 0.5	< 0.5	< 0.5	<3		- 2
MW-1	11-10-97	39.60	19.19	20.41	ND	W	0.002	11-10-97	<50	< 0.5	< 0.5	< 0.5	<0.5	<3		
MW-1	02-16-95	39.60	12.61	26.99	ND	SSW	0.013	02-16-98	<50	<0.5	< 0.5	< 0.5	< 0.5	<3		
MW-1	04-15-98	39.60	14.30	25.30	ND	wsw	0.014	04-15-98	<50	< 0.5	<0.5	<0.5	<0.5	<3		- 2
MW-1	07-24-98	39.60	16.40	23.20	ND	NW	10.0	07-24-98	<50	<0.5	<0.5	<0.5	<0.5	<3		-
MW-2	08-01-95	37,99	15.67	22.32	ND	NR	NR	08-01-95	23000	1300	310	500	3500			
MW-2	12-14-95	37.99	15.36	22.63	ND	w	0.002	12-14-95	7300	900	25	180	1000	<200		- 2
MW-2	03-21-96	37.99	12.84	25.15	ND	W5W	0.005	03-21-96	9600	850	30	280	1400	250	5.0	- 2
MW-2	05-24-96	37,99	14.03	23.96	ND	w	0.003	05-24-96	2300	300	<5	73	310	<25		
MW-2	03-09-96	37.99	16.10	21.59	ND	WNW	0.01	08-09-96	2800	290	6	75	320	50	- 27	100
MW-2	11-05-96	37.99	16.93	21.01	ND	WNW	0.007	11-06-96	750	76	<1	15	51	110		- 5
MW-2	03-24-97	37.99	14.22	23.77	ND	w	0.005	03-24-97	790	18	<1	2	6	230		-
MW-2	05-27-97	37.99	15.42	22.57	ND	NNW	0.006	05-25-97	750	14	<1	<1	10	150		
MW-2	05-07-97	37.09	16.92	21.07	ND	W	0.009	08-07-97	360	31	<2.5	<2.5	15	260	1.00	
MW-2	11-10-97	37.99	17.52	20.47	ND	w	0.002	11-10-97	1300	82	<5	14	49		- 193	
MW-2	02-16-95	37.99	12.04	25.95	ND	SSW	0.013	02-16-98	<2500	<25	<25	<25	<25	550	- 11	
MW-2	04-15-98	37.99	12.34	25.65	ND	WSW	0.014	04-15-98	<10000	<100	<100	<100	<100	4200 7300	2.0	
MW-2	07-24-98	37,99	14.45	23.54	ND	NW	0.01	07-24-98	42500	<25	<25	<25	<25	1500	181	

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents

Well Designation	Water Level Field Date	Top of Casing Elevation	Depth to Water	Groundwater Elevation	Roaling Product Thickness	Groundwater Flow Direction	Hydraulic Gradient	Water Sample Field Date	TPHG LUFT Method	Benzene EPA 8020	Toluene EPA 8020	Ethylbenzene EPA 8020	Total Xylenes EPA 8020	MTBE EPA 8020	TRPH EPA 418.1	TPHD LUFT Method
		n-MSL	feet	n-MSL	feet	MWN	n/n		μg/L	μg/L	μg/L	μg/L	μg/L	μ g/ L	μg/L	μg/I
MW-3	08-01-95	39.32	17.00	22.32	ND	NR	NR	08-01-95	<50	< 0.5	<0.5	<0.5	<0.5		600	76
MW-3	12-14-95	39.32	16.70	22.62	ND	w	0.002	12-14-95	<50	< 0.5	<0.5	<0.5	<0.5	<3	<500	
MW-3	03-21-96	39.32	14.17	25.15	ND	wsw	0.005	03-21-96	<50	<0.5	<0.5	< 0.5	<0.5	<3	<500	<50
MW-3	05-24-96	39.32	15.30	24.02	ND	W	0.003	05-24-96	< 50	< 0.5	<0.5	< 0.5	<0.5	<3	<500	<50
MW-3	05-09-96	39.32	17.58	21.74	ND	WNW	0.01	08-09-96	<50	<0.5	<0.5	<0.5	<0.5	<3	<500	<50
MW-3	11-06-96	39.32	18.33	20,99	ND	WNW	0.007	11-06-96	<50	< 0.5	<0.5	<0.5	<0.5	<3		L É
MW-3	03-24-97	39.32	15.44	23.88	ND	W	0.005	03-24-97	<50	<0.5	<0.5	<0.5	<0.5	<3	- 11	
MW-3	05-27-97	39.32	16.75	22.57	ND	NNW	0.006	05-28-97	<50	< 0.5	<0.5	<0.5	<0.5	<3		
MW-3	08-07-97	39.32	18.35	20.97	ND	w	0.009	08-07-97	<50	< 0.5	<0.5	< 0.5	<0.5	<3		
MW-3	11-10-97	39.32	15.33	20.49	ND	W	0.002	11-10-97	<50	< 0.5	<0.5	<0.5	<0.5	<3		
MW-3	02-16-98	39.32	11.99	27.33	ND	SSW	0.013	02-16-98	<50	< 0.5	<0.5	<0.5	<0.5		- "	-
MW-3	04-15-98	39.32	13.75	25.57	ND	WSW	0.014	04-15-98	<50	<0.5	<0.5	<0.5	<0.5	<3		
MW-3	07-24-98	39.32	15.90	23,42	ND	NW	0.01	07-24-95	<50	<0.5	<0.5	<0.5	₹0.5	<3 <3		
MW-4	08-01-95	35.10	15.65	22.45	ND	NR	NR	08-01-95	< 50	.0.5						
MW-4	12-14-95	38.10	15.35	22.75	ND	W	0.002	12-14-95		<0.5	<0.5	< 0.5	<0.5	**		
MW-4	03-21-96	35.10	12.74	25.36	ND	wsw	0.005	03-21-96	< 50 < 50	<0.5	<0.5	<0.5	<0.5	<3	- 1	100
MW-4	05-24-96	35.10	14.03	24.07	ND	w	0.003	05-24-96		<0.5	<0.5	< 0.5	<0.5	<3		**
MW-4	08-09-96	38.10	16.10	22.00	ND	WNW	0.01	08-09-96	<50 <50	<0.5	<0.5	<0.5	<0.5	<3		
MW-4	11-06-96	35.10	17.00	21.10	ND	WNW	0.007	11-06-96		<0.5	<0.5	< 0.5	< 0.5	<.3		(0)
MW-4	03-24-97	35.10	14.21	23.39	ND	W	0.005	03-24-97	<50 <50	<0.5	<0.5	<0.5	<0.5	<3		+1
MW-4	05-27-97	38.10	15.38	22.72	ND	NNW	0.006	05-28-97		<0.5	<0.5	<0.5	×0.5	<3		- 124
MW-4	08-07-97	38.10	16.95	21.15	ND	W	0.009	03-23-97	<50	<0.5	<0.5	<0.5	<0.5	<3		
MW-4	11-10-97	38.10	17.53	20.57	ND	W	0.002	11-10-97	<50 <50	<0.5	<0.5	<0.5	<0.5	<3		.07
MW-4	02-16-98	38.10	10.65	27.45	ND	SSW	0.013	02-16-98	<50	<0.5	<0.5	<0.5	<0.5	<3		- 0.5
MW-4	04-15-98	38.10	12.20	25.90	ND	WSW	0.014	04-15-98		< 0.5	<0.5	< 0.5	<0.5	<3		
MW-4	07-24-98	38.10	14.47	23.63	ND	NW	0.01	07-24-98	<50 <50	< 0.5	<0.5	< 0.5	<0.5	<3		40

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents

Well Designation	Water Level Field Date	Top of Casing Elevation	Depth to Water	Groundwater Elevation	Floating Product Thickness	Groundwater Flow Direction	Hydraulic Gradient	Water Sample Field Date	TPHG LUFT Method	Benatice EPA 8020	Toluene EPA 8020	Ethylbenzene EPA 8020	Total Xylenes EPA 8020	NTINE EPA 8020	TRPH EPA 418.1	TPHD LUFT Method
		B-MSL	feet	ñ-MSL	feet	MWN	n/n		μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L
MW-5	03-21-96	37.21	12.60	24.61	ND	wsw	0.005	03-22-96	<50	<0.5	<0.5	<0.5	<0.5	82		
MW-5	05-24-96	37.21	13.71	23.50	ND	W	0.003	05-24-96	<50	< 0.5	<0.5	<0.5	<0.5	7		
MW-5	08-09-96	37.21	15.60	21.61	ND	WNW	0.01	08-09-96	<50	<0.5	<0.5	<0.5	<0.5	8		**
MW-5	11-06-96	37.21	16.36	20.85	ND	WNW	0.007	11-06-96	<50	<0.5	<0.5	<0.5	<0.5	100	**	- 1
MW-5	03-24-97	37.21	13.87	23.34	ND	W	0.005	03-24-97	<50	<0.5	<0.5	<0.5	<0.5	460		
MW-5	05-27-97	37.21	14,71	22.50	ND	NNW	0.006	05-28-97	<100	<1	<i< td=""><td><1</td><td><1</td><td>120</td><td></td><td></td></i<>	<1	<1	120		
MW-5	05-07-97	37.21	16.90	20.31	ND	W	0.009	08-07-97	<250	<2.5	<2.5	<2.5	<2.5	250	-1-	- 33
MW-5	11-10-97	37.21	16.88	20.33	ND	W	0.002	11-10-97	<1000	<10	<10	<10	<10	770		- 55
MW-5	02-16-98	37.21	10.56	26.65	ND	SSW	0.013	02-16-95	<200	<2	<2	<2	<2	230		
MW-5	04-15-98	37.21	12.20	25.01	ND	WSW	0.014	04-15-98	<500	<5	<5	<5	<5	900		**
MW-5	07-24-98	37.21	14:20	23.01	ND	NW	0.01	07-24-95	<500	45	<5	<5	<5	570		- 1
125m2														5,0		
MW-6	03-21-96	37.11	11.55	25.56	ND	WSW	0.005	03-22-96	€50	< 0.5	1.9	< 0.5	< 0.5	<3		
MW-6	05-24-96	37.11	12.80	24.31	ND	W	0.003	05-24-96	<50	< 0.5	< 0.5	< 0.5	< 0.5	6	3.25	
MW-6	08-09-96	37.11 No	of surveyed:	Car parked on	well	NR	NIK	08-09-96	Not sumpled: C	ar parked on	well			~	Acc	
MW-6	11-06-96	37.11 No	of surveyed:	Car parked on	well	NR	NR	11-06-95	Not surveyed: (
MW-6	03-24-97	37.11	13.06	24.05	ND	W	0.005	03-24-97	<50	< 0.5	<0.5	< 0.5	< 0.5	<3		
MW-6	05-27-97	37.[1	14.30	22.81	ND	NNW	0.006	05-28-97	<50	<0.5	< 0.5	< 0.5	<0.5	<3		
MW-6	08-07-97	37.11	16.40	20.71	ND	W	0.009	08-07-97	<50	< 0.5	<0.5	<0.5	<0.5	<3		**
MW-6	11-10-97	37.11	16.53	20.58	ND	W	0.002	11-10-97	<50	<0.5	< 0.5	< 0.5	<0.5	<3	100	100
MW-6	02-16-98	37.11	NR	NR	NR	SSW	0.013	02-16-98	Not sampled: c	er parked on					1.52	-
MW-6	04-15-98	37.11	10.95	26.16	ND	wsw	0.014	04-15-98	<50	< 0.5	<0.5	< 0.5	<0.5	<3		
MW-6	07-24-98	37.11	13.30	23.81	ND	NW	0.01	07-24-95	<50	< 0.5	<0.5	<0.5	<0,5	<3	-	

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents

Well Designation	Water Level Field Date	Top of Casing	n Depth to Water	-B Groundwater	Floating Product	Groundwater Row Direction	Hydraulic Gradient	Water Sample Field Date	TPHG	Benzene S EPA 8020	Toluene	Ethylbenzene EPA 8020	Total Xylenes	TEPA 8020	TRPH © EPA 418.1	TPHD LUFT Method
MW-7	03-21-96	38.68	13.32	25.36	ND	wsw	0.005	03-22-96	32000	870	450	970	4900	280		1/2
MW-7	05-24-96	38.68	14.58	24.10	ND	W	0.003	05-24-96	22000	570	40	42	1900	<200*	-	7472
MW-7	08-09-96	38.68	15.33	23.35	ND	WNW	0.01	08-09-96	14000	390	<10	180	470	<200*	44	
MW-7	11-06-96	38.68	16.95	21.73	ND	WNW	0.007	11-06-96	9500	440	<10	210	150	<100*		
MW-7	03-24-97	38.68	14.65	24.03	ND	W	0.005	03-24-97	6400	420	<10	260	13	480	10	- 10
MW-7	05-27-97	38,68	15.58	23.10	ND	NNW	0.006	05-28-97	5000	420	<5	230	10	460	12	74.0
MW-7	08-07-97	38.68	17.10	21.58	ND	W	0.009	08-07-97	3900	350	<5	200	10	330	64	-
MW-7	11-10-97	38.68	18.05	20.63	ND	W	0.002	11-10-97	5600	590	10	370	43	540		
MW-7	02-16-98	38.68	12.03	26.65	ND	ssw	0.013	02-16-98	<5000	390	<50	<50	61	4300	- 27	
MW-7	04-15-98	38,68	13.02	25.66	ND	wsw	0.014	04-15-98	<10000	<100	<100	<100	<100	8900		
MW-7	07-24-98	38.65	14.18	24.50	ND	NW	0.01	07-24-98	5800	180	<50	74	<50	4200	-	

ff-MSL elevation in feet, relative to mean sea level

MWN: ground-water flow direction and gradient apply to the entire monitoring well network

fl/fl: foot per foot

TPHG: total petroleum hydrocarbons as gasoline, California DHS LUFT Method

MTBE: Methyl test-butyl ether

TRPH: total recoverable petroleum hydrocarbons

TPHD: total petroleum hydrocarbons as diesel, California DHS LUFT Method

EPA: United States Environmental Protection Agency

ag/L: micrograms per liter

NR: not reported; data not available or not measurable

ND none detected


NW: Northwest


*: chromatogram fingerprint is not characteristic of diesel

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents

Well Designation Water Level Field Date	W. Top of Casing	Depth to Water	Groundwater	Hosting Product	Groundwater S Flow Direction	Hydraulic 국 Gradient	Water Sample Field Date	TPHG	Benzene F EPA 8020	Toluene E EPA 8020	E Ethylbenzene	Total Xylenes	MTBE E EPA 8020	TRPH P EPA 418.1	TPHD LUFT Method
---	------------------	----------------	-------------	-----------------	------------------------------	-------------------------	----------------------------	------	-----------------------	-----------------------	----------------	---------------	--------------------	---------------------	------------------

- -: not available or not analyzed

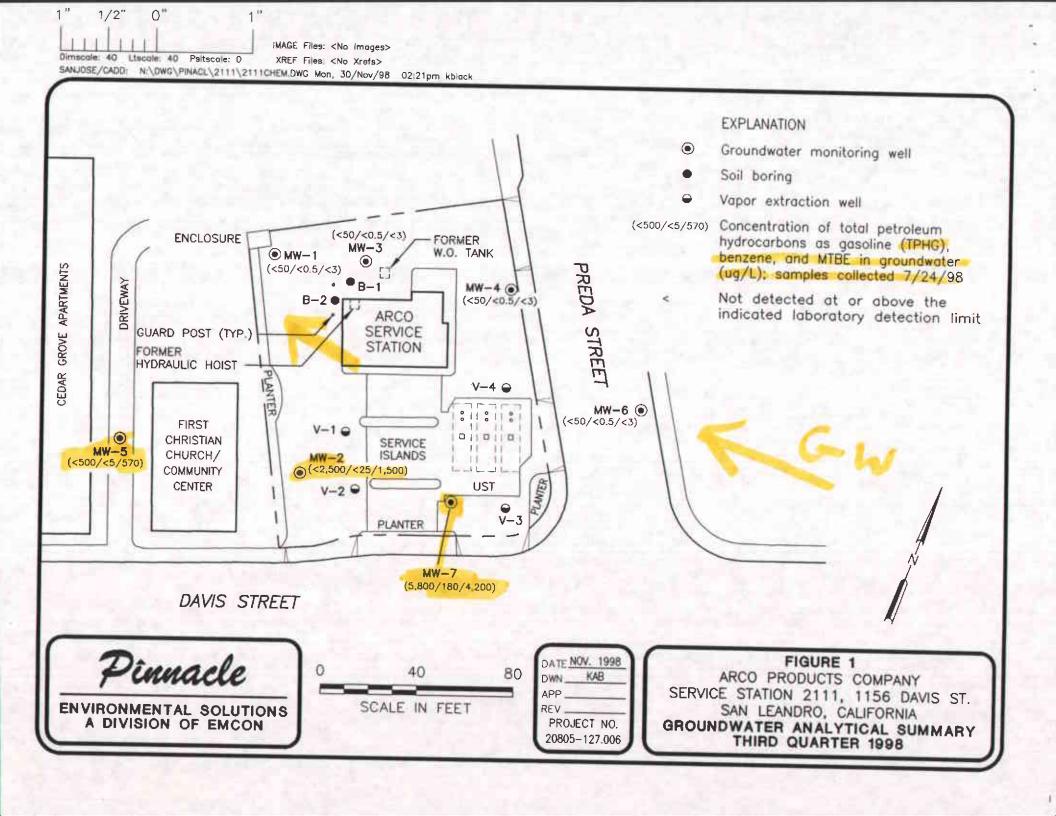

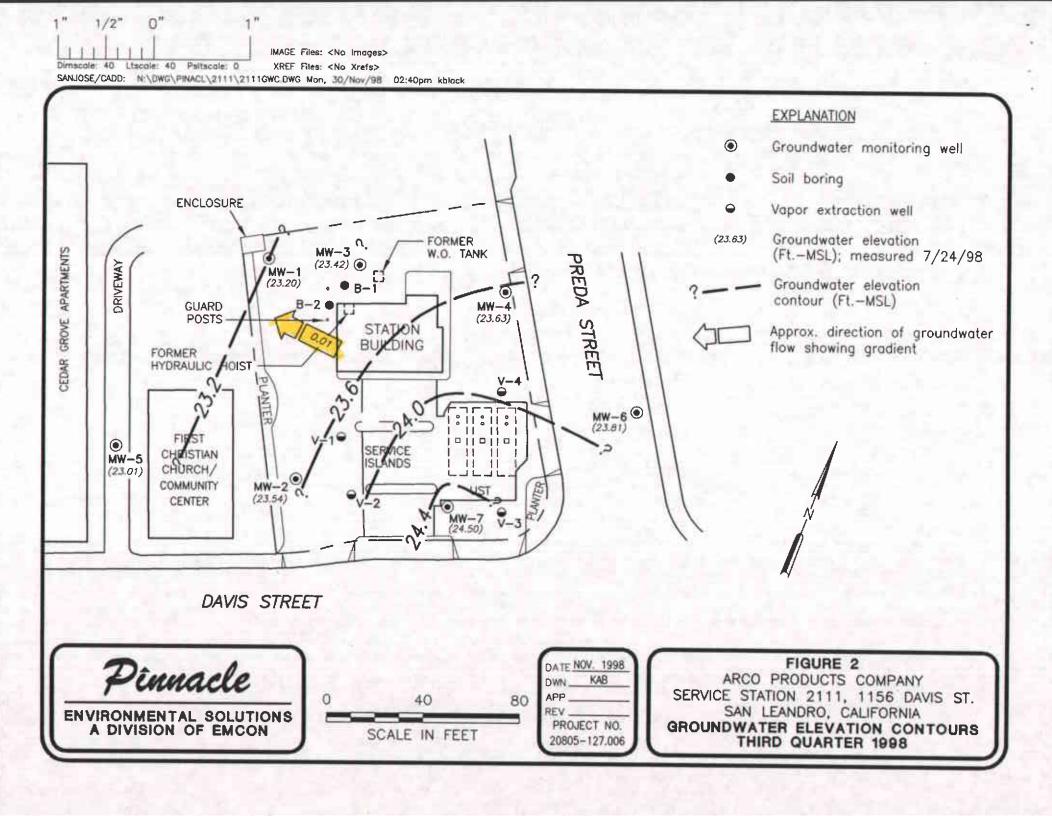

APPENDIX A SAMPLING AND ANALYSIS PROCEDURES

APPENDIX A

SAMPLING AND ANALYSIS PROCEDURES

The sampling and analysis procedures for water quality monitoring programs are contained in this appendix. The procedures provided for consistent and reproducible sampling methods, proper application of analytical methods, and accurate and precise analytical results. Finally, these procedures provided guidelines so that the overall objectives of the monitoring program were achieved.

The following documents have been used as guidelines for developing these procedures:

- Procedures Manual for Groundwater Monitoring at Solid Waste Disposal Facilities, Environmental Protection Agency (EPA)-530/SW-611, August 1977
- Resource Conservation and Recovery Act (RCRA) Groundwater Monitoring Technical Enforcement Guidance Document, Office of Solid Waste and Emergency Response (OSWER) 9950.1, September 1986
- Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, EPA SW-846,
 3rd edition, November 1986
- Methods for Organic Chemical Analysis of Municipal and Industrial Waste Water, EPA-600/4-82-057, July 1982
- Methods for Organic Chemical Analysis of Water and Wastes, EPA-600/4-79-020, revised March 1983
- Leaking Underground Fuel Tank (LUFT) Field Manual, California State Water Resources Control Board, revised October 1989

Sample Collection

Sample collection procedures include equipment cleaning, water level and total well depth measurements, and well purging and sampling.

Equipment Cleaning

Before the sampling event was started, equipment that was used to sample groundwater was disassembled and cleaned with detergent water and then rinsed with deionized water. During field sampling, equipment surfaces that were placed in the well or came into contact with groundwater during field sampling were steam cleaned with deionized water before the next well was purged or sampled.

Water Level, Floating Hydrocarbon, and Total Well Depth Measurements

Before purging and sampling occurred, the depth to water, floating hydrocarbon thickness, and total well depth were measured using an oil/water interface measuring system. The oil/water interface measuring system consists of a probe that emits a continuous audible tone when immersed in a nonconductive fluid, such as oil or gasoline, and an intermittent tone when immersed in a conductive fluid, such as water. The floating hydrocarbon thickness and water level were measured by lowering the probe into the well. Liquid levels were recorded relative to the tone emitted at the groundwater surface. The sonic probe was decontaminated by being rinsed with deionized water or steam cleaned after each use. A bottom-filling, clear Teflon bailer was used to verify floating hydrocarbon thickness measurements of less than 0.02 foot. Alternatively, an electric sounder and a bottom-filling Teflon bailer may have been used to record floating hydrocarbon thickness and depth to water.

The electric sounder is a transistorized instrument that uses a reel-mounted, two-conductor, coaxial cable that connects the control panel to the sensor. Cable markings are stamped at 1-foot intervals. The water level was measured by lowering the sensor into the monitoring well. A low-current circuit was completed when the sensor contacted the water, which served as an electrolyte. The current was amplified and fed into an indicator light and audible buzzer, signaling when water had been contacted. A sensitivity control compensated for highly saline or conductive water. The electric sounder was decontaminated by being rinsed with deionized water after each use. The bailer was lowered to a point just below the liquid level, retrieved, and observed for floating hydrocarbon.

Liquid measurements were recorded to the nearest 0.01 foot on the depth to water/floating product survey form. The groundwater elevation at each monitoring well was calculated by subtracting the measured depth to water from the surveyed elevation of the top of the well casing. (Every attempt was made to measure depth to water for all wells on the same day.) Total well depth was then measured by lowering the sensor to the bottom of the well. Total well depth, used to calculate purge volumes and to determine whether the well screen was partially obstructed by silt, was recorded to the nearest 0.1 foot on the depth to water/floating product survey form.

Well Purging

If the depth to groundwater was above the top of screens of the monitoring wells, then the wells were purged. Before sampling occurred, a polyvinyl chloride (PVC) bailer, centrifugal pump, low-flow submersible pump, or Teflon bailer was used to purge standing water in the casing and gravel pack from the monitoring well. Monitoring wells were purged according to the protocol presented in Figure A-1. In most monitoring wells, the amount of water purged before sampling was greater than or equal to three casing volumes. Some monitoring wells were expected to be evacuated to dryness after removing fewer than three casing volumes. These low-yield monitoring wells were allowed to recharge for up to 24 hours. Samples were obtained as soon as the monitoring wells recharged to a level sufficient for sample collection. If insufficient water recharged after 24 hours, the monitoring well was recorded as dry for the sampling event.

Groundwater purged from the monitoring wells was transported in a 500-gallon water trailer, 55-gallon drum, or a 325-gallon truck-mounted tank to EMCON's San Jose or Sacramento office location for temporary storage. EMCON arranged for transport and disposal of the purged groundwater through Integrated Waste Stream Management, Inc.

Field measurements of pH, specific conductance, and temperature were recorded in a waterproof field logbook. Figure A-2 shows an example of the water sample field data sheet on which field data are recorded. Field data sheets were reviewed for completeness by the sampling coordinator after the sampling event was completed.

The pH, specific conductance, and temperature meter were calibrated each day before field activities were begun. The calibration was checked once each day to verify meter performance. Field meter calibrations were recorded on the water sample field data sheet.

Well Sampling

A Teflon bailer was the only equipment acceptable for well sampling. When samples for volatile organic analysis were being collected, the flow of groundwater from the bailer was regulated to minimize turbulence and aeration. Glass bottles of at least 40-milliliters volume and fitted with Teflon-lined septa were used in sampling for volatile organics. These bottles were filled completely to prevent air from remaining in the bottle. A positive meniscus formed when the bottle was completely full. A convex Teflon septum was placed over the positive meniscus to eliminate air. After the bottle was capped, it was inverted and tapped to verify that it contained no air bubbles. The sample containers for other parameters were filled, filtered as required, and capped.

When required, dissolved concentrations of metals were determined using appropriate field filtration techniques. The sample was filtered by emptying the contents of the Teflon bailer into a pressure transfer vessel. A disposable 0.45-micron acrylic copolymer filter was threaded onto the transfer vessel at the discharge point, and the vessel was sealed. Pressure was applied to the vessel with a hand pump and the filtrate directed into the appropriate containers. Each filter was used once and discarded.

Sample Preservation and Handling

The following section specifies sample containers, preservation methods, and sample handling procedures.

Sample Containers and Preservation

Sample containers vary with each type of analytical parameter. Container types and materials were selected to be nonreactive with the particular analytical parameter tested.

Sample Handling

Sample containers were labeled immediately prior to sample collection. Samples were kept cool with cold packs until received by the laboratory. At the time of sampling, each sample was logged on an ARCO chain-of-custody record that accompanied the sample to the laboratory.

Samples that required overnight storage prior to shipping to the laboratory were kept cool (4° C) in a refrigerator. The refrigerator was kept in a warehouse, which was locked when not occupied by an EMCON employee. A sample/refrigerator log was kept to record the date and time that samples were placed into and removed from the refrigerator.

Samples were transferred from EMCON to an ARCO-approved laboratory by courier or taken directly to the laboratory by the environmental sampler. Sample shipments from EMCON to laboratories performing the selected analyses routinely occurred within 24 hours of sample collection.

Sample Documentation

The following procedures were used during sampling and analysis to provide chain-of-custody control during sample handling from collection through storage. Sample documentation included the use of the following:

- Water sample field data sheets to document sampling activities in the field
- · Labels to identify individual samples
- Chain-of-custody record sheets for documenting possession and transfer of samples
- Laboratory analysis request sheets for documenting analyses to be performed

Field Logbook

In the field, the sampler recorded the following information on the water sample field data sheet (see Figure A-2) for each sample collected:

- Project number
- Client's name
- Location
- Name of sampler
- Date and time
- Well accessibility and integrity
- Pertinent well data (e.g., casing diameter, depth to water, well depth)

- Calculated and actual purge volumes
- · Purging equipment used
- · Sampling equipment used
- Appearance of each sample (e.g., color, turbidity, sediment)
- Results of field analyses (temperature, pH, specific conductance)
- General comments

The water sample field data sheet was signed by the sampler and reviewed by the sampling coordinator.

Labels

Sample labels contained the following information:

- Project number
- Sample number (i.e., well designation)
- Sample depth

- Sampler's initials
- Date and time of collection
- Type of preservation used (if any)

Sampling and Analysis Chain-of-Custody Record

The ARCO chain-of-custody record initiated at the time of sampling contained, at a minimum, the sample designation (including the depth at which the sample was collected), sample type, analytical request, date of sampling, and the name of the sampler. The record sheet was signed, timed, and dated by the sampler when transferring the samples. The number of custodians in the chain of possession was minimized. A copy of the ARCO chain-of-custody record was returned to EMCON with the analytical results.

Groundwater Sampling and Analysis Request Form


A groundwater sampling and analysis request form (see Figure A-3) was used to communicate to the environmental sampler the requirements of the monitoring event. At a minimum, the groundwater sampling and analysis request form included the following information:

Date scheduled

2111Q398.DOC\uh:1

- Site-specific instructions
- Specific analytical parameters

- Well number
- Well specifications (expected total depth, depth of water, and product thickness)

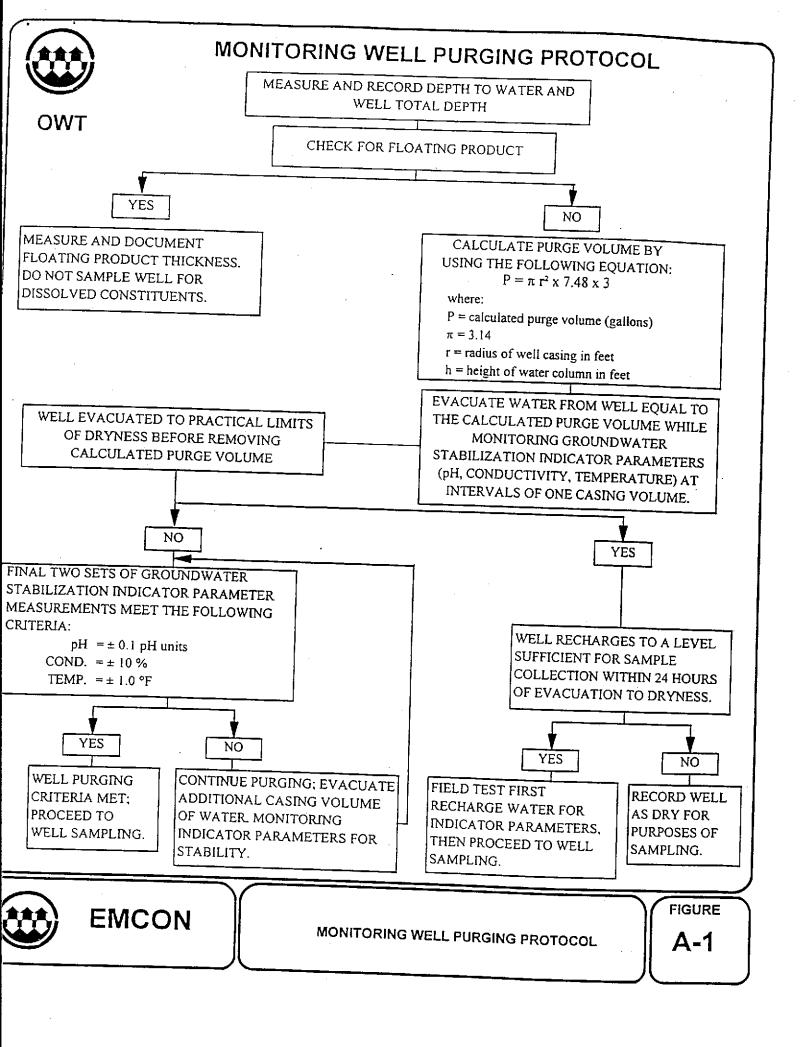

PI	OJECT NO :		 _	CLIENT NAME	D: =:	
	MPLED BY :			LOCATION	٧:	
	water			Leachate	Other	
CASING DIAMET	ER (inches): 2_	3_	4	4.5	6Oth	ner
CASING ELEVATION			V	OLUME IN CASIN	G (gal.) :	
DEPTH O	F WELL (feet) :		CAL	CULATED PURG	E (gal.) :	
DEPTH OF	WATER (feet) :		AC	TUAL PURGE VOL	(gal.) :	
DATE PU	PRGED ;			END PURGE :		
DATE SAN	MPLED:		SA	MPLING TIME :		
TIME	VOLUME	ρН	E.C.	TEMPERATURE	TURBIDITY	TIME
(2400 HR)	(gal.)	(units)	(µmhos/cm@25°c)		(visual/NTU)	(2400 HR
THER:	S COLLECTED A		_	UP-1):	(COBALT 0-100)	(NTU 0-200)
	EQUIPMENT		, = 1,1.2		EQUIPMENT	
2" Bladder Pur	mp Bail	er (Teflon)				
Centrifugal Pur		er (PVC)		Bomb Sampler	P Bailer	
Submersible P	ump Bail	er (Stainless Si	teel)	Dipper		(Stainless Steel ersible Pump
Well Wizard™	Dec	icated		Well Wizard™	Dedica	•
her:		-	Oth	ner:		
L INTEGRITY:		<u> </u>			LOCK	
IARKS:						
.C., Temp. Meter Ca	alibration:Date:		Time:	Meter	Serial No.:	
1000/					pH 4	



WATER SAMPLE FIELD DATA SHEET

FIGURE

A-2



EMCON - SACRAMENTO GROUNDWATER SAMPLING AND ANALYSIS REQUEST FORM

PROJECT NAME:

SCHEDU	II ED	DAT	ъ.
つくはレレし	ノレビエノ	1.7A I	

SPECIAL INS	STRUCTIONS	CONSIDER	+ Tropic		Project
	31100110101	CONSIDERA	ATIONS:	1	Authorization:
_	•			EM	CON Project No.:
					OWT Project No.:
		•			Task Code:
					Originals To:
					cc:
					Well Lock
					Number (s)
					` <u>`</u>
					·
					
CHECK BO	OX TO AUTHOR	OTTE DATA EL	k Francis w w		L
011201120	W 10 VOI HOW	TYE DATA EL	TRY	Site Contact:	
Well	Casing	Cosing		Name Name	Phone #
Number or	Diameter	Casing	Depth to	-	
Source	(inches)	Length	Water	ANAYSES REC	QUESTED
300,00	(menes)	(feet)	(feet)		`
			1		
			}		
	-				
aboratory and L	Lab QC Istruction	ns:			
					ł
				,	



EMCON

SAMPLING AND ANALYSIS REQUEST FORM

FIGURE

A-3

APPENDIX B

CERTIFIED ANALYTICAL REPORTS, AND CHAIN-OF-CUSTODY DOCUMENTATION



August 7, 1998

Service Request No.: S9801943

Glen Vanderveen
PINNACLE
144 A Mayhew Wy.
Walnut Creek, CA 94596

RE: 20805-127.006/TO#22312.00/2111 SAN LEANDRO

Dear Mr. Vanderveen:

The following pages contain analytical results for sample(s) received by the laboratory on July 24, 1998. Results of sample analyses are followed by Appendix A which contains sample custody documentation and quality assurance deliverables requested for this project. The work requested has been assigned the Service Request No. listed above. To help expedite our service, please refer to this number when contacting the laboratory.

Analytical results were produced by procedures consistent with Columbia Analytical Services' (CAS) Quality Assurance Manual (with any deviations noted). Signature of this CAS Analytical Report below confirms that pages 2 through 15, following, have been thoroughly reviewed and approved for release in accord with CAS Standard Operating Procedure ADM-DatRev3.

Please feel welcome to contact me should you have questions or further needs.

Sincerely

Steven L. Green Project Chemist Loui Plumly for Greg Anderson

Regional QA Coordinator

Acronyms

AZLA American Association for Laboratory Accreditation
ASTM American Society for Testing and Materials

ASTM American Society for Testing and Materials

BOD Biochemical Oxygen Demand

BTEX Benzene, Toluene, Ethylbenzene, Xylenes

CARB California Assessment Metals
CARB California Air Resources Board

CAS Number Chemical Abstract Service registry Number

CFC Chlorofluorocarbon
CFU Colony-Forming Unit
COD Chemical Oxygen Demand

DEC Department of Environmental Conservation
DEQ Department of Environmental Quality
DHS Department of Health Services
DLCS Duplicate Laboratory Control Sample

DMS Duplicate Matrix Spike
DOE Department of Ecology
DOH Department of Health

EPA U. S. Environmental Protection Agency

ELAP Environmental Laboratory Accreditation Program

GC Gas Chromatography

GC/MS Gas Chromatography/Mass Spectrometry

IC Ion Chromatography

ICB Initial Calibration Blank sample

ICP Inductively Coupled Plasma atomic emission spectrometry

ICV Initial Calibration Verification sample

J Estimated concentration. The value is less than the MRL, but greater than or equal to

the MDL. If the value is equal to the MRL, the result is actually <MRL before rounding.

LUFT Leaking Underground Fuel Tank

M Modified

MBAS Methylene Blue Active Substances

MCL Maximum Contaminant Level. The highest permissible concentration of a

substance allowed in drinking water as established by the U. S. EPA.

MDL Method Detection Limit
MPN Most Probable Number
MRL Method Reporting Limit

MS Matrix Spike

MTBE Methyl tert-Butyl Ether
NA Not Applicable

NAN Not Applicable
NAN Not Analyzed
NC Not Calculated

NCASI National Council of the paper industry for Air and Stream Improvement

ND Not Detected at or above the method reporting/detection limit (MRL/MDL)

NIOSH National Institute for Occupational Safety and Health

NTU Nephelometric Turbidity Units

ppb Parts Per Billion ppm Parts Per Million

PQL Practical Quantitation Limit
QA/QC Quality Assurance/Quality Control
RCRA Resource Conservation and Recovery Act

RPD Relative Percent Difference SIM Selected Ion Monitoring

SM Standard Methods for the Examination of Water and Wastewater, 18th Ed., 1992

STLC Solubility Threshold Limit Concentration

SW Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, SW-846,

3rd Ed., 1986 and as amended by Updates I, II, IIA, and IIB.

TCLP Toxicity Characteristic Leaching Procedure

TDS Total Dissolved Solids

TPH Total Petroleum Hydrocarbons

tr Trace level. The concentration of an analyte that is less than the PQL but greater than or equal

to the MDL. If the value is equal to the PQL, the result is actually <PQL before rounding.

TRPH Total Recoverable Petroleum Hydrocarbons

TSS Total Suspended Solids

TTLC Total Threshold Limit Concentration

VOA Volatile Organic Analyte(s) ACRONLST.DOC 7/14/95

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Date Collected: 7/24/98

Sample Matrix:

Water

Date Received: 7/24/98

Service Request: \$9801943

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-1(17)

Lab Code:

S9801943-001

Units: ug/L (ppb) Basis: NA

Test Notes:

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	7/28/98	ND	
Benzene	EPA 5030	8020	0.5	1	NA	7/28/98	ND .	
Toluene	EPA 5030	8020	0.5	1	NA	7/28/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	7/28/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	7/28/98	ND	
Methyl tert-Butyl Ether	EPA 5030	8020	3	1	NA	7/28/98	ND	

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Date Collected: 7/24/98

Service Request: \$9801943

Sample Matrix:

Water

Date Received: 7/24/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-4(15)

Lab Code:

S9801943-002

Units: ug/L (ppb) Basis: NA

Test Notes:

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	7/29/98	ND	
Benzene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Methyl tert-Butyl Ether	EPA 5030	8020	3	I	NA	7/29/98	ND	

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Date Collected: 7/24/98

Service Request: S9801943

Sample Matrix:

Water

Date Received: 7/24/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-3(16)

Lab Code:

Units: ug/L (ppb)

Test Notes:

S9801943-003

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	I	NA	7/29/98	ND	
Benzene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	. 3	1	NA	7/29/98	ND	

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Service Request: S9801943 Date Collected: 7/24/98

Sample Matrix:

Water

Date Received: 7/24/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-6(14)

Lab Code:

Units: ug/L (ppb)

Test Notes:

S9801943-004

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	7/29/98	ND	
Benzene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	3	1	NA	7/29/98	ND	

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Sample Matrix:

Water

Service Request: \$9801943

Date Collected: 7/24/98

Date Received: 7/24/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-2(15)

Lab Code:

S9801943-005

Test Notes:

Units: ug/L (ppb)

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	50 ·	NA	7/29/98	<2500	Cl
Benzene	EPA 5030	8020	0.5 .	50	NA	7/29/98	<25	CI
Toluene	EPA 5030	8020	0.5	50	NA	7/29/98	<25	C1
Ethylbenzene	EPA 5030	8020	0.5	50	NA	7/29/98	<25	C1
Xylenes, Total	EPA 5030	8020	0.5	50	NA	7/29/98	<25	Cl
Methyl tert-Butyl Ether	EPA 5030	8020	, 3	50	NA	7/29/98	1500	

C1

The MRL was elevated due to high analyte concentration requiring sample dilution.

1822/020597p

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Sample Matrix:

Water

Service Request: \$9801943

Date Collected: 7/24/98

Date Received: 7/24/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-7(15)

Lab Code:

S9801943-006

Units: ug/L (ppb)

Test Notes:

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	100	NA	7/29/98	5800	
Benzene	EPA 5030	8020	0.5	100	NA	7/29/98	180	
Toluene	EPA 5030	8020	0.5	100	NA	7/29/98	<50	C1
Ethylbenzene	EPA 5030	8020	0.5	100	NA	7/29/98	74	
Xylenes, Total	EPA 5030	8020	0.5	100	NA	7/29/98	<50	C1
Methyl tert-Butyl Ether	EPA 5030	8020	3	100	NA	7/29/98	4200	

CI

The MRL was elevated due to high analyte concentration requiring sample dilution.

t\$22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Service Request: \$9801943 Date Collected: 7/24/98

Sample Matrix:

Water

Date Received: 7/24/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

MW-5(15)

Lab Code:

S9801943-007

Units: ug/L (ppb) Basis: NA

Test Notes:

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	DDA 5000							
	EPA 5030	CA/LUFT	50	10	NA	7/29/98	<500	CI
Benzene	EPA 5030	8020	0.5	10	NA	7/29/98	<5	Cl
Toluene	EPA 5030	8020	0.5	10	NA	7/29/98	<5	C1
Ethylbenzene	EPA 5030	8020	0.5	10	NA	7/29/98	<5	C1
Xylenes, Total	EPA 5030	8020	0.5	10	NA	7/29/98	<5	C1
Methyl tert -Butyl Ether	EPA 5030	8020	3	10	NA	7/29/98	570	

Cl

The MRL was elevated due to high analyte concentration requiring sample dilution.

1S22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Date Collected: NA

Sample Matrix:

Water

Date Received: NA

Service Request: S9801943

BTEX, MTBE and TPH as Gasoline

Sample Name:

Method Blank

Lab Code:

Units: ug/L (ppb) Basis: NA

Test Notes:

S980728-WB1

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	7/28/98	ND	
Benzene	EPA 5030	8020	0.5	1	NA	7/28/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	7/28/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	7/28/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	7/28/98	ND	
Methyl tert-Butyl Ether	EPA 5030	8020	3	1	NA	7/28/98	ND	

1S22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Sample Matrix:

Water

Service Request: S9801943

Date Collected: NA

Date Received: NA

BTEX, MTBE and TPH as Gasoline

Sample Name:

Method Blank

Lab Code:

S980729-WB1

Test Notes:

Units: ug/L (ppb)

Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	7/29/98	ND	
Benzene	EPA 5030	8020	0.5	· · · · · · · · · · · · · · · · · · ·	NA	7/29/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	7/29/98	ND	
Methyl tert-Butyl Ether	EPA 5030	8020	3	1	NA	7/29/98	ND	

QA/QC Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Sample Matrix: Water Service Request: S9801943

Date Collected: NA

Date Received: NA Date Extracted: NA

Date Analyzed: NA

Surrogate Recovery Summary BTEX, MTBE and TPH as Gasoline

Prep Method:

EPA 5030

Analysis Method: 8020

CA/LUFT

Units: PERCENT

Basis: NA

Sample Name	Lab Code	Test Notes	Percent 4-Bromofluorobenzene	Recovery a,a,a-Trifluorotoluene
MW-1(17)	S9801943-001		100	94
MW-4(15)	S9801943-002		91	87
MW-3(16)	S9801943-003		98	- 96
MW-6(14)	S9801943-004		99	95
MW-2(15)	S9801943-005		100	91
MW-7(15)	S9801943-006		99	91
MW-5(15)	S9801943-007		103	86
BATCH QC	S9801935-001MS		96	107
BATCH QC	S9801935-001DMS		96	105
Method Blank	S980728-WB1		103	. 95
Method Blank	S980729-WB1		98	94

CAS Acceptance Limits:

69-116

69-116

QA/QC Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Sample Matrix Water

Service Request: S9801943

Date Collected: NA

Date Received: NA

Date Extracted: NA

Date Analyzed: 7/28/98

Matrix Spike/Duplicate Matrix Spike Summary

TPH as Gasoline

Sample Name:

BATCH QC

Lab Code:

S9801935-001MS,

S9801935-001DMS

Units: ug/L (ppb)

Basis: NA

Test Notes:

Percent Recovery

											CAS	Relative	
	Prep	Analysis		Spike	Level	Sample	Spike	Result			Acceptance	Percent	Result
Analyte	Method	Method	MRL	MS	DMS	Result	MS	DMS	MS	DMS	Limits	Difference	Notes
Gasoline	EPA 5030	CA/LUFT	50	250	250	ND	260	260	104	104	75-135	<1	

QA/QC Report

Client:

ARCO Products Company

Project:

20805-127.006/TO#22312.00/2111 SAN LEANDRO

Service Request: \$9801943

Date Analyzed: 7/28/98

Initial Calibration Verification (ICV) Summary BTEX, MTBE and TPH as Gasoline

Sample Name:

ICV

Units: ug/L (ppb)

Lab Code:

ICV1

Basis: NA

Test Notes:

ICV Source:

CAS

					Percent Recovery	-	
Analyte	Prep Method	Analysis Method	True Value	Result	Acceptance Limits	Percent Recovery	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	250	230	90-110	92	
Benzene	EPA 5030	8020	25	26	85-115	104	
Toluene	EPA 5030	8020	2 5 .	26	85-115	104	
Ethylbenzene	EPA 5030	8020	25	26	85-115	104	
Xylenes, Total	EPA 5030	8020	75	78	85-115	104	
Methyl tert -Butyl Ether	EPA 5030	8020	25	24	85-115	96	

ICV/032196

TPH																							
ARC	O Pr	odu n of Atla	cts (Com	pany	<u>,</u>		_	Task Order		772	17 /	70					_			С	hair	of Custody
ARCO F	acility no	211	1	1	City	<u> </u>	./	1	Task Order	Pro	ject m	anage		,	1/							-	Laboratory Name
ARCO e	ngineer	1200	150		(Facility	() <u>) () () () () () () () () (</u>	n/ <i>ea</i> Tele (AR	phone n	<u>О</u> o.	(Co	onsulta ephon	nt)	<u>()/</u>	en	VC	no	(<u>@</u> /	<i>v∈</i>	201	<u>7</u>		<i>i</i> 576	Contract Number
Consulta	ınt name	<u>POU</u>	1.00	ppre	<u> </u>		(AR	(CO)	Address	(Co	nsulta	nt) (4	04	<u> 145.</u>	<u> 3-79</u>	<u> 300</u>	(Coi	ısultan	t)(40	56)4	<u> 37-9</u>	<u>526</u>	Contract Number
-		<i> - ~ </i>	CON	<u>/</u>			<u></u>	, _	Address (Consultant)	921	KH	CW	<u> 200</u>	Ak	R.	S	λ Λ		ر ح <i>ر</i>		951	3/	
		į.		Matrix		Pres	ervation				5 61165 015	Γ						 -8	010/700	74210			Method of shipment
Sample I.D	Lab no.	Container no.	Soil	Water	Other	lce	Acid	Sampling date	Sampling time	BTEX 602/EPA 8020	BTEXTPHACE EPA M602/KOZE	TPH Modified 8015 Gas ☐ Diesel ☐	d Grease	18.1/SM 503	EPA 601/8010	EPA 624/8240	EPA 625/8270	Sem CI VOACI V	Aetals EPA 6 D STLCO	Lead Org/DHSCI Lead EPA 7420/7421CI			Sampler Will deliver
s _R	<u>_</u>	క						Same	Samp	81EX	E 8	Es (Si 3.1	TPH EPA	EPA 6	EPA 6	EPA6	TCLP Metals	SAM S	Lead			Special Detection
MW-10	121	2		\times		×	HCL	7/24/	18 1025	-	X											<u> </u>	Limit/reporting
UW-4	1/15/2	2		×		×	HCL	1	1053		X						 		I			┪┈┈	Lowest
MW-3	(6)3	2		×		×	HI	1 1	1040	1	×										+	+	Possible
MW-6	14)4	2		×		×	1401		1200		X				-							+	Special QA/QC
MW-Z	(5)5	2		X		X	IKL		1125	1	X												A5
4W-7	(15)6	2		X		×	HCL	V	1145		×												As Normal
										_	_						<u> </u>			-		↓	Remarks
	1				 	-	 	-														 	RAT8
	 		<u> </u>						 -														2-40m1 HCI
																	ļ						2-40m1HCL VOAS
	_							<u> </u>															H20000 127
<u> </u>	 					•••	<u> </u>											,					#20705-127.0
	-																					44	Lab Number 5980/943
	<u> </u>	-								<u> </u>													Tumaround Time:
<u> </u>	ļ					····																	Priority Rush
	 					·											;						1 Business Day □
			<u> </u>						_		,												Rush 2 Business Days 🗆
Condition	of samp	le:								Temp	eratore	recei	ved:		•							*	Expedited
Relinguis	hed by	ampler	100				Date/ 7/24/5	/	Time	Rege	yled by	,)	7			7/		-/-					5 Business Days
Rélinguis	hed by	- 1	elly				// <i>24/9</i> Date	<u> </u>	1300	Rece	/ JUY		ue	re		()	4/9			2.0	kg		Standard 10 Business Days
Relinguis	hed by						Date		Time	Rece	ived by	labora	atory			Ī	Date			Time			De 8-6-78
Distribution	n: White	Conu -	Laborat	one Co	non. Co	my ADC	O Environ												1				0 0 0

Distribution: White Copy - Laboratory: Canary Copy - ARCO Environmental Engineering: Pink Copy - Consultant

RIIIna

7 P F	<u>1t</u>	_																						
ARC	O Pr	odu	cts (Com	pany Company	<i>f</i>		T	ask Order I	No. 7	73	12 (70				-	•			(Chair	n of Custo	dy
ARCO Fa	cility no	211	7		City (Facility		nLec	andro	2	Pro (Co	ject ma nsultar	anager nt)	Gl	en	Vai	ncli		100	2n			7576	Laboratory Name	
ARCO en	gineer	Par	1151	א ממצי	0		Tele	phone no. CO)		Tele	phone	no.	100	145	7.7	3/1	Fax	no.	14	7014	27-0	7571	Contract Number	
Consultar	nt name	FM	CON) 			1 (8)	Add (Co	lress nsultant) /	921	RI	nu	100	dl	4u=	> <	~~		50	CA	90	7/3/		
,				Matrix		Prese	rvation				\$							Dyo	010/7010	74210			Method of shipment	
Sample I.D.	Lab no.	Container no	Soil	Water	Other	lce	Acid	Sampling date	Sampling time	STEX O2/EPA 8020	BTEX/TPH INCLE. EPA M602/1023/8015	PH Modified 8015 as Diesel O	Oil and Grease 413.1 □ 413.2 □	PH :PA 418.1/SM 503	EPA 601/8010	EPA 624/8240	EPA 625/8270	CLP Sem letals© VOA© V	AM Metals EPA 6 TTCC3 STLCC3	Lead Org/DHS□ Lead EPA 7420/7421□			Sampler Will deliver	
MW-50				×		×	HCL	4/24/98	1110	m .6	×	- 6	0 4	E		<u> </u>	ш		3,-			<u> </u>	Special Detection Limit/reporting	
												ļ											- Lowest - Possible	
					<u> </u>		<u> </u>				 											_	Special QA/QC	<u> </u>
·					 						<u> </u>	ļ									-		As	٠
																							Normal	
							<u> </u>	<u> </u>															Remarks	
					 												ļ						- RATS	
												_									\dashv		2-40m1/tC UCAs	CL
																							VOAs	
				ļ			<u> </u>									_		-					# <i>10</i> 805-127	<u>, a</u>
																							Lab Number 59801943	
											<u></u>	ļ											Turnaround Time:	
(* c																							Priority Rush 1 Business Day	
		,																					Rush 2 Business Days	
Condition										1.	-	ө төсө	ived:			• · · · •				-			Expedited 5 Business Days	
Relinguis Relinguis	-	ample						/kg	1300		na		Dre	<u></u>	_	7/3	241	91	2.	100	On		Standard	
Relingui	shed by	/					Date Date	<u>.</u>	Time	Rece		y y laboi	ratory		•	$\overline{}$	Date			Time			10 Business Days	\ \
*Distribution	on: Whit	е Сору	– Labo	ratory: (Jan	. 40		nmental Eng		<u> </u>										<u> </u>			ne 9-6-98	,

- ARCO Environmental Engineering: Pink Copy - Consultant

APPENDIX C FIELD DATA SHEETS

FIELD REPORT DEPTH TO WATER/FLOATING PRODUCT SURVEY

PROJECT #: 21775-226.003 STATION ADDRESS: 1156 Davis Street, San Leandro DATE: 7/24/98 ARCO STATION #: 2111 FIELD TECHNICIAN: Manuel Gallegos DAY: Friday Well **FIRST** SECOND Type **DEPTH TO** Type **FLOATING** WELL WELL DTW Of Well Gasket Of Well **DEPTH TO DEPTH TO** Box Lock **FLOATING PRODUCT** TOTAL ID Order WATER WATER **PRODUCT** Seal Lid Present THICKNESS Number Cap DEPTH COMMENTS (feet) (feet) (feet) (feet) (feet) OK 3490 1 MW-1 16.40 26.1 10 447 OK MW-4 2 3490 Luc 14.47 OK 3 MW-3 26.6 3490 1,46 15.80 15.90 42/11 OK 4 MW-6 3490 Leve 25.0 13,30 13.30 9/16 5 MW-5 3616 14,20 14,20 23.8 6 OK MW-2 3490 14.45 14.45 26.6 DIC 4/14 7 105 MW-7 14,18 14.18 Dolphin 27.1 SURVEY POINTS ARE TOP OF WELL CASINGS

WATER SAMPLE FIELD DATA SHEET PROJECT NO 21775-226.063 SAMPLE ID MW-1() PURGED BY M. Gallesos CLIENT NAME ARCO H 211, SAMPLED BY LOCATION San Leandro SAMPLE ID mw - I(17)LOCATION San Leandro, CA Groundwater ______ Surface Water _____ Leachate ____ TYPE. CASING DIAMETER (inches): 2 3 4 1 4.5 6 Other VOLUME IN CASING (gal.) CASING ELEVATION (feet/MSL) DEPTH OF WELL (feet) 26./ CALCULATED PURGE (gal.) ._____ ACTUAL PURGE VOL. (gal.): DEPTH OF WATER (feet) /6.4/0 END PURGE: DATE PURGED: 7- 24- 98____ SAMPLING TIME: 1025 DATE SAMPLED: COLOR TURBIDITY TEMPERATURE E.C. VOLUME TIME (visual) (µmhos/cm@25°c) (°F) (2400 HR) (gall) (units) 69.1 Clear 5,52 LIR ODOR: <u>Noke</u> K/R (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Batter (PVC) Centrifugal Pump Dipper Submersible Pump Bailer (Stantess Steel) Submersible Pump Dedicated Well Wizard™ Well Wizard™ Dedicated Other: LOCK: 3490 WELL INTEGRITY: OK REMARKS: all samples faken pH, E.C., Temp. Meter Calibration:Date: 7/24/65 EC. 1000 9991/000 pH7 7631700 pH10 8871/000 pH4 4041 400 Temperature *F SIGNATURE THE PAGE OF 7

Rev 1/97

WATER SAMPLE FIELD DATA SHEET SAMPLE ID MW - 2(15')CLIENT NAME AR(D + 211)PROJECT NO 2/775-226.003 PURGED BY M. Gallesos LOCATION San Leandro, EA SAMPLED BY 6 ___ Other ___ VOLUME IN CASING (gal.) CASING ELEVATION (feet/MSL) DEPTH OF WELL (feet) CALCULATED PURGE (gal.): _____ ACTUAL PURGE VOL. (gal.): DEPTH OF WATER (feet) END PURGE : _____ DATE PURGED: 7-24-98 SAMPLING TIME: 1/2.5 DATE SAMPLED: TEMPERATURE COLOR TURBIDITY E.C. VOLUME TIME (°F) (visual) (visual) (µmhos/cm@25°c) (2400 HR) (units) (gall) 6RAB 6.34 7/3 70.2 (CAN LIR ODOR: NOM OTHER: <u>DO= 1.30</u> (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT **PURGING EQUIPMENT** 2" Bladder Pump X Bailer (Teflon) 2" Bladder Pump Bailer (Teflon) Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Dipper Barter (Stainless Steel) Submersible Pump Dedicated Well Wizard™ Dedicated Well Wizard™ Other: Other: LOCK: <u>34/90</u> WELL INTEGRITY: OK REMARKS: all samples falco Meter Serial No. pH, E.C., Temp. Meter Calibration:Date. 7/24/95 Temperature *F SIGNATURE MAJERIAL REVIEWED BY MA PAGE 2 OF 7

Rev 1/97

WATER SAMPLE FIELD DATA SHEET Rev 1/97 SAMPLE ID MW - 3(16!)CLIENT NAME AR(0 + 211)PROJECT NO 21775-226.003 SAMPLED BY M. Gallegos LOCATION San Leandro, EA TYPE. Groundwater X Surface Water Leachate Other CASING DIAMETER (inches): 2 3 4 4 5 6 Other VOLUME IN CASING (gal.) CASING ELEVATION (feet/MSL) DEPTH OF WELL (feet) 26.60 CALCULATED PURGE (gal.) . ____ ACTUAL PURGE VOL. (gal.): DEPTH OF WATER (feet): 15.90 END PURGE DATE PURGED: 7-24-98____ 1040 DATE SAMPLED: SAMPLING TIME: TURBIDITY TEMPERATURE COLOR E.C. VOLUME TIME (°F) (visual) (visual) (µmhos/cm@25°c) (units) (2400 HR) (gal) 69.4 clear Clear 1040 ODOR: NONE_ (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) 2" Bladder Pump Bailer (Teflon) Bailer (Stamless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Dipper -Bailer (Stainless Steel) Submersible Pump Dedicated Well Wizard™ Dedicated Well Wizard™ Other: LOCK: 3490 WELL INTEGRITY: OK REMARKS: all samples faken Meter Serial No.: 87

SIGNATURE: 24 PAGE 3 OF 7

pH, E.C., Temp. Meter Calibration:Date: 7/24/95

Temperature *F

WATER SAMPLE FIELD DATA SHEET PURGED BY M. Gallegos CLIENT NAME ARIO # 2111 PROJECT NO 2/775-226.003 LOCATION San Leandro, EA SAMPLED BY _ (/ TYPE Groundwater X Surface Water Leachate CASING DIAMETER (inches) 2 ______ 3 _____ 4 ____ 4.5 _____ 6 ___ Other ____ VOLUME IN CASING (gal.) MR CASING ELEVATION (feet/MSL) DEPTH OF WELL (feet): 21.6 CALCULATED PURGE (gal.) ACTUAL PURGE VOL (gal.) DEPTH OF WATER (feet): 14/.4/7_ END PURGE : DATE PURGED: 7-24-98 SAMPLING TIME: 1055 DATE SAMPLED: E.C. TEMPERATURE COLOR TURBIDITY TIME VOLUME (°F) (visual) (µmhos/cm@25°c) (visual) (units) (2400 HR) (gall) GARA 624 746 695 CERT LIR. OTHER: DO= 1,59 KIR ODOR: note (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Tefton) Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Bailer (Stainless Steel) Dipper Submersible Pump Well Wizard** Dedicated Well Wizard™ Dedicated Other: LOCK: 3490 WELL INTEGRITY: OK REMARKS: all Sumples falun pH, E.C., Temp. Meter Calibration:Date: 7/2c//55 Time: Meter Serial No.: 57mm E C. 1000 / pH 7 / pH 10 / pH 4 / Temperature *F SIGNATURE MANUEL STATE OF THE SIGNATURE PAGE 4 OF 7

Rev 1/97

WATER SAMPLE FIELD DATA SHEET PROJECT NO 2/775-226.003 SAMPLE ID MW-5 (15 CLIENT NAME ARIO # 2111 PURGED BY M. Gallegos LOCATION San Leandro, CA SAMPLED BY TYPE Groundwater X Surface Water Leachate CASING DIAMETER (inches) 2 3 4 4.5 6 Other VOLUME IN CASING (gal.) CASING ELEVATION (feet/MSL) // R DEPTH OF WELL (feet): 25,8 CALCULATED PURGE (gal.) DEPTH OF WELL (feet): ACTUAL PURGE VOL. (gal.) DEPTH OF WATER (feet): END PURGE: DATE PURGED: 7-24-98 SAMPLING TIME: /// DATE SAMPLED: TURBIDITY E.C. TEMPERATURE COLOR VOLUME TIME (*F) (visual) (visual) (µmhos/cm@25°c) (units) (2400 HR) (gall) 728 49.3 (GA) Clear_ 6.34 OTHER: DO= 1.86 ODOR: NONE KIR (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) 2" Bladder Qump Bailer (Teffon) Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Dipper Bailer (Stainless Steel) Submersible Pump Well Wizard™ Dedicated Dedicated Well Wizard™ Other: LOCK: <u>3490</u> WELL INTEGRITY: OK REMARKS: all sumples falus Meter Serial No.: 87m pH, E.C., Temp. Meter Calibration:Date: 7/20/65 Temperature *F SIGNATURE MARINE REVIEWED BY: MA PAGE 5 OF 7

Rev 1/97

WATER SAMPLE FIELD DATA SHEET Rev 1/97 SAMPLE 10 <u>MW - (0 (141)</u> PROJECT NO 2/775-226.003 CLIENT NAME ARIO # 211 PURGED BY M. Gallegos LOCATION San Leandry CA SAMPLED BY TYPE Groundwater Surface Water Leachate Other CASING DIAMETER (inches): 2 3 4 4.5 6 Other CASING ELEVATION (feet/MSL) CALCULATED PURGE (gal.): ____ DEPTH OF WELL (feet) 25.0 ACTUAL PURGE VOL (gal.) DEPTH OF WATER (feet) END PURGE: DATE PURGED: 7-24-98 SAMPLING TIME: 1200 DATE SAMPLED: J TURBIDITY TEMPERATURE COLOR E C VOLUME TIME (µmhos/cm@25°c) (°F) (visual) (visual) (gal) (units) (2400 HR) 809 71.2 (ke) 1200 KIR OTHER: Do = 1.41ODOR: NOKE (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Batter (PVC) Centrifugal Pump Submersible Pump Bailer (Stainless Steel) Dipper Submersible Pump Well Wizard™ Dedicated Dedicated Well Wizard™ Other: LOCK: 3490 WELL INTEGRITY: OK REMARKS: all sumples taken Meter Serial No.: & 7/m pH, E.C., Temp. Meter Calibration:Date 7/20/65 Temperature 'F REVIEWED BY 14 PAGE 6 OF 7 SIGNATURE:

WATER SAMPLE FIELD DATA SHEET Rev 1/97 SAMPLE ID mw-7(15)PROJECT NO 21775-226:003 PURGED BY M. Gallegos CLIENT NAME AR(0 # 211 SAMPLED BY LOCATION San Income. LOCATION San Leandro, CA TYPE Groundwater Surface Water Leachate Other CASING DIAMETER (inches) 2 3 4 4.5 6 Other VOLUME IN CASING (gal.): ____ ///R CASING ELEVATION (feet/MSL) DEPTH OF WELL (feet): 27./ CALCULATED PURGE (gal.) DEPTH OF WATER (feet) / 5/1/8 ACTUAL PURGE VOL. (gal.): END PURGE: DATE PURGED: 7-24-98 DATE SAMPLED SAMPLING TIME: 1145 VOLUME pH E.C. TEMPERATURE TURBIDITY COLOR TIME (µmhos/cm@25°c) (°F) (visual) (gal) (units) (2400 HR) GRAB 6.29 GO8 71.6 CLAR OTHER: DO=/1/8 ODOR: Strong (COBALT 0-100) (NTU 0-200) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) 2" Bladder Pump Bailer (Teflon) Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Dipper Bailer (Stainless Steel) Submersible Pump Dedicated Well Wizard™ Dedicated Well Wizard™ Other LOCK: <u>34/90</u> WELL INTEGRITY: OK REMARKS: all samples taken pH, E.C., Temp. Meter Calibration:Date. 7/20/69 SIGNATURE MANUAL MEVIEWED BY MA PAGE 7 OF 7 Temperature *F

ARC	O Pr Division	odu: n of Atla	C ts (antic/Ric	hfield C	ompany	•		T	ask Order I	No. 7	731	12 0	20									Ch	ain	of Custo	dy `
ARCO Facility no. 7/1/ City (Facility) SON/ FO							1/60	ndlo			Toject manager Clen Vanderveen Gelephone no Consultant) (40%)453-7366 Consultant) (40%)453-7366													Laboratory Name	
ARCO engineer Paul Supple					Tele (AR	Telé (Co	phone nsulta	no.	194	VICT	7 - 7		Fax	no. Isultan	14	281/	1,27.	. Cic	7/	Contract Number	}				
Consultant name ENCON						771	Ric	CUK	200	AL		\leq	70) ()< (ار در در		\mathcal{O}	731	(·					
				Matrix Pr			ervation			<u> </u>	30	cwoodAve s				Г	IO	Г .		<u> </u>		Method of shipment			
Sample I.D.	no.	Container no.	Soil	Water	Other	ice	Acid	Sampling date	у бте	A 8020	BTEXTPHIACON INFO	odified 8015 Diesel 🗆	Oਜ and Grease 413.1 ☐ 413.2 ☐	8.1/SM 503E	EPA 601/8010	EPA 624/8240	EPA 625/8270	Semi	etals EPA 6010	Lead Org/DHSCI Lead EPA 7420/7421CI				Sample r Will de liver	
- ·	La de	ঠ						Sampli	Sampling time	BTEX 602/EPA 8020	BTEX/ EPA M	PH Cas	Oif and 413.1	TPH EPA 41	EPA 60	EPA 62	EPA 62	TCLP Metals	SAM M	Lead C Lead E			i		
MW-16 NW-4 MW-31 MW-64	7	2		×		>	Ha	7/24/48	1025		X							\vdash						Special Detection Limit/reporting	
NIW-4	(15)	2		×		X	HCL		1055		X													Lowest	
HW-31	16)	2		×		X	W_{I}		1040		×								<u> </u>					Possible	
MM-6	14)	2		×		X	HCI		1200		X													Special QA/QC	
HW-20	(5)	2		×		×	HI		1125		×								·					As	į
HW-70 HW-70	15)	2		X		×	HCL	1/	1145		×													Normal	
			<u> </u>															ļ						Remarks	
								•			\vdash							-	!		-			RAT8 2-40m1 H VOAS	
											\vdash											_		7-40m1 H	C1
													7											VOAS	
						# -1 .																			
· · · · · · · · · · · · · · · · · · ·																							H70805-17	20	
																								Lab Number	
																								Tumaround Time:	
y [†] 2mS a s				,, -, -, ,					·															Priority Rush	
																								1 Business Day	
																								Rush 2 Business Days	
Condition of sample:								Temp	Temperature received:													Expedited			
								Recé	Received by Dela 754/91 2: 18												5 Business Days				
									Rece	ived b		11 .E.G.	1-		<u> </u>	4/	91		<u> </u>	Be			Standard 10 Business Days		
Relinguished by Date Time										Received by laboratory Date Time															
Diotribution		_			_		montal Car	nle Ca		-															

ARCO Products Company Division of Atlantic/Richfield Company Task Order No.												<i>.∵77312.CC</i> Chai											n of Custody.		
ARCO Facility no. 2111 City San Lean Circ										Pro (Co	Project manager (Consultant) GIEN VONCETUEEN Telephone no. (409)453-7500 Fax no. (Consultant) (409)437-9576												Laboratory Name		
ARCO engineer Paul Coole							Tele (AR	Tele (Co	phone nsultar	no.	408	145	7.7	<i>CC</i>	Fax (Con	no. sultani	140	Q)4	27.0	7576	CAS Contract Number				
Consultant name EAICON								921	771 RINGWOOD AVE, San Jose C										G	5/3/					
l l Ma			Matrix		Prese	ervation				3							80	6010/7000	1S□ 7420/7421□			Method of shipment			
Sample I.D	Lab по.	Container no.	Soil	Water	Other	Ice	Acid	Sampling date	Sampling time	BTEX 602/EPA 8020	BTEX/TPH inc	TPH Modified 80 Sas (7 Diesel (Oil and Grease	IPH EPA 418.1/SM 50	PA 601/8010	PA 624/8240	EPA 625/8270	TCLP Semi Metals© VOA⊡ VOA⊡	AM Metals EPA TTLCO STLOC	Lead Org/DHS⊡ Lead EPA 742			Sampler Will deliver		
HW-50	15)	2		×		×	HCL	4/24/53	1110		V							_					Special Detection Limit/reporting		
																							Lowest		
																							Possible		
																							Special QA/QC	\neg	
																							A =	ŀ	
								-															Normal		
						vn							-	_							-		Remarks		
											:											-	RATS		
																							2-40m1 HC VCAs	L	
																							_ UCAs		
											1-												<u>#20805-127.</u>	a	
										ĺ,													Lab Number		
																							Turnaround Time:		
		-																					Priority Rush 1 Business Day		
						_	·								_								Rush 2 Business Days		
									Temp	Temperature received:											Expedited				
Relinguished by sampler						Date Time 1				Morrison 7/04/9/ 2100/2											5 Business Days				
Relinguished by Date									Time	Received by									Standard 10 Business Days	R					
Relinguish Distribution:							Date											Time							