

**KAPREALIAN ENGINEERING, INC.***Consulting Engineers*

PO BOX 996 • BENICIA, CA 94510

(707) 746-6915 • (707) 746-6916 • FAX (707) 746-5581

TRANSMITTAL PAGEDATE: January 24, 1990TO: Scott Derry - Alameda CountyFROM: Mardo KaprealianNumber of Pages
(including cover): 4SUBJECT: Special # 3072 - Castro Valley

If any problems occur in receiving, please
call the number listed above.



KAPREALIAN ENGINEERING, INC.
Consulting Engineers

PO BOX 996 • BENICIA, CA 94510
(707) 746-6915 • (707) 746-6916 • FAX (707) 746 5581

$$\frac{\Delta \text{ EL. (H-M)}}{\Delta \text{ EL. (H-L)}} = \frac{X}{\text{DISTANCE BETWEEN H \& L}}$$

$$\frac{90.97 - 89.33}{90.97 - 88.61} = \frac{X}{160}$$


$$X = 111.1 \text{ feet}$$



KAPREALIAN ENGINEERING, INC.

Consulting Engineers

PO BOX 996 • BENICIA, CA 94510
(707) 746-6915 • (707) 746-6916 • FAX (707) 746-5581

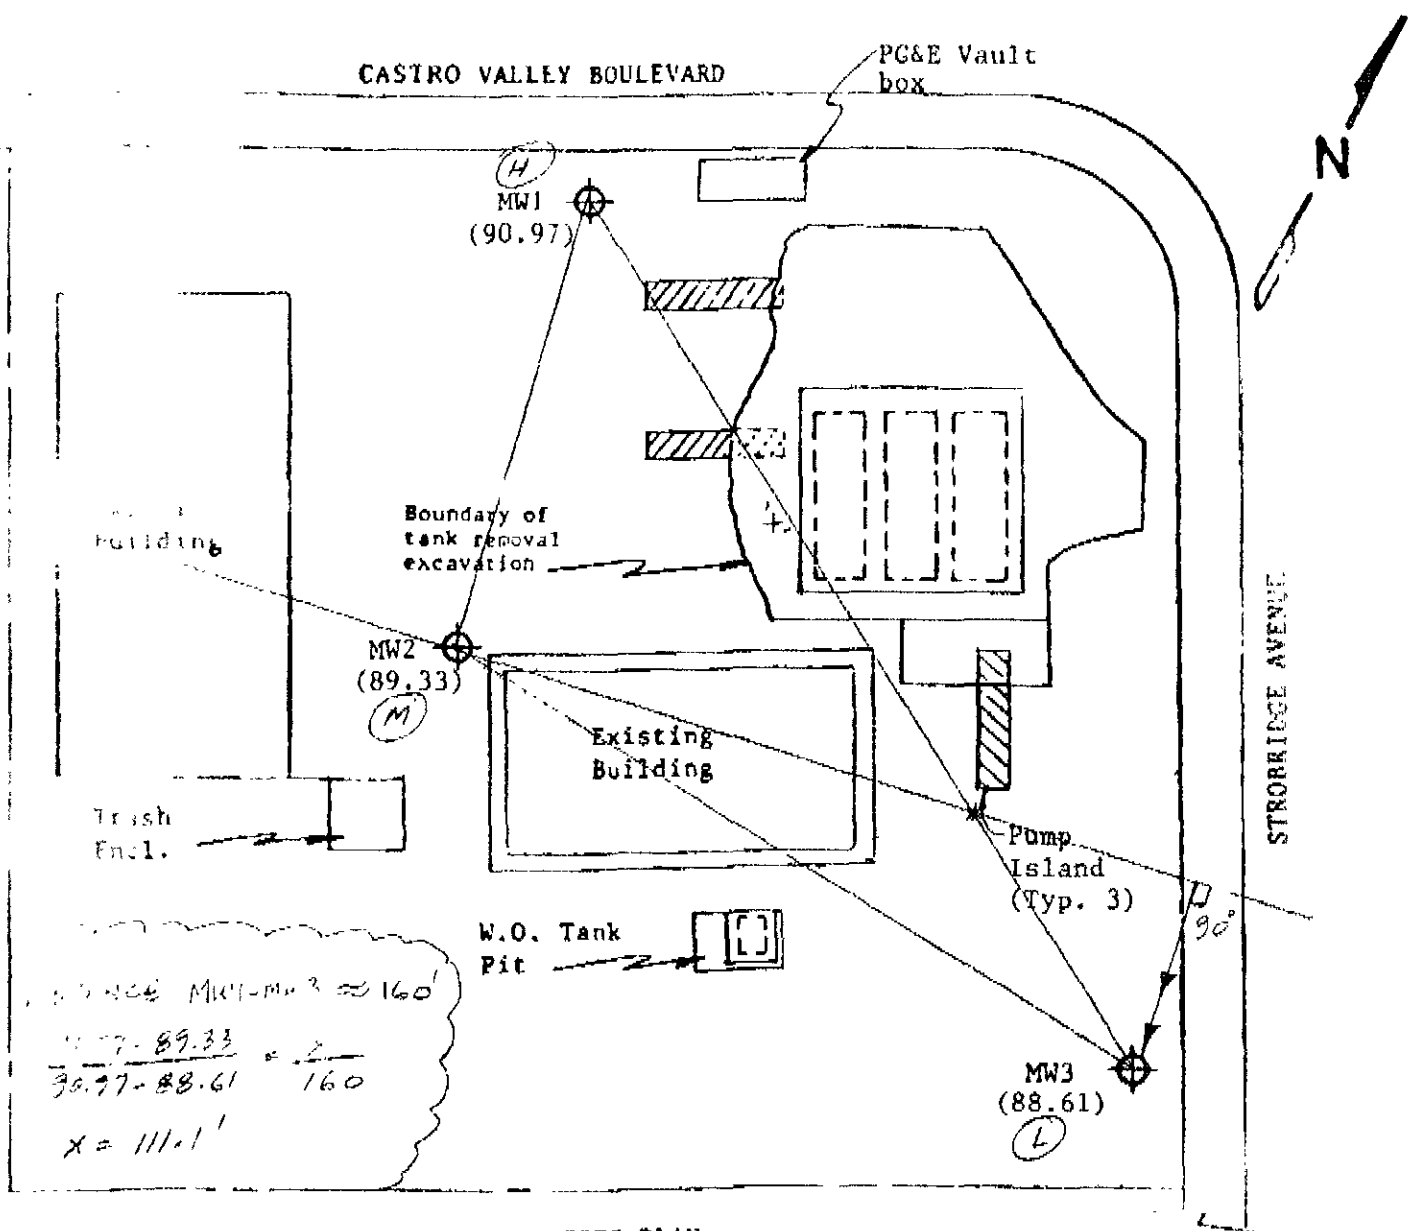


DISTANCE MW1-MW3 ≈ 160'
 $\frac{90.97 - 89.33}{90.97 - 88.61} = \frac{x}{160}$
 $x = 111.1'$

SITE PLAN

LEGEND


- Monitoring Well
- () Ground water elevation on 1/24/90. Elevation at top of MW1 well cover assumed 100.00' as datum.



Direction of ground water flow

Unocal S/S #3072
2445 Castro Valley Blvd.
Castro Valley, CA

... water is stored in the ground will drain under the influence of gravity and the part that is retained as a ... in very small openings (called ...). The physical forces that control are the same forces involved in the ... content of the capillary fringe. ... how much water is available for ... retention tells how much water ... after it is drained by gravity. As



$$S_y = \frac{V_d}{V_t} + \frac{V_r}{V_t} = 0.30$$

is the Sum of Specific Yield and

Porosity is the sum of specific yield and

$$n = S_y + S_r \quad (2)$$

$$S_y = \frac{V_d}{V_t} \quad S_r = \frac{V_r}{V_t} \quad (3), (4)$$

If S_y is specific yield, S_r is specific ... volume of water that drains from a ... V_r is the volume of water retained in ... V_t and V_t is total volume of a soil or ... lists values of porosity, specific ... retention for selected materials.

values of Porosity, Specific Yield, ...

	Porosity	Specific Yield	Specific Retention
...	55	40	15
...	50	27	48
...	28	22	7
...	28	19	1
...	20	18	2
(clayed)	11	6	5
...	...	99	97
...	11	8	7

Heads and Gradients

The depth to the water table has an important effect on use of the land surface and on the development of water supplies from unconfined aquifers. Where the water table is at a shallow depth, the land may become "waterlogged" during wet weather and unsuitable for residential and many other uses. Where the water table is at great depth, the cost of constructing wells and pumping water for domestic needs may be prohibitively expensive.

The direction of the slope of the water table is also important because it indicates the direction of ground-water movement. The position and the slope of the water table (or of the potentiometric surface of a confined aquifer) is determined by measuring the position of the water level in wells from a fixed point (a measuring point). To utilize these measurements to determine the slope of the water table, the position of the water table at each well must be determined relative to a datum plane that is common to all the wells. The datum plane most widely used is the National Geodetic Vertical Datum of 1929 (also commonly referred to as "sea level").

If the depth to water in a nonflowing well is subtracted from the altitude of the measuring point, the result is the total head at the well. Total head, as defined in fluid mechanics, is composed of elevation head, pressure head, and velocity head. Because ground water moves relatively slowly, velocity head can be ignored. Therefore, the total head at an observation well involves only two components: elevation head and pressure head. Ground water moves in the direction of decreasing total head, which may or may not be in the direction of decreasing pressure head.

The equation for total head (H_t) is

$$H_t = z + h_p \quad (5)$$

where z is elevation head and h_p is the distance from the datum plane to the point where the pressure head h_p is determined.

All other factors being constant, the rate of ground-water movement depends on the hydraulic gradient. The hydraulic gradient is the change in head per unit of distance in a given direction. If the direction is not specified, it is understood to be in the direction in which the maximum rate of decrease in head occurs.

If the movement of ground water is assumed to be in the plane of Figure 9—in other words, if it moves from well 1 to well 2—the hydraulic gradient can be calculated from the information given on the drawing. The hydraulic gradient is h/L , where h is the head loss between wells 1 and 2 and L is the horizontal distance between them, or

$$\frac{h}{L} = \frac{(100 \text{ m} - 15 \text{ m}) - 98 \text{ m} - 18 \text{ m}}{780 \text{ m}} = \frac{5 \text{ m}}{780 \text{ m}}$$

When the hydraulic gradient is expressed in consistent units, as it is in the above example in which both the numerator and the denominator are in meters, any

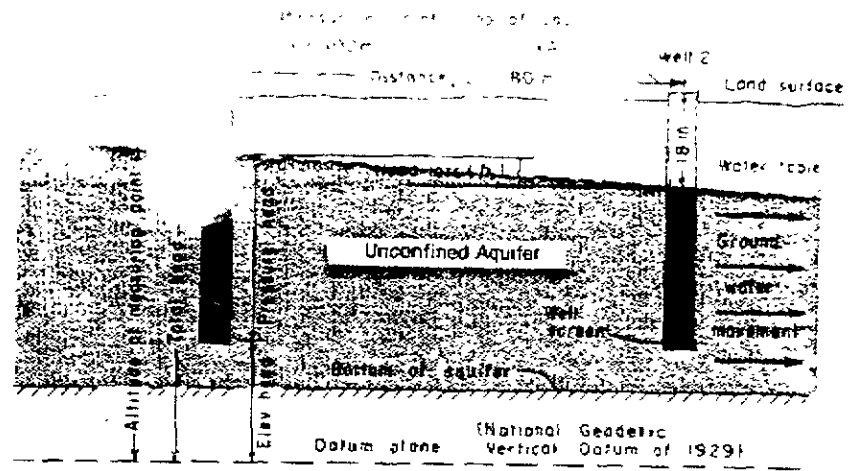


Figure 9. Gradient is Determined by the Difference in Head Between Two Wells.

other consistent units of length can be substituted without changing the value of the gradient. Thus, a gradient of 5 ft/780 ft is the same as a gradient of 5m/780 m. It is also relatively common to express hydraulic gradients in inconsistent units such as meters per kilometer or feet per mile. A gradient of 5 m/780 m can be converted to meters per kilometer as follows:

$$\left(\frac{5 \text{ m}}{780 \text{ m}}\right) \times \left(\frac{1,000 \text{ m}}{\text{km}}\right) = 6.4 \text{ m}^{-1}$$

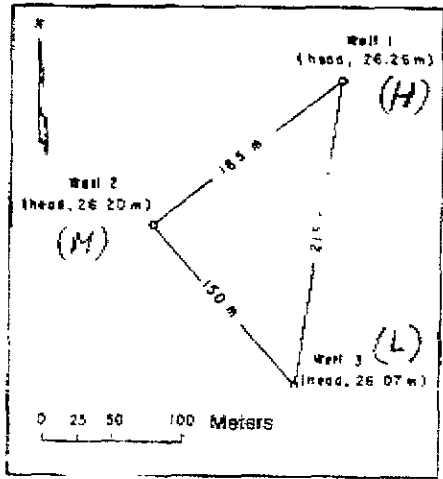


Figure 10. Diagram of Three Wells

Both the direction of ground-water movement and the hydraulic gradient can be determined if the following data are available for three wells located in any triangular arrangement such as that shown in Figure 10:

1. The relative geographic position of the wells.
2. The distance between the wells
3. The total head at each well.

Figure 11 illustrates the following steps in the solution.

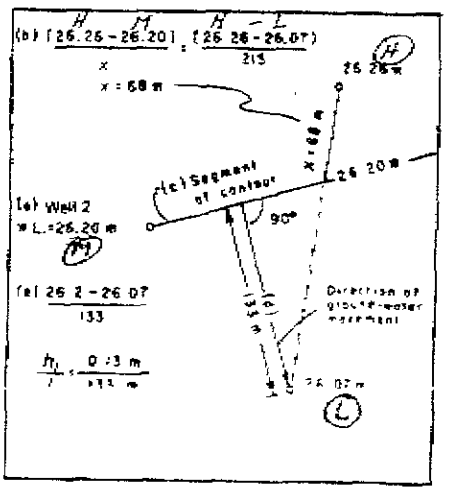


Figure 11. Determining the Direction of Ground Water Movement and the Hydraulic Gradient for a Triangular Arrangement of Wells