

ALAMEDA COUNTY  
**HEALTH CARE SERVICES  
AGENCY**

REBECCA GEBHART, Interim Director



DEPARTMENT OF ENVIRONMENTAL HEALTH  
LOCAL OVERSIGHT PROGRAM (LOP)  
For Hazardous Materials Releases  
1131 HARBOR BAY PARKWAY, SUITE 250  
ALAMEDA, CA 94502  
(510) 567-6700  
FAX (510) 337-9335

January 9, 2017

Mr. Jeff Kerry  
Kerry & Associates  
151 Callan Avenue, Suite 300  
San Leandro, CA 94577  
(Sent via electronic mail to:  
[djkerry1@aol.com](mailto:djkerry1@aol.com))

Mr. Jeffery Kerry  
Jeffery & Dolores Kerry Trust & Jame Donnelley et. al.  
19655 North Ripon Road  
Ripon, CA 95366

Subject: Request for Closure Response; Fuel Leak Case No. RO00000208; Palace Garage (Global ID #T0600101043), 14336 Washington Avenue, San Leandro, CA 94578

Dear Mr. Kerry:

Alameda County Department of Environmental Health (ACDEH) staff has reviewed the case file including the *Fourth Quarter 2016 Groundwater Monitoring Report – Palace Garage*, dated November 17, 2016. The report was submitted on your behalf by Innovex Environmental Solutions, Inc (Innovex). Thank you for submitting the groundwater monitoring report. Based on the decreases in groundwater concentrations documented in the referenced report, INNOVEX requested closure for the site.

ACDEH has evaluated the data and recommendations presented in the above-mentioned reports, in conjunction with the case files, to determine if the site is eligible for closure as a low risk site under the State Water Resources Control Board's (SWRCBs) Low Threat Underground Storage Tank Case Closure Policy (LTCP). Based on ACDEH staff review, we have determined that the site is nearing closure, but fails to meet the LTCP Media-Specific Criteria for Groundwater. See Geotracker for a copy and below for further details.

Based on ACDEH staff review of the case file, we request that you address the following technical comments and send us the reports described below.

### **TECHNICAL COMMENTS**

- 1. LTCP Media Specific Criteria for Groundwater** – To satisfy the media-specific criteria for groundwater, the contaminant plume that exceeds water quality objectives must be stable or decreasing in areal extent, and meet all of the additional characteristics of one of the five classes of sites listed in the policy.

Our review of the case files indicates that insufficient data collection and analysis has been presented to support the requisite characteristics of plume stability or plume classification as follows:

- a. Undefined Downgradient Extent** – As commented in previous letters, a review of groundwater concentrations at the site indicates that significant concentration increases are observed during periods of shallow groundwater. For example at well MW-1, elevated groundwater concentrations were present when depth to groundwater is shallower than approximately 14 ft below grade surface (bgs). Depths to groundwater were very similar during multiple monitoring events between September 2006 with groundwater at 13.33 ft bgs, and May 2016 with groundwater at 13.40 bgs. During the September 2006 event 44,000 micrograms per liter ( $\mu\text{g/l}$ ) Total Petroleum Hydrocarbons as gasoline (TPHg) and 870  $\mu\text{g/l}$  benzene were documented. During the May 2016 event 24,000  $\mu\text{g/l}$  TPHg and 100  $\mu\text{g/l}$  benzene were documented. Groundwater concentrations immediately before and after high groundwater levels were significantly less. Similar shallow groundwater and concentrations increases and rapid declines were present in February 2008, May 2010, and May 2012.

A similar, but less accentuated trend is also present in the most downgradient well MW-5 at the site. Thus the downgradient extent of the groundwater plume is undefined during periods of high groundwater.

ACDEH notes that the shallow groundwater depth and the concurrent high contaminant concentration increase observed in May 2015 occurred **before** removal actions were undertaken at the site, and was not produced as a result of these actions. Thus ACDEH is not convinced recent concentration decreases can be attributed entirely to the removal actions conducted in May 2015, but anticipates that drought conditions which have been generally observed in the region since 2008 likely contribute to lower groundwater levels and thus lower groundwater concentrations. However in general, based on this data review, ACDEH considers the contaminant concentration trend at the site to be either stable or declining.

Therefore, to ensure that worst-case groundwater concentrations, which may return when the region exits drought-like conditions, it appears appropriate to utilize tools contained in the LTCP to define worst-case plume lengths downgradient of well MW-5. Based on a literature review by the State Water Board (SWB), Table 1 of the *Technical Justification for Groundwater Media-Specific Criteria* (SWB, April 24, 2012) provides the Average, 90<sup>th</sup> Percentile, and Maximum Plume lengths for TPHg, benzene, and methyl tert butyl ether (MTBE). ACDEH requests the generation of a figure depicting the average, 90<sup>th</sup> percentile, and maximum plume lengths for TPHg and benzene (the site has been shown not to contain significant MTBE concentrations in groundwater) in the downgradient groundwater flow direction.

Subsequently, consistent with the LTCP, the utilization of these estimated plume lengths to conduct a search for sensitive receptors within 1,000 feet of the areas defined by the potential plume lengths. This is requested to include older privately owned water supply wells that may not be known to the State, but are well documented in San Leandro and San Lorenzo (see attached Figure 5 from the *Groundwater Study and Water Supply History of the East Bay Plain, Alameda and Contra Costa Counties, CA*, The Friends of the San Francisco Bay Estuary, Norfleet Consultants, June 15, 1998). ACDEH also requests inclusion of the results of a search for potential receptors, including basements with sump pumps which have the capacity to extract groundwater and discharge it as storm drainage at street level, within the anticipated plume lengths, and within 1,000 feet of the potential length.

This will likely require a door to door survey or the mailing of a public survey flyer to addresses within the area defined by the potential LTCP plume areas, plus potential receptors within 1,000 feet of the predicted plume lengths. At an appropriate time please request examples of public survey flyers from ACDEH and submit a draft copy of the flyer to ACDEH for comment and distribution on ACDEH letterhead. Additionally, a search for addresses with two EBMUD water supply utility boxes, indicating the presence of municipal water supply and anti-siphon connections for private water wells, can be fruitful. Not all addresses participated in the anti-siphon device installation program, so not all addresses with wells will have two boxes.

ACDEH requests that a plume delineation and sensitive receptor report be submitted by the date identified below. Please include a Focused Site Conceptual Model (SCM; see Attachment A) summarizing site data, indicating tabulated soil analytical samples that have been removed from the site by excavation or other means (indicated by legible strike out, fade out, or other means), comparing vapor data to appropriate identified goals (LTCP or updated appropriate commercial Environmental Screening Levels [ESLs]), and evaluating the site against LTCP General or Media-Specific Criteria, or updated ESLs, where appropriate. Please include the results of this effort in the report to be generated for the following technical comment.

- 2. Quarterly Verification Groundwater Monitoring** – Please conduct a minimum of one additional quarterly groundwater monitoring event, in order to determine groundwater concentrations in the near future when depth to groundwater may be shallower as discussed above. This is requested in an effort

to verify the affect of groundwater elevations on contaminant concentrations at the site. Please include this data in the report requested above.

### **SUBMITTAL ACKNOWLEDGEMENT STATEMENT**

Please note that ACDEH has updated Attachment 1 with regard to report submittals to ACDEH. ACDEH will now be requiring a Submittal Acknowledgement Statement, replacing the Perjury Statement, as a cover letter signed by the Responsible Party (RP). The language for the Submittal Acknowledgement Statement is as follows:

*I have read and acknowledge the content, recommendations and/or conclusions contained in the attached document or report submitted on my behalf to ACDEH's FTP server and the SWRCB's Geotracker Website.*

Please make this change to your submittals to ACDEH.

### **TECHNICAL REPORT REQUEST**

Please upload technical reports to the ACEH ftp site (Attention: Mark Detterman), and to the State Water Resources Control Board's Geotracker website, in accordance with Attachment 1 and the following specified file naming convention and schedule:

- **March 31, 2017** – Focused Site Conceptual Model, Sensitive Receptor Survey, and First Quarter 2017 Groundwater Monitoring Report  
File to be named: RO208\_SWI\_R\_yyyy-mm-dd

These reports are being requested pursuant to California Health and Safety Code Section 25296.10. 23 CCR Sections 2652 through 2654, and 2721 through 2728 outline the responsibilities of a responsible party in response to an unauthorized release from a petroleum UST system, and require your compliance with this request.

Online case files are available for review at the following website: <http://www.acgov.org/aceh/index.htm>.

If you have any questions, please call me at (510) 567-6876 or send me an electronic mail message at [mark.detterman@acgov.org](mailto:mark.detterman@acgov.org).

Sincerely,

Mark E. Detterman, PG, CEG  
Senior Hazardous Materials Specialist

Enclosures: Attachment 1 – Responsible Party (ies) Legal Requirements / Obligations and Electronic Report Upload (ftp) Instructions

Attachment A - – Site Conceptual Model Requisite Elements

Figure 5 *Groundwater Study and Water Supply History of the East Bay Plain, Alameda and Contra Costa Counties, CA*, The Friends of the San Francisco Bay Estuary, Norfleet Consultants, June 15, 1998

cc: Rick Marment, 9748 Weddington Circle, Granite Bay, CA 95746, (Sent via electronic mail to: [r.mar@shorewest.net](mailto:r.mar@shorewest.net))

Mr. Jeff Kerry  
RO000208  
January 9, 2017, Page 4

Thomas Sparrowe, Closure Solutions, Inc, 4600 Northgate Blvd, Suite 230, Sacramento, CA 95834  
(Sent via electronic mail to: [tsparrowe@innovex.net](mailto:tsparrowe@innovex.net))

Dilan Roe, ACDEH, (Sent via electronic mail to: [dilan.roe@acgov.org](mailto:dilan.roe@acgov.org))  
Paresh Khatri, ACDEH; (Sent via electronic mail to: [paresh.khatri@acgov.org](mailto:paresh.khatri@acgov.org))  
Mark Detterman, ACDEH, (Sent via electronic mail to: [mark.detterman@acgov.org](mailto:mark.detterman@acgov.org))  
Electronic File; GeoTracker

## Attachment 1

### Responsible Party(ies) Legal Requirements / Obligations

#### REPORT REQUESTS

These reports are being requested pursuant to California Health and Safety Code Section 25296.10. 23 CCR Sections 2652 through 2654, and 2721 through 2728 outline the responsibilities of a responsible party in response to an unauthorized release from a petroleum UST system, and require your compliance with this request.

#### ELECTRONIC SUBMITTAL OF REPORTS

Alameda County Department of Environmental Health's (ACDEH) Environmental Cleanup Oversight Programs, Local Oversight Program (LOP) and Site Cleanup Program (SCP) require submission of reports in electronic form. The electronic copy replaces paper copies and is expected to be used for all public information requests, regulatory review, and compliance/enforcement activities. Instructions for submission of electronic documents to the Alameda County Environmental Cleanup Oversight Program File Transfer Protocol (FTP) site are provided on the attached "Electronic Report Upload Instructions." Submission of reports to the Alameda County FTP site is an addition to existing requirements for electronic submittal of information to the State Water Resources Control Board (SWRCB) GeoTracker website. In September 2004, the SWRCB adopted regulations that require electronic submittal of information for all groundwater cleanup programs. For several years, responsible parties for cleanup of leaks from underground storage tanks (USTs) have been required to submit groundwater analytical data, surveyed locations of monitoring wells, and [other](#) data to the GeoTracker database over the Internet. Beginning July 1, 2005, these same reporting requirements were added to SCP sites. Beginning July 1, 2005, electronic submittal of a complete copy of all reports for all sites is required in GeoTracker (in PDF format). Please visit the SWRCB website ([http://www.waterboards.ca.gov/water\\_issues/programs/ust/electronic\\_submittal/](http://www.waterboards.ca.gov/water_issues/programs/ust/electronic_submittal/)) for more information on these requirements.

#### ACKNOWLEDGEMENT STATEMENT

All work plans, technical reports, or technical documents submitted to ACDEH must be accompanied by a cover letter from the responsible party that states, at a minimum, the following: "I have read and acknowledge the content, recommendations and/or conclusions contained in the attached document or report submitted on my behalf to ACDEH's FTP server and the SWRCB's GeoTracker website." This letter must be signed by an officer or legally authorized representative of your company. Please include a cover letter satisfying these requirements with all future reports and technical documents submitted for this fuel leak case.

#### PROFESSIONAL CERTIFICATION & CONCLUSIONS/RECOMMENDATIONS

The California Business and Professions Code (Sections 6731, 6735, and 7835) requires that work plans and technical or implementation reports containing geologic or engineering evaluations and/or judgments be performed under the direction of an appropriately licensed or certified professional. For your submittal to be considered a valid technical report, you are to present site-specific data, data interpretations, and recommendations prepared by an appropriately licensed professional and include the professional registration stamp, signature, and statement of professional certification. Please ensure all that all technical reports submitted for this case meet this requirement. Additional information is available on the Board of Professional Engineers, Land Surveyors, and Geologists website at: <http://www.bpelsg.ca.gov/laws/index.shtml>.

#### UNDERGROUND STORAGE TANK CLEANUP FUND

Please note that delays in investigation, late reports, or enforcement actions may result in your becoming ineligible to receive grant money from the state's Underground Storage Tank Cleanup Fund (Senate Bill 2004) to reimburse you for the cost of cleanup.

#### AGENCY OVERSIGHT

If it appears as though significant delays are occurring or reports are not submitted as requested, we will consider referring your case to the Regional Board or other appropriate agency, including the County District Attorney, for possible enforcement actions. California Health and Safety Code, Section 25299.76 authorizes enforcement including administrative action or monetary penalties of up to \$10,000 per day for each day of violation.

<b>Alameda County Environmental Cleanup Oversight Programs (LOP and SCP)</b>	<b>REVISION DATE:</b> December 1, 2016
	<b>ISSUE DATE:</b> July 5, 2005
	<b>PREVIOUS REVISIONS:</b> October 31, 2005; December 16, 2005; March 27, 2009; July 8, 2010, July 25, 2010; May 15, 2014, November 29, 2016
<b>SECTION:</b> Miscellaneous Administrative Topics & Procedures	<b>SUBJECT:</b> Electronic Report Upload (ftp) Instructions

The Alameda County Environmental Cleanup Oversight Programs (LOP and SCP) require submission of all reports in electronic form to the county's ftp site. Paper copies of reports will no longer be accepted. The electronic copy replaces the paper copy and will be used for all public information requests, regulatory review, and compliance/enforcement activities.

## REQUIREMENTS

- **Please do not submit reports as attachments to electronic mail.**
- Entire report including cover letter must be submitted to the ftp site as **a single portable document format (PDF) with no password protection.**
- It is **preferable** that reports be converted to PDF format from their original format, (e.g., Microsoft Word) rather than scanned.
- **Signature pages and perjury statements must be included and have either original or electronic signature.**
- **Do not password protect the document.** Once indexed and inserted into the correct electronic case file, the document will be secured in compliance with the County's current security standards and a password. **Documents with password protection will not be accepted.**
- Each page in the PDF document should be rotated in the direction that will make it easiest to read on a computer monitor.
- Reports must be named and saved using the following naming convention:

RO#\_Report Name\_Year-Month-Date (e.g., RO#5555\_WorkPlan\_2005-06-14)

## Submission Instructions

- 1) Obtain User Name and Password
  - a) Contact the Alameda County Environmental Health Department to obtain a User Name and Password to upload files to the ftp site.
    - i) Send an e-mail to [deh.loptoxic@acgov.org](mailto:deh.loptoxic@acgov.org).
  - b) In the subject line of your request, be sure to include "**ftp PASSWORD REQUEST**" and in the body of your request, include the **Contact Information, Site Addresses**, and the **Case Numbers (RO# available in Geotracker) you will be posting for.**
- 2) Upload Files to the ftp Site
  - a) Open File Explorer using the Windows  key + E keyboard shortcut.
    - i) Note: Netscape, Safari, and Firefox browsers will not open the FTP site as they are NOT being supported at this time.
  - b) On the address bar, type in ftp://alcoftp1.acgov.org.
  - c) Enter your User Name and Password. (Note: Both are Case Sensitive)
  - d) Click Log On.
  - e) Open "My Computer" on your computer and navigate to the file(s) you wish to upload to the ftp site.
  - f) With both "My Computer" and the ftp site open in separate windows, drag and drop the file(s) from "My Computer" to the ftp window.
- 3) Send E-mail Notifications to the Environmental Cleanup Oversight Programs
  - a) Send email to [deh.loptoxic@acgov.org](mailto:deh.loptoxic@acgov.org) notify us that you have placed a report on our ftp site.
  - b) Copy your Caseworker on the e-mail. Your Caseworker's e-mail address is the entire first name then a period and entire last name @acgov.org. (e.g., firstname.lastname@acgov.org)
  - c) The subject line of the e-mail must start with the RO# followed by **Report Upload**. (e.g., Subject: RO1234 Report Upload) If site is a new case without an RO#, use the street address instead.
  - d) If your document meets the above requirements and you follow the submission instructions, you will receive a notification by email indicating that your document was successfully uploaded to the ftp site.

**ATTACHMENT A**

**Site Conceptual Model Requisite Elements**

# ATTACHMENT A

## Site Conceptual Model

The site conceptual model (SCM) is an essential decision-making and communication tool for all interested parties during the site characterization, remediation planning and implementation, and closure process. A SCM is a set of working hypotheses pertaining to all aspects of the contaminant release, including site geology, hydrogeology, release history, residual and dissolved contamination, attenuation mechanisms, pathways to nearby receptors, and likely magnitude of potential impacts to receptors.

The SCM is initially used to characterize the site and identify data gaps. As the investigation proceeds and the data gaps are filled, the working hypotheses are modified, and the overall SCM is refined and strengthened until it is said to be "validated". At this point, the focus of the SCM shifts from site characterization towards remedial technology evaluation and selection, and later remedy optimization, and forms the foundation for developing the most cost-effective corrective action plan to protect existing and potential receptors.

For ease of review, Alameda County Environmental Health (ACEH) requests utilization of tabular formats to (1) highlight the major SCM elements and their associated data gaps which need to be addressed to progress the site to case closure (see Table 1 of attached example), and (2) highlight the identified data gaps and proposed investigation activities (see Table 2 of the attached example). ACEH requests that the tables presenting the SCM elements, data gaps, and proposed investigation activities be updated as appropriate at each stage of the project and submitted with work plans, feasibility studies, corrective action plans, and requests for closures to support proposed work, conclusions, and/or recommendations.

The SCM should incorporate, but is not limited to, the topics listed below. Please support the SCM with the use of large-scaled maps and graphics, tables, and conceptual diagrams to illustrate key points. Please include an extended site map(s) utilizing an aerial photographic base map with sufficient resolution to show the facility, delineation of streets and property boundaries within the adjacent neighborhood, downgradient irrigation wells, and proposed locations of transects, monitoring wells, and soil vapor probes.

- a. Regional and local (on-site and off-site) geology and hydrogeology. Include a discussion of the surface geology (e.g., soil types, soil parameters, outcrops, faulting), subsurface geology (e.g., stratigraphy, continuity, and connectivity), and hydrogeology (e.g., water-bearing zones, hydrologic parameters, impermeable strata). Please include a structural contour map (top of unit) and isopach map for the aquitard that is presumed to separate your release from the deeper aquifer(s), cross sections, soil boring and monitoring well logs and locations, and copies of regional geologic maps.
- b. Analysis of the hydraulic flow system in the vicinity of the site. Include rose diagrams for depicting groundwater gradients. The rose diagram shall be plotted on groundwater elevation contour maps and updated in all future reports submitted for your site. Please address changes due to seasonal precipitation and groundwater pumping, and evaluate the potential interconnection between shallow and deep aquifers. Please include an analysis of vertical hydraulic gradients, and effects of pumping rates on hydraulic head from nearby water supply wells, if appropriate. Include hydraulic head in the different water bearing zones and hydrographs of all monitoring wells.
- c. Release history, including potential source(s) of releases, potential contaminants of concern (COC) associated with each potential release, confirmed source locations, confirmed release locations, and existing delineation of release areas. Address primary leak source(s) (e.g., a tank, sump, pipeline, etc.) and secondary sources (e.g., high-



## ATTACHMENT A

### Site Conceptual Model (continued)

concentration contaminants in low-permeability lithologic soil units that sustain groundwater or vapor plumes). Include local and regional plan view maps that illustrate the location of sources (former facilities, piping, tanks, etc.).

- d. Plume (soil gas and groundwater) development and dynamics including aging of source(s), phase distribution (NAPL, dissolved, vapor, residual), diving plumes, attenuation mechanisms, migration routes, preferential pathways (geologic and anthropogenic), magnitude of chemicals of concern and spatial and temporal changes in concentrations, and contaminant fate and transport. Please include three-dimensional plume maps for groundwater and two-dimensional soil vapor plume plan view maps to provide an accurate depiction of the contaminant distribution of each COC.
- e. Summary tables of chemical concentrations in different media (i.e., soil, groundwater, and soil vapor). Please include applicable environmental screening levels on all tables. Include graphs of contaminant concentrations versus time.
- f. Current and historic facility structures (e.g., buildings, drain systems, sewer systems, underground utilities, etc.) and physical features including topographical features (e.g., hills, gradients, surface vegetation, or pavement) and surface water features (e.g. routes of drainage ditches, links to water bodies). Please include current and historic site maps.
- g. Current and historic site operations/processes (e.g., parts cleaning, chemical storage areas, manufacturing, etc.).
- h. Other contaminant release sites in the vicinity of the site. Hydrogeologic and contaminant data from those sites may prove helpful in testing certain hypotheses for the SCM. Include a summary of work and technical findings from nearby release sites, including the two adjacent closed LUFT sites, (i.e., Montgomery Ward site and the Quest Laboratory site).
- i. Land uses and exposure scenarios on the facility and adjacent properties. Include beneficial resources (e.g., groundwater classification, wetlands, natural resources, etc.), resource use locations (e.g., water supply wells, surface water intakes), subpopulation types and locations (e.g., schools, hospitals, day care centers, etc.), exposure scenarios (e.g. residential, industrial, recreational, farming), and exposure pathways, and potential threat to sensitive receptors. Include an analysis of the contaminant volatilization from the subsurface to indoor/outdoor air exposure route (i.e., vapor pathway). Please include copies of Sanborn maps and aerial photographs, as appropriate.
- j. Identification and listing of specific data gaps that require further investigation during subsequent phases of work. Proposed activities to investigate and fill data gaps identified.

**TABLE 1  
INITIAL SITE CONCEPTUAL MODEL**

<b>CSM Element</b>	<b>CSM Sub-Element</b>	<b>Description</b>	<b>Data Gap</b>	<b>How to Address</b>
Geology and Hydrogeology	Regional	<p>The site is in the northwest portion of the Livermore Valley, which consists of a structural trough within the Diablo Range and contains the Livermore Valley Groundwater Basin (referred to as "the Basin") (DWR, 2006). Several faults traverse the Basin, which act as barriers to groundwater flow, as evidenced by large differences in water levels between the upgradient and downgradient sides of these faults (DWR, 2006). The Basin is divided into 12 groundwater basins, which are defined by faults and non-water-bearing geologic units (DWR, 1974).</p> <p>The hydrogeology of the Basin consists of a thick sequence of fresh-water-bearing continental deposits from alluvial fans, outwash plains, and lacustrine environments to up to approximately 5,000 feet bgs (DWR, 2006). Three defined fresh-water bearing geologic units exist within the Basin: Holocene Valley Fill (up to approximately 400 feet bgs in the central portion of the Basin), the Plio-Pleistocene Livermore Formation (generally between approximately 400 and 4,000 feet bgs in the central portion of the Basin), and the Pliocene Tassajara Formation (generally between approximately 250 and 5,000 or more feet bgs) (DWR, 1974). The Valley Fill units in the western portion of the Basin are capped by up to 40 feet of clay (DWR, 2006).</p>	None	NA
	Site	<p><b>Geology:</b> Borings advanced at the site indicate that subsurface materials consist primarily of finer-grained deposits (clay, sandy clay, silt and sandy silt) with interbedded sand lenses to 20 feet below ground surface (bgs), the approximate depth to which these borings were advanced. The documented lithology for one on-site boring that was logged to approximately 45 feet bgs indicates that beyond approximately 20 feet bgs, fine-grained soils are present to approximately 45 feet bgs. A cone penetrometer technology test indicated the presence of sandier lenses from approximately 45 to 58 feet bgs and even coarser materials (interbedded with finer-grained materials) from approximately 58 feet to 75 feet bgs, the total depth drilled. The lithology documented at the site is similar to that reported at other nearby sites, specifically the Montgomery Ward site (7575 Dublin Boulevard), the Quest laboratory site (6511 Golden Gate Drive), the Shell-branded Service Station site (11989 Dublin Boulevard), and the Chevron site (7007 San Ramon Road).</p> <p><b>Hydrogeology:</b> Shallow groundwater has been encountered at depths of approximately 9 to 15 feet bgs. The hydraulic gradient and groundwater flow direction have not been specifically evaluated at the site.</p>	<p>As noted, most borings at the site have been advanced to approximately 20 feet bgs, and one boring has been advanced and logged to 45 feet bgs; CPT data was collected to 75 feet bgs at one location. Lithologic data will be obtained from additional borings that will be advanced on site to further the understanding of the subsurface, especially with respect to deeper lithology.</p> <p>The on-site shallow groundwater horizontal gradient has not been confirmed. Additionally, it is not known if there may be a vertical component to the hydraulic gradient.</p>	<p>Two direct push borings and four multi-port wells will be advanced to depth (up to approximately 75 feet bgs) and soil lithology will be logged. See items 4 and 5 on Table 2.</p> <p>Shallow and deeper groundwater monitoring wells will be installed to provide information on lateral and vertical gradients. See Items 2 and 5 on Table 2.</p>
Surface Water Bodies		The closest surface water bodies are culverted creeks. Martin Canyon Creek flows from a gully west of the site, enters a culvert north of the site, and then bends to the south, passing approximately 1,000 feet east of the site before flowing into the Alamo Canal. Dublin Creek flows from a gully west of the site, enters a culvert approximately 750 feet south of the site, and then joins Martin Canyon Creek approximately 750 feet southeast of the site.	None	NA
Nearby Wells		The State Water Resources Control Board's GeoTracker GAMA website includes information regarding the approximate locations of water supply wells in California. In the vicinity of the site, the closest water supply wells presented on this website are depicted approximately 2 miles southeast of the site; the locations shown are approximate (within 1 mile of actual location for California Department of Public Health supply wells and 0.5 mile for other supply wells). No water-producing wells were identified within 1/4 mile of the site in the well survey conducted for the Quest Laboratory site (6511 Golden Gate Drive; documented in 2009); information documented in a 2005 report for the Chevron site at 7007 San Ramon Road indicates that a water-producing well may exist within 1/2 mile of the site.	A formal well survey is needed to identify water-producing, monitoring, cathodic protection, and dewatering wells.	Obtain data regarding nearby, permitted wells from the California Department of Water Resources and Zone 7 Water Agency (Item 11 on Table 2).

**TABLE 2  
DATA GAPS AND PROPOSED INVESTIGATION**


<b>Item</b>	<b>Data Gap</b>	<b>Proposed Investigation</b>	<b>Rationale</b>	<b>Analysis</b>
5	Evaluate the possible presence of impacts to deeper groundwater.  Evaluate deeper groundwater concentration trends over time.  Obtain data regarding the vertical groundwater gradient.  Obtain more lithological data below 20 feet bgs.	Install four continuous multichannel tubing (CMT) groundwater monitoring wells (aka multi-port wells) to approximately 65 feet bgs in the northern parking lot with ports at three depths (monitoring well locations may be adjusted pending results of shallow grab groundwater samples; we will discuss any potential changes with ACEH before proceeding). Groundwater monitoring frequency to be determined. Soil samples will be collected only if there are field indications of impacts. Soil lithology will be logged. However, information regarding the moisture content of soil may not be reliable using sonic drilling technology (two borings will be logged using direct push technology; see Item 4, above).	One well is proposed at the western (upgradient) property boundary to confirm that there are no deeper groundwater impacts from upgradient. Two wells are proposed near the center of the northern parking lot to evaluate potential impacts in an area where deeper impacts, if any, would most likely to be found. One well is proposed at the eastern (downgradient) property boundary to confirm that there are no impacts extending off-site. Port depths will be chosen based on the locations of saturated soils (as logged in direct push borings; see Item 4, above), but are expected at approximately 15, 45, and 60 feet bgs.	<i>Groundwater:</i> VOCs by EPA Method 8260, dissolved oxygen, oxidation/reduction potential, temperature, pH, and specific conductance.
6	Evaluate possible off-site migration of impacted soil vapor in the downgradient direction (east).  Evaluate concentration trends over time.	Install 4 temporary nested soil vapor probes at approximately 4 and 8 feet bgs along the eastern property boundary. Based on the results of the sampling, two sets of nested probes will be converted to vapor monitoring wells to allow for evaluation of VOC concentration trends over time.	Available data indicate that PCE and TCE are present in soil vapor in the eastern portion of the northern parking lot. Samples are proposed on approximately 50-foot intervals along the eastern property boundary to provide a transect of concentrations through the vapor plume. The depths of 4 and 8 feet bgs are chosen to provide data closest to the source (i.e., groundwater) while avoiding saturated soil, and also provide shallower data to help evaluate potential attenuation within the soil column. Two sets of nested vapor probes will be converted into vapor monitoring wells (by installing well boxes at ground surface); the locations of the permanent wells will be chosen based on the results of samples from the temporary probes.	<i>Soil vapor:</i> VOCs by EPA Method TO-15.
7	Evaluate potential for off-site migration of impacted groundwater in the downgradient direction (east).	Advance two borings to approximately 20 feet bgs in the parking lot of the property east of the Crown site for collection of grab groundwater samples.	Two borings are proposed off-site, on the property east of the Crown site, just east of the building in the expected area of highest potential VOC concentrations.	<i>Groundwater:</i> VOCs by EPA Method 8260, dissolved oxygen, oxidation/reduction potential, temperature, pH, and specific conductance.
8	Evaluate VOC concentrations just north of the highest concentration area.	Advance two borings to approximately 20 feet bgs north of Building A for collection of soil and grab groundwater samples. Soil samples will be collected at two depths in the vadose zone. Soil samples will be collected based on field indications of impacts (PID readings, odor, staining) or, in the absence of field indications of impacts, at 5 and 10 feet bgs.	The highest concentrations of PCE in groundwater were detected at boring NM-B-32, just north of Building A. The nearest available data to the north are approximately 75 feet away. One of the borings will be advanced approximately 20 feet north of NM-B-32 to provide data close to the highest concentration area. A second boring will be advanced approximately halfway between the first boring and former boring NM-B-33 to provide additional spatial data for contouring purposes. These borings will be part of a transect in the highest concentration area.	<i>Groundwater:</i> VOCs by EPA Method 8260, dissolved oxygen, oxidation/reduction potential, temperature, pH, and specific conductance.  <i>Soil:</i> VOCs by EPA Method 8260 (soil samples to be collected using field preservation in accordance with EPA Method 5035).
9	Evaluate VOC concentrations in soil vapor in the south parcel of the site.	Install four temporary soil vapor probes at approximately 5 feet bgs around boring SV-25, where PCE was detected in soil vapor at a low concentration.	PCE was detected in soil vapor sample SV-25 in the southern parcel, although was not detected in groundwater in that area. Three probes will be installed approximately 30 feet from of boring SV-25 to attempt to delineate the extent of impacts. A fourth probe is proposed west of the original sample, close to the property boundary and the location of mapped utility lines, which may be a potential conduit, to evaluate potential impacts from the west.	<i>Soil vapor:</i> VOCs by EPA Method TO-15.
10	Obtain additional information regarding subsurface structures and utilities to further evaluate migration pathways and sources.	Ground penetrating radar (GPR) and other utility locating methodologies will be used, as appropriate, to further evaluate the presence of unknown utilities and structures at the site.	Utilities have been identified at the site that include an on-site sewer lateral and drain line, and shallow water, electric, and gas lines. Given the current understanding of the distribution of PCE in groundwater at the site, it is possible that other subsurface utilities, and specifically sewer laterals, exist that may act as a source or migration pathway for distribution of VOCs in the subsurface.	NA

## WATER WELLS IN 1910

The ● indicates the location of public and private water wells in the East Bay Area in the Fall of 1910. At that time, there were approximately 3400 active wells. The data were collected by Dockweiler (1912). The map does not include wells that had been abandoned prior to 1910.

The pattern of wells provides an indication of the population density of the cities at the time. Oakland, Alameda Island, and Berkeley were well developed, while Richmond (founded in 1900), Hayward, and San Leandro were just beginning to develop.

The well locations shown on this map are approximate.

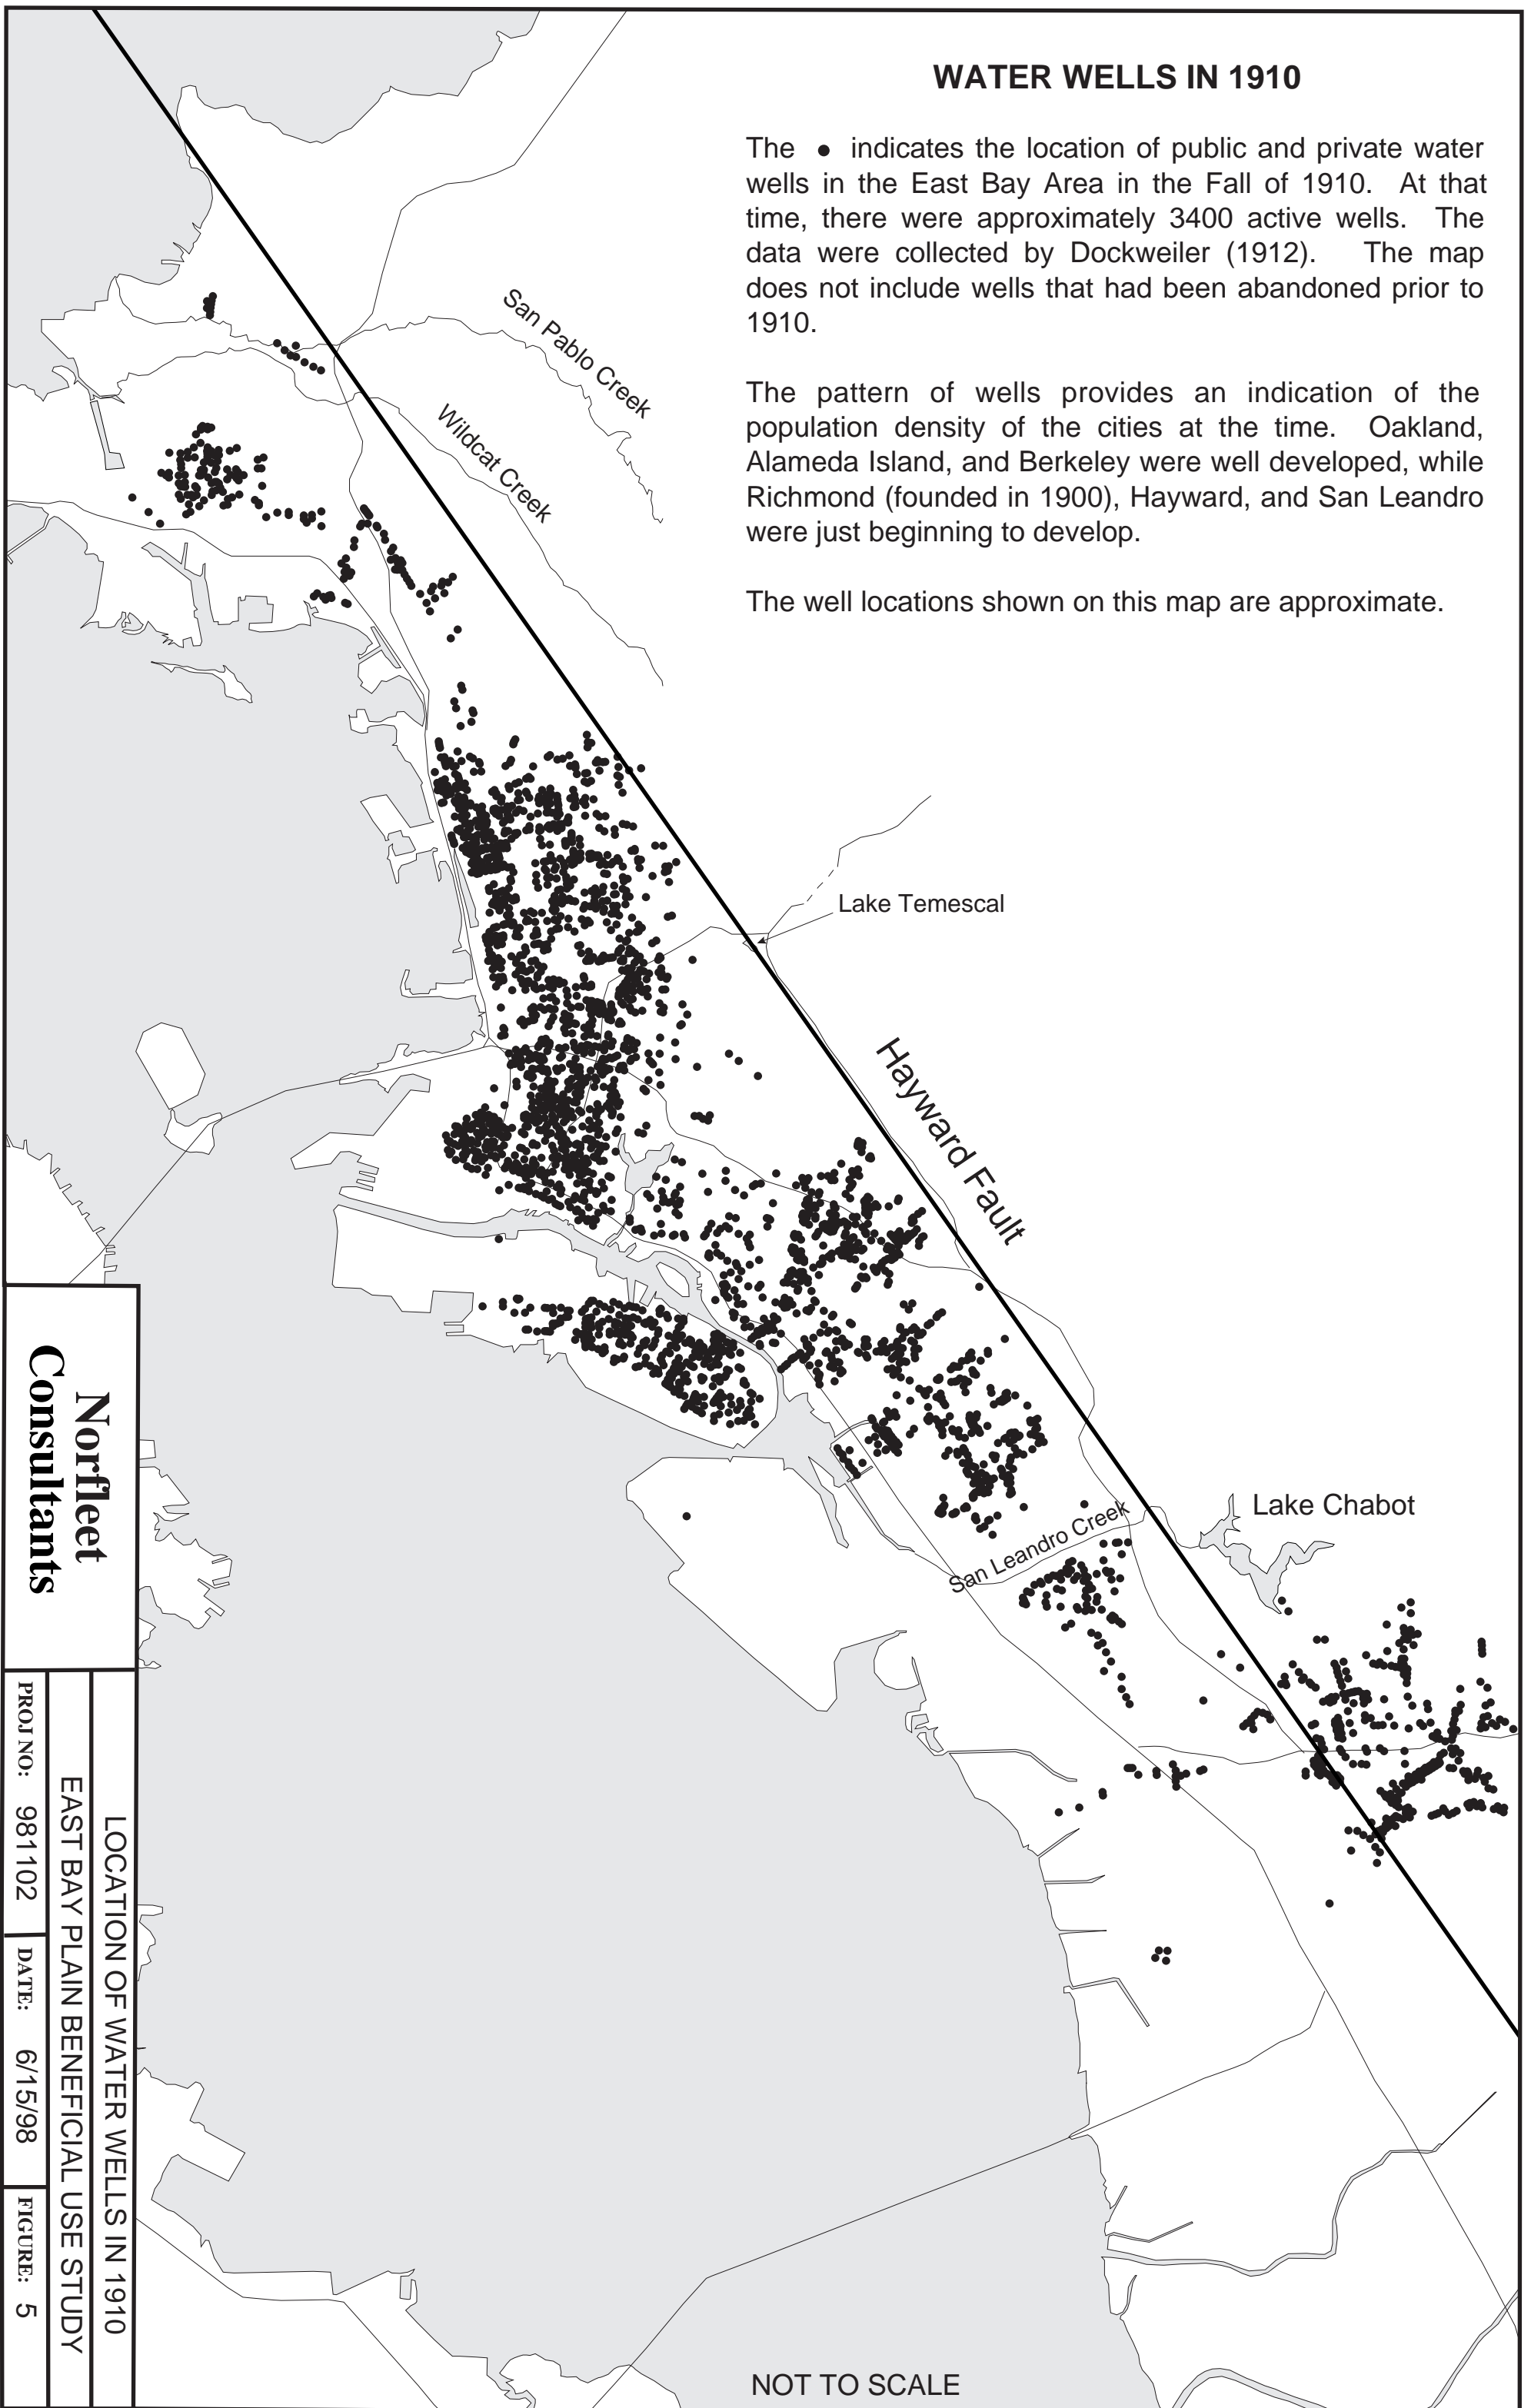

**Norfleet  
Consultants**

LOCATION OF WATER WELLS IN 1910  
EAST BAY PLAIN BENEFICIAL USE STUDY  
PROJ NO: 981102 DATE: 6/15/98 FIGURE: 5