Estate of Michael Dolan
Ms. Noreen Fitzpatrick, Trustee
3215 Deer Park Dr.
Walnut Creek, CA 94598

3 - 26, 2008

Mr. Barney Chan
Alameda County Health Care Services Agency
Environmental Protection Division
1131 Harbor Bay Parkway, Suite 250
Alameda, CA 94502-6577

Re: Perjury Statement
Dolan Property, 6393 Scarlett Court, Dublin, California; RO-210

Dear Mr Chan,

"I declare under penalty of perjury, that the information and / or recommendations contained in the attached proposal or report is true and correct to the best of my knowledge."

Noreen Fitzpatrick
Noreen Fitzpatrick, Trustee

c. Peter MacDonald, Esquire
Wanden Treanor, Esquire

First Quarter 2008
Groundwater Monitoring Event

Dolan Trust Property
6393 Scarlett Court
Dublin, California
ACEH Fuel Leak Case No. RO0000210

March 21, 2008
BEI Job No. 202016

Prepared for:

Estate of Michael Dolan
Ms. Noreen Fitzpatrick, Trustee
3215 Deer Park Dr.
Walnut Creek, CA 94598

Prepared by:

Blymyer Engineers, Inc.
1829 Clement Avenue
Alameda, CA 94501-1395
(510) 521-3773

Limitations

Services performed by Blymyer Engineers, Inc. have been provided in accordance with generally accepted professional practices for the nature and conditions of similar work completed in the same or similar localities, at the time the work was performed. The scope of work for the project was conducted within the limitations prescribed by the client. This report is not meant to represent a legal opinion. No other warranty, expressed or implied, is made. This report was prepared for the sole use of the client, The Estate of Michael Dolan.

Blymyer Engineers, Inc.



By: _____
Mark E. Detterman, CEG
Senior Geologist

And: _____
Michael S. Lewis, REA
Vice President, Technical Services

Table of Contents

Tables

Figures

Appendices

1.0 Introduction

This report documents the First Quarter 2008 groundwater monitoring event at the former Dolan Trust Property in Dublin, California (Figure 1).

1.1 Background

A 600-gallon underground storage tank (UST) was removed in February 1990 from the subject site (Figure 2). Although the UST had reportedly stored diesel more recently, soil and groundwater samples collected for laboratory analysis indicated that the contaminant of concern at the site was gasoline. Files maintained by the Alameda County Department of Environmental (ACDEH) do not contain waste manifests for the disposal of soil, although a *Uniform Hazardous Waste Manifest* is present documenting the disposal of a 600-gallon UST. This suggests that contaminated soil may not have been removed from the site. In October 1990, five soil bores were installed at the site, and soil and grab groundwater samples were collected. Additional delineation work was conducted in November 1991, when groundwater monitoring wells MW-1 through MW-4 were installed to a depth of 20 feet below grade surface (bgs). Soil and groundwater samples were collected. In November 1992, 14 additional soil bores were installed, and soil and grab groundwater samples were collected from selected bore locations. Although there were several data gaps in the perimeter zone of soil and groundwater delineation, the soil and groundwater plumes were largely defined as a result of this investigation. The groundwater plume did not appear to extend offsite; however, a thin free-phase layer was present immediately adjacent to the former UST basin, and at a location approximately 40 feet to the east. Additional wells were proposed to fill the existing data gaps and to monitor the lateral extent of impacted groundwater and free-phase. As a consequence, in March 1995, wells MW-5 and MW-6 were installed to a depth of 10 feet bgs. Intermittent groundwater sample collection or groundwater monitoring has occurred at the facility since 1991. In an August 1998 letter, the ACDEH suggested that a health risk analysis or the installation of an oxygen releasing compound (ORC) might be appropriate for the site. Also in the August 1998 letter, the ACDEH stated that groundwater sampling of wells MW-1, MW-3, MW-5, and MW-6 could be discontinued, stated that the sampling interval could be decreased to a semiannual basis, and requested resumption of groundwater monitoring.

In May 2002, Blymyer Engineers was retained by Mr. Michael Fitzpatrick, on behalf of Mr. Michael Dolan, to conduct semiannual groundwater sampling of wells MW-2 and MW-4, and to conduct a file review to help determine the next appropriate step at the site.

In May 2002, Blymyer Engineers located and rehabilitated the wells at the site. Well MW-5 required the most extensive rehabilitation work, and required resurveying due to a change in well casing elevation. In June 2002, wells MW-2 and MW-4 were sampled, while depth to groundwater was measured all of the wells. Except for a slight increase in benzene in groundwater from well MW-4, the concentration of all analytes in the two wells decreased from the August 1997 sampling event. Based upon a review of the results, the ACDEH recommended that well MW-5 be incorporated into the sampling program and that quarterly groundwater monitoring resume in order that contaminant concentrations and contaminant trends could be quickly generated for the recommended health risk assessment.

Two additional quarters were completed prior to the death of Mr. Dolan. Groundwater monitoring was on hold after January 2003 due to the Estate becoming established. During the groundwater monitoring event in December 2002, analysis for the fuel oxygenates was conducted by EPA Method 8260B. All fuel oxygenates were found to be non-detectable at good limits of detection. Consequently, all sporadic occurrences of methyl tert-butyl ether (MTBE) previously detected at the site have been attributed to 3-methyl-pentane, another gasoline related compound. This suggests that the release predates the use of MTBE and other fuel oxygenates as gasoline additives. All previously available data from the site has been tabulated on Tables I through VI.

On June 13, 2003, a workplan was submitted to the ACDEH in order to allow further subsurface delineation of impacted soil at the site. In a telephone conversation on June 16, 2003, Mr. Scott Seery mentioned that it was unlikely that he would be able to respond in a timely manner due to the work load at the ACDEH, and noted that if a response was not issued 60 days after receipt, regulations stated that the workplan should be considered approved. Consequently, field work commenced on September 13, 2003. Nine Geoprobe[7] soil bores were installed at the site to augment existing soil data. The data indicated that the lateral and vertical extent of impacted soil at the site had been adequately delineated to relatively low

concentrations, and the limits further refined for the purposes of determining appropriate remedial actions (*Geoprobe*[7] *Subsurface Investigation*, dated October 10, 2003).

Based on these data and a lack of further comments by the ACDEH, a *Remedial Action Plan* (RAP), dated April 6, 2004, was issued. The plan detailed overexcavation and construction dewatering, as the principal method of remedial action. Introduction of ORC into the resulting excavation as an additional measure of insurance, should residual contamination be intentionally or unintentionally left in place, was also proposed. Use of ORC was proposed based on general knowledge that biodegradation of petroleum hydrocarbons is generally an oxygen limited process. A Request for Proposal (RFP) was generated in early May 2004 for contractor bidding purposes; however, it was not released due to a change in the timeline for sale closure. On September 2, 2004, Blymyer Engineers contacted Mr. Seery in order to determine the status of the RAP review. At that time, Mr. Seery notified Blymyer Engineers that Mr. Robert Schultz was the new case manager for the site. Mr. Schultz required time to review and become familiar with the file. On November 15, 2004, the ACDEH issued a 5-page response letter (*Fuel Leak Case No. RO0000210*) requesting extensive further work and containing several deadlines. A December 31, 2004 deadline was established for a workplan for additional site characterization. The *Workplan for Additional Investigation and Letter Report*, dated December 23, 2004, was submitted to the ACDEH on January 3, 2005.

In a letter dated January 24, 2005, the ACDEH approved the workplan provided four conditions were met:

- A pilot hole was to be used to identify lithology prior to collection of a groundwater sample from a deeper water-bearing zone,
- Should additional groundwater wells be required, the ACDEH would be consulted regarding well construction details,
- Should additional soil or groundwater samples be required, the ACDEH would be kept informed of planned changes and consistent dynamic investigation procedures, and
- A 72-hour written advanced warning would be provided.

On February 18, 2005, Blymyer Engineers mobilized to the site to install two to three dual-tube direct-push soil bores in an attempt to collect the approved soil and groundwater samples. As a precursor to the mobilization, a conduit survey was conducted. However, due to poor soil recovery an additional mobilization to the site was required. After notifying, and obtaining approval from, the ACDEH 72 hours in advance, a Cone Penetrometer Test (CPT) direct-push rig was mobilized to the site on March 28, 2005. Prior to the March 28, 2005 mobilization, the ACDEH approved a reduction in the quarterly analytical program, based on historical analytical trends. Specifically, hydrocarbon analysis of groundwater samples from wells MW-1, MW-3, and MW-6 was eliminated.

On April 13, 2005, CCS Environmental resurveyed all wells at the site. As of April 30, 2005, all tenant operations at the site ceased. This included the batch plant used by Dublin Concrete.

On May 10, 2005, Blymyer Engineers submitted the *Additional Site Investigation Data Transmittal* to the ACDEH providing a brief summary of the results of the CPT bore installations. Based on the detection of hydrocarbon compounds in groundwater between 30 and 40 feet bgs, the letter proposed the installation of groundwater well MW-7 across a deeper water-bearing zone in a downgradient position. Shortly thereafter, the ACDEH reported that Mr. Schultz had left the employ of the agency and that the case had not been assigned to a new case worker yet. The ACDEH was apprised that due to the sale of the parcel, work would proceed, pending agency review.

As a part of another related project, Blymyer Engineers oversaw the permitted destruction of two old water production wells between May 16 and May 24, 2005. According to Zone 7, both wells appear to have dated from the 1940s or 1950s. Well "3S/1E 6F 1", located on the subject parcel was constructed of 8-inch-diameter steel casing and was 95 feet in total depth. Well "3S/1E 6F 2" was located on the adjacent parcel, also owned by Dolan Properties, and was constructed of 13-inch-diameter riveted steel casing and was 38 feet in total depth. All Zone 7 permit conditions were observed; however, the upper 6 to 7.5 feet of each well casing was removed by excavation seven days after it had been filled to the surface with cement grout. An approximately 6- to 12-inch-thick concrete mushroom cap was placed over and around the remaining casing at depths of 6 and 7.5 feet bgs, respectively (where the casing broke during removal). The excavation was backfilled with native soil, and track rolled.

On July 5 and July 8, 2005, Blymyer Engineers oversaw the installation of downgradient groundwater monitoring well MW-7 (Figure 2). The well was installed into the second water-bearing zone beneath the site due to the detection of hydrocarbon contamination in groundwater in both CPT bores at depths of approximately 30 to 40 feet bgs. A conductor casing was installed to a depth of 30 feet in order to exclude upper water-bearing zones, and to prevent cross-contamination of deeper water-bearing zones. A 2-inch-diameter PVC casing was installed through the conductor casing and the well was screened between 30 and 40 feet bgs.

On October 7, 2005, Blymyer Engineers issued the *Remedial Investigation / Feasibility Study* report documenting all field work conducted since January 2005, and the results of a feasibility study. The report evaluated three remedial alternatives, including monitored natural attenuation, dual-phase extraction, and source soil excavation and dewatering. It was found that, under monitored natural attenuation, benzene would require approximately 33 years to reach the Maximum Contaminant Level (MCL) and that the remedial cost was the highest of the three options. Remedial costs were the second highest under the dual-phase extraction scenario, and would be more intrusive with respect to the future owner's land use. Remedial costs were lowest, and the site presence was least intrusive in the longer term under the remedial overexcavation and dewatering scenario. This scenario additionally proposed to introduce oxygen releasing compound (ORC) into the remedial excavation to stimulate biodegradation of the residual hydrocarbon contamination by indigenous microbes; previously shown to be oxygen-limited at the site. This scenario additionally proposed to treat soil and groundwater outside the plume core with ORC injected through Geoprobe bores on an approximately 10-foot spacing interval. Principally because remedial costs were lowest, remedial excavation was selected as the most appropriate remedial technology for the site. On October 26, 2005, Blymyer Engineers issued the *Corrective Action Plan For Source Soil Excavation and Dewatering*. On November 2, 2005, the ACDEH issued the letter *Fuel Leak Case No. RO0000210*, which concurred with the recommended remedial plan, but contained six technical comments for clarification. On November 9, 2005, Blymyer Engineers issued the *Response to November 2, 2005 Letter*, that addressed the technical comments contained in the ACDEH letter. The letter indicated that soil reuse was not planned due to high perched groundwater as shallow as 3 feet bgs, provided documentation (Figure 2 of that letter) of the approximate planned bottom sample soil collection locations based on the iso-

concentration figures, stated that ORC would be applied throughout the excavation as requested, attached NPK bio-nutrient calculations for the site, stated that a second excavation backfill well would be installed as requested, and stated that a post-remediation quarterly groundwater sampling program was planned for a minimum period of one year.

Remedial excavation began on November 29, 2005, with the initial installation of a slide-rail shoring system in the area for excavation. Between December 1, and December 8, 2005, Marcor Remediation, Inc. (Marcor) excavated and stockpiled 2,370 cubic yards (3,054.65 tons) of impacted soil from an area approximately 50 by 50 feet, by 20 to 21 feet in depth. Concurrent excavation dewatering was attempted, but due to the load of suspended fine particles, could not keep up with groundwater infiltration. Extracted groundwater was plumbed through a bag filter to remove the sediment load, and then through two 2,000-pound granular activated carbon (GAC) vessels into a 20,000-gallon temporary aboveground storage tank. Prior to discharge to the sanitary sewer a groundwater sample was collected under observation of the Dublin-San Ramon Services District personnel. Four authoritative excavation bottom soil samples were collected from locations in close proximity to previously documented worst-case soil concentrations and each returned non-detectable concentrations for all analytes. The excavation was backfilled with imported crushed rock and locally derived recycled asphaltic baserock. ORC was applied in slurry form to the crushed rock as it was placed into the excavation. On December 21 and 22, 2005, twenty-six ORC injection bores were pushed to approximately 21 feet bgs, and an ORC slurry was injected into the bores in areas surrounding the backfilled excavation in order to address residual contamination outside the area of excavation. The soil stockpiles were sampled concurrently with remedial excavation, and the soil was loaded, transported, and disposed at Keller Canyon Landfill in Pittsburg, California, between December 29, 2005, and January 4, 2006. On January 11, 2006, the property was sold by the Dolan Trust to Ken Harvey Honda, and site redevelopment planning was initiated for a car dealership.

On February 27, 2006, Blaine Tech Services, Inc. (Blaine) mobilized to the site to develop the two new wells (MW-8 and MW-9) located within the remedial excavation. Development details have been reported under separate cover in the report entitled *Report on Source Soil Excavation and Dewatering*, dated April 20, 2006. The first post-remediation groundwater monitoring event occurred on March 2, 2006, and

was reported in the report entitled *First Quarter 2006 Groundwater Monitoring Event*, dated April 4, 2006. The *Second Quarter 2006 Groundwater Monitoring Event* dated June 22, 2006, was issued on June 28, 2006, while the *Third Quarter 2006 Groundwater Monitoring Event* dated December 1, 2006, was issued on December 4, 2006.

On January 2, 2007, the ACDEH issued a letter commenting on the *Third Quarter 2006 Groundwater Monitoring Event* report. The letter contained four technical comments that received a response in a February 16, 2007 letter from Blymyer Engineers, on behalf of the Dolan Estate. The comments and responses included:

- ACDEH concurrence with the recommendation for temporary cessation of natural attenuation parameters.
- The ACDEH recommended that microbial assays be conducted in order to determine if an appropriate microbial population is present in subsurface groundwater to allow the natural degradation of petroleum hydrocarbons in the subsurface in the presence of increased oxygen. Blymyer Engineers noted that microbial assays would help determine if augmentation of the current microbial population might allow faster degradation. Blymyer Engineers proposed to collect groundwater at three wells (upgradient, excavation, and downgradient) to determine trends across the site as recommended by the analytical laboratory, CytoCulture Environmental Biotechnology (CytoCulture) in Point Richmond, CA. Collection of the samples was proposed to be coordinated with a groundwater monitoring event, and the results would be reported within a quarterly groundwater monitoring report. The samples were to be analyzed for total microbial population, and the hydrocarbon-degrading population within the total population at the three wells, as also recommended by CytoCulture.
- The ACDEH recommended the installation of ORC socks in well MW-4 in lieu of additional subsurface Geoprobe exploration proposed by Blymyer Engineers in the *Third Quarter 2006 Groundwater Monitoring Event* report. The Geoprobe bores were intended to determine the location of the presumed near-surface source of hydrocarbons of apparently recent origin (see referenced report) that is apparently impacting groundwater in the vicinity of well MW-4. Blymyer Engineers noted general agreement with the recommendation; however, additionally consulted Regenesis, Inc. (Regenesis),

provider of ORC products. Regenesis additionally recommended the addition of RegenOx to well MW-4 prior to the installation of the ORC socks in the well as an appropriate method to provide a more rapid decrease in fuel hydrocarbon concentrations, and to extend the life of the ORC socks. Regenesis noted that because RegenOx is essentially a liquid, it will be removed and distributed by natural process in the vicinity of the well, will not solidify in the well, and will not make the well unavailable for future monitoring and sampling. Conversely, because it will not be injected into the subsurface soils and will be distributed by natural groundwater movements, the radius of influence will be more localized, which is presumed beneficial if the source is localized to well MW-4, as suspected.

- The ACDEH also requested continued analysis of groundwater from well MW-5 for fuel oxygenates based on previous groundwater analytical results. Blymyer Engineers noted that sampling of well MW-4 for fuel oxygenates was appropriate in support of determining the source of the hydrocarbons impacting groundwater in the vicinity of well MW-4, and recommended that a minimum of one groundwater sampling event at well MW-4 be conducted.

During the Fourth Quarter 2006 groundwater monitoring event, site redevelopment activities including paving and infrastructure installation for the car dealership precluded access to the groundwater monitoring wells. Groundwater monitoring required access to, and reconstruction of, the groundwater monitoring wells, temporarily paved over during site redevelopment. The wells required raising and lowering of well casings and well boxes to the new grade, as well as re-surveying to GeoTracker standards. Between February 20 and March 9, 2007, remaining wells at the site were raised or lowered, and new well boxes were installed, to conform to the new surface grade at the site. On March 19, 2007, the wells were resurveyed by CSS Environmental to GeoTracker standards.

Since the June 2007 groundwater monitoring event (Second Quarter 2007), the site has completed redevelopment as the new Ken Harvey Honda facility. The facility opened in early September 2007. As part of final site redevelopment, two wells, MW-6 and MW-9, were repaved over again. On August 22, 2007, the access boxes for the wells were replaced and set flush with the new grade surface. The well casing elevations remained unchanged.

On September 5, 2007, after groundwater monitoring and sampling for the third quarter 2007 groundwater

monitoring event , fifteen 1.75-inch diameter ORC Advanced socks were installed in 2-inch diameter well MW-4, and fifteen 3-inch diameter ORC Advanced socks were installed in each of the 4-inch diameter wells, MW-8 and MW-9. The socks were installed to help stimulate bacterial activity in the vicinity of the wells. The socks were installed according to the manufacturer's specifications, and typically provide between 6 and 12 months of increased oxygen concentrations in groundwater. It was recommended that these concentrations be monitored during quarterly groundwater monitoring events. Additionally it was recognized that the installation of the ORC socks would require use of micropurging techniques in the future in order to minimize the removal of DO in from these three wells.

In accordance with an analysis of past concentration trends in all wells at the site, Blymyer Engineers recommended a reduction in the number of wells to be sampled (*Third Quarter 2007 Groundwater Monitoring Report*, dated October 12, 2007). The recommendation reduced the number of sampled wells to three wells (MW-4, MW-8, and MW-9). It was reasoned that additional data from wells MW-1, MW-3, MW-6, and MW-7 was not warranted on an on-going basis. Only groundwater from wells MW-1 and MW-6 had yielded trace concentrations shortly after the remedial excavation. With those exceptions, those four wells have been non-detectable since installed (2.5 years for MW-7, and over ten years for the other listed wells). Blymyer Engineers recommended a reduction to an annual sampling interval for these wells. It was noted that well MW-5 has contained only MTBE since December 2004. Blymyer Engineers recommended that further analysis for TPH as diesel should be eliminated in this well, and that analysis for TPH as gasoline, BTEX, and MTBE could be reduced to a biannual interval to monitor concentration trends. Additionally it was recommended that future analysis for TPH as diesel should employ the use of the silica gel cleanup technique.

In late March 2008, Blymyer Engineers was notified that the new case manager for the ACDEH was Mr. Paresh Khatri.

2.0 Groundwater Sample Collection and Analytical Methods

Groundwater samples were collected from wells MW-4, MW-5, MW-8, and MW-9 on March 4, 2008. Depth to groundwater was measured in all remaining wells (MW-2 was destroyed during the remedial excavation). Due to the presence of the ORC socks, groundwater samples were collected by Blaine in accordance with Blaine *Standard Operating Procedures* for groundwater monitoring using micropurging techniques, which includes gauging, purging, and sampling protocols. A copy is included as Appendix A. In accordance with the recommendation contained in the previous quarterly reports, laboratory Remediation by Natural Attenuation (RNA) parameters were not collected this quarter; however, DO, ORP, and ferrous iron field measurements were collected as proxies for the RNA laboratory parameters. These RNA field parameters were collected using a peristaltic pump with tubing placed at the bottom of the screened interval of the well in order to obtain more representative samples of groundwater upon infiltration into the well. Depth to groundwater was measured in all wells remaining at the site. Temperature, pH, conductivity, and turbidity were measured initially, and then after removal of each purge volume. Groundwater depth measurements and details of the monitoring well purging and sampling are presented on the *Well Gauging Data* sheet and *Well Monitoring Data Sheets* generated by Blaine and included as Appendix B. Additional field forms included in Appendix B include the *Purge Drum Inventory Log* and the *Wellhead Inspection Checklist*. Depth-to-groundwater measurements are presented in Table I. All purge and decontamination water was temporarily stored in Department of Transportation-approved 55-gallon drums for future disposal by the owner.

The groundwater samples were analyzed by McCampbell Analytical, Inc., a California-certified laboratory, on a 5-day turnaround time. Groundwater samples from wells MW-4, MW-5, MW-8, and MW-9 were analyzed for Total Petroleum Hydrocarbons (TPH) as gasoline by Modified EPA Method 8015C; benzene, toluene, ethylbenzene, and total xylenes (BTEX) and MTBE by EPA Method 8021B, and TPH as diesel with silica gel cleanup by Modified EPA Method 8015C. Tables II to VI summarize current and previous analytical results for groundwater samples. The laboratory analytical report for the current sampling event is included as Appendix C.

3.0 Groundwater Sample Analytical Results

3.1 Current Analytical Results

Wells MW-4, MW-5, MW-8, and MW-9 were analyzed for hydrocarbons during the current sampling event. As noted, well MW-2 was destroyed during the remedial excavation in November 2005, but was essentially replaced by excavation wells MW-8 and MW-9. The concentration of hydrocarbons in downgradient well MW-4 continued to decrease notably and for the first time since the remedial excavation in November 2005, the concentration of benzene was below the generic San Francisco Bay, Regional Water Quality Control Board (RWQCB) Environmental Screening Level (ESL) goal. Only the concentration of TPH as gasoline (180 Fg/L) remains above the ESL for the compound (100 Fg/L). In both wells MW-8 and MW-9 the concentration of TPH as gasoline and TPH as diesel (with silica gel cleanup) decreased. The concentration of TPH as gasoline in both wells is now below the ESL of 100 Fg/L, while the concentration of TPH as diesel in both wells is below the limit of detection. Except for benzene in well MW-9, the concentrations of BTEX in both MW-8 and MW-9 fell very marginally, or remained at identical concentrations, but are nearing the limits of detection. In well MW-9, the concentration of benzene rose very slightly, and in both wells benzene is the only hydrocarbon compound over the generic ESL for the compound (1.1 Fg/L and 2.0 Fg/L in wells MW-8 and MW-9, respectively). MTBE was absent in all wells, but in particular was notably absent in well MW-5.

The concentrations of TPH as gasoline and benzene appear to be stabilizing at slightly above or below their respective RWQCB ESLs of 100 and 1.0 Fg/L. The concentration of TPH as diesel appears to be remaining below the RWQCB ESL of 100 Fg/L. The additional supply of DO through the installation of the ORC socks may allow for further decreases with time.

Although the analytical results are non-detectable for TPH as diesel this quarter, the analytical laboratory has previously consistently included a note that the TPH as diesel concentration contains significant gasoline range compounds and it is surmised that the TPH as diesel concentration largely represents the heavy end of the TPH as gasoline range due to the overlap in the range of detection for these two analyses. Because silica-gel cleanup is employed in the analysis of the TPH as diesel, non-petroleum hydrocarbons should be

removed prior to reporting of the diesel results. A copy of the groundwater petroleum hydrocarbon analytical results can be found in Appendix C, and the results are summarized in Table II.

3.2 Previous Analytical Results and Insights

The use of silica gel cleanup has provided some insight into the nature of hydrocarbons at the site. Silica gel cleanup is an additional analytical technique that removes polar hydrocarbons that are produced by the decomposition of vegetable matter native to a site (i.e. former grasslands or marshlands), as opposed to non-polar hydrocarbons that are found in fuel. Because the site was located in such a pre-development environment, it was judged appropriate to investigate use analytical technique at the site. During the First Quarter 2007, total non-silica gel cleanup TPH concentrations in wells MW-8 and MW-9 were roughly similar to the previous several quarters; however, the silica gel cleanup of the TPH as diesel analysis clearly suggested that the majority of the diesel-range hydrocarbons are vegetation derived. This also likely accounts for the majority of the footnotes previously provided by the laboratory for non-silica gel cleanup analysis (see footnotes f and j for wells MW-4, MW-8, and MW-9).

The laboratory has previously included a note that the hydrocarbon quantified as TPH as diesel in wells MW-2 and MW-5 was present in the requested quantitation range (diesel), but that it did not resemble the fuel pattern requested (footnotes b and c). Inclusion of silica gel cleanup technique in the analytical process for TPH as diesel analysis likely explains these notes. Previously, reviews of the chromatograms from these wells during the September 2002 and the September 2006 quarterly events indicated that the hydrocarbon detected in the diesel range in groundwater from well MW-2 was associated with the heavy end of gasoline (carbon range C4 to C12), which overlaps into the typical carbon range occupied by diesel (carbon range C10 to C22). During several previous quarters, the laboratory also included a note that oil range hydrocarbons were detected in the groundwater samples obtained from wells MW-8 and MW-9. McCampbell Analytical has previously stated (personal communication, October 20, 2006) that the chromatograms indicate that these could be either oil or asphalt related compounds. Those notes have not been present since analysis with silica gel cleanup has been used at the site, and is likely related to removal of non-fuel related oil-ranged compounds with the silica gel cleanup. Copies of the chromatograms

reviewed during previous events were attached at the end of Appendix C in the associated quarterly reports.

Prior to the remedial excavation, only wells MW-2 and MW-4 consistently yielded concentrations of petroleum hydrocarbons. Groundwater from well MW-2 consistently contained the highest concentrations at the site, followed by well MW-4. Well MW-2 was destroyed under permit during the remedial excavation. During the recent monitoring events the predominant location of contaminants has been in the vicinity of wells MW-4, MW-8, and MW-9; the latter two are former remedial excavation wells. The concentrations of each analyte at these wells was significantly less than previously detected in destroyed well MW-2; however, they have previously remained elevated in well MW-4. During the last several events, hydrocarbon concentrations in well MW-4 have decreased significantly. During previous quarterly events in 2006, hydrocarbon concentrations in groundwater in well MW-4 had been assumed to be a by-product of remedial excavation, wherein contaminants formerly sequestered in soil were mixed and released into groundwater in a one-time process. A close review of the analytical data from groundwater collected in well MW-4 during the September 2006 event suggested that this assumption might be incorrect in part. Multiple lines of evidence suggested that a different source of gasoline hydrocarbons could be reflected in the groundwater collected from well MW-4, or that a relatively modest fresh spill of gasoline may have occurred near well MW-4. These lines of evidence can be summarized as follows:

- There was a large increase in gasoline and volatile (BTEX) hydrocarbon concentrations in groundwater collected from well MW-4 between September 2005 and March 2006. The relative stability of those concentrations over three quarters had suggested a remaining source as opposed to a transient spike in contaminant concentrations to be expected from a one-time event.

- The analytical laboratory began to flag the gasoline hydrocarbon in groundwater collected from well MW-4 as "unmodified or weakly modified gasoline" (i.e. fresh) in the March 2006 groundwater monitoring event.

- There appears to be no MTBE associated with this hydrocarbon, as would be anticipated with recent release of gasoline due to the required removal of this chemical from reformulated gasoline by December 31, 2003. This was confirmed during the current quarterly event.

- The apparent rapid decrease in the concentration of benzene in comparison to toluene and ethylbenzene would be typical of the chemical behavior (solubility) of these volatile compounds in groundwater.

- The concentration of TPH as diesel in wells MW-4, MW-8, and MW-9 has been very similar, while the concentration of TPH as gasoline in well MW-4 is significantly higher than in the other two wells. This has suggested the source of the TPH as diesel is the same (now more likely understood as a non-fuel related hydrocarbon related to vegetation), but that the source of TPH as gasoline is different between the wells.

- The ratio of TPH as gasoline to TPH as diesel in groundwater collected from well MW-4 has not matched the ratio seen previously in well MW-2, or more recently in wells MW-8 or MW-9. Additionally the ratios of the various volatile organic compounds (BTEX) to TPH as gasoline or to TPH as diesel do not match between wells MW-4 and MW-8 or MW-9. Finally the ratios between the various volatile organic compounds, within a well, are generally not the same (see for example the ratio of total xylenes to benzene in each of the wells).

Each of these lines of evidence is suggestive of a separate source for the hydrocarbons in groundwater samples collected from well MW-4. This evidence appears to indicate an undiscovered residual pocket of contamination outside the area of excavation, or the introduction of fresh gasoline hydrocarbons in the vicinity of the well. One potential source may be surface spillage from vehicles parked in the vicinity of well MW-4 waiting for repair at the auto shop across Scarlett Court from the site. During site visits leading up to the remedial excavation, between 6 to 10 cars were parked adjacent to the fence in the vicinity of well MW-4 on a daily basis.

3.3 Previous Bacteria Enumeration Groundwater Sample Analytical Results

Total heterotrophic and hydrocarbon-degrading aerobic bacteria enumeration analysis of groundwater samples from wells MW-1, MW-4, and MW-5 was initially conducted during the First Quarter 2007 sampling event (Table VI). Groundwater samples for aerobic bacteria enumeration were submitted to CytoCulture in Point Richmond, California. As recommended by CytoCulture, groundwater from upgradient, excavation area, and downgradient wells (MW-1, MW-4, and MW-3, respectively) was

intended to be sampled; however, Blaine Tech inadvertently sampled well MW-5 in place of MW-3. As a consequence, Blaine Tech returned to the site and well MW-3 was sampled on April 9, 2007.

Bacteria populations for both hydrocarbon degrading and total heterotrophic bacteria ranged from the lower end in upgradient well MW-1 and downgradient well MW-3, to a high concentration in plume core well MW-4. Groundwater from well MW-5 contained intermediate bacterial populations. Groundwater from upgradient well MW-1 contained a low of 80 colony forming units per milliliter (cfu/ml) hydrocarbon degraders, and 400 cfu/ml total heterotrophic bacteria, while well MW-4 contained a high of 5,000 cfu/ml hydrocarbon degraders and 10,000 cfu/ml total heterotrophic bacteria. According to CytoCulture (personal communication, April 2007), bacteria populations in well MW-1 and MW-3 are generally considered low, while populations in MW-4 are on the high side of average and bacterial populations in well MW-5 (400 and 1,000 cfu/ml, respectively) are considered low-average. CytoCulture also reports that, because the enumeration results are separate plate counts, hydrocarbon degraders can be present at a higher population than total heterotrophs, at low population levels.

Based on these data, a hydrocarbon-degrading bacterial population has grown and is present in groundwater beneath the site. In particular, the relative percentages of hydrocarbon-degrading to total heterotrophic bacteria at each well are revealing. The percentages indicated that hydrocarbon degraders had preferentially grown to approximately 50% of the total bacterial population in well plume core well MW-4, to 40% in plume lateral well MW-5, and approximately 20% in upgradient well MW-1. While at low population levels in downgradient well MW-3, hydrocarbon degrading bacterial populations are present at a higher percentage (233%) than total heterotrophs, which may suggest that the hydrocarbon degrading population has been preferentially influenced by upgradient events. In total, these results suggest that the introduction of oxygen into the local vicinity has been, or can be, beneficial.

4.0 Intrinsic Bioremediation Groundwater Sample Field Results

Intrinsic bioremediation or RNA laboratory analytical parameters were not collected during the current quarter; however, field RNA parameters were collected. Analytical results for previous groundwater monitoring events are presented on Tables IV and V.

Microbial use of petroleum hydrocarbons as a food source is affected by the concentration of a number of chemical compounds dissolved in groundwater at a site. RNA monitoring parameters were established by research conducted by the Air Force Center for Environmental Excellence. The research results were used to develop a technical protocol for documenting RNA in groundwater at petroleum hydrocarbon release sites (Wiedemeier, Wilson, Kampbell, Miller and Hansen, 1995, *Technical Protocol for Implementing the Intrinsic Remediation with Long Term Monitoring for Natural Attenuation of Fuel Contamination Dissolved in Groundwater, Volumes I and II*, U.S. Air Force Center for Environmental Excellence, Brooks Air Force Base, Texas). The protocol focuses on documenting both aerobic and anaerobic degradation processes whereby indigenous subsurface bacteria use various dissolved electron acceptors to degrade dissolved petroleum hydrocarbons.

In the order of preference, the following electron acceptors and metabolic by-products are used and generated, respectively, by the subsurface microbes (aerobes, Mn – Fe reducers, and methanogens) to degrade petroleum hydrocarbons: oxygen to carbon dioxide, nitrate to nitrogen, insoluble manganese (Mn^{4+}) to soluble manganese (Mn^{2+}), insoluble ferric iron (Fe^{3+}) to soluble ferrous iron (Fe^{2+}), sulfate to hydrogen sulfide, and carbon dioxide to methane. With the exception of oxygen, the use of all other electron acceptor pathways by microbes indicates increasingly anaerobic degradation. Aerobic degradation takes place first, and oxygen inhibits anaerobic degradation. As oxygen is consumed and an anoxic zone develops, the Mn – Fe reducers and methanogens begin to grow and release dissolved Mn, dissolved Fe, and methane (Commission on Geosciences, Environment and Resources, *Natural Attenuation for Groundwater Remediation*, 2000). Investigation of each of these electron acceptor pathways was conducted in all wells at the site as part of the evaluation of RNA chemical parameters. Analytical results collected prior to remedial excavation generally documented oxygen and nutrient (nitrate) limited RNA at the site.

Microbial use of petroleum hydrocarbons as a food source is principally affected by the concentration of dissolved oxygen (DO) in the groundwater present at a site; it is the preferred electron acceptor for the biodegradation of hydrocarbons. In the wells ORC socks are installed in, post-purge DO concentrations have decreased since the previous event; however, the concentrations remain higher than historic DO concentrations, and are higher than the un-augmented concentration in well MW-5. DO was present at concentrations ranging from 0.81 mg/L in un-augmented well MW-5 and 2.93 to 3.50 mg/L in augmented wells MW-4, MW-8, and MW-9 this quarter. The ORC socks continue to supply DO to the groundwater system in the vicinity of the former tank basin this quarter.

Post-purge DO is generally accepted to document the concentration of DO in the area surrounding each well and is generally considered more representative of a water-bearing zone. As typical this quarter, post-purge DO samples were collected with a peristaltic pump using tubing placed in the lower portion of the screened interval of each well. Over the first three post-remediation monitoring events, the concentration of post-purge DO in most wells was on a declining trend, but since early 2007 the concentration of DO in most wells has generally risen slightly, or remained essentially unchanged at low concentrations. Over this period, DO remained at the lowest concentration in plume core wells MW-4, MW-8, and MW-9, as should be anticipated, but it also remained low in downgradient well MW-3, perhaps reflective of strong microbial demand upgradient of the well. The concentration of DO has been highest in perimeter wells MW-1, MW-5, MW-6, and MW-7.

ORP is another measure of the supply and use of oxygen at a site. The higher the reading in millivolts (mV), the more oxygenated the subsurface environment is, and the lower the readings, the more anaerobic or reducing the subsurface environment is. ORP values in wells with ORC socks installed increased this quarter; however, in well MW-5 which was not augmented with ORC socks, the ORP value decreased. During the previous quarter a slight shift in the trend of ORP values was detected. It was judged that ORP values collected over the next several quarters would be more useful. At present ORP values indicate a more fully oxygenated environment in the vicinity of the former tank basin this quarter as a result of the ORC sock installation.

Ferrous iron was also investigated during the current sampling event. During the previous monitoring event all wells appeared to have detectable ferrous iron. During the previous and the current quarter, none of the (plume core) wells contained ferrous iron. While it was unusual for all wells to contain ferrous iron in the September 2007 event, the lack of ferrous iron in well MW-4 in particular the past two quarters strongly suggests that the addition of the ORC socks, and thus generation of additional DO, has been beneficial. The previous presence of ferrous iron in well MW-4 had suggested that Mn – Fe degrading microbial colonies near this well had continued to utilize iron to degrade contaminants (at a slower rate) in this area of the site due to the relative lack of DO in the vicinity, whereas the concentration of DO in other wells had not allowed these colonies to reestablish at other well locations.

In general, prior to the installation of the ORC socks in September 2007, data from the site suggested that the supply of DO in groundwater at the site, and in particular in the plume core, had decreased sufficiently such that Mn-Fe degrading microbial colonies were more predominant in the vicinity of the former tank basin and well MW-4. An increase in the concentration of DO during the past two quarters likely reflects the input of DO with the installation of the ORC socks. A somewhat more substantial decrease in contaminant concentrations in well MW-4 this quarter may reflect the increased concentration of DO at the well and the resurgence of aerobic bacteria over Mn-Fe degrading bacteria in the well.

5.0 Groundwater Flow Data

Resurveyed top-of-casing (TOC) elevations were used to construct a groundwater gradient map (Figure 2). Wells MW-6 and MW-7 were not used to construct the gradient map as the elevations are anomalous. Well MW-7 is set in a deeper water-bearing zone but on occasion has contained groundwater elevations very similar to other wells. This suggests that the well could be set in a deeper portion of the same water-bearing zone at the site.

Groundwater depths on March 4, 2008, ranged between 3.15 to 4.68 feet below the top of the casings. On average, the groundwater elevation increased by approximately 0.31 feet at the site since the December 2007 monitoring and sampling event; however, elevations in wells MW-8 and MW-9 decreased by approximately 0.1 feet. Based on these data, the direction of groundwater flow appears to be generally towards the east to southeast. Historically, groundwater has generally flowed to the south to southwest at the site (see for example the Rose Diagram of historic groundwater flow directions included in the *Additional Site Investigation Data Transmittal*); however, in June 2005 and November 1993, groundwater was documented to have flowed to the east. The average groundwater gradient was calculated to be approximately 0.007 feet/foot to the east and 0.009 feet/foot to the southeast for this monitoring event.

6.0 Conclusions and Recommendations

The following summary and conclusions were generated from the available data discussed above:

- In accordance with recommendations contained in the previous quarterly report only groundwater from wells MW-4, MW-5, MW-8, and MW-9 was analyzed this quarter.
- The concentration of hydrocarbons in downgradient well MW-4 continued to decrease notably and for the first time since the remedial excavation in November 2005, the concentration of benzene was below the generic ESL goal. Only the concentration of TPH as gasoline (180 Fg/L) remained above the ESL for the compound (100 Fg/L).
- In wells MW-8 and MW-9 the concentration of TPH as gasoline and TPH as diesel (with silica gel cleanup) decreased. The concentration of TPH as gasoline in both wells is now below the ESL of 100 Fg/L, while the concentration of TPH as diesel in both wells is below the limit of detection. Except for benzene in well MW-9, the concentrations of BTEX in wells MW-8 and MW-9 fell very marginally, or remained at identical concentrations, but are nearing the limits of detection. In well MW-9, the concentration of benzene rose very slightly, and in both wells benzene is the only hydrocarbon compound over the generic ESL for the compound.
- MTBE was absent in all wells, but in particular was notably absent in well MW-5.
- Concentrations of TPH as gasoline and benzene in these wells appear to be stabilizing at slightly above or below their respective ESLs of 100 and 1.0 Fg/L. The concentration of TPH as diesel appears to be remaining below the ESL of 100 Fg/L. The increased concentration of DO may allow for further hydrocarbon concentration decreases with time.
- In wells with ORC socks, post-purge DO concentrations have decreased since the previous event; however, the concentrations remain higher than historic DO concentrations, and are higher than the un-augmented concentration in well MW-5. The socks continue to supply DO to groundwater in the vicinity of the former tank basin.

- In wells with ORC socks, ORP values increased this quarter; however, in well MW-5 which does not contain ORC socks, the ORP value decreased. ORP values indicate a more fully oxygenated environment in the vicinity of the former tank basin this quarter as a result of the ORC sock installation.
- During the September 2007 monitoring event, all wells had detectable concentrations of ferrous iron. During the previous and the current events, no wells contained ferrous iron. The lack of ferrous iron in well MW-4 in particular over the past two quarters strongly suggests that the addition of the ORC socks, and thus generation of additional DO, has been beneficial. A somewhat more substantial decrease in contaminant concentrations in well MW-4 this quarter may reflect the increased concentration of DO at the well and the resurgence of aerobic bacteria over Mn-Fe degrading bacteria in the well.
- During the current quarter, groundwater flow appears to be towards the east to southeast. The average groundwater gradient ranged between 0.007 and 0.009 feet/foot.

The following recommendations were generated from the available data discussed above:

- Future analysis for TPH as diesel should continue to employ the use of the silica gel cleanup technique.
- In accordance with previous recommendations well MW-5 will not be sampled next quarter and only wells MW-4, MW-8, and MW-9 will be sampled in order to monitor trends in TPH as gasoline, BTEX, and MTBE concentrations.
- In accordance with previous recommendations, wells MW-1, MW-3, MW-6, and MW-7 will not be sampled next quarter due to the lack of detectable concentrations since well installation (from 2.5 to over 10 years).
- The next quarterly groundwater sampling event is scheduled to occur in June 2008
- Should contaminant trends continue decreasing in the next sampling event initiation of closure activities may be appropriate.

- A copy of this report should be forwarded to:

  Mr. Paresh Khatri
  Alameda County Health Care Services Agency
  Environmental Protection Division
  1131 Harbor Bay Parkway, Suite 250
  Alameda, CA 94502-6577

Tables

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-1	11/27/1991	326.61	4.82	321.79
	9/30/1992		5.34	321.27
	4/7/1994		3.38	323.23
	8/12/1994		4.23	322.38
	11/29/1994		3.44	323.17
	3/21/1995		1.00	325.61
	5/22/1995		2.20	324.41
	8/24/1995		3.45	323.16
	2/12/1996		1.95	324.66
	2/5/1997		Data	Missing
	8/6/1997		3.60	323.01
	6/6/02*		2.89	323.72
	9/23/2002		3.48	323.13
	12/13/2002		3.18	323.43
	12/14/2004		2.76	323.85
	3/23/2005		1.14	325.47
	6/22/2005	329.41	2.58	326.83
	7/18/2005		2.21	327.20
	9/6/2005		3.30	326.11
	3/2/2006		2.32	327.09
	6/12/2006		3.61	325.80
	9/28/2006		3.34 [1]	326.07
	3/20/2007	331.23 [3]	4.60	326.63
	6/15/2007		NS	NS
	9/27/2007		5.14	326.09
	12/18/2007		4.55	326.68
	3/4/2008		3.96	327.27

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-2	11/27/1991	326.67	4.92	321.75
	9/30/1992		5.42	321.25
	4/7/1994		3.48	323.19
	8/12/1994		4.18	322.49
	11/29/1994		3.76	322.91
	3/21/1995		1.25	325.42
	5/22/1995		2.20	324.47
	8/24/1995		3.57	323.10
	2/12/1996		2.60	324.07
	2/5/1997		1.72	324.95
	8/6/1997		3.72	322.95
	6/6/02*		3.46	323.21
	9/23/2002		4.14	322.53
	12/13/2002		3.45	323.22
	12/14/2004		2.96	323.71
	3/23/2005		1.83	324.84
	6/22/2005	329.46	3.82	325.64
	7/18/2005		3.55	325.91
	9/6/2005		3.70	325.76
	3/2/2006		Destroyed	Destroyed
	6/12/2006		Destroyed	Destroyed
	9/28/2006		Destroyed	Destroyed
	3/20/2007		Destroyed	Destroyed
	6/15/2007		Destroyed	Destroyed
	9/27/2007		Destroyed	Destroyed
	12/18/2007		Destroyed	Destroyed
	3/4/2008		Destroyed	Destroyed

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-3	11/27/1991	326.58	4.96	321.62
	9/30/1992		5.46	321.12
	4/7/1994		3.66	322.92
	8/12/1994		4.37	322.21
	11/29/1994		3.60	322.98
	3/21/1995		1.62	324.96
	5/22/1995		2.73	323.85
	8/24/1995		3.76	322.82
	2/12/1996		2.45	324.13
	2/5/1997		1.99	324.59
	8/6/1997		3.83	322.75
	6/6/02*		3.66	322.92
	9/23/2002		4.66	321.92
	12/13/2002		3.66	322.92
	12/14/2004		3.52	323.06
	3/23/2005		1.83	324.75
	6/22/2005	329.37	3.99	325.38
	7/18/2005		3.60	322.98
	9/6/2005		4.42	324.95
	3/2/2006		2.50	326.87
	6/12/2006		3.52	325.85
	9/28/2006		3.88	325.49
	3/20/2007	330.69 [3]	4.40	326.29
	6/15/2007		4.88	325.81
	9/27/2007		4.93	325.76
	12/18/2007		4.57	326.12
	3/4/2008		3.95	326.74

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-4	11/27/1991	326.92	5.26	321.66
	9/30/1992		5.78	321.14
	4/7/1994		4.02	322.90
	8/12/1994		4.81	322.11
	11/29/1994		4.39	322.53
	3/21/1995		1.80	325.12
	5/22/1995		3.07	323.85
	8/24/1995		4.09	322.83
	2/12/1996		2.80	324.12
	2/5/1997		2.32	324.60
	8/6/1997		4.14	322.78
	6/6/02*		3.76	323.16
	9/23/2002		4.14	322.78
	12/13/2002		3.90	323.02
	12/14/2004		3.68	323.24
	3/23/2005		1.93	324.99
	6/22/2005	329.70	3.65	326.05
	7/18/2005		3.69	323.23
	9/6/2005		3.97	325.73
	3/2/2006		2.90	326.80
	6/12/2006		3.88	325.82
	9/28/2006		4.23	325.47
	3/20/2007	330.10 [3]	3.91	326.19
	6/15/2007		4.35	325.75
	9/27/2007		4.39	325.71
	12/18/2007		3.55	326.55
	3/4/2008		3.33	326.77

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-5	3/21/1995	326.50	2.10	324.40
	5/22/1995		2.93	323.57
	8/24/1995		1.57	324.93
	2/12/1996		2.78	323.72
	2/5/1997		2.24	324.26
	8/6/1997		3.02	323.48
	6/6/02*	**	2.79	NM
	9/23/2002		3.07	NM
	12/13/2002		3.14	NM
	12/14/2004		2.92	NM
	3/23/2005		2.39	NM
	6/22/2005	329.16	2.99	326.17
	7/18/2005		3.39	325.77
	9/6/2005		3.07	326.09
	3/2/2006		2.74	326.42
	6/12/2006		3.36	325.80
	9/28/2006		3.33	325.83
	3/20/2007	331.26 [3]	4.80	326.46
	6/15/2007		5.31	325.95
	9/27/2007		5.33	325.93
	12/18/2007		5.30	325.96
	3/4/2008		4.68	326.58

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-6	3/21/1995	327.23	3.24	323.99
	5/22/1995		4.70	322.53
	8/24/1995		4.95	322.28
	2/12/1996		4.50	322.73
	2/5/1997		3.68	323.55
	8/6/1997		4.79	322.44
	6/6/02*		4.81	322.42
	9/23/2002	327.23	5.10	322.13
	12/13/2002		4.88	322.35
	12/14/2004		4.61	322.62
	3/23/2005		3.40	323.83
	6/22/2005	330.02	4.72	325.30
	7/18/2005		2.65	327.37
	9/6/2005		4.98	325.04
	3/2/2006		3.89	326.13
	6/12/2006		4.73	325.29
	9/28/2006		4.85	325.17
	3/20/2007	329.55 [3]	3.94	325.61
	6/15/2007		4.16	325.39
	9/27/2007		3.92	325.63
	12/18/2007		3.81	325.74
	3/4/2008		3.65	325.90

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-7	7/18/2005	**	6.38	---
	9/6/2005		6.78	---
	3/2/2006	330.25	3.33	326.92
	6/12/2006		4.18	326.07
	9/28/2006		4.52	325.73
	3/20/2007	330.17 [3]	3.74	326.43
	6/15/2007		4.24	325.93
	9/27/2007		4.33	325.84
	12/18/2007		3.70	326.47
	3/4/2008		3.15	327.02
MW-8	3/2/2006	328.93	1.54	327.39
	6/12/2006		3.69	325.24
	9/28/2006		3.10	325.83
	3/20/2007	330.51 [3]	4.16	326.35
	6/15/2007		4.62	325.89
	9/27/2007		4.51	326.00
	12/18/2007		3.55	326.96
	3/4/2008		3.69	326.82
MW-9	3/2/2006	328.67	1.54	327.13
	6/12/2006		3.68	324.99
	9/28/2006		3.08	325.59
	3/20/2007	330.74 [3]	4.37	326.37
	6/15/2007		4.83	325.91
	9/27/2007		4.71	326.03
	12/18/2007		3.84	326.90
	3/4/2008		3.95	326.79

Table I, Summary of Groundwater Elevation Measurements BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)

Notes:

TOC = Top of Casing

* = Initial data set collected under direction of Blymyer Engineers, Inc.

** = Surveyed elevation not available

[1] = Sampling form indicates casing is bent.

NM = Not measured

NS = Not sampled

[1] = Resurveyed on April 13, 2005 by CSS Environmental Services, Inc.

[2] = Surveyed on February 7, 2006 by CSS Environmental Services, Inc.

[3] = Surveyed on March 19, 2007 by CSS Environmental Services, Inc.

Elevations in feet above mean sea level

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5
MW-1	11/27/1991	<50	NA	NA	<0.3	<0.3	<0.3	<0.3	NA
	9/30/1992	<50	NA	NA	<0.3	<0.3	<0.3	<0.3	NA
	4/7/1994	<50	NA	NA	<0.5	<0.5	<0.5	<0.5	NA
	8/12/1994	<50	NA	NA	**1**	**1**	<0.3	<2	NA
	11/29/1994	<50	NA	NA	<0.5	<0.5	<0.5	<2	NA
	3/21/1995	<50	NA	NA	<0.5	<0.5	<0.5	<2	NA
	5/22/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	8/24/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	2/12/1996	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	6/6/02*	NA	NA	NA	NA	NA	NA	NA	NA
	9/23/2002	NA	NA	NA	NA	NA	NA	NA	NA
	12/13/2002	NA	NA	NA	NA	NA	NA	NA	NA
	12/14/2004	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/23/2005	NA	NA	NA	NA	NA	NA	NA	NA
	6/22/2005	NA	NA	NA	NA	NA	NA	NA	NA
	9/6/2005	NA	NA	NA	NA	NA	NA	NA	NA
	3/2/2006	**62** [k]	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	6/1/2006	NA	NA	NA	NA	NA	NA	NA	NA
	9/28/2006	**78** [k]	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/20/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	6/15/2007	NS	NS	NS	NS	NS	NS	NS	NS
	9/27/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	12/18/2007	NS	NS	NS	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS	NS	NS	NS

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California									
Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5
MW-2	11/27/1991	NA	**170,000**	NA	**24,000**	**13,000**	**3,500**	**16,000**	NA
	9/30/1992	NA	**120,000**	NA	**24,000**	**15,000**	**3,800**	**17,000**	NA
	4/7/1994	NA	**120,000**	NA	**21,000**	**14,000**	**4,300**	**21,000**	NA
	8/12/1994	NA	**140,000**	NA	**17,000**	**10,000**	**4,300**	**18,000**	NA
	11/29/1994	NA	**90,000**	NA	**17,000**	**7,500**	**3,400**	**15,000**	NA
	3/21/1995	NA	**83,000**	NA	**17,000**	**8,000**	**3,800**	**17,000**	NA
	5/22/1995	NA	**82,000**	NA	**14,000**	**6,000**	**4,000**	**16,000**	NA
	8/24/1995	NA	**86,000**	NA	**13,000**	**8,100**	**3,700**	**16,000**	NA
	2/12/1996	NA	**78,000**	NA	**15,000**	**8,100**	**4,200**	**18,000**	NA
	2/5/1997	NA	**58,000**	NA	**11,000**	**6,900**	**3,500**	**15,000**	**480**
	8/6/1997	NA	**66,000**	NA	**7,000**	**9,200**	**3,500**	**16,000**	<500
	6/6/02*	NA	**25,000** [a]	NA	**2,900**	**50**	**2,700**	**2,200**	<250
	9/23/2002	**4,300** [c]	**14,000** [b]	NA	**2,700**	**81**	**2,100**	**1,800**	<250
	12/13/2002	**4,000** [c]	**26,900**	NA	**1,120**	**91**	**1,480**	**2,370**	**197 d**
	12/14/2004	**7,600** [f, g]	**21,000** [e]	NA	**1,700**	**120**	**1,600**	**2,400**	<60
	3/23/2005	**15,000** [f, g, i]	**27,000** [e i]	NA	**1,400**	**170**	**1,700**	**2,500**	<170
	6/22/2005	**1,200** [g]	**5,800** [e]	NA	**53**	**46**	**570**	**58**	<50
	9/6/2005	**4,900** [f, g, j]	**14,000** [e]	NA	**1,000**	**40**	**1,500**	**680**	<100
	3/2/2006	NS	NS	NS	NS	NS	NS	NS	NS
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS
	9/28/2006	NS	NS	NS	NS	NS	NS	NS	NS
	3/20/2007	NS	NS	NS	NS	NS	NS	NS	NS
	6/15/2007	NS	NS	NS	NS	NS	NS	NS	NS
	9/27/2007	NS	NS	NS	NS	NS	NS	NS	NS
	12/18/2007	NS	NS	NS	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS	NS	NS	NS

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5
MW-3	11/27/1991	NA	<50	NA	<0.3	<0.3	<0.3	<0.3	NA
	9/30/1992	NA	<50	NA	<0.3	<0.3	<0.3	<0.3	NA
	4/7/1994	NA	<50	NA	**2.5**	**5.5**	**0.9**	**5.1**	NA
	8/12/1994	NA	<50	NA	<0.5	<0.5	<0.3	<2	NA
	11/29/1994	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	3/21/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	5/22/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	8/24/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	2/12/1996	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	2/5/1997	NA	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	6/6/02*	NA	NA	NA	NA	NA	NA	NA	NA
	9/23/2002	NA	NA	NA	NA	NA	NA	NA	NA
	12/13/2002	NA	NA	NA	NA	NA	NA	NA	NA
	12/14/2004	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/23/2005	NA	NA	NA	NA	NA	NA	NA	NA
	6/22/2005	NA	NA	NA	NA	NA	NA	NA	NA
	9/6/2005	NA	NA	NA	NA	NA	NA	NA	NA
	3/2/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	6/1/2006	NA	NA	NA	NA	NA	NA	NA	NA
	9/27/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/20/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	6/15/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	9/27/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	12/18/2007	NS	NS	NS	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS	NS	NS	NS

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5
MW-4	11/27/1991	NA	**11,000**	NA	**100**	**0.7**	**250**	**330**	NA
	9/30/1992	NA	**380**	NA	**3.5**	**2.4**	**8.9**	**3.4**	NA
	4/7/1994	NA	**1,100**	NA	**61**	**5.5**	**17**	**12**	NA
	8/12/1994	NA	**1,000**	NA	**3**	**1**	**8**	**4**	NA
	11/29/1994	NA	**1,100**	NA	**2**	<0.5	**10**	**6**	NA
	3/21/1995	NA	**1,400**	NA	**200**	**5**	**66**	**18**	NA
	5/22/1995	NA	**1,200**	NA	**60**	**1**	**12**	**8**	NA
	8/24/1995	NA	**400**	NA	**1**	<0.5	**1**	<2	NA
	2/12/1996	NA	**1,500**	NA	**130**	<0.5	**120**	**51**	NA
	2/5/1997	NA	**1,200**	NA	**250**	**4.9**	**94**	**12**	**16**
	8/6/1997	NA	**330**	NA	**1.5**	<0.5	<0.5	<0.5	<5.0
	6/6/02*	NA	<50	NA	**1.7**	<0.5	<0.5	<0.5	<2.5
	9/23/2002	<48	<50	NA	<0.5	**1.3**	<0.5	<0.5	<2.5
	12/13/2002	**86** [c]	<50	NA	<0.5	<0.5	<0.5	<1.5	<0.5
	12/14/2004	<50	**95** [h]	NA	**2.6**	<0.5	<0.5	<0.5	<5.0
	3/23/2005	<50	**120** [h]	NA	<0.5	**5**	<0.5	<0.5	<5.0
	6/22/2005	<50	**180** [e]	NA	**1.7**	**7.5**	<0.5	<0.5	<5.0
	9/6/2005	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/2/2006	**1,600** [e]	**220** [g]	NA	**47**	**4.1**	**1.6**	**19**	<20
	6/1/2006	**1,000** [e]	**250** [f, g]	NA	**22**	**2.8**	**3.9**	**0.59**	<5.0
	9/27/2006	**1,400** [e]	**220** [f, g]	NA	**8.5**	**7.3**	**2.4**	<0.5	<15
	3/20/2007	**630** [e, h]	**130** [f, g]	**77** [g]	**4.8**	**12**	<0.5	<0.5	<5.0
	6/15/2007	**440** [e, h]	NA	<50	**2.1**	**7.8**	<0.5	<0.5	<5.0
	9/27/2007	**450** [e, h]	NA	**84** [g]	**2.4**	**6.2**	<0.5	<0.5	<5.0
	12/18/2007	**330** [e]	NA	<50	**1.4**	**7.1**	<0.5	<0.5	<35
	3/4/2008	**180** [e]	NA	<50	**0.60**	**3.7**	<0.5	<0.5	<5.0

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5
MW-5	3/21/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	5/22/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	8/24/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	2/12/1996	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	2/5/1997	NA	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	6/6/02*	NA	NA	NA	NA	NA	NA	NA	NA
	9/23/2002	**310** [c]	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5
	12/13/2002	**97** [c]	<50	NA	<0.5	<0.5	<0.5	<1.5	**0.720** [d]
	12/14/2004	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	**12**
	3/23/2005	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	**23**
	6/22/2005	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	**31**
	9/6/2005	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	**32**
	3/2/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	**30**
	6/1/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	**44**
	9/28/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	**48**
	3/20/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	**54**
	6/15/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	**38**
	9/27/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	**36**
	12/18/2007	NS	NS	NS	NS	NS	NS	NS	NS
	3/4/2008	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5
MW-6	3/21/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	5/22/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	8/24/1995	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	2/12/1996	NA	<50	NA	<0.5	<0.5	<0.5	<2	NA
	2/5/1997	NA	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	6/6/02*	NA	NA	NA	NA	NA	NA	NA	NA
	9/23/2002	NA	NA	NA	NA	NA	NA	NA	NA
	12/13/2002	NA	NA	NA	NA	NA	NA	NA	NA
	12/14/2004	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/23/2005	NA	NA	NA	NA	NA	NA	NA	NA
	6/22/2005	NA	NA	NA	NA	NA	NA	NA	NA
	9/6/2005	NA	NA	NA	NA	NA	NA	NA	NA
	3/2/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	6/1/2006	**50** [e]	<50	NA	**0.84**	<0.5	<0.5	<0.5	<5.0
	9/27/2006	<50	**61** [f]	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/20/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	6/15/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	9/27/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	12/18/2007	NS	NS	NS	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS	NS	NS	NS

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5
MW-7	7/18/2005	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	9/6/2005	<50	<50	NA	**0.7**	<0.5	**1.2**	<0.5	<5.0
	3/2/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	6/1/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	9/27/2006	<50	<50	NA	<0.5	<0.5	<0.5	<0.5	<5.0
	3/20/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	6/15/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	9/27/2007	<50	NA	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	12/18/2007	NS	NS	NS	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS	NS	NS	NS
MW-8	3/2/2006	**590** [e]	**550** [f g]	NA	**6.2**	**2.7**	**0.67**	**21**	<5.0
	6/1/2006	**97** [k]	**250** [f, j]	NA	<0.5	<0.5	<0.5	**1.1**	<5.0
	9/28/2006	**150** [e]	**300** [f, g, j]	NA	**3**	**1.2**	**1.1**	**7.2**	<5.0
	3/20/2007	**140** [e]	**440** [f, g]	**61** [g]	**1.2**	**0.68**	**0.55**	**2.5**	<5.0
	6/15/2007	**140** [e]	NA	**98** [g]	**1.6**	**0.81**	**0.76**	**2.8**	<5.0
	9/27/2007	**140** [e]	NA	**53** [g]	**0.66**	**0.55**	<0.5	**2.3**	<5.0
	12/18/2007	**96** [e]	NA	**94** [f, g]	**1.1**	<0.5	**0.77**	**2.1**	<5.0
	3/4/2008	**95** [e]	NA	<50	**1.1**	<0.5	**0.61**	**1.3**	<5.0
MW-9	3/2/2006	**280** [e]	**430** [f g]	NA	**2.6**	**0.96**	**1**	**10**	<5.0
	6/1/2006	**680** [k]	**180** [f, j]	NA	**0.85**	<0.5	**1.9**	**3.9**	<5.0
	9/28/2006	**150** [e]	**530** [f, g, j]	NA	**0.95**	**0.69**	**0.87**	**6.7**	<5.0
	3/20/2007	**120** [e]	NA	<50	**0.88**	**0.70**	<0.5	**1.8**	<5.0
	6/15/2007	**120** [e]	NA	**62** [g]	**1.3**	**0.84**	**1.1**	**3**	<5.0
	9/27/2007	**180** [e]	NA	**92** [g]	**1.2**	**0.61**	**1.7**	**2.1**	<5.0
	12/18/2007	**130** [e]	NA	**97** [f, g]	**1.5**	**0.58**	**1.1**	**1.9**	<5.0
	3/4/2008	**91** [e]	NA	<50	**2.0**	<0.5	**1.1**	**1.9**	<5.0

Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California									
Well ID	Sample Date	Modified EPA Method 8015 (µg/L)			EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	TPH as Diesel	TPH as Diesel with Silica Gel Cleanup	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
RWQCB ESLs; Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water resource)		100	100	100	1	40	30	20	5

Notes: ug/L = micrograms per liter
TPH = Total Petroleum Hydrocarbons
MTBE = Methyl *tert* -Butyl Ether
RWQCB = California Regional Water Quality Control Board, San Francisco Bay Region
ESL = Environmental Screening Level
ND = Not Detected (method reporting limit not known)
NA = Not Analyzed
NS = Not Sampled
<*x* = Analyte not detected at reporting limit *x*
* = Initial data set collected under direction of Blymyer Engineers, Inc.
a = Laboratory note indicates the result is an unidentified hydrocarbon within the C6 to C10 range.
b = Laboratory note indicates the result is gasoline within the C6 to C10 range.
c = Laboratory note indicates the result is a hydrocarbon within the diesel range but that it does not represent the pattern of the requested fuel.
d = MTBE analysis by EPA Method 8260B yielded a non-detectable concentration at a detection
e = Laboratory note indicates that unmodified or weakly modified gasoline is significant.
f = Laboratory note indicates that diesel range compounds are significant, with no recognizable pattern.
g = Laboratory note indicates that gasoline range compounds are significant.
h = Laboratory note indicates that no recognizable pattern is present.
i = Laboratory note indicates that a lighter than water immiscible sheen / product is present.
j = Laboratory note indicates that oil range compounds are significant.
k = Laboratory note indicates one to a few isolated non-target peaks are present.

Bold results indicate detectable analyte concentrations.
Note: Shaded cell indicates that detected concentration exceeds ESL

Table III, Summary of Groundwater Sample Fuel Additive Analytical Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California										
Well ID	Sample Date	EPA Method 8260B (ug/L)								
		TAME	TBA	EDB	1,2-DCA	DIPE	Ethanol	ETBE	Methanol	MTBE
RWQCB Groundwater ESLs Table F-1a: Groundwater Screening Levels (groundwater IS a current or potential drinking water source)		NV	12	0.05	0.5	NV	50,000	NV	NV	5.0
MW-2	12/13/2002	<0.50	<2,000	NA	NA	<0.50	NA	<0.50	NA	<0.50
	3/23/2005	<5.0	<50	<5.0	**5.4**	<5.0	<500	<5.0	<5,000	<5.0
MW-4	3/20/2007	<0.5	<5.0	NA	NA	<0.5	NA	<0.5	NA	<0.5
MW-5	12/14/2004	<0.5	<5.0	<0.5	<0.5	<0.5	<50	<0.5	<500	**12**
	3/2/2006	<0.5	<5.0	<0.5	<0.5	<0.5	<50	<0.5	<500	**28***
	6/1/2006	<0.5	<5.0	<0.5	<0.5	<0.5	<50	<0.5	<500	**40***
	9/28/2006	<0.5	<5.0	<0.5	<0.5	<0.5	<50	<0.5	<500	**48**
	3/20/2007	<1.0	<10	NA	NA	<1.0	NA	<1.0	NA	**57***

Notes:
TAME = Methyl tert-Amyl Ether
TBA = tert-Butyl Alcohol
EDB = 1,2-Dibromoethane
1,2-DCA = 1,2-Dichloroethane
DIPE = Di-isopropyl ether
ETBE = Ethyl tert-butyl ether
MTBE = Methly tert-butyl ether
(µg/L) = Micrograms per liter
NA = Not analyzed
NV = No value
* = Differs from result yielded by EPA 8021B

Bold results indicate detectable analyte concentrations.
Note: Shaded cell indicates that detected concentration exceeds ESL

Table IV, Summary of Groundwater Intrinsic Bioremediation Field Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California						
Well ID	Sample Date	Field Meter Dissoved Oxygen (mg/L)	Field Meter Oxidation Reduction Potential (mV)	Field Test Kit Ferrous Iron (Fe 2+)	Field Meter Field Temperature (^{o}C or ^{o}F)	Field Meter Field pH pH units
MW-1	12/14/2004	0.2 / 2.0	224 / 160	0.1	18.8	6.9
	3/23/2005	5.1 / 0.2	105 / 102	0.0	17.3	6.9
	6/22/2005	0.51 / 0.28	-208.2 / -137.4	0.3	19.6	6.7
	3/2/2006	0.53 / 0.38	441.3 / 448.7	0.0	17.4	6.8
	6/1/2006	NS	NS	NS	NS	NS
	9/28/2006	0.74 / 0.45	-11.9 / -129.5	<0.2	22.6	6.8
	3/20/2007	0.2	88	0	65.9	7.0
	6/15/2007	NS	NS	NS	NS	NS
	9/27/2007	1.6	245.0	0.81	23.1	7.24
	12/18/2007	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS
MW-2	12/14/2004	0.3 / 2.0	-160 / -148	1.4	18.4	6.9
	3/23/2005	0.1 / 0.1	-133 / -145	2.0	16.6	7.0
	6/22/2005	0.55 / 0.11	-208.5 / -229.6	1.0	22.6	7.0
	3/2/2006	NS	NS	NS	NS	NS
	6/1/2006	NS	NS	NS	NS	NS
	9/28/2006	NS	NS	NS	NS	NS
	3/20/2007	NS	NS	NS	NS	NS
	6/15/2007	NS	NS	NS	NS	NS
	9/27/2007	NS	NS	NS	NS	NS
	12/18/2007	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS

Table IV, Summary of Groundwater Intrinsic Bioremediation Field Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California						
Well ID	Sample Date	Field Meter Dissoved Oxygen (mg/L)	Field Meter Oxidation Reduction Potential (mV)	Field Test Kit Ferrous Iron (Fe 2+)	Field Meter Field Temperature (^{o}C or ^{o}F)	Field Meter Field pH pH units
MW-3	12/14/2004	0.3 / 0.6	171 / 165	0.1	19.4	7.2
	3/23/2005	0.1 / 0.1	81 / 79	0.0	17.7	7.2
	6/22/2005	1.49/1.39	100.7 / 30.3	0.1	20.8	7.1
	3/2/2006	0.49 / 0.17	414.9 / 419.7	0.0	18.7	6.1
	6/1/2006	NS	NS	NS	NS	NS
	9/27/2006	0.64 / 0.39	-49.0 / -103.2	<0.2	22.1	7.0
	3/20/2007	0.1	92	0	64.3	7.2
	6/15/2007	0.22	82	0	20.0	7.3
	9/27/2007	0.40	216	0.6	21.3	7.2
	12/18/2007	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS
MW-4	12/14/2004	0.7 / 0.1	-7 / -41	0.8	18.0	6.8
	3/23/2005	0.1 / 0.4	-17 / -19	1.2	15.9	6.9
	6/22/2005	0.23 / 0.12	-28.6 / -30.9	1.2	20.1	6.7
	3/2/2006	0.58 / 0.56	-169.5 / -205.6	1.2	16.2	7.5
	6/1/2006*	0.31	-78	1.0	18.5	7.0
	9/27/2006	1.88 / 0.51	109 / -1.9	<0.2	19.4	6.7
	3/20/2007	0.1	6.2	1.5	36.4	7.1
	6/15/2007	0.18	-30	1.0	20.3	7.4
	9/27/2007	0.20	30	0.95	18.7	7.1
	12/18/2007	15.89	10.8	0.0	17.5	8.7
	3/4/2008	4.73 / 2.93	217.5 / 159.9	0.0	16.5	7.4

Table IV, Summary of Groundwater Intrinsic Bioremediation Field Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California						
Well ID	Sample Date	Field Meter Dissoved Oxygen (mg/L)	Field Meter Oxidation Reduction Potential (mV)	Field Test Kit Ferrous Iron (Fe 2+)	Field Meter Field Temperature (^{o}C or ^{o}F)	Field Meter Field pH pH units
MW-5	12/14/2004	0.5 / 2.0	5 / 532	0.1	17.9	7.1
	3/23/2005	0.1 / 0.9	-17 / 0	0.0	15.1	7.2
	6/22/2005	0.52 / 0.27	14.4 / -35.3	0.1	23.8	7.0
	3/2/2006	0.84 / 0.59	436.8 / 449.2	0.0	14.6	6.2
	6/1/2006*	0.49	-34	0.0	19.4	7.2
	9/28/2006	0.75 / 0.78	153.1 / 94.1	<0.2	20.5	6.7
	3/20/2007	1.4	108	0	61.6	7.3
	6/15/2007	2.21	5.5	0	18.3	7.8
	9/27/2007	0.90	27	0.08	20.6	7.3
	12/18/2007	NS	NS	NS	NS	NS
	3/4/2008	2.76 / 0.81	89.2 / 0.9	0.0	17.9	7.5
MW-6	12/14/2004	0.3 / 1.2	125 / -25	0.0	15.5	7.2
	3/23/2005	0.1 / 0.8	52 / -4	0.0	13.9	7.2
	6/22/2005	0.53 / 0.49	-22.3 / -18	0.1	22.7	7.0
	3/2/2006	1.53 / 0.51	-116.5 / -189.9	0.2	13.5	8.2
	6/1/2006*	0.50	16	0.0	20.1	8.0
	9/27/2006	0.69 / 0.35	-50.2 / -72.9	<0.2	22.9	7.5
	3/20/2007	1.5	74	0	60.2	7.5
	6/15/2007	1.30	-51	0	20.5	7.7
	9/27/2007	1.2	-83	2.4	21.0	7.0
	12/18/2007	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS

Table IV, Summary of Groundwater Intrinsic Bioremediation Field Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California						
Well ID	Sample Date	Field Meter Dissoved Oxygen (mg/L)	Field Meter Oxidation Reduction Potential (mV)	Field Test Kit Ferrous Iron (Fe 2+)	Field Meter Field Temperature (^{o}C or ^{o}F)	Field Meter Field pH pH units
MW-7	7/18/2005	NS	NS	NS	68.7 / 69.4	7.5
	3/2/2006	2.71 / 1.08	214.3 / -176.9	0.4	14.0	8.0
	6/1/2006*	0.45	62	0.4	20.2	7.15
	9/27/2006	0.67 / 0.26	70.0 / 62.0	<0.2	19.8	7.0
	3/20/2007	0.1	92	0	63.9	7.4
	6/15/2007	0.25	56	0	20.1	7.4
	9/27/2007	0.90	125	0.85	18.4	7.1
	12/18/2007	NS	NS	NS	NS	NS
	3/4/2008	NS	NS	NS	NS	NS
MW-8	3/2/2006	1.20 / 0.85	423.8 / 456.9	0.0	14.1	8.4
	6/1/2006*	0.60	-50	0.0	19.9	10.3
	9/28/2006	0.97 / 0.40	51.9 / 63.9	<0.2	20.2	10.3
	3/20/2007	0.1	101	0	62.3	9.9
	6/15/2007	0.3	4	0	19.0	9.1
	9/27/2007	0.4	1.53	0.2	21.3	9.2
	12/18/2007	5.6	-20.4	0.0	17.7	10.7
	3/4/2008	5.03 / 3.50	90.8 / 49.1	0.0	17.3	10.6

Table IV, Summary of Groundwater Intrinsic Bioremediation Field Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California						
Well ID	Sample Date	Field Meter Dissoved Oxygen (mg/L)	Field Meter Oxidation Reduction Potential (mV)	Field Test Kit Ferrous Iron (Fe 2+)	Field Meter Field Temperature (^{o}C or ^{o}F)	Field Meter Field pH pH units
MW-9	3/2/2006	0.52 / 0.20	118.0 / 112.6	0.0	15.2	9.4
	6/1/2006*	0.42	-30	0.0	20.5	10.5
	9/28/2006	1.15 / 0.23	78.5 / -6.1	<0.2	21.1	10.8
	3/20/2007	0.2	136	0	62.8	8.9
	6/15/2007	0.21	46	0	19.0	6.9
	9/27/2007	0.4	-96	0.6	21.8	8.4
	12/18/2007	11.7	20	0.0	19.0	10.5
	3/4/2008	4.61 / 3.12	92.3 / 8.7	0.0	18.9	10.9

Notes:
mV = Millivolts
mg/L = Milligrams per liter
oC = Degrees Centigrade
2.6 / 2.2 = Initial reading (pre-purge) / Final reading (post-purge)
NS = Not sampled
* = Post purge value

Table V, Summary of Groundwater Intrinsic Bioremediation Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Method SM 5310B	Method E300.1		Method RSK 174	Method E200.7		Method E365.1	Method SM 5210B	Method SM 5220D
		CO2	Nitrate (as N)	Sulfate	Methane	Manganese	Potassium	Total Phosphorous (as P)	BOD	COD
		mg/L			µg/L			mg/L		
MW-1	12/14/2004	580	<20	1,100	2.2	NA	NS	NS	NS	NS
	3/23/2005	660	0.41	620	<0.5	NS	NS	NS	NS	NS
	6/22/2005	660	<0.1	580	0.91	NS	NS	NS	NS	NS
	3/2/2006	850	<0.7 [1]	610	0.65	1,700	5,100	0.19	<3.0	43
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/28/2006	660	<0.1	980	0.86	1,900	1,200	0.18	<4.0	15
MW-2	12/14/2004	940	<5.0	220	4,700	NS	NS	NS	NS	NS
	3/23/2005	1,100	0.34	180	3,700	NS	NS	NS	NS	NS
	6/22/2005	990	<0.1	290	1,800	NS	NS	NS	NS	NS
	3/2/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/28/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS

Table V, Summary of Groundwater Intrinsic Bioremediation Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Method SM 5310B	Method E300.1		Method RSK 174	Method E200.7		Method E365.1	Method SM 5210B	Method SM 5220D
		CO2	Nitrate (as N)	Sulfate	Methane	Manganese	Potassium	Total Phosphorous (as P)	BOD	COD
		mg/L			µg/L			mg/L		
MW-3	12/14/2004	610	<20	780	<0.5	NS	NS	NS	NS	NS
	3/23/2005	590	0.2	560	<0.5	NS	NS	NS	NS	NS
	6/22/2005	320	1.3	540	<0.5	NS	NS	NS	NS	NS
	3/2/2006	730	2.0 [1]	630	<0.5	1,800	4,400	0.18	<3.0	<10
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/27/2006	650	1.5	580	<0.5	1,500	900	0.16	<4.0	<10
MW-4	12/14/2004	680	<10	760	170	NS	NS	NS	NS	NS
	3/23/2005	700	0.3	430	24	NS	NS	NS	NS	NS
	6/22/2005	700	<0.1	480	71	NS	NS	NS	NS	NS
	3/2/2006	370	0.88 [1]	490	90	5,300	3,900	0.17	<3.0	33
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/27/2006	290	<0.1	480	51	4,100	670	0.13	<4.0	22

Table V, Summary of Groundwater Intrinsic Bioremediation Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Method SM 5310B	Method E300.1		Method RSK 174	Method E200.7		Method E365.1	Method SM 5210B	Method SM 5220D
		CO2	Nitrate (as N)	Sulfate	Methane	Manganese	Potassium	Total Phosphorous (as P)	BOD	COD
		mg/L			µg/L			mg/L		
MW-5	12/14/2004	1,400	<20	1,200	120	NS	NS	NS	NS	NS
	3/23/2005	1,400	1	640	57	NS	NS	NS	NS	NS
	6/22/2005	1,500	<0.1	590	1.5	NS	NS	NS	NS	NS
	3/2/2006	1,600	<0.7 [1]	450	490	960	4,000	0.14	<3.0	31
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/28/2006	1,400	<0.1	410	24	630	920	0.13	<4.0	15
MW-6	12/14/2004	790	<10	460	180	NS	NS	NS	NS	NS
	3/23/2005	770	0.12	380	60	NS	NS	NS	NS	NS
	6/22/2005	770	<0.1	400	36	NS	NS	NS	NS	NS
	3/2/2006	470	5.2 [1]	540	12	480	1,600	0.099	<3.0	21
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/27/2006	400	<0.1	530	55	410	320	0.079	<4.0	25

Table V, Summary of Groundwater Intrinsic Bioremediation Analytical Results
BEI Job No. 202016, Dolan Rentals
6393 Scarlett Court, Dublin, California

Well ID	Sample Date	Method SM 5310B	Method E300.1		Method RSK 174	Method E200.7		Method E365.1	Method SM 5210B	Method SM 5220D
		CO2	Nitrate (as N)	Sulfate	Methane	Manganese	Potassium	Total Phosphorous (as P)	BOD	COD
		mg/L			µg/L			mg/L		
MW-7	7/18/2005	NS	NS	NS	NS	NS	NS	NS	NS	NS
	3/2/2006	450	<0.7 [1]	260	1.7	5,500	7,300	0.16	<3.0	26
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/27/2006	350	<0.1	270	1.1	4,600	1,700	0.13	<4.0	<10
MW-8	3/2/2006	9	13 [1]	570	17	<20	19,000	0.21	<3.0	71
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/28/2006	5	0.29	290	18	<20	6,000	<0.04	<4.0	34
MW-9	3/2/2006	8	11 [1]	890	19	<20	20,000	<0.04	<3.0	61
	6/1/2006	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/28/2006	6.3	<0.1	120	28	<20	5,300	<0.04	<4.0	42

Notes:
SM = Standard Method
mg/L = Milligrams per liter
µg/L = Micrograms per liter
CO_2 = Carbon Dioxide
NS = Not sampled
BOD = Biological Oxygen Demand
COS = Chemical Oxygen Demand
[1] = Total Nitrogen (Nitrate, Nitrite, & Ammonia)

Table VI, Summary of Groundwater Bacteria Enumeration Analytical Results BEI Job No. 202016, Dolan Rentals 6393 Scarlett Court, Dublin, California				
Well ID	Sample Date	Aerobic Bacteria		
		Method 9215A (HPC) / SM 9215 B Modified		
		Hydrocarbon Degraders	Total Heterotrophs	Target Hydrocarbons Tested
		cfu/ml		
MW-1	3/20/2007	80	400	Gasoline/Diesel
MW-3	4/9/2007	700	300	Gasoline/Diesel
MW-4	3/20/2007	5,000	10,000	Gasoline/Diesel
MW-5	3/20/2007	400	1,000	Gasoline/Diesel

Notes: SM = Standard Method
cfu/ml = Colony forming units per milliliter

Figures

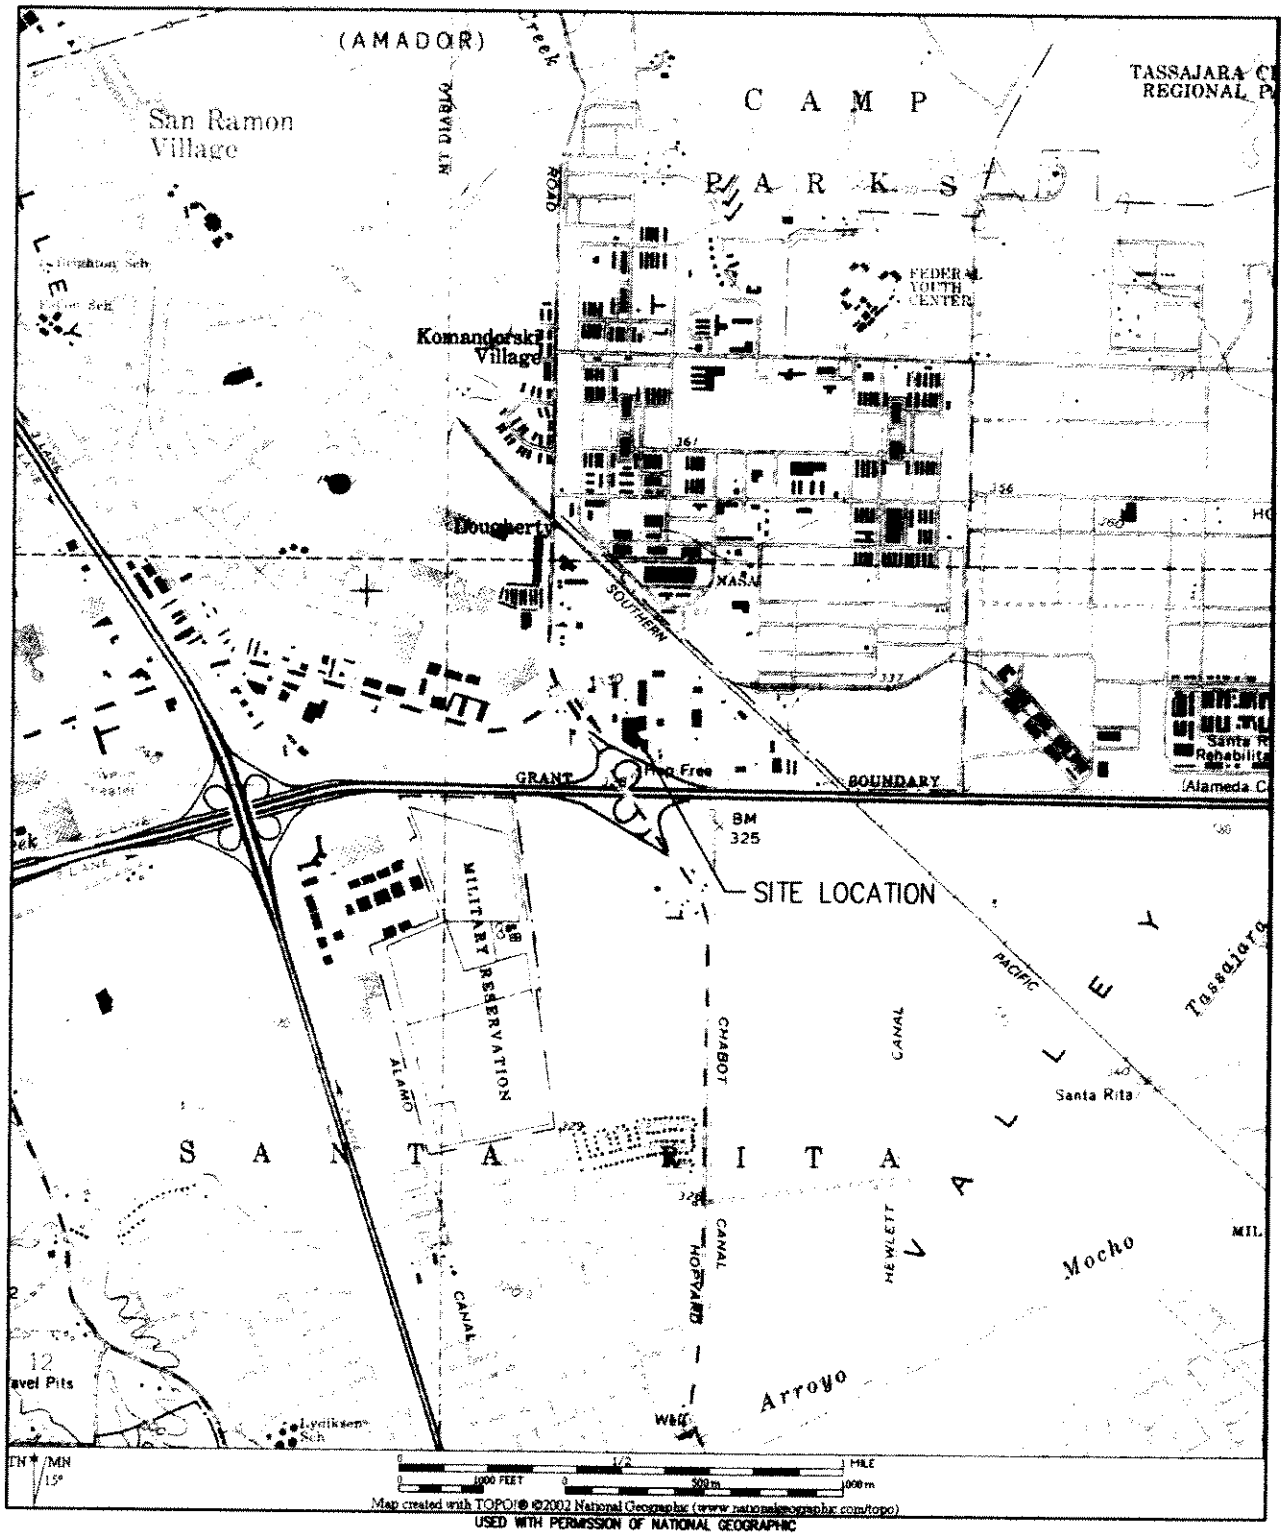

BLYMYER ENGINEERS, INC.

BEI JOB NO.	DATE
202016	6-27-02

LEGEND

SITE LOCATION MAP

FORMER DOLAN RENTAL PROPERTY
6393 SCARLETT COURT
DUBLIN, CA

FIGURE 1

I:\Appd\2002dwg\202016\202016fig1.dwg 6/27/02 11:44 am

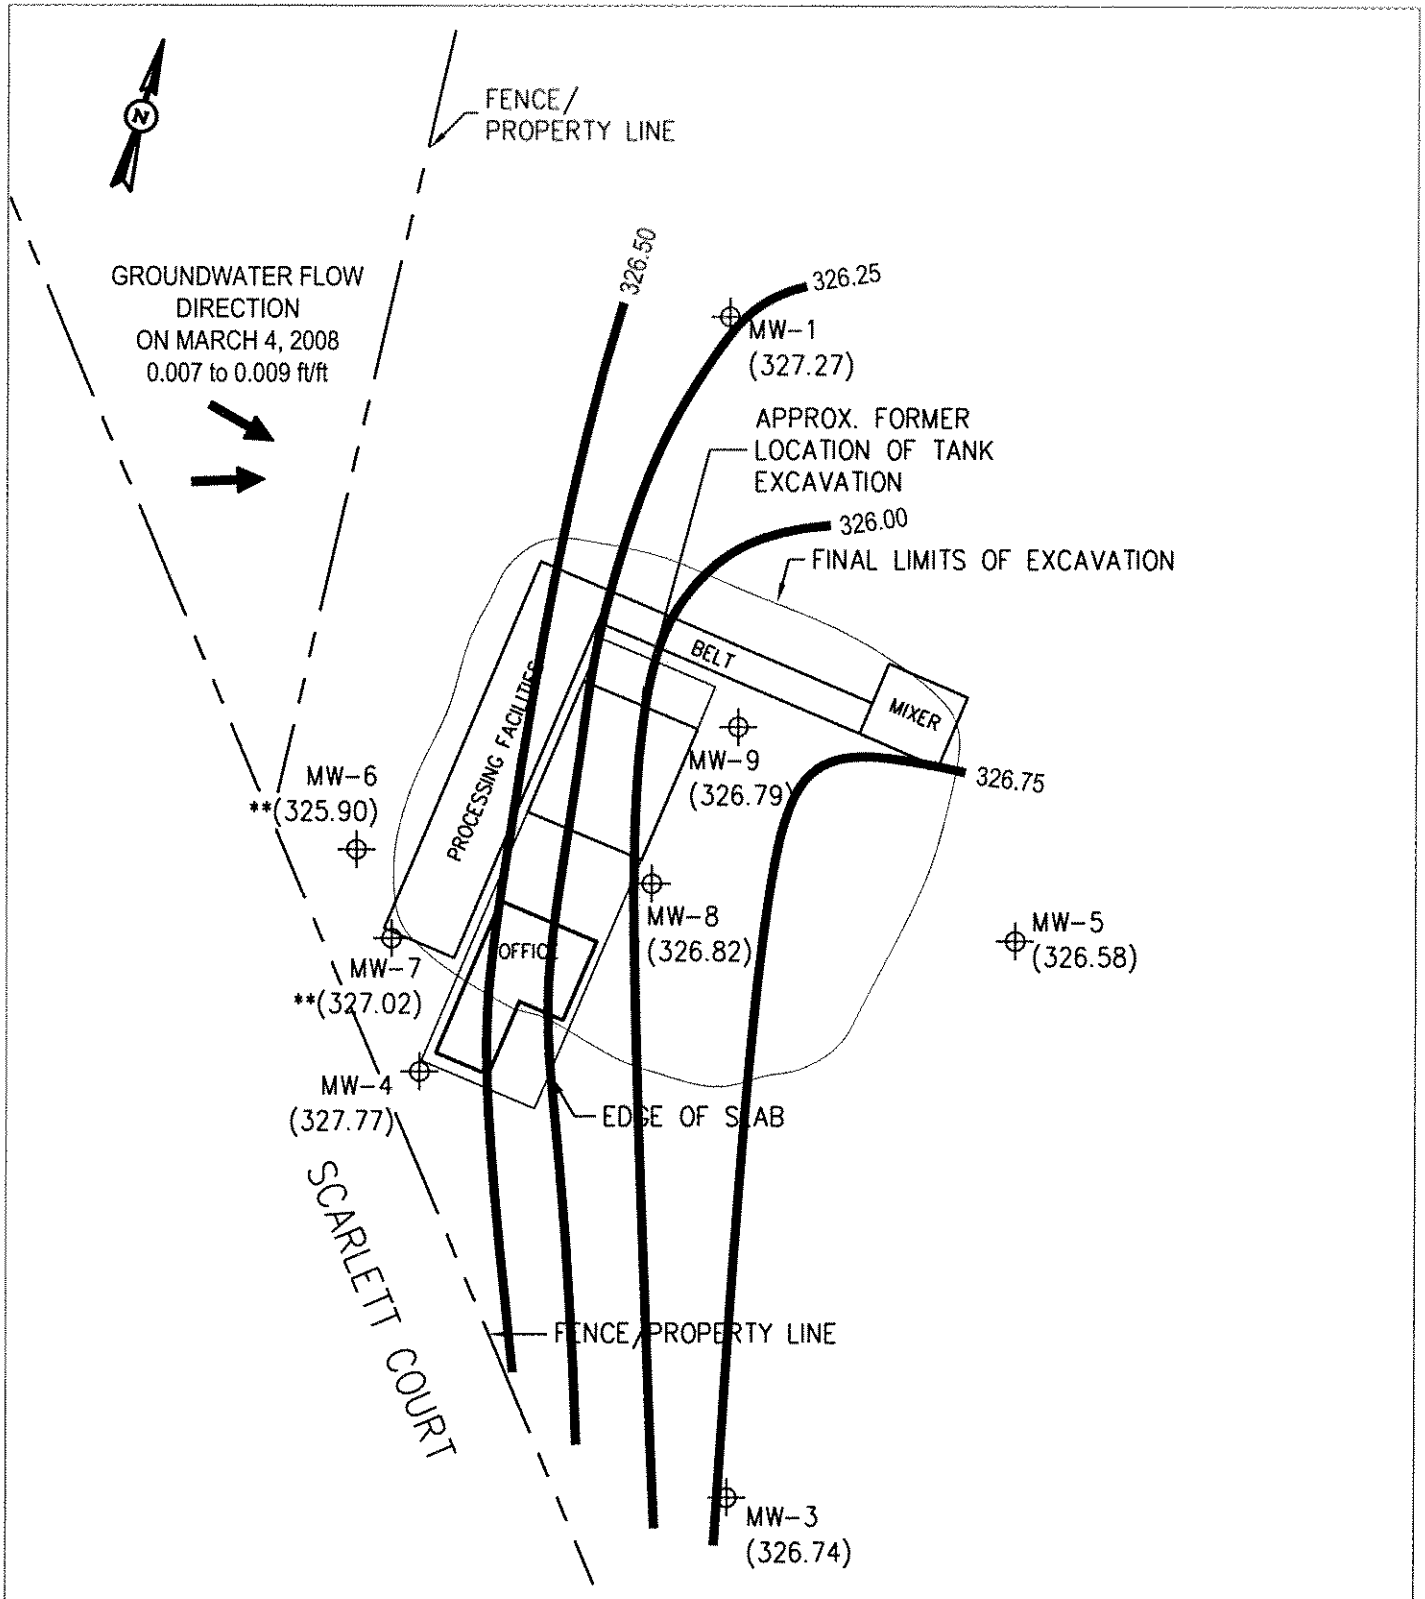

BASED ON SITE PLAN GENERATED BY AQUA SCIENCE ENGINEERS, INC.

0 20

SCALE IN FEET

LEGEND

- ⊕ GROUNDWATER MONITORING WELL
- (326.63) GROUND WATER ELEVATION
- (**) ANOMOLOUS WATER LEVEL, NOT USED IN GRADIENT CALCULATION
- GROUNDWATER ELEV. CONTOUR
- → GROUNDWATER FLOW DIRECTION

BLYMYER ENGINEERS, INC.

BEI JOB NO.	DATE
202016	03-26-08

SITE PLAN AND GROUNDWATER GRADIENT ON MARCH 4, 2008
FORMER DOLAN RENTAL PROPERTY
6393 SCARLETT COURT
DUBLIN, CA

FIGURE 2

L:\Acad\2002dwg\202016\8.5 x 11\202016fig 2g.dwg March 26, 2008 - 11:17AM LWillstock

Appendix A

Standard Operating Procedures

Blaine Tech Services, Inc.

Blaine Tech Services, Inc.
Standard Operating Procedure

WATER LEVEL, SEPARATE PHASE LEVEL AND TOTAL WELL DEPTH MEASUREMENTS (GAUGING)

Routine Water Level Measurements

1. Establish that water or debris will not enter the well box upon removal of the cover.
2. Remove the cover using the appropriate tools.
3. Inspect the wellhead (see Wellhead Inspections).
4. Establish that water or debris will not enter the well upon removal of the well cap.
5. Unlock and remove the well cap lock (if applicable). If lock is not functional cut it off.
6. Loosen and remove the well cap. CAUTION: DO NOT PLACE YOUR FACE OR HEAD DIRECTLY OVER WELLHEAD WHEN REMOVING THE WELL CAP. WELL CAP MAY BE UNDER PRESSURE AND/OR MAY RELEASE ACCUMULATED AND POTENTIALLY HARMFULL VAPORS.
7. Verify and identify survey point as written on S.O.W.
   TOC: If survey point is listed as Top of Casing (TOC), look for the exact survey point in the form of a notch or mark on the top of the casing. If no mark is present, use the north side of the casing as the measuring point.
   TOB: If survey point is listed as Top of Box (TOB), the measuring point will be established manually. Place the inverted wellbox lid halfway across the wellbox opening and directly over the casing. The lower edge of the inverted cover directly over the casing will be the measuring point.
8. Put new Latex or Nitrile gloves on your hands.
9. Slowly lower the Water Level Meter probe into the well until it signals contact with water with a tone and/or flashing a light.
10. Gently raise the probe tip slightly above the water and hold it there. Wait momentarily to see if the meter emits a tone, signaling rising water in the casing. Gently lower the probe tip slightly below the water. Wait momentarily to see if the meter stops emitting a tone, signaling dropping water in the casing. Continue process until water level stabilizes indicating that the well has equilibrated.
11. While holding the probe at first contact with water and the tape against the measuring point, note depth. Repeat twice to verify accuracy. Write down measurement on Well Gauging Sheet under Depth to Water column.
12. Recover probe, replace and tighten well cap, replace lock (if applicable), replace well box cover and tighten hardware (if applicable)

Water Level and Separate Phase Thickness Measurements in Wells Suspected of Containing Separate Phase

1. Establish that water or debris will not enter the well box upon removal of the cover.
2. Remove the cover using the appropriate tools.
3. Inspect the wellhead (see Wellhead Inspections).
4. Establish that water or debris will not enter the well upon removal of the well cap.

5. Unlock and remove the well cap lock (if applicable). If lock is not functional cut it off.
6. Loosen and remove the well cap. CAUTION: DO NOT PLACE YOUR FACE OR HEAD DIRECTLY OVER WELLHEAD WHEN REMOVING THE WELL CAP. WELL CAP MAY BE UNDER PRESSURE AND/OR MAY RELEASE ACCUMULATED AND POTENTIALLY HARMFULL VAPORS.
7. Verify and identify survey point as written on S.O.W.
   TOC: If survey point is listed as Top of Casing (TOC), look for the exact survey point in the form of a notch or mark on the top of the casing. If no mark is present, use the north side of the casing as the measuring point.
   TOB: If survey point is listed as Top of Box (TOB), the measuring point will be established manually. Place the inverted well box lid halfway across the well box opening and directly over the casing. The lower edge of the inverted cover directly over the casing will be the measuring point.
8. Put new Nitrile gloves on your hands.
9. Slowly lower the tip of the Interface Probe into the well until it emits either a solid or broken tone.
   BROKEN TONE: Separate phase layer is not present. Go to Step 8 of Routine Water Level Measurements shown above to complete gauging process using the Interface probe as you would a Water Level Meter.
   SOLID TONE: Separate phase layer is present. Go to the next step.
10. Gently raise the probe tip slightly above the separate phase layer and hold it there. Wait momentarily to see if the meter emits a tone, signaling rising water in the casing. Gently lower the probe tip slightly below the separate phase layer. Wait momentarily to see if the meter stops emitting a tone, signaling dropping water in the casing. Continue process until water level stabilizes indicating that the well has equilibrated.
11. While holding the probe at first contact with the separate phase layer and the tape against the measuring point, note depth. Repeat twice to verify accuracy. Write down measurement on Well Gauging Sheet under Depth to Product column.
12. Gently lower the probe tip until it emits a broken tone signifying contact with water. While holding the probe at first contact with water and the tape against the measuring point, note depth. Repeat twice to verify accuracy. Write down measurement on Well Gauging Sheet under Depth to Water column.
13. Recover probe, replace and tighten well cap, replace lock (if applicable), replace well box cover and tighten hardware (if applicable).

Routine Total Well Depth Measurements

1. Lower the Water Level Meter probe into the well until it lightens in your hands, indicating that the probe is resting at the bottom of well.
2. Gently raise the tape until the weight of the probe increases, indicating that the probe has lifted off the well bottom.
3. While holding the probe at first contact with the well bottom and the tape against the well measuring point, note depth. Repeat twice to verify accuracy. Write down measurement on Well Gauging Sheet under Total Well Depth column.

4. Recover probe, replace and tighten well cap, replace lock (if applicable), replace well box cover and tighten hardware (if applicable).

Blaine Tech Services, Inc.
Standard Operating Procedure

WELL WATER EVACUATION (PURGING)

Purpose
Evacuation of a predetermined minimum volume of water from a well (purging) while *simultaneously* measuring water quality parameters is typically required prior to sampling. Purging a minimum volume guarantees that actual formation water is drawn into the well. Measuring water quality parameters either verifies that the water is stable and suitable for sampling or shows that the water remains unstable, indicating the need for continued purging. Both the minimum volume and the stable parameter qualifications need to be met prior to sampling. This assures that the subsequent sample will be representative of the formation water surrounding the well screen and not of the water standing in the well.

Defining Casing Volumes
The predetermined minimum quantity of water to be purged is based on the wells' casing volume. A casing volume is the volume of water presently standing within the casing of the well. This is calculated as follows:

Casing Volume = (TD – DTW) VCF

1. Subtract the wells' depth to water (DTW) measurement from its total depth (TD) measurement. This is the height of the water column in feet.
2. Determine the well casings' volume conversion factor (VCF). The VCF is based on the diameter of the well casing and represents the volume, in gallons, that is contained in one (1) foot of a particular diameter of well casing. The common VCF's are listed on our Well Purge Data Sheets.
3. Multiply the VCF by the calculated height of the water column. This is the casing volume, the amount of water in gallons standing in the well.

Remove Three to Five Casing Volumes
Prior to sampling, an attempt will be made to purge all wells of a minimum of three casing volumes and a maximum of five casing volumes except where regulations mandate the minimum removal of four casing volumes.

Choose the Appropriate Evacuation Device Based on Efficiency
In the absence of instructions on the SOW to the contrary, selection of evacuation device will be based on efficiency.

Measure Water Quality Parameters at Each Casing Volume
At a minimum, water quality measurements include pH, temperature and electrical conductivity (EC). Measurements are made and recorded at least once every casing volume. They are considered stable when all parameters are within 10% of their previous measurement.

Note: The following instructions assume that well has already been properly located, accessed, inspected and gauged.

Prior to Purging a Well
1. Confirm that the well is to be purged and sampled per the SOW.
2. Confirm that the well is suitable based on the conditions set by the client relative to separate phase.
3. Calculate the wells' casing volume.
4. Put new Latex or Nitrile gloves on your hands.

Purging With a Bailer (Stainless Steel, Teflon or Disposable)
1. Attach bailer cord or string to bailer. Leave other end attached to spool.
2. Gently lower empty bailer into well until well bottom is reached.
3. Cut cord from spool. Tie end of cord to hand.
4. Gently raise full bailer out of well and clear of well head. Do not let the bailer or cord touch the ground.
5. Pour contents into graduated 5-gallon bucket or other graduated receptacle.
6. Repeat purging process.
7. Upon removal of first casing volume, fill clean parameter cup with purgewater, empty the remainder of the purgewater into the bucket, lower the bailer back into the well and secure the cord on the Sampling Vehicle.
8. Use the water in the cup to collect and record parameter measurements.
9. Continue purging until second casing volume is removed.
10. Collect parameter measurements.
11. Continue purging until third casing volume is removed.
12. Collect parameter measurements. If parameters are stable, stop purging. If parameters remain unstable, continue purging until stabilization occurs or the fifth casing volume is removed.

Purging With a Pneumatic Pump
1. Position Pneumatic pump hose reel over the top of the well.
2. Gently unreel and lower the pump into the well. Do not contact the well bottom.
3. Secure the hose reel.
4. Begin purging into graduated 5-gallon bucket or other graduated receptacle.
5. Adjust water recharge duration and air pulse duration for maximum efficiency.
6. Upon removal of first casing volume, fill clean parameter cup with water.
7. Use the water in the cup to collect and record parameter measurements.
8. Continue purging until second casing volume is removed.

9. Collect parameter measurements.
10. Continue purging until third casing volume is removed.
11. Collect parameter measurements. If parameters are stable, stop purging. If parameters remain unstable, continue purging until stabilization occurs or the fifth casing volume is removed.
12. Upon completion of purging, gently recover the pump and secure the reel.

Purging With a Fixed Speed Electric Submersible Pump

1. Position Electric Submersible hose reel over the top of the well.
2. Gently unreel and lower the pump to the well bottom.
3. Raise the pump 5 feet off the bottom.
4. Secure the hose reel.
5. Begin purging.
6. Verify pump rate with flow meter or graduated 5-gallon bucket
7. Upon removal of first casing volume, fill clean parameter cup with water.
8. Use the water in the cup to collect and record parameter measurements.
9. Continue purging until second casing volume is removed.
10. Collect parameter measurements.
11. Continue purging until third casing volume is removed.
12. Collect parameter measurements. If parameters are stable, stop purging. If parameters remain unstable, continue purging until stabilization occurs or the fifth casing volume is removed.
13. Upon completion of purging, gently recover the pump and secure the reel.

Blaine Tech Services, Inc.
Standard Operating Procedure

SAMPLE COLLECTION FROM GROUNDWATER WELLS USING BAILERS

Sampling with a Bailer (Stainless Steel, Teflon or Disposable)

1. Put new Latex or Nitrile gloves on your hands.
2. Determine required bottle set.
3. Fill out sample labels completely and attach to bottles.
4. Arrange bottles in filling order and loosen caps (see Determine Collection Order below).
5. Attach bailer cord or string to bailer. Leave other end attached to spool.
6. Gently lower empty bailer into well until water is reached.
7. As bailer fills, cut cord from spool and tie end of cord to hand.
8. Gently raise full bailer out of well and clear of well head. Do not let the bailer or cord touch the ground. If a set of parameter measurements is required, go to step 9. If no additional measurements are required, go to step 11.
9. Fill a clean parameter cup, empty the remainder contained in the bailer into the sink, lower the bailer back into the well and secure the cord on the Sampling Vehicle. Use the water in the cup to collect and record parameter measurements.
10. Fill bailer again and carefully remove it from the well.
11. Slowly fill and cap sample bottles. Fill and cap volatile compounds first, then semi-volatile, then inorganic. Return to the well as needed for additional sample material.

    Fill 40-milliliter vials for volatile compounds as follows: Slowly pour water down the inside on the vial. Carefully pour the last drops creating a convex or positive meniscus on the surface. Gently screw the cap on eliminating any air space in the vial. Turn the vial over, tap several times and check for trapped bubbles. If bubbles are present, repeat process.

    Fill 1 liter amber bottles for semi-volatile compounds as follows: Slowly pour water into the bottle. Leave approximately 1 inch of headspace in the bottle. Cap bottle.

    Field filtering of inorganic samples using a stainless steel bailer is performed as follows: Attach filter connector to top of full stainless steel bailer. Attach 0.45 micron filter to connector. Flip bailer over and let water gravity feed through the filter and into the sample bottle. If high turbidity level of water clogs filter, repeat process with new filter until bottle is filled. Leave headspace in the bottle. Cap bottle.

    Field filtering of inorganic samples using a disposable bailer is performed as follows: Attach 0.45 micron filter to connector plug. Attach connector plug to bottom of full disposable bailer. Water will gravity feed through the filter and into the sample bottle. If high turbidity level of water clogs filter, repeat process with new filter until bottle is filled. Leave headspace in the bottle. Cap bottle.

12. Bag samples and place in ice chest.
13. Note sample collection details on well data sheet and Chain of Custody.

Appendix B

Purge Drum Inventory Log, Wellhead Inspection Checklist, Well Gauging Data, and Repair Data Sheet

Blaine Tech Services, Inc.

Dated March 4, 2008

SPH or Purge Water Drum Log

Client: Baymyer @ Dolan Rooms

Site Address: Dublin, CA

STATUS OF DRUM(S) UPON ARRIVAL

Date	4/9/07	6/15/07	9/27/07	12/18/07	3/4/08	
Number of drum(s) empty:						
Number of drum(s) 1/4 full:	1					
Number of drum(s) 1/2 full:						
Number of drum(s) 3/4 full:				1		
Number of drum(s) full:	8			~~2~~ 1 new	2	
Total drum(s) on site:	9	0	0	2	2	
Are the drum(s) properly labeled?	Y	—	—	Yes	Y	
Drum ID & Contents:	Purgewater	—	—	purgewater	"	
If any drum(s) are partially or totally filled, what is the first use date:	3/20/07			NA		

- If you add any SPH to an empty or partially filled drum, drum must have at least 20 gals. of Purgewater or DI Water.

-If drum contains SPH, the drum MUST be steel AND labeled with the appropriate label. Contact Russ Fuller for drum access (925) 963-6086

-All BTS drums MUST be labeled appropriately.

STATUS OF DRUM(S) UPON DEPARTURE

Date	4/9/07	6/15/07	9/27/07	12/18/07	3/4/08	
Number of drums empty:						
Number of drum(s) 1/4 full:					<¼ (1)	
Number of drum(s) 1/2 full:	1	1				
Number of drum(s) 3/4 full:						
Number of drum(s) full:	8	1	2	2	2	
Total drum(s) on site:	9	2	2	2	3	
Are the drum(s) properly labeled?	Y	Y	Y	Yes	Y	
Drum ID & Contents:	Purgewater	purge water	purge water	purgewater	"	

LOCATION OF DRUM(S)

Describe location of drum(s): East of MW-1 near trailer

9/27/07 - near the Honda Racing Team garage → E. of site in Storage enclosure on just offsite, Contact Russ.

FINAL STATUS

Number of new drum(s) left on site this event	0	2	2	0	1	
Date of inspection:	4/9/07	6/15/07	9/27/07	12/18/07	3/4/08	
Drum(s) labelled properly:	Y	Y	Y	Yes	Yes	
Logged by BTS Field Tech:	MW	MW	MW	MW	MW	
Office reviewed by:	MW	MW	MW	DV		

TEST EQUIPMENT CALIBRATION LOG

PROJECT NAME Dolan Trust				PROJECT NUMBER 080304-MN1			
EQUIPMENT NAME	EQUIPMENT NUMBER	DATE/TIME OF TEST	STANDARDS USED	EQUIPMENT READING	CALIBRATED TO: OR WITHIN 10%:	TEMP.	INITIALS
YSI 556	05K1408	3/4/08 0700	pH 4.0 7.0 10.0	4.05 7.0 10.01	Y	~~16~~ 16°C	mn
"	"	"	Cond 3900	3879	Y	"	mn
"	"	"	ORP 244 @ 15°C	246	Y	"	mn

WELLHEAD INSPECTION CHECKLIST

Date 3/4/08 Client Blymyer Eng.

Site Address 6393 Scarlett Ct., Dublin

Job Number 080304-MN1 Technician Mike N

Well ID	Well Inspected - No Corrective Action Required	Water Bailed From Wellbox	Wellbox Components Cleaned	Cap Replaced	Debris Removed From Wellbox	Lock Replaced	Other Action Taken (explain below)	Well Not Inspected (explain below)
MW-1		X						
MW-3	X							
MW-4 *	X	X						
MW-5	X							
MW-6	*	X						
MW-7	X	X						
MW-8	X							
MW-9	X							

NOTES: MW-1 1/2 broken tabs ; MW-6 1/2 broken tabs

* Could not replace entire orc strand in this well due to swelling. Cut off top (3) ORC socks and bagged and labeled and put in to well box for MW-5.

WELL GAUGING DATA

Project # 080304-MN1 Date 3/4/08 Client Ryanger Eng.

Site Ddan Trust - 6393 Scarlett Ct., Dublin

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	Notes
MW-1	0900	2		N/A	N/A	N/A	3.96	20.92		GO
MW-3	0945	2					3.95	17.75		GO
MW-4	0951	2					3.33	18.35		S/ORC
MW-5	0934	2					4.68	12.07		S
MW-6	0942	2					3.65	9.00		GO
MW-7	0905	2					3.15	39.80		GO
MW-8	0957	4					3.69	20.55		S/ORC
MW-9	0955	4					3.95	20.80	TOC	S/ORC
	—	MW-9	ORC	Pulled	0910					
	—	MW-8 & MW-9	ORC	Pulled	0915					

LOW FLOW WELL MONITORING DATA SHEET

Project #: 080304-MN1	Client: Blymyer @ Dolan Trust
Sampler: MDN	Date: 3/4/08
Well I.D.: MW-4	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth: 18.35	Depth to Water Pre: 3.33 Post: 3.55
Depth to Free Product: N/A	Thickness of Free Product (feet): N/A
Referenced to: (PVC) Grade	Flow Cell Type: YSI 556

Purge Method: 2" Grundfos Pump ☒ Peristaltic Pump Bladder Pump
Sampling Method: Dedicated Tubing ☒ New Tubing Other ____

Flow Rate: ~200 ml/min Pump Depth: ~10'

Time	Temp. (°C or °F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	D.O. (mg/L)	ORP (mV)	Water Removed (gals. or (mL))	Observations
1020	16.10	6.99	2742	66	4.73	217.5	Initial	Clear
1023	16.24	7.42	2709	51	3.69	184	600 ml	DTW = 3.55
1026	16.37	7.43	2695	45	3.27	172.1	1200	DTW = 3.55
1029	16.42	7.41	2691	39	3.19	166.0	1800	DTW = 3.55
1032	16.47	7.40	2701	43	2.93	159.9	2400	DTW = 3.55
* Post purge, obtained @ pump depth.							* Fe^{+2} =	ϕ

Did well dewater? Yes (No) Amount actually evacuated: 2400 ml

Sampling Time: 1038 Sampling Date: 3/4/08

Sample I.D.: MW-4 Laboratory: McCampbell

Analyzed for: (TPH-G) (BTEX) (MTBE) (TPH-D) Other:

Equipment Blank I.D.: N/A @ Time Duplicate I.D.: N/A

LOW FLOW WELL MONITORING DATA SHEET

Project #: 080304-MN1	Client: Blymyer @ Dolan Trust
Sampler: MDN	Date: 3/4/08
Well I.D.: MW-5	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth: 12.07	Depth to Water Pre: 4.68 Post:
Depth to Free Product: N/A	Thickness of Free Product (feet): N/A
Referenced to: (PVC) Grade	Flow Cell Type: YSI 556

Purge Method: 2" Grundfos Pump ☒ Peristaltic Pump Bladder Pump
Sampling Method: Dedicated Tubing ☒ New Tubing Other ____

Flow Rate: 300 ml/min Pump Depth: ~7'

Time	Temp. (°C or °F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	D.O. (mg/L)	ORP (mV)	Water Removed (gals. or mL)	Observations
1232	18.82	7.52	3321	6	2.76	89.2	Initial	clear
1235	17.15	7.46	3415	4	.97	59.4	900	DTW=5.62
1238	17.17	7.50	3413	4	1.40	43.7	1800	DTW=5.70
1241	17.42	7.52	3414	3	1.84	27.0	2700	DTW=5.80
1244	17.95	7.50	3416	3	.89	4.6	3600	DTW=5.88
1247	17.96	7.49	3421	2	.84	~~5.2~~	4500	DTW=5.94
1250	17.90	7.49	3422	3	.81	.9	5400	DTW=5.99
* Post purge, obtained @ pump depth.							* Fe^{+2} =	∅

Did well dewater? Yes (No) Amount actually evacuated:

Sampling Time: 1255 Sampling Date: 3/4/08

Sample I.D.: MW-5 Laboratory: McCampbell

Analyzed for: (TPH-G) (BTEX) (MTBE) (TPH-D) Other:

Equipment Blank I.D.: N/A @ Time Duplicate I.D.: N/A

LOW FLOW WELL MONITORING DATA SHEET

Project #: 080304-MN1	Client: Blymyer @ Dolan Twist
Sampler: MDN	Date: 3/4/08
Well I.D.: MW-8	Well Diameter: 2 3 (4) 6 8 ____
Total Well Depth: 20.55	Depth to Water Pre: 3.69 Post:
Depth to Free Product: N/A	Thickness of Free Product (feet): N/A
Referenced to: (PVC) Grade	Flow Cell Type: YSI 556

Purge Method: 2" Grundfos Pump ☒ Peristaltic Pump Bladder Pump
Sampling Method: Dedicated Tubing ☒ New Tubing Other ____

Flow Rate: ~ 250ml/min Pump Depth: ~ 11'

Time	Temp. (°C or °F)	pH	Cond. (mS or (µS))	Turbidity (NTUs)	D.O. (mg/L)	ORP (mV)	Water Removed (gals. or mL)	Observations
~~1105~~ 1159	17.96	10.49	1707	59	5.03	90.8	Initial	
1108	17.29	10.62	1682	51	4.33	74.2	750	DTW = 3.69
1111	17.31	10.66	1671	38	4.04	64.5	1500	DTW = 3.69
1114	17.28	10.66	1665	35	3.75	56.0	2250	DTW = 3.69
1117	17.28	10.64	1661	32	3.65	51.9	3000	DTW = 3.69
1120	17.30	10.64	1651	30	3.50	49.1	3750	DTW = 3.69
* Post purge, obtained @ pump depth.							* Fe^{+2} =	Ø

Did well dewater? Yes (No)	Amount actually evacuated: 3750
Sampling Time: 1125	Sampling Date: 3/4/08
Sample I.D.: MW-8	Laboratory: McCampbell
Analyzed for: (TPH-G) (BTEX) (MTBE) (TPH-D)	Other:
Equipment Blank I.D.: N/A @ Time	Duplicate I.D.: N/A

LOW FLOW WELL MONITORING DATA SHEET

Project #: 080304-MN1	Client: Blymyer @ Dolan Mall
Sampler: MDM	Date: 3/4/08
Well I.D.: MW-9	Well Diameter: 2 3 (4) 6 8 ____
Total Well Depth: 20.80	Depth to Water Pre: 3.95 Post:
Depth to Free Product: N/A	Thickness of Free Product (feet): N/A
Referenced to: (PVC) Grade	Flow Cell Type: YSI 556

Purge Method: 2" Grundfos Pump ☒ Peristaltic Pump Bladder Pump
Sampling Method: Dedicated Tubing ☒ New Tubing Other ____

Flow Rate: 250 ml/min Pump Depth: ~11'

Time	Temp. (°C or °F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	D.O. (mg/L)	ORP (mV)	Water Removed (gals. or mL)	Observations
1150	18.90	10.86	1750	35	4.61	92.3	Initial	
1153	18.35	10.98	1727	28	3.61	48.9	750	DTW=3.90
1156	18.84	10.93	1719	21	3.39	33.9	1500	DTW=3.90
1159	18.75	10.91	1716	18	3.19	22.7	2250	DTW=3.90
1201	18.80	10.90	1706	20	3.15	11.0	3000	DTW=3.90
1204	18.83	10.91	1704	17	3.11	9.1	3750	DTW=3.90
1207	18.87	10.91	1704	15	3.12	8.7	4500	DTW=3.90
* Post purge, obtained @ pump depth.							* Fe^{+2} =	∅

Did well dewater? Yes (No) Amount actually evacuated: 4500 ml

Sampling Time: 1212 Sampling Date: 3/4/08

Sample I.D.: MW-9 Laboratory: McCampbell

Analyzed for: (TPH-G) (BTEX) (MTBE) (TPH-D) Other:

Equipment Blank I.D.: N/A @ Time Duplicate I.D.: N/A

Appendix C

Analytical Laboratory Report
McCampbell Analytical, Inc.
Dated March 13, 2008

McCampbell Analytical, Inc.
"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

Blymyer Engineers, Inc. 1829 Clement Avenue Alameda, CA 94501-1395	Client Project ID: Dolan Rentals	Date Sampled: 03/04/08
		Date Received: 03/05/08
	Client Contact: Mark Detterman	Date Reported: 03/13/08
	Client P.O.:	Date Completed: 03/13/08

WorkOrder: 0803099

March 13, 2008

Dear Mark:

Enclosed within are:

1) The results of the **4** analyzed samples from your project: **Dolan Rentals,**
2) A QC report for the above samples,
3) A copy of the chain of custody, and
4) An invoice for analytical services.

All analyses were completed satisfactorily and all QC samples were found to be within our control limits.

If you have any questions or concerns, please feel free to give me a call. Thank you for choosing

McCampbell Analytical Laboratories for your analytical needs.

Best regards,

Angela Rydelius
Laboratory Manager
McCampbell Analytical, Inc.

0803099 BelA

BLAINE
TECH SERVICES, INC.

1680 ROGERS AVENUE
SAN JOSE, CALIFORNIA 95112-1105
FAX (408) 573-7771
PHONE (408) 573-0555

CHAIN OF CUSTODY BTS # 080304-MN1

CLIENT: Blymyer Engineers, Inc.

SITE: Dolan Rentals
6393 Scarlett Ct.
Dublin, CA

CONDUCT ANALYSIS TO DETECT

LAB: McCampbell | DHS #

ALL ANALYSES MUST MEET SPECIFICATIONS AND DETECTION LIMITS SET BY CALIFORNIA DHS AND
☐ EPA ☐ RWQCB REGION _____
☐ LIA
☐ OTHER

SPECIAL INSTRUCTIONS

Invoice and Report to : Blymyer Engineers, Inc.
Attn: Mark Detterman
EDF Format Required.
mdetterman@blymyer.com 510.521.3773 office

SAMPLE I.D.	DATE	TIME	MATRIX S= SOIL W=H_2O	CONTAINERS TOTAL		C = COMPOSITE ALL CONTAINERS	TPH-G (8015M)	BTEX & MTBE (8021B)	TPH-D w/Silica gel clean up (8015M)	ADD'L INFORMATION	STATUS	CONDITION	LAB SAMPLE #
MW-4	3/4/08	1038	W	4	3 HCL VOA 1 HCL AMBER		X	X	X				
MW-5	3/4/08	1255	W	4	3 HCL VOA 1 HCL AMBER		X	X	X				
MW-8	3/4/08	1125	W	4	3 HCL VOA 1 HCL AMBER		X	X	X				
MW-9	3/4/08	1212	W	4	3 HCL VOA 1 HCL AMBER		X	X	X				

ICE / t° 1012 ✓
GOOD CONDITION ___
HEAD SPACE ABSENT ___
DECHLORINATED IN LAB ___
APPROPRIATE CONTAINERS ✓
PRESERVED IN LAB ___
PRESERVATION: VOAS | O & G | METALS | OTHER

SAMPLING COMPLETED	DATE	TIME	SAMPLING PERFORMED BY	RESULTS NEEDED NO LATER THAN
	3/4/08	1400	Michael Ninokata	As contracted

RELEASED BY	DATE	TIME	RECEIVED BY	DATE	TIME
Michael Ninokata	3/4/08	1515	(Sample Custodian)	3/4/08	1575
	3/5/08	1355		3/5/08	1355
			Patty Stockton	3/5/08	520

SHIPPED VIA	DATE SENT	TIME SENT	COOLER #	
				K. BURKS 3/5/08 6:25

McCampbell Analytical, Inc.
1534 Willow Pass Rd
Pittsburg, CA 94565-1701
(925) 252-9262

CHAIN-OF-CUSTODY RECORD

WorkOrder: 0803099 **ClientCode: BEIA**

☐ WriteOn ☑ EDF ☐ Excel ☐ Fax ☑ Email ☐ HardCopy ☐ ThirdParty ☐ J-flag

Report to:
Mark Detterman
Blymyer Engineers, Inc.
1829 Clement Avenue
Alameda, CA 94501-1395

Email: MDetterman@blymyer.com
TEL: (510) 521-3773 FAX: (510) 865-2594
PO:
ProjectNo: Dolan Rentals

Bill to:
Accounts Payable
Blymyer Engineers, Inc.
1829 Clement Avenue
Alameda, CA 94501-1395

Requested TAT: 5 days

Date Received: **03/05/2008**
Date Printed: **03/05/2008**

Lab ID	Client ID	Matrix	Collection Date	Hold	Requested Tests (See legend below)											
					1	2	3	4	5	6	7	8	9	10	11	12
0803099-001	MW-4	Water	3/4/2008 10:38	☐	A	A	B									
0803099-002	MW-5	Water	3/4/2008 12:55	☐	A		B									
0803099-003	MW-8	Water	3/4/2008 11:25	☐	A		B									
0803099-004	MW-9	Water	3/4/2008 12:12	☐	A		B									

Test Legend:

1	G-MBTEX_W	2	PREDF REPORT	3	TPH(D)WSG_W	4		5	
6		7		8		9		10	
11		12							

Prepared by: Kimberly Burks

Comments:

NOTE: Soil samples are discarded 60 days after results are reported unless other arrangements are made (Water samples are 30 days).
Hazardous samples will be returned to client or disposed of at client expense.

McCampbell Analytical, Inc.
"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

Sample Receipt Checklist

Client Name: **Blymyer Engineers, Inc.**
Date and Time Received: **3/5/2008 6:37:30 PM**

Project Name: **Dolan Rentals**
Checklist completed and reviewed by: Kimberly Burks

WorkOrder N°: **0803099** Matrix Water
Carrier: ultra x

Chain of Custody (COC) Information

Chain of custody present?	Yes ☑	No ☐
Chain of custody signed when relinquished and received?	Yes ☑	No ☐
Chain of custody agrees with sample labels?	Yes ☑	No ☐
Sample IDs noted by Client on COC?	Yes ☑	No ☐
Date and Time of collection noted by Client on COC?	Yes ☑	No ☐
Sampler's name noted on COC?	Yes ☑	No ☐

Sample Receipt Information

Custody seals intact on shipping container/cooler?	Yes ☐	No ☐	NA ☑
Shipping container/cooler in good condition?	Yes ☑	No ☐	
Samples in proper containers/bottles?	Yes ☑	No ☐	
Sample containers intact?	Yes ☑	No ☐	
Sufficient sample volume for indicated test?	Yes ☑	No ☐	

Sample Preservation and Hold Time (HT) Information

All samples received within holding time?	Yes ☑	No ☐	
Container/Temp Blank temperature	Cooler Temp: 6.2°C		NA ☐
Water - VOA vials have zero headspace / no bubbles?	Yes ☑	No ☐	No VOA vials submitted ☐
Sample labels checked for correct preservation?	Yes ☑	No ☐	
TTLC Metal - pH acceptable upon receipt (pH<2)?	Yes ☐	No ☐	NA ☑

Client contacted: Date contacted: Contacted by:

Comments:

McCampbell Analytical, Inc.
"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

Blymyer Engineers, Inc.	Client Project ID: Dolan Rentals	Date Sampled: 03/04/08
1829 Clement Avenue		Date Received: 03/05/08
Alameda, CA 94501-1395	Client Contact: Mark Detterman	Date Extracted: 03/07/08-03/12/08
	Client P.O.:	Date Analyzed 03/07/08-03/12/08

Gasoline Range (C6-C12) Volatile Hydrocarbons as Gasoline with BTEX and MTBE*

Extraction method SW5030B Analytical methods SW8021B/8015Cm Work Order: 0803099

Lab ID	Client ID	Matrix	TPH(g)	MTBE	Benzene	Toluene	Ethylbenzene	Xylenes	DF	% SS
001A	MW-4	W	180,a	ND	0.60	3.7	ND	ND	1	94
002A	MW-5	W	ND	ND	ND	ND	ND	ND	1	80
003A	MW-8	W	95,a	ND	1.1	ND	0.61	1.3	1	113
004A	MW-9	W	91,a	ND	2.0	ND	1.1	1.9	1	105

Reporting Limit for DF =1; ND means not detected at or above the reporting limit	W	50	5.0	0.5	0.5	0.5	0.5	1	µg/L
	S	NA	NA	NA	NA	NA	NA	1	mg/Kg

* water and vapor samples and all TCLP & SPLP extracts are reported in ug/L, soil/sludge/solid samples in mg/kg, wipe samples in µg/wipe, product/oil/non-aqueous liquid samples in mg/L.

cluttered chromatogram; sample peak coelutes with surrogate peak.

+The following descriptions of the TPH chromatogram are cursory in nature and McCampbell Analytical is not responsible for their interpretation: a) unmodified or weakly modified gasoline is significant; b) heavier gasoline range compounds are significant(aged gasoline?); c) lighter gasoline range compounds (the most mobile fraction) are significant; d) gasoline range compounds having broad chromatographic peaks are significant; biologically altered gasoline?; e) TPH pattern that does not appear to be derived from gasoline (stoddard solvent / mineral spirit?); f) one to a few isolated non-target peaks present; g) strongly aged gasoline or diesel range compounds are significant; h) lighter than water immiscible sheen/product is present; i) liquid sample that contains greater than ~1 vol. % sediment; j) reporting limit raised due to high MTBE content; k) TPH pattern that does not appear to be derived from gasoline (aviation gas). m) no recognizable pattern; n) TPH(g) range non-target isolated peaks subtracted out of the TPH(g) concentration at the client's request; p) see attached narrative.

DHS ELAP Certification N° 1644

Angela Rydelius, Lab Manager

McCampbell Analytical, Inc.
"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

Blymyer Engineers, Inc.	Client Project ID: Dolan Rentals	Date Sampled: 03/04/08
1829 Clement Avenue		Date Received: 03/05/08
Alameda, CA 94501-1395	Client Contact: Mark Detterman	Date Extracted: 03/05/08
	Client P.O.:	Date Analyzed 03/07/08

Diesel Range (C10-C23) Extractable Hydrocarbons with Silica Gel Clean-Up*

Extraction method SW3510C/3630C Analytical methods SW8015C Work Order: 0803099

Lab ID	Client ID	Matrix	TPH(d)	DF	% SS
0803099-001B	MW-4	W	ND	1	117
0803099-002B	MW-5	W	ND	1	118
0803099-003B	MW-8	W	ND	1	115
0803099-004B	MW-9	W	ND	1	116

Reporting Limit for DF =1; ND means not detected at or above the reporting limit	W	50	µg/L
	S	NA	NA

* water samples are reported in µg/L, wipe samples in µg/wipe, soil/solid/sludge samples in mg/kg, product/oil/non-aqueous liquid samples in mg/L, and all DISTLC / STLC / SPLP / TCLP extracts are reported in µg/L.

cluttered chromatogram resulting in coeluted surrogate and sample peaks, or; surrogate peak is on elevated baseline, or; surrogate has been diminished by dilution of original extract/matrix interference.

+The following descriptions of the TPH chromatogram are cursory in nature and McCampbell Analytical is not responsible for their interpretation: a) unmodified or weakly modified diesel is significant; b) diesel range compounds are significant; no recognizable pattern; c) aged diesel? is significant); d) gasoline range compounds are significant; e) unknown medium boiling point pattern that does not appear to be derived from diesel; f) one to a few isolated peaks present; g) oil range compounds are significant; h) lighter than water immiscible sheen/product is present; i) liquid sample that contains greater than ~1 vol. % sediment; k) kerosene/kerosene range; l) bunker oil; m) fuel oil; n) stoddard solvent/mineral spirit; p) see attached narrative.

DHS ELAP Certification N° 1644

Angela Rydelius, Lab Manager

McCampbell Analytical, Inc.
"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

QC SUMMARY REPORT FOR SW8021B/8015Cm

W.O. Sample Matrix: Water QC Matrix: Water WorkOrder 0803099

EPA Method SW8021B/8015Cm **Extraction SW5030B** **BatchID: 34175** **Spiked Sample ID: 0803080-010A**

Analyte	Sample	Spiked	MS	MSD	MS-MSD	LCS	LCSD	LCS-LCSD	Acceptance Criteria (%)			
	µg/L	µg/L	% Rec.	% Rec.	% RPD	% Rec.	% Rec.	% RPD	MS / MSD	RPD	LCS/LCSD	RPD
TPH(btex)£	ND	60	91.8	85.9	6.71	80.9	75.5	6.98	70 - 130	20	70 - 130	20
MTBE	ND	10	102	97.1	4.70	97	94.5	2.53	70 - 130	20	70 - 130	20
Benzene	ND	10	92.5	94.8	2.49	104	98.9	5.05	70 - 130	20	70 - 130	20
Toluene	ND	10	84.9	86.6	1.96	101	99.3	2.07	70 - 130	20	70 - 130	20
Ethylbenzene	ND	10	93.7	95.2	1.64	102	97.1	5.21	70 - 130	20	70 - 130	20
Xylenes	ND	30	92.2	90.7	1.59	95	90.6	4.75	70 - 130	20	70 - 130	20
%SS:	91	10	96	97	1.10	109	104	4.49	70 - 130	20	70 - 130	20

All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:

NONE

BATCH 34175 SUMMARY

Lab ID	Date Sampled	Date Extracted	Date Analyzed	Lab ID	Date Sampled	Date Extracted	Date Analyzed
0803099-001A	03/04/08 10:38 AM	03/12/08	03/12/08 2:31 PM	0803099-002A	03/04/08 12:55 PM	03/07/08	03/07/08 7:32 AM
0803099-003A	03/04/08 11:25 AM	03/07/08	03/07/08 10:41 PM	0803099-004A	03/04/08 12:12 PM	03/07/08	03/07/08 11:12 PM

MS = Matrix Spike; MSD = Matrix Spike Duplicate; LCS = Laboratory Control Sample; LCSD = Laboratory Control Sample Duplicate; RPD = Relative Percent Deviation.

% Recovery = 100 * (MS-Sample) / (Amount Spiked); RPD = 100 * (MS - MSD) / ((MS + MSD) / 2).

MS / MSD spike recoveries and / or %RPD may fall outside of laboratory acceptance criteria due to one or more of the following reasons: a) the sample is inhomogenous AND contains significant concentrations of analyte relative to the amount spiked, or b) the spiked sample's matrix interferes with the spike recovery.

£ TPH(btex) = sum of BTEX areas from the FID.

cluttered chromatogram; sample peak coelutes with surrogate peak.

DHS ELAP Certification N° 1644

QA/QC Officer

McCampbell Analytical, Inc.
"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

QC SUMMARY REPORT FOR SW8015C

W.O. Sample Matrix: Water QC Matrix: Water WorkOrder 0803099

EPA Method SW8015C **Extraction SW3510C/3630C** **BatchID: 34086** **Spiked Sample ID: N/A**

Analyte	Sample	Spiked	MS	MSD	MS-MSD	LCS	LCSD	LCS-LCSD	Acceptance Criteria (%)			
	µg/L	µg/L	% Rec.	% Rec.	% RPD	% Rec.	% Rec.	% RPD	MS / MSD	RPD	LCS/LCSD	RPD
TPH(d)	N/A	1000	N/A	N/A	N/A	103	104	0.770	N/A	N/A	70 - 130	30
%SS:	N/A	2500	N/A	N/A	N/A	98	98	0	N/A	N/A	70 - 130	30

All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:

NONE

BATCH 34086 SUMMARY

Lab ID	Date Sampled	Date Extracted	Date Analyzed	Lab ID	Date Sampled	Date Extracted	Date Analyzed
0803099-001B	03/04/08 10:38 AM	03/05/08	03/07/08 12:13 AM	0803099-002B	03/04/08 12:55 PM	03/05/08	03/07/08 1:19 AM
0803099-003B	03/04/08 11:25 AM	03/05/08	03/07/08 2:26 AM	0803099-004B	03/04/08 12:12 PM	03/05/08	03/07/08 3:33 AM

MS = Matrix Spike; MSD = Matrix Spike Duplicate; LCS = Laboratory Control Sample; LCSD = Laboratory Control Sample Duplicate; RPD = Relative Percent Deviation.

% Recovery = 100 * (MS-Sample) / (Amount Spiked); RPD = 100 * (MS - MSD) / ((MS + MSD) / 2).

MS / MSD spike recoveries and / or %RPD may fall outside of laboratory acceptance criteria due to one or more of the following reasons: a) the sample is inhomogenous AND contains significant concentrations of analyte relative to the amount spiked, or b) the spiked sample's matrix interferes with the spike recovery.

N/A = not enough sample to perform matrix spike and matrix spike duplicate.

NR = analyte concentration in sample exceeds spike amount for soil matrix or exceeds 2x spike amount for water matrix or sample diluted due to high matrix or analyte content.