

## Plunkett, Steven, Env. Health

---

**From:** Mark Detterman [MDetterman@blymyer.com]  
**Sent:** Friday, June 06, 2008 1:47 PM  
**To:** Plunkett, Steven, Env. Health  
**Subject:** Good Chevrolet RO0008: Proposed Well Locations  
**Attachments:** Figures 2 to 9 DRAFT.pdf; Good Chevy SI Tables.pdf; Bore Logs GP1 to GP24.pdf

Steven,


Welcome back! Now it's time to find your desk!

As I believe we had previously briefly discussed, Blymyer Engineers wanted to informally forward information gathered at the site over the last several months in order to start a discussion regarding the selection of well locations at the site. Part of the intent is to limit the number of reports generated. As was discussed in the workplan, revisions, and ACEHD communications that accepted the final scope of work, a minimum of two additional wells would be required based on the results of the initial phase of subsurface investigation. I've attached PDF copies of all tabulated data, figures, and bore logs generated from the recent work at the site. Cross sections have not been generated pending installation of the monitoring wells under discussion.

On "Figure 9," Blymyer Engineers has proposed locations for two wells based on the attached data. Understanding that you may have other suggestions, please give me a call to discuss the data, have any questions, or need further details.

Best,

*Mark Detterman*  
*Senior Geologist PG, CEG*  
[mdetterman@blymyer.com](mailto:mdetterman@blymyer.com)  
*Blymyer Engineers, Inc.*  
*1829 Clement Ave.*  
*Alameda, CA 94501*  
*Direct: 510.747.3068*  
*Office: 510.521.3773*  
*800.753.3773*  
*Fax: 510.865.2594*



**BLYMYER**  
ENGINEERS, INC.

Soil Bore Log: GP1


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 29, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16.0 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ▽ 7.5 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
1					Pale yellowish brown (10YR 6/3) SILTY SAND, fine grained; damp.		SM		
2					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; damp.				
3									
4		0					SM		
5									
6									
7									
8		394		GP1-7.5					
9				GP1-8	Light olive brown (2.5Y 5/3) CLAYEY SAND; fine grained; slight petroleum odor; very moist to wet.		SC		
10					Light olive brown (2.5YR 5/3) SILTY SAND; fine grained; with 15% clay; very moist to wet.		SM		
11		630							
12				GP1-11.5	Grades pale olive (5Y 6/3); moderate color; tight; wet.				
13		247					SM		
14									
15				GP1-15	Yellow brown (10YR 5/4) SILTY SAND; fine grained; no odor; wet.		SM		
16					Bottom of bore: 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP1.bor

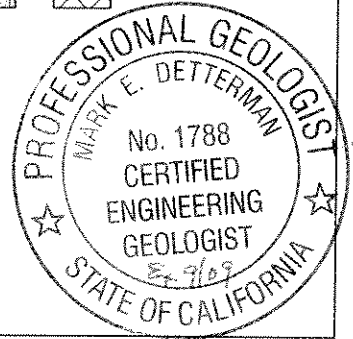



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP2


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 29, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16.0 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input checked="" type="checkbox"/> Unrecovered	▼ ▼ 7.5 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
1					Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained; damp.				
2									
3									
4							SM		
5									
6									
7				GP2-6.5					
8		0			Yellowish brown (10YR 5/6) SILTY SAND; fine grained; with clay; wet.		SM		
9					Yellowish brown (10YR 5/6) SILTY SAND; fine grained; with clay; wet.		SM		
10									
11				GP2-11	Olive brown (2.5Y 4/3); SILTY SAND; fine grained; very moist to wet.		SM		
12		10			Yellowish brown (10YR 5/4) SILTY SAND; fine grained; no odor; wet.				
13		0		GP2-13			SM		
14									
15					As above		SM		
16					Bottom of bore: 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Alameda\Bore Logs\GP2\_bor

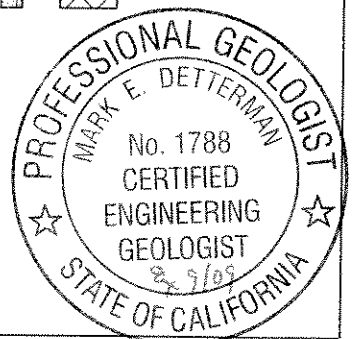



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP3


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 29, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16.0 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.0 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
1					Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained; damp.		SM		
2									
3					Very dark yellowish brown (10YR 2/2) SILTY SAND, fine grained; humus rich organics; damp.		SM		
4					Dark yellowish brown (10YR 3/4) SILTY SAND; fine grained; damp.		SM		
5					As above; hard / firm.		SM		
6					Dark yellowish brown (10YR 3/4) CLAYEY SAND; fine grained; with silt; moist.		SC		
7		0		GP3-6.75	Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained; moist to wet.				∇
8									
9									
10							SM		
11		0							
12				GP3-11.5					
13									
14					As above.				
15		0					SM		
16					Bottom of bore: 16 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP3.bor

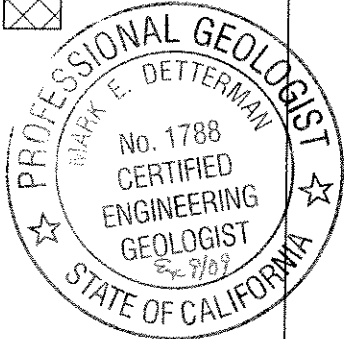



**BLYMYER**  
ENGINEERS, INC.

Soil Bore Log: GP4


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 29, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20.0 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.0 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
1					Brownish yellow (10YR 6/8) crushed rock (FILL)		GW		
2					Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained; damp.		SM		
3					Very dark grayish brown (10YR 2/2) SILTY SAND, fine grained; damp.		SM		
4	4				Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained; damp.		SM		
5							SM		
6							SM		
7				GP4-6.75					∇
8	38								
9					Olive brown (2.5Y 4/3) to Dark yellowish brown (10YR 3/4) CLAYEY SAND to CLAYEY SILT to SILTY SAND; fine grained; interbedded wet.		SC		
10					Olive (5Y 5/3) SILTY SAND, fine grained, with traces of clay, wet.		SM		
11	57			GP4-11.5			SM		
12							SM		
13					Olive (5Y 5/3) SAND; fine grained; with silt; very loose to flowing; wet.		SP		
14				GP4-14.5			SM		
15					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; wet.		SM		
16							SM		
17	8			GP4-17			SP		
18					Very loose to flowing SAND, alternating with stiffer CLAYEY SAND (2 to 4 inch layers), wet (potentially not in place).		SP		
19							SM		
20					As above; increased silt content; firming.		SM		
21					Bottom of bore: 20 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore\_Logs\GP4.bor

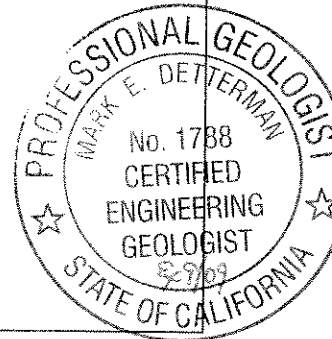



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP5


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 29, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20.0 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input checked="" type="checkbox"/> Unrecovered	▼ ▽ 7.75 feet			
DESCRIPTION									
0							Asphalt		
0-1							GW		
1-2									
2-4		0					SM		
4-6									
6-8							SC		
8-9		10			GP5-7.5		ML		
9-10							SM		
10-11									
11-12		652			GP5-11.5		SM		
12-14									
14-15		424					SM		
15-16									
16-17							SM		
17-18									
18-19							SM		
19-20					GP5-19		SM		
20-21									

Bottom of bore: 20 feet

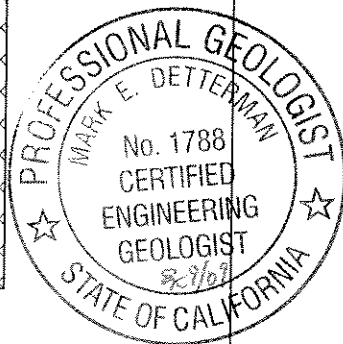



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP6


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 29, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20.0 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
0.5					Brownish yellow (10YR 6/8) crushed rock (FILL)		GW		
1					Very dark brown (10YR 2/2) SILTY SAND, fine grained; damp.		SM		
2									
3					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; damp.				
4							SM		
5									
6									
7		2.4							
8				GP6-7.5	Light olive brown (2.5Y 5/3) CLAYEY SAND; fine grained sand (50%); very moist to wet.		SC		∇
9					Light olive brown (2.5Y 5/3) SILTY SAND, fine grained, wet.		SM		
10									
11				GP6-11	Black staining at 11 to 12 ft bgs.				
12		808							
13							SM		
14									
15									
16					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; wet.		SM		
17					Potentially SLUFF: Olive (5Y 4/4) SILTY SAND, wet; flowing, (in place??)		SM		
18									
19		289			Depth interval for PID bag sample - uncertain.				
20							SM		
21					Bottom of bore: 20 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda Bore Logs\GP6.bor

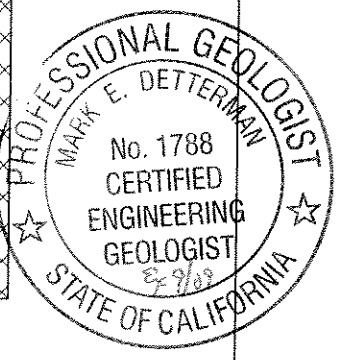



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP7


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 30, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 24.5 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ▽ 7.75 feet			
DESCRIPTION									
0							Asphalt		
1					4-inch section asphalt				
2					Dark yellowish brown (10YR 3/4) SILTY SAND, fine to medium grained; damp.		SM		
3					Grades lighter				
4							SM		
5									
6									
7									
8	404			GP7-8	Dark yellowish brown (10YR 3/4) CLAYEY SAND; fine grained sand (50%); very moist to wet.		SC		▽
9					Dark gray (5Y 4/1) SILTY SAND, fine grained, petroleum odor; dark staining in top 1 to 2 ft; wet.				
10									
11									
12							SM		
13									
14									
15	493								
16					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; very loose to flowing, wet.		SM		
17					Grades medium to fine grained; flowing to very loose; wet.		SM		
18					Firms at 17 ft.		SM		
19					Very loose to flowing 18 to 20 ft.		SM		
20	3			GP7-19.5	Firms at 20 ft.		SM		
21					Very loose to flowing 21 to 22 ft.		SM		
22									
23					Yellowish brown (10YR 5/4) SILTY SAND, fine to medium grained; loose; wet.		SM		
24	8			GP7-23.5					
25					Bottom of Bore: 24.5 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP7.bcr

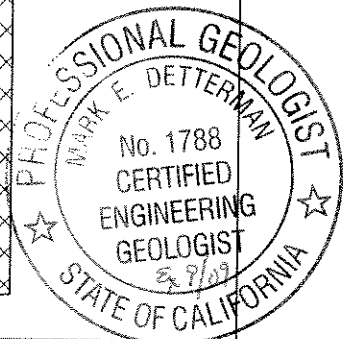





**BLYMYER**  
ENGINEERS, INC.

Soil Bore Log: GP8


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 1, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input checked="" type="checkbox"/> Unrecovered	▼ ∇ 7.5 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
1					Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained; damp.		SM		
2							SM		
3							SM		
4					Grades yellowish brown (10YR 5/4)		SM		
5							SM		
6							SM		
7					Yellowish brown (10YR 5/4) SANDY CLAY; fine grained sand (50%); moist.		SC		
8					Olive (5Y 4/3) SILTY SAND, fine grained, petroleum odor; wet.		SM		
9	883			GP8-8.5	Yellowish brown (10YR 5/4) SILTY SAND, fine grained; wet.		SM		
10					Olive (5Y 4/3) SILTY SAND, fine grained; wet.		SM		
11							SM		
12							SM		
13		2,153					SM		
14					As above, fine grained; flowing, wet (10% recovery 12 to 16 ft; Uncertain depth for PID bag sample).		SM		
15							SM		
16							SM		
17					Olive SILTY SAND, fine grained; very loose to flowing; wet (in place?)		SM		
18							SM		
19		582			Firms at 19 ft.		SM		
20				GP8-19.5	Yellowish brown SILTY SAND, fine grained; wet; firmer.		SM		
21					Bottom of Bore: 20 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore\_Logs\GP8.bor

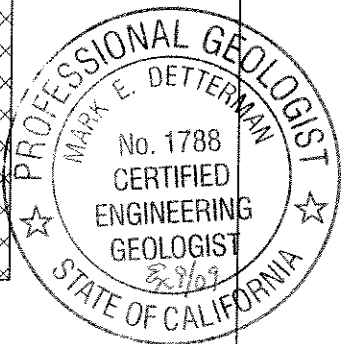



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP9


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 1, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0									
0 - 0.5					6-inch section asphalt				
0.5 - 7.75					Dark yellowish brown (10YR 3/4) SILTY SAND, fine to medium grained; dry at top; increasing moisture with depth.		SM		
7.75 - 11.25		0		GP9-7.5	Dark yellowish brown (10YR 3/4) CLAYEY SAND, fine grained; with silt; moist to very moist.		SC		
11.25 - 15.5		2		GP9-11.25	Olive (5Y 4/3) SILTY SAND, fine grained, very slight petroleum odor; wet.		SM		
15.5 - 16		0		GP9-15.5	Yellowish brown (10YR 5/4) SILTY SAND, fine grained; wet.		SM		
16					Bottom of Bore: 16 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet\_Pilume\_Define\_Alameda\Bore\_Logs\GP9.bor

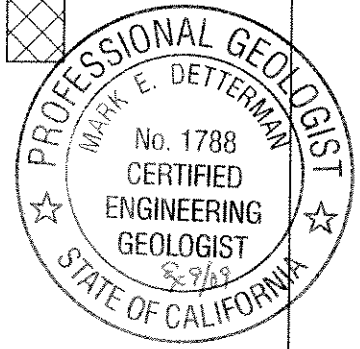



**BLYMYER**  
ENGINEERS, INC.


### Soil Bore Log: GP10

Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 30, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.5 feet			
DESCRIPTION									
0									
0-1					6-inch section asphalt				
1-4					Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained; to SANDY SILT; dry.		SM		
4-7	0				Grades yellowish brown (10YR 5/4); damp.		SM		
7-8					Olive (5YR 4/3) SILTY SAND, fine to medium grained; with trace clay; strong petroleum odor; very moist to wet.		SM		
8-11	29			GP10-7.5	Olive (5Y 4/3) SAND, fine grained; with silt; strong odor; wet.		SP		
11-12					Olive (5Y 4/3) SILTY SAND, fine grained, strong odor; wet.		SM		
12-13					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; wet		SM		
13-15					Yellowish brown (10YR 5/4) SANDY CLAY; fine grained; wet.		SC		
15-16	10				Olive (5Y 4/3) SILTY SAND, fine grained, wet. (In place?)		SM		
16-18				GP10-15.5	Yellowish brown (10YR 5/4) SILTY SAND, fine grained; very loose; wet (mottled with olive at top - may be sluff).		SM		
18-19					Firmer at 18.5 ft.; in place.		SM		
19-20	33						SM		
20				GP10-19.5					
Bottom of Borehole 20 feet									

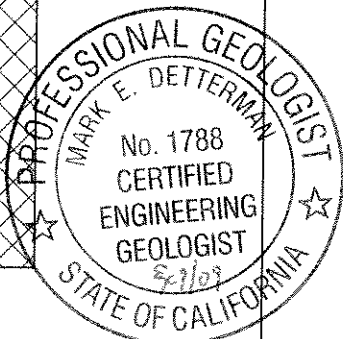

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP10.bor



**BLYMYER**  
ENGINEERS, INC.


### Soil Bore Log: GP11

Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 30, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.5 feet			
DESCRIPTION									
0									
0-1					6-inch section asphalt				
1-2					Yellowish brown (10YR 5/4) SILTY SAND, fine to medium grained, damp.	SM			
2-3					Dark yellowish brown (10YR 3/4) CLAYEY SAND, fine grained; with silt; damp.	SC			
3-4					Yellowish brown (10YR 5/4) SILTY SAND, fine to medium grained; damp.	SM			
4-6									
6-7				GP11-6	Olive (5YR 4/3) SILTY SAND, fine to medium grained; damp.	SM			
7-8					Olive (5Y 4/3) CLAYEY SAND, fine to medium grained; with silt; moist.	SC			
8-9	769			GP11-8	Olive (5Y 4/3) SILTY SAND, fine to medium grained; wet.	SM			
9-10					Olive (5Y 4/3) CLAYEY SAND, fine grained, strong petroleum odor; wet.	SC			
10-11					Olive (5Y 4/3) SILTY SAND, fine to medium grained; strong odor; wet.	SM			
11-12	746				Olive (5Y 4/3) CLAYEY SAND, fine grained, wet,	SC			
12-13				GP11-11.5	Olive (5Y 4/3) SILTY SAND, fine to medium grained; strong odor; wet.	SM			
13-15					Olive (5YR 4/3) SILTY SAND, fine grained; wet.	SM			
15-16	1,282				Very loose to flowing between 14.5 and 15.5 ft.				
16-17				GP11-15.5		SM			
17-18					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; very loose to flowing; wet.	SM			
18-19	946			GP11-18	Stiffer; minor clay.	SM			
19-20									
20-21					Bottom of Borehole 20 feet				

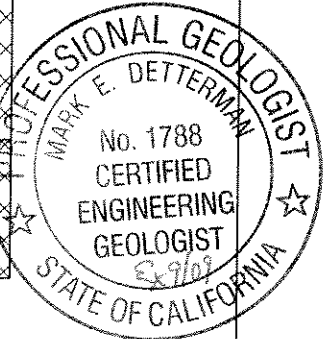

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP11.bor



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP12


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 30, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0					6-inch section asphalt				
1					Dark yellowish brown (10YR 3/4) SILTY SAND, fine to medium grained, damp.		SM		
2									
3									
4		0							
5					Yellowish brown (10YR 5/4) SILTY SAND, fine to medium grained; damp.		SM		
6									
7									
8		1,864		GP12-7.5	Yellowish brown (10YR 5/4) CLAYEY SAND, fine grained, very moist to wet.		SC		∇
9					Olive (5Y 4/3) SILTY SAND, fine grained, strong petroleum odor; wet.		SM		
10									
11		206		GP12-11					
12					Olive (5Y 4/3) SAND, fine to medium grained, trace silt; wet.		SP		
13					Very fine grained; loose to flowing.		SP		
14					As before. Sheen in water noticed at 13 ft; source uncertain.		SM		
15					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; wet.		SM		
16				GP12-15.5	Bottom of Borehole 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP12.bor

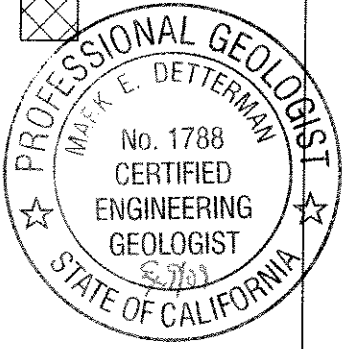



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP13


Good Chevrolet  
1630 Park Street  
Alameda, California


Job Number: : 207055  
Date Drilled: : April 30, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input checked="" type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0					6-inch section asphalt				
1					Dark yellowish brown (10YR 3/4) SILTY SAND, fine grained, damp.		SM		
2									
3					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; damp.		SM		
4									
5									
6									
7	0								
8				GP13-7.25	Olive brown (2.5YR 4/3) SAND, fine to medium grained, 10% clay; very moist to wet.		SC		
9					Olive (5Y 4/3) SILTY SAND, fine to medium grained, very moist / wet.		SM		
10									
11	183			GP13-11					
12					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; very loose to flowing; wet.		SP		
13									
14	3.5			GP13-14					
15									
16					Bottom of Borehole 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP13.bor

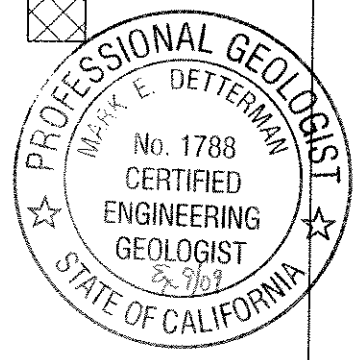



**BLYMYER**  
ENGINEERS, INC.


### Soil Bore Log: GP14

Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 30, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0							Asphalt		
1					Dark yellowish brown (10YR 3/4) SILTY SAND, fine to medium grained, damp.				
2							SM		
3									
4					Yellowish brown (10YR 5/6) SILTY SAND, fine grained; damp.		SM		
5					Yellowish brown (10YR 5/6) SILTY CLAY, 40% fine grained sand, stiff; moist.		CL		
6									
7					Yellowish brown (10YR 5/6) CLAYEY SAND, fine grained; moist to wet.				
8		0		GP14-7.5			SC		
9									
10									
11		15		GP14-11	Olive (5Y 5/3) SILTY SAND, fine grained, very loose, odor, wet.		SM		
12					Yellowish brown (10YR 5/4) SILTY SAND, fine grained; very loose to flowing; wet.				
13							SM		
14		0		GP14-14					
15					No Recovery				
16					Bottom of Borehole 16 feet				
17									
18									
19									
20									
21									

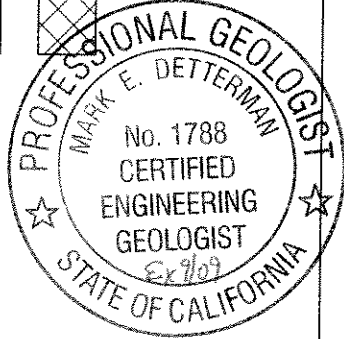

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP14.bor



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP15


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : April 30, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez


Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0							Asphalt		
1					6-inch section asphalt				
2					Dark yellowish brown (10YR 4/4) SILTY SAND, fine grained, damp.		SM		
3									
4					Yellowish brown (10YR 5/6) SILTY SAND, fine grained; damp.		SM		
5									
6									
7		0							
8				GP15-7.5	Yellowish brown (10YR 5/6) SILTY CLAY, 40% fine grained sand, stiff; very moist.		CL		∇
9					Yellowish brown (10Y 5/6) SILTY SAND, fine grained, wet.				
10									
11		0					SM		
12				GP15-11.5					
13									
14					Yellowish brown (10YR 5/6) SILTY SAND, fine grained; very loose; wet.		SM		
15		0							
16					Grey (10YR 5/1) SILTY SAND, fine grained, wet.		SM		
17					As before.		SM		
18					Bottom of Borehole 16 feet				
19									
20									
21									

05-19-2006 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP15.bor

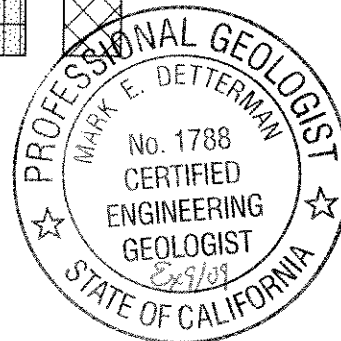



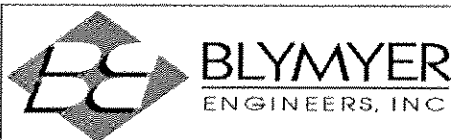

# Soil Bore Log: GP16


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 1, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input checked="" type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0							Asphalt		
1					6-inch section asphalt				
2					Dark yellowish brown (10YR 4/4) SILTY SAND, fine grained, dry.		SM		
3									
4					Yellowish brown (10YR 5/6) SILTY SAND, 70% fine grained; damp.		SM		
5					Decrease in sand content to approximately 50%.				
6									
7									
8				3	GP16-7.5		SM		∇
9									
10				0	GP16--10.5				
11					As above; several 2 - 3 inch thick very loose to flowing layers at 11 - 12 ft; wet.				
12									
13							SM		
14									
15				0					
16					Bottom of Borehole 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP16 bor

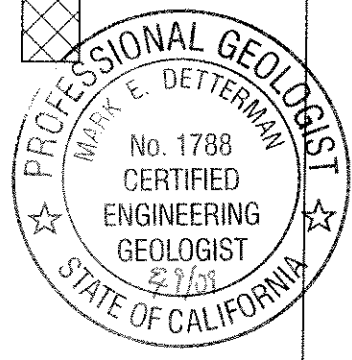



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP17


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 1, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input checked="" type="checkbox"/> Unrecovered	▼ ▽ 8.25 feet			
DESCRIPTION									
0					6-inch section asphalt		Asphalt		
1					Dark yellowish brown (10YR 4/4) SILTY SAND, fine grained, dry.		SM		
2									
3									
4					Yellowish brown (10YR 5/6) SILTY SAND, 50% sand; fine grained; dry to damp.		SM		
5					Yellowish brown (10YR 5/6) SILTY CLAY, 25% fine grained sand, damp.		CL		
6									
7									
8		0		GP17-7.5					▽
9					Light olive brown (2.5Y 5/3) SILTY SAND, fine grained, wet.		SM		
10									
11		0		GP17-11.5					
12					Several very loose layers 2 - 3 inches thick.		SM		
13									
14									
15									
16					Bottom of Borehole 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP17.bor

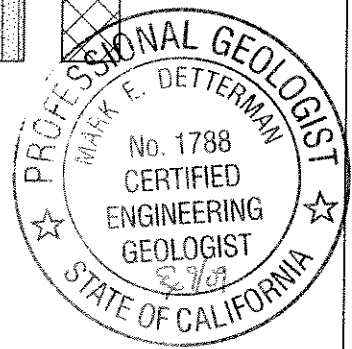



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP18


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 1, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ▼ 8.0 feet			
DESCRIPTION									
0					6-inch section asphalt		Asphalt		
1					Dark yellowish brown (10YR 4/4) SILTY SAND, fine to medium grained, dry.		SM		
2									
3					Yellowish brown (10YR 5/6) SILTY SAND, 50% sand; fine grained; dry.		SM		
4									
5									
6									
7		0							
8				GP18-7.5	Yellowish brown (10YR 5/6) CLAYEY SAND, fine grained; 30% clay; very moist to wet.		SC		▼
9					Light olive brown (2.5Y 5/3) SILTY SAND, fine grained, wet.		SM		
10		0		GP18-10					
11					Several very loose layers 2 - 3 inches thick.		SM		
12									
13									
14				GP18-14	As above.		SM		
15									
16					Bottom of Borehole 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobis\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP18.bor

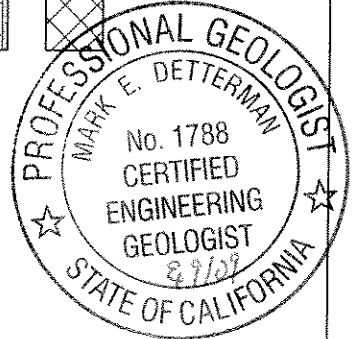



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP19


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 1, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0							Asphalt		
1					6-inch section asphalt				
2					Dark yellowish brown (10YR 4/4) SILTY SAND, fine grained, 50% silt; dry.		SM		
3									
4					Yellowish brown (10YR 5/6) SILTY SAND, 50% sand; fine grained; dry.		SM		
5									
6									
7					Yellowish brown (10YR 5/6) CLAYEY SAND, fine grained; 30% clay; very moist to wet.		SC		
8	0			GP19-7	Yellowish brown (10YR 5/6) SILTY SAND, fine grained, wet.		SM		∇
9									
10					Very loose 9.5 to 15 ft.				
11	0								
12							SM		
13									
14									
15	0								
16					Firms at 15 ft; more silt.		SM		
17					Bottom of Borehole 16 feet				
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP19.bor

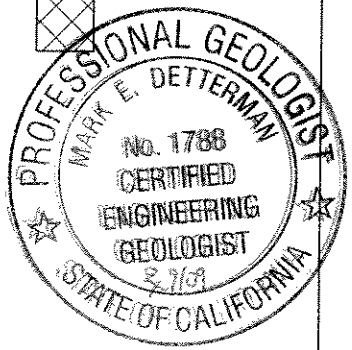



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP20


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 1, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0							Asphalt		
1					Dark yellowish brown (10YR 4/4) SILTY SAND, fine grained, 50% silt; dry.		SM		
2									
3									
4					Yellowish brown (10YR 5/6) SILTY SAND, 50% sand; fine grained; dry.		SM		
5					Yellowish brown (10YR 5/6) CLAYEY SAND, fine grained; 30% clay; very moist to wet.		SC		
6									
7		0			Damp at 7 ft.		SC		
8		0		GP20-8	Yellowish brown (10YR 5/6) SILTY SAND, fine grained, wet.		SM		∇
9					Slightly grey between 8.5 - 9 ft.		SM		
10									
11					Multiple very loose layers 2 - 3 inches.				
12									
13									
14							SM		
15		0							
16				GP20-15.5	Bottom of Borehole 16 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055\_Good Chevrolet Plume Define Alameda\Bore Logs\GP20 bor

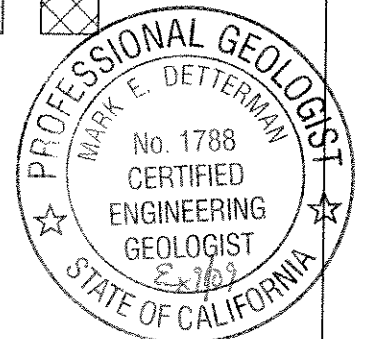



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP21


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 2, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 8.0 feet			
DESCRIPTION									
0					4-inch section concrete.				
1					Dark brown (10YR 3/3) SILTY SAND, fine grained; dry.				
2									
3							SM		
4		0							
5									
6					Yellowish brown (10YR 5/6) SILTY SAND, fine grained; dry.				
7		139					SM		
8				GP21-7.5	Olive (5Y 5/3) SANDY SILT, 30% fine sand; with clay; moist.		ML		
9					Olive (5YR 5/3) SILTY SAND, fine grained, wet.				
10		29							
11				GP21-10.5			SM		
12									
13									
14		606			Olive (5Y 5/3) SANDY SILT, fine grained; wet.		ML		
15					Yellowish brown (10YR 5/6) SILTY SAND, fine grained, wet.				
16				GP21-15.5			SM		
17									
18					Grades into Grey (10YR 5/1) SILTY SAND, fine grained; very loose to flowing; wet.		SM		
19		30							
20				GP21-19.5	Yellowish brown (10YR 5/6) SILTY SAND, fine grained, firm; wet.		SM		
21					Bottom of Borehole 20 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP21 bor

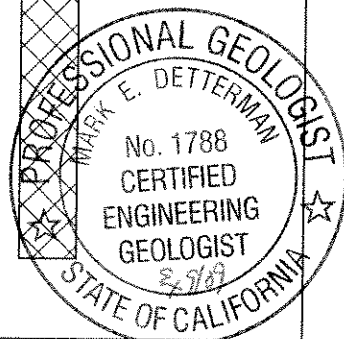



**BLMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP22


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 2, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 16 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.75 feet			
DESCRIPTION									
0					4-inch section concrete				
1					Dark brown (10YR 3/3) SILTY SAND, fine grained, dry.		SM		
2					Dark yellowish brown (10YR 4/4) SILTY SAND, fine grained, dry.		SM		
3					Yellowish brown (10YR 5/6) SILTY SAND, fine grained; dry.				
4	0						SM		
5									
6									
7									
8					Olive (5Y 5/3) CLAYEY SILT, with 20% fine grained sand, wet.				
9							ML		
10									
11	497			GP22-10.5	Yellowish brown (10YR 5/6) SILTY SAND to SANDY SILT, 50% fine grained sand; wet.		SM		
12					Olive SILTY SAND (sluff?), fine grained, loose (sluff?) wet.		SM		
13					Yellowish brown (10YR 5/6) SILTY SAND, fine grained; wet.		SM		
14									
15	6			GP22-15.5					
16					Bottom of Borehole 16 feet				
17									
18									
19									
20									
21									

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP22 bor

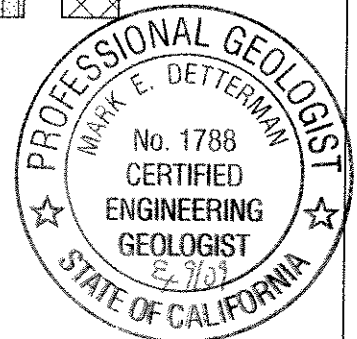



**BLYMYER**  
ENGINEERS, INC.

### Soil Bore Log: GP23


Good Chevrolet  
1630 Park Street  
Alameda, California

Job Number: : 207055  
Date Drilled: : May 2, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez

Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input checked="" type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 8.0 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
1					Dark brown (10YR 3/3) SILTY SAND, fine grained, dry to damp.		SM		
2									
3		0							
4				GP23-3.5					
5					Yellowish brown (10YR 5/6) SILTY SAND, fine grained; damp.		SM		
6									
7									
8		642		GP23-7.5	Yellowish brown (10YR 5/6) SANDY SILT, 20% fine grained sand, tight, very moist to wet.		ML		∇
9					Olive (5Y 5/3) SILTY SAND, wet.		SM		
10					Approx 50% fine sand.		SM		
11					2 inch CLAYEY SILT, layer.				
12		255		GP23-11.5			SM		
13									
14									
15		28			Yellowish brown (10YR 5/6) SILTY SAND, fine grained, wet.		SM		
16				GP23-16	Light olive brown (2.5Y 5/4) SILTY SAND, fine grained, wet.		SM		
17					As above; very loose to flowing.				
18							SM		
19					Yellowish brown (10YR 5/6) SILTY SAND, fine grained, wet.		SM		
20									
21					Bottom of Borehole 20 feet				

05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet Plume Define Alameda\Bore Logs\GP23.bor

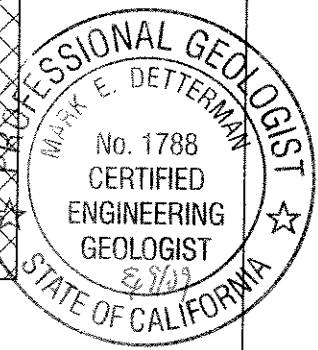





**BLYMYER**  
ENGINEERS, INC.

Soil Bore Log: GP24


Good Chevrolet  
1630 Park Street  
Alameda, California


Job Number: : 207055  
Date Drilled: : May 2, 2008  
Logged By : Mark Detterman  
Drilling Company : Precision Drilling, Inc.  
Driller : Israel Ramirez


Drilling Equipment : Geoprobe  
Sample Method : Continuous sleeve  
Soil Bore Diameter : 1.75-inch  
Total Drilled Depth : 20 feet  
Bore Angle : No

Depth in Feet	Blow Count	PID	Sample Recovery	Sample No.	Sample Recovery	Water Level	USCS	GRAPHIC	(Grouted upon completion)
					<input type="checkbox"/> Collected <input type="checkbox"/> Retained <input type="checkbox"/> Analyzed <input type="checkbox"/> Unrecovered	▼ ∇ 7.0 feet			
DESCRIPTION									
0					4-inch section asphalt		Asphalt		
1					Dark brown (10YR 3/3) SILTY SAND, fine grained, damp.		SM		
2									
3					Grades lighter with depth				
4							SM		
5					Dark yellowish brown (10YR 4/4) SILTY SAND, fine grained; damp.		SM		
6									
7					Yellowish brown (10YR 5/6) SILTY SAND, 60% fine grained sand, wet.		SM		
8					Yellowish brown (10YR 5/6) CLAYEY SILT, 30% fine grained sand, tight, very moist to wet.		ML		
9					Olive (5Y 5/3) SILTY SAND, wet.		SM		
9	1,122			GP24-8.5	Dark greenish-gray (5GY 4/1) SILTY SAND, fine grained, odor; wet. Isolated blobs of dark free phase between 8.5 and 9.0 ft.		SM		
10					Grades darker green at 10 - 11 ft.				
11					Grades back to Olive.				
12									
13									
14	136						SM		
15									
16									
17	136				Rusty brown to yellowish brown (10YR 5/8) SILTY SAND, fine grained, very loose to flowing; wet.				
18									
19							SM		
20	78			GP24-20					
Bottom of Borehole 20 feet									
21									


05-19-2008 H:\Blymyer\_Jobs\2007\207055 Good Chevrolet\Plume Define Alameda\Bore Logs\GP24.bor

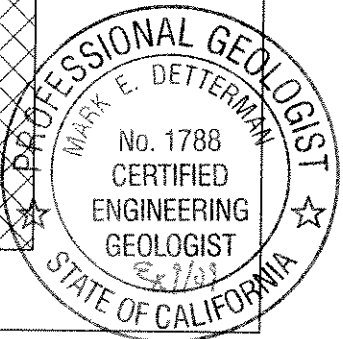

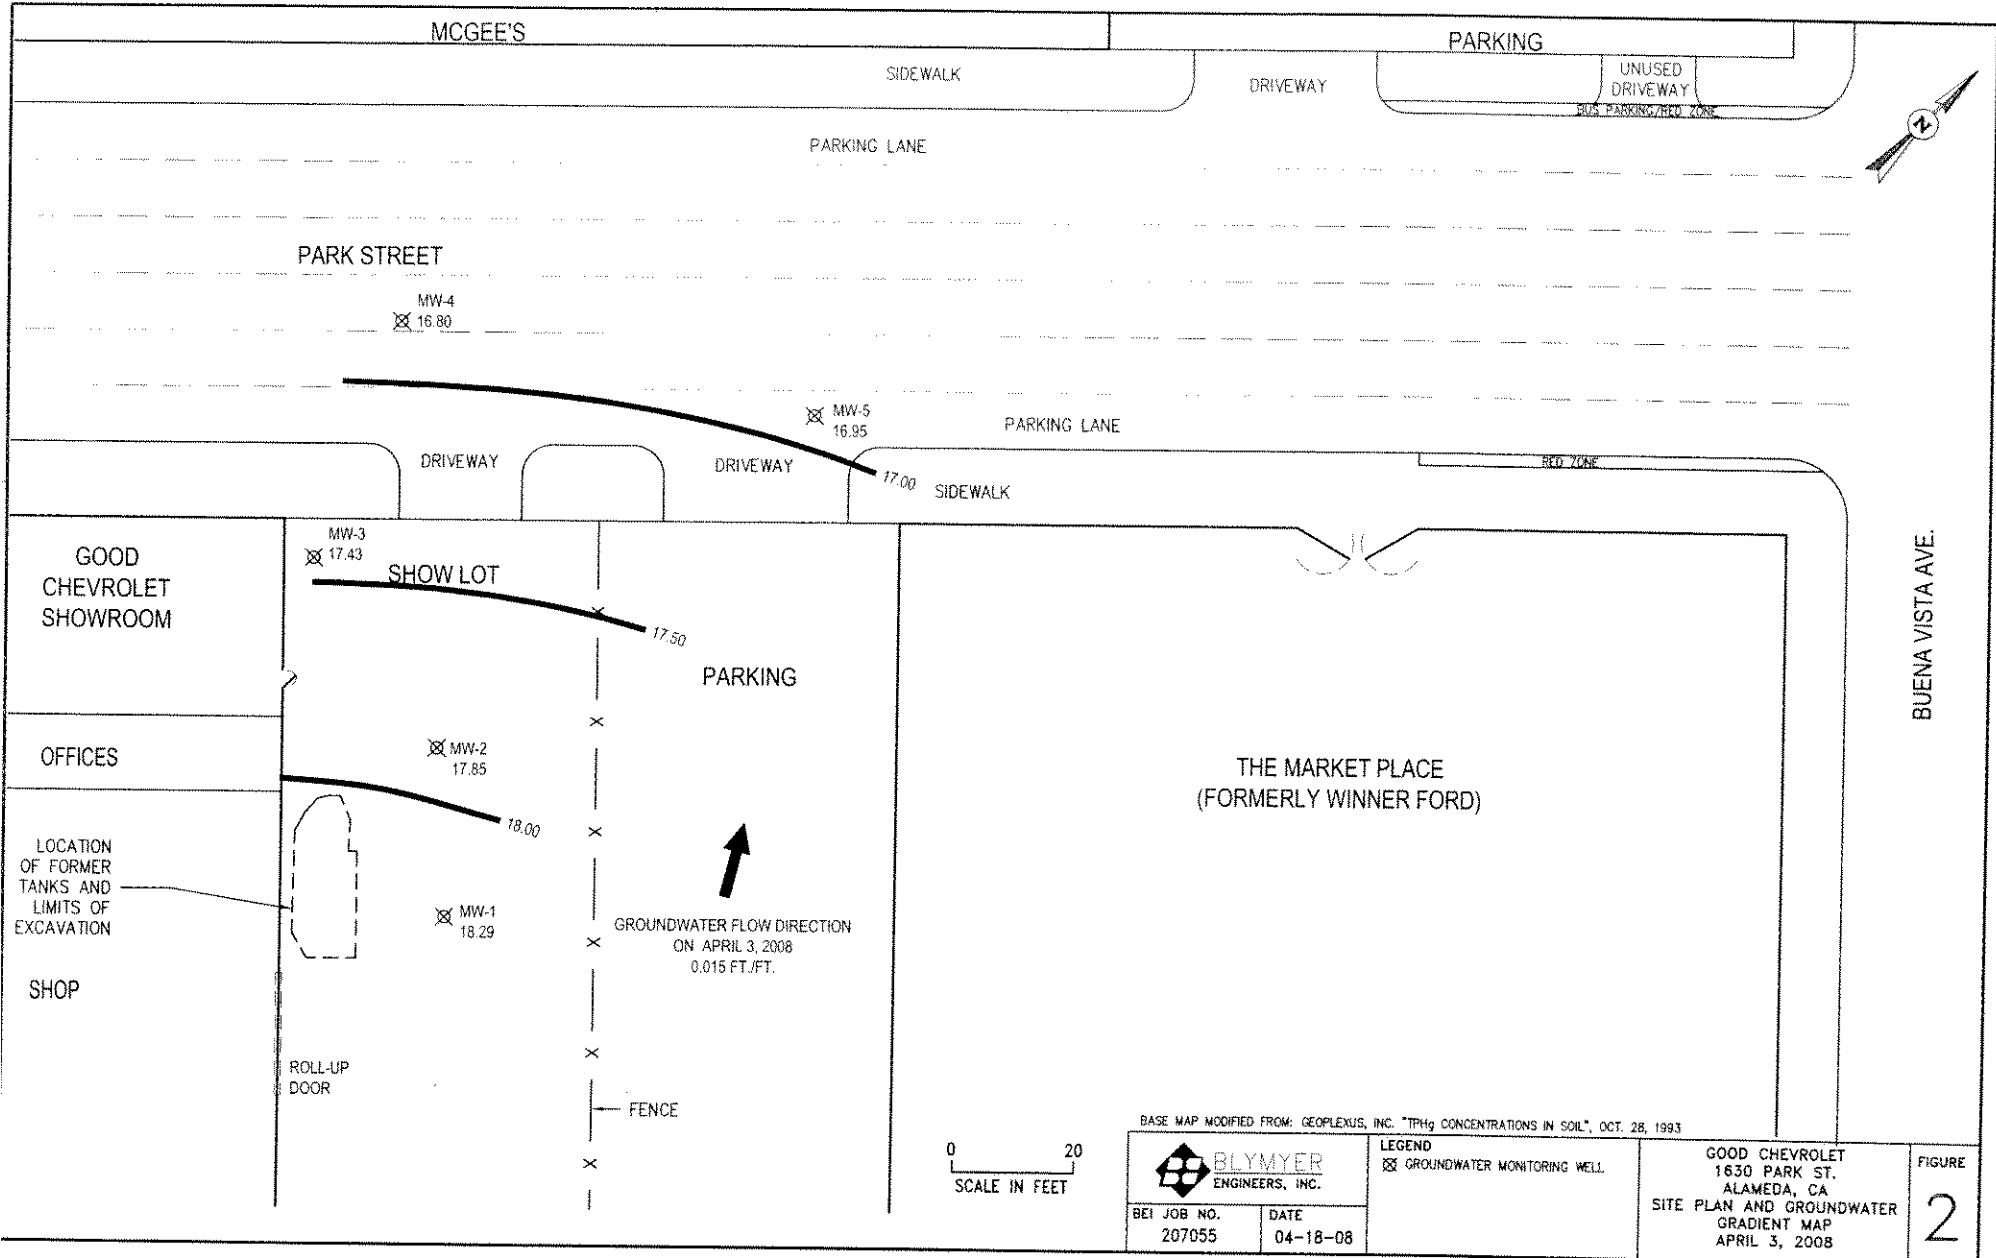

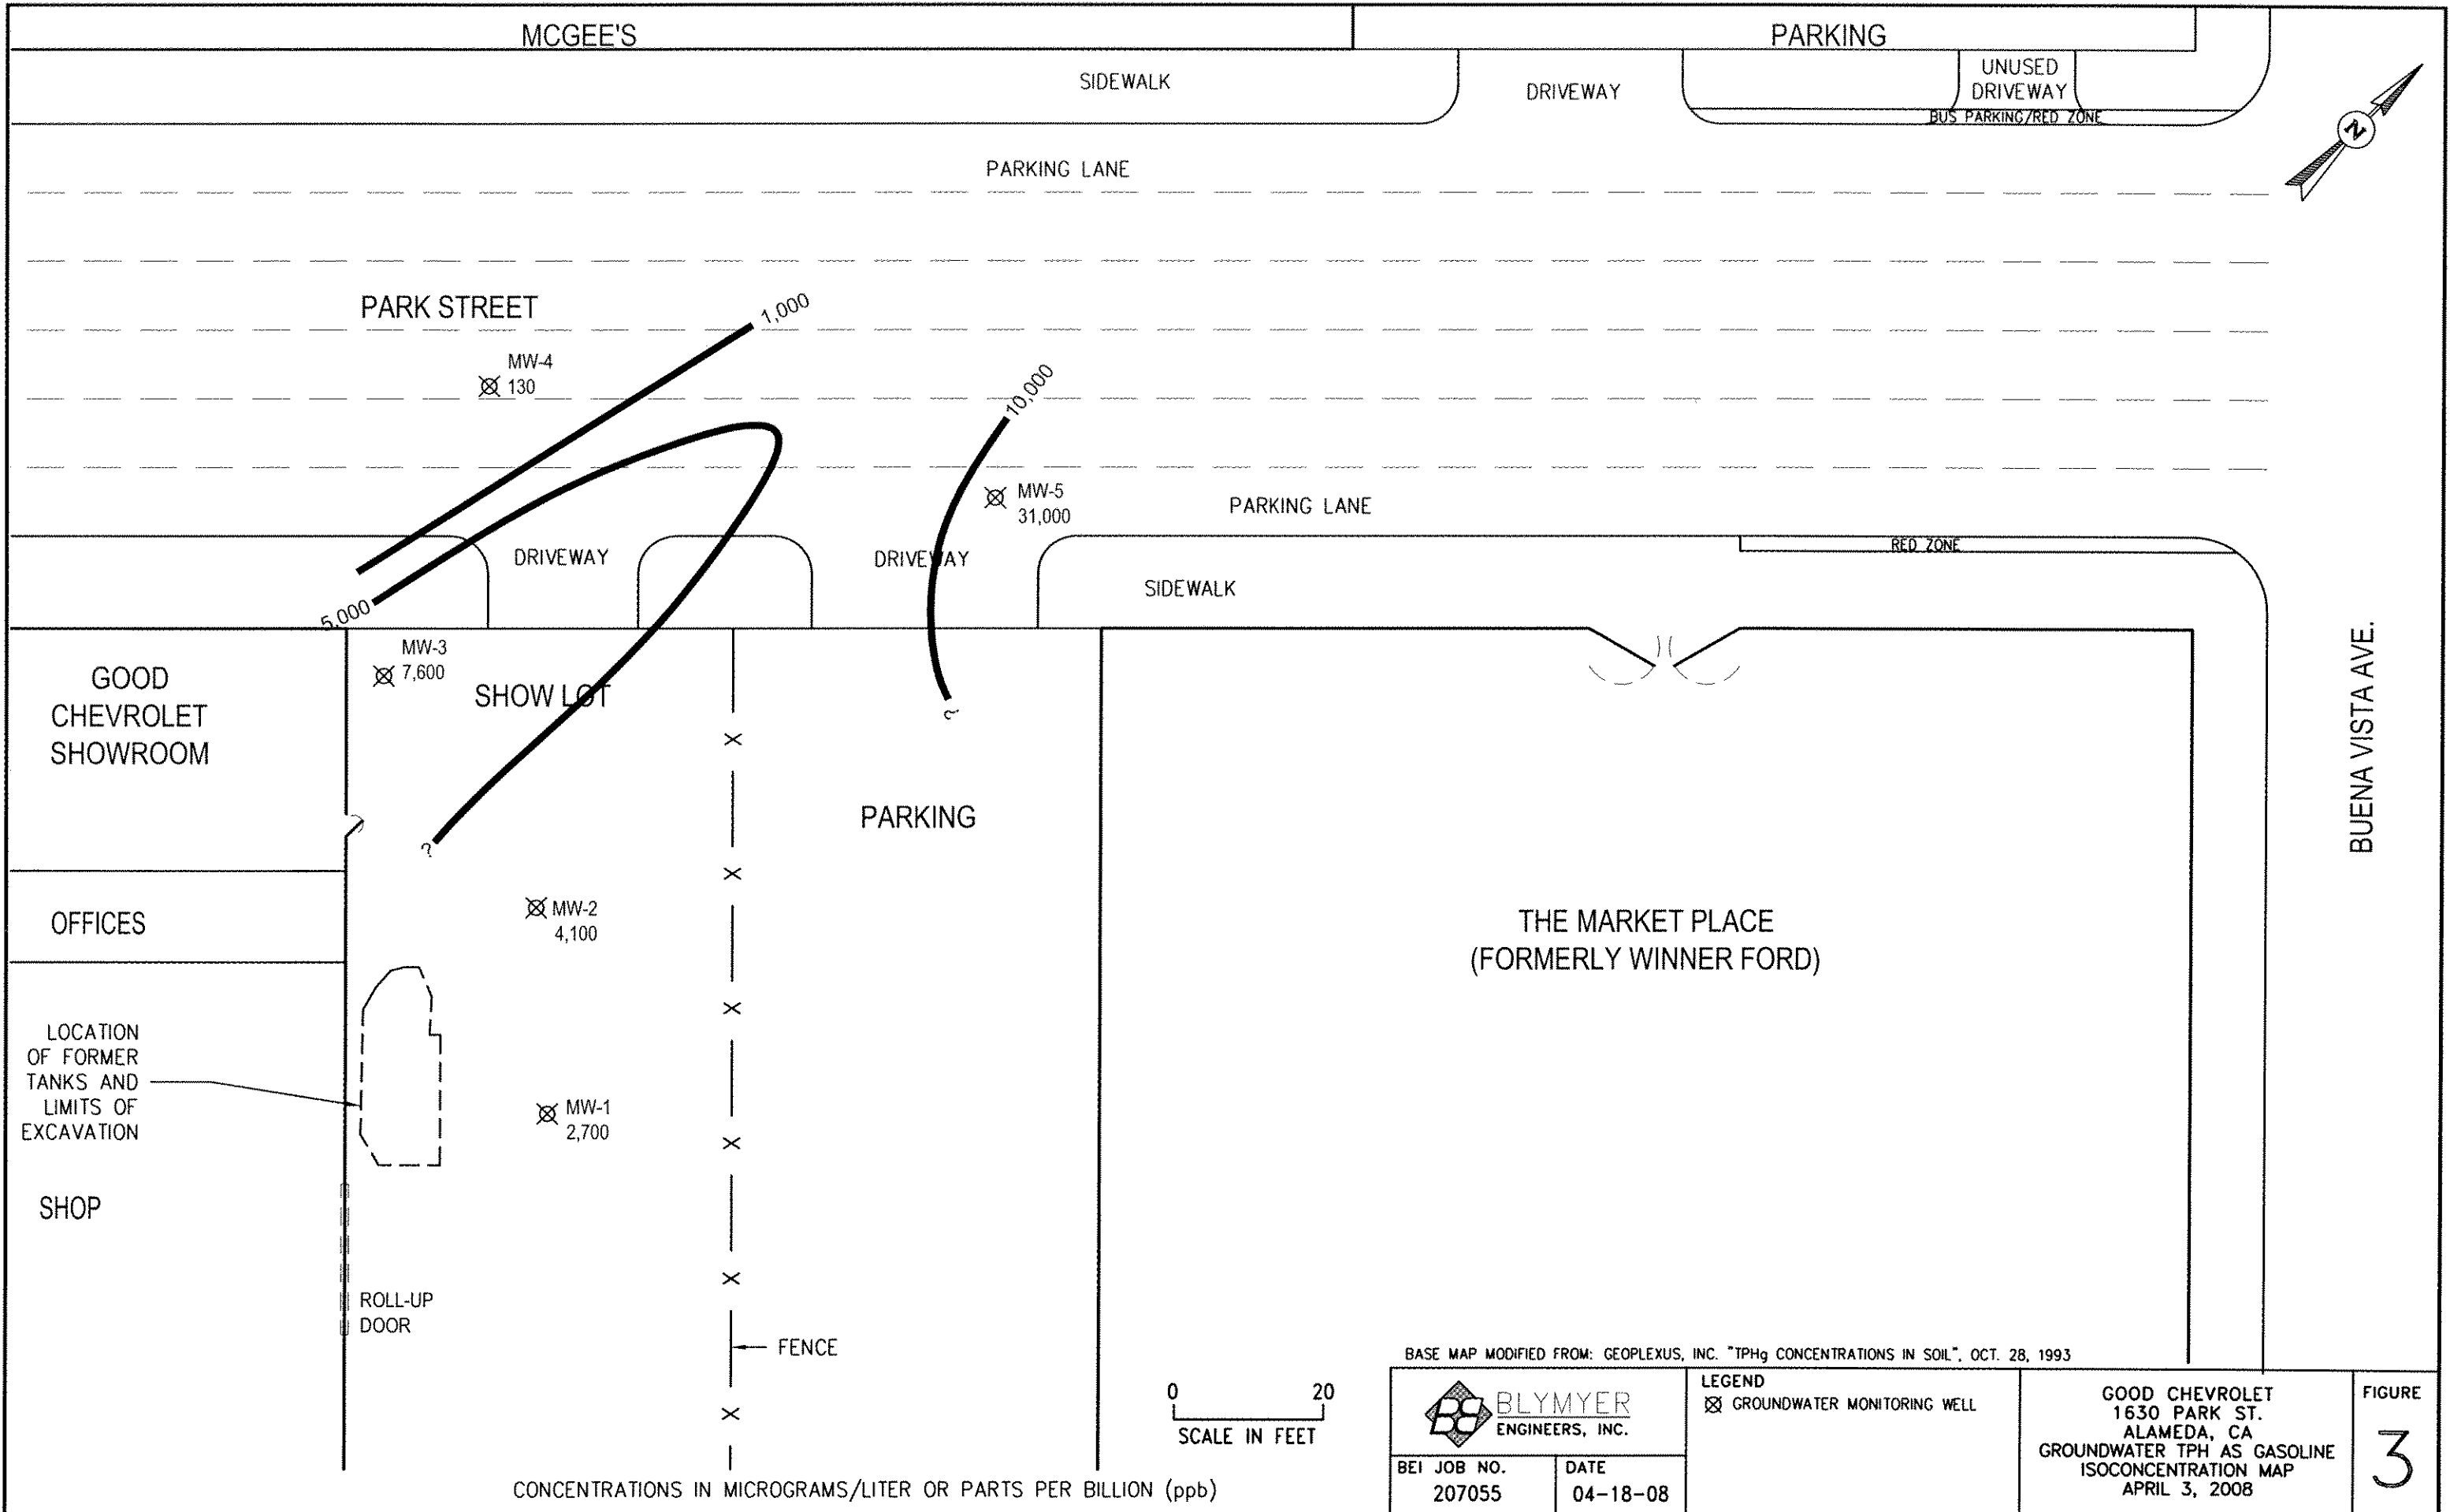

CONCENTRATIONS IN MICROGRAMS/LITER OR PARTS PER BILLION (ppb)

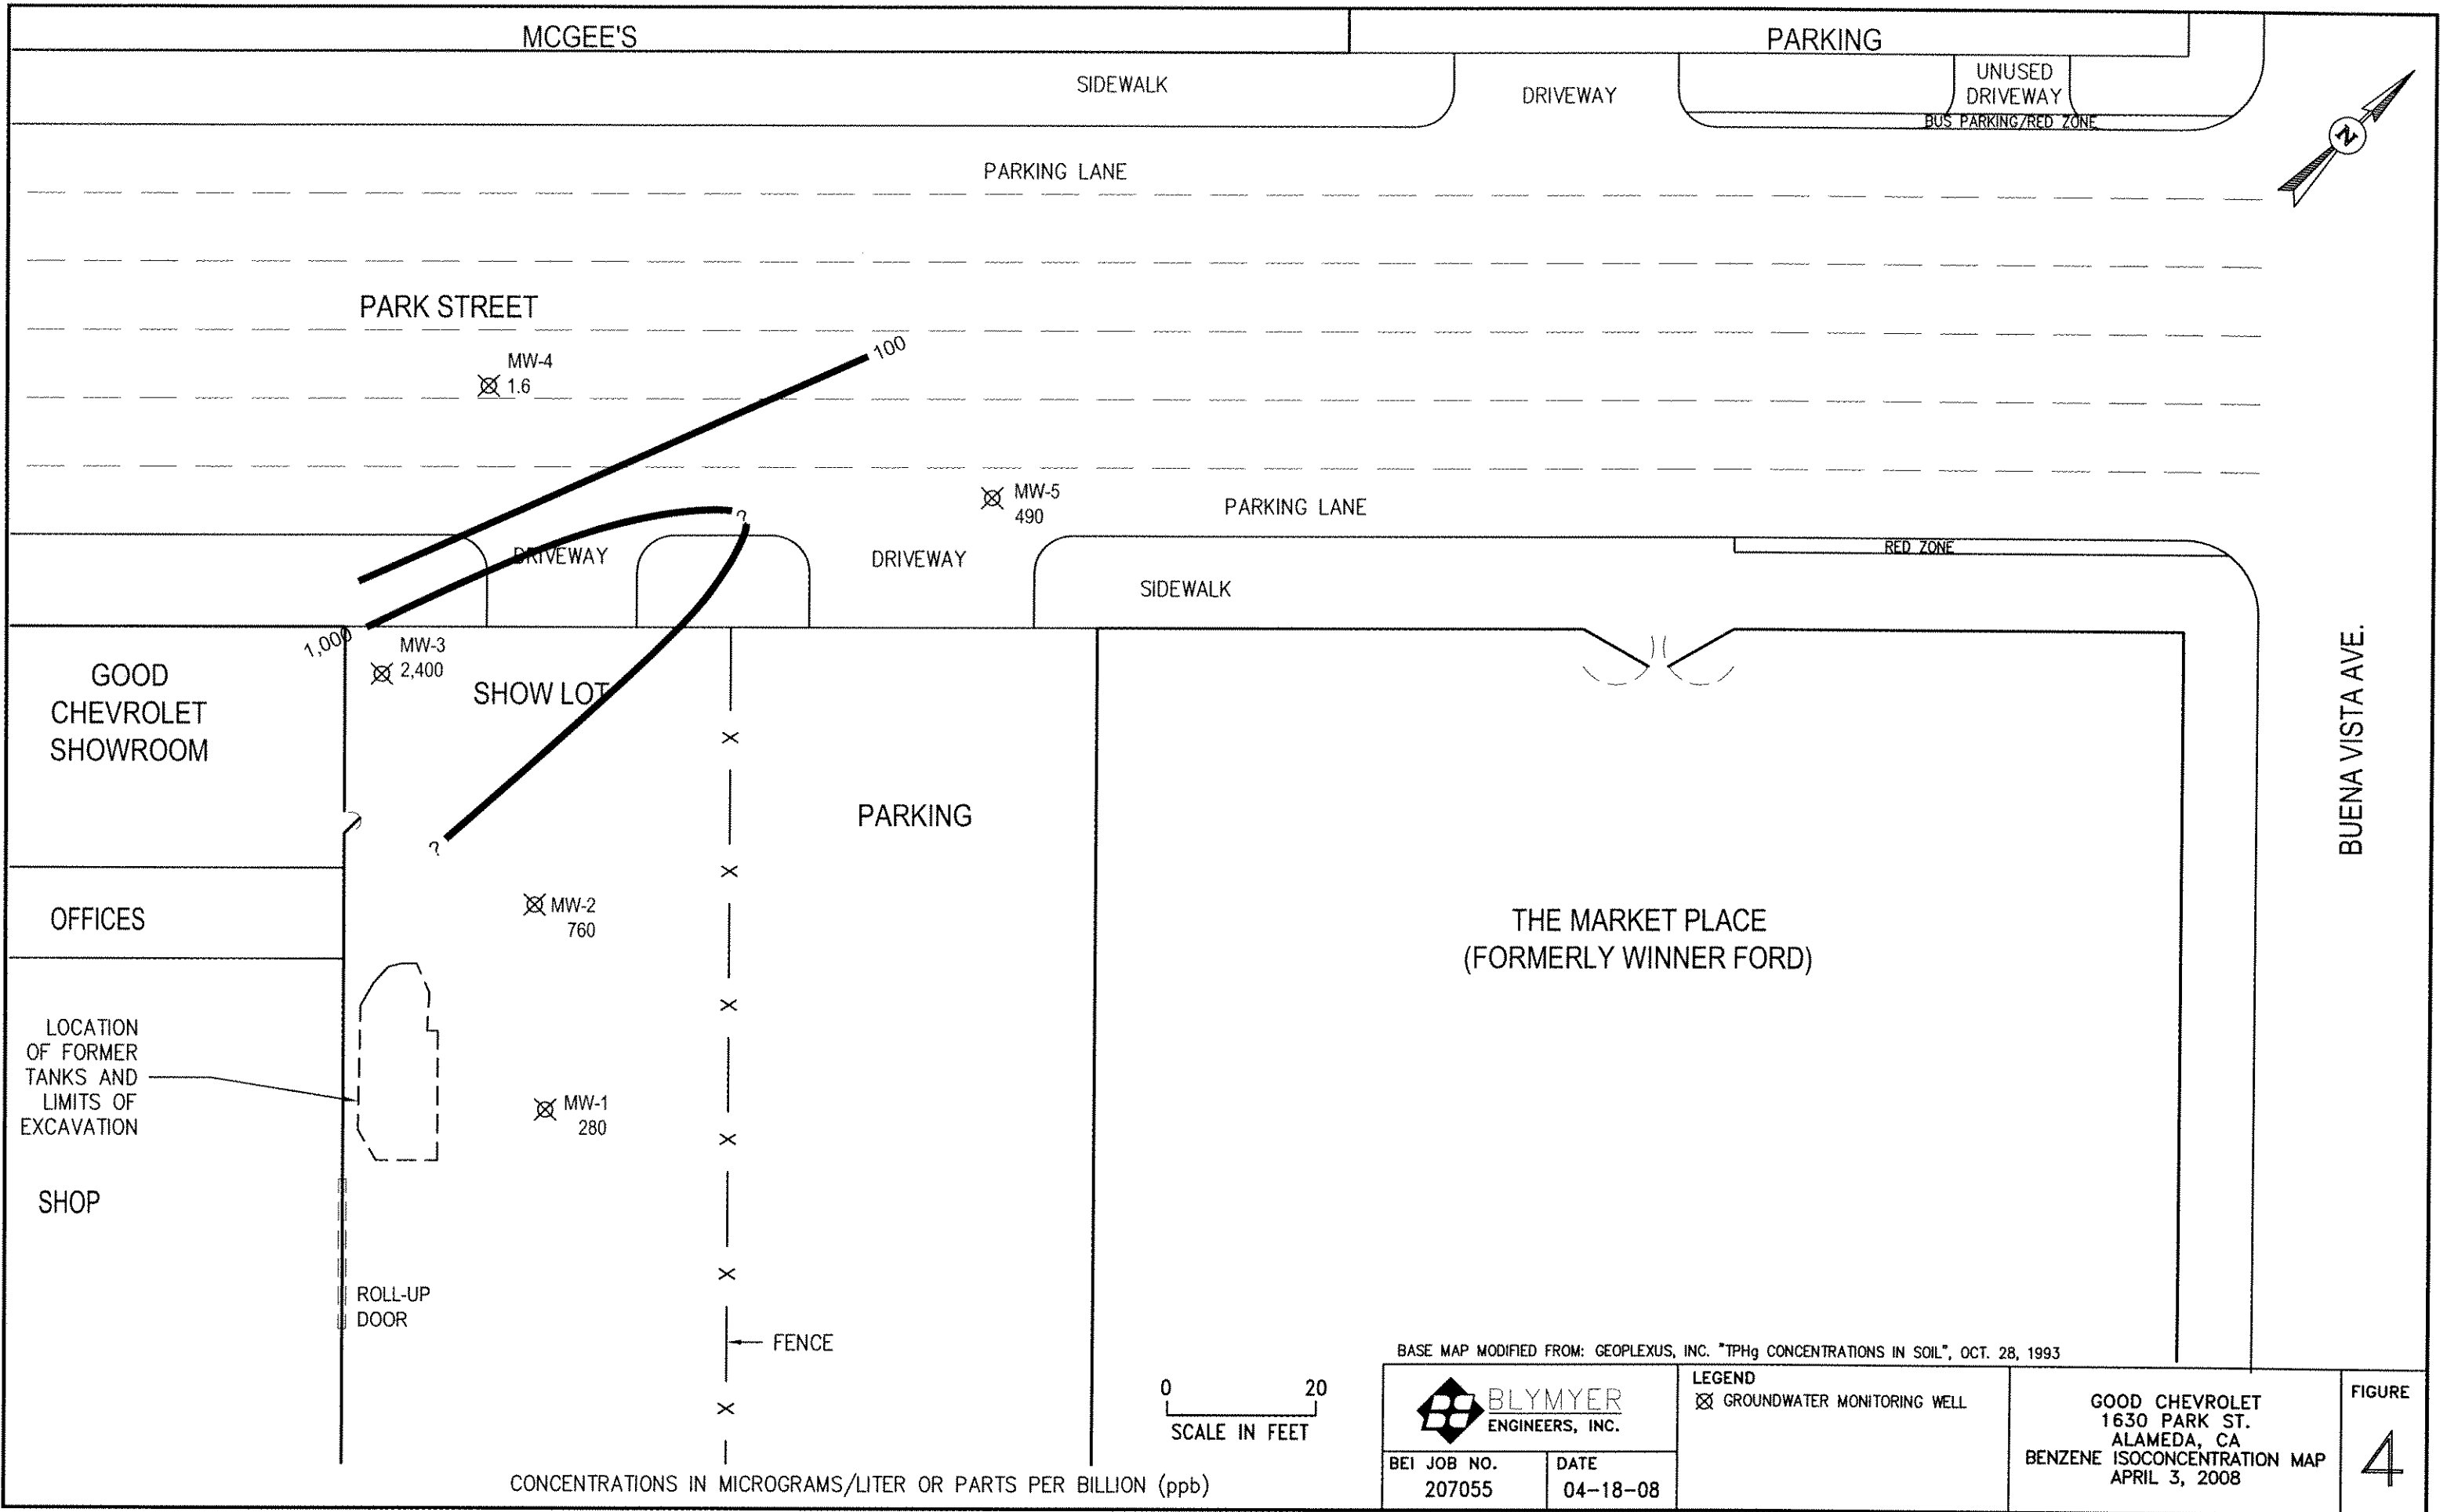

CONCENTRATIONS IN MICROGRAMS/LITER OR PARTS PER BILLION (ppb)

BASE MAP MODIFIED FROM: GEOPLEXUS, INC. "TPHg CONCENTRATIONS IN SOIL", OCT. 28, 1993




**LEGEND**  
 ☒ GROUNDWATER MONITORING WELL

BEI JOB NO. 207055	DATE 04-18-08
-----------------------	------------------

GOOD CHEVROLET  
 1630 PARK ST.  
 ALAMEDA, CA  
 BENZENE ISOCONCENTRATION MAP  
 APRIL 3, 2008

FIGURE  
 4

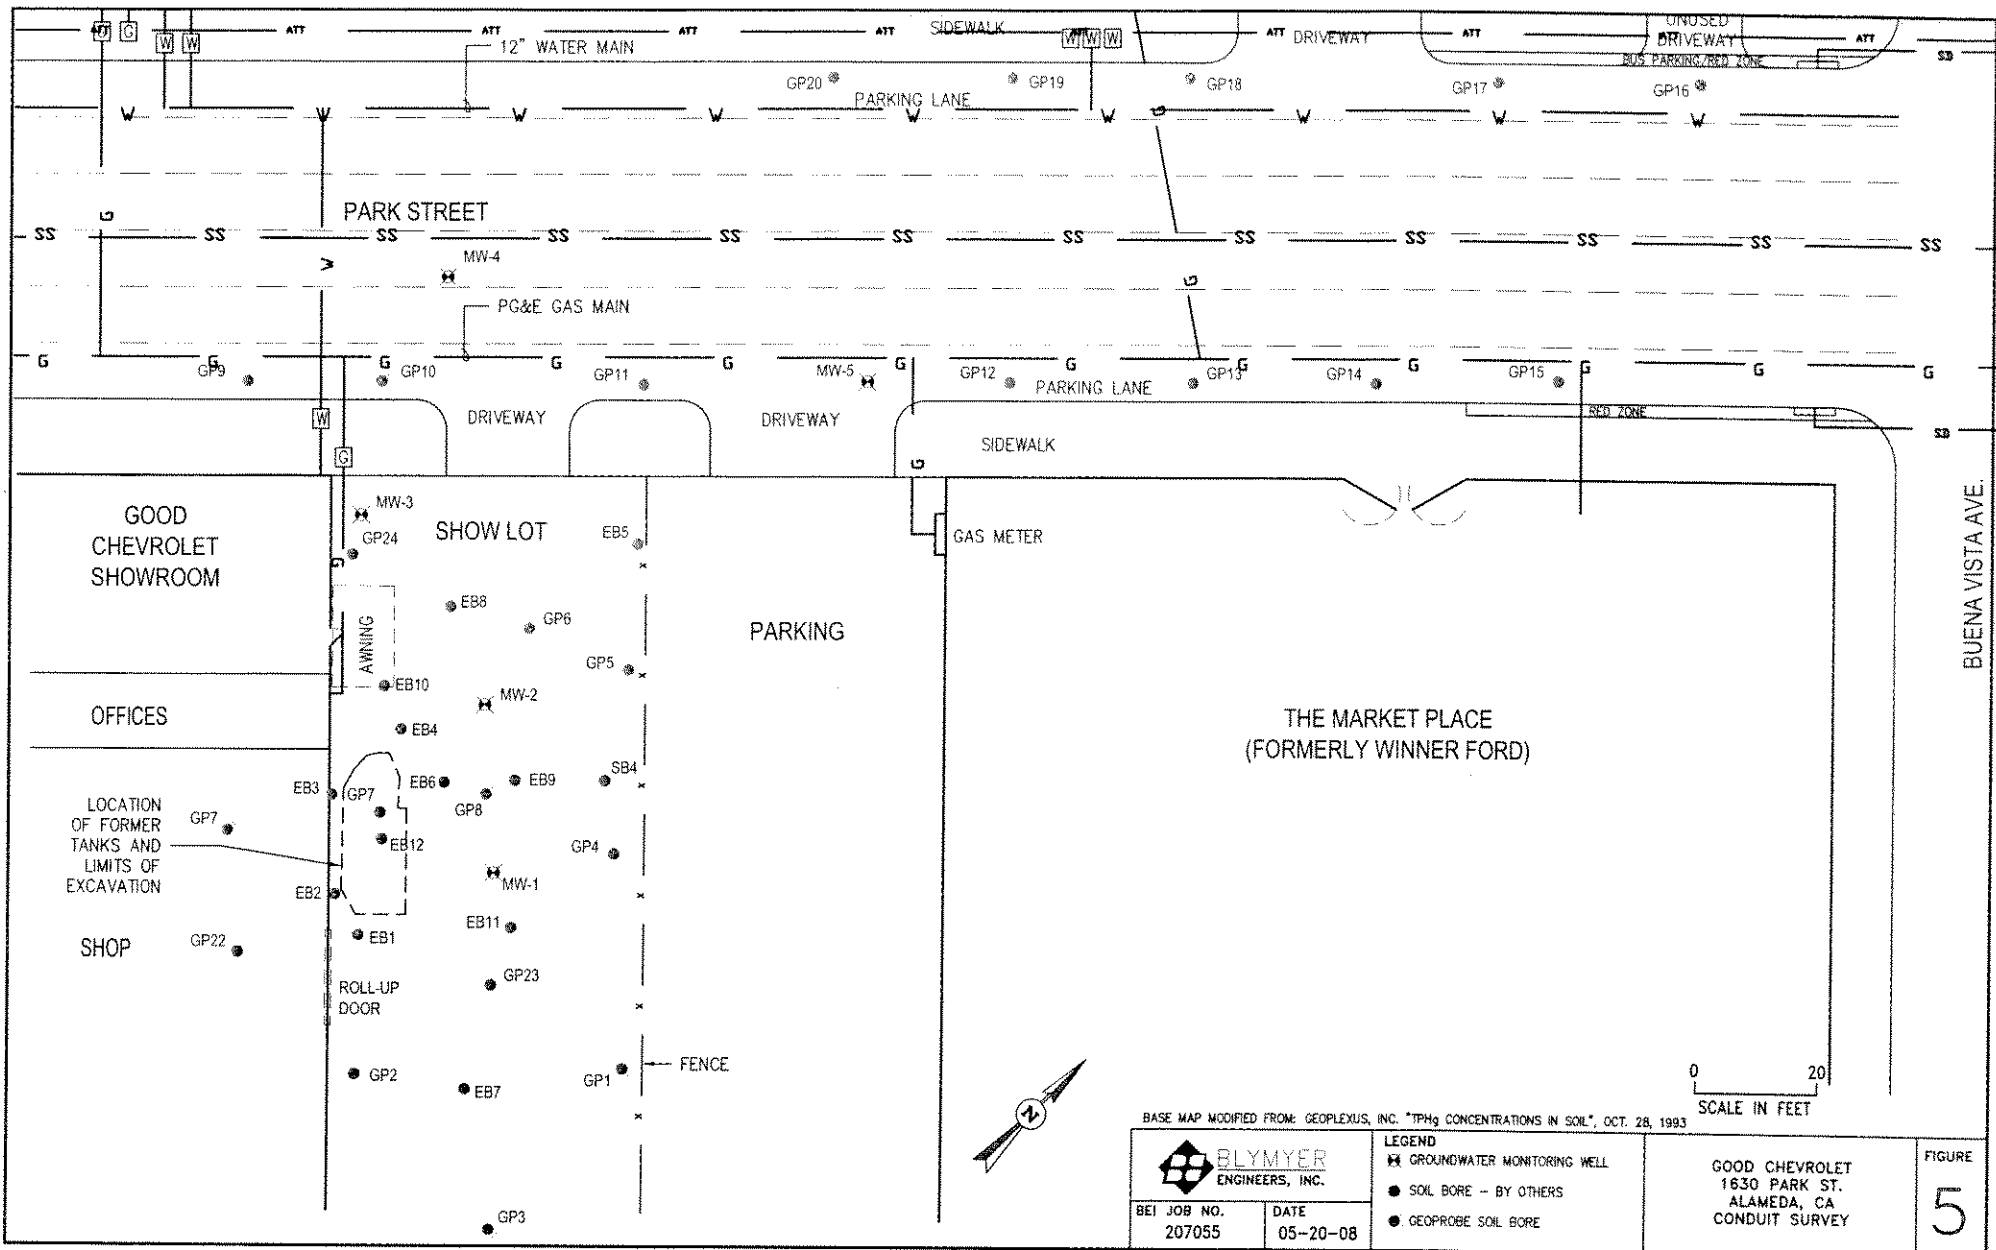

BASE MAP MODIFIED FROM: GEOPLEXUS, INC. "TPH<sub>g</sub> CONCENTRATIONS IN SOIL", OCT. 28, 1993





BEI JOB NO. 207055  
DATE 05-20-08

- LEGEND**
- ⊠ GROUNDWATER MONITORING WELL
  - SOIL BORE -- BY OTHERS
  - GEOPROBE SOIL BORE


GOOD CHEVROLET  
1630 PARK ST.  
ALAMEDA, CA  
CONDUIT SURVEY

FIGURE  
**5**

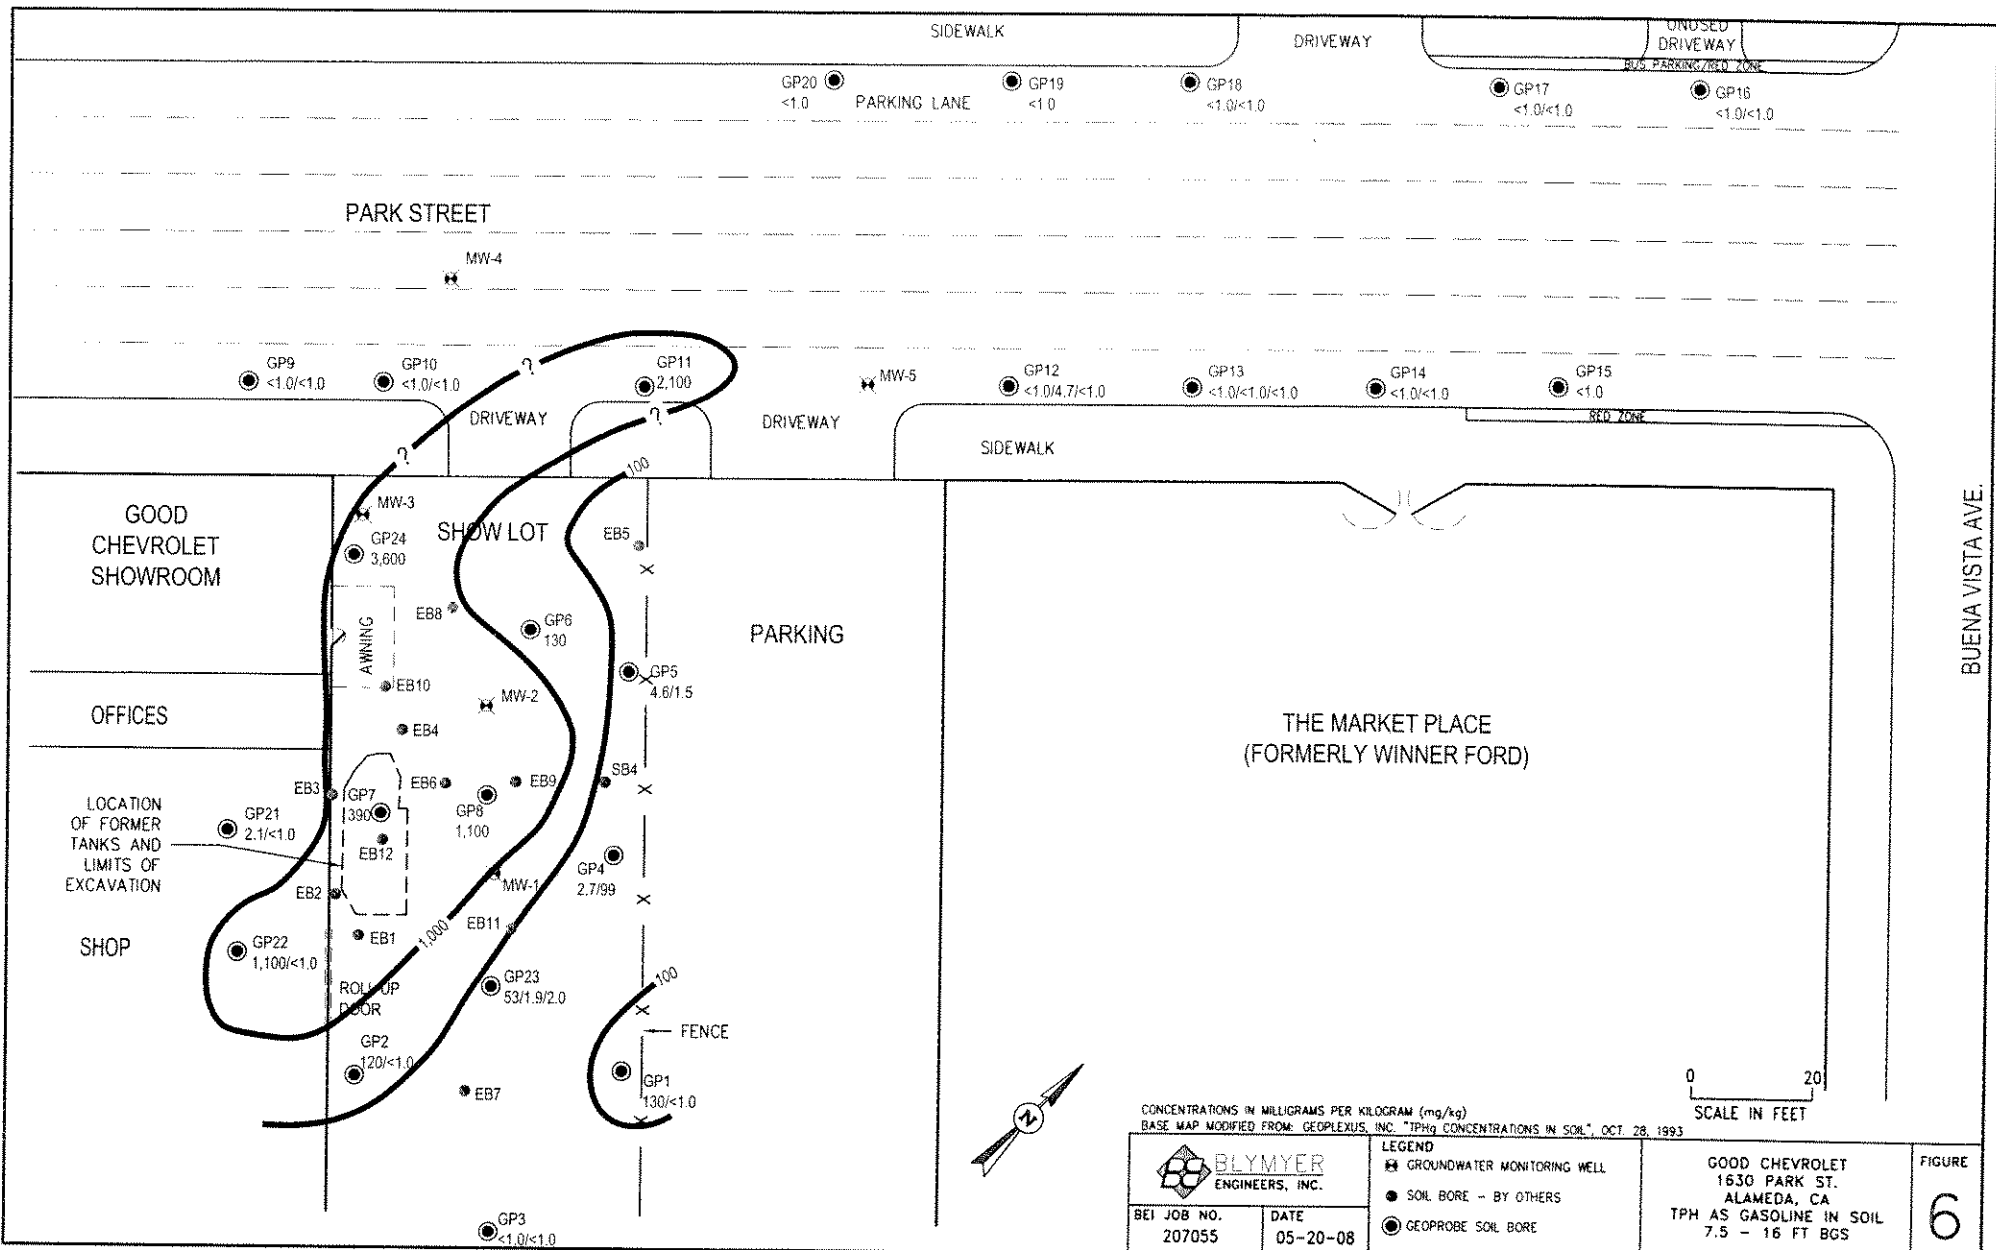


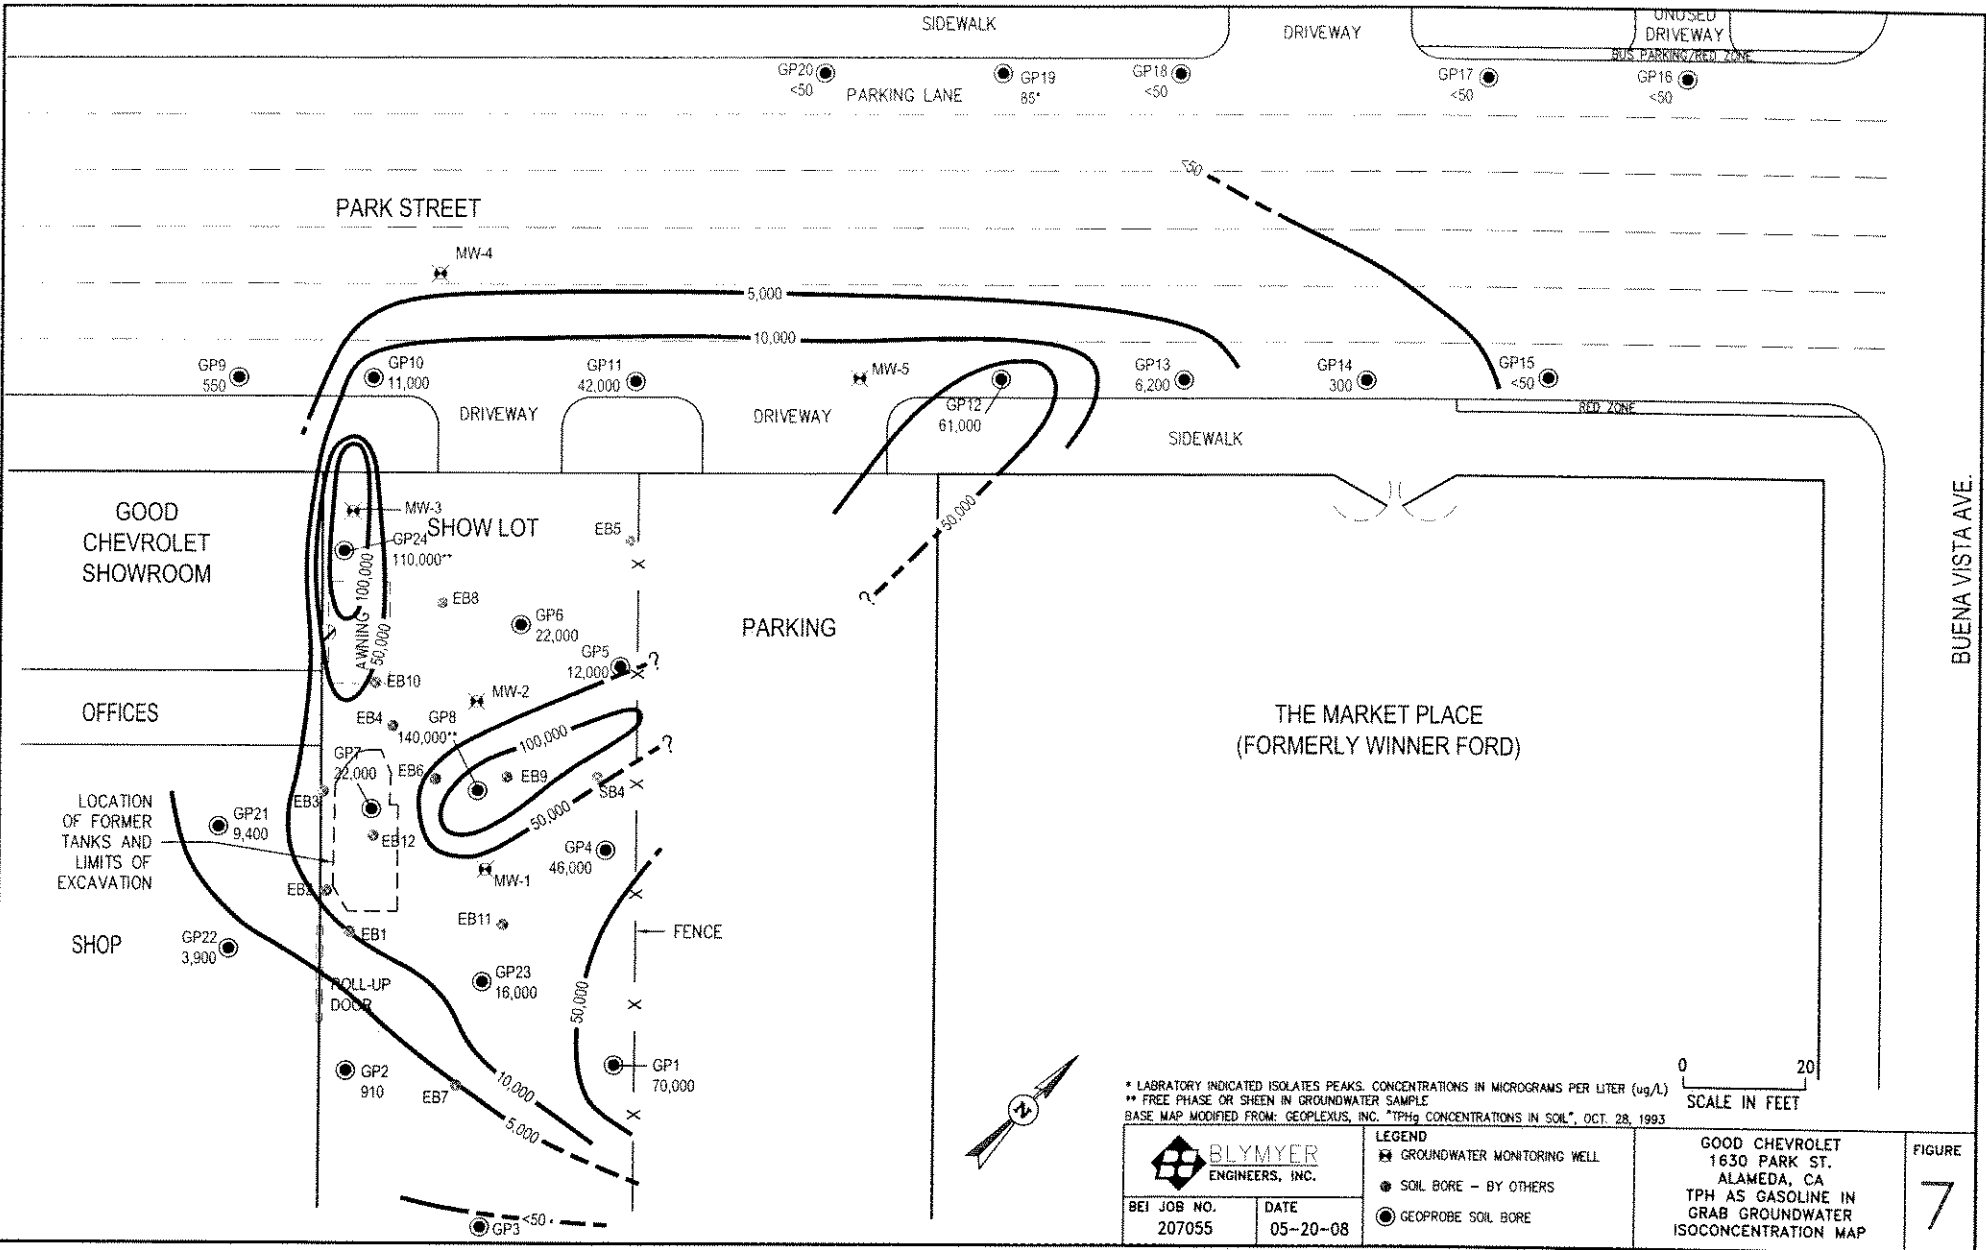


\* LABORATORY INDICATED ISOLATES PEAKS. CONCENTRATIONS IN MICROGRAMS PER LITER (ug/L)  
 \*\* FREE PHASE OR SHEEN IN GROUNDWATER SAMPLE  
 BASE MAP MODIFIED FROM: GEOPLEXUS, INC. "TPHg CONCENTRATIONS IN SOIL", OCT. 28, 1993



		<b>LEGEND</b> GROUNDWATER MONITORING WELL SOIL BORE - BY OTHERS GEOPROBE SOIL BORE	GOOD CHEVROLET 1630 PARK ST. ALAMEDA, CA TPH AS GASOLINE IN GRAB GROUNDWATER ISOCONCENTRATION MAP	<b>FIGURE</b> 7
BEI JOB NO. 207055	DATE 05-20-08			

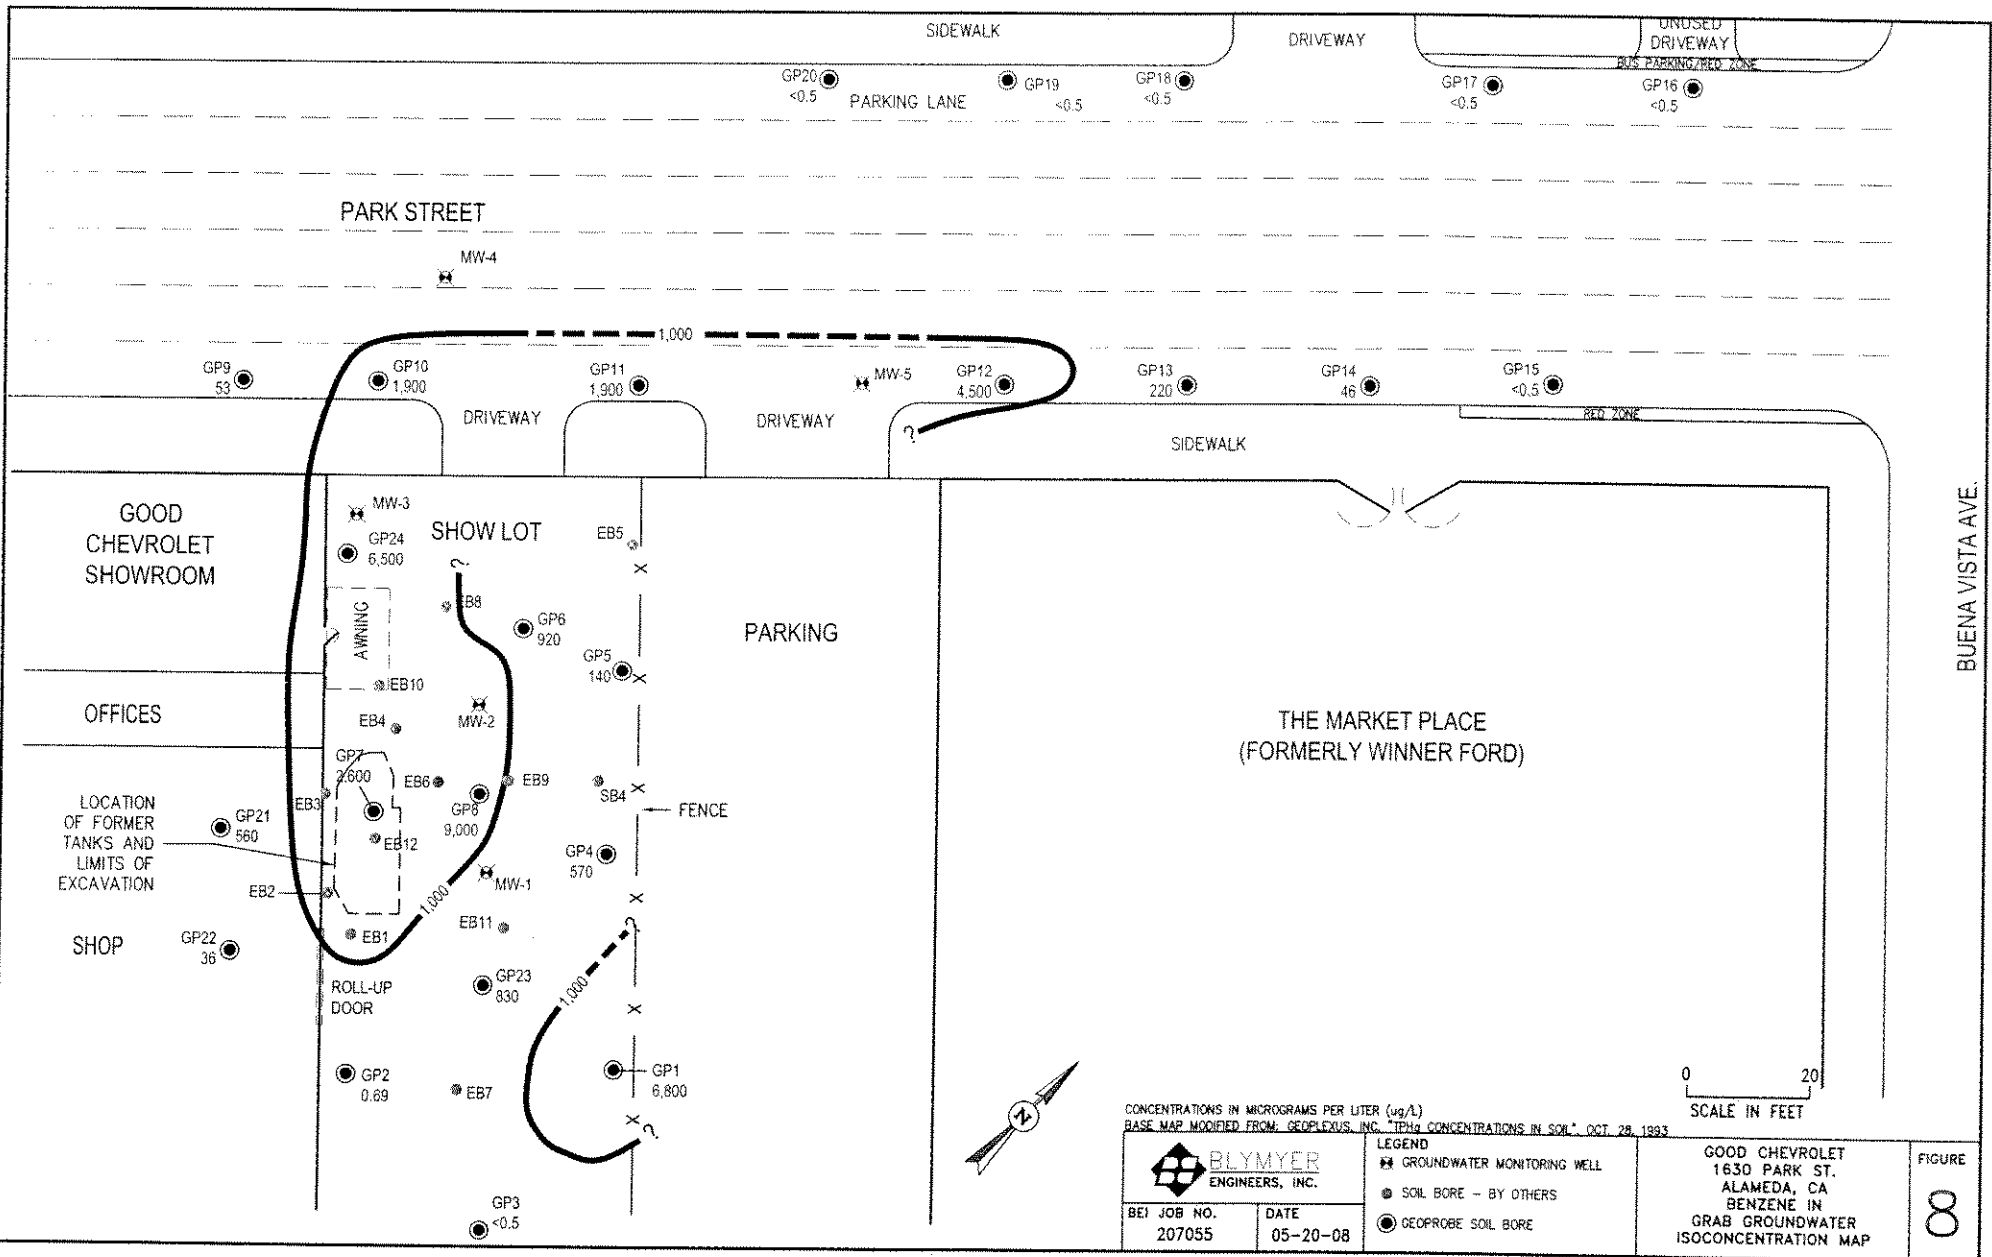



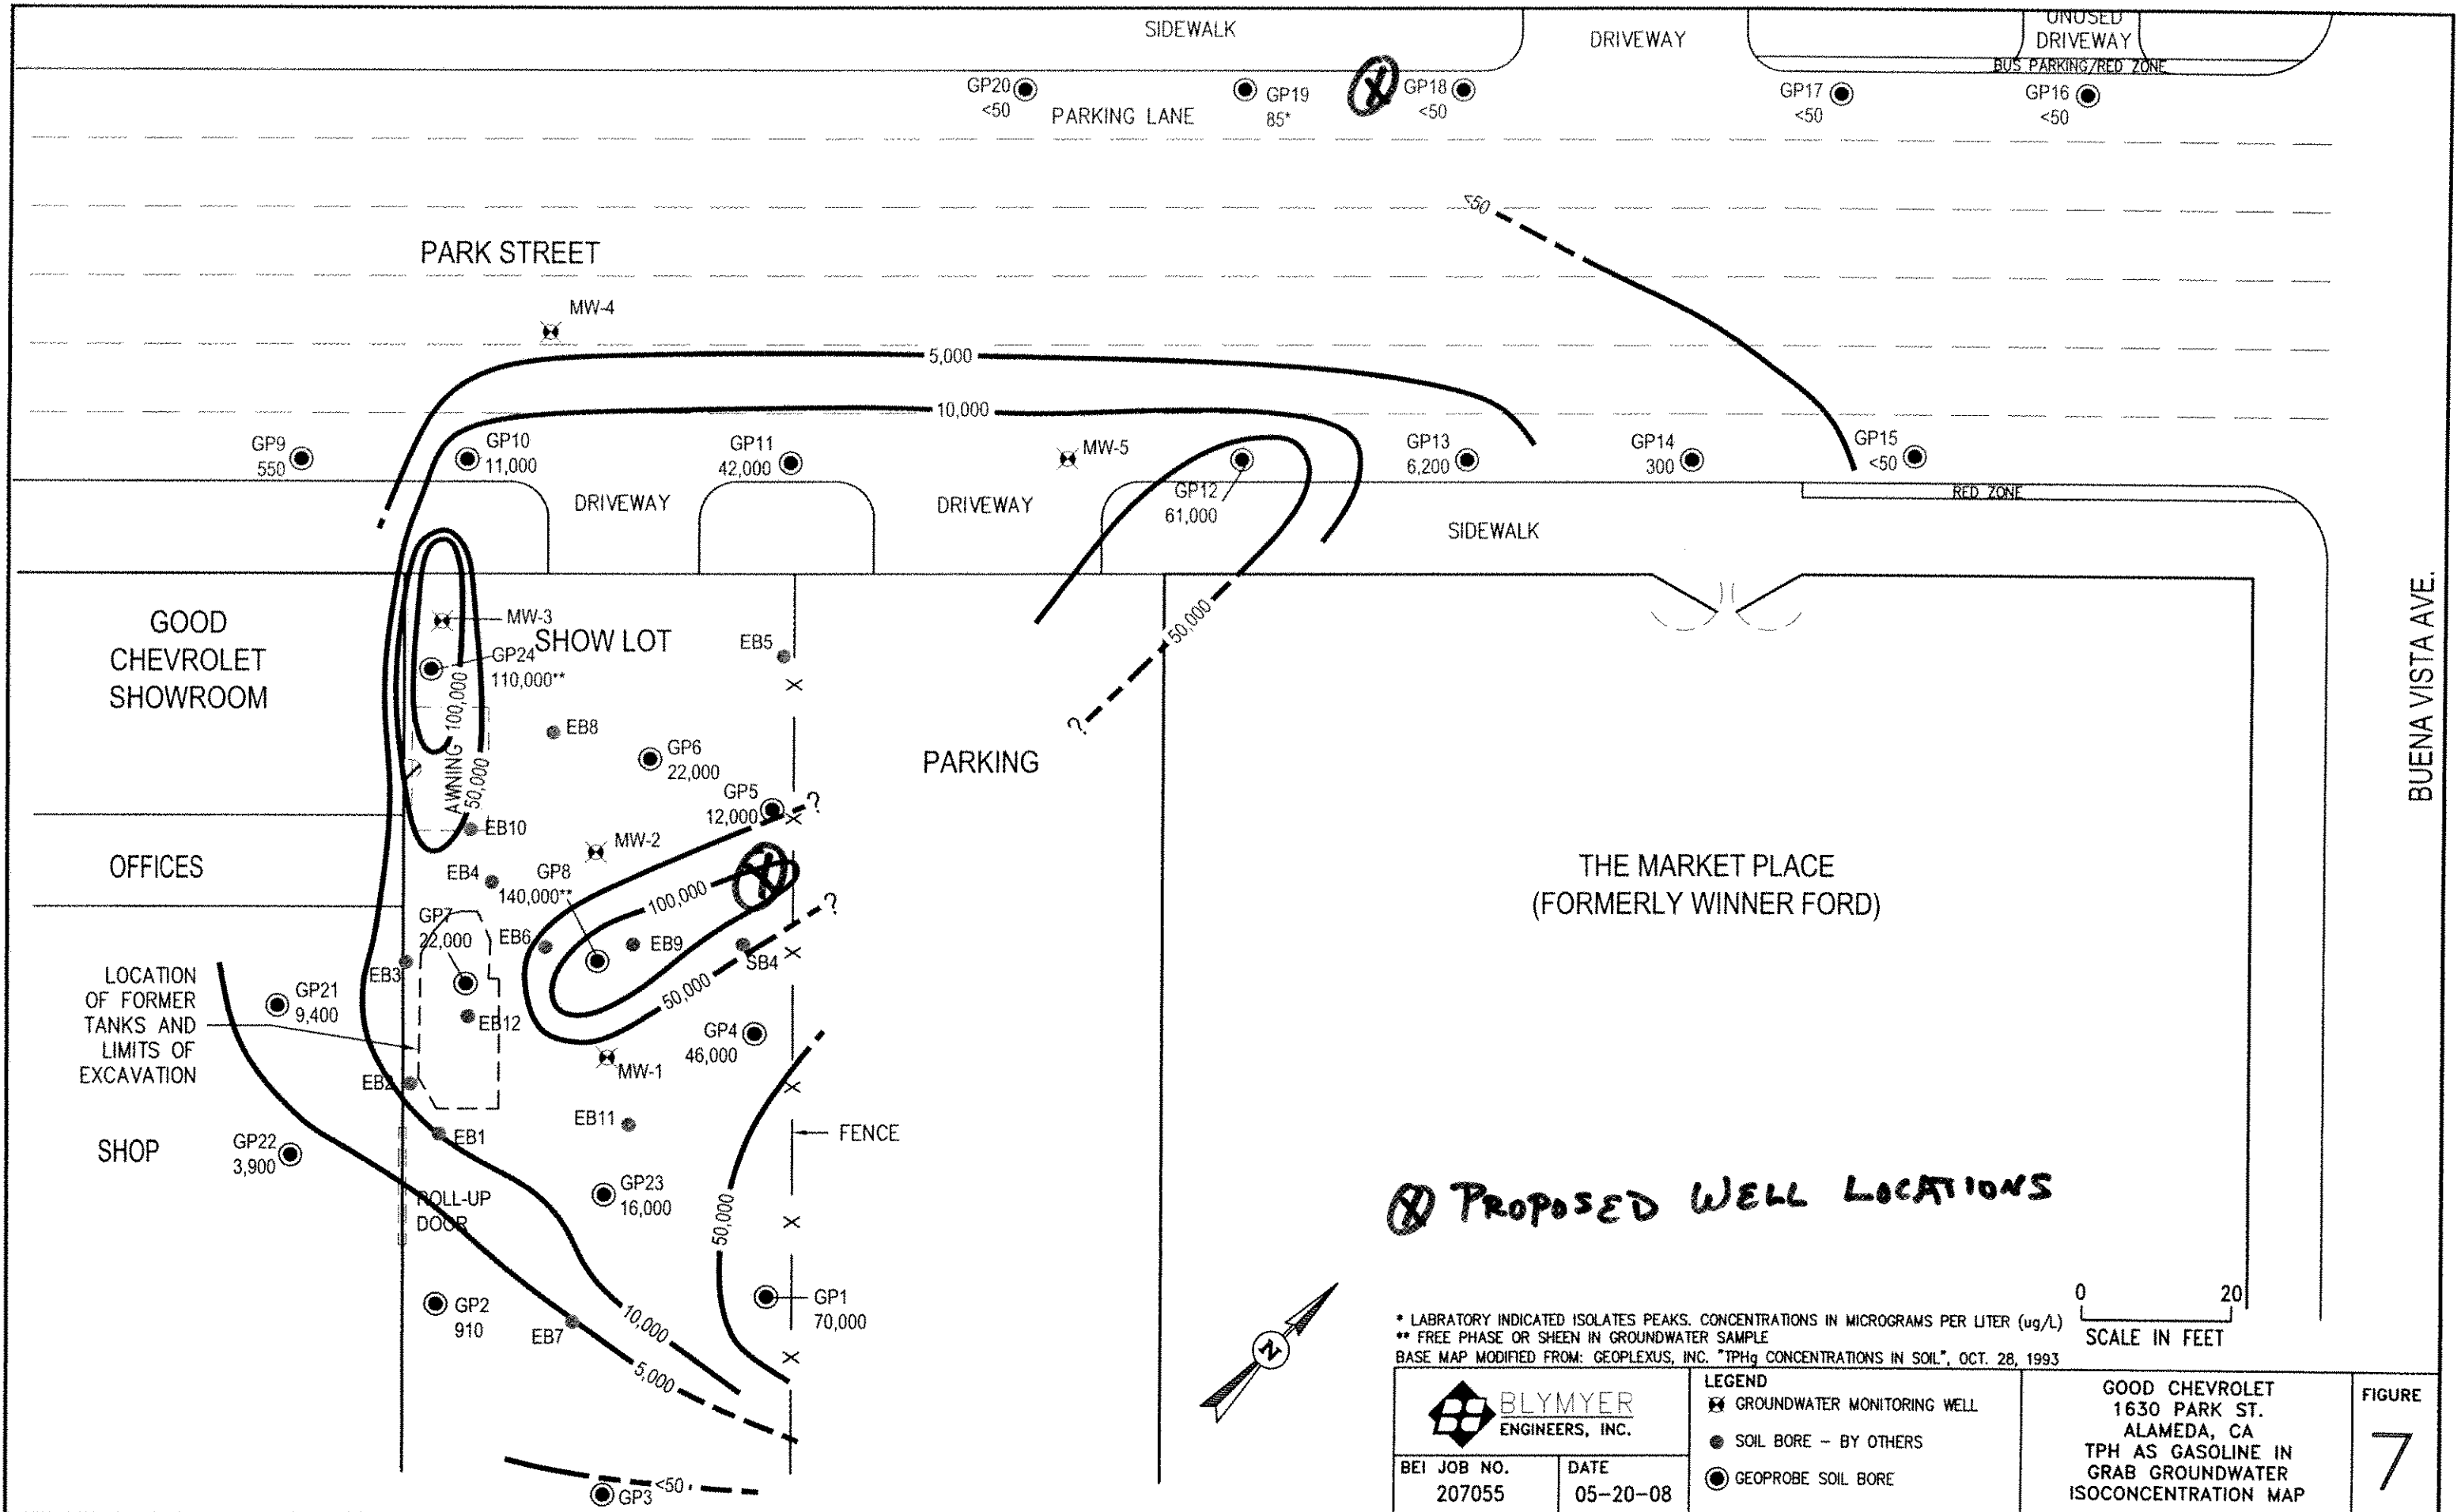

**⊗ PROPOSED WELL LOCATIONS**

\* LABORATORY INDICATED ISOLATES PEAKS. CONCENTRATIONS IN MICROGRAMS PER LITER (ug/L)  
 \*\* FREE PHASE OR SHEEN IN GROUNDWATER SAMPLE  
 BASE MAP MODIFIED FROM: GEOPLEXUS, INC. "TPH<sub>g</sub> CONCENTRATIONS IN SOIL", OCT. 28, 1993

	LEGEND	GOOD CHEVROLET 1630 PARK ST. ALAMEDA, CA TPH AS GASOLINE IN GRAB GROUNDWATER ISOCONCENTRATION MAP	FIGURE <b>7</b>
	⊗ GROUNDWATER MONITORING WELL ● SOIL BORE - BY OTHERS ⊙ GEOPROBE SOIL BORE		
BEI JOB NO. 207055	DATE 05-20-08		

**Table I, Summary of Groundwater Elevation Measurements  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-1	8/11/1989	104.76	8.93	95.83
	4/9/1991		7.59	97.17
	7/14/1992		8.72	96.04
	8/31/1992		9.09	95.67
	9/28/1992		9.25	95.51
	10/7/1992		9.34	95.42
	11/17/1992		9.21	95.55
	12/15/1992		9.26	95.50
	1/11/1993		7.81	96.95
	2/5/1993		7.32	97.44
	3/19/1993		7.20	97.56
	4/23/1993		7.31	97.45
	May-93		8.29	96.47
	7/8/1993		8.30	96.46
	10/15/1993		9.38	95.38
	1/25/1994		8.80	95.96
	4/28/1994		8.15	96.61
	7/27/1994		8.70	96.06
	10/27/1994		9.37	95.39
	1/26/1995		7.18	97.58
	4/13/1995		6.76	98.00
	7/21/1995		7.73	97.03
	10/25/1995		9.08	95.68
	1/21/1997		7.03	97.73
	11/12/1998		8.10	96.66
	1/16/2001		7.70	97.06
	6/27/2002		7.30	97.46
	11/18/2002	8.14	96.62	
2/20/2003	6.87	97.89		
6/11/2003	7.05	97.71		
4/4/2008 *	25.42	7.13	18.29	

**Table I, Summary of Groundwater Elevation Measurements  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-2	8/11/1989	104.86	9.24	95.62
	4/9/1991		8.01	96.85
	7/14/1992		9.03	95.83
	8/31/1992		9.34	95.52
	9/28/1992		9.46	95.40
	10/7/1992		9.52	95.34
	11/17/1992		9.42	95.44
	12/15/1992		9.47	95.39
	1/11/1993		8.25	96.61
	2/5/1993		7.85	97.01
	3/19/1993		7.77	97.09
	4/23/1993		7.86	97.00
	May-93		8.20	96.66
	7/8/1993		8.72	96.14
	10/15/1993		9.64	95.22
	1/25/1994		9.12	95.74
	4/28/1994		8.56	96.30
	7/27/1994		9.02	95.84
	10/27/1994		9.59	95.27
	1/26/1995		7.71	97.15
	4/13/1995		7.40	97.46
	7/21/1995		8.22	96.64
	10/25/1995		9.35	95.51
	1/21/1997		7.55	97.31
	11/12/1998		8.49	96.37
	1/16/2001		8.08	96.78
	6/27/2002		7.77	97.09
	11/18/2002	8.50	96.36	
2/20/2003	7.38	97.48		
6/11/2003	7.57	97.29		
4/4/2008 *	25.52	7.67	17.85	

**Table I, Summary of Groundwater Elevation Measurements  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-3	8/11/1989	104.52	9.00	95.52
	4/9/1991		8.06	96.46
	7/14/1992		8.82	95.70
	8/31/1992		9.05	95.47
	9/28/1992		9.09	95.43
	10/7/1992		9.15	95.37
	11/17/1992		9.05	95.47
	12/15/1992		9.12	95.40
	1/11/1993		8.18	96.34
	2/5/1993		7.98	96.54
	3/19/1993		7.94	96.58
	4/23/1993		8.02	96.50
	May-93		7.69	96.83
	7/8/1993		8.65	95.87
	10/15/1993		9.32	95.20
	1/25/1994		8.93	95.59
	4/28/1994		8.52	96.00
	7/27/1994		8.86	95.66
	10/27/1994		9.25	95.27
	1/26/1995		7.85	96.67
	4/13/1995		7.64	96.88
	7/21/1995		8.26	96.26
	10/25/1995		9.05	95.47
	1/21/1997		7.75	96.77
	11/12/1998		8.38	96.14
	1/16/2001		8.00	96.52
	6/27/2002	7.81	96.71	
11/18/2002	8.37	96.15		
2/20/2003	7.48	97.04		
6/11/2003	7.67	96.85		
4/4/2008 *	25.17	7.74	17.43	

**Table I, Summary of Groundwater Elevation Measurements  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
MW-4	4/28/1994	104.86	9.29	95.57
	7/27/1994		9.55	95.31
	10/27/1994		9.83	95.03
	1/26/1995		8.88	95.98
	4/13/1995		8.80	96.06
	7/21/1995		9.18	95.68
	10/25/1995		9.70	95.16
	1/21/1997		NM	NM
	11/12/1998		NM	NM
	1/16/2001		NM	NM
	6/27/2002		NM	NM
	11/18/2002		NM	NM
	2/20/2003		NM	NM
	6/11/2003		NM	NM
	4/4/2008 *	25.53	8.73	16.80
MW-5	4/28/1994	103.62	8.27	95.35
	7/27/1994		8.50	95.12
	10/27/1994		8.92	94.70
	1/26/1995		7.61	96.01
	4/13/1995		8.48	95.14
	7/21/1995		8.00	95.62
	10/25/1995		8.72	94.90
	1/21/1997		6.79	96.83
	11/12/1998		8.12	95.50
	1/16/2001		7.67	95.95
	6/27/2002		7.61	96.01
	11/18/2002		8.01	95.61
	2/20/2003		7.22	96.40
	6/11/2003		7.43	96.19
	4/4/2008 *	24.31	7.36	16.95

**Table I, Summary of Groundwater Elevation Measurements  
 BEI Job No. 207055, Good Chevrolet  
 1630 Park Street, Alameda, California**

Well ID	Date	TOC Elevation (feet)	Depth to Water (feet)	Water Surface Elevation (feet)
---------	------	-------------------------	--------------------------	-----------------------------------

- Notes:
- TOC = Top of Casing
  - \* = Initial data set collected under direction of Blymyer Engineers, Inc.
  - \* = Resurveyed on April 4, 2008 by CSS Environmental Services, Inc.
  - NM = Not measured

Elevations in feet above mean sea level

**Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020, 8021B, or 8260B (µg/L)					EPA Method E200.8
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	Lead
MCL		N/A	1	150	700	1,750	13	15
<i>Drinking Water Source</i> <sup>1</sup>		100	1	40	30	20	5	15
MW-1	1/21/1987 <sup>2</sup>	<b>21,020</b>	<b>1,148</b>	<b>8,627</b>	<b>1,792</b>	<b>6,012</b>	NA	NA
	1/11/1989	<b>1,400</b>	<b>74</b>	<b>10</b>	<b>13</b>	<b>5</b>	NA	NA
	7/12/1989	<b>1,200</b>	<b>470</b>	<b>49</b>	<b>45</b>	<b>33</b>	NA	NA
	4/9/1991 <sup>3</sup>	<b>850</b>	<b>260</b>	<b>10</b>	<b>15</b>	<b>12</b>	NA	NA
	7/14/1992 <sup>4</sup>	<b>13,000</b>	<b>2,300</b>	<b>1,200</b>	<b>1,200</b>	<b>1,200</b>	NA	NA
	10/7/1992	<b>3,600</b>	<b>1,600</b>	<b>80</b>	<b>120</b>	<b>120</b>	NA	NA
	1/11/1993	<b>1,200</b>	<b>410</b>	<b>16</b>	<b>23</b>	<b>19</b>	NA	NA
	4/23/1993	<b>2,200<sup>a</sup></b>	<b>720</b>	<b>180</b>	<b>82</b>	<b>150</b>	NA	NA
	7/8/1993	<b>3,200<sup>a</sup></b>	<b>1,200</b>	<b>110</b>	<b>97</b>	<b>100</b>	NA	NA
	10/15/1993	<b>3,700<sup>a</sup></b>	<b>1,400</b>	<b>43</b>	<b>94</b>	<b>36</b>	NA	NA
	1/25/1994	<b>1,600<sup>a</sup></b>	<b>680</b>	<b>16</b>	<b>41</b>	<b>35</b>	NA	NA
	4/28/1994	<b>6,100<sup>a</sup></b>	<b>1,900</b>	<b>380</b>	<b>250</b>	<b>340</b>	NA	NA
	7/27/1994	<b>6,000<sup>a</sup></b>	<b>1,800</b>	<b>510</b>	<b>220</b>	<b>450</b>	NA	NA
	10/27/1994	<b>3,000<sup>a</sup></b>	<b>1,100</b>	<b>79</b>	<b>82</b>	<b>87</b>	NA	NA
	1/26/1995	<b>1,600<sup>a</sup></b>	<b>660</b>	<b>100</b>	<b>82</b>	<b>87</b>	NA	NA
	4/13/1995	<b>3,800<sup>a</sup></b>	<b>1,200</b>	<b>270</b>	<b>120</b>	<b>260</b>	NA	NA
	7/21/1995	<b>5,200<sup>a</sup></b>	<b>1,500</b>	<b>450</b>	<b>190</b>	<b>400</b>	NA	NA
	10/25/1995	<b>5,900<sup>a</sup></b>	<b>1,800</b>	<b>450</b>	<b>210</b>	<b>400</b>	NA	NA
	1/21/1997	<b>3,100<sup>a</sup></b>	<b>1,100</b>	<b>87</b>	<b>160</b>	<b>180</b>	<7.3	NA
	11/12/1998	<b>1,000<sup>a</sup></b>	<b>280</b>	<b>3.0</b>	<b>3.3</b>	<b>7.9</b>	<30	NA
1/16/2001	<b>4,700<sup>a</sup></b>	<b>1,20</b>	<b>18</b>	<b>150</b>	<b>49</b>	<5 <sup>e</sup>	NA	
6/27/2002	<b>5,900<sup>a</sup></b>	<b>230</b>	<b>7.7</b>	<b>&lt;5</b>	<b>1,500</b>	<5 <sup>e</sup>	NA	
11/18/2002	<b>3,100<sup>a</sup></b>	<b>890</b>	<b>12</b>	<b>310</b>	<b>28</b>	<2.5 <sup>e</sup>	NA	
2/20/2003	<b>260<sup>d</sup></b>	<b>100</b>	<b>0.72</b>	<b>&lt;0.5</b>	<b>&lt;0.5</b>	<0.5 <sup>e</sup>	NA	
6/11/2003	<b>3,100<sup>a</sup></b>	<b>480</b>	<b>6.7</b>	<b>220</b>	<b>420</b>	<2.5 <sup>e</sup>	NA	
4/3/2008 <sup>5</sup>	<b>2,700<sup>a</sup></b>	<b>280</b>	<b>21</b>	<b>130</b>	<b>230</b>	<25	<0.5	

**Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020, 8021B, or 8260B (µg/L)					EPA Method E200.8
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	Lead
MCL		N/A	1	150	700	1,750	13	15
<i>Drinking Water Source</i> <sup>1</sup>		100	1	40	30	20	5	15
MW-2	1/21/1987 <sup>2</sup>	<b>5,018</b>	<b>386</b>	<b>1,981</b>	<b>285</b>	<b>1,432</b>	NA	NA
	1/11/1989	<b>10,000</b>	<b>3,000</b>	<b>410</b>	<b>240</b>	<b>190</b>	NA	NA
	7/12/1989	<b>7,600</b>	<b>2,700</b>	<b>540</b>	<b>250</b>	<b>320</b>	NA	NA
	4/9/1991 <sup>3</sup>	<b>4,900</b>	<b>910</b>	<b>210</b>	<b>130</b>	<b>200</b>	NA	NA
	7/14/1992 <sup>4</sup>	<b>13,000</b>	<b>4,400</b>	<b>1,500</b>	<b>610</b>	<b>1,100</b>	NA	NA
	10/7/1992	<b>11,000</b>	<b>5,200</b>	<b>1,500</b>	<b>500</b>	<b>1,200</b>	NA	NA
	1/11/1993	<b>17,000</b>	<b>940</b>	<b>1,100</b>	<b>480</b>	<b>930</b>	NA	NA
	4/23/1993	<b>52,000<sup>a</sup></b>	<b>13,000</b>	<b>8,400</b>	<b>1,700</b>	<b>5,300</b>	NA	NA
	7/8/1993	<b>6,400<sup>a</sup></b>	<b>2,500</b>	<b>470</b>	<b>280</b>	<b>530</b>	NA	NA
	10/15/1993	<b>17,000<sup>a</sup></b>	<b>3,900</b>	<b>870</b>	<b>500</b>	<b>940</b>	NA	NA
	1/25/1994	<b>16,000<sup>a</sup></b>	<b>5,400</b>	<b>1,140</b>	<b>640</b>	<b>1,500</b>	NA	NA
	4/28/1994	<b>15,000<sup>a</sup></b>	<b>4,000</b>	<b>910</b>	<b>480</b>	<b>1,200</b>	NA	NA
	7/27/1994	<b>18,000<sup>a</sup></b>	<b>6,000</b>	<b>760</b>	<b>630</b>	<b>1,600</b>	NA	NA
	10/27/1994	<b>9,500<sup>a</sup></b>	<b>2,700</b>	<b>230</b>	<b>320</b>	<b>640</b>	NA	NA
	1/26/1995	<b>5,900<sup>a</sup></b>	<b>1,900</b>	<b>290</b>	<b>230</b>	<b>500</b>	NA	NA
	4/13/1995	<b>10,000<sup>a</sup></b>	<b>3,300</b>	<b>620</b>	<b>360</b>	<b>930</b>	NA	NA
	7/21/1995	<b>9,900<sup>a</sup></b>	<b>3,300</b>	<b>320</b>	<b>390</b>	<b>830</b>	NA	NA
	10/25/1995	<b>13,000<sup>a</sup></b>	<b>4,900</b>	<b>400</b>	<b>580</b>	<b>990</b>	NA	NA
	1/21/1997	<b>7,600<sup>a</sup></b>	<b>2,600</b>	<b>310</b>	<b>330</b>	<b>660</b>	<20	NA
	11/12/1998	<b>31,000<sup>a</sup></b>	<b>11,000</b>	<b>750</b>	<b>1,500</b>	<b>2,300</b>	<900	NA
1/16/2001	<b>23,000<sup>a</sup></b>	<b>8,200</b>	<b>260</b>	<b>1,000</b>	<b>820</b>	<30	NA	
6/27/2002	<b>39,000<sup>a</sup></b>	<b>7,000</b>	<b>1,800</b>	<b>690</b>	<b>4,000</b>	<5 <sup>e</sup>	NA	
11/18/2002	<b>15,000<sup>a</sup></b>	<b>5,700</b>	<b>76</b>	<b>1,000</b>	<b>150</b>	<12 <sup>e</sup>	NA	
2/20/2003	<b>26,000<sup>a</sup></b>	<b>6,300</b>	<b>1,100</b>	<b>1,300</b>	<b>1,900</b>	<5.0 <sup>e</sup>	NA	
6/11/2003	<b>37,000<sup>a</sup></b>	<b>7,100</b>	<b>2,300</b>	<b>2,000</b>	<b>3,600</b>	<25 <sup>e</sup>	NA	
4/3/2008 <sup>5</sup>	<b>4,100<sup>a</sup></b>	<b>760</b>	<b>96</b>	<b>250</b>	<b>130</b>	<50	<0.5	



**Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020, 8021B, or 8260B (µg/L)					EPA Method E200.8
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	Lead
MCL		N/A	1	150	700	1,750	13	15
<i>Drinking Water Source</i> <sup>1</sup>		100	1	40	30	20	5	15
MW-3	1/21/1987 <sup>2</sup>	<b>10,287</b>	<b>1,428</b>	<b>3,281</b>	<b>610</b>	<b>2,761</b>	NA	NA
	1/11/1989	<b>5,300</b>	<b>1,800</b>	<b>340</b>	<b>150</b>	<b>160</b>	NA	NA
	7/12/1989	<b>7,800</b>	<b>3,100</b>	<b>900</b>	<b>300</b>	<b>480</b>	NA	NA
	4/9/1991 <sup>3</sup>	<b>9,400</b>	<b>1,400</b>	<b>730</b>	<b>200</b>	<b>510</b>	NA	NA
	7/14/1992 <sup>4</sup>	<b>17,000</b>	<b>3,500</b>	<b>390</b>	<b>390</b>	<b>260</b>	NA	NA
	10/7/1992	<b>9,200</b>	<b>4,300</b>	<b>470</b>	<b>390</b>	<b>610</b>	NA	NA
	1/11/1993	<b>2,000</b>	<b>740</b>	<b>29</b>	<b>58</b>	<b>28</b>	NA	NA
	4/23/1993	<b>6,500<sup>a</sup></b>	<b>2,600</b>	<b>280</b>	<b>260</b>	<b>190</b>	NA	NA
	7/8/1993	<b>5,200<sup>a</sup></b>	<b>2,100</b>	<b>260</b>	<b>250</b>	<b>180</b>	NA	NA
	10/15/1993	<b>11,000<sup>a</sup></b>	<b>3,500</b>	<b>580</b>	<b>430</b>	<b>370</b>	NA	NA
	1/25/1994	<b>6,200<sup>a</sup></b>	<b>2,500</b>	<b>270</b>	<b>160</b>	<b>28</b>	NA	NA
	4/28/1994	<b>5,300<sup>a</sup></b>	<b>1,700</b>	<b>190</b>	<b>210</b>	<b>180</b>	NA	NA
	7/27/1994	<b>5,900<sup>a</sup></b>	<b>2,000</b>	<b>360</b>	<b>260</b>	<b>330</b>	NA	NA
	10/27/1994	<b>8,000<sup>a</sup></b>	<b>2,200</b>	<b>580</b>	<b>260</b>	<b>170</b>	NA	NA
	1/26/1995	<b>3,700<sup>a</sup></b>	<b>1,200</b>	<b>150</b>	<b>150</b>	<b>190</b>	NA	NA
	4/13/1995	<b>4,000<sup>a</sup></b>	<b>1,400</b>	<b>200</b>	<b>180</b>	<b>210</b>	NA	NA
	7/21/1995	<b>5,700<sup>a</sup></b>	<b>2,000</b>	<b>280</b>	<b>270</b>	<b>280</b>	NA	NA
	10/25/1995	<b>11,000<sup>a</sup></b>	<b>3,500</b>	<b>1,100</b>	<b>460</b>	<b>680</b>	NA	NA
	1/21/1997	<b>2,200<sup>a</sup></b>	<b>860</b>	<b>63</b>	<b>71</b>	<b>80</b>	<5	NA
	11/12/1998	<b>180<sup>d</sup></b>	<b>44</b>	<b>0.51</b>	ND	<b>0.92</b>	<20	NA
1/16/2001	<b>64<sup>a</sup></b>	<b>11</b>	<b>0.77</b>	<0.5	<0.5	<5 <sup>e</sup>	NA	
6/27/2002	<50	<0.5	<0.5	<0.5	<0.5	<0.5 <sup>e</sup>	NA	
11/18/2002	<b>110<sup>a</sup></b>	<b>21</b>	<b>1.0</b>	<0.5	<0.5	<0.5 <sup>e</sup>	NA	
2/20/2003	<50	<b>2.5</b>	<0.5	<0.5	<0.5	<0.5 <sup>e</sup>	NA	
6/11/2003	<50	<0.5	<0.5	<0.5	<0.5	<0.5 <sup>e</sup>	NA	
4/3/2008 <sup>5</sup>	<b>7,600<sup>a</sup></b>	<b>2,400</b>	<b>58</b>	<b>250</b>	<b>170</b>	<100	<0.5	

**Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020, 8021B, or 8260B (µg/L)					EPA Method E200.8
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	Lead
MCL		N/A	1	150	700	1,750	13	15
<i>Drinking Water Source</i> <sup>1</sup>		100	1	40	30	20	5	15
MW-4	4/28/1994	<b>190<sup>b, c</sup></b>	<b>3.8</b>	<b>2.9</b>	<b>2.1</b>	<b>3.1</b>	NA	NA
	7/27/1994	<b>180<sup>a</sup></b>	<b>15</b>	<b>9.2</b>	<b>7.6</b>	<b>28</b>	NA	NA
	10/27/1994	<b>130<sup>a</sup></b>	<b>8.6</b>	<b>6.6</b>	<b>4.5</b>	<b>17</b>	NA	NA
	1/26/1995	<b>110</b>	<b>6.5</b>	<b>1.2</b>	<b>1.8</b>	<b>11</b>	NA	NA
	4/13/1995	<b>82</b>	<b>3.9</b>	ND	ND	<b>2.5</b>	NA	NA
	7/21/1995	<b>130</b>	<b>8.8</b>	<b>1.3</b>	<b>4.5</b>	<b>7.6</b>	NA	NA
	10/25/1995	<b>95</b>	<b>6.6</b>	<b>1.7</b>	<b>4.3</b>	<b>7.0</b>	NA	NA
	1/21/1997	NS	NS	NS	NS	NS	NS	NA
	11/12/1998	NS	NS	NS	NS	NS	NS	NA
	1/16/2001	NA	NA	NA	NA	NA	NA	NA
	6/27/2002	NA	NA	NA	NA	NA	NA	NA
	11/18/2002	NA	NA	NA	NA	NA	NA	NA
	2/20/2003	NA	NA	NA	NA	NA	NA	NA
	6/11/2003	NS	NS	NS	NS	NS	NS	NA
4/3/2008 <sup>5</sup>	<b>130<sup>f</sup></b>	<b>1.6</b>	<0.5	<b>0.89</b>	<b>0.85</b>	<5.0	<0.5	

**Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020, 8021B, or 8260B (µg/L)					EPA Method E200.8
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	Lead
MCL		N/A	1	150	700	1,750	13	15
<i>Drinking Water Source</i> <sup>1</sup>		100	1	40	30	20	5	15
MW-5	4/28/1994	<b>30,000<sup>a</sup></b>	<b>4,000</b>	<b>3,000</b>	<b>810</b>	<b>3,500</b>	NA	NA
	7/27/1994	<b>9,300<sup>a</sup></b>	<b>2,000</b>	<b>800</b>	<b>290</b>	<b>940</b>	NA	NA
	10/27/1994	<b>15,000<sup>a</sup></b>	<b>2,700</b>	<b>1,300</b>	<b>420</b>	<b>1,100</b>	NA	NA
	1/26/1995	<b>7,900<sup>a</sup></b>	<b>2,100</b>	<b>680</b>	<b>240</b>	<b>860</b>	NA	NA
	4/13/1995	<b>7,900<sup>a</sup></b>	<b>2,400</b>	<b>580</b>	<b>340</b>	<b>630</b>	NA	NA
	7/21/1995	<b>11,000<sup>a</sup></b>	<b>3,400</b>	<b>760</b>	<b>610</b>	<b>1,200</b>	NA	NA
	10/25/1995	<b>13,000<sup>a</sup></b>	<b>2,900</b>	<b>830</b>	<b>570</b>	<b>1,100</b>	NA	NA
	1/21/1997	<b>2,600<sup>a</sup></b>	<b>750</b>	<b>65</b>	<b>1,860</b>	<b>280</b>	<5	NA
	11/12/1998	<50	<0.5	<0.5	<0.5	<0.5	<5	NA
	1/16/2001	<50	<b>11</b>	<0.5	<0.5	<b>0.82</b>	<5 <sup>e</sup>	NA
	6/27/2002	<50	<0.5	<0.5	<0.5	<0.5	<0.5 <sup>e</sup>	NA
	11/18/2002	<b>130<sup>a</sup></b>	<b>17</b>	<b>3.8</b>	<b>2.1</b>	<b>16</b>	<0.5 <sup>e</sup>	NA
	2/20/2003	<50	<b>5.6</b>	<b>0.51</b>	<0.5	<b>0.68</b>	<0.5 <sup>e</sup>	NA
	6/11/2003	<b>170<sup>a</sup></b>	<b>48</b>	<0.5	<0.5	<b>1.4</b>	<0.5 <sup>e</sup>	NA
4/3/2008 <sup>5</sup>	<b>31,000<sup>a</sup></b>	<b>490</b>	<b>3,400</b>	<b>1,600</b>	<b>5,300</b>	<250	<0.5	

**Table II, Summary of Groundwater Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020, 8021B, or 8260B (µg/L)					EPA Method E200.8
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	Lead
MCL		N/A	1	150	700	1,750	13	15
<i>Drinking Water Source</i> <sup>1</sup>		100	1	40	30	20	5	15

- Notes:
- ug/L = micrograms per liter
  - TPH = Total Petroleum Hydrocarbons
  - EPA = Environmental Protection Agency
  - MTBE = Methyl *tert*-Butyl Ether
  - <sup>1</sup> = From Table A; RWQCB Environmental Screening Levels (ESLs); Groundwater IS a Current or Potential Source of Drinking Water
  - <sup>2</sup> = Initial sampling and reporting by Groundwater Technology, Inc.
  - <sup>3</sup> = Initial sampling and reporting by Environmental Science & Engineering, Inc.
  - <sup>4</sup> = Initial sampling and reporting by Geo Plexus, Inc.
  - <sup>5</sup> = Initial sampling and reporting by Blymyer Engineers, Inc.
  - N/A = Not applicable
  - NA = Not analyzed
  - NS = Not sampled
  - <x = Analyte not detected at reporting limit x
  - <sup>a</sup> = Laboratory note indicates the unmodified or weakly modified gasoline is significant.
  - <sup>b</sup> = Laboratory note indicates heavier gasoline range compounds are significant (aged gas?).
  - <sup>c</sup> = Laboratory note indicates gasoline range compounds are significant with no recognizable pattern.
  - <sup>d</sup> = Laboratory note indicates that lighter gasoline range compounds (the most mobile fraction) are significant.
  - <sup>e</sup> = Analysis conducted by EPA Method 8260. See also Table III.
  - <sup>f</sup> = Laboratory note indicates that one to a few isolated non-target peaks are present.

**Bold results indicate detectable analyte concentrations.**

Note: Shaded cell indicates that detected concentration exceeds *Drinking Water* ESL

**Table III, Summary of Groundwater Sample Fuel Oxygenate Analytical Results  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Sample Date	EPA Method 8260B (ug/L)								
		TAME	TBA	EBD	EDC	DIPE	Ethanol	ETBE	Methanol	MTBE
<i>Drinking Water Source <sup>1</sup></i>		NV	12	0.05	0.5	NV	50,000	NV	NV	5
MW-1	1/16/2001	<5.0	<25	<5.0	<5.0	<5.0	NA	<5.0	NA	<5.0
	6/27/2002	<5.0	<50	<5.0	<5.0	<5.0	NA	<5.0	NA	<5.0
	11/18/2002	NA	NA	<2.5	<2.5	NA	NA	NA	NA	<2.5
	2/20/2003	NA	NA	<0.5	<0.5	NA	NA	NA	NA	<0.5
	6/11/2003	NA	NA	<2.5	<2.5	NA	NA	NA	NA	<2.5
	4/4/2008	<1.0	<4.0	<1.0	<1.0	<1.0	<100	<1.0	<1,000	<1.0
MW-2	1/16/2001	<30	<150	<30	<30	<30	NA	<30	NA	<30
	6/27/2002	<5.0	<5.0	<5.0	<b>6.1</b>	<5.0	NA	<5.0	NA	<5.0
	11/18/2002	NA	NA	<12	<12	NA	NA	NA	NA	<2.5
	2/20/2003	NA	NA	<5.0	<5.0	NA	NA	NA	NA	<5.0
	6/11/2003	NA	NA	<25	<25	NA	NA	NA	NA	<25
	4/4/2008	<2.5	<10	<2.5	<2.5	<2.5	<250	<2.5	<2,500	<2.5
MW-3	1/16/2001	<1.0	<5.0	<1.0	<b>1.4</b>	<1.0	NA	<1.0	NA	<1.0
	6/27/2002	<0.5	<5.0	<0.5	<0.5	<0.5	NA	<0.5	NA	<0.5
	11/18/2002	NA	NA	<0.5	<0.5	NA	NA	NA	NA	<0.5
	2/20/2003	NA	NA	<0.5	<0.5	NA	NA	NA	NA	<0.5
	6/11/2003	NA	NA	<0.5	<0.5	NA	NA	NA	NA	<0.5
	4/4/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
MW-4	4/4/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5

**Table III, Summary of Groundwater Sample Fuel Oxygenate Analytical Results  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Sample Date	EPA Method 8260B (ug/L)								
		TAME	TBA	EBD	EDC	DIPE	Ethanol	ETBE	Methanol	MTBE
<i>Drinking Water Source <sup>1</sup></i>		NV	12	0.05	0.5	NV	50,000	NV	NV	5
MW-5	1/16/2001	<1.0	<5.0	<1.0	<1.0	<1.0	NA	<1.0	NA	<1.0
	6/27/2002	<0.5	<5.0	<0.5	<0.5	<0.5	NA	<0.5	NA	<0.5
	11/18/2002	NA	NA	<0.5	<0.5	NA	NA	NA	NA	<0.5
	2/20/2003	NA	NA	<0.5	<0.5	NA	NA	NA	NA	<0.5
	6/11/2003	NA	NA	<0.5	<0.5	NA	NA	NA	NA	<0.5
	4/4/2008	<10	<40	<10	<10	<10	<1,000	<10	<10,000	<10

Notes: TAME = Methyl tert-Amyl Ether  
TBA = tert-Butyl Alcohol  
EDB = 1,2-Dibromoethane  
EDC or 1,2-DCA = 1,2-Dichloroethane  
DIPE = Di-isopropyl ether  
ETBE = Ethyl tert-butyl ether  
MTBE = Methyl tert-butyl ether  
(µg/L) = Micrograms per liter  
NV = No value  
NA = Not analyzed

<sup>1</sup> = From Table A; RWQCB Environmental Screening Levels (ESLs); Groundwater IS a Current or Potential Source of Drinking Water  
Bold results indicate detectable analyte concentrations.

**Table IV, Summary of Grab Groundwater Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
MCL		N/A	1	150	700	1,750	13
TABLE A. ESLs for Current or Potential Drinking Water		100	1	40	30	20	5
HP-1	4/23/1993	<50	<0.5	<0.5	<0.5	<0.5	NA
HP-2	4/23/1993	<50	<0.5	<0.5	<0.5	<0.5	NA
EB3-WSIA	10/15/1993	<b>120,000<sup>a</sup></b>	<b>9,600</b>	<b>20,000</b>	<b>3,400</b>	<b>14,000</b>	NA
EB5-WSIA	10/15/1993	<b>83,000<sup>a</sup></b>	<b>3,900</b>	<b>15,000</b>	<b>3,100</b>	<b>13,000</b>	NA
EB8-WS1	1/21/1997	<b>25,000<sup>a</sup></b>	<b>2,600</b>	<b>3,200</b>	<b>780</b>	<b>3,600</b>	<80
EB10-WS1	1/21/1997	<b>81,000<sup>a, b</sup></b>	<b>13,000</b>	<b>12,000</b>	<b>3,300</b>	<b>8,000</b>	<370
EB11-WS1	1/21/1997	<b>49,000<sup>a</sup></b>	<b>6,900</b>	<b>6,000</b>	<b>2,100</b>	<b>4,600</b>	<180
EB12-WS1	1/21/1997	<b>38,000<sup>a, c</sup></b>	<b>1,400</b>	<b>1,400</b>	<b>1,800</b>	<b>7,400</b>	<b>110</b>
P1-WS1	1/21/1997	<b>74,000<sup>a, c</sup></b>	<b>1,100</b>	<b>5,800</b>	<b>3,800</b>	<b>18,000</b>	<78
P2-WS1	1/21/1997	<b>6,800<sup>a</sup></b>	<b>2,200</b>	<b>290</b>	<b>310</b>	<b>560</b>	<10
P3-WS1	1/21/1997	<b>220<sup>a</sup></b>	<b>1.9</b>	<b>17</b>	<b>10</b>	<b>49</b>	<5.0
GP1W	4/29/2008	<b>70,000<sup>c, d</sup></b>	<b>6,800</b>	<b>6,600</b>	<b>2,300</b>	<b>12,000</b>	<500
GP2W	4/29/2008	<b>910<sup>a, d, f</sup></b>	<b>0.69</b>	<b>2.9</b>	<b>30</b>	<b>64</b>	<5.0
GP3W	4/29/2008	<50	<0.5	<0.5	<0.5	<0.5	<5.0
GP4W	4/29/2008	<b>46,000<sup>c, d</sup></b>	<b>570</b>	<b>3,200</b>	<b>1,500</b>	<b>7,500</b>	<500
GP5W	4/29/2008	<b>12,000<sup>c, d</sup></b>	<b>140</b>	<b>480</b>	<b>270</b>	<b>1,100</b>	<60
GP6W	4/29/2008	<b>22,000<sup>c, d</sup></b>	<b>920</b>	<b>1,600</b>	<b>900</b>	<b>3,500</b>	<170
GP7W	4/30/2008	<b>22,000<sup>c, d</sup></b>	<b>2,600</b>	<b>320</b>	<b>810</b>	<b>2,600</b>	<180
GP8W	5/1/2008	<b>140,000<sup>c, d, e</sup></b>	<b>9,000</b>	<b>20,000</b>	<b>4,300</b>	<b>21,000</b>	<650
GP9W	5/1/2008	<b>550<sup>c, d</sup></b>	<b>53</b>	<b>0.52</b>	<b>2.1</b>	<b>25</b>	<5.0
GP10W	4/30/2008	<b>11,000<sup>c, d</sup></b>	<b>1,900</b>	<b>490</b>	<b>480</b>	<b>770</b>	<100
GP11W	4/30/2008	<b>42,000<sup>c, d</sup></b>	<b>1,900</b>	<b>4,200</b>	<b>1,700</b>	<b>7,600</b>	<452
GP12W	4/30/2008	<b>61,000<sup>c, d</sup></b>	<b>4,500</b>	<b>11,000</b>	<b>1,700</b>	<b>7,700</b>	<500
GP13W	4/30/2008	<b>6,200<sup>c, d</sup></b>	<b>220</b>	<b>53</b>	<b>150</b>	<b>440</b>	<10
GP14W	4/30/2008	<b>300<sup>c, d</sup></b>	<b>46</b>	<b>1.9</b>	<b>19</b>	<b>11</b>	<5.0
GP15W	4/30/2008	<50 <sup>d</sup>	<0.5	<b>0.69</b>	<0.5	<b>1.1</b>	<5.0
GP16W	5/1/2008	<50 <sup>d</sup>	<0.5	<0.5	<0.5	<0.5	<5.0
GP17W	5/1/2008	<50 <sup>d</sup>	<0.5	<b>1.7</b>	<0.5	<b>2</b>	<5.0

**Table IV, Summary of Grab Groundwater Sample Hydrocarbon Analytical Results  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Sample Date	Modified EPA Method 8015 (µg/L)	EPA Method 8020 or 8021B (µg/L)				
		TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
MCL		N/A	1	150	700	1,750	13
TABLE A. ESLs for Current or Potential Drinking Water		100	1	40	30	20	5
GP18W	5/1/2008	<50 <sup>d</sup>	<0.5	<b>2.1</b>	<b>0.79</b>	<b>4</b>	<5.0
GP19W	5/1/2008	<b>85<sup>d, g</sup></b>	<0.5	<b>0.80</b>	<0.5	<0.5	<5.0
GP20W	5/1/2008	<50 <sup>d</sup>	<0.5	<0.5	<0.5	<0.5	<5.0
GP21W	5/2/2008	<b>9,400<sup>c, d</sup></b>	<b>560</b>	<b>1,400</b>	<b>260</b>	<b>1,300</b>	<50
GP22W	5/2/2008	<b>3,900<sup>c, d</sup></b>	<b>36</b>	<b>160</b>	<b>120</b>	<b>610</b>	<25
GP23W	5/2/2008	<b>16,000<sup>c, d</sup></b>	<b>830</b>	<b>1,900</b>	<b>540</b>	<b>2,600</b>	<90
GP24W	5/2/2008	<b>110,000<sup>c, d, e</sup></b>	<b>6,500</b>	<b>4,200</b>	<b>3,100</b>	<b>13,000</b>	<450

- Notes:
- ug/L = micrograms per liter
  - TPH = Total Petroleum Hydrocarbons
  - EPA = Environmental Protection Agency
  - MTBE = Methyl *tert*-Butyl Ether
  - RWQCB = California Regional Water Quality Control Board, San Francisco Bay Region
  - ESL = Environmental Screening Level
  - N/A = Not applicable
  - NA = Not analyzed
  - RBSL = Risk Based Screening Level
  - <x = Analyte not detected at reporting limit x
  - <sup>a</sup> = Laboratory note indicates that heavier gasoline range compounds are significant (aged gasoline?).
  - <sup>b</sup> = Laboratory note indicates no recognizable pattern..
  - <sup>c</sup> = Laboratory note indicates unmodified or weakly modified gasoline is significant.
  - <sup>d</sup> = Laboratory note indicates the liquid sample contains greater than ~1% sediment.
  - <sup>e</sup> = Laboratory note indicates a lighter than water immiscible sheen / product is present.
  - <sup>f</sup> = Laboratory note indicates no recognizable pattern.
  - <sup>g</sup> = Laboratory note indicates that one to a few isolated non-target peaks are present (Pers. com. May 19, 2008 is predominately PCE then TCE).

Bold results indicate detectable analyte concentrations.

Note: Shaded cell indicates that detected concentration exceeds ESL



**Table V, Summary of Grab Groundwater Sample Fuel Oxygenate Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	EPA Method 8260B (ug/L)								
		TAME	TBA	EBD	EDC	DIPE	Ethanol	ETBE	Methanol	MTBE
TABLE A. ESLs; Groundwater IS a Current or Potential Source of Drinking Water		NV	12	0.05	0.5	NV	50,000	NV	NV	5
GP1W <sup>a, b</sup>	4/29/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP2W <sup>a</sup>	4/29/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP3W <sup>a</sup>	4/29/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP4W <sup>a, b</sup>	4/29/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP5W <sup>a</sup>	4/29/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP6W <sup>a</sup>	4/29/2008	<5.0	<b>24</b>	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP7W <sup>a, b</sup>	4/30/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP8W <sup>a, b, c</sup>	5/1/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP9W <sup>a</sup>	5/1/2008	<0.5	<b>7.7</b>	<0.5	<b>1.1</b>	<0.5	<50	<0.5	<500	<b>1.2</b>
GP10W <sup>a, b</sup>	4/30/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP11W <sup>a, b</sup>	4/30/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP12W <sup>a, b</sup>	4/30/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP13W <sup>a</sup>	4/30/2008	<0.5	<b>8.9</b>	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP14W <sup>a</sup>	4/30/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP15W <sup>a</sup>	4/30/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP16W <sup>a</sup>	5/1/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP17W <sup>a</sup>	5/1/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP18W <sup>a</sup>	5/1/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP19W <sup>a</sup>	5/1/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5

**Table V, Summary of Grab Groundwater Sample Fuel Oxygenate Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Sample Date	EPA Method 8260B (ug/L)								
		TAME	TBA	EBD	EDC	DIPE	Ethanol	ETBE	Methanol	MTBE
TABLE A. ESLs; Groundwater IS a Current or Potential Source of Drinking Water		NV	12	0.05	0.5	NV	50,000	NV	NV	5
GP20W <sup>a</sup>	5/1/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP21W <sup>a</sup>	5/2/2008	<0.5	<2.0	<b>0.65</b>	<0.5	<0.5	<50	<0.5	<500	<0.5
GP22W <sup>a</sup>	5/2/2008	<0.5	<2.0	<0.5	<0.5	<0.5	<50	<0.5	<500	<0.5
GP23W <sup>a, b</sup>	5/2/2008	<5.0	<20	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0
GP24W <sup>a, c</sup>	5/2/2008	<5.0	<b>75</b>	<5.0	<5.0	<5.0	<500	<5.0	<5,000	<5.0

Notes:

ESLs = Environmental Screening Levels

TAME = Methyl tert-Amyl Ether

TBA = tert-Butyl Alcohol

EDB = 1,2-Dibromoethane

EDC or 1,2-DCA = 1,2-Dichloroethane

DIPE = Di-isopropyl ether

ETBE = Ethyl tert-butyl ether

MTBE = Methyl tert-butyl ether

(µg/L) = Micrograms per liter

NV = No value

NA = Not analyzed

<sup>a</sup> = Laboratory note indicates the liquid sample contains greater than ~1% sediment.

<sup>b</sup> = Laboratory note indicates an analyte was detected below the quantitation limits

<sup>c</sup> = Laboratory note indicates a lighter than water immiscible sheen / product is present.

Bold results indicate detectable analyte concentrations.

Note: Shaded cell indicates that detected concentration exceeds ESL

**Table VI, Summary of Soil Sample Hydrocarbon Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Depth (ft)	Sample Date	Modified EPA Method 8015 (mg/Kg)	EPA Method 8020 or 8021B (mg/Kg)				
			TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
TABLE A. ESLs for <b>Shallow Soils (&lt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023
TABLE C. ESLs for <b>Deep Soils (&gt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023
MW-1-10	10	1/15/1987	<b>24</b>	<b>2.9</b>	<b>3.6</b>	NA	<b>1.8</b>	NA
MW-1-15	15	1/15/1987	<1.0	<0.1	<0.1	NA	<0.1	NA
MW-2-5	5	1/15/1987	<1.0	<0.1	<0.1	NA	<0.1	NA
MW-2-10	10	1/15/1987	<b>350</b>	<b>14</b>	<b>22</b>	NA	<b>23</b>	NA
MW-3-10	10	1/15/1987	<b>200</b>	<b>9.8</b>	<b>16</b>	NA	<b>16</b>	NA
MW-3-15	15	1/15/1987	<1.0	<0.1	<0.1	NA	<0.1	NA
SB-5-10	10	1/15/1987	<b>6.5</b>	<0.1	<b>0.22</b>	NA	<0.1	NA
EB1-S2	8.5	10/15/1993	<b>510<sup>b</sup></b>	<b>0.89</b>	<b>10</b>	<b>5.8</b>	<b>41</b>	NA
EB1-S3	11	10/15/1993	<b>2,300<sup>b</sup></b>	<b>22</b>	<b>190</b>	<b>57</b>	<b>280</b>	NA
EB2-2S	10	10/15/1993	<b>15,000<sup>a</sup></b>	<b>84</b>	<b>710</b>	<b>260</b>	<b>1,400</b>	NA
EB2-S3	11.5	10/15/1993	<b>200<sup>a</sup></b>	<b>4.3</b>	<b>15</b>	<b>3.9</b>	<b>20</b>	NA
EB3-S2	10	10/15/1993	<b>2,200<sup>a</sup></b>	<b>9.4</b>	<b>71</b>	<b>42</b>	<b>200</b>	NA
EB3-S3	12.5	10/15/1993	<b>610<sup>b,c</sup></b>	<b>1.2</b>	<b>3.2</b>	<b>4.5</b>	<b>2.9</b>	NA
EB4-S2	8	10/15/1993	<b>4,900<sup>a</sup></b>	<b>32</b>	<b>230</b>	<b>84</b>	<b>440</b>	NA
EB4-S3	10.5	10/15/1993	<b>7,600<sup>a</sup></b>	<b>60</b>	<b>390</b>	<b>130</b>	<b>630</b>	NA
EB5-S2	9	10/15/1993	<b>1,800<sup>b</sup></b>	<2.5	<b>22</b>	<b>27</b>	<b>140</b>	NA
EB5-S3	11.5	10/15/1993	<b>14<sup>b</sup></b>	<b>0.021</b>	<b>1.5</b>	<b>0.49</b>	<b>2.5</b>	NA
EB6-S2	8.5	10/15/1993	<b>6,800<sup>a</sup></b>	<b>20</b>	<b>230</b>	<b>100</b>	<b>590</b>	NA
EB7-S2	6.5	10/15/1993	<50	<0.5	<0.5	<0.5	<0.5	NA
EB7-S3	8.5	10/15/1993	<b>1,000<sup>b</sup></b>	<b>3.8</b>	<b>45</b>	<b>21</b>	<b>110</b>	NA
MW4-S1	4.5	4/20/1994	<50 <sup>b</sup>	<0.5	<0.5	<0.5	<b>0.013</b>	NA
MW4-S2	9	4/20/1994	<b>9.7<sup>a</sup></b>	<b>1.1</b>	<b>0.82</b>	<b>0.42</b>	<b>1.3</b>	NA
MW4-S3	14	4/20/1994	<50 <sup>b</sup>	<0.5	<b>0.008</b>	<0.5	<b>0.022</b>	NA
MW5-S1	4.5	4/20/1994	<50	<0.5	<0.5	<0.5	<0.5	NA
MW5-S2	9	4/20/1994	<b>1,100<sup>b,c</sup></b>	<b>12</b>	<b>43</b>	<b>20</b>	<b>93</b>	NA
MW5-S3	14	4/20/1994	<b>1.1<sup>b,c</sup></b>	<b>0.033</b>	<b>0.17</b>	<b>0.044</b>	<b>0.22</b>	NA
EB8-S2	9.5	1/21/1997	<b>2,000<sup>a</sup></b>	<b>8.4</b>	<b>83</b>	<b>44</b>	<b>210</b>	<4
EB8-S3	13.5	1/21/1997	<b>18<sup>a</sup></b>	<b>3.2</b>	<b>1.2</b>	<b>0.47</b>	<b>1.7</b>	<b>0.10</b>
EB9-S1	6.5	1/21/1997	<b>1.8<sup>a</sup></b>	<b>0.071</b>	<b>0.052</b>	<b>0.026</b>	<b>0.074</b>	<5

**Table VI, Summary of Soil Sample Hydrocarbon Analytical Results  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Depth (ft)	Sample Date	Modified EPA Method 8015 (mg/Kg)	EPA Method 8020 or 8021B (mg/Kg)				
			TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
TABLE A. ESLs for <b>Shallow Soils (&lt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023
TABLE C. ESLs for <b>Deep Soils (&gt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023
EB9-S2	9.5	1/21/1997	<b>1,300<sup>a</sup></b>	<b>7.1</b>	<b>54</b>	<b>29</b>	<b>130</b>	<4
EB10-S1	8.5	1/21/1997	<b>2,300<sup>a</sup></b>	<b>9.1</b>	<b>100</b>	<b>50</b>	<b>190</b>	<b>9.3</b>
EB11-S1	9.5	1/21/1997	<b>3,800<sup>b,d</sup></b>	<b>8.8</b>	<b>190</b>	<b>97</b>	<b>510</b>	<9
EB11-S2	12	1/21/1997	<b>13<sup>a</sup></b>	<b>1.1</b>	<b>1.6</b>	<b>0.47</b>	<b>1.4</b>	<0.1
EB12-S1	9.5	1/21/1997	<b>300<sup>b,d</sup></b>	<b>0.95</b>	<b>0.59</b>	<b>3.5</b>	<b>18</b>	<0.6
EB12-S2	12	1/21/1997	<b>1,300<sup>a</sup></b>	<b>9.4</b>	<b>23</b>	<b>35</b>	<b>130</b>	<b>6.2</b>
GP1-11.5	11.5	4/29/2008	<b>130<sup>e,f</sup></b>	<0.10	<b>0.29</b>	<0.10	<b>0.42</b>	<0.005
GP1-15	15	4/29/2008	<1.0	<0.005	<b>0.0081</b>	<b>0.0065</b>	<b>0.028</b>	<0.005
GP2-11	11	4/29/2008	<b>120<sup>b,f</sup></b>	<0.050	<b>0.87</b>	<b>0.43</b>	<b>1.2</b>	<0.010
GP2-13.5	13.5	4/29/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP3-6.75	6.75	4/29/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP3-11.5	11.5	4/29/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP4-11.5	11.5	4/29/2008	<b>2.7<sup>a</sup></b>	<b>0.14</b>	<b>0.052</b>	<b>0.072</b>	<b>0.17</b>	<0.005
GP4-14.5	14.5	4/29/2008	<b>99<sup>b,f</sup></b>	<b>0.48</b>	<b>1.4</b>	<b>1.0</b>	<b>4.5</b>	<0.020
GP5-11.5	11.5	4/29/2008	<b>4.6<sup>a</sup></b>	<b>0.12</b>	<b>0.078</b>	<b>0.14</b>	<b>0.48</b>	<0.005
GP5-19	19	4/29/2008	<b>1.5<sup>b</sup></b>	<0.005	<b>0.022</b>	<b>0.0069</b>	<b>0.032</b>	<0.005
GP6-11	11	4/29/2008	<b>130<sup>b,f</sup></b>	<b>0.11</b>	<b>1.0</b>	<b>1.1</b>	<b>5.4</b>	<0.10
GP7-8	8	4/30/2008	<b>390<sup>b,f</sup></b>	<b>0.84</b>	<b>2.2</b>	<b>4.3</b>	<b>18</b>	<0.050
GP7-19.5	19.5	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP8-8.5	8.5	5/1/2008	<b>1,100<sup>b,f</sup></b>	<0.10	<b>3.2</b>	<b>7.3</b>	<b>45</b>	<0.050
GP8-19.5	19.5	5/1/2008	<b>5.8<sup>b,f</sup></b>	<b>0.0091</b>	<b>0.067</b>	<b>0.048</b>	<b>0.21</b>	<0.005
GP9-7.5	7.5	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP9-11.25	11.25	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP10-7.5	7.5	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP10-19.5	19.5	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP11-6	6	4/30/2008	<1.0	<0.005	<b>0.011</b>	<b>0.0053</b>	<b>0.026</b>	<0.005
GP11-15.5	15.5	4/30/2008	<b>2,100<sup>b,f</sup></b>	<b>5.7</b>	<b>71</b>	<b>38</b>	<b>180</b>	<0.10
GP11-18	18	4/30/2008	<b>87<sup>b,f</sup></b>	<b>0.059</b>	<b>0.93</b>	<b>0.67</b>	<b>4.2</b>	<0.020
GP12-7.5	7.5	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005

**Table VI, Summary of Soil Sample Hydrocarbon Analytical Results  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Depth (ft)	Sample Date	Modified EPA Method 8015 (mg/Kg)	EPA Method 8020 or 8021B (mg/Kg)				
			TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
TABLE A. ESLs for <b>Shallow Soils (&lt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023
TABLE C. ESLs for <b>Deep Soils (&gt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023
GP12-11	11	4/30/2008	<b>4.7<sup>b,f</sup></b>	<b>0.015</b>	<b>0.21</b>	<b>0.067</b>	<b>0.32</b>	<0.005
GP12-15.5	15.5	4/30/2008	<1.0	<0.005	<b>0.0071</b>	<b>0.0051</b>	<b>0.025</b>	<0.005
GP13-7.25	7.25	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP13-11	11	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP13-14	14	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP14-7.5	7.5	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP14-11	11	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP15-7.5	7.5	4/30/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP16-7.5	7.5	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP16-10.5	10.5	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP17-7.5	7.5	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP17-11.5	11.5	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP18-7.5	7.5	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP18-10	10	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP19-7	7	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP20-8	8	5/1/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP21-7.5	7.5	5/2/2008	<b>2.1<sup>b,f</sup></b>	<b>0.006</b>	<b>0.028</b>	<b>0.012</b>	<b>0.065</b>	<0.005
GP21-15.5	15.5	5/2/2008	<1.0	<b>0.0064</b>	<b>0.022</b>	<b>0.0057</b>	<b>0.027</b>	<0.005
GP21-19.5	19.5	5/2/2008	<1.0	<0.005	<b>0.0092</b>	<0.005	<b>0.023</b>	<0.005
GP22-10.5	10.5	5/2/2008	<b>1,100<sup>e,f</sup></b>	<b>0.67</b>	<b>13</b>	<b>15</b>	<b>70</b>	<0.20
GP22-15.5	15.5	5/2/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005
GP23-7.5	7.5	5/2/2008	<b>53<sup>e,f</sup></b>	<0.050	<b>0.13</b>	<0.050	<b>0.37</b>	<0.005
GP23-11.5	11.5	5/2/2008	<b>1.9<sup>a</sup></b>	<b>0.062</b>	<b>0.041</b>	<b>0.043</b>	<b>0.18</b>	<0.005
GP23-16	16	5/2/2008	<b>2.0<sup>b</sup></b>	<0.005	<b>0.027</b>	<b>0.018</b>	<b>0.099</b>	<0.005
GP24-8.5	8.5	5/2/2008	<b>3,600<sup>b,f</sup></b>	<b>1.2</b>	<b>32</b>	<b>62</b>	<b>410</b>	<1.0
GP24-19.5	19.5	5/2/2008	<1.0	<0.005	<0.005	<0.005	<0.005	<0.005

**Table VI, Summary of Soil Sample Hydrocarbon Analytical Results  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Depth (ft)	Sample Date	Modified EPA Method 8015 (mg/Kg)	EPA Method 8020 or 8021B (mg/Kg)				
			TPH as Gasoline	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE
TABLE A. ESLs for <b>Shallow Soils (&lt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023
TABLE C. ESLs for <b>Deep Soils (&gt;3m)</b> ; Commercial / Industrial Land Use; Current or Potential Drinking Water			100	0.044	2.9	3.3	2.3	0.023

- Notes:
- ft = feet
  - mg/Kg = Milligrams per kilogram
  - TPH = Total Petroleum Hydrocarbons
  - MTBE = Methyl *tert*-Butyl Ether
  - NA = Not analyzed
  - RWQCB = California Regional Water Quality Control Board, San Francisco Bay Region
  - ESL = Environmental Screening Level
  - <x = Analyte not detected at reporting limit x
  - <sup>a</sup> = Laboratory note indicates the unmodified or weakly modified gasoline is significant.
  - <sup>b</sup> = Laboratory note indicates heavier gasoline range compounds are significant (aged gas?).
  - <sup>c</sup> = Laboratory note indicates that lighter gasoline range compounds (the most mobile fraction) are significant.
  - <sup>d</sup> = Laboratory note indicates gasoline range compounds have broad chromatographic peaks; biologically altered gasoline?
  - <sup>e</sup> = Laboratory note indicates strongly aged gasoline or diesel range compounds are significant.
  - <sup>f</sup> = Laboratory note indicates no recognizable pattern.
- Bold results indicate detectable analyte concentrations.  
Note: Shaded cell indicates that detected concentration exceeds ESL

**Table VII, Summary of Soil Sample Fuel Oxygenate Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Depth (ft)	Sample Date	EPA Method 8260B (mg/L)								
			TAME	TBA	EBD	EDC	DIPE	Ethanol	ETBE	Methanol	MTBE
TABLE A. ESLs; Groundwater IS a Current or Potential Source of Drinking Water			NV	12	0.05	0.5	NV	50,000	NV	NV	5
GP1-11.5	11.5	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP1-15	15	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP2-11	11	4/29/2008	<0.010	<0.01	<0.008	<0.008	<0.010	<0.50	<0.010	<5.0	<0.010
GP2-13.5	13.5	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP3-6.75	6.75	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP3-11.5	11.5	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP4-11.5	11.5	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP4-14.5	14.5	4/29/2008	<0.020	<0.20	<0.016	<0.016	<0.020	<1.0	<0.020	<10	<0.020
GP5-11.5	11.5	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP5-19	19	4/29/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP6-11	11	4/29/2008	<0.10	<1.0	<0.080	<0.080	<0.10	<5.0	<0.10	<50	<0.10
GP7-8	8	4/30/2008	<0.050	<0.50	<0.040	<0.040	<0.050	<2.5	<0.050	<25	<0.050
GP7-19.5	19.5	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP8-8.5	8.5	5/1/2008	<0.050	<0.50	<0.040	<0.040	<0.050	<2.5	<0.050	<25	<0.050
GP8-19.5	19.5	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP9-7.5	7.5	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP9-11.25	11.25	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP10-7.5	7.5	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP10-19.5	19.5	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP11-6	6	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005

**Table VII, Summary of Soil Sample Fuel Oxygenate Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Depth (ft)	Sample Date	EPA Method 8260B (mg/L)								
			TAME	TBA	EBD	EDC	DIPE	Ethanol	ETBE	Methanol	MTBE
TABLE A. ESLs; Groundwater IS a Current or Potential Source of Drinking Water			NV	12	0.05	0.5	NV	50,000	NV	NV	5
GP11-15.5	15.5	4/30/2008	<0.10	<1.0	<0.080	<0.080	<0.10	<5.0	<0.10	<50	<0.10
GP11-18	18	4/30/2008	<0.020	<0.20	<0.016	<0.016	<0.020	<1.0	<0.020	<10	<0.020
GP12-7.5	7.5	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP12-11	11	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP12-15.5	15.5	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP13-7.25	7.25	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP13-11	11	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP13-14	14	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP14-7.5	7.5	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP14-11	11	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP15-7.5	7.5	4/30/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP16-7.5	7.5	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP16-10.5	10.5	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP17-7.5	7.5	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP17-11.5	11.5	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP18-7.5	7.5	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP18-10	10	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP19-7	7	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP20-8	8	5/1/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP21-7.5	7.5	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005



**Table VII, Summary of Soil Sample Fuel Oxygenate Analytical Results**  
**BEI Job No. 207055, Good Chevrolet**  
**1630 Park Street, Alameda, California**

Well ID	Depth (ft)	Sample Date	EPA Method 8260B (mg/L)								
			TAME	TBA	EBD	EDC	DIPE	Ethanol	ETBE	Methanol	MTBE
TABLE A. ESLs; Groundwater IS a Current or Potential Source of Drinking Water			NV	12	0.05	0.5	NV	50,000	NV	NV	5
GP21-15.5	15.5	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP21-19.5	19.5	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP22-10.5	10.5	5/2/2008	<0.20	<2.0	<0.16	<0.16	<0.20	<10	<0.20	<100	<0.20
GP22-15.5	15.5	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP23-7.5	7.5	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP23-11.5	11.5	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP23-16	16	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005
GP24-8.5	8.5	5/2/2008	<1.0	<10	<0.80	<0.80	<1.0	<50	<1.0	<500	<1.0
GP24-19.5	19.5	5/2/2008	<0.005	<0.05	<0.004	<0.004	<0.005	<0.25	<0.005	<2.5	<0.005

Notes:

ESLs = Environmental Screening Levels

TAME = Methyl tert-Amyl Ether

TBA = tert-Butyl Alcohol

EDB = 1,2-Dibromoethane

EDC or 1,2-DCA = 1,2-Dichloroethane

DIPE = Di-isopropyl ether

ETBE = Ethyl tert-butyl ether

MTBE = Methyl tert-butyl ether

(µg/L) = Micrograms per liter

NV = No value

NA = Not analyzed

Bold results indicate detectable analyte concentrations.

Note: Shaded cell indicates that detected concentration exceeds ESL

**Table B-1, Summary of Groundwater Well Construction Details  
BEI Job No. 207055, Good Chevrolet  
1630 Park Street, Alameda, California**

Well ID	Installation Date	Bore Depth (feet, bgs)	Well Completion Depth (feet, bgs)	Screen Interval (feet, bgs)	Casing Diameter / Slot Size (inches)	Measured Depth (April 3, 2008) *	Intallation Consultant
MW-1	1/15/1987	20	20	5 - 20	2 / 0.020	15.63 / 16.03	GTI
MW-2	1/15/1987	20	20	5 - 20	2 / 0.020	18.22 / 18.22	GTI
MW-3	1/15/1987	20	20	5 - 20	2 / 0.020	15.10 / 15.16	GTI
MW-4	4/20/1994	23	23	8 - 23	2 / 0.010	22.48 / 22.50	GP
MW-5	4/20/1994	22	22	7 - 22	2 / 0.010	20.55 / 21.60	GP

Notes:           bgs = Below grade surface  
                  GTI = Groundwater Technology, Inc.  
                  GP = GeoPlexus, Inc.  
                  \* = Pre- / Post-redevelopment.  
Hard bottoms are reported for all wells. No previous total depth measurements are available.