



321 Court Street
Woodland California 95695
Tel (530) 406-1760
Fax (530) 406-1071
A, Haz 933586

RECEIVED

10:38 am, Dec 23, 2010

Alameda County
Environmental Health

November 3, 2010

Paresh C. Khatri
Hazardous Materials Specialist
Alameda County Environmental Health Services
1131 Harbor Bay Parkway, Suite 250
Alameda, CA 94502-6577

SUBJECT: Fuel Leak Case No. RO0000022
1310 Central Avenue
Alameda, CA
Report Submittal – Semi-Annual Groundwater Monitoring Report, Third Quarter 2010

Dear Mr. Khatri:

Please find enclosed the *Semi-Annual Groundwater Monitoring Report, Third Quarter 2010* prepared by Matriks for Nissan Saidian, Joe Zadik, and Leon Zektser

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document are true and correct to the best of my knowledge.

Please call me at 530-406-1760 or email thenderson@matrikscorp.com if you have any questions.

Sincerely,

A handwritten signature in blue ink, appearing to read "Tom Henderson", with a long horizontal flourish extending to the right.

Tom Henderson
President

SEMI-ANNUAL GROUNDWATER MONITORING REPORT
Third Quarter 2010

Alaska Gas
1310 Central Avenue
Alameda, California 94501
LOP Case No. RO0000022

PREPARED FOR:
Nissan Saidian
5733 Medallion Court
Castro Valley, California 94552

SUBMITTED TO:
Alameda County Environmental Health Services
Local Oversight Program
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502

November 3, 2010

Project No. 6022



PREPARED BY:
Matriks Corporation
321 Court Street
Woodland, California 95695

TABLE OF CONTENTS

PROFESSIONAL CERTIFICATION..... ii

ACRONYMS AND ABBREVIATIONS iii

INTRODUCTION 1

 Site Description and Physical Setting..... 1

 Site History..... 1

SCOPE OF WORK..... 4

METHODS AND PROCEDURES 5

 Groundwater Level Measurements..... 5

 Monitoring Well Purging and Sampling..... 5

RESULTS..... 5

 Groundwater Levels and Gradient..... 5

 Groundwater Analytical Results 6

 Geotracker Requirements..... 6

DISCUSSION 6

RECOMMENDATIONS 7

FIGURES

- Figure 1 Site Location Map
- Figure 2 Site Map
- Figure 3 Groundwater Elevation Contours
- Figure 4 Monitoring Well Hydrograph
- Figure 5 MW-1 TPH-g and Benzene Concentration Trends
- Figure 6 MW-3 TPH-g and Benzene Concentration Trends

TABLES

| | |
|---------|---|
| Table 1 | Well Construction Details |
| Table 2 | Groundwater Levels and Elevations |
| Table 3 | Third Quarter 2010 Groundwater Analytical Results |
| Table 4 | Historical Groundwater Analytical Results |

APPENDICES

| | |
|------------|------------------------------|
| Appendix A | Monitoring Well Purge Logs |
| Appendix B | Laboratory Analytical Report |

PROFESSIONAL CERTIFICATION

SEMI-ANNUAL GROUNDWATER MONITORING REPORT Third Quarter 2010

Alaska Gas
1310 Central Avenue
Alameda, California 94501
LOP Case No. RO0000022




Project No. 6022

Matriks Corporation prepared this document under the professional supervision of the person whose seal and signature appears below. No warranty, either expressed or implied, is made as to the professional advice presented herein. The analysis, conclusions, and recommendations contained in this document are based upon site conditions at the time of the investigation, which are subject to change.

The conclusions presented in this document are professional opinions based solely upon visual observations of the site and vicinity, and interpretation of available information as described in this report. The limited scope of services performed in execution of this investigation may not be appropriate to satisfy the needs, or requirements of other regulatory agencies, or of other users. Any use or reuse of this document or its findings, conclusions or recommendations presented herein is at the sole risk of said user.

A blue ink signature of Tom Henderson, consisting of a stylized first name and a full last name, written over a horizontal line.

Tom Henderson
President



Fred Mueller,
Senior Engineer

ACRONYMS AND ABBREVIATIONS

| | |
|------------|--|
| ACEHS | Alameda County Environmental Health Services |
| AEI | All Environmental, Inc. |
| amsl | above mean sea level |
| ASE | Aqua Science Engineers, Inc. |
| BTEX | benzene, toluene, ethyl-benzene, xylenes |
| COC | chain-of-custody |
| DCA | 1,2-dichloroethane |
| DIPE | di-isopropyl ether |
| EDB | ethylene di-bromide |
| EDF | electronic data file |
| ESL | Environmental Screening Level |
| EtBE | ethyl tert-butyl ether |
| FS/CAP | Feasibility Study/Corrective Action Plan |
| Geotracker | Geographical Information Management System |
| Matriks | Matriks Corporation |
| MtBE | methyl tert-butyl ether |
| O&G | oil and grease |
| µg/L | micrograms per liter |
| mg/Kg | milligrams per kilogram |
| ml | milliliter |
| MW | monitoring well |
| PDF | portable document format |
| RWQCB | Regional Water Quality Control Board |
| SC | specific conductance |
| tAME | tert-amyl methyl ether |
| tBA | tert butyl alcohol |
| UST | underground storage tank |
| VOA | volatile organic analysis |

INTRODUCTION

This report presents the results of the second semi-annual groundwater monitoring event for 2010 conducted by Matriks at Alaska Gas (the "Site"), located at 1310 Central Avenue in Alameda, California. The semi-annual groundwater monitoring event (monitoring event) described in this report was conducted on September 30, 2010 and is part of an ongoing subsurface investigation of petroleum hydrocarbons in soil or groundwater that was caused by an unauthorized release of petroleum fuels from the UST system (tanks, associated piping and dispensers) formerly located at the Site. Matriks is conducting this investigation on behalf of the responsible parties, Mr. Leon Zektser, Mr. Nissan Saidian, and Mr. Joe Zadik. The ACEHS is the lead regulatory agency overseeing Site investigation and remediation and the ACEHS case number is RO0000022. The semi-annual groundwater monitoring program consists of the collection and laboratory analysis of groundwater samples from five groundwater monitoring wells in order to assess concentrations of petroleum hydrocarbon compounds in shallow groundwater.

Site Description and Physical Setting

The Site is currently a retail gasoline fueling station located in an area of mixed commercial and residential properties in the south-central part of the island of Alameda. The Site is located at the intersection of Encinal Avenue, Sherman Street, and Central Avenue. A Site location map is shown on **Figure 1** and a Site plan showing physical features and groundwater monitoring well locations is shown on **Figure 2**.

The Site is relatively flat and the investigation area has a surface elevation of approximately 25 feet amsl. San Francisco Bay and the Alameda Estuary are located approximately one-half mile to the south.

Site History

In May 1996, Petrotek removed three gasoline USTs including one 10,000-gallon, one 7,500-gallon and one 5,000-gallon UST from the western corner of the Site. A 500-gallon waste oil UST adjacent to the building, was also removed from the southern portion of the Site. Fuel dispensers and associated product piping were also removed.

Free-phase petroleum hydrocarbons were observed floating on the groundwater surface in the gasoline UST excavation following removal of the USTs. According to the laboratory analysis, a groundwater sample collected from the gasoline UST excavation contained 2,800 micrograms per liter ($\mu\text{g}/\text{L}$) of total petroleum hydrocarbons as gasoline (TPH-g) and 100 $\mu\text{g}/\text{L}$ benzene. Soil samples collected from the same excavation contained up to 5,000 milligrams per kilogram (mg/Kg) of TPH-g and 31mg/Kg benzene. Soil samples collected beneath the former dispenser

island contained up to 6,800 mg/Kg TPH-g and 63 mg/Kg benzene. A ground water sample collected in the waste oil UST excavation contained 35,000 µg/L of total petroleum hydrocarbons as diesel (TPH-d) and motor oil range hydrocarbons, and 1,300 µg/L of TPH-g. These results are documented in a *UST Closure Report* submitted by Petrotek in May 1996.

Petrotek reportedly excavated and disposed of approximately 600 cubic yards of petroleum hydrocarbon-impacted soil from the UST excavations. It does not appear that confirmation soil samples were collected following removal of the petroleum hydrocarbon-impacted soil. Approximately 15,000 gallons of ground water were also removed from the excavations, treated and discharged to the sanitary sewer. Two new gasoline USTs, dispensers and product piping were installed in the same UST excavation after the petroleum hydrocarbon-impacted soil and ground water were removed.

In November 1998, All Environmental Inc. (AEI) advanced 14 soil borings on the Site and collected soil and groundwater samples for analysis. Up to 5,900 mg/Kg of TPH-g was detected in soil samples collected from the borings. Up to 120,000 µg/L TPH-g and 7,200 µg/L benzene were detected in groundwater samples from the borings.

In October 1999, HerSchy Environmental installed three monitoring wells at the Site. The initial sampling yielded up to 43,000 µg/L TPH-g, 8,700 µg/L total petroleum hydrocarbons as diesel (TPH-d), 480 µg/L benzene, and 1,600 µg/L methyl tert-butyl ether (MtBE) were detected in groundwater samples from the wells. The groundwater flow direction was southwesterly under a gradient of 0.0085. Well construction details are presented in **Table 1**.

On May 16, 2000, Aqua Science Engineers (ASE) began quarterly monitoring at the Site. Groundwater samples collected from MW-1 contained 20,000 µg/L TPH-g, 38 µg/L benzene, 6.3 µg/L toluene, 740 µg/L ethyl benzene, and 1,600 µg/L total xylenes. No MtBE or other oxygenates were detected in the sample from MW-1. No hydrocarbons were detected in the groundwater sample taken from MW-2. The groundwater sample from MW-3 contained 17,000 µg/L TPH-g, 2,800 µg/L benzene, 60 µg/L toluene, 380 µg/L ethyl benzene, 190 µg/L total xylenes, 990 µg/L MtBE, 9.1 µg/L tert-amyl methyl ether (TAME), and 350 µg/L tert butyl alcohol (tBA).

On July 28, 2000, ASE advanced 12 Geoprobe borings (borings BH-A through BH-L) to further delineate the lateral and vertical extent of petroleum hydrocarbons and collected soil and grab groundwater samples from each borings. Laboratory analysis detected 0.00061 mg/Kg of MtBE in a soil samples collected from 3.0 feet (ft) below ground surface in boring BH-J. There were no petroleum hydrocarbons or oxygenates detected in soil samples from the other 11 borings, however, petroleum hydrocarbons and oxygenates were detected in grab groundwater samples collected from borings BH-A, B, C, D, I, J, K, and L.

In December 2002, ASE conducted an investigation to assess whether subsurface utility line trenches may provide a groundwater movement pathway. ASE concluded that it did not appear that the utility line trenches act as groundwater movement pathways. This conclusion

was based on ASE's assumption that the utility line trench backfill material is native sandy soil and that the highest concentrations of petroleum hydrocarbons in the 12 Geoprobe borings soil samples were located beyond the utility line trenches. Although ASE concluded that the utility line trenches did not provide a groundwater movement pathway, the ACEHS requested that water samples be collected from the sewer in one of the trenches to assess whether petroleum hydrocarbon-impacted groundwater may have entered the sewer line through seams or cracks.

In January 2004, ASE drilled four additional soil borings, BH-M through BH-P and the soil samples collected from each boring contained concentrations of TPH-d, with the highest concentration of 68 mg/Kg detected in BH-M. No TPH-d, BTEX or oxygenates were detected in any of the other soil samples. The groundwater samples collected from the borings contained TPH-d concentrations as high as 170 µg/L and the groundwater sample collected from boring BH-O also contained 19 µg/L MtBE. None of the other groundwater samples contained detectable concentrations of TPH-g, BTEX or oxygenates. Groundwater samples were also collected from the sewer line beneath Central Avenue, both up gradient and down gradient of the Site. Low concentrations of TPH-g were detected in both samples. No BTEX or oxygenates were detected in either of these samples. The source of the TPH-g was not conclusively identified.

In December 2005, ASE conducted a records search at the Alameda City Public Works Agency and the California Department of Water Resources to identify water wells with ½ mile radius of the Site. A total of 25 wells were located within the search radius. The results included three domestic wells, 10 irrigation wells, one industrial well, two cathodic protection wells, four groundwater monitoring wells, and five vapor extraction wells. The nearest well is located more than 1,000 feet east of the Site. The nearest, potentially down gradient, well is located approximately 1,260 feet northwest of the Site. Based on the records search, ASE proposed additional soil and groundwater assessment for the Site.

In April 2006, ASE advanced two additional borings and installed two groundwater monitoring wells. Borings BH-Q, BH-R and monitoring wells MW-4 and MW-5 were installed using a drill rig equipped with an 8-inch hollow-stem auger. Petroleum hydrocarbons were detected by laboratory analysis at a concentration of 11 mg/Kg TPH-d in a soil sample from BH-Q and 1.7 mg/Kg TPH-d in a soil sample from the boring MW-5. The laboratory noted that the hydrocarbons reported as TPH-D in each sample did not exhibit a typical diesel chromatogram pattern. None of the soil samples contained detectable concentrations of TPH-g, BTEX or oxygenates.

Groundwater samples collected from BH-Q and BH-R contained detectable concentrations of petroleum hydrocarbon of 220 µg/L TPH-d and 770 µg/L TPH-d, respectively. Similar to the soil samples, the laboratory noted the hydrocarbons reported as TPH-d did not exhibit a typical diesel chromatogram pattern. Based on the results of this investigation, ASE recommended no further delineation of the extent of petroleum hydrocarbons in soil or groundwater.

From April 2006 to March 2009, groundwater monitoring well samples have been collected and analyzed on a quarterly basis. The monitoring schedule for the Site has been reduced to a semi-annual basis as directed in a letter from the ACEHS dated, July 24, 2009. Groundwater monitoring takes place during the first and third quarters.

In June 2008, the Site owners contracted with Matriks to conduct groundwater monitoring and prepare for further Site remediation.

Matriks submitted the *Site Investigation Workplan*, dated September 16, 2009, to the ACEHS. The workplan was prepared in accordance with an ACEHS directive issued in a letter dated August 13, 2009. The proposed scope of work included the installation of four soil borings to further investigate the vertical extent of the release, define the contaminate plume, and evaluate on and off-site risks.

The ACEHS approved the *Site Investigation Workplan* (Workplan), with modifications to the proposed scope of work, in a letter dated October 22, 2009. The ACEHS requested that two of the four proposed borings be relocated and three additional borings be installed within the contaminant source area. A revised workplan was not requested if the modifications were implemented in conjunction with the Workplan's proposed scope of work.

The appropriate permits were obtained from Alameda County Public Works and the City of Alameda for installation of the soil borings. The Site work is scheduled for late November 2010.

SCOPE OF WORK

The scope of work conducted for this semi-annual groundwater monitoring event included the following tasks:

- Measurement of static water levels in five groundwater monitoring wells;
- Collection of field water quality parameters including pH, temperature, dissolved oxygen (DO), and specific conductance (SC) from groundwater in each well;
- Purging at least three casing volumes from each well;
- Collection and analysis of groundwater water samples from each well for THP-d, TPH-g, BTEX, MtBE, DIPE, EtBE, tAME, tBA, methanol, ethanol, EDB, and DCA (see the *Monitoring Well Purging and Sampling* section of this report for analytical methods used);
- Update of the Geotracker database; and

- Preparation of this *Semi-Annual Monitoring Report*.

METHODS AND PROCEDURES

Groundwater Level Measurements

Prior to measuring the depth to groundwater, the cap of each well was removed and the water level was given an opportunity to equilibrate with atmospheric pressure for approximately 30 minutes before recording measurements using an electronic water depth indicator. The static water levels were referenced to the surveyed marks notched into the top of each well casing and the depth-to-water measurements were used to calculate the purge volume of for each monitoring well.

Monitoring Well Purging and Sampling

At least three well volumes were purged from each well using a new disposable bailer. Groundwater temperature, DO, pH, and SC were measured intermittently during purging. Measurements were obtained with a Hanna multi-meter and a YSI DO meter, which were calibrated by the equipment rental service prior to on-site use. Water quality measurements were recorded on monitoring well sampling logs, copies of which are included in **Appendix A**. Well purge water was placed into labeled and sealed 55-gallon, DOT-approved steel drums and temporarily stored on-site.

A new disposable bailer dedicated to each well, was used to remove the groundwater samples and transfer them to the appropriate laboratory prepared containers. Care was taken to remove the headspace in each container. Each sample container was labeled with the project number, sample ID, and collection date. The same information was recorded on the laboratory chain-of-custody form. Samples were stored in a cooler filled with ice for transport to the laboratory.

Samples were transported and submitted to McCampbell Analytical, Inc. of Pittsburg, California (DHS ELAP Certification No. 1644) and analyzed for TPH-g and TPH-d by EPA Method 8015 modified; for BTEX by EPA Method 8021B; and for MtBE, DIPE, EtBE, tAME, tBA, methanol, ethanol, EDB, and DCA by EPA Method 8260B.

RESULTS

Groundwater Levels and Gradient

Depth to water was measured in each monitoring well. The groundwater flow direction for this monitoring event was calculated to be northwest with a gradient of 0.01. Well construction details are presented in **Table 1**. Groundwater levels and elevations are summarized in **Table 2**.

Groundwater elevation contours are depicted on **Figure 3**. Graphs of groundwater elevation versus time for all monitoring wells are presented on **Figure 4**.

Groundwater Analytical Results

TPH-g was detected by laboratory analysis in the highest concentrations in onsite groundwater monitoring wells MW-1, MW-3, and MW-5. TPH-g was detected in MW-1, MW-3, and MW-5 at concentrations of 2,300 µg/L, 6,300 µg/L, and 710 µg/L, respectively. TPH-g was not detected in groundwater samples collected from the other monitoring wells.

Benzene was also detected in MW-1, 3, and 5 at concentrations of 8.5 µg/L, 110 µg/L, and 10 µg/L, respectively. Benzene was not detected in samples collected from the other two groundwater monitoring wells. MtBE was detected in MW-1, MW-3, MW-4, and MW-5 at concentrations of 3.7 µg/L, 110 µg/L, 0.76 µg/L, and 400 µg/L, respectively.

Groundwater analytical results for the third quarter are summarized in **Table 3** and previous groundwater monitoring events are summarized in **Table 4**. A copy of the laboratory analytical report is included in **Appendix B**. **Figure 5** shows TPH-g and benzene concentration trends in well MW-1 and **Figure 6** shows these same concentration trends in MW-3.

Geotracker Requirements

All analytical data were submitted electronically to the California State Water Resources Control Board Geotracker database as required by AB2886 (Water Code Section 13195-13198). EDFs are prepared and formatted by the laboratory and submitted by Matriks. Well latitudes, longitudes (GEO_XY files), and elevations (GEO_Z files) were previously submitted to the database. A well status and usage report (GEO_WELL file) is submitted for each monitoring event. A complete electronic copy of this report (GEO_REPORT file) in PDF format was also submitted. Updated maps (GEO_MAP files) are submitted when site features such as monitoring wells or soil borings are added.

DISCUSSION

In general, petroleum hydrocarbon concentrations have decreased since groundwater monitoring began in September 1999. This appears to indicate that natural attenuation and degradation are occurring.

The highest concentrations of petroleum hydrocarbons were detected in monitoring wells MW-1, MW-3, and MW-5. TPH-g, TPH-d, and benzene in these wells were detected above the ESLs of 100 µg/L, 100 µg/L, and 1.0 µg/L, respectively, established by the San Francisco Bay RWQCB. MtBE was also detected above the ESL in MW-3 and MW-5. TPH-d constituents in wells MW-3 and MW-5 appear to be TPH-g. The laboratory notes indicate that gasoline range compounds are significant.


The detection of TPH-g, benzene, and MtBE above the ESLs in well MW-5 appears to indicate that petroleum hydrocarbons are migrating down gradient from the Site.

MtBE was detected in down gradient well MW-4 at a concentration of 0.76 µg/L. This concentration is less than the ESL for MTBE of 5 µg/L but this also appears to indicate that petroleum hydrocarbons are migrating down gradient within groundwater.

RECOMMENDATIONS

Matriks will be performing a final site investigation on the property to delineate vertical extent of petroleum hydrocarbons in November 2010. The appropriate permits have been obtained from Alameda County Public Works and the City of Alameda. A Feasibility Study will be submitted upon definition of the vertical and lateral extents of the groundwater constituents.

FIGURES

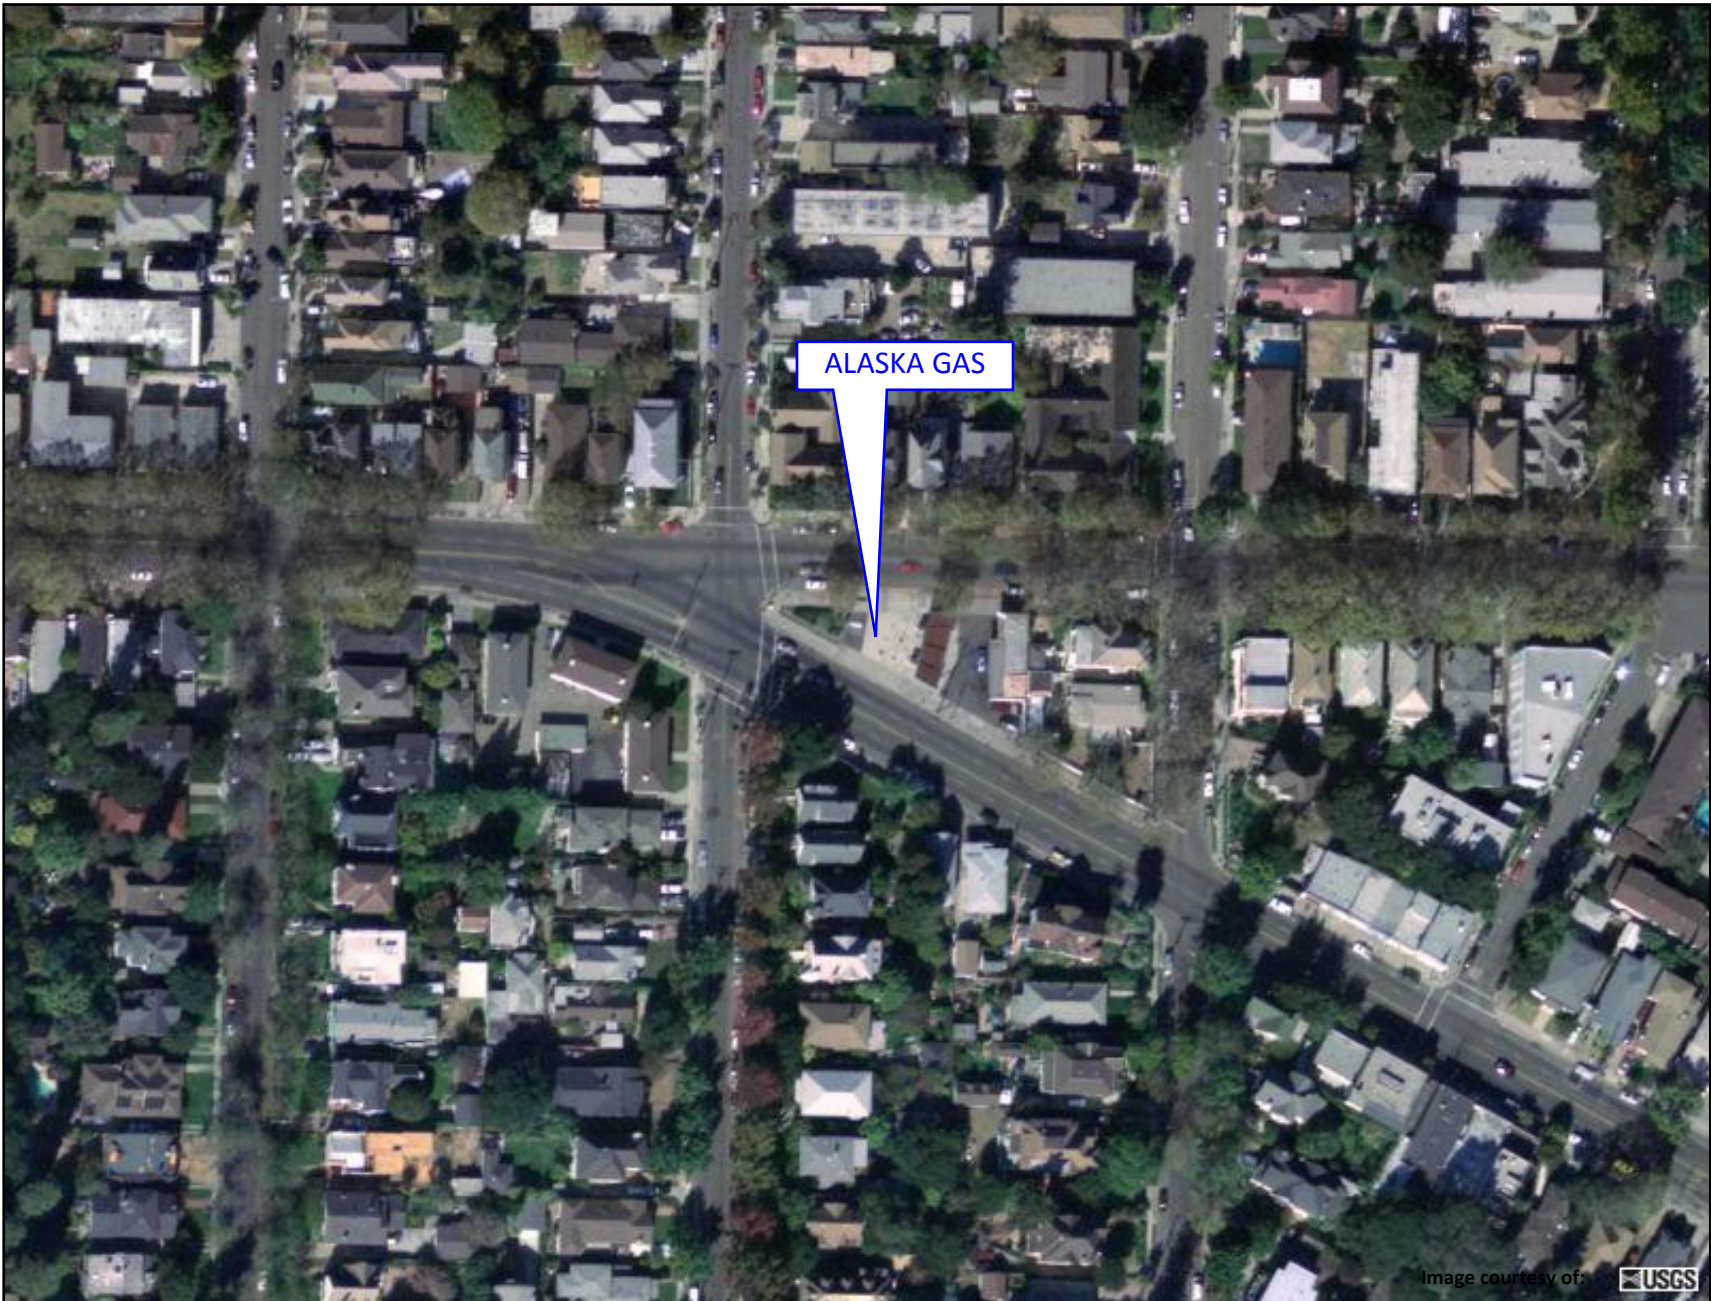


321 Court Street
Woodland, CA 95695
(530) 406-1760

Lic. No. 933586

Fax No. (530) 406-1071

Site Location Map
Alaska Gas
1310 Central Avenue, Alameda, CA

FIGURE 1

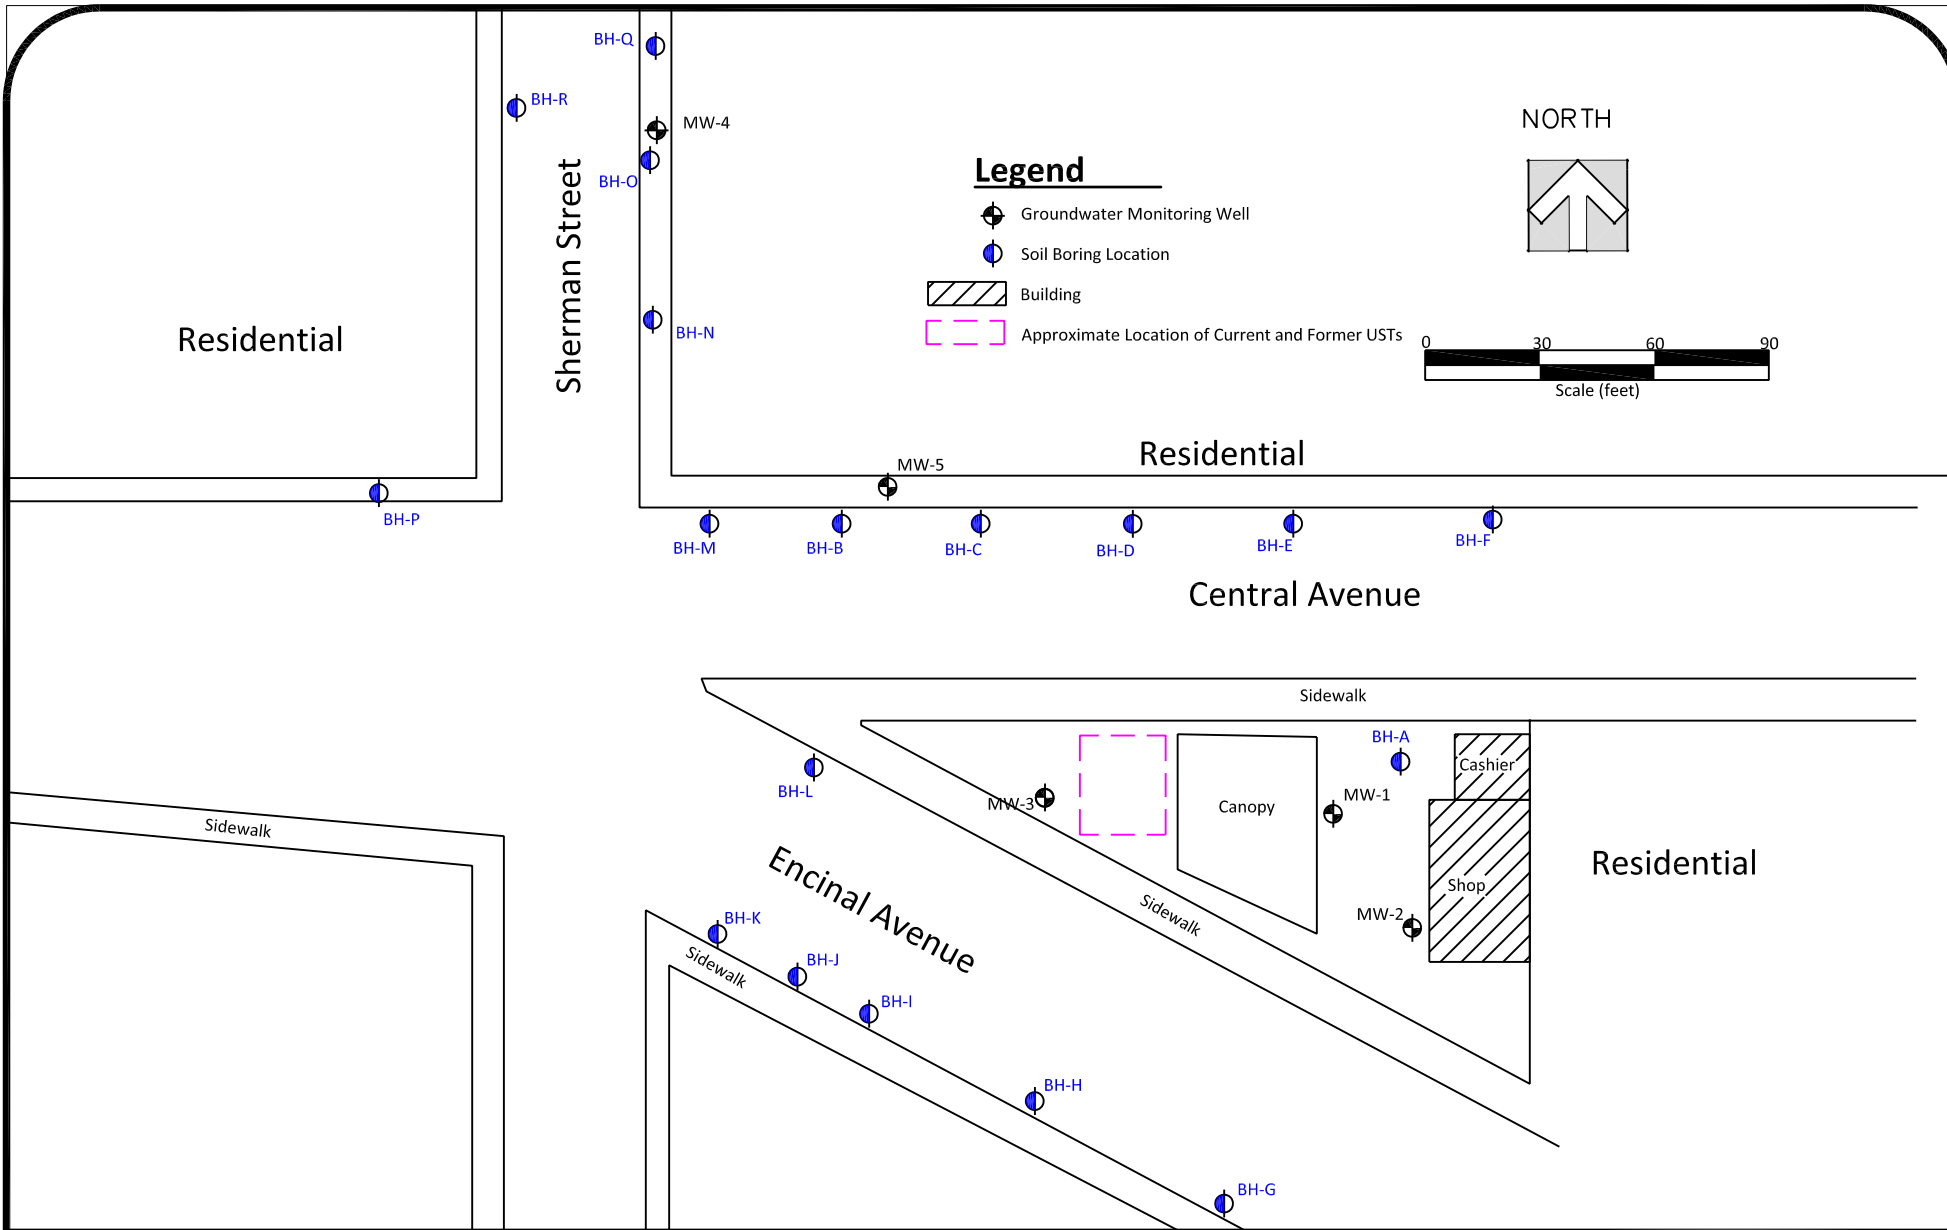


321 Court Street Lic. No. 933586
 Woodland, California 95695
 (530) 406-1760 Fax# (530) 406-1760

Site Map

Alaska Gasoline
 1310 Central Avenue
 Alameda, California

| | |
|-----------------|----------|
| Project #: 6022 | Figure: |
| Date: 10/14/10 | 2 |
| Scale: as shown | |

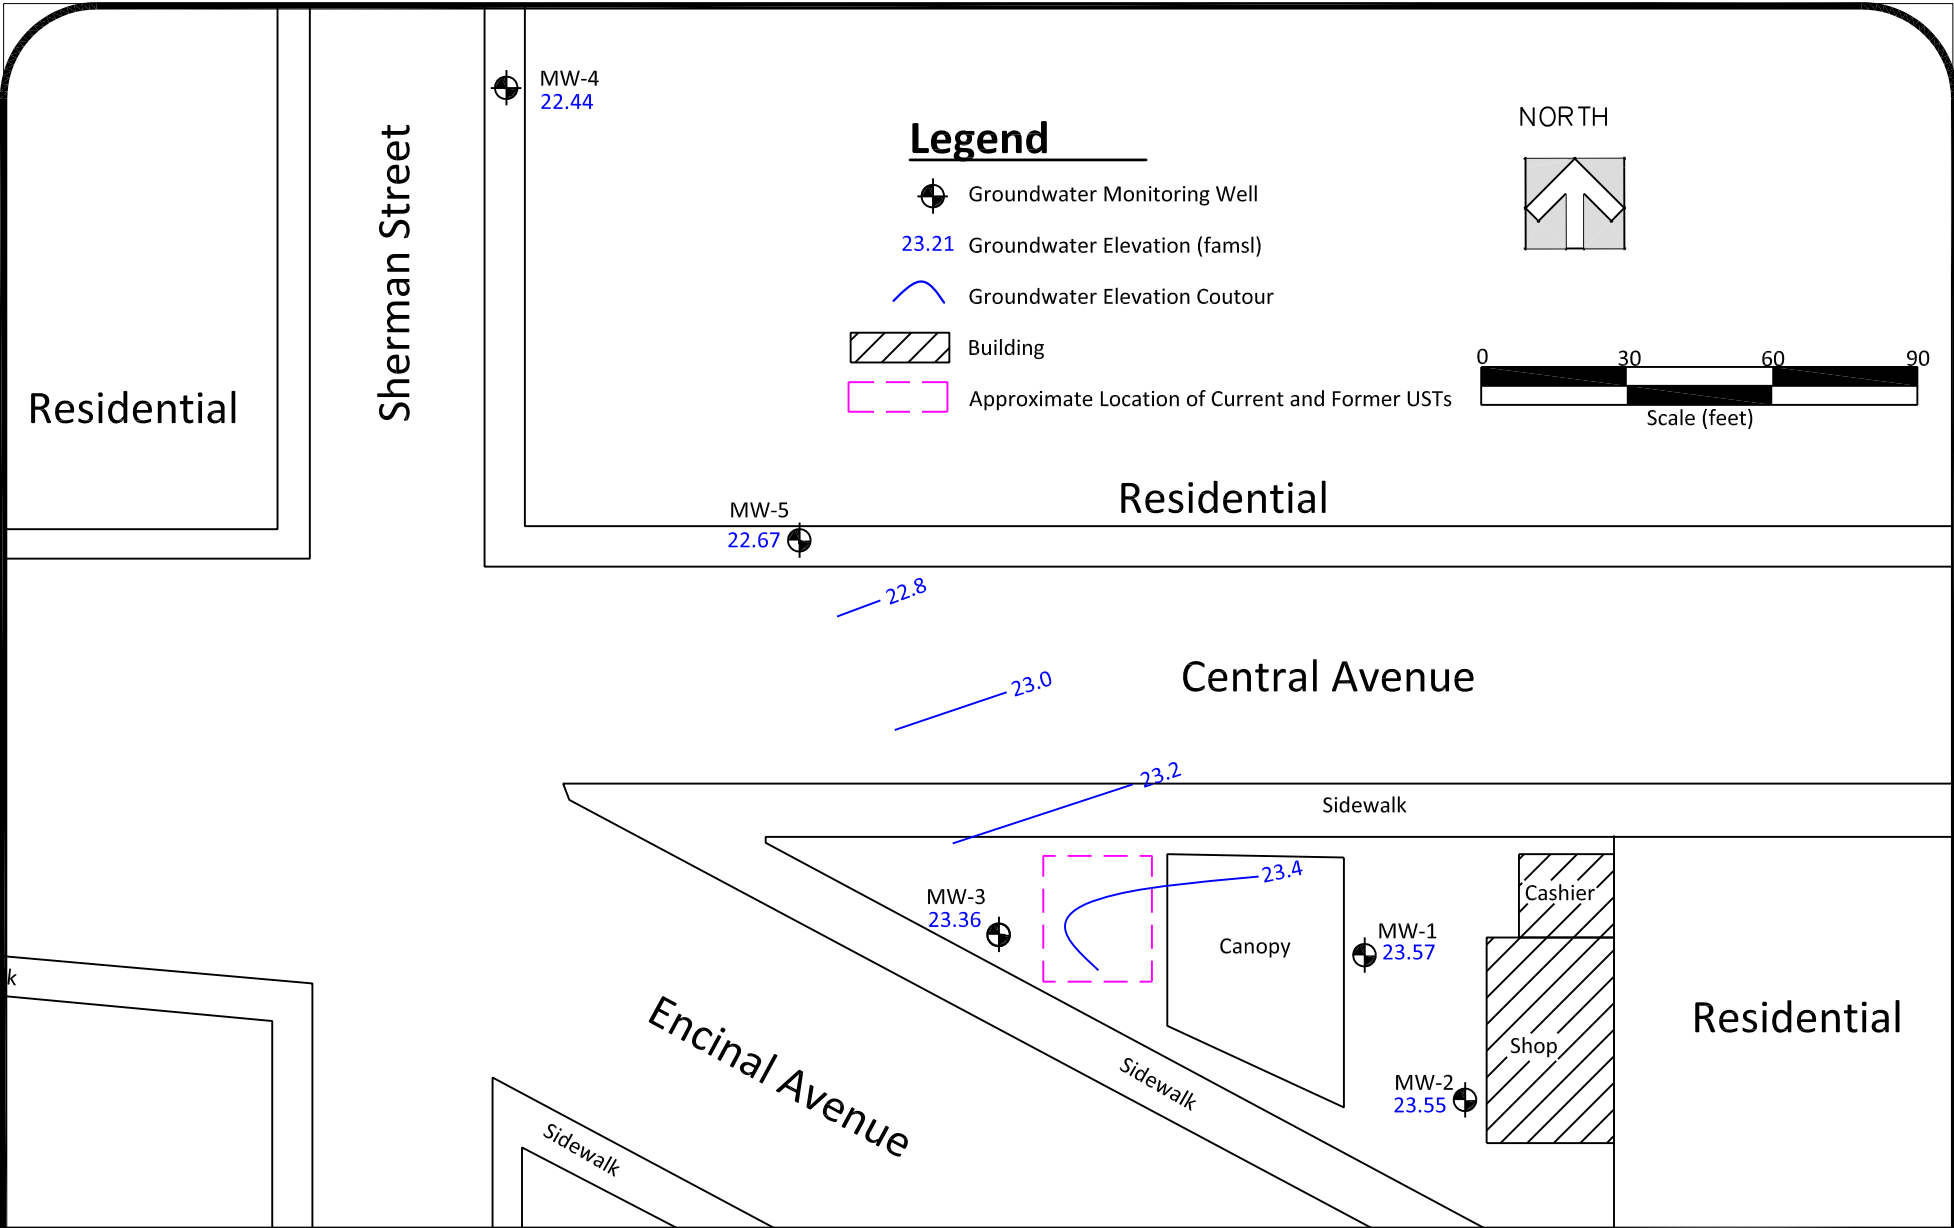

MATRIKS


321 Court Street Lic. No. 933586
 Woodland, California 95695
 (530) 406-1760 Fax# (530) 406-1760

**Groundwater Elevations on
 September 30, 2010**


**Alaska Gasoline
 1310 Central Avenue
 Alameda, California**

| | |
|-----------------|----------|
| Project #: 6022 | Figure: |
| Date: 10/14/10 | 3 |
| Scale: as shown | |


Figure 4 Monitoring Well Hydrograph
Alaska Gas
Alameda, CA

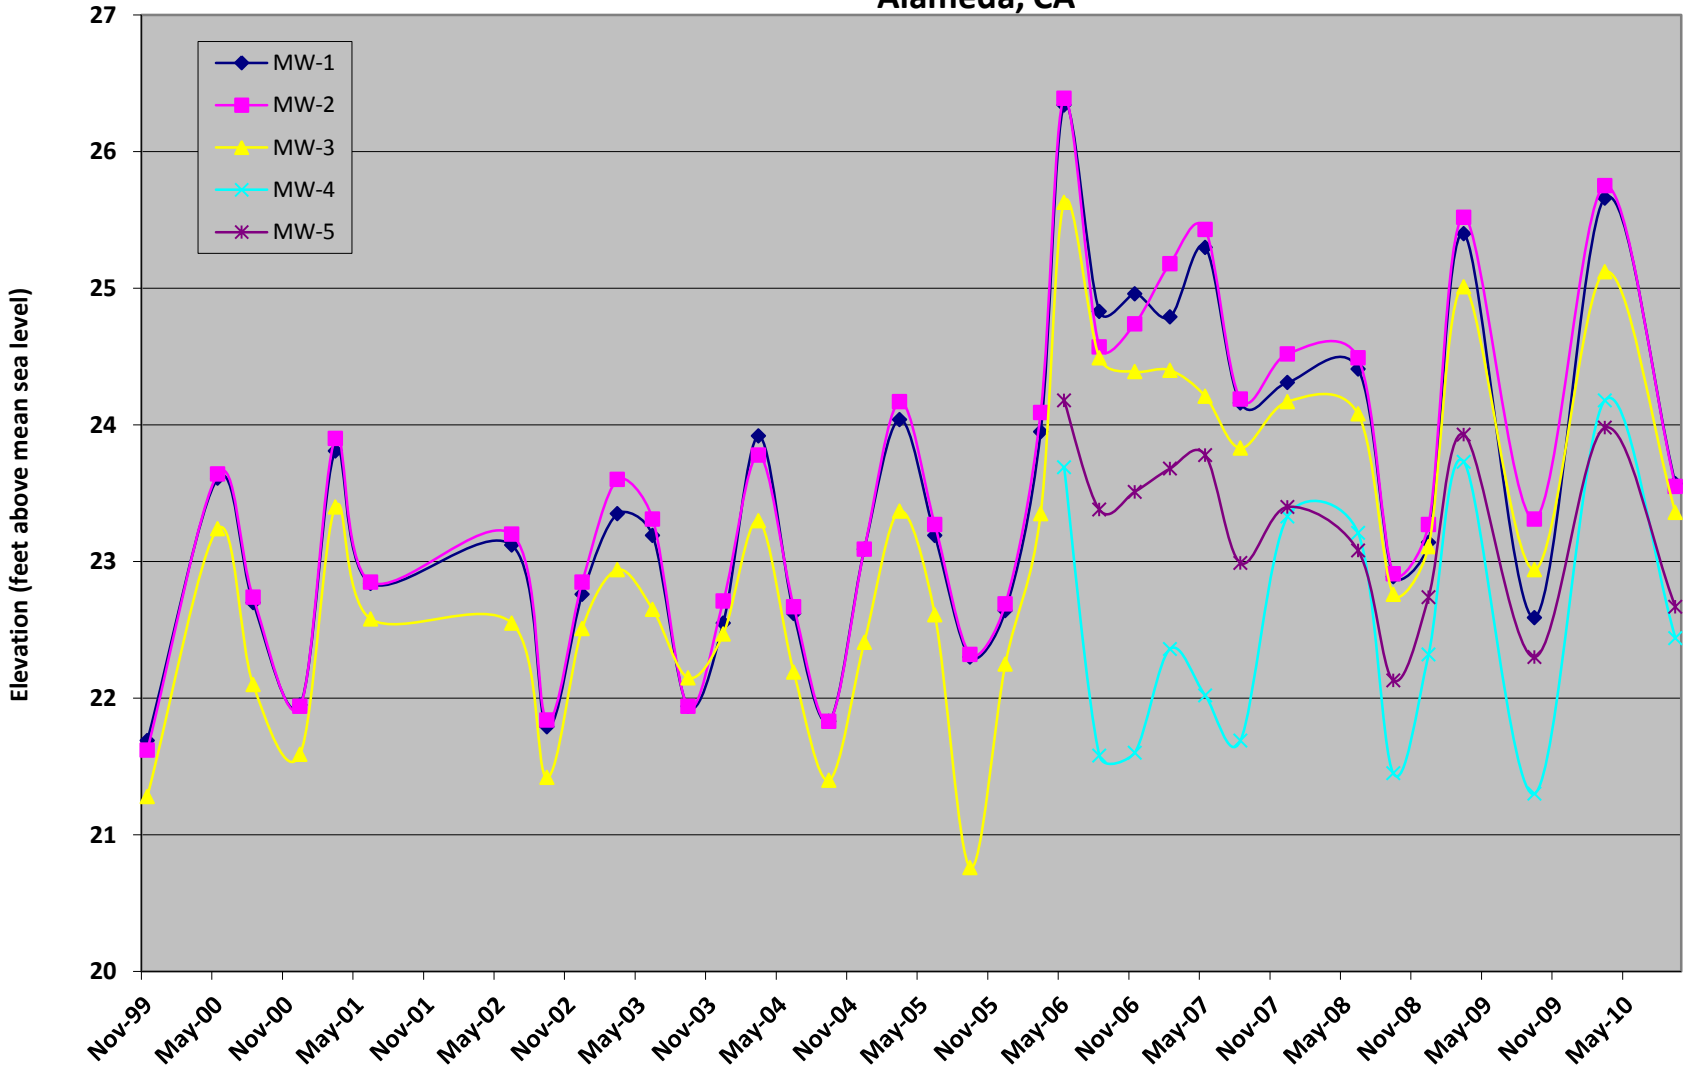

**Figure 5. TPH-g and Benzene vs. Time in Well MW-1
Alaska Gas
Alameda, California**

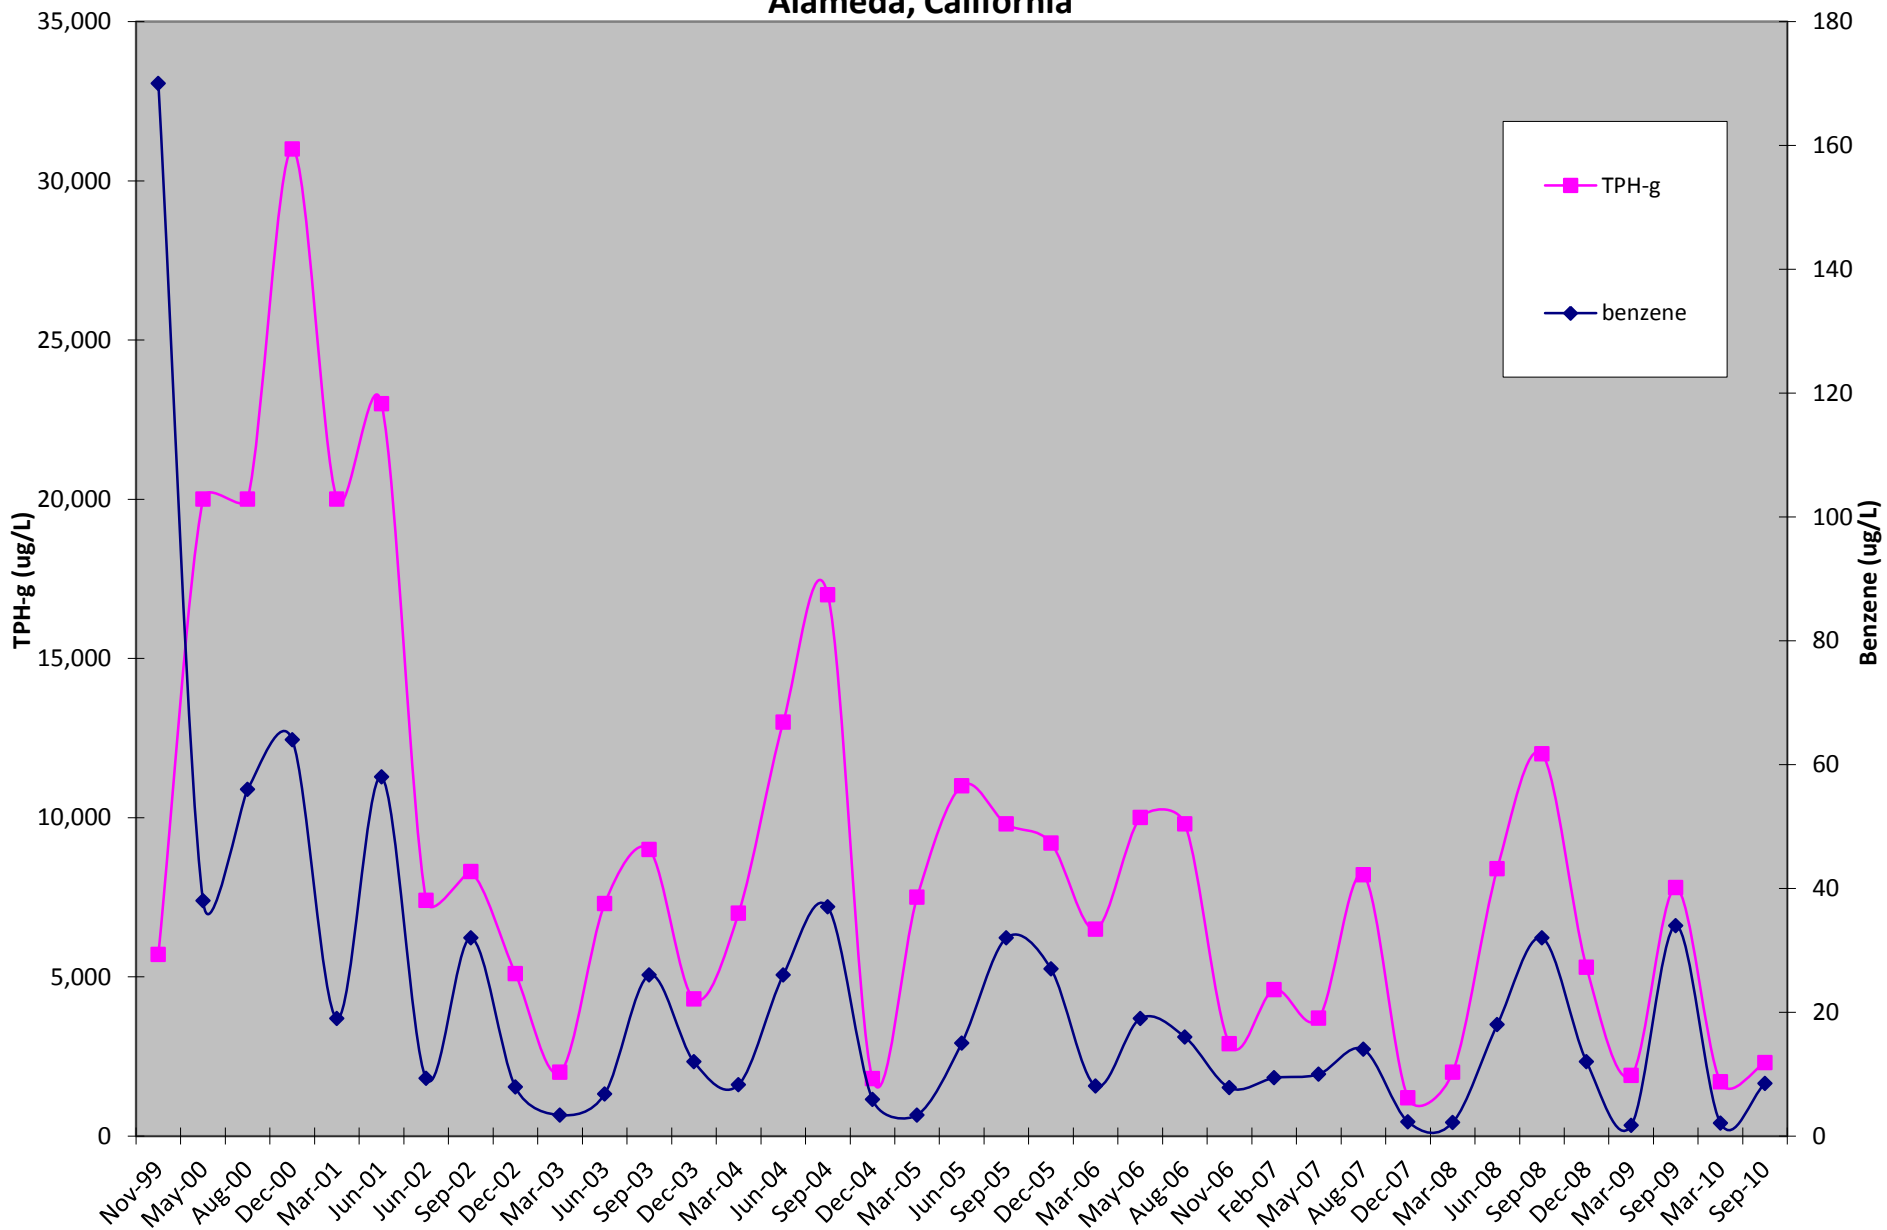

**Figure 6. TPH-g and Benzene vs Time in Well MW-3
Alaska Gas
Alameda, California**

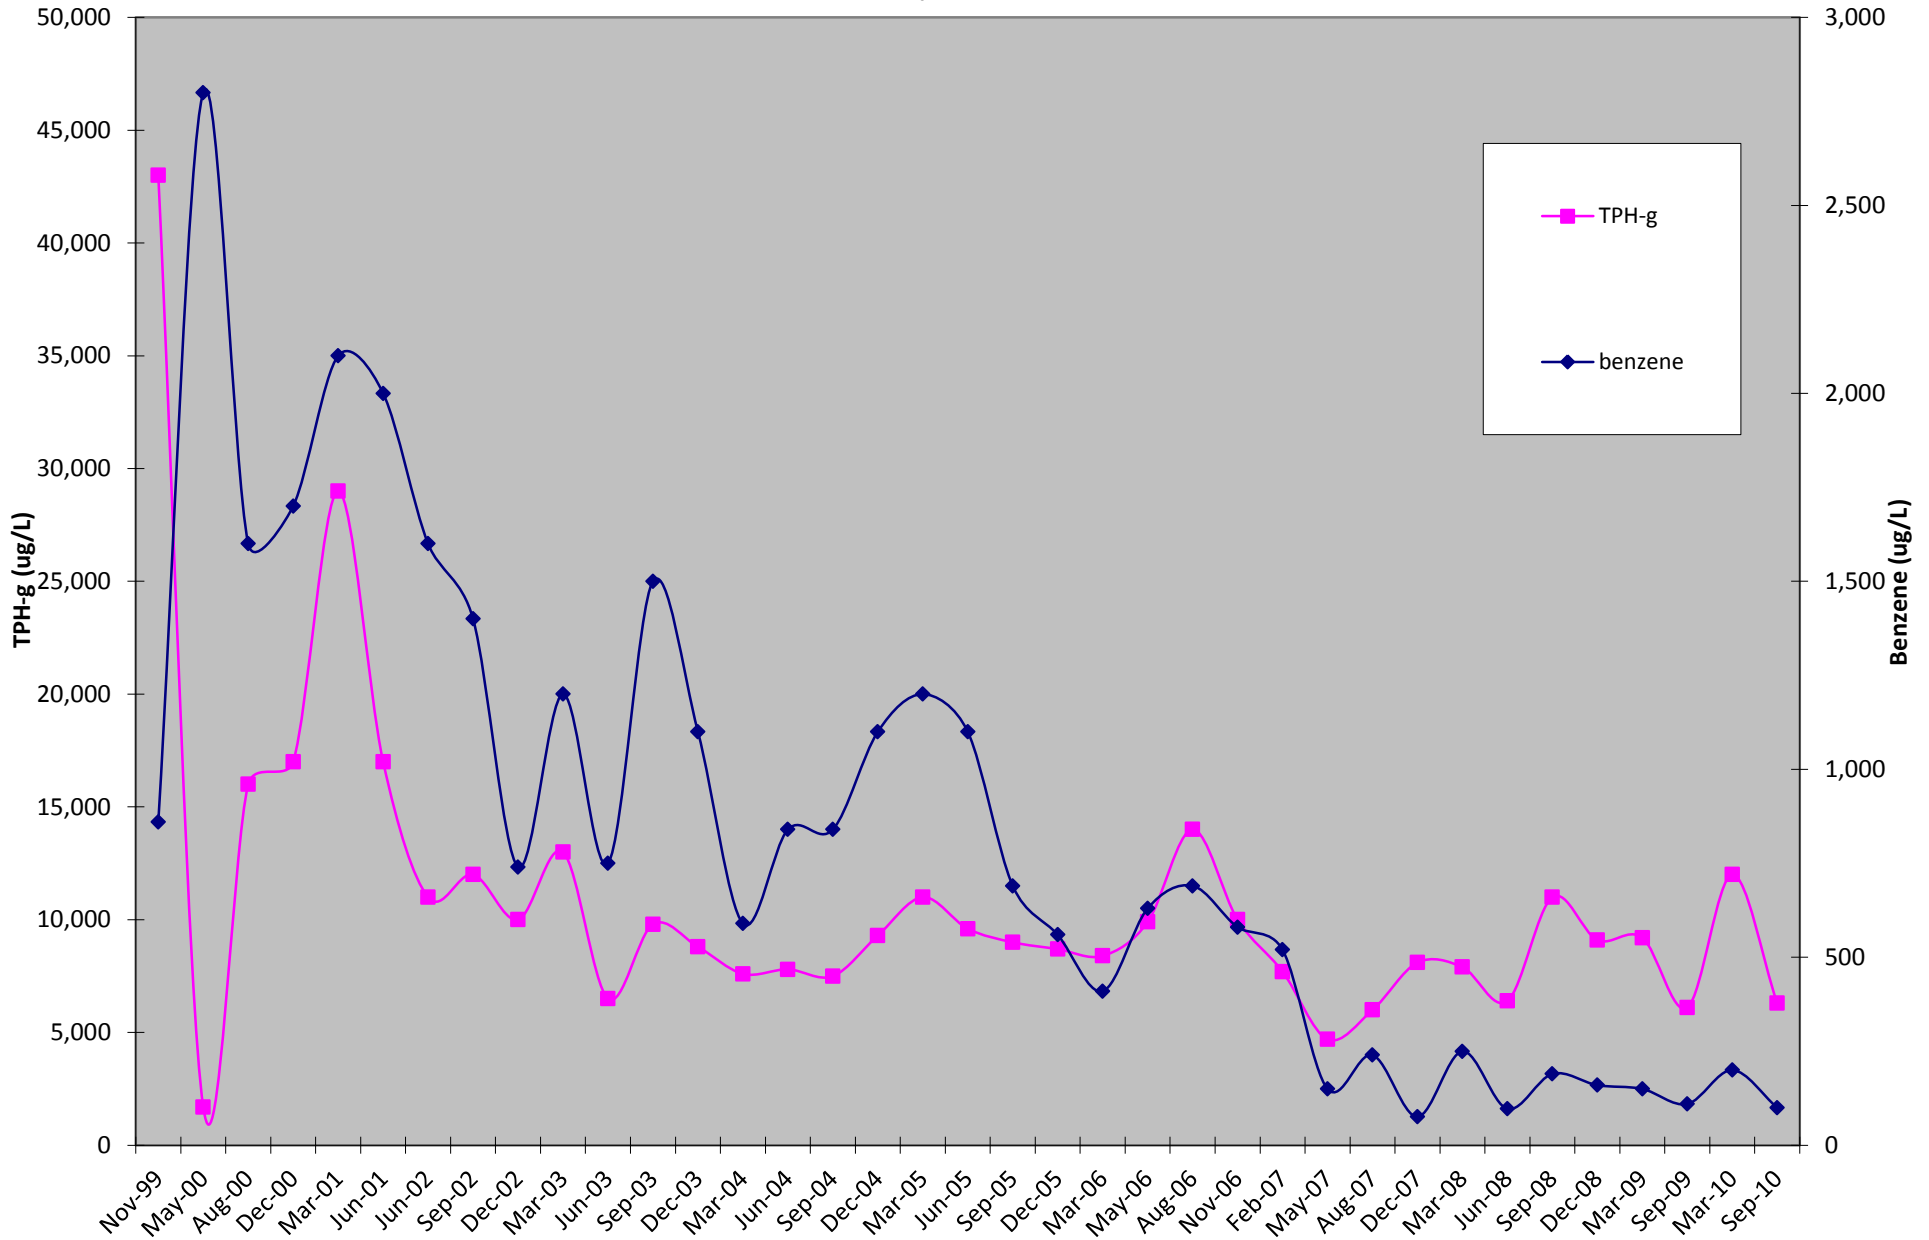

TABLES

Table 1
Well Construction Details
Alaska Gas
Alameda, California

| Well ID | Date Installed | Total Depth (feet bg) | Screened Interval (feet bg) | Water-Bearing Zone | Screen Slot Size (inches) | Filter Pack Interval (feet bg) | Bentonite Interval (feet bg) | Grout Interval (feet bg) | TOC Elevation (feet amsl) | Northing Coordinates (feet) | Westing Coordinates (feet) |
|---------|----------------|-----------------------|-----------------------------|--------------------|---------------------------|--------------------------------|------------------------------|--------------------------|---------------------------|-----------------------------|----------------------------|
| MW-1 | 10/11/99 | 18 | 17.35-2.5 | Silty Sand | 0.02 | 18-1.5 | 1.5-0.5 | 0.5-0 | 29.18 | 15.20394 | 46.13606 |
| MW-2 | 10/11/99 | 18 | 18-4 | Silty Sand | 0.02 | 18-3 | 3-1.5 | 1.5-0 | 29.55 | 14.93558 | 45.97882 |
| MW-3 | 10/11/99 | 20 | 19-4 | Silty Sand | 0.02 | 20-3 | 3-1.5 | 1.5-0 | 27.74 | 15.28672 | 47.24157 |
| MW-4 | 04/03/06 | 16 | 15-5 | Sand-Clayey Sand | 0.02 | 15-4.5 | 4.5-4 | 4-0.5 | 26.23 | 17.12115 | 48.05243 |
| MW-5 | 04/04/06 | 17 | 15-5 | Sand-Clayey Sand | 0.02 | 15-4.5 | 4.5-4 | 4-0.5 | 26.78 | 16.21022 | 47.48996 |

Table 2
Groundwater Elevation Data
Alaska Gas
Alameda, California

| Well ID | Date | Top of Casing Elevation (msl) | Depth to Water (feet) | Groundwater Elevation |
|----------|----------|-------------------------------|-----------------------|-----------------------|
| MW-1 | 11/06/99 | 26.85 | 5.16 | 21.69 |
| | 05/16/00 | | 3.24 | 23.61 |
| | 08/03/00 | | 4.15 | 22.70 |
| | 12/05/00 | | 4.90 | 21.95 |
| | 03/05/01 | | 3.04 | 23.81 |
| | 06/04/01 | | 4.01 | 22.84 |
| | 06/05/02 | | 3.73 | 23.12 |
| | 09/09/02 | | 5.06 | 21.79 |
| | 12/19/02 | | 4.09 | 22.76 |
| | 03/10/03 | | 3.50 | 23.35 |
| | 06/03/03 | | 3.66 | 23.19 |
| | 09/19/03 | | 4.91 | 21.94 |
| | 12/22/03 | | 4.30 | 22.55 |
| | 03/12/04 | | 2.93 | 23.92 |
| | 06/11/04 | | 4.23 | 22.62 |
| | 09/13/04 | | 5.02 | 21.83 |
| | 12/16/04 | | 3.76 | 23.09 |
| | 03/21/05 | | 2.81 | 24.04 |
| | 06/23/05 | | 3.66 | 23.19 |
| | 09/30/05 | | 4.55 | 22.30 |
| | 12/08/05 | | 4.21 | 22.64 |
| | 03/01/06 | | 2.90 | 23.95 |
| | 05/25/06 | 29.18 | 2.84 | 26.34 |
| | 08/10/06 | | 4.35 | 24.83 |
| | 11/21/06 | | 4.22 | 24.96 |
| | 02/06/07 | | 4.39 | 24.79 |
| | 05/08/07 | | 3.88 | 25.30 |
| | 08/06/07 | | 5.02 | 24.16 |
| | 12/26/07 | | 4.87 | 24.31 |
| | 06/28/08 | | 4.77 | 24.41 |
| | 09/27/08 | | 6.29 | 22.89 |
| | 12/30/08 | | 6.04 | 23.14 |
| 03/28/09 | | 3.78 | 25.40 | |
| 09/12/09 | | 6.59 | 22.59 | |
| 03/30/10 | | 3.52 | 25.66 | |
| 09/30/10 | | 5.61 | 23.57 | |

Table 2
Groundwater Elevation Data
Alaska Gas
Alameda, California

| Well ID | Date | Top of Casing Elevation (msl) | Depth to Water (feet) | Groundwater Elevation |
|----------|----------|-------------------------------|-----------------------|-----------------------|
| MW-2 | 11/06/99 | 27.18 | 5.56 | 21.62 |
| | 05/16/00 | | 3.54 | 23.64 |
| | 08/03/00 | | 4.44 | 22.74 |
| | 12/05/00 | | 5.24 | 21.94 |
| | 03/05/01 | | 3.28 | 23.90 |
| | 06/04/01 | | 4.33 | 22.85 |
| | 06/05/02 | | 3.98 | 23.20 |
| | 09/09/02 | | 5.34 | 21.84 |
| | 12/19/02 | | 4.33 | 22.85 |
| | 03/10/03 | | 3.58 | 23.60 |
| | 06/03/03 | | 3.87 | 23.31 |
| | 09/19/03 | | 5.24 | 21.94 |
| | 12/22/03 | | 4.47 | 22.71 |
| | 03/12/04 | | 3.40 | 23.78 |
| | 06/11/04 | | 4.51 | 22.67 |
| | 09/13/04 | | 5.35 | 21.83 |
| | 12/16/04 | | 4.09 | 23.09 |
| | 03/21/05 | | 3.01 | 24.17 |
| | 06/23/05 | | 3.91 | 23.27 |
| | 09/30/05 | | 4.86 | 22.32 |
| | 12/08/05 | | 4.49 | 22.69 |
| | 03/01/06 | | 3.09 | 24.09 |
| | 05/25/06 | 29.55 | 3.16 | 26.39 |
| | 08/10/06 | | 4.98 | 24.57 |
| | 11/21/06 | | 4.81 | 24.74 |
| | 02/06/07 | | 4.37 | 25.18 |
| | 05/08/07 | | 4.12 | 25.43 |
| | 08/06/07 | | 5.36 | 24.19 |
| | 12/26/07 | | 5.03 | 24.52 |
| | 06/28/08 | | 5.06 | 24.49 |
| | 09/27/08 | | 6.64 | 22.91 |
| | 12/30/08 | | 6.28 | 23.27 |
| | 03/28/09 | | 4.03 | 25.52 |
| 09/12/09 | | 6.24 | 23.31 | |
| 03/30/10 | | 3.80 | 25.75 | |
| 09/30/10 | | 6.00 | 23.55 | |

Table 2
Groundwater Elevation Data
Alaska Gas
Alameda, California

| Well ID | Date | Top of Casing Elevation (msl) | Depth to Water (feet) | Groundwater Elevation |
|----------|----------|-------------------------------|-----------------------|-----------------------|
| MW-3 | 11/06/99 | 25.3 | 4.02 | 21.28 |
| | 05/16/00 | | 2.06 | 23.24 |
| | 08/03/00 | | 3.20 | 22.10 |
| | 12/05/00 | | 3.71 | 21.59 |
| | 03/05/01 | | 1.90 | 23.40 |
| | 06/04/01 | | 2.72 | 22.58 |
| | 06/05/02 | | 2.75 | 22.55 |
| | 09/09/02 | | 3.88 | 21.42 |
| | 12/19/02 | | 2.79 | 22.51 |
| | 03/10/03 | | 2.36 | 22.94 |
| | 06/03/03 | | 2.65 | 22.65 |
| | 09/19/03 | | 3.15 | 22.15 |
| | 12/22/03 | | 2.83 | 22.47 |
| | 03/12/04 | | 2.00 | 23.30 |
| | 06/11/04 | | 3.11 | 22.19 |
| | 09/13/04 | | 3.90 | 21.40 |
| | 12/16/04 | | 2.89 | 22.41 |
| | 03/21/05 | | 1.93 | 23.37 |
| | 06/23/05 | | 2.69 | 22.61 |
| | 09/30/05 | | 4.54 | 20.76 |
| | 12/08/05 | | 3.05 | 22.25 |
| | 03/01/06 | | 1.95 | 23.35 |
| | 05/25/06 | 27.74 | 2.11 | 25.63 |
| | 08/10/06 | | 3.25 | 24.49 |
| | 11/21/06 | | 3.35 | 24.39 |
| | 02/06/07 | | 3.34 | 24.40 |
| | 05/08/07 | | 3.53 | 24.21 |
| | 08/06/07 | | 3.91 | 23.83 |
| | 12/26/07 | | 3.57 | 24.17 |
| | 06/28/08 | | 3.66 | 24.08 |
| | 09/27/08 | | 4.98 | 22.76 |
| | 12/30/08 | | 4.63 | 23.11 |
| | 03/28/09 | | 2.73 | 25.01 |
| 09/12/09 | | 4.80 | 22.94 | |
| 03/30/10 | | 2.62 | 25.12 | |
| 09/30/10 | | 4.38 | 23.36 | |

Table 2
Groundwater Elevation Data
Alaska Gas
Alameda, California

| Well ID | Date | Top of Casing Elevation (msl) | Depth to Water (feet) | Groundwater Elevation |
|---------|----------|-------------------------------|-----------------------|-----------------------|
| MW-4 | 05/25/06 | 26.23 | 2.54 | 23.69 |
| | 08/10/06 | | 4.65 | 21.58 |
| | 11/21/06 | | 4.63 | 21.60 |
| | 02/06/07 | | 3.87 | 22.36 |
| | 05/08/07 | | 4.21 | 22.02 |
| | 08/06/07 | | 4.54 | 21.69 |
| | 12/26/07 | | 2.90 | 23.33 |
| | 06/28/08 | | 3.02 | 23.21 |
| | 09/27/08 | | 4.78 | 21.45 |
| | 12/30/08 | | 3.91 | 22.32 |
| | 03/28/09 | | 2.50 | 23.73 |
| | 09/12/09 | | 4.93 | 21.30 |
| | 03/30/10 | | 3.43 | 22.80 |
| | 09/30/10 | | 3.79 | 22.44 |
| MW-5 | 05/25/06 | 26.78 | 2.60 | 24.18 |
| | 08/10/06 | | 3.40 | 23.38 |
| | 11/21/06 | | 3.27 | 23.51 |
| | 02/06/07 | | 3.10 | 23.68 |
| | 05/08/07 | | 3.00 | 23.78 |
| | 08/06/07 | | 3.79 | 22.99 |
| | 12/26/07 | | 3.38 | 23.40 |
| | 06/28/08 | | 3.70 | 23.08 |
| | 09/27/08 | | 4.65 | 22.13 |
| | 12/30/08 | | 4.04 | 22.74 |
| | 03/28/09 | | 2.85 | 23.93 |
| | 09/12/09 | | 4.48 | 22.30 |
| | 03/30/10 | | 2.80 | 23.98 |
| | 09/30/10 | | 4.11 | 22.67 |

All measurements are in feet. DTW = Depth to water below top of PVC casing.
TOC = Top of casing. ELEV = Elevation above mean sea level.
Wells resurveyed on April 27, 2006

Table 3
Groundwater Analytical Results
Third Quarter 2010
September 30, 2010
Alaska Gas
Alameda, California

| Well ID | Date | TPH-g | TPH-d | benzene | toluene | ethyl-benzene | xylenes | MtBE | tAME | tBA | Other Oxygenates |
|-------------------|----------|-------------------|---------------------|---------|---------|---------------|---------|------|------|--------|------------------|
| MW-1 [‡] | 09/30/10 | 2300 [*] | 6,500 ^{+†} | 8.5 | 23 | 150 | 29 | 3.7 | <0.5 | 2.2 | <0.5 |
| MW-2 [‡] | 09/30/10 | <50 | 310 [^] | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <2.0 | <0.5 |
| MW-3 [‡] | 09/30/10 | 6300 [*] | 5,100 ^{+†} | 110 | 14 | 6.2 | 16 | 110 | 3.8 | 16 | <2.5 |
| MW-4 | 09/30/10 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 0.76 | <0.5 | <2.0 | <0.5 |
| MW-5 | 09/30/10 | 710 [*] | 310 ^{+^} | 10.0 | 2.6 | <1.0 | 3.1 | 400 | <10 | <40 | <10 |
| ESL | | 100 | 100 | 1.0 | 40 | 30 | 20 | 5 | NE | 50,000 | NA |

Notes:

Units are micrograms per liter (ug/L).

TPH-g total petroleum hydrocarbons as gasoline

TPH-d total petroleum hydrocarbons as diesel

* Laboratory noted that weakly modified or unmodified gasoline is significant

+ Laboratory noted that TPH-d range is significant

^ Laboratory noted that TPH-g range is significant

‡ Groundwater sample contains greater than ~1 vol. % sediment

† Laboratory noted that TPH-g range is significant; and/or stoddard solvent/mineral spirit

MtBE methyl tert-butyl ether

tAME tert-amyl methyl ether

tBA tert-butanol

Table 4
Historical
Groundwater Analytical Results
Alaska Gas
Alameda, California

| Well ID | Date | TPH-g | TPH-d | benzene | toluene | ethyl-benzene | xylenes | MtBE | tAME | tBA | Other Oxygenates |
|----------|----------|--------|--------|---------|---------|---------------|---------|--------|-------|------|------------------|
| MW-1 | 11/06/99 | 5,700 | 8,700 | 170 | 59 | 22 | 85 | 20,000 | NA | NA | NA |
| | 05/16/00 | 20,000 | <7,500 | 38 | 6.3 | 740 | 1,600 | <5.0 | <5.0 | <50 | <5.0 |
| | 08/03/00 | 20,000 | <6,000 | 56 | 9.7 | 920 | 1,600 | <0.5 | <0.5 | <50 | <0.5 |
| | 12/05/00 | 31,000 | <4,000 | 64 | 27 | 820 | 2,200 | <10 | <5.0 | <50 | <5.0 |
| | 03/05/01 | 20,000 | <4,000 | 19 | <5.0 | 480 | 870 | <5 | <5.0 | <50 | <5.0 |
| | 06/04/01 | 23,000 | <7,000 | 58 | 50 | 710 | 2,100 | 5.1 | <5.0 | <50 | <5.0 |
| | 06/05/02 | 7,400 | <1,500 | 9.3 | 6.7 | 180 | 230 | <1.0 | <1.0 | <10 | <1.0 |
| | 09/09/02 | 8,300 | <3500 | 32 | 20 | 390 | 670 | <2.0 | <2.0 | <20 | <2.0 |
| | 12/19/02 | 5,100 | NS | 7.9 | 2.5 | 56 | 93 | <1.0 | <1.0 | <10 | <1.0 |
| | 03/10/03 | 2,000 | <2,000 | 3.4 | 2.9 | 80 | 98 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 06/03/03 | 7,300 | <4,000 | 6.8 | 9.9 | 300 | 1,000 | 2.3 | <0.5 | <5.0 | <0.5 |
| | 09/19/03 | 9,000 | <3,000 | 26 | 22 | 420 | 1,200 | 4.5 | <1.5 | <20 | <1.5 |
| | 12/22/03 | 4,300 | <2,000 | 12 | 6.7 | 200 | 290 | 9.1 | <1.0 | <10 | <1.0 |
| | 03/12/04 | 7,000 | <3,000 | 8.3 | 8.2 | 250 | 760 | 3.9 | <2.0 | <20 | <2.0 |
| | 06/11/04 | 13,000 | <4,000 | 26 | 27 | 530 | 1,700 | <2.5 | <2.5 | <15 | <2.5 |
| | 09/13/04 | 17,000 | <4,000 | 37 | 42 | 840 | 2,000 | <5.0 | <5.0 | <50 | <5.0 |
| | 12/16/04 | 1,800 | <1,000 | 5.9 | 1.9 | 100 | 35 | 16 | <0.5 | <5.0 | <0.5 |
| | 03/21/05 | 7,500 | <3,000 | 3.4 | 4.2 | 290 | 760 | <1.5 | <1.5 | <20 | <1.5 |
| | 06/23/05 | 11,000 | <8,000 | 15 | 11 | 370 | 910 | 2.4 | <1.5 | <7.0 | <1.5 |
| | 09/30/05 | 9,800 | <4,000 | 32 | 25 | 540 | 680 | 1.6 | <1.5 | <7.0 | <1.5 |
| | 12/08/05 | 9,200 | <4,000 | 27 | 21 | 500 | 490 | 2.2 | <1.5 | <7.0 | <1.5 |
| | 03/01/06 | 6,500 | <4,000 | 8.1 | 9.4 | 370 | 660 | 18 | <1.5 | <6.0 | <1.5 |
| | 05/25/06 | 10,000 | <3,000 | 19 | 14 | 900 | 620 | <1.5 | <1.5 | <7.0 | <1.5 |
| | 08/10/06 | 9,800 | <1,500 | 16 | 8.1 | 640 | 180 | <1.5 | <1.5 | <7.0 | <1.5 |
| | 11/21/06 | 2,900 | <1,000 | 7.8 | 2.5 | 160 | 12 | 2.5 | 2.5 | <5.0 | <0.5 |
| | 02/06/07 | 4,600 | <1,500 | 9.4 | 6 | 380 | 220 | 1 | <0.50 | <5.0 | <0.50 |
| | 05/08/07 | 3,700 | <800 | 10 | 4.6 | 320 | 86 | 1.5 | <0.50 | <5.0 | <0.50 |
| | 08/06/07 | 8,200 | <2,000 | 14 | 8.8 | 730 | 180 | <0.50 | <0.50 | <5.0 | <0.50 |
| | 12/26/07 | 1,200 | <300 | 2.3 | 1.1 | 89 | 21 | 4.8 | <0.50 | <5.0 | <0.50 |
| | 03/31/08 | 2,000 | <800 | 2.2 | 1.6 | 99 | 75 | 1.8 | <0.50 | <5.0 | <0.50 |
| 06/28/08 | 8,400 | 3900* | 18 | 26 | 670 | 1,100 | <2.5 | <2.5 | <10 | <2.5 | |
| 09/27/08 | 12,000 | 4600* | 32 | 49 | 1,200 | 680 | <25 | <25 | <100 | <25 | |
| 12/30/08 | 5,300 | 3,700 | 12 | 31 | 300 | 27 | 7.1 | <5.0 | <20 | <5.0 | |
| 03/28/09 | 1,900 | 920* | <1.7 | <1.7 | 77 | 58 | 22 | <1.7 | <6.7 | <1.7 | |
| 09/12/09 | 7,800 | 9,400 | 34 | 110 | 690 | 200 | 3.0 | <0.5 | 140 | <0.5 | |
| 03/30/10 | 1,700 | 700* | 2.1 | 14 | 40 | 9.5 | 14 | <0.5 | 7.8 | <0.5 | |
| 09/30/10 | 2,300 | 6,500* | 8.5 | 23 | 150 | 29 | 4 | <0.5 | 2.2 | <0.5 | |

Table 4
Historical
Groundwater Analytical Results
Alaska Gas
Alameda, California

| Well ID | Date | TPH-g | TPH-d | benzene | toluene | ethyl-benzene | xylenes | MtBE | tAME | tBA | Other Oxygenates |
|----------|----------|--------------------------|-------|---------|---------|---------------|---------|-------|------|------|------------------|
| MW-2 | 11/06/99 | 6,000 | 70 | 1,300 | 92 | 50 | 400 | 6,800 | NA | NA | NA |
| | 05/16/00 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 08/03/00 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 12/05/00 | <50 | 1,400 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 03/05/01 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 06/04/01 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 06/05/02 | <50 | 2,300 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 09/09/02 | <50 | 1,300 | <0.5 | <0.5 | <0.5 | <0.5 | 1.4 | <0.5 | <5.0 | <0.5 |
| | 12/19/02 | <50 | -- | <0.5 | <0.5 | <0.5 | <0.5 | 16 | <0.5 | <5.0 | <0.5 |
| | 03/10/03 | <50 | 3,000 | <0.5 | <0.5 | <0.5 | <0.5 | 1 | <0.5 | <5.0 | <0.5 |
| | 06/03/03 | <50 | 700 | <0.5 | <0.5 | <0.5 | <0.5 | 2 | <0.5 | <5.0 | <0.5 |
| | 09/19/03 | <50 | 1,400 | <0.5 | <0.5 | <0.5 | <0.5 | 4.7 | <0.5 | <5.0 | <0.5 |
| | 12/22/03 | <50 | 1,000 | <0.5 | <0.5 | <0.5 | <0.5 | 39 | <0.5 | <5.0 | <0.5 |
| | 03/12/04 | <50 | 250 | <0.5 | <0.5 | <0.5 | <0.5 | 2.1 | <0.5 | <5.0 | <0.5 |
| | 06/11/04 | <50 | 920 | <0.5 | <0.5 | <0.5 | <0.5 | 0.75 | <0.5 | <5.0 | <0.5 |
| | 09/13/04 | <50 | 140 | <0.5 | <0.5 | <0.5 | <0.5 | 1.5 | <0.5 | <5.0 | <0.5 |
| | 12/16/04 | <50 | 150 | <0.5 | <0.5 | <0.5 | <0.5 | 12 | <0.5 | <5.0 | <0.5 |
| | 03/21/05 | <50 | 130 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 06/23/05 | <50 | 1,100 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 09/30/05 | <50 | 300 | <0.5 | <0.5 | <0.5 | <0.5 | 1.6 | <0.5 | <5.0 | <0.5 |
| | 12/08/05 | <50 | 600 | <0.5 | <0.5 | <0.5 | <0.5 | 1.9 | <0.5 | <5.0 | <0.5 |
| | 03/01/06 | <50 | 920 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 05/25/06 | <50 | 160 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 08/10/06 | <50 | 870 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 11/21/06 | <50 | 130 | <0.5 | <0.5 | <0.5 | <0.5 | 1.8 | <0.5 | <5.0 | <0.5 |
| | 02/06/07 | <50 | 450 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 05/08/07 | <50 | 160 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 08/06/07 | <50 | 180 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 12/26/07 | <50 | 190 | <0.5 | <0.5 | <0.5 | <0.5 | 2.9 | <0.5 | <5.0 | <0.5 |
| | 03/31/08 | Inaccessible Not Sampled | | | | | | | | | |
| 06/28/08 | <50 | 180 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <2.0 |
| 09/27/08 | <50 | 78 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | 7 | <0.5 | <2.0 | <0.5 |
| 12/30/08 | <50 | 100 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | 13 | <0.5 | <0.5 | <0.5 |
| 03/28/09 | <50 | 60 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | 5.4 | <0.5 | <0.5 | <0.5 |
| 09/12/09 | <50 | 91 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | 4.7 | <0.5 | <2.0 | <0.5 |
| 03/30/10 | <50 | 150 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | 2.5 | <0.5 | <2.0 | <0.5 |
| 09/30/10 | <50 | 310 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <2.0 | <0.5 |

Table 4
Historical
Groundwater Analytical Results
Alaska Gas
Alameda, California

| Well ID | Date | TPH-g | TPH-d | benzene | toluene | ethyl- benzene | xylenes | MtBE | tAME | tBA | Other Oxygenates |
|----------|----------|---------|--------|---------|---------|-------------------|---------|---------|------|------|---------------------|
| MW-3 | 11/06/99 | 43,000 | 870 | 860 | 70 | <0.5 | 65 | 120,000 | NA | NA | NA |
| | 05/16/00 | 17,000 | <5,000 | 2,800 | 60 | 380 | 190 | 990 | 9.1 | 350 | <5.0 |
| | 08/03/00 | 16,000 | <2,000 | 1,600 | 29 | 210 | 53 | 1,200 | 21 | 260 | <2.0 |
| | 12/05/00 | 17,000 | 5800 | 1,700 | 45 | 460 | 240 | 1,100 | 21 | 230 | <5.0 |
| | 03/05/01 | 29,000 | <1,300 | 2,100 | 68 | 280 | 100 | 180 | <8.0 | <80 | <8.0 |
| | 06/04/01 | 17,000 | <6,000 | 2,000 | 56 | 340 | 230 | 300 | <10 | 130 | <10 |
| | 06/05/02 | 11,000 | <2,000 | 1,600 | 46 | 210 | 47 | 790 | <10 | 220 | <10 |
| | 09/09/02 | 12,000 | <800 | 1,400 | 44 | 130 | 27 | 760 | <10 | 160 | <5.0 |
| | 12/19/02 | 10,000 | NS | 740 | 32 | 180 | 38 | 86 | <5.0 | <50 | <5.0 |
| | 03/10/03 | 13,000 | <6,000 | 1,200 | 42 | 240 | 35 | 470 | 5.3 | 140 | <2.5 |
| | 06/03/03 | 6,500 | <3,000 | 750 | 21 | 46 | 15 | 1,300 | <50 | 280 | <10 |
| | 09/19/03 | 9,800 | <3,000 | 1,500 | 38 | 170 | 32 | 420 | <10 | 150 | <5.0 |
| | 12/22/03 | 8,800 | <2,000 | 1,100 | 32 | 82 | 20 | 330 | 5.8 | 52 | <2.5 |
| | 03/12/04 | 7,600 | <3,000 | 590 | 23 | 69 | 17 | 470 | 9.2 | 63 | <1.5 |
| | 06/11/04 | 7,800 | <2,000 | 840 | 19 | 58 | 15 | 710 | 12 | 140 | <2.5 |
| | 09/13/04 | 7,500 | <1,500 | 840 | 17 | 23 | 7.8 | 730 | 15 | 93 | <2.5 |
| | 12/16/04 | 9,300 | <2,000 | 1,100 | 26 | 76 | 13 | 600 | 12 | 130 | <2.5 |
| | 03/21/05 | 11,000 | <3,000 | 1,200 | 37 | 190 | 24 | 460 | 9.3 | 100 | <2.5 |
| | 06/23/05 | 9,600 | <4,000 | 1,100 | 28 | 93 | 23 | 370 | 8.2 | 67 | <1.5 |
| | 09/30/05 | 9,000 | <3,000 | 690 | 18 | 32 | 14 | 380 | 8.4 | 72 | <1.5 |
| | 12/08/05 | 8,700 | <3,000 | 560 | 23 | 38 | 12 | 350 | 6.9 | 82 | <1.5 |
| | 03/01/06 | 8,400 | <2,000 | 410 | 24 | 42 | 13 | 360 | 8 | 58 | <1.5 |
| | 05/25/06 | 9,900 | <2,000 | 630 | 25 | 13 | 13 | 190 | 5.3 | 59 | <1.5 |
| | 08/10/06 | 14,000 | <3,000 | 690 | 43 | 130 | 26 | 200 | 5.4 | 70 | <1.5 |
| | 11/21/06 | 10,000 | <3,000 | 580 | 37 | 96 | 25 | 240 | 6.3 | 72 | <1.5 |
| | 02/06/07 | 7,700 | <1,000 | 520 | 36 | 90 | 23 | 260 | 7.4 | 54 | <1.5 |
| | 05/08/07 | 4,700 | <800 | 150 | 0.86 | <0.5 | <0.5 | 170 | 5 | 52 | <0.5 |
| | 08/06/07 | 6,000 | <1,000 | 240 | 26 | 34 | 17 | 180 | 5 | 55 | <0.5 |
| | 12/26/07 | 8,100 | <1,500 | 76 | 14 | 17 | 12 | 150 | 4.3 | 37 | <0.9 |
| | 03/31/08 | 7,900 | <1,500 | 250 | 30 | 62 | 20 | 140 | 4.5 | 47 | <0.90 |
| 06/28/08 | 6,400 | 3,100* | 97 | 17 | 19 | 13 | 200 | 5.6 | 38 | <5.0 | |
| 09/27/08 | 11,000 | 15,000* | 190 | 24 | 29 | 16 | 160 | <5.0 | 40 | <5.0 | |
| 12/30/08 | 9,100 | 2,300* | 160 | 24 | 31 | 18 | 150 | 5 | 100 | <5.0 | |
| 03/28/09 | 9,200 | 4,300* | 150 | 25 | 34 | 22 | 120 | <5.0 | 38 | <5.0 | |
| 09/12/09 | 6,100 | 2,700* | 110 | 21 | 14 | 18 | 170 | <5.0 | 38 | <0.5 | |
| 03/30/10 | 12,000 | 12,000* | 200 | 25 | 35 | 23 | 96 | <5.0 | 58 | <5.0 | |
| 09/30/10 | 6,300 | 5,100 | 110 | 14 | 6.2 | 16 | 110 | 3.8 | 16 | <2.5 | |

Table 4
Historical
Groundwater Analytical Results
Alaska Gas
Alameda, California

| Well ID | Date | TPH-g | TPH-d | benzene | toluene | ethyl-benzene | xylenes | MtBE | tAME | tBA | Other Oxygenates |
|----------|----------|-------|-------|---------|---------|---------------|---------|-------|------|--------|------------------|
| MW-4 | 05/25/06 | 410 | <80 | <2.5 | <2.5 | <2.5 | <2.5 | 1800 | 28 | 44 | <2.5 |
| | 08/10/06 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 1.2 | <0.5 | <5.0 | <0.5 |
| | 11/21/06 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 0.59 | <0.5 | <5.0 | <0.5 |
| | 02/06/07 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 05/08/07 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <5.0 | <0.5 |
| | 08/06/07 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 0.82 | <0.5 | <5.0 | <0.5 |
| | 12/26/07 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 1.3 | <0.5 | <5.0 | <0.5 |
| | 03/31/08 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 1.4 | <0.5 | <5.0 | <0.5 |
| | 06/28/08 | <50 | 88 | <0.5 | <0.5 | <0.5 | <0.5 | 1.1 | <0.5 | <2.0 | <0.5 |
| | 09/27/08 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 1.3 | <0.5 | <5.0 | <0.5 |
| | 12/30/08 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 1.2 | <0.5 | <0.5 | <0.5 |
| | 03/28/09 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 0.9 | <0.5 | <0.5 | <0.5 |
| | 09/12/09 | <50 | 240 | <0.5 | <0.5 | <0.5 | <0.5 | 1.0 | <0.5 | <2.0 | <0.5 |
| 03/30/10 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 0.58 | <0.5 | <2.0 | <0.5 | |
| 09/30/10 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 0.76 | <0.5 | <2.0 | <0.5 | |
| MW-5 | 05/25/06 | <50 | 86 | <0.5 | <0.5 | <0.5 | <0.5 | 1.2 | <0.5 | <5.0 | <0.5 |
| | 08/10/06 | 55 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 1,100 | 19 | 9.1 | <0.5 |
| | 11/21/06 | <250 | <50 | <2.5 | <2.5 | <2.5 | <2.5 | 1,500 | 25 | 28 | <2.5 |
| | 02/06/07 | 430 | <50 | 6.9 | <2.5 | <2.5 | <2.5 | 1,600 | 26 | 34 | <2.5 |
| | 05/08/07 | <250 | <50 | <2.5 | <2.5 | <2.5 | <2.5 | 1,200 | 20 | 38 | <2.5 |
| | 08/06/07 | 330 | <80 | <2.5 | <2.5 | <2.5 | <2.5 | 1,000 | 20 | 39 | <2.5 |
| | 12/26/07 | 490 | <50 | <2.5 | <2.5 | <2.5 | <2.5 | 1,000 | 18 | 28 | <2.5 |
| | 03/31/08 | 520 | <100 | 6.0 | 1.9 | <1.5 | 2.5 | 520 | 16 | 33 | <1.5 |
| | 06/28/08 | 510 | 290* | 6.2 | 1.0 | <0.5 | 2.3 | 550 | 11 | <40 | <10 |
| | 09/27/08 | 670 | 320* | <17 | <17 | <17 | <17 | 650 | <17 | 95 | <17 |
| | 12/30/08 | 210 | 130* | <0.5 | 0.8 | 0.99 | <0.5 | 610 | 12 | <40 | <10 |
| | 03/28/09 | 200 | 100* | <17 | <17 | <17 | <17 | 610 | <17 | <67 | <17 |
| | 09/12/09 | 230 | 130* | 1.6 | 1.3 | <0.5 | 1.4 | 540 | 11 | <40 | <10 |
| 03/30/10 | 360 | 170* | 2.0 | 1.7 | <0.5 | 1.3 | 490 | 13 | <40 | <10 | |
| 09/30/10 | 710 | 310 | 10 | 2.6 | <1.0 | 3.1 | 400 | <10 | <40 | <10 | |
| ESL | | 100 | 100 | 1.0 | 40 | 30 | 20 | 5 | NE | 50,000 | NA |

Notes:

Units are micrograms per liter (ug/L).

NT analyte not tested

TPH-g total petroleum hydrocarbons as gasoline

TPH-d total petroleum hydrocarbons as diesel

* Laboratory noted that TPH-g range is significant

MtBE methyl tert-butyl ether

tAME tert-amyl methyl ether

tBA tert-butanol

APPENDIX A
MONITORING WELL PURGE LOGS

MATRIKS CORPORATION MONITORING DATA SHEET

| | |
|--|--|
| Project #: <u>6022</u> | Station #: <u>Alameda Gas</u> |
| Sampler: <u>C. Truesdale / T. Henderson</u> | Date: <u>9-30-10</u> |
| Weather: <u>Clean & Warm</u> | Ambient Air Temperature: |
| Well ID: <u>MW-1</u> | Well Diameter: <u>2"</u> 3" 4" 6" 8" _____ |
| Total Well Depth: <u>18'</u> | Depth to Water: <u>5.61'</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced To: | D.O. Meter (if req'd): YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|---------------------------|------------------|--------------------------|
| Purge Method: | Sampling Method: | Bailer |
| Bailer | Water | <u>Disposable Bailer</u> |
| <u>Disposable Bailer</u> | Peristaltic | Extraction Port |
| Positive Air Displacement | Extraction Pump | Dedicated Tubing |
| Electric Submersible | Other _____ | Other _____ |

| $\frac{1.98 \text{ (Gals.)} \times 3}{1 \text{ Case Volume}} = 5.9 \text{ Gallons}$ <p style="font-size: small; margin: 0;">Specified Volumes Calculated Volume</p> | <table border="1" style="width:100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table> | Well Diameter | Multiplier | Well Diameter | Multiplier | 1" | 0.04 | 4" | 0.65 | 2" | 0.16 | 6" | 1.47 | 3" | 0.37 | Other | radius ² * 0.163 |
|--|---|---------------|-----------------------------|---------------|------------|----|------|----|------|----|------|----|------|----|------|-------|-----------------------------|
| Well Diameter | Multiplier | Well Diameter | Multiplier | | | | | | | | | | | | | | |
| 1" | 0.04 | 4" | 0.65 | | | | | | | | | | | | | | |
| 2" | 0.16 | 6" | 1.47 | | | | | | | | | | | | | | |
| 3" | 0.37 | Other | radius ² * 0.163 | | | | | | | | | | | | | | |

| Time | Temp (°F) | pH | Cond. (mS or µS) | Turbidity (NTUs) | Gallons Removed | Observations |
|-------|-----------|------|------------------|------------------|-----------------|-------------------|
| 12:14 | 73.2 | 6.58 | 733 | | 1.5 | Grey, slight odor |
| 12:34 | 71.9 | 6.76 | 732 | | 3 | " " " " |
| | | | | | | |
| | | | | | | |
| | | | | | | slow recharge |

| | |
|---|-----------------------------|
| Did well dewater? Yes No | Gallons actually evacuated: |
| Sampling Date: <u>9-30-10</u> Sampling Time: <u>12:35</u> Depth to Water: | |
| Sample ID: <u>MW-1</u> Laboratory: <u>Mc Campbell</u> | |
| Analyzed for: <u>TPH-g</u> <u>BTEX</u> <u>MtBE</u> <u>Oxys</u> Other: <u>TPH-d, 2 pb scavengers</u> | |
| Duplicate ID: Analyzed for: TPH-g BTEX MtBE Oxys Other: | |
| D.O. (if req'd): Pre-purge: _____ mg/L Post-purge: _____ mg/L | |
| ORP (if req'd): Pre-purge: _____ mV Post-purge: _____ mV | |

MATRIKS CORPORATION MONITORING DATA SHEET

| | |
|--|--|
| Project #: <u>6022</u> | Station #: <u>Alameda Gas</u> |
| Sampler: <u>C. Truesdale / T. Henderson</u> | Date: <u>9-30-10</u> |
| Weather: <u>Clean & Warm</u> | Ambient Air Temperature: |
| Well ID: <u>MW-2</u> | Well Diameter: <u>2"</u> 3" 4" 6" 8" _____ |
| Total Well Depth: <u>18'</u> | Depth to Water: <u>6.0'</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced To: | D.O. Meter (if req'd): YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|---------------------------|------------------|--------------------------|
| Purge Method: | Sampling Method: | Bailer |
| Bailer | Waterira | <u>Disposable Bailer</u> |
| <u>Disposable Bailer</u> | Peristaltic | Extraction Port |
| Positive Air Displacement | Extraction Pump | Dedicated Tubing |
| Electric Submersible | Other _____ | Other _____ |

| $\underline{1.92} \text{ (Gals.)} \times \underline{3} = \underline{5.76} \text{ Gallons}$ <p style="font-size: small; margin: 0;">1 Case Volume Specified Volumes Calculated Volume</p> | <table border="1" style="width:100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table> | Well Diameter | Multiplier | Well Diameter | Multiplier | 1" | 0.04 | 4" | 0.65 | 2" | 0.16 | 6" | 1.47 | 3" | 0.37 | Other | radius ² * 0.163 |
|--|---|---------------|-----------------------------|---------------|------------|----|------|----|------|----|------|----|------|----|------|-------|-----------------------------|
| Well Diameter | Multiplier | Well Diameter | Multiplier | | | | | | | | | | | | | | |
| 1" | 0.04 | 4" | 0.65 | | | | | | | | | | | | | | |
| 2" | 0.16 | 6" | 1.47 | | | | | | | | | | | | | | |
| 3" | 0.37 | Other | radius ² * 0.163 | | | | | | | | | | | | | | |

| Time | Temp (°F) | pH | Cond. (mS or µS) | Turbidity (NTUs) | Gallons Removed | Observations |
|-------|-----------|------|------------------|------------------|-----------------|--------------------|
| 12:00 | 73.4 | 6.82 | 340 | | 1 | Cloudy Slight Odor |
| 12:03 | 73.04 | 6.53 | 342 | | 3 | " " |
| 12:07 | 75.92 | 6.48 | 347 | | 6 | " " |
| | | | | | | |
| | | | | | | |

| | |
|---|---|
| Did well dewater? Yes No | Gallons actually evacuated: |
| Sampling Date: <u>9-30-10</u> Sampling Time: | Depth to Water: |
| Sample ID: <u>MW-2</u> Laboratory: <u>McCampbell</u> | |
| Analyzed for: <u>TPH-g</u> <u>BTEX</u> <u>MtBE</u> <u>Oxys</u> Other: <u>TPH-d & 2 pbs scavengers</u> | |
| Duplicate ID: | Analyzed for: TPH-g BTEX MtBE Oxys Other: |
| D.O. (if req'd): Pre-purge: | mg/L Post-purge: mg/L |
| ORP (if req'd): Pre-purge: | mV Post-purge: mV |

MATRIKS CORPORATION MONITORING DATA SHEET

| | |
|--|--|
| Project #: <u>6022</u> | Station #: <u>Alameda Gas</u> |
| Sampler: <u>C. Truesdale / T. Henderson</u> | Date: <u>9-30-10</u> |
| Weather: <u>Clear & Warm</u> | Ambient Air Temperature: |
| Well ID: <u>MW-3</u> | Well Diameter: <u>2"</u> 3" 4" 6" 8" _____ |
| Total Well Depth: <u>20'</u> | Depth to Water: <u>4.38</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced To: | D.O. Meter (if req'd): YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | |
|---|---|
| Purge Method: | Sampling Method: |
| <input type="checkbox"/> Bailer <input checked="" type="checkbox"/> Disposable Bailer <input type="checkbox"/> Positive Air Displacement <input type="checkbox"/> Electric Submersible | <input type="checkbox"/> Waterra <input type="checkbox"/> Peristaltic <input type="checkbox"/> Extraction Pump <input type="checkbox"/> Other _____ |
| | <input type="checkbox"/> Bailer <input checked="" type="checkbox"/> Disposable Bailer <input type="checkbox"/> Extraction Port <input type="checkbox"/> Dedicated Tubing <input type="checkbox"/> Other _____ |

| $\underline{2.49} \text{ (Gals.)} \times \underline{3} = \underline{7.49} \text{ Gallons}$ <p>1 Case Volume Specified Volumes Calculated Volume</p> | <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table> | Well Diameter | Multiplier | Well Diameter | Multiplier | 1" | 0.04 | 4" | 0.65 | 2" | 0.16 | 6" | 1.47 | 3" | 0.37 | Other | radius ² * 0.163 |
|---|---|---------------|-----------------------------|---------------|------------|----|------|----|------|----|------|----|------|----|------|-------|-----------------------------|
| Well Diameter | Multiplier | Well Diameter | Multiplier | | | | | | | | | | | | | | |
| 1" | 0.04 | 4" | 0.65 | | | | | | | | | | | | | | |
| 2" | 0.16 | 6" | 1.47 | | | | | | | | | | | | | | |
| 3" | 0.37 | Other | radius ² * 0.163 | | | | | | | | | | | | | | |

| Time | Temp (°F) | pH | Cond. (mS or µS) | Turbidity (NTUs) | Gallons Removed | Observations |
|-------|-----------|------|------------------|------------------|-----------------|--------------------------------------|
| 12:21 | 74.1 | 6.56 | 639 | | 1.5 | Greenish, slight sk ^o dor |
| 12:26 | 71.9 | 6.66 | 660 | | 7 | " " " |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | | | |
|---|---|-------------|------|
| Did well dewater? Yes <input type="checkbox"/> <input checked="" type="checkbox"/> No | Gallons actually evacuated: | | |
| Sampling Date: <u>9-30-10</u> Sampling Time: | Depth to Water: | | |
| Sample ID: | Laboratory: <u>Mc Campbell</u> | | |
| Analyzed for: <u>TPH-g BTEX MtBE Oxys</u> Other: <u>TPH-d & 2 pb scavengers</u> | | | |
| Duplicate ID: | Analyzed for: TPH-g BTEX MtBE Oxys Other: | | |
| D.O. (if req'd): Pre-purge: | mg/L | Post-purge: | mg/L |
| ORP (if req'd): Pre-purge: | mV | Post-purge: | mV |

MATRIKS CORPORATION MONITORING DATA SHEET

| | |
|--|---|
| Project #: <u>6022</u> | Station #: <u>Alameda Gas</u> |
| Sampler: <u>C. Truesdale/T. Henderson</u> | Date: <u>9-30-10</u> |
| Weather: <u>Clear & Warm</u> | Ambient Air Temperature: |
| Well ID: <u>MW-4</u> | Well Diameter (<u>2"</u>) 3" 4" 6" 8" _____ |
| Total Well Depth: <u>16'</u> | Depth to Water: <u>3.79'</u> |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced To: | D.O. Meter (if req'd): YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: | |

| | | |
|---------------------------|------------------|--------------------------|
| Purge Method: | Sampling Method: | Bailer |
| Bailer | Water | <u>Disposable Bailer</u> |
| <u>Disposable Bailer</u> | Peristaltic | Extraction Port |
| Positive Air Displacement | Extraction Pump | Dedicated Tubing |
| Electric Submersible | Other _____ | Other _____ |

| $\frac{195}{1} \text{ (Gals.)} \times \frac{3}{\text{Specified Volumes}} = \frac{5.86}{\text{Calculated Volume}} \text{ Gallons}$ | <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table> | Well Diameter | Multiplier | Well Diameter | Multiplier | 1" | 0.04 | 4" | 0.65 | 2" | 0.16 | 6" | 1.47 | 3" | 0.37 | Other | radius ² * 0.163 |
|---|---|---------------|-----------------------------|---------------|------------|----|------|----|------|----|------|----|------|----|------|-------|-----------------------------|
| Well Diameter | Multiplier | Well Diameter | Multiplier | | | | | | | | | | | | | | |
| 1" | 0.04 | 4" | 0.65 | | | | | | | | | | | | | | |
| 2" | 0.16 | 6" | 1.47 | | | | | | | | | | | | | | |
| 3" | 0.37 | Other | radius ² * 0.163 | | | | | | | | | | | | | | |

| Time | Temp (°F) | pH | Cond. (mS or µS) | Turbidity (NTUs) | Gallons Removed | Observations |
|-------|-----------|------|------------------|------------------|-----------------|--------------|
| 12:58 | 69.4 | 7.06 | 422 | | 2 | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | |
|--|--|
| Did well dewater? Yes No | Gallons actually evacuated: |
| Sampling Date: <u>9-30-10</u> Sampling Time: | Depth to Water: |
| Sample ID: | Laboratory: <u>McCampbell</u> |
| Analyzed for: <u>(TPH-g BTEX MtBE Oxy)</u> Other: <u>TPH-d & 2 ph scavengers</u> | |
| Duplicate ID: | Analyzed for: TPH-g BTEX MtBE Oxy Other: |
| D.O. (if req'd): Pre-purge: _____ mg/L | Post-purge: _____ mg/L |
| ORP (if req'd): Pre-purge: _____ mV | Post-purge: _____ mV |

MATRIKS CORPORATION MONITORING DATA SHEET

| | |
|--|--|
| Project #: <u>6022</u> | Station #: <u>Alameda Gas</u> |
| Sampler: <u>C. Tresdale / T. Henderson</u> | Date: <u>9-30-10</u> |
| Weather: <u>Clear & Warm</u> | Ambient Air Temperature: _____ |
| Well ID: <u>MW-5</u> | Well Diameter: <u>2nd</u> 3" 4" 6" 8" _____ |
| Total Well Depth: <u>17'</u> | Depth to Water: <u>4.11'</u> |
| Depth to Free Product: _____ | Thickness of Free Product (feet): _____ |
| Referenced To: _____ | D.O. Meter (if req'd): YSI HACH |
| DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____ | |

| | | |
|---|--|--|
| Purge Method: | Sampling Method: | Bailer |
| <input type="checkbox"/> Bailor <input checked="" type="checkbox"/> Disposable Bailer <input type="checkbox"/> Positive Air Displacement <input type="checkbox"/> Electric Submersible | <input type="checkbox"/> Waterra <input type="checkbox"/> Peristaltic <input type="checkbox"/> Extraction Pump <input type="checkbox"/> Other _____ | <input checked="" type="checkbox"/> Disposable Bailer <input type="checkbox"/> Extraction Port <input type="checkbox"/> Dedicated Tubing <input type="checkbox"/> Other _____ |

| $\underline{2.06} \text{ (Gals.)} \times \underline{3} = \underline{6.18} \text{ Gallons}$ <p style="font-size: small; margin: 0;">1 Case Volume Specified Volumes Calculated Volume</p> | <table border="1" style="width:100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table> | Well Diameter | Multiplier | Well Diameter | Multiplier | 1" | 0.04 | 4" | 0.65 | 2" | 0.16 | 6" | 1.47 | 3" | 0.37 | Other | radius ² * 0.163 |
|--|---|---------------|-----------------------------|---------------|------------|----|------|----|------|----|------|----|------|----|------|-------|-----------------------------|
| Well Diameter | Multiplier | Well Diameter | Multiplier | | | | | | | | | | | | | | |
| 1" | 0.04 | 4" | 0.65 | | | | | | | | | | | | | | |
| 2" | 0.16 | 6" | 1.47 | | | | | | | | | | | | | | |
| 3" | 0.37 | Other | radius ² * 0.163 | | | | | | | | | | | | | | |

| Time | Temp (°F) | pH | Cond. (mS or µS) | Turbidity (NTUs) | Gallons Removed | Observations |
|-------|-----------|------|------------------|------------------|-----------------|-----------------|
| 12:46 | 69.4 | 6.84 | 803 | | 2.5 | slightly cloudy |
| 12:48 | 69.1 | 6.84 | 768 | | 4 | " " |
| 12:49 | 69.4 | 6.84 | 774 | | 6 | " " |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | | | |
|--|------------|--|-------------|
| Did well dewater? Yes No | | Gallons actually evacuated: _____ | |
| Sampling Date: <u>9-30-10</u> | | Sampling Time: _____ | |
| Sample ID: _____ | | Laboratory: <u>McC Campbell</u> | |
| Analyzed for: <u>TPH-g BTEX MtBE Oxy</u> | | Other: <u>TPH-2 & 2 pb scavengers</u> | |
| Duplicate ID: _____ | | Analyzed for: TPH-g BTEX MtBE Oxy Other: _____ | |
| D.O. (if req'd): | Pre-purge: | mg/L | Post-purge: |
| ORP (if req'd): | Pre-purge: | mV | Post-purge: |
| | | | mg/L |
| | | | mV |

APPENDIX B
LABORATORY ANALYTICAL REPORTS FOR
GROUNDWATER SAMPLES



McC Campbell Analytical, Inc.

"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mcccampbell.com E-mail: main@mcccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

| | | |
|---|---------------------------------------|--------------------------|
| Matriks Corporation 321 Court Street Woodland, CA 95695 | Client Project ID: #6022; Alameda Gas | Date Sampled: 09/30/10 |
| | | Date Received: 10/04/10 |
| | Client Contact: Tom Henderson | Date Reported: 10/11/10 |
| | Client P.O.: | Date Completed: 10/08/10 |

WorkOrder: 1010062

October 11, 2010

Dear Tom:

Enclosed within are:

- 1) The results of the **5** analyzed samples from your project: **#6022; Alameda Gas,**
- 2) A QC report for the above samples,
- 3) A copy of the chain of custody, and
- 4) An invoice for analytical services.

All analyses were completed satisfactorily and all QC samples were found to be within our control limits.

If you have any questions or concerns, please feel free to give me a call. Thank you for choosing

McC Campbell Analytical Laboratories for your analytical needs.

Best regards,

Angela Rydelius
Laboratory Manager
McC Campbell Analytical, Inc.

1010062



McCAMPBELL ANALYTICAL, INC.
 1534 WILLOW PASS ROAD
 PITTSBURG, CA 94565-1701
 Website: www.mccampbell.com Email: main@mccampbell.com
 Telephone: (877) 252-9262 Fax: (925) 252-9269

CHAIN OF CUSTODY RECORD

TURN AROUND TIME RUSH 24 HR 48 HR 72 HR 5 DAY
GeoTracker EDF **PDF** **Excel** **Write On (DW)**
 Check if sample is effluent and "J" flag is required

Report To: Tom Henderson **Bill To:** Matrix/HCE
Company: Matrix/HCE
 321 Court Street
 Woodland, CA 95695 **E-Mail:** cstrivesdale@matrixcorp.com
Tele: (530) 406-1766 **Fax:** (530) 406-1071
Project #: 6022 **Project Name:** Alameda Gas
Project Location: 1310 Central Avenue, Alameda
Sampler Signature: C. Strivesdale

| SAMPLE ID | LOCATION/ Field Point Name | SAMPLING | | # Containers | Type Containers | MATRIX | | | | | METHOD PRESERVED | | | | Analysis Request | Other | Comments |
|-----------|----------------------------------|----------|------|--------------|-----------------|--------|------|-----|--------|-------|------------------|-----|------------------|-------|------------------|-------|--|
| | | Date | Time | | | Water | Soil | Air | Sludge | Other | ICE | HCL | HNO ₃ | Other | | | |
| MW-1 | | 9/30/10 | | 4 | 30 | X | | | | | | X | X | X | X | | **Indicate here if these samples are potentially dangerous to handle: 7 Oxy & 2 ph scavengers |
| MW-2 | | | | 4 | | | | | | | | | | | | | |
| MW-3 | | | | 4 | | | | | | | | | | | | | |
| MW-4 | | | | 4 | | | | | | | | | | | | | |
| MW-5 | | | | 4 | | | | | | | | | | | | | |

+56022
 +2
 +1
 +
 +
 ↓

**MAI clients MUST disclose any dangerous chemicals known to be present in their submitted samples in concentrations that may cause immediate harm or serious future health endangerment as a result of brief, gloved, open air, sample handling by MAI staff. Non-disclosure incurs an immediate \$250 surcharge and the client is subject to full legal liability for harm suffered. Thank you for your understanding and for allowing us to work safely.

| | | | |
|---|-------------------------|------------------------|------------------------------------|
| Relinquished By: C. Strivesdale | Date: 10/1/10 | Time: 10:30A | Received By: [Signature] |
| Relinquished By: [Signature] | Date: 10/4/10 | Time: 10:20 | Received By: [Signature] |
| Relinquished By: [Signature] | Date: 10/8/10 | Time: 12P | Received By: [Signature] |

COMMENTS:
 ICE/A° 32i ✓
 GOOD CONDITION ✓
 HEAD SPACE ABSENT ✓
 DECHLORINATED IN LAB ✓
 APPROPRIATE CONTAINERS ✓
 PRESERVED IN LAB ✓
 VOAS O&G METALS OTHER
 PRESERVATION pH<2

McC Campbell Analytical, Inc.



1534 Willow Pass Rd
 Pittsburg, CA 94565-1701
 (925) 252-9262

CHAIN-OF-CUSTODY RECORD

WorkOrder: 1010062

ClientCode: MCW

WaterTrax
 WriteOn
 EDF
 Excel
 Fax
 Email
 HardCopy
 ThirdParty
 J-flag

| | | | | | |
|-------------------|--|---|-----------------|---|---|
| Report to: | Tom Henderson Matriks Corporation 321 Court Street Woodland, CA 95695 (530) 406-1760 FAX (530) 406-1771 | Email: thenderson@matrikscorp.com cc: PO: ProjectNo: #6022; Alameda Gas | Bill to: | Robert Neely Matriks Corporation 321 Court Street Woodland, CA 95695 | Requested TAT: 5 days |
| | | | | | Date Received: 10/04/2010 Date Printed: 10/04/2010 |

| Lab ID | Client ID | Matrix | Collection Date | Hold | Requested Tests (See legend below) | | | | | | | | | | | |
|-------------|-----------|--------|-----------------|--------------------------|------------------------------------|---|---|---|---|---|---|---|---|----|----|----|
| | | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 1010062-001 | 6022 MW-1 | Water | 9/30/2010 | <input type="checkbox"/> | C | A | A | B | | | | | | | | |
| 1010062-002 | 6022 MW-2 | Water | 9/30/2010 | <input type="checkbox"/> | C | A | | B | | | | | | | | |
| 1010062-003 | 6022 MW-3 | Water | 9/30/2010 | <input type="checkbox"/> | C | A | | B | | | | | | | | |
| 1010062-004 | 6022 MW-4 | Water | 9/30/2010 | <input type="checkbox"/> | C | A | | B | | | | | | | | |
| 1010062-005 | 6022 MW-5 | Water | 9/30/2010 | <input type="checkbox"/> | C | A | | B | | | | | | | | |

Test Legend:

| | | | | | | | | | |
|----|----------|----|-----------|---|--------------|---|----------|----|--|
| 1 | 9-OXYS_W | 2 | G-MBTEX_W | 3 | PREFD REPORT | 4 | TPH(D)_W | 5 | |
| 6 | | 7 | | 8 | | 9 | | 10 | |
| 11 | | 12 | | | | | | | |

Prepared by: Melissa Valles

Comments:

NOTE: Soil samples are discarded 60 days after results are reported unless other arrangements are made (Water samples are 30 days).
 Hazardous samples will be returned to client or disposed of at client expense.



Sample Receipt Checklist

Client Name: **Matriks Corporation**

Date and Time Received: **10/4/2010 12:33:16 PM**

Project Name: **#6022; Alameda Gas**

Checklist completed and reviewed by: **Melissa Valles**

WorkOrder N°: **1010062** Matrix Water

Carrier: EnviroTech (RC)

Chain of Custody (COC) Information

- Chain of custody present? Yes No
- Chain of custody signed when relinquished and received? Yes No
- Chain of custody agrees with sample labels? Yes No
- Sample IDs noted by Client on COC? Yes No
- Date and Time of collection noted by Client on COC? Yes No
- Sampler's name noted on COC? Yes No

Sample Receipt Information

- Custody seals intact on shipping container/cooler? Yes No NA
- Shipping container/cooler in good condition? Yes No
- Samples in proper containers/bottles? Yes No
- Sample containers intact? Yes No
- Sufficient sample volume for indicated test? Yes No

Sample Preservation and Hold Time (HT) Information

- All samples received within holding time? Yes No
- Container/Temp Blank temperature Cooler Temp: 3.2°C NA
- Water - VOA vials have zero headspace / no bubbles? Yes No No VOA vials submitted
- Sample labels checked for correct preservation? Yes No
- Metal - pH acceptable upon receipt (pH<2)? Yes No NA
- Samples Received on Ice? Yes No

(Ice Type: WET ICE)

* NOTE: If the "No" box is checked, see comments below.

Client contacted:

Date contacted:

Contacted by:

Comments:



McC Campbell Analytical, Inc.

"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mcccampbell.com E-mail: main@mcccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

| | | |
|---|---------------------------------------|--------------------------|
| Matriks Corporation 321 Court Street Woodland, CA 95695 | Client Project ID: #6022; Alameda Gas | Date Sampled: 09/30/10 |
| | | Date Received: 10/04/10 |
| | Client Contact: Tom Henderson | Date Extracted: 10/07/10 |
| | Client P.O.: | Date Analyzed: 10/07/10 |

Oxygenated Volatile Organics + EDB and 1,2-DCA by P&T and GC/MS*

Extraction Method: SW5030B

Analytical Method: SW8260B

Work Order: 1010062

| | | | | | | |
|-----------|--------------|--------------|--------------|--------------|------------------------------|--|
| Lab ID | 1010062-001C | 1010062-002C | 1010062-003C | 1010062-004C | Reporting Limit for DF =1 | |
| Client ID | 6022 MW-1 | 6022 MW-2 | 6022 MW-3 | 6022 MW-4 | | |
| Matrix | W | W | W | W | | |
| DF | 1 | 1 | 5 | 1 | | |

| Compound | Concentration | | | | ug/kg | µg/L |
|-------------------------------|---------------|----|---------|------|-------|------|
| tert-Amyl methyl ether (TAME) | ND | ND | 3.8 | ND | NA | 0.5 |
| t-Butyl alcohol (TBA) | 2.2 | ND | 16 | ND | NA | 2.0 |
| 1,2-Dibromoethane (EDB) | ND | ND | ND<2.5 | ND | NA | 0.5 |
| 1,2-Dichloroethane (1,2-DCA) | ND | ND | ND<2.5 | ND | NA | 0.5 |
| Diisopropyl ether (DIPE) | ND | ND | ND<2.5 | ND | NA | 0.5 |
| Ethanol | ND | ND | ND<250 | ND | NA | 50 |
| Ethyl tert-butyl ether (ETBE) | ND | ND | ND<2.5 | ND | NA | 0.5 |
| Methanol | ND | ND | ND<2500 | ND | NA | 500 |
| Methyl-t-butyl ether (MTBE) | 3.7 | ND | 110 | 0.76 | NA | 0.5 |

Surrogate Recoveries (%)

| | | | | | |
|----------|----|----|----|----|--|
| %SS1: | 88 | 89 | 87 | 89 | |
| Comments | b1 | b1 | b1 | | |

* water and vapor samples are reported in µg/L, soil/sludge/solid samples in mg/kg, product/oil/non-aqueous liquid samples and all TCLP & SPLP extracts are reported in mg/L, wipe samples in µg/wipe.

ND means not detected above the reporting limit/method detection limit; N/A means analyte not applicable to this analysis.

surrogate diluted out of range or coelutes with another peak; &) low surrogate due to matrix interference.

%SS = Percent Recovery of Surrogate Standard

DF = Dilution Factor

b1) aqueous sample that contains greater than ~1 vol. % sediment



McC Campbell Analytical, Inc.

"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mcccampbell.com E-mail: main@mcccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

| | | |
|---|---------------------------------------|--------------------------|
| Matriks Corporation 321 Court Street Woodland, CA 95695 | Client Project ID: #6022; Alameda Gas | Date Sampled: 09/30/10 |
| | | Date Received: 10/04/10 |
| | Client Contact: Tom Henderson | Date Extracted: 10/07/10 |
| | Client P.O.: | Date Analyzed: 10/07/10 |

Oxygenated Volatile Organics + EDB and 1,2-DCA by P&T and GC/MS*

Extraction Method: SW5030B

Analytical Method: SW8260B

Work Order: 1010062

| | | | | | |
|-----------|--------------|--|--|------------------------------|---|
| Lab ID | 1010062-005C | | | Reporting Limit for DF =1 | |
| Client ID | 6022 MW-5 | | | | |
| Matrix | W | | | | |
| DF | 20 | | | | S |

| Compound | Concentration | | | ug/kg | µg/L |
|-------------------------------|---------------|--|--|-------|------|
| tert-Amyl methyl ether (TAME) | ND<10 | | | NA | 0.5 |
| t-Butyl alcohol (TBA) | ND<40 | | | NA | 2.0 |
| 1,2-Dibromoethane (EDB) | ND<10 | | | NA | 0.5 |
| 1,2-Dichloroethane (1,2-DCA) | ND<10 | | | NA | 0.5 |
| Diisopropyl ether (DIPE) | ND<10 | | | NA | 0.5 |
| Ethanol | ND<1000 | | | NA | 50 |
| Ethyl tert-butyl ether (ETBE) | ND<10 | | | NA | 0.5 |
| Methanol | ND<10,000 | | | NA | 500 |
| Methyl-t-butyl ether (MTBE) | 400 | | | NA | 0.5 |

Surrogate Recoveries (%)

| | | | | |
|-------|----|--|--|--|
| %SS1: | 89 | | | |
|-------|----|--|--|--|

Comments

* water and vapor samples are reported in µg/L, soil/sludge/solid samples in mg/kg, product/oil/non-aqueous liquid samples and all TCLP & SPLP extracts are reported in mg/L, wipe samples in µg/wipe.

ND means not detected above the reporting limit/method detection limit; N/A means analyte not applicable to this analysis.

surrogate diluted out of range or coelutes with another peak; &) low surrogate due to matrix interference.

%SS = Percent Recovery of Surrogate Standard

DF = Dilution Factor

b1) aqueous sample that contains greater than ~1 vol. % sediment



McC Campbell Analytical, Inc.

"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

| | | |
|---|---------------------------------------|-----------------------------------|
| Matriks Corporation 321 Court Street Woodland, CA 95695 | Client Project ID: #6022; Alameda Gas | Date Sampled: 09/30/10 |
| | | Date Received: 10/04/10 |
| | Client Contact: Tom Henderson | Date Extracted: 10/06/10-10/08/10 |
| | Client P.O.: | Date Analyzed: 10/06/10-10/08/10 |

Gasoline Range (C6-C12) Volatile Hydrocarbons as Gasoline with BTEX and MTBE*

Extraction method: SW5030B

Analytical methods: SW8021B/8015Bm

Work Order: 1010062

| Lab ID | Client ID | Matrix | TPH(g) | MTBE | Benzene | Toluene | Ethylbenzene | Xylenes | DF | % SS | Comments |
|--------|-----------|--------|--------|--------|---------|---------|--------------|---------|----|------|----------|
| 001A | 6022 MW-1 | W | 2300 | ND<10 | 8.5 | 23 | 150 | 29 | 2 | 95 | d1,b1 |
| 002A | 6022 MW-2 | W | ND | ND | ND | ND | ND | ND | 1 | 98 | b1 |
| 003A | 6022 MW-3 | W | 6300 | ND<250 | 110 | 14 | 6.2 | 16 | 5 | 90 | d1,b1 |
| 004A | 6022 MW-4 | W | ND | ND | ND | ND | ND | ND | 1 | 100 | |
| 005A | 6022 MW-5 | W | 710 | 430 | 10 | 2.6 | ND<1.0 | 3.1 | 2 | 109 | d1 |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

| | | | | | | | | | |
|--|---|-----|------|-------|-------|-------|-------|-------|-------|
| Reporting Limit for DF =1; ND means not detected at or above the reporting limit | W | 50 | 5.0 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | µg/L |
| | S | 1.0 | 0.05 | 0.005 | 0.005 | 0.005 | 0.005 | 0.005 | mg/Kg |

* water and vapor samples are reported in ug/L, soil/sludge/solid samples in mg/kg, wipe samples in µg/wipe, product/oil/non-aqueous liquid samples and all TCLP & SPLP extracts in mg/L.

cluttered chromatogram; sample peak coelutes w/surrogate peak; low surrogate recovery due to matrix interference.

%SS = Percent Recovery of Surrogate Standard; DF = Dilution Factor

+The following descriptions of the TPH chromatogram are cursory in nature and McC Campbell Analytical is not responsible for their interpretation:

b1) aqueous sample that contains greater than ~1 vol. % sediment
d1) weakly modified or unmodified gasoline is significant



McC Campbell Analytical, Inc.

"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

| | | |
|---|---------------------------------------|---------------------------------|
| Matriks Corporation 321 Court Street Woodland, CA 95695 | Client Project ID: #6022; Alameda Gas | Date Sampled: 09/30/10 |
| | | Date Received: 10/04/10 |
| | Client Contact: Tom Henderson | Date Extracted: 10/04/10 |
| | Client P.O.: | Date Analyzed 10/05/10-10/08/10 |

Total Extractable Petroleum Hydrocarbons*

Extraction method SW3510C

Analytical methods: SW8015B

Work Order: 1010062

| Lab ID | Client ID | Matrix | TPH-Diesel (C10-C23) | DF | % SS | Comments |
|--------------|-----------|--------|-------------------------|----|------|--------------|
| 1010062-001B | 6022 MW-1 | W | 6500 | 1 | 116 | e11,e2,b1 |
| 1010062-002B | 6022 MW-2 | W | 310 | 1 | 111 | e4,b1 |
| 1010062-003B | 6022 MW-3 | W | 5100 | 1 | 109 | e4/e11,e2,b1 |
| 1010062-004B | 6022 MW-4 | W | ND | 1 | 114 | |
| 1010062-005B | 6022 MW-5 | W | 310 | 1 | 110 | e4,e2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | | | |
|--|---|----|------|
| Reporting Limit for DF =1; ND means not detected at or above the reporting limit | W | 50 | µg/L |
| | S | NA | NA |

* water samples are reported in ug/L, wipe samples in µg/wipe, soil/solid/sludge samples in mg/kg, product/oil/non-aqueous liquid samples in mg/L, and all DISTLC / STLC / SPLP / TCLP extracts are reported in µg/L.

cluttered chromatogram resulting in coeluted surrogate and sample peaks, or; surrogate peak is on elevated baseline, or; surrogate has been diminished by dilution of original extract.

%SS = Percent Recovery of Surrogate Standard
DF = Dilution Factor

+The following descriptions of the TPH chromatogram are cursory in nature and McC Campbell Analytical is not responsible for their interpretation:

b1) aqueous sample that contains greater than ~1 vol. % sediment
e2) diesel range compounds are significant; no recognizable pattern
e4) gasoline range compounds are significant.; and/or e11) stoddard solvent/mineral spirit (?)



QC SUMMARY REPORT FOR SW8260B

W.O. Sample Matrix: Water

QC Matrix: Water

BatchID: 53502

WorkOrder 1010062

| Analyte | Extraction SW5030B | | | Spiked Sample ID: 1010062-002C | | | | | | | | |
|-------------------------------|--------------------|----------------|--------------|--------------------------------|-----------------|---------------|----------------|-------------------|-------------------------|----|----------|----|
| | Sample µg/L | Spiked µg/L | MS % Rec. | MSD % Rec. | MS-MSD % RPD | LCS % Rec. | LCSD % Rec. | LCS-LCSD % RPD | Acceptance Criteria (%) | | | |
| tert-Amyl methyl ether (TAME) | ND | 10 | 81.6 | 79.1 | 3.08 | 79.7 | 82 | 2.77 | 70 - 130 | 30 | 70 - 130 | 30 |
| t-Butyl alcohol (TBA) | ND | 50 | 92.5 | 91.1 | 1.53 | 85.5 | 86.2 | 0.879 | 70 - 130 | 30 | 70 - 130 | 30 |
| 1,2-Dibromoethane (EDB) | ND | 10 | 101 | 98.2 | 3.28 | 95.3 | 98.3 | 3.14 | 70 - 130 | 30 | 70 - 130 | 30 |
| 1,2-Dichloroethane (1,2-DCA) | ND | 10 | 106 | 101 | 4.37 | 102 | 105 | 2.85 | 70 - 130 | 30 | 70 - 130 | 30 |
| Diisopropyl ether (DIPE) | ND | 10 | 110 | 107 | 2.44 | 109 | 112 | 2.56 | 70 - 130 | 30 | 70 - 130 | 30 |
| Ethyl tert-butyl ether (ETBE) | ND | 10 | 104 | 100 | 3.44 | 102 | 105 | 2.36 | 70 - 130 | 30 | 70 - 130 | 30 |
| Methyl-t-butyl ether (MTBE) | ND | 10 | 111 | 108 | 3.21 | 105 | 109 | 4.02 | 70 - 130 | 30 | 70 - 130 | 30 |
| %SS1: | 89 | 25 | 93 | 93 | 0 | 91 | 94 | 2.82 | 70 - 130 | 30 | 70 - 130 | 30 |

All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:
NONE

BATCH 53502 SUMMARY

| Lab ID | Date Sampled | Date Extracted | Date Analyzed | Lab ID | Date Sampled | Date Extracted | Date Analyzed |
|--------------|--------------|----------------|------------------|--------------|--------------|----------------|------------------|
| 1010062-001C | 09/30/10 | 10/07/10 | 10/07/10 3:02 AM | 1010062-002C | 09/30/10 | 10/07/10 | 10/07/10 3:47 AM |
| 1010062-003C | 09/30/10 | 10/07/10 | 10/07/10 4:56 PM | 1010062-004C | 09/30/10 | 10/07/10 | 10/07/10 5:40 PM |
| 1010062-005C | 09/30/10 | 10/07/10 | 10/07/10 6:24 PM | | | | |

MS = Matrix Spike; MSD = Matrix Spike Duplicate; LCS = Laboratory Control Sample; LCSD = Laboratory Control Sample Duplicate; RPD = Relative Percent Deviation.

% Recovery = 100 * (MS-Sample) / (Amount Spiked); RPD = 100 * (MS - MSD) / ((MS + MSD) / 2).

MS / MSD spike recoveries and / or %RPD may fall outside of laboratory acceptance criteria due to one or more of the following reasons: a) the sample is inhomogenous AND contains significant concentrations of analyte relative to the amount spiked, or b) the spiked sample's matrix interferes with the spike recovery.

N/A = not enough sample to perform matrix spike and matrix spike duplicate.

NR = analyte concentration in sample exceeds spike amount for soil matrix or exceeds 2x spike amount for water matrix or sample diluted due to high matrix or analyte content.

Laboratory extraction solvents such as methylene chloride and acetone may occasionally appear in the method blank at low levels.



QC SUMMARY REPORT FOR SW8021B/8015Bm

W.O. Sample Matrix: Water

QC Matrix: Water

BatchID: 53504

WorkOrder 1010062

| EPA Method SW8021B/8015Bm | | Extraction SW5030B | | | | | | | Spiked Sample ID: 1010062-002A | | | |
|---------------------------|--------|--------------------|--------|--------|--------|--------|--------|----------|--------------------------------|-----|----------|-----|
| Analyte | Sample | Spiked | MS | MSD | MS-MSD | LCS | LCSD | LCS-LCSD | Acceptance Criteria (%) | | | |
| | µg/L | µg/L | % Rec. | % Rec. | % RPD | % Rec. | % Rec. | % RPD | MS / MSD | RPD | LCS/LCSD | RPD |
| TPH(btex) ^f | ND | 60 | 109 | 108 | 0.687 | 106 | 106 | 0 | 70 - 130 | 20 | 70 - 130 | 20 |
| MTBE | ND | 10 | 109 | 108 | 0.763 | 99.2 | 101 | 2.22 | 70 - 130 | 20 | 70 - 130 | 20 |
| Benzene | ND | 10 | 95.9 | 94.7 | 1.25 | 94.7 | 92.3 | 2.55 | 70 - 130 | 20 | 70 - 130 | 20 |
| Toluene | ND | 10 | 96.4 | 94.6 | 1.92 | 94.3 | 92.6 | 1.77 | 70 - 130 | 20 | 70 - 130 | 20 |
| Ethylbenzene | ND | 10 | 94.9 | 93.1 | 1.95 | 93 | 91.8 | 1.30 | 70 - 130 | 20 | 70 - 130 | 20 |
| Xylenes | ND | 30 | 97.7 | 95.3 | 2.51 | 95.8 | 94.1 | 1.71 | 70 - 130 | 20 | 70 - 130 | 20 |
| %SS: | 98 | 10 | 97 | 97 | 0 | 97 | 96 | 1.38 | 70 - 130 | 20 | 70 - 130 | 20 |

All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:
NONE

BATCH 53504 SUMMARY

| Lab ID | Date Sampled | Date Extracted | Date Analyzed | Lab ID | Date Sampled | Date Extracted | Date Analyzed |
|--------------|--------------|----------------|------------------|--------------|--------------|----------------|------------------|
| 1010062-001A | 09/30/10 | 10/07/10 | 10/07/10 7:46 AM | 1010062-002A | 09/30/10 | 10/06/10 | 10/06/10 5:51 PM |
| 1010062-003A | 09/30/10 | 10/07/10 | 10/07/10 8:15 AM | 1010062-004A | 09/30/10 | 10/06/10 | 10/06/10 6:21 PM |
| 1010062-005A | 09/30/10 | 10/06/10 | 10/06/10 5:45 PM | 1010062-005A | 09/30/10 | 10/08/10 | 10/08/10 6:31 PM |

MS = Matrix Spike; MSD = Matrix Spike Duplicate; LCS = Laboratory Control Sample; LCSD = Laboratory Control Sample Duplicate; RPD = Relative Percent Deviation.

% Recovery = 100 * (MS-Sample) / (Amount Spiked); RPD = 100 * (MS - MSD) / ((MS + MSD) / 2).

MS / MSD spike recoveries and / or %RPD may fall outside of laboratory acceptance criteria due to one or more of the following reasons: a) the sample is inhomogenous AND contains significant concentrations of analyte relative to the amount spiked, or b) the spiked sample's matrix interferes with the spike recovery.

£ TPH(btex) = sum of BTEX areas from the FID.

cluttered chromatogram; sample peak coelutes with surrogate peak.

N/A = not enough sample to perform matrix spike and matrix spike duplicate.

NR = matrix interference and/or analyte concentration in sample exceeds spike amount for soil matrix or exceeds 2x spike amount for water matrix or sample diluted due to high matrix or analyte content, or inconsistency in sample containers.



QC SUMMARY REPORT FOR SW8015B

W.O. Sample Matrix: Water

QC Matrix: Water

BatchID: 53505

WorkOrder 1010062

| EPA Method SW8015B | | Extraction SW3510C | | | | | | | Spiked Sample ID: N/A | | | |
|----------------------|--------|--------------------|--------|--------|--------|--------|--------|----------|-------------------------|-----|----------|-----|
| Analyte | Sample | Spiked | MS | MSD | MS-MSD | LCS | LCSD | LCS-LCSD | Acceptance Criteria (%) | | | |
| | µg/L | µg/L | % Rec. | % Rec. | % RPD | % Rec. | % Rec. | % RPD | MS / MSD | RPD | LCS/LCSD | RPD |
| TPH-Diesel (C10-C23) | N/A | 1000 | N/A | N/A | N/A | 112 | 113 | 0.799 | N/A | N/A | 70 - 130 | 30 |
| %SS: | N/A | 625 | N/A | N/A | N/A | 102 | 102 | 0 | N/A | N/A | 70 - 130 | 30 |

All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:
NONE

BATCH 53505 SUMMARY

| Lab ID | Date Sampled | Date Extracted | Date Analyzed | Lab ID | Date Sampled | Date Extracted | Date Analyzed |
|--------------|--------------|----------------|------------------|--------------|--------------|----------------|-------------------|
| 1010062-001B | 09/30/10 | 10/04/10 | 10/06/10 4:29 PM | 1010062-002B | 09/30/10 | 10/04/10 | 10/08/10 12:36 AM |
| 1010062-003B | 09/30/10 | 10/04/10 | 10/06/10 5:33 AM | 1010062-004B | 09/30/10 | 10/04/10 | 10/05/10 10:54 AM |
| 1010062-005B | 09/30/10 | 10/04/10 | 10/06/10 4:22 AM | | | | |

MS = Matrix Spike; MSD = Matrix Spike Duplicate; LCS = Laboratory Control Sample; LCSD = Laboratory Control Sample Duplicate; RPD = Relative Percent Deviation.

% Recovery = 100 * (MS-Sample) / (Amount Spiked); RPD = 100 * (MS - MSD) / ((MS + MSD) / 2).

MS / MSD spike recoveries and / or %RPD may fall outside of laboratory acceptance criteria due to one or more of the following reasons: a) the sample is inhomogenous AND contains significant concentrations of analyte relative to the amount spiked, or b) the spiked sample's matrix interferes with the spike recovery.

N/A = not enough sample to perform matrix spike and matrix spike duplicate.

NR = analyte concentration in sample exceeds spike amount for soil matrix or exceeds 2x spike amount for water matrix or sample diluted due to high matrix or analyte content.