

RECEIVED

2:28 pm, Nov 17, 2008

Alameda County Environmental Health

November 9, 1999

REPORT OF ADDITIONAL SOIL BORINGS AND QUARTERLY GROUNDWATER MONITORING ASE JOB NO. 3389

Former Lerer Brothers Transmission 6340 Christie Ave. Emeryville, CA 94608

Prepared by:
AQUA SCIENCE ENGINEERS, INC.
208 W. El Pintado
Danville, CA 94526
(925) 820-9391

1.0 INTRODUCTION

Site Location (Site), See Figure 1
Former Lerer Brothers Transmission
6340 Christie Ave.
Emeryville, CA 94608

Responsible Party Richard Gold P.O. Box 117820 Burlingame, CA 94011-7820

Environmental Consulting Firm Aqua Science Engineers, Inc. (ASE) 208 W. El Pintado Danville, CA 94583 Contact: Robert Kitay, Senior Geologist (925) 820-9391

Agency Review
Alameda County Health Care Services
1131 Harbor Bay Pkwy., Suite 250
Alameda, CA 94502
Contact: Ms. Susan Hugo
(510) 567-6700

California Regional Water Quality Control Board (RWQCB) San Francisco Bay Region 1515 Clay Street, Suite 1400 Oakland, CA 94612 Contact: Mr. Chuck Headlee (510) 622-2433

This report presents the results of the October 22, 1999 quarterly groundwater sampling and additional boring groundwater sampling for the above-referenced site. This sampling was conducted as required by the ACHCSA. ASE has prepared this report on behalf of Mr. Richard Gold, owner of the property.

2.0 DRILL TWO ADDITIONAL SOIL BORINGS AND COLLECT GROUNDWATER SAMPLES

Two soil borings were drilled on the neighboring property to the south to determine the extent of groundwater contamination downgradient of the site. Prior to drilling, ASE obtained an access agreement from the neighboring property owner, The Martin Group, to allow this drilling on their property. ASE also obtained a drilling permit from the Alameda County Public Works Agency (ACPWA). A copy of this permit is presented in Appendix A.

On October 22, 1999, Gregg Drilling of Martinez, California drilled soil borings BH-F and BH-G on The Martin Group property south of the site using a Geoprobe hydraulic sampling rig (Figure 2). These borings were drilled south of the former Underground Storage Tank (UST) to determine the extent of groundwater contamination downgradient of the UST. The drilling was directed by ASE associate geologist Ian Reed and senior geologist Robert E. Kitay, R.G.

Undisturbed soil samples were collected continuously as drilling progressed for lithologic and hydrogeologic description. No soil samples The samples were collected by driving a were retained for analysis. sampler lined with acetate tubes using hydraulic direct push methods. Soil was described by the site geologist using the Unified Classification System. Boring logs are presented in Appendix B.

Groundwater samples were removed from the borings with a bailer. The groundwater samples were contained in 40-ml volatile organic analysis (VOA) vials, preserved with hydrochloric acid, and sealed without headspace. The samples were then labeled and stored on ice for transport to Chromalab, Inc. of Pleasanton, California (ELAP 1094) under chain of custody. Upon completion of the groundwater sampling, the borings were backfilled with neat cement to the ground surface.

Drilling equipment was cleaned with a TSP solution between sampling intervals and between borings to prevent potential cross-contamination.

3.0 GROUNDWATER FLOW DIRECTION AND GRADIENT

On October 22, 1999, ASE environmental scientist Ian Reed measured the depth to water in each site groundwater monitoring well using an electric water level sounder. The surface of the groundwater was also checked for the presence of free-floating hydrocarbons or sheen. There was no free-

floating product or sheen present in any well. Current and historical groundwater elevation data is presented as Table One.

TABLE ONE
Groundwater Elevation Data

	Date	Top of Casing	Depth to	Groundwater
Well	o f	Elevation	Water	Elevation
I.D.	Measurement	(relative to project datum)	(feet)	(project data)
MW-1	1-28-99	10.00	4.85	5.15
	3-29-99		4.85	5.15
	7-20-99		5.08	4.92
	10-22-99		5.08	4.92
MW-2	1-28-99	9.96	4 17	5.70
IVI VV -Z	3-29-99	9.90	4.17 3.89	5.79 6.07
	7-20-99		4.30	5.66
	10-22-99		4.36	5.60
MW-3	1-28-99	9.25	4.23	5.02
	3-29-99	, . <u></u>	4.41	4.84
	7-20-99		3.86	5.39
	10-22-99		3.94	5.31

A groundwater potentiometric surface map is presented as Figure 2. The groundwater flow direction is to the southeast with a gradient of approximately 0.014-feet/foot. This groundwater flow direction and gradient are consistent with historical groundwater flow direction and gradient data which consistently shows the groundwater flow beneath the site to the south or southeast.

4.0 GROUNDWATER SAMPLE COLLECTION AND ANALYSIS

Prior to sampling, each monitoring well was purged of four well casing volumes of groundwater using a dedicated bailer. Slight petroleum hydrocarbon odors were present during the purging and sampling of the groundwater monitoring wells. The parameters pH, temperature and conductivity were monitored during the well purging. Samples were not collected until these parameters stabilized. Groundwater samples were collected from each well using dedicated polyethylene bailers. The samples were decanted from the bailers into 40-ml VOA vials, preserved with hydrochloric acid, sealed without headspace, labeled and placed in coolers with wet ice for transport to Chromalab under appropriate chain-

of-custody documentation. Well sampling field logs are presented in Appendix C.

5.0 ANALYTICAL RESULTS FOR GROUNDWATER

groundwater samples collected from all three groundwater monitoring wells, as well as from borings BH-F and BH-G, were analyzed for total petroleum hydrocarbons as gasoline (TPH-G) by EPA Method 5030/8015M. benzene, toluene, ethylbenzene and total (collectively known as BTEX) by EPA Method 8020 and methyl tertiary butyl ether (MTBE) by EPA Method 8020. The analytical results are presented in Table Two. The certified analytical report and chain-ofcustody documentation are included as Appendix D.

concentrations Benzene in groundwater samples collected well MW-1, monitoring well MW-2 and boring BH-F all exceeded the California Department of Health Services (DHS) maximum contaminant level (MCL) for drinking water. Concentrations of the other compounds detected did not exceed DHS MCLs for drinking water. Although the benzene concentrations exceeded the DHS MCL for drinking are relatively low and would not be water, these concentrations considered a threat to human health in non-drinking water scenarios. hydrocarbon trends are relatively stable although there does appear to be a slight increasing trend in hydrocarbon concentrations in groundwater samples collected from monitoring well MW-1.

TABLE TWO

Certified Analytical Results of GROUNDWATER Samples

All results are in parts per billion

Well ID							
& Dates				Ethyl-	Total		
Sampled	TPH-G	Benzene	Toluene	benzene	Xylenes	MTBE	Lead
Bampicu	1111-0	Denzene	Toruche	OCHZCHC	Aylenes	MIDE	Lead
NASSA 1							
MW-1	720	22	2.2	2.4		2.2	
1-28-99	730	22	3.3	24	61	< 5.0	< 5.0
3-29-99	950	37	5.7	27	60	< 5.0	5000C
7-20-99	970	40	5.4	67	120	< 5.0	
10-22-99	1,300	7 1	7.2	100	210	< 10	
MW-2							
1-28-99	710	20	180	14	67	< 5.0	< 5.0
3-29-99	500	8.6	44	4.3	25	< 5.0	23.0
7-20-99	510	8.4	44	6.0	31	< 5.0	22
10-22-99	280	13	10	6.2	36	< 5.0	
						1 010	
MW-3							
1-28-99	< 50*	< 0.5	< 0.5	< 0.5	0.69	< 5.0	< 5.0
3-29-99	130	1.9	8.2	1.4	7.1	< 5.0	0.000
7-20-99	170	< 0.5	1.9	< 0.5	0.89	< 5.0	
10-22-99	70**	< 0.5	< 0.5	< 0.5	< 0.5	< 5.0	
	, 0						
BH-F	6 5	1.2	< 0.5	1.4	2.4	< 5.0	
BH-G	180**	< 1.0	< 1.0	1.5	9.1	< 10	
5776 \$76F	STRUCTURE STATE OF ST				oran delicated and an annual		MANAGARAN AND AND AND AND AND AND AND AND AND A
DHS MCL	NE	1	150	700	1,750	13	1.5
EPA	50201	9020	9000	9020	0000	0000	
	5030/	8020	8020	8020	8020	8020	6010
METHOD	8015M						

Notes:

NE = DHS MCL not established

DHS MCL = Department of Health Services maximum contaminant level for drinking water. Non-detectable concentrations noted by the less than sign (<) followed by the laboratory detection limit.

^{* =} Hydrocarbons uncharacteristic of gasoline detected in the gasoline range at 68 ppb.

^{** =} Hydrocarbons detected do not match a gasoline standard.

^{-- =} Not analyzed

4.0 CONCLUSIONS

The groundwater flow direction beneath this site is to the southeast at a gradient of 0.014 feet/foot, which is consistent with the historical groundwater flow direction and gradient beneath the site.

Benzene concentrations in groundwater samples collected from well MW-1, monitoring well MW-2 and boring BH-F all exceeded the DHS MCL for drinking water. Concentrations of the other compounds detected did not exceed DHS MCLs for drinking water. Although the benzene concentrations exceeded the DHS MCL for drinking water, groundwater in the site vicinity is no used for drinking water. non-drinking water scenarios, these concentrations would be considered relatively low and not a threat to human health or the environment. hydrocarbon trends are relatively stable although there does appear to be a slight increasing trend in hydrocarbon concentrations in groundwater samples collected from monitoring well MW-1.

5.0 RECOMMENDATIONS

Based on the relatively low hydrocarbon concentrations detected in groundwater samples collected during the one year of quarterly groundwater monitoring, the limited horizontal extent of hydrocarbons in groundwater, and the current commercial/industrial usage of the site, ASE recommends that the ACHCSA and RWQCB review this case for closure.

6.0 REPORT LIMITATIONS

The results presented in this report represent the conditions at the time of the groundwater sampling, at the specific locations where the groundwater samples were collected, and for the specific parameters analyzed by the laboratory. It does not fully characterize the site for contamination resulting from sources other than the former underground storage tanks and associated plumbing at the site, or for parameters not analyzed by the laboratory. All of the laboratory work cited in this report was prepared under the direction of independent CAL-EPA certified laboratory. The independent laboratory is solely responsible for the contents and conclusions of the chemical analysis data.

Aqua Science Engineers appreciates the opportunity to provide environmental consulting services to Lerer Brother Transmission Service, and trust that this report meets your needs. Please feel free to call us at (925) 820-9391 if you have any questions or comments.

Respectfully submitted,

AQUA SCIENCE ENGINEERS, INC.

Ian Reed

Environmental Scientist

Robert E. Kitay, R.G., R.E.A.

Senior Geologist

Ruht E. Kitay

No. 6586

No. CALIFOR

Attachments: Figures 1 and 2

Appendices A through D

cc: Mr. Richard Gold


Ms. Susan Hugo, Alameda County Health Care Services Agency


Mr. Chuck Headlee, RWQCB, San Francisco Bay Region

Mr. Tom Gram, The Martin Group

- 7 -

FIGURES

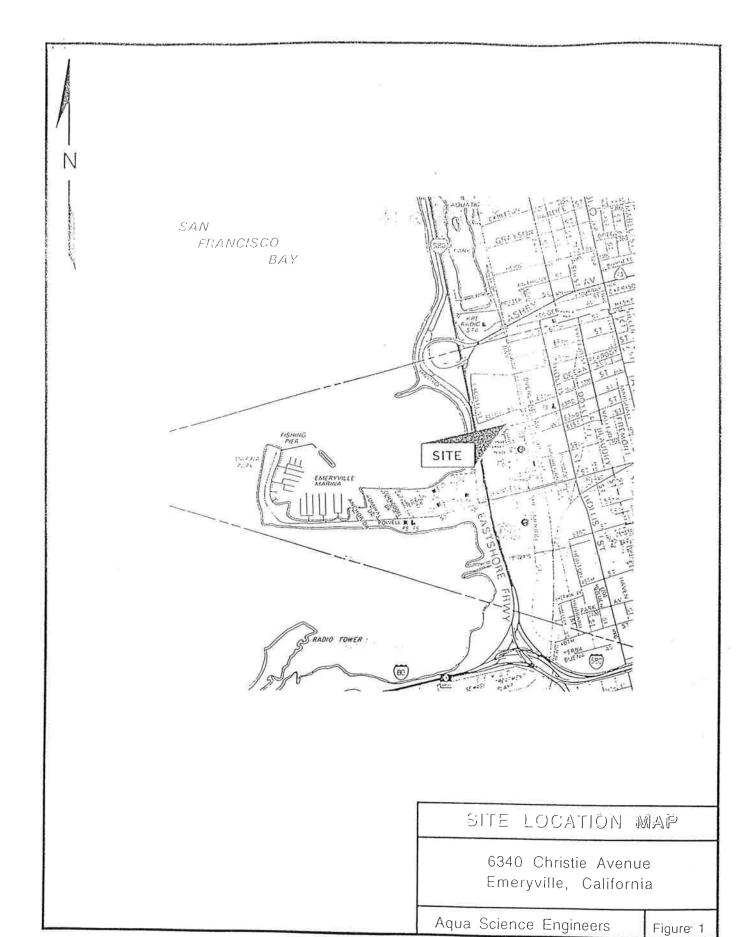

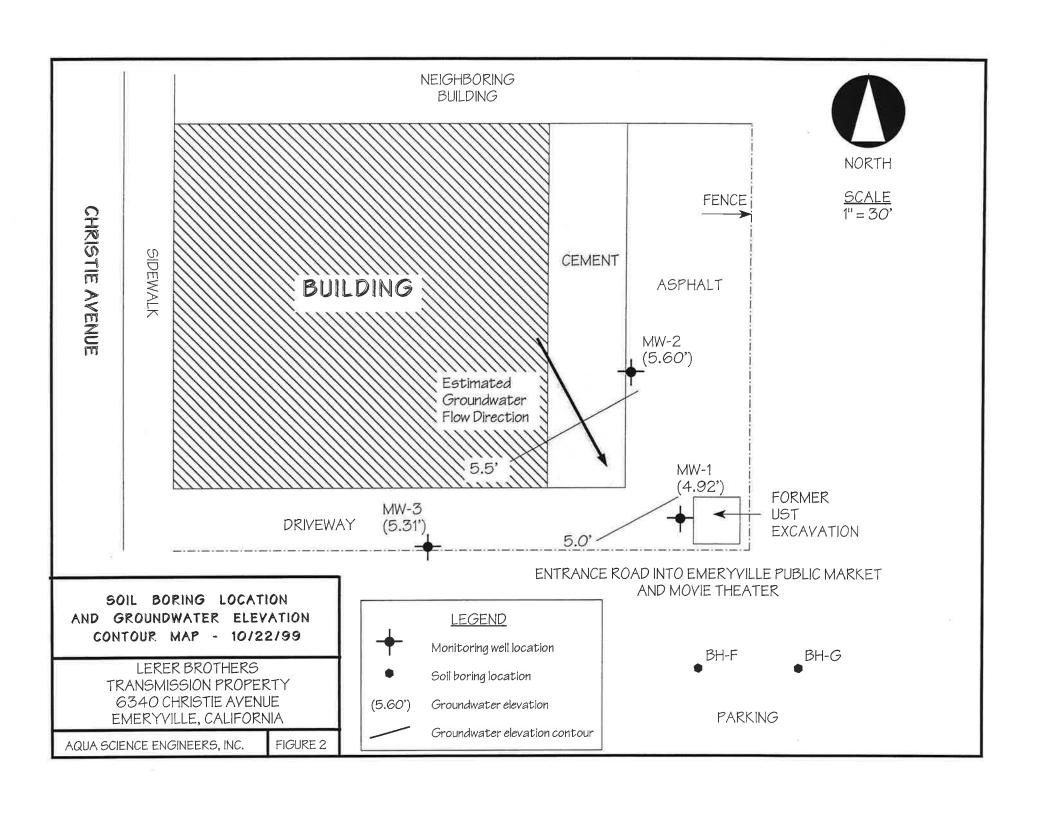

APPENDIX A

Drilling Permit



ALAMEDA COUNTY PUBLIC WORKS AGENCY

WATER RESOURCES SECTION

951 TURNER COURT, SUITE 300, HAYWARD, CA \$4545-2661

PHONE (510) 670-5575 ANDREAS GODFREY PAX (610) 670-5161

(510) 670-6341 ALVIN KAN

DRILLING PERMIT APPLICATION

FOR OFFICE USE FOR APPLICANT TO COMPLETE PERMIT NUMBER LOCATION OF FROJECT_ 6340 Cocietis WELLHUMBER Inosognillar APN PERMIT COMPITIONS Catifornia Coordinates Source Circles Permit Requirements Apply APN GENERAL 1) se me kanimete ad bluede indistalique se se to CLIENT arrive at the ACPWA office five days prior to Name: Phone 650-Address P. C. Box propossé sterling date. Zip 9 40/1 1 Submit to ACPWA within 60 days after completion of City Burlinganze, permitted work the original Department of Water Resources Water Well Drillers Report or equivalent for APPLICANT Hame Agua Astr. Bo well projects, or drilling logs and location sketch for Address 208 U. E. Pintado Faz 92 Roctechnics projects. Phone 3. Formit is vois if project not begun within 90 days of Zip_ City Denville approval date. B. WATER SUPPLY WELLS 1. Minimum surfece real thickness is two inches of TYPE OF PROJECT Geoleahnical Investigation Well Construction cement grout placed by tremie. General 2. Minimum seel depth is 50 feet for municipel and C Cathodic Protection 83 Contamination Q industrial wells or 20 feet for domestic and Irrigation Water Supply Well Destruction σ ۵ Monitoding wells unless a lesser depth is specially approved. C. CROUNDWATER MONITORING WELLS PROPOSED WATER SUPPLY WELL USE INCLUDING PIEZOMETERS Replacement Domestic ۵ New Domestie D 1. Minimum surface scal thickness is two inches of 0 Imigalion Municipal ٥ cement grout placed by tremie. ð Industrial Ű Other_ 2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet. DRILLING METHOD: D. GEOTECHNICAL Air Rotary 🚨 Auger Mud Rolary Backfill bore hole with compacted cultings or heavy Other Ó Cable benionite and upper two feet with compacted material. in areas of known or suspected contamination, tremled DRILLER'S LICENSE NO. cement grout shall be used in place of compacted cuttings. E. CATHODIC WELL PROJECTS fill hole above snode sent with concrete placed by fremis. Maximum Drill Hole Diameter F. WELL DESTRUCTION Depth _ Casing Diameter, Number See attached. Surface Seat Depth GEOTECHNICAL PROJECTS Number of Borings _______ Maximum Dapth __15 Hole Diamoter _

10-22-9

ESTIMATED STARTING DATE

APPLICANT'S SIGNATURE_

Alameda County Ordinance No. 73-68.

ESTIMATED COMPLETION DATE 10-22-99

I hereby agree to comply with all requirements of this permit and

APPENDIX B

Boring Logs

SOIL BORING LOG AND MONIT	ORING WELL	COMPLETION DETAILS SOIL BORNG: BH-F
Project Name: Lerer Brothers	Project Locat	ion: 6340 Christie Avenue, Emeryville, CA Page 1 of 1
Driller: Gregg Drilling	Type of Rig: F	Power Push Size of Drill: 2" diameter macrocore
Logged By: Ian T. Reed	Date Drilled:	October 22, 1999 Checked By: Robert E. Kitay, R.G.
WATER AND WELL DATA		Total Depth of Well Completed: NA
Depth of Water First Encountered: 7.	0'	Well Screen Type and Diameter: NA
Static Depth of Water in Well: NA		Well Screen Slot Size: NA
Total Depth of Boring: 12.0'		Type and Size of Soil Sampler: 2.0" I.D. Macro sampler
Portland Cement Description Interval Blow Counts	SAMPLE DATA Water Level Graphic Log	DESCRIPTION OF LITHOLOGY standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. Gravelly SILT (ML); olive; damp; medium stiff; 65% silt; 20% gravel; 10% fine to medium sand; 5% clay; low plasticity; low estimated K; no odor Sandy SILT (ML); olive; damp; medium stiff; 65% silt; 20% fine to medium sand; 10% gravel; 5% clay; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH); black; wet; medium stiff; 80% silt; 20% clay; high plasticity; low estimated K; no odor [Bay Mud] End of boring at 12.0'
-20 -25 -30		-20 -25 -30
		aqua science engineers, inc.

Project Name: Lorer Brothers Project Location: 6340 Christie Avenue, Emeryville, CA Page 1 of 1 Driller: Gregg Drilling Type of Rig: Power Push Size of Drill: 2º Diameter Macrocore Chocked By: Robert E. Kitay, R.G. WATER AND WELL DATA Depth of Water First Encountered: 7.0' Water Screen Type and Diameter: NA Well Screen Stot Size: NA Total Depth of Boring: 12.0' Type and Size of Soil Sampler: 2.0" I.D. Macro sampler DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard Classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard Classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard Classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard Classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard Classification, texture, relative moisture, density, low estimated K; no odor Sandy SILT (ML); black; damp; medium stiff; 65% stit; 20% fine to medium sand; 10% gravel; 5% clay; low plasticity; low estimated K; no odor Clayey SILT (ML); black; wet; medium stiff; 65% stit; 20% fine to medium sand; 10% gravel; 5% clay; low plasticity; low estimated K; no odor End of boring at 12.0' End of boring at 12.0'	SOIL BORING LOG AND MONITOR	ING WELL	СОМ	IPLETION DETAILS SOIL BORNG: BH-G
Logged By: Ian T, Reod Date Drilled: October 22, 1999 Checked By: Robert E, Kitay, R.G. WATER AND WELL DATA Depth of Water First Encountered: 7.0' Wall Screen Type and Diameter: NA Well Screen Slot Size: NA Total Depth of Boring: 12.0' Type and Size of Soil Sampler: 2.0' I.D. Macro sampler BORING DETAIL BORING DETAIL BORING DETAIL DETAIL DO DETAIL DESCRIPTION OF LITHOLOGY Sandard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DETAIL DETAIL DETAIL DETAIL DETAIL DETAIL DESCRIPTION OF LITHOLOGY Sandard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DETAIL DETAIL DETAIL DETAIL DETAIL DETAIL DETAIL DETAIL DETAIL DESCRIPTION OF LITHOLOGY Sandy SILT (ML); black; damp; medium stiff; 65% sit; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH); black; wet; medium stiff; 80% silt; 20% clay; high plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH); black; wet; medium stiff; 80% silt; 20% clay; high plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) End of boring at 12.0'	Project Name: Lerer Brothers Pr	roject Locati	on: 63	40 Christie Avenue, Emeryville, CA Page 1 of 1
Water AND Well. DATA Depth of Water First Encountered: 7.0' Static Depth of Water in Well: NA Total Depth of Boring: 12.0' BORING DETAIL BORING DETAIL DESCRIPTION OF LITHOLOGY standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Standard classification, texture, relative m	Driller: Gregg Drilling Ty	/pe of Rig: P	ower P	Push Size of Drill: 2" Diameter Macrocore
Depth of Water First Encountered: 7.0' Static Depth of Water in Well: NA Well Screen Type and Diameter: NA Well Screen Slot Size: NA Type and Size of Soil Sampler: 2.0" I.D. Macro sampler Type and Size of Soil Sampler: 2.0" I.D. Macro sampler DESCRIPTION OF LITHOLOGY Standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DESCRIPTION OF LITHOLOGY Asphalt Gravelly SILT (ML): black; damp; medium stiff; 65% clay; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH): black; damp; medium stiff; 80% slit; 20% clay; high plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) End of boring at 12.0' End of boring at 12.0'	Logged By: Ian T. Reed Da	ate Drilled:	Octobe	er 22, 1999 Checked By: Robert E. Kitay, R.G.
Static Depth of Water in Well: NA Total Depth of Boring: 12.0' Type and Size of Soil Sampler: 2.0' I.D. Macro sampler Type and Size of Soil Sampler: 2.0' I.D. Macro sampler DESCRIPTION OF LITHOLOGY standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DETAIL Type and Size of Soil Sampler: 2.0' I.D. Macro sampler DESCRIPTION OF LITHOLOGY standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. Asphalt Gravelly SILT (ML): olive; damp; medium stiff; 65% slit; 20% gravel: 10% fine to medium sand; 5% clay; low plasticity; low estimated K; no odor Sandy SILT (ML): black; damp; medium stiff; 65% slit; 20% fine to medium sand; 10% gravel; 6% clay; low plasticity; low estimated K; no odor Sandy SILT (MH); black; damp; medium stiff; 65% slit; 20% fine to medium sand; 10% gravel; 6% clay; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH); black; wet; medium stiff; 80% slit; 20% clay; high plasticity; low estimated K; no odor End of boring at 12.0'	WATER AND WELL DATA		Total	Depth of Well Completed: NA
Total Depth of Boring: 12.0' Type and Size of Soil Sampler: 2.0" I.D. Macro sampler DESCRIPTION OF LITHOLOGY standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. DETAIL DETAIL DETAIL DESCRIPTION OF LITHOLOGY standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. Asphalt Gravelly SILT (ML); olive; damp; medium stiff; 65% silt; 20% gravel; 10% fine to medium sand; 5% clay; low plasticity; low estimated K; no odor Sandy SILT (ML); black; damp; medium stiff; 65% silt; 20% fine to medium sand; 10% gravel; 5% clay; low plasticity; low estimated K; no odor Sandy SILT (MH); black; damp; medium stiff; 65% silt; 20% fine to medium sand; 10% gravel; 5% clay; low plasticity; low estimated K; no odor Sandy SILT (MH); black; wet; medium stiff; 85% silt; 20% clay; high plasticity; low estimated K; no odor Clayey SILT (MH); black; wet; medium stiff; 80% silt; 20% clay; high plasticity; low estimated K; no odor End of boring at 12.0'	Depth of Water First Encountered: 7.0'		Well	Screen Type and Diameter: NA
BORING DETAIL BORING	Static Depth of Water in Well: NA		Well	Screen Slot Size: NA
BORING DETAIL The standard classification, texture, relative moisture, density, stiffness, odor-staining, USCS designation. Asphalt Gravelly SILT (ML); olive; damp; medium stiff; 65% silt; 20% gravel; 10% fine to medium sand; 5% clay; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH); black; wet; medium stiff; 85% silt; 20% clay; high plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH); black; wet; medium stiff; 80% silt; 20% clay; high plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) End of boring at 12.0'	Total Depth of Boring: 12.0'		Туре	and Size of Soil Sampler: 2.0" I.D. Macro sampler
Gravelly SILT (ML); olive; damp; medium stiff; 65% silt; 20% gravel; 10% fine to medium sand; 5% clay; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clays y SILT (ML); black; damp; medium stiff; 65% silt; 20% fine to medium sand; 10% gravel; 5% clay; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clays y SILT (MH); black; wet; medium stiff; 80% silt; 20% clay; high plasticity; low estimated K; no odor [Bay Mud] End of boring at 12.0'	اق		Depth in Feet	standard classification, texture, relative moisture,
	-10	▼ .	- 5 - 10 - 15 - 20 - 25	Gravelly SILT (ML); olive; damp; medium stiff; 65% silt; 20% gravel; 10% fine to medium sand; 5% clay; low plasticity; low estimated K; no odor Sandy SILT (ML); black; damp; medium stiff; 65% silt; 20% fine to medium sand; 10% gravel; 5% clay; low plasticity; low estimated K; no odor building debris (rubber, hardened glue; plastic) Clayey SILT (MH); black; wet; medium stiff; 80% silt; 20% clay; high plasticity; low estimated K; no odor [Bay Mud]

APPENDIX C

Well Sampling Field Logs



WELL SAMPLING FIELD LOG

Project Name and A	ddress:	Lorer	Brother		
Job #: 338° Well Name: 4 Total depth of well (1	Date of sar	npling:	14-21-93	
Well Name:	ME	Sampled by	/:	1177	
Total depth of well (feet): <u>17.</u>	72 \	Well diam	eter (inches):	2 11
Depth to water before	re sampling (feet):	5,08	s	
Thickness of floating	product if a	ny:	ينا إ	- i	
Depth to water before Thickness of floating Depth of well casing	in water (fee	et):	12	.64	
Number of gallons p	er well casin	g volume (ga	ıllons):	2,1	
Number of well casing Number of well casi	ng volumes t	o be remove	d:	.4	
Req'd volume of gro	undwater to b	oe purged be	fore samp	ling (gallons):	8.4
Equipment used to p	ourge the wel	l:	1/1/10	entury bailor	
Time Evacuation Beg	gan: 8940	Time	Evacuation	on Finished:	G950
Approximate volume	of groundwa	ater purged:		8.4	
Did the well go dry?	: (1.10)	After	how mar	w gallone.	16 min
Time samples were	collected:	095	7		
Time samples were Depth to water at time Percent recovery at Samples collected w	me of samplin	ng:	5,09		
Percent recovery at	time of samp	oling:	99 1/0		
Samples collected w. Sample color:	ith: <u>, </u>	decli	icitral 1	enter	
Sample color:	in elect	Odor:	3/19	م بنا الم	
Description of sedim	ent in sample	0	·		
CHEMICAL DATA Volume Purged	Temp	- II		а	
Volume Turged	Zo I	<u>pH</u> 5, ナ リ	Conductivit		
7	71.4	<u>5.63</u>	784		
3 	71,6	5.79	641		
4	70.9	5,63	842		

======================================		2			
SAMPLES COLLECT	ED				
Sample	Volume & type Ul mil	container Pres		nalysis 1PH O-1 BNBY /	
			-		
×					



WELL SAMPLING FIELD LOG

Project Name and Address:
Job #: 3389 Date of sampling: 3-27-39
Well Name: Sampled by: IL.
Total depth of well (feet): 18,45 Well diameter (inches): 21
Depth to water before sampling (feet): 4,36
Thickness of floating product if any:
Thickness of floating product if any:
Number of gallons per well casing volume (gallons): 2.4 Number of well casing volumes to be removed: 4
Number of well casing volumes to be removed: 4
Req'd volume of groundwater to be purged before sampling (gallons).
Equipment used to purge the well: delicate Later
Time Evacuation Began: 6920 Time Evacuation Finished: 0430
Approximate valume of groundwater pured.
Did the well go dry?: NO After how many gallons: — Time samples were collected: 0937 Depth to water at time of sampling: 4.34. Percent recovery at time of sampling: 1207.
Time samples were collected: 0135
Depth to water at time of sampling: 4.31,
Percent recovery at time of sampling:
Samples collected with: dedicated tooled Sample color: cleen Gray Odor: clean He
Sample color:clearlacey Odor:clearlacey
Description of sediment in sample:
CHEMICAL DATA
2,41
Volume Purged Temp pH Conductivity
1 (6.9 (.43 5) 2
70.1 1.75 569
3 70.2 9,3/4 771
4 71.7 567
SAMPLES COLLECTED
Sample # of containers Volume & type container Pres Iced? Analysis
HW- 3 UW MI VERS V Y APHI-6-IMPRE IBITES



WELL SAMPLING FIELD LOG

Project Name and Addi	ress:	CIM TRIALLY		
Job #: 3287) Well Name: MU - 3	Date	of sampling:	15-7000	
Well Name: Mu - 3	Sampl	ed by:	11 J.	_
Total depth of well (fee	t): アルガジ	Well diame	eter (inches).	
Depth to water before	sampling (feet):	394'		
Thickness of floating pr	oduct if any:			_
Depth of well casing in	water (feet):		93	_
Number of gallons per	well casing volun	ne (gallons):	1,8	_
Thickness of floating property of well casing in Number of gallons per Number of well casing	volumes to be re	moved:	4	
keq a volume of ground	iwater to be purg	ed before samp	ling (gallons): The	2
Equipment used to pur	ge the well:	didireted to	die	
Time Evacuation Began	: 1000	Time Evacuation	on Finished: 1018	_
Approximate volume of Did the well go dry?:	groundwater pur	ged:	7.2	
Did the well go dry?:	No	After how man	ny gallons:	
Time samples were collected to water at time Percent recovery at time	lected: lets			_
Depth to water at time	of sampling:	3,99		
Percent recovery at tim	e of sampling:	~(<i>i</i>) /•		
Samples collected with:	a.	diagree contat		
Sample color:c\ear	1 gray	Odor: HC	odor	
Description of sediment	in sample:			
CHEMICAL DATA Volume Purged 1 2 3	Temp pH 42.7 6.71 41.9 6.81 42.3 6.97	<u>Conductivit</u> 		
4	72.3 72.7 (1.97 (1.94	409		
SAMPLES COLLECTEI)	e.		
Sample # of containers Vo	olume & type container 40ml Voh's	Pres Iced? A	TPH-G/MBE/BTEX	
-				8

APPENDIX D

Certified Analytical Report and Chain of Custody Documentation **Environmental Services (SDB)**

Submission #: 1999-10-0403 Date: November 3, 1999

Aqua Science Engineers, Inc.

208 West El Pintado Road Danville, CA 94526

Attn.: Mr. Ian T. Reed

Project: 3389

Lerer Brothers

Site:

Christie Ave.

Emeryville, CA

Dear Mr. Reed,

Attached is our report for your samples received on Friday October 22, 1999. This report has been reviewed and approved for release. Reproduction of this report is permitted only in its entirety.

Please note that any unused portion of the samples will be discarded after November 21, 1999 unless you have requested otherwise. We appreciate the opportunity to be of service to you. If you have any questions, please call me at (925) 484-1919.

Sincerely,

Gas/BTEX and MTBE

Aqua Science Engineers, Inc.

208 West El Pintado Road

Danville, CA 94526

Phone: (925) 820-9391 Fax: (925) 837-4853

Attn: Ian T. Reed Project #: 3389

Project: Lerer Brothers

Site:

Christie Ave. Emeryville, CA

Samples Reported

Sample ID	Matrix	Date Sampled	Lab#
MVV-1	Water	10/22/1999 09:55	1
MW-2	Water	10/22/1999 09:35	2
MW-3	Water	10/22/1999 10:15	3
BH-F	Water	10/22/1999 07:30	4
BH-G	Water	10/22/1999 08:15	5

1220 Quarry Lane * Pleasanton, CA 94566-4756 Telephone: (925) 484-1919 * Facsimile: (925) 484-1096

Submission #: 1999-10-0403

Environmental Services (SDB)

To: Aqua Science Engineers, Inc. Test Method:

8020 8015M

Attn.: Ian T. Reed

Prep Method:

5030

Gas/BTEX and MTBE

Sample ID:

MW-1

Lab Sample ID: 1999-10-0403-001

Project:

3389

Received:

10/22/1999 15:50

Lerer Brothers

Site:

Christie Ave. Emeryville, CA Extracted:

11/01/1999 14:26

Sampled:

10/22/1999 09:55

QC-Batch:

1999/11/01-01.02

Matrix:

Water

Compound	Result	Rep.Limit	Units	Dilution	Analyzed	Flag
Gasoline	1300	100	_ug/L	2.00	11/01/1999 14:26	
Benzene	71	1.0	ug/L	2.00	11/01/1999 14:26	
Toluene	7.2	1.0	ug/L	2.00	11/01/1999 14:26	
Ethyl benzene	100	1.0	ug/L	2.00	11/01/1999 14:26	
Xylene(s)	210	1.0	ug/L	2.00	11/01/1999 14:26	
MTBE	ND	10	ug/L	2.00	11/01/1999 14:26	
Surrogate(s)						
Trifluorotoluene	108.7	58-124	%	1.00	11/01/1999 14:26	
4-Bromofluorobenzene-FID	91.5	50-150	%	1.00	11/01/1999 14:26	

Submission #: 1999-10-0403

Environmental Services (SDB)

Aqua Science Engineers, Inc. To:

Test Method:

8020 8015M

Attn.: Ian T. Reed

Prep Method:

5030

Gas/BTEX and MTBE

Sample ID:

MW-2

Lab Sample ID: 1999-10-0403-002

Project:

3389

Received:

10/22/1999 15:50

Site:

Lerer Brothers

Extracted:

Christie Ave. Emeryville, CA

11/01/1999 10:39

Sampled:

10/22/1999 09:35

QC-Batch:

1999/11/01-01.02

Matrix:

Water

Compound	Result	Rep.Limit	Units	Dilution	Analyzed	Flag
Gasoline	280	50	_ug/L	1.00	11/01/1999 10:39	
Benzene	13	0.50	ug/L	1.00	11/01/1999 10:39	
Toluene	10	0.50	ug/L	1.00	11/01/1999 10:39	
Ethyl benzene	6.2	0.50	ug/L	1.00	11/01/1999 10:39	
Xylene(s)	36	0.50	ug/L	1.00	11/01/1999 10:39	
MTBE	ND	5.0	ug/L	1.00	11/01/1999 10:39	
Surrogate(s)						
Trifluorotoluene	116.9	58-124	%	1.00	11/01/1999 10:39	
4-Bromofluorobenzene-FID	88.4	50-150	%	1.00	11/01/1999 10:39	

Submission #: 1999-10-0403

Environmental Services (SDB)

To: Aqua Science Engineers, Inc. Test Method:

8020 8015M

Attn.: Ian T. Reed

Prep Method:

5030

Gas/BTEX and MTBE

Sample ID:

MW-3

Lab Sample ID: 1999-10-0403-003

Project:

3389

Received:

10/22/1999 15:50

Lerer Brothers

Extracted:

11/01/1999 11:06

Site:

Christie Ave. Emeryville, CA

Sampled:

10/22/1999 10:15

QC-Batch:

1999/11/01-01.02

Page 4 of 9

Matrix:

Water

Compound	Result	Rep.Limit	Units	Dilution	Analyzed	Flag
Gasoline	70	50	ug/L	1.00	11/01/1999 11:06	g
Benzene	ND	0.50	ug/L	1.00	11/01/1999 11:06	
Toluene	ND	0.50	ug/L	1.00	11/01/1999 11:06	
Ethyl benzene	ND	0.50	ug/L	1.00	11/01/1999 11:06	
Xylene(s)	ND	0.50	ug/L	1.00	11/01/1999 11:06	
MTBE	ND	5.0	ug/L	1.00	11/01/1999 11:06	
Surrogate(s)				15		
Trifluorotoluene	113.0	58-124	%	1.00	11/01/1999 11:06	
4-Bromofluorobenzene-FID	87.3	50-150	%	1.00	11/01/1999 11:06	

1220 Quarry Lane * Pleasanton, CA 94566-4756 Telephone: (925) 484-1919 * Facsimile: (925) 484-1096

Environmental Services (SDB)

Test Method:

8020 8015M

Submission #: 1999-10-0403

Aqua Science Engineers, Inc.

Prep Method:

5030

Attn.: Ian T. Reed

To:

Gas/BTEX and MTBE

Sample ID: BH-F

Lab Sample ID: 1999-10-0403-004

Project:

3389

Received:

10/22/1999 15:50

Lerer Brothers

Site:

Christie Ave. Emeryville, CA Extracted:

11/01/1999 13:58

Sampled:

10/22/1999 07:30

QC-Batch:

1999/11/01-01.02

Matrix:

Water

Compound	Result	Rep.Limit	Units	Dilution	Analyzed	Flag
Gasoline	65	50	ug/L	1.00	11/01/1999 13:58	
Benzene	1.2	0.50	ug/L	1.00	11/01/1999 13:58	
Toluene	ND	0.50	ug/L	1.00	11/01/1999 13:58	
Ethyl benzene	1.4	0.50	ug/L	1.00	11/01/1999 13:58	
Xylene(s)	2.4	0.50	ug/L	1.00	11/01/1999 13:58	
MTBE	ND	5.0	ug/L	1.00	11/01/1999 13:58	
Surrogate(s)						
Trifluorotoluene	60.6	58-124	%	1.00	11/01/1999 13:58	
4-Bromofluorobenzene-FID	52.8	50-150	%	1.00	11/01/1999 13:58	

Printed on: 11/03/1999 07:43

Submission #: 1999-10-0403

Environmental Services (SDB)

To: Aqua Science Engineers, Inc. Test Method:

8020 8015M

Attn.: Ian T. Reed

Prep Method:

5030

Gas/BTEX and MTBE

Sample ID:

BH-G

Lab Sample ID: 1999-10-0403-005

Project:

3389

Received:

10/22/1999 15:50

Site:

Lerer Brothers Christie Ave.

Extracted:

11/01/1999 14:54

Emeryville, CA

Sampled:

10/22/1999 08:15

QC-Batch:

1999/11/01-01.02

Matrix:

Water

Compound	Result	Rep.Limit	Units	Dilution	Analyzed	Flag	
Gasoline	180	100	_ug/L	2.00	11/01/1999 14:54	g	
Benzene	ND	1.0	ug/L	2.00	11/01/1999 14:54		
Toluene	ND	1.0	ug/L	2.00	11/01/1999 14:54		
Ethyl benzene	1.5	1.0	ug/L	2.00	11/01/1999 14:54		
Xylene(s)	9.1	1.0	ug/L	2.00	11/01/1999 14:54		
MTBE	ND	10	ug/L	2.00	11/01/1999 14:54		
Surrogate(s)							
Trifluorotoluene	72.4	58-124	%	1.00	11/01/1999 14:54		
4-Bromofluorobenzene-FID	67.5	50-150	%	1.00	11/01/1999 14:54		

CHROMALAB, INC. Environmental Services (SDB)

To: Aqua Science Engineers, Inc. Test Method:

8020 8015M

Prep Method:

5030

Batch QC Report Gas/BTEX and MTBE

Method Blank

Attn.: Ian T. Reed

Water

QC Batch # 1999/11/01-01.02

Submission #: 1999-10-0403

MB:

1999/11/01-01.02-001

Date Extracted: 11/01/1999 09:26

Compound	Result	Rep.Limit	Units	Analyzed	Flag			
Gasoline	ND	50	ug/L	11/01/1999 09:26				
Benzene	ND	0.5	ug/L	11/01/1999 09:26				
Toluene	ND	0.5	ug/L	11/01/1999 09:26				
Ethyl benzene	ND	0.5	ug/L	11/01/1999 09:26				
Xylene(s)	ND	0.5	ug/L	11/01/1999 09:26				
MTBE	ND	5.0	ug/L	11/01/1999 09:26				
Surrogate(s)				į.				
Trifluorotoluene	124.0	58-124	%	11/01/1999 09:26				
4-Bromofluorobenzene-FID	97.0	50-150	%	11/01/1999 09:26				

Printed on: 11/03/1999 07:43

Aqua Science Engineers, Inc.

Submission #: 1999-10-0403

Environmental Services (SDB)

Test Method:

8020 8015M

Attn: Ian T. Reed

To:

Prep Method:

5030

Batch QC Report

Gas/BTEX and MTBE

Laboratory Control Spike (LCS/LCSD)

Water

QC Batch # 1999/11/01-01.02

LCS:

1999/11/01-01.02-002

Extracted: 11/01/1999 16:47

Analyzed:

11/01/1999 16:47

LCSD:

1999/11/01-01.02-003

Extracted: 11/01/1999 06:52

Analyzed:

11/01/1999 06:52

Compound	Conc. [ug/L]		Exp.Conc.	[ug/L]	Recov	ery [%]	RPD	Ctrl. Limi	its [%]	Flag	gs
	LCS	LCSD	LCS	LCSD	LCS	LCSD	[%]	Recovery	RPD	LCS	LCSD
Gasoline	464	453	500	500	92.8	90.6	2.4	75-125	20		
Benzene	113	99.9	100.0	100.0	113.0	99.9	12.3	77-123	20		
Toluene	111	99.1	100.0	100.0	111.0	99.1	11.3	78-122	20		
Ethyl benzene	107	95.7	100.0	100.0	107.0	95.7	11.1	70-130	20		
Xylene(s)	316	283	300	300	105.3	94.3	11.0	75-125	20		
Surrogate(s)											
Trifluorotoluene	504	456	500	500	100.8	91.2		58-124			
4-Bromofluorobenzene-FI	475	429	500	500	95.0	85.8		50-150			

1220 Quarry Lane * Pleasanton, CA 94566-4756 Telephone: (925) 484-1919 * Facsimile: (925) 484-1096 CHROMALAB, INC. Environmental Services (SDB)

Submission #: 1999-10-0403

To: Aqua Science Engineers, Inc.

Test Method: 8015M

8020

Attn:lan T. Reed

Prep Method: 5030

Page 9 of 9

Legend & Notes

Gas/BTEX and MTBE

Analyte Flags

g

Hydrocarbon reported in the gasoline range does not match our gasoline standard.

1220 Quarry Lane * Pleasanton, CA 94566-4756 Telephone: (925) 484-1919 * Facsimile: (925) 484-1096

Printed on: 11/03/1999 07:43

99-10-0403

Aqua Science Engineers, Inc. 208 W. El Pintado Road Danville, CA 94526 (925) 820-9391 FAX (925) 837-4853

Chain of Custody

(925) 820 FAX (925)	0-939 837-4	1 1853										را ک			/			PAGE		l of	E 7	,
SAMPLER (SIGNATURE) (PHONE NO.) LU TReed (925) 820-9391						PROJECT NAME Lever Brothers. ADDRESS Christia Ave, Emeryuille CA								A-	JOBI	10.	3389					
ANALYSIS REQUEST							S															
				TEX ()250)			RON	SS		NICS					305 140	150)			1			
s day TAT			TPH-GAS / MTBE & BTEX (EPA 5030/8015-8020)	TPH-GASOLINE (EPA 5030/8015)	TPH-DIESEL (EPA 3510/8015)	PURGEABLE HALOCARBONS (EPA 601/8010)	PURGEABLE AROMATICS (EPA 602/8020)	VOLATILE ORGANICS (EPA 624/8240)	SEMI-VOLATILE ORGANICS (EPA 625/8270)	OIL & GREASE (EPA 5520)	LUFT METALS (5) (EPA 6010+7000)	CAM 17 METALS (EPA 6010+7000)	PCBs & PESTICIDES (EPA 608/8080)	ORGANOPHOSPHORUS PESTICIDES (EPA 8140) (EPA 608/8080)	ORGANOCHLORINE HERBICIDES (EPA 8150)	FUEL OXYGENATES (EPA 8260)				COMPOSITE		
SAMPLE ID.	DATE	TIME	MATRIX	NO. OF SAMPLES	TPH-G/ (EPA 5	1PH-G/ (EPA 50	TPH-DII	PURGE (EPA 60	PURGE/ (EPA 60	VOLATII (EPA 62	SEMI-V	OIL & GI (EPA 5!	LUFT MI (EPA 60	CAM 17 (EPA 60	PCBs & (EPA 6	ORGAI PESTIC (EPA 6	ORGAN	FUEL 0 (EPA 8				COMI
141-1	10-20-00	(56,55)	me los	3.	><														1			
pc(2-1-2	į	0935	4		×																	
Mis - 3		1015	į		X																	
Bit - F		0736																-	-			
134-6-	V	1815	`U	V	/					-												
												8										
						2																
							2															
RELINQUISHED BY: RECEIVED BY: (signature) (time) (signature)			(time)	/ 150 s	RELINQUISHED BY: (time) / SSO					RECEIVED BY LABORATORY: COMMENTS: Comments: (signature) (time)												
printed name) (date) (printed name)			(j.1 (date)/	ytir/	B Morrow interlay D. Harrington							5	de	·T	AT							
Company-			(e #6	Company- Chromelat 10/22/99									6								