



November 13, 1998 Project 20805-129.005

POR

Mr. Paul Supple ARCO Products Company P.O. Box 6549 Moraga, California 94570

Re: Quarterly Groundwater Monitoring Report, Second Quarter 1998, for ARCO Service Station No. 2169, located at 889 West Grand Avenue, Oakland, California

Dear Mr. Supple:

Pinnacle Environmental Solutions, a division of EMCON (Pinnacle), is submitting the attached report which presents the results of the second quarter 1998 groundwater monitoring program at ARCO Products Company (ARCO) Service Station No. 2169, located at 889 West Grand Avenue, Oakland, California. The monitoring program complies with the Alameda County Health Care Services Agency (ACHCSA) requirements regarding underground tank investigations.

LIMITATIONS

No monitoring event is thorough enough to describe all geologic and hydrogeologic conditions of interest at a given site. If conditions have not been identified during the monitoring event, results should not be construed as a guarantee of the absence of such conditions at the site, but rather as the product of the scope and limitations of work performed during the monitoring event.

Please call if you have questions.

Sincerely,

Pinnacle

Glen Vander Veen Project Manager Jay R. Johnson, R.G.

Senior Project Supervisor

Attachment: Quarterly Groundwater Monitoring Report, Second Quarter 1998

cc: Susan Hugo, ACHCSA

WC\S:\ARCO\2169\QTRLY\2169Q298.DOC\uh:1

Date:	November 13, 1998

ARCO QUARTERLY GROUNDWATER MONITORING REPORT

Station No.: 2169 Address: 889 West Grand Avenue, Oakland, California

Pinnacle Project No.: 20805-129.005

ARCO Environmental Engineer/Phone No.: Pinnacle Project Manager/Phone No.: Primary Agency/Regulatory ID No.: Address: 889 West Grand Avenue, Oakland, California

20805-129.005

Paul Supple /(925) 299-8891

Glen VanderVeen /(925) 977-9020

ACHCSA /Susan Hugo

WORK PERFORMED THIS QUARTER (SECOND - 1998):

- 1. Prepared and submitted quarterly groundwater monitoring report for first quarter 1998.
- 2. Performed quarterly groundwater monitoring and sampling for second quarter 1998.

WORK PROPOSED FOR NEXT QUARTER (THIRD - 1998):

- 1. Prepare and submit quarterly groundwater monitoring report for second quarter 1998.
- 2. Perform quarterly groundwater monitoring and sampling for third quarter 1998.
- 3. Repair and restart air-sparge system and restart soil-vapor extraction (SVE) system if influent hydrocarbon concentrations in extracted vapor and groundwater levels warrant.

QUARTERLY MONITORING:

Current Phase of Project:	Quarterly Groundwater Monitoring and Operation and Maintenance of Remediation Systems
Frequency of Sampling:	Annual (1st Quarter): A-3, A-4
	Semi-annual (1st/2nd Quarter): A-2, AR-1, AR-2
	Quarterly: A-1, A-5, A-6, ADR-1, ADR-2
Frequency of Monitoring:	Quarterly (groundwater), Monthly (SVE and Air-Sparge)
Is Floating Product (FP) Present On-site:	☐ Yes ☒ No
Cumulative FP Recovered to Date:	4.8 gallons, Wells ADR-1 and ADR-2
FP Recovered This Quarter :	None
Bulk Soil Removed to Date:	2,196 cubic yards of TPH-impacted soil
Bulk Soil Removed This Quarter:	None
Water Wells or Surface Waters	
within 2000 ft., impacted by site:	None
Current Remediation Techniques:	SVE and Air-Sparge Systems
Average Depth to Groundwater:	4.4 feet
Groundwater Flow Direction and Gradient (Average):	0.03 ft/ft toward North

SVE QUARTERLY OPERATION AND PERFORMANCE:

912 G01111 = 1121	
Equipment Inventory:	Therm Tech Model VAC-25, 250 cfm, Thermal/Catalytic Oxidizer
Operating Mode:	Catalytic Oxidation
BAAQMD Permit #:	12119
TPH Conc. End of Period (lab):	NA
Benzene Conc. End of Period (lab):	NA
Flowrate End of Period:	NA
HC Destroyed This Period:	0 pounds
HC Destroyed to Date:	8582.1 pounds
Utility Usage	
Electric (KWH):	0 KWH
Operating Hours This Period:	0 hours
Percent Operational:	0% System was shut down due to low influent concentrations.
Operating Hours to Date:	6909.6 hours
Unit Maintenance:	Routine monthly maintenance.
Number of Auto Shut Downs:	0
Destruction Efficiency Permit	
Requirement:	90%
Average Percent TPH Conversion:	NA
Average Stack Temperature:	NA
Average Source Flow:	NA
Average Process Flow:	NA
Average Source Vacuum:	NA
-	

DISCUSSION:

 The soil-vapor extraction (SVE) system was not in operation during the second quarter of 1998 due to low influent hydrocarbon concentrations. The air sparge system, which has been used at low flow rates to stimulate biodegredation, did not operate during the second quarter 1998, due to electrical problems.

ATTACHMENTS:

- Table 1 Historical Groundwater Elevation and Analytical Data, Petroleum Hydrocarbons and Their Constituents
- Table 2 Approximate Cumulative Floating Product Recovered
- Figure 1 Groundwater Analytical Summary Map
- Figure 2 Groundwater Elevation Contour Map
- Appendix A Sampling and Analysis Procedures
- Appendix B Certified Analytical Reports and Chain-of-Custody Documentation
- · Appendix C Field Data Sheets

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present***

Well Designation	Water Level Field Date	Top of Casing Elevation	Depth to Water	Groundwater Elevation	Floating Product Thickness	Groundwater Flow Direction	Hydraulic Gradient	Water Sample Field Date	TPHG LUFT Method	Benzene EPA 8020	Toluene EPA 8020	Ethylbenzene EPA 8020	Total Xylenes EPA 8020	MTBE . EPA 8020	MTBE EPA 8240	TPHD LUFT Method
		ft-MSL	fect	ft-MSL	feet	MWN	ft/ft		μg/L	μg/L	μg/L	h&/L	µg/L	µg/L	µg/L	µg/L
		14.16	8.10	6.06	ND	NW	0.009	03-24-95	1200	230	39	34	66			160
A-I	03-24-95		11.13	3.03	ND	NW	0.002	06-05-95	1500	310	27	36	76		••	710
A-1	06-05-95	14.16	11.71	2.45	ND	w	0.001	08-18-95	1600	470	35	48	110	120		240
A-1	08-17-95	14.16	12.28	1.88	ND	NNW	0.002	12-04-95	1200	240	17	25	56		120	
A-l	12-04-95	14.16		5.38	ND	NW	0.003	03-13-96	1300	300	74	29	73	100	• •	
A-1	03-01-96	14.16	8.78 9.85	4.31	ND	NW	0.002	05-29-96	Not sampled:	well samp	led semi-a	nnually, du	ring the fir:	st and third	quarters	
A-1	05-29-96	14.16		3.08	ND	w	0.002	08-29-96	1200	320	5.9	25	27	110		
A-1	08-29-96	14.16	11.08	3.62	ND	WNW	0.002	11-21-96	Not sampled:	well same	oled semi-a	nnually, du	ning the fire	st and third	quarters	
A-l	11-21-96	14.16	10.54	3.61	ND	NW	0.002	03-26-97	<50	0.8	< 0.5	<0.5	<0.5	64		
A-1	03-26-97	14.16	10.55	3.01	ND ND	NNW	0.002	05-21-97	Not sampled	well sam	oled semi-a	nnually, du	iring the fir	st and third	quarters	
A-l	05-21-97	14.16	11.10		ND	NNW	0.002	08-08-97	91	7	<0.5	0.5	3.9	<60		
A-1	08-08-97	14.16	11.32	2.84		N	0.002	02-23-98	590	160	22	15	28	70		
A-I	02-20-98	14.16	7 10	7.06	ND		0.013	05-11-98	280	26	<0.5	0.8	2.3	6		
A-1	05-11-98	14.16	9.87	4.29	ND	N	0.03	03-11-90	200		40.5					
			8.64	5.91	ND	NW	0.009	03-24-95	<50	< 0.5	<0.5	<0.5	<0.5	•-		
A-2	03-24-95	14 55	11.72	2.83	ND	NW	0.002	06-05-95	<50	<0.5	<0.5	<0.5	<0.5			
A-2	06-05-95	14.55	12.35	2.20	ND	w	0.001	08-17-95	<50	< 0.5	<0.5	<0.5	<0.5	12		
A-2	08-17-95	14.55 14.55	12.55	1.81	ND	NNW	0.002	12-04-95	<50	<0.5	<0.5	<0.5	<0.5	• •		
A-2	12-04-95	14.55	9.34	5.21	ND	NW	0.003	03-13-96	<50	< 0.5	0.6	<0.5	1.3	<9	• •	
A-2	03-01-96	14.55 14.55	10.40	4.15	ND	NW	0.002	05-29-96	<50	<0.5	<0.5	<0.5	<0.5	<20	••	
A-2	05-29-96	14.55	11.50	3.05	ND	w	0.002	08-29-96	<50	< 0.5	<0.5	<0.5	<0.5	<39		
A-2	08-29-96			3.49	ND	WNW	0.002	11-21-96	<50	<0.5	<0.5	<0.5	<0.5	<30		
A-2	11-21-96	14.55	11.06	3.49	ND	NW	0.002	03-26-97	<50	<0.5	<0.5	<0.5	<0.5	<20		
A-2	03-26-97	14.55	11.12	3. 43 2.97	ND ND	NNW	0.002	05-21-97	Not sample	i: well sam	pled semi-	annually, d	luring the fi	rst and third	l quarters	
A-2	05-21-97	14.55	11.58	2.73	ND	NNW	0.002	08-08-97	<50	<0.5	<0.5	<0.5	<0.5	<20	••	
A-2	08-08-97	14 55	11.82	6.87	ND	N	0.013	02-20-98	<50	<0.5	<0.5	<0.5	<0.5	17		
A-2	02-20-98	14.55	7.68	4.10	NR NR	N	0.013	05-11-98								
A-2	05-11-98	14 55	10.45	4,10	1416	14	Q.0 5	/4	2,000							

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present***

Well Designation	Water Level Field Date	Top of Casing GELEVALION	page Depth to Water	Groundwater	Floating Product	Groundwater Flow Direction	Hydraulic → Gradient	Water Sample Field Date	TPHG	Benzene E EPA 8020	Toluene	Ethylbenzene	Total Xylenes	mTBE 字 EPA 8020	MTBE S EPA 8240	TPHD
										<0.5	<0.5	<0.5	<0.5			
A-3	03-24-95	15.75	8.83	6.92	ND	NW	0.009	03-24-95	<50 Not sampled:					rter		
A-3	06-05-95	15.75	12.44	3.31	ND	NW	0.002	06-05-95	Not sampled:	well samp	NCG annuau	y, during t	he first and	rier		
A-3	08-17-95	15.75	13.04	2.71	ND	W	0.001	08-17-95	Not sampled:	well samp	oled annuali	y, during t	he first que	rter		
A-3	12-04-95	15.75	13.57	2 18	ND	NNW	0.002	12-04-95	Not sampled:		<0.5	y, couring ≀ <0.5		- <3		
A-3	03-01-96	15.75	9.90	5.85	ND	NW	0.003	03-13-96	<50	<0.5						
A-3	05-29-96	15.75	11 08	4 67	ND	NW	0.002	05-29-96	Not sampled	well sam	pied annuali	y, auring t	ne nist qua	T for		
A-3	08-29-96	15.75	12.38	3.37	ND	w	0.002	08-29-96	Not sampled	well sam	pled annuall	y, during t	ine nist qua	uter eter		
A-3	11-21-96	15.75	11.86	3 89	ND	WNW	0.002	11-21-96	Not sampled			y, dunng i	me mat da			
A-3 A-3	03-26-97	15.75	11.81	3.94	ND	NW	0.002	03-26-97	<50	<0.5	<0.5	<0.5	<0.5			
A-3 A-3	05-20-97	15.75	12.35	3 40	ND	NNW	0.002	05-21-97	Not sampled	: well sam	pled annuali	y, during	the first qua	arter		
	08-08-97	15.75	12.62	3.13	ND	NNW	0.002	08-08-97	Not sampled				the first qu	arter		
A-3	02-20-98	15.75	8 06	7.69	ND	N	0.013	02-20-98	<50	<0.5	<0.5	<0.5	<0.5	<3		
A-3		15.75	11.19	4.56	NR	N	0.03	05-11-98	Not sampled	; well sam	pled annual	ly, during	the first qu	arter		
A-3	05-11-98	15.75	11,17	4.50												
	00.04.05	15 25	7.20	8 05	ND	NW	0.009	03-24-95	<50	<0.5	<0.5	<0.5	<0.5			
A-4	03-24-95		11.70	3.55	ND	NW	0.002	06-05-95	Not sampled	l: well sam	pled annual	ly, during	the first qu	arter		
A-4	06-05-95	15.25	12.28	2.97	ND	W	0.001	08-17-95	Not sampled	l: well san	pied annual	ly, during	the first qu	arter		
A-4	08-17-95	15.25	12.63	2.62	ND	NNW	0.002	12-04-95	Not sample	i: well san	pied annual	ly, during	the first qu	arter		
A-4	12-04-95	15.25	8.55	670	ND	NW	0.003	03-13-96	<50	<0.5	<0.5	<0.5	<0.5	<3		
A-4	03-01-96	15.25		4.93	ND	NW	0.002	05-29-96	Not sample	i: well san	ipled annual	ly, during	the first qu	arter		
A-4	05-29-96	15.25	10.32		ND	w	0.002	08-29-96		d: well san	pled annua	lly, during	the first qu	arter		
A-4	08-29-96	15.25	11.55		ND	WNW	0.002	11-21-96	_	t: well san	pled annua	lly, during	the first qu	arter		
A-4	11-21-96	15.25	10.83	4.42	ND	NW	0.002	03-26-97	_	<0.5	<0.5	<0.5	<0.5	<3		
A-4	03-26-97	15.25	10.97		ND DN	NNW	0.002	05-20-97			npled angua	lly, during	the first qu	arter		
A-4	05-21-97	15.25	11.51	3 74		NNW	0.002	08-08-97		d: well san	npled annua	lly, during	the first qu	ıarter		
A-4	08-08-97	15.25	11.73		ND	NNW N	0.002	02-20-98		<0.5	<0.5	<0.5	<0.5	<3		•
A-4	02-20-98	15.25	6.25		ND	N	0.013	05-11-98				lly, during	the first q	uarter		
A-4	05-11-98	15.25	10.33	4.92	NR	14	0.03	47-11-20	· consumpto	,			•			

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present***

Fi-MSL feet fi-MSL feet MWN ft/ft																	
A-5 03-24-95 13.51 7.40 6.11 ND NW 0.009 03-24-95 3300 200 310 130 460 A-5 06-05-95 13.51 10.43 3.08 ND NW 0.002 06-05-95 57000 2700 4600 1500 6800 A-5 08-17-95 13.51 11.15 2.36 ND W 0.001 08-18-95 34000 1600 2700 1100 5100 <28 A-5 12-04-95 13.51 11.142 2.09 ND NNW 0.002 12-04-95 61 <0.5 <0.5 <0.5 <0.5 <0.5 < A-5 03-01-96 13.51 8.11 5.40 ND NW 0.002 12-04-95 61 <0.5 <0.5 <0.5 <0.5 < A-5 03-01-96 13.51 10.60 2.91 ND NNW 0.002 05-29-96 11000 860 960 380 1600 <100 A-5 08-29-96 13.51 10.60 2.91 ND NW 0.002 05-29-96 19000 1600 1900 880 3300 <100 A-5 08-29-96 13.51 10.60 2.91 ND W 0.002 08-29-96 7700 490 450 260 990 30 A-5 11-21-96 13.51 10.05 3.46 ND WNW 0.002 11-21-96 8000 450 550 340 1100 30 A-5 03-26-97 13.51 10.25 3.26 ND NNW 0.002 08-29-97 16000 1500 900 700 2700 <120 A-5 08-29-98 13.51 10.25 3.26 ND NNW 0.002 08-29-97 16000 1500 900 700 2700 <120 A-5 08-29-98 13.51 NR	Well Designation	Water Level Field Date	•		_				Water Sample Field Date	•		-		-			TPHD LUFT Method
A-5 08-24-95 13.51 7.40 6.11 ND NW 0.002 06-25-95 57000 2700 4600 1500 6800			11-11102														
A-5 06-05-95 13.51 10.43 3.08 ND NW 0.002 06-05-95 57000 2700 4800 1500 6800	A-5	03-24-95	13.51	7.40	6.11	ND	NW	0.009	03-24-95								
A-5 08-17-95 13.51 11.15 2.36 ND W 0.001 08-18-95 3400 1600 2700 1100 5100 428 A-5 12-04-95 13.51 11.42 2.09 ND NNW 0.002 12-04-95 61 <0.5 <0.5 <0.5 <0.5 <0.5 < A-5 03-01-96 13.51 9.30 4.21 ND NW 0.003 03-13-96 11000 860 960 380 1600 <100 A-5 05-29-96 13.51 9.30 4.21 ND NW 0.002 05-29-96 19000 1600 1900 830 3300 <100 A-5 08-29-96 13.51 10.60 2.91 ND W 0.002 08-29-96 7700 490 450 260 990 30 A-5 11-21-96 13.51 10.05 3.46 ND NWW 0.002 08-29-96 7700 490 450 260 990 30 A-5 03-26-97 13.51 9.87 364 ND NW 0.002 03-26-97 3100 190 140 130 340 30 A-5 05-21-97 13.51 10.25 3.26 ND NNW 0.002 05-21-97 16000 1500 900 700 2700 <120 A-5 08-08-97 13.51 10.42 3.09 ND NNW 0.002 05-21-97 16000 1500 900 700 2700 <120 A-5 08-08-97 13.51 NR NR NR NR N N 0.013 02-20-98 Not sampled: well was inaccessible A-6 03-24-95 13.51 NR NR NR NR NR N 0.003 05-11-98 Not sampled: well was inaccessible A-6 06-05-95 13.51 11.06 3.45 ND NW 0.002 06-05-95 160 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.				10.43	3.08	ND	NW	0.002	06-05-95								
A-5 12-04-95 13.51 11.42 2 09 ND NNW 0.002 12-04-95 61 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5						ND	w	0.001	08-18-95	34000	1600				<28	• -	
A-5 13-04-95 13-51 8.11 5.40 ND NW 0.003 03-13-96 11000 860 960 380 1600 -100							NNW	0.002	12-04-95	61	<0.5	<0.5					••
A-5 05-29-96 13.51 9.30 4.21 ND NW 0.002 05-29-96 19000 1600 1900 880 3300 <100 A-5 08-29-96 13.51 10.60 2.91 ND W 0.002 08-29-96 7700 490 450 260 990 30 A-5 11-21-96 13.51 10.05 3.46 ND WNW 0.002 11-21-96 8000 450 550 340 1100 30 A-5 03-26-97 13.51 10.25 3.26 ND NNW 0.002 03-26-97 3100 190 140 130 340 30 A-5 05-21-97 13.51 10.25 3.26 ND NNW 0.002 05-21-97 16000 1500 990 700 2700 <120 A-5 08-08-97 13.51 NR NR NR NR NR N 0.013 02-20-98 Not sampled: well was inaccessible A-6 02-24-95 13.51 NR NR NR NR N 0.03 02-24-95 Not sampled: well was inaccessible A-6 03-24-95 13.51 10.06 3.45 ND NW 0.002 06-05-95 160 <0.5 <1 <0.5 <1.5 A-6 08-17-95 13.51 11.10 2.41 ND W 0.001 08-18-95 530 <0.5 <0.5 <0.5 <2.4 <4.2 6 A-6 12-04-95 13.51 11.52 1.99 ND NNW 0.002 12-04-95 28000 1600 1800 880 3600 A-6 03-29-96 13.51 10.54 2.97 ND WNW 0.002 12-04-95 800 1600 1800 880 3600 A-6 03-29-96 13.51 10.54 2.97 ND WNW 0.002 12-04-95 800 1600 1800 880 3600 A-6 03-29-96 13.51 10.54 2.97 ND WNW 0.002 12-04-95 8000 1600 1800 880 3600 A-6 03-29-96 13.51 10.54 2.97 ND WNW 0.002 12-04-95 8000 1600 1800 880 3600 A-6 03-29-96 13.51 10.54 2.97 ND WNW 0.002 12-04-95 8000 1600 1800 880 3600 A-6 03-29-96 13.51 10.54 2.97 ND WNW 0.002 11-21-96 62 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5								0.003	03-13-96	11000	860	960	380	1600		••	
A-5 03-29-96 13.51 10.60 2.91 ND W 0.002 08-29-96 7700 490 450 260 990 30 A-5 11-21-96 13.51 10.05 3.46 ND WNW 0.002 11-21-96 8000 450 550 340 1100 30 A-5 03-26-97 13.51 9.87 364 ND NW 0.002 03-26-97 3100 190 140 130 340 30 A-5 03-21-97 13.51 10.25 3.26 ND NNW 0.002 05-21-97 16000 1500 900 700 2700 4120 A-5 05-21-97 13.51 10.42 3.09 ND NNW 0.002 08-08-97 9000 690 240 440 1300 30 A-5 02-20-98 13.51 NR NR NR NR N 0.013 02-20-98 Not sampled: well was inaccessible A-6 03-24-95 13.51 10.06 3.45 ND NW 0.002 08-08-95 160 40.5 <1.5 < A-6 08-17-95 13.51 11.10 2.41 ND W 0.001 08-18-95 530 40.5 <0.6 <0.5 <0.5 <0.5 < A-6 08-17-95 13.51 11.52 1.99 ND NNW 0.002 12-04-95 28000 1600 1800 880 3600 A-6 03-01-96 13.51 11.52 1.99 ND NNW 0.002 12-04-95 28000 1600 1800 880 3600 A-6 03-02-96 13.51 10.52 2.99 ND NW 0.002 08-29-96 80 40.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <									05-29-96	19000	1600	1900	880	3300			
A-5									08-29-96	7700	490	450	260	990	<30		
A-5 03-26-97 13.51 9.87 364 ND NW 0.002 03-26-97 3100 190 140 130 340 <30 A-5 03-26-97 13.51 10.25 3.26 ND NNW 0.002 05-21-97 16000 1500 900 700 2700 <120 A-5 08-08-97 13.51 10.42 3.09 ND NNW 0.002 08-08-97 9000 690 240 440 1300 <30 A-5 02-20-98 13.51 NR NR NR NR NR N 0.013 02-20-98 Not sampled: well was inaccessible A-5 05-11-98 13.51 NR NR NR NR NR N 0.03 05-11-98 Not sampled: well was inaccessible A-6 03-24-95 13.51 10.06 3.45 ND NW 0.009 03-24-95 120 <0.5 <1 <0.5 <1.5 A-6 06-05-95 13.51 10.06 3.45 ND NW 0.002 06-05-95 160 <0.5 <0.6 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5										8000	450	550	340	1100	<30		
A-5 05-21-97 13.51 10.25 3.26 ND NNW 0.002 05-21-97 16000 1500 900 700 2700 <120 A-5 05-21-97 13.51 10.42 3.09 ND NNW 0.002 08-08-97 9000 690 240 440 1300 <30 A-5 02-20-98 13.51 NR NR NR NR NR N 0.013 02-20-98 Not sampled: well was inaccessible A-5 05-11-98 13.51 NR NR NR NR NR N 0.03 05-11-98 Not sampled: well was inaccessible A-6 03-24-95 13.51 10.06 3.45 ND NW 0.002 06-05-95 160 <0.5 <1 <0.5 <1.5 A-6 06-05-95 13.51 11.00 2.41 ND W 0.001 08-18-95 530 <0.5 <0.5 <0.5 <0.5 < A-6 08-17-95 13.51 11.52 1.99 ND NNW 0.002 12-04-95 28000 1600 1800 880 3600 A-6 03-01-96 13.51 8.21 5.30 ND NW 0.003 03-13-96 1400 <3 <15 <7 <10 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5 <1 <0.5											190	140	130	340	<30		
A-5 05-21-97 13.51 10.42 3.09 ND NNW 0.002 08-08-97 9000 690 240 440 1300 30 A-5 08-08-97 13.51 10.42 3.09 ND NNW 0.002 08-08-97 9000 690 240 440 1300 30 A-5 02-20-98 13.51 NR										16000	1500	900	700	2700	<120		
A-5 02-20-98 13.51 NR NR NR NR NR N 0.013 02-20-98 Not sampled: well was inaccessible										9000	690	240	440	1300	<30		
A-5 05-11-98 13.51 NR					_					Not sample	i: well was	inaccessible	e				
A-6 03-24-95 13.51 789 562 ND NW 0.009 03-24-95 120 <0.5 <1 <0.5 <1.5	-									Not sample	i: well was	inaccessible	e				
A-6 03-24-95 13.51 10.06 3.45 ND NW 0.002 06-05-95 160 <0.5 <0.6 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5	A-5	05-11-98	13.51	NK	NK	IVIK	14	0.05	05 11 70								
A-6 06-05-95 13.51 10.06 3.45 ND NW 0.002 06-05-95 160 <0.5 <0.6 <0.5 <0.5 <			10.51	7 00	5.62	ND	NW	0.009	03-24-95	120	<0.5	<1	<0.5	<1.5			
A-6 08-17-95 13.51 11.10 2.41 ND W 0.001 08-18-95 530 <0.5 <0.5 <2.4 <4.2 6									06-05-95	160	<0.5	<0.6	<0.5	<0.5			
A-6 12-04-95 13.51 11.52 1.99 ND NNW 0.002 12-04-95 28000 1600 1800 880 3600									08-18-95	530	<0.5	<0.5	<2.4	<4.2	6		
A-6 03-01-96 13.51 8.21 5.30 ND NW 0.003 03-13-96 1400 <3 <15 <7 <10 <20 A-6 05-29-96 13.51 9.25 4.26 ND NW 0.002 05-29-96 440 <2 <2 <2 <2 <3 A-6 08-29-96 13.51 10.52 2.99 ND W 0.002 08-29-96 80 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.									12-04-95	28000	1600	1800	880	3600			
A-6 05-29-96 13.51 9.25 4.26 ND NW 0.002 05-29-96 410 <2 <2 <2 <2 <2 <3 3 A-6 08-29-96 13.51 10.52 2.99 ND W 0.002 08-29-96 80 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.									03-13-96	1400	<3	<15	<7	<10	<20		
A-6 08-29-96 13.51 10.52 2.99 ND W 0.002 08-29-96 80 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.5 <0.									05-29-96	410	<2	<2.	4	<2	3		
A-6										80	<0.5	<0.5	<0.5	< 0.5	6		
A-6 03-26-97 13.51 10.54 2.97 ND NW 0.002 03-26-97 110 <0.5 0.8 1 1.4 15 A-6 05-21-97 13.51 10.54 2.97 ND NNW 0.002 05-21-97 600 0.6 0.6 <2 2.7 <3 A-6 08-08-97 13.51 10.77 2.74 ND NNW 0.002 08-08-97 850 <0.5 <0.5 6.1 <0.5 <4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 0.5 0.5 0.6 0.5 0.6 0.5 0.6 0.5 0.5 0.6 0.5 0.5 0.6 0.5 0.5 0.6 0.5 0.5 0.6 0.5 0.5 0.6 0.5 0.5 0.6 0.5 0.5 0.5 0.5 0.5 0.5 0.5 0.5 0.5 0.5												< 0.5	<0.5	<0.5	12		
A-6 03-26-97 13.51 9.95 5.36 ND NNW 0.002 05-21-97 600 0.6 0.6 <2 2.7 <3 A-6 05-21-97 13.51 10.54 2.97 ND NNW 0.002 05-21-97 600 0.6 0.6 <2 2.7 <3 A-6 08-08-97 13.51 10.77 2.74 ND NNW 0.002 08-08-97 850 <0.5 <0.5 6.1 <0.5 <4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 0.5 0.6 0.6 0.6 0.6 0.6 0.6 0.6 0.6 0.6 0.6													1	1.4	15		
A-6 05-21-97 13.51 10.54 2.97 ND NNW 0.002 08-08-97 850 <0.5 <0.5 6.1 <0.5 <4 A-6 08-08-97 13.51 10.77 2.74 ND NNW 0.002 08-08-97 850 <0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 1.3 0.5 4 A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-98 60 <0.5 0.6 1.3 0.5 4														2.7	<3		
A-6 08-08-97 13.51 10.77 2.74 ND NNW 0.002 05-05-7 05-0 05-05-7 05-0 05-05-7 05-0 05-0														<0.5	<4		
A-6 02-20-98 13.51 6.73 6.78 ND N 0.013 02-20-90 60 60 60 60 60 60 60 60 60 60 60 60 60							-										
	A-6																
	A-6	05-11-98	13.51	9.26	4.25	ND	N	0.03	02-11-30	140	40.5	4.,	4.4	·- -	_		

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present***

Well Designation	Water Level Field Date	Top of Casing Elevation	Depth to Water	Groundwater Elevation	Floating Product Thickness	Groundwater Flow Direction	Hydraulic Hy Gradient	Water Sample Field Date	TPHG LUFT Method	Benzene Z EPA 8020	Toluene E EPA 8020	Ethylbenzene	Total Xylenes	MTBE EPA 8020	MTBE E EPA 8240	TPHD LUFF Method
		ft-MSL	feet	ft-MSL	feet	MAN	1010									
				8.36	ND	NW	0.009	03-24-95	270	14	0.6	2.5	2.1			130
AR-1	03-24-95	15.61	7.25	4.24	ND	NW	0.002	06-05-95	190	10	<0.5	0.8	0.5			580
AR-1	06-05-95	15.61	11.37	3.21	ND	W	0.001	08-17-95	960	110	12	4.5	150	14	••	<50
AR-1	08-17-95	15.61	12.40	2.71	ND ND	NNW	0.002	12-04-95	<50	1.5	<0.5	<0.5	0.8			
AR-I	12-04-95	15.61	12.90	7.42	ND	NW	0.003	03-13-96	150	3.8	0.5	1.4	1.3	<3		
AR-1	03-01-96	15.61	8.19		ND	NW	0.002	05-29-96	Not sampled	l: well same	oled semi-a	nnually, du	iring the fir:	st and third	quarters	
AR-1	05-29-96	15 61	10.41	5.20 3.49	ND	W	0.002	08-29-96	<50	< 0.5	<0.5	<0.5	0.8	<3		
AR-1	08-29-96	15.61	12.12	-	ND	WNW	0.002	11-21-96	Not sampled	l: well same	oled semi-a	nnually, dr	ring the fir	st and third	quarters	
AR-1	11-21-96	15.61	11.52	4.09	ND	NW	0.002	03-26-97	<50	<0.5	<0.5	<0.5	<0.5	<3	••	
AR-1	03-26-97	15.61	11.33	4.28	ND	NNW	0.002	05-21-97	Not sampled		oled semi-a	nnually, du	anng the fir	st and third	quarters	
AR-1	05-21-97	15 61	12.02	3.59	ND	NNW	0.002	08-08-97	<50	0.7	<0.5	1	<0.5	<3		
. AR-1	08-08-97	15.61	12.31	3.30		N	0.002	02-23-98	<200	<2	<2	Q	2	160		
AR-1	02-20-98	15.61	6.42	9.19	ND	N N	0.013	05-11-98	<50	<0.5	<0.5	<0.5	<0.5	4		
AR-1	05-11-98	15.61	10.93	4.68	ND	14	0.03	0,5-11-90	~~~	-0.5						
					ND	NW	0.009	03-24-95	<50	6.2	<0.5	<0.5	0.6			<50
AR-2	03-24-95	15.28	9.13	6.15	ND ND	NW	0.002	06-05-95	5 0	<0.5	<0.5	<0.5	<0.5			<50
AR-2	06-05-95	15.28	12.09	3.19	ND ND	W	0.002	08-18-95	450	<0.5	<0.5	<0.5	<0.5	4		<50
AR-2	08-17-95	15.28	12.78	2.50	ND ND	NNW	0.001	12-13-95	حن حن	<0.5	<0.5	<0.5	<0.5			
AR-2	12-04-95	15.28	11.44	3.84	ND	NW	0.002	03-13-96	190	26	2.6	3.3	13	200		
AR-2	03-01-96	15.28	9.83	5.45	ND ND	NW	0.003	05-29-96	Not sample		noled semi-	annually, d	huring the fir	rst and third	i quarters	
AR-2	05-29-96	15.28	10.97	4.31		W W	0.002	08-29-96	<50	<0.5	<0.5	<0.5	<0.5	95	••	
AR-2	08-29-96	15.28	12.20	3.08	ND	WNW	0.002	11-21-96	Not sample	d well sam			turing the fi	rst and thire	d quarters	
AR-2	11-21-96	15.28	11.57	3.71	ND	NM	0.002	03-26-97	<50	<0.5	<0.5	<0.5	<0.5	9		-
AR-2	03-26-97	15.28	11.60	3.68	ND	NW	0.002	05-20-97	Not sample					rst and thire	quarters	
AR-2	05-21-97	15.28	12.12	3.16	ND	NNW	0.002	08-08-97	<50	<0.5	<0.5	<0.5	<0.5	<3		-
AR-2	08-08-97	15.28	12.35		ND	NNW	0.002	02-20-98		<0.5	<0.5	<0.5	<0.5			•
AR-2	02-20-98	15.28	8.00		ND	N	0.013	05-11-98	<50	<0.5	<0.5	<0.5				-
AR-2	05-11-98	15.28	10.97	4.31	ND	N	0.05	03-11-90	~~	70.5	70.0	- 510				

Table 1
Historical Groundwater Elevation and Analytical Data
Petroleum Hydrocarbons and Their Constituents
1995 - Present***

Well Designation	Water Level Field Date	Top of Casing	Depth to Water	Groundwater G Sevation	Floating Product	S Groundwater S Flow Direction	Hydraulic B Gradient	Water Sample Field Date	TPHG LUFT Method	Benzene E EPA 8020	Toluene EPA 8020	Ethylbenzene EPA 8020	Total Xylenes E EPA 8020	MTBE EPA 8020	MTBE EPA 8240	TPHD
		II-MSL	1001	14-14200												
ADR-1	03-24-95	13.95	8.04	** 5.92	0.01	NW	0.009	03-24-95	Not sampled:	well conta	ined floatin	g product				
ADR-1	06-05-95	13.95	11.02	2.93	ND	ΝW	0.002	06-05-95	23000	310	420	300	1900			13000
ADR-I	08-17-95	13.95	11.86	2.09	ND	w	0.001	08-18-95	4400	150	120	95	620	120		4500
ADR-1	12-04-95	13.95	10.05	3.90	ND	NNW	0.002	12-13-95	8800	100	130	120	990			
ADR-1	03-01-96	13.95	8.76	5.19	ND	NW	0.003	03-13-96	89000	370	1000	840	8100	<500		
ADR-1	05-29-96	13.95	9.74	4.21	ND	NW	0.002	05-30-96	27000	230	380	370	2700	<100		
ADR-1	08-29-96	13.95	10.77	3.18	ND	w	0.002	08-29-96	5300	190	58	76	470	85	• •	
ADR-1	11-21-96	13.95	10.49	3.46	ND	WNW	0.002	11-21-96	1900	82	21	32	270	110		••
ADR-1	03-26-97	13.95	10.37	3.58	ND	NW	0.002	03-26-97	1300	260	6	39	27	95		
ADR-1	05-20-97	13.95	10.90	3.05	ND	NNW	0.002	05-21-97	2100	300	18	37	200	79	••	
ADR-1	08-08-97	13.95	11.12	2.83	ND	NNW	0.002	08-08-97	3900	620	49	110	470	<200		
ADR-1	02-20-98	13.95	NR	NR	NR	N	0.013	02-20-98	Not sampled							
ADR-1	05-11-98	13.95	NR	NR	NR	N	0.03	05-11-98	Not sampled	: well was	inaccessible	e				
ADIC-1	03-11-70															
ADR-2	03-24-95	14.64	8,41	NR*	>3.00*	NR*	NR*	03-24-95	Not sampled							
ADR-2	06-05-95	14.64	11.45	NR*	>3.00*	NR*	NR*	06-05-95	Not sampled							
ADR-2	08-17-95	14.64	12.10	** 2.56	0.03	W	0.001	08-17-95	Not sampled	i: well cont	amed floati	ng product				
ADR-2	12-04-95	14.64	10.93	** 3.73	0.03	NNW	0.002	12-13-95	Not sampled					-500		
ADR-2	03-01-96	14.64	8.74	5 90	ND	NW	0.003	03-13-96	29000	1100	1200	710	3800	<500		
ADR-2	05-29-96	14.64	10.43	4.21	ND	NW	0.002	05-29-96	33000	510	500	470	2300	120		
ADR-2	08-29-96	14.64	11.64	3.00	ND	W	0.002	08-29-96	8000	230	180	150	730	53		
ADR-2	11-21-96	14.64	11.23	3.41	ND	WNW	0.002	11-21-96	15000	630	440	390	2100	75 32		
ADR-2	03-26-97	14.64	11.13	3.51	ND	NW	0.002	03-26-97	6100	320	23	180	400		••	
ADR-2	05-21-97	14.64	11.64	3.00	ND	NNW	0.002	05-21-97	6100	380	22	210	320	<30		
ADR-2	08-08-97	14.64	11 85	2.79	ND	NNW	0.002	08-08-97	8400	380	35	230	910	<30		
ADR-2	02-20-98	14.64	7.67	6 97	ND	N	0.013	02-20-98	4700	320	30	130	360	20		
ADR-2	05-11-98	14.64	10.47	4.17	NR	N	0.03	05-11-98	Not sample	đ						

Table 1 Historical Groundwater Elevation and Analytical Data Petroleum Hydrocarbons and Their Constituents 1995 - Present***

ARCO Service Station 2169 889 West Grand Avenue, Oakland, CA

Well Designation	Water Level Field Date	Top of Casing Elevation	Depth to Water	Groundwater Elevation	Floating Product Thickness	Groundwater Flow Direction	Hydraulic Gradient	Water Sample Field Date	TPHG LUFT Method	Веп <i>хеле</i> БРА 8020	Toluene EPA 8020	Ethylbenzene EPA 8020	Total Xylenes EPA 8020	MTBE EPA 8020	MTBE EPA 8240	TPHD LUFT Method
		ft-MSL	feet	ft-MSL	feet	MWN	ft/ft		μg/L	μg/L	μg/L	μg/L	μ g /L_	μg/L	μg/L	μg/L

ft-MSL: elevation in feet, relative to mean sea level

MWN: groundwater flow direction and gradient apply to the entire monitoring well network

ft/ft: foot per foot

TPHG: total petroleum hydrocarbons as gasoline, California DHS LUFT Method

ug/L: micrograms per liter

EPA: United States Environmental Protection Agency

MTBE: Methyl tert-butyl ether

TPHD: total petroleum hydrocarbons as diesel, California DHS LUFT Method

ND: none detected


NR: not reported; data not available or not measurable


^ sample contains components eluting in the diesel range, quantified as diesel; chromatogram does not match the typical diesel fingerprint

- -: not analyzed or not applicable
- *: well contained more than 3 feet of floating product; exact product thickness and groundwater elevation could not be measured
- **: [corrected elevation (Z')] = Z + (h * 0.73) where: Z = measured elevation, h = floating product thickness, 0.73 = density ratio of oil to water
- ***: For previous historical groundwater elevation data please refer to Fourth Quarter 1995 Groundwater Monitoring Program Results and Remediation System Performance Evaluation Report, ARCO Service Station 2169, 889 West Grand Avenue, Oakland, California, (EMCON, March 4, 1996).

Table 2 Approximate Cumulative Floating Product Recovered

Well Desig- nation	Date	Floating Product Recovered gallons
ADR-1 ADR-2	1994	0.0 0.0
ADR-1 ADR-2	1995	0.0 4.8
ADR-1 ADR-2	1996	0.0 0.0
ADR-1 ADR-2	1997	0.0 0.0
ADR-1 ADR-2	1998	NA 0.0
	1994 to 1998 Total:	4.8

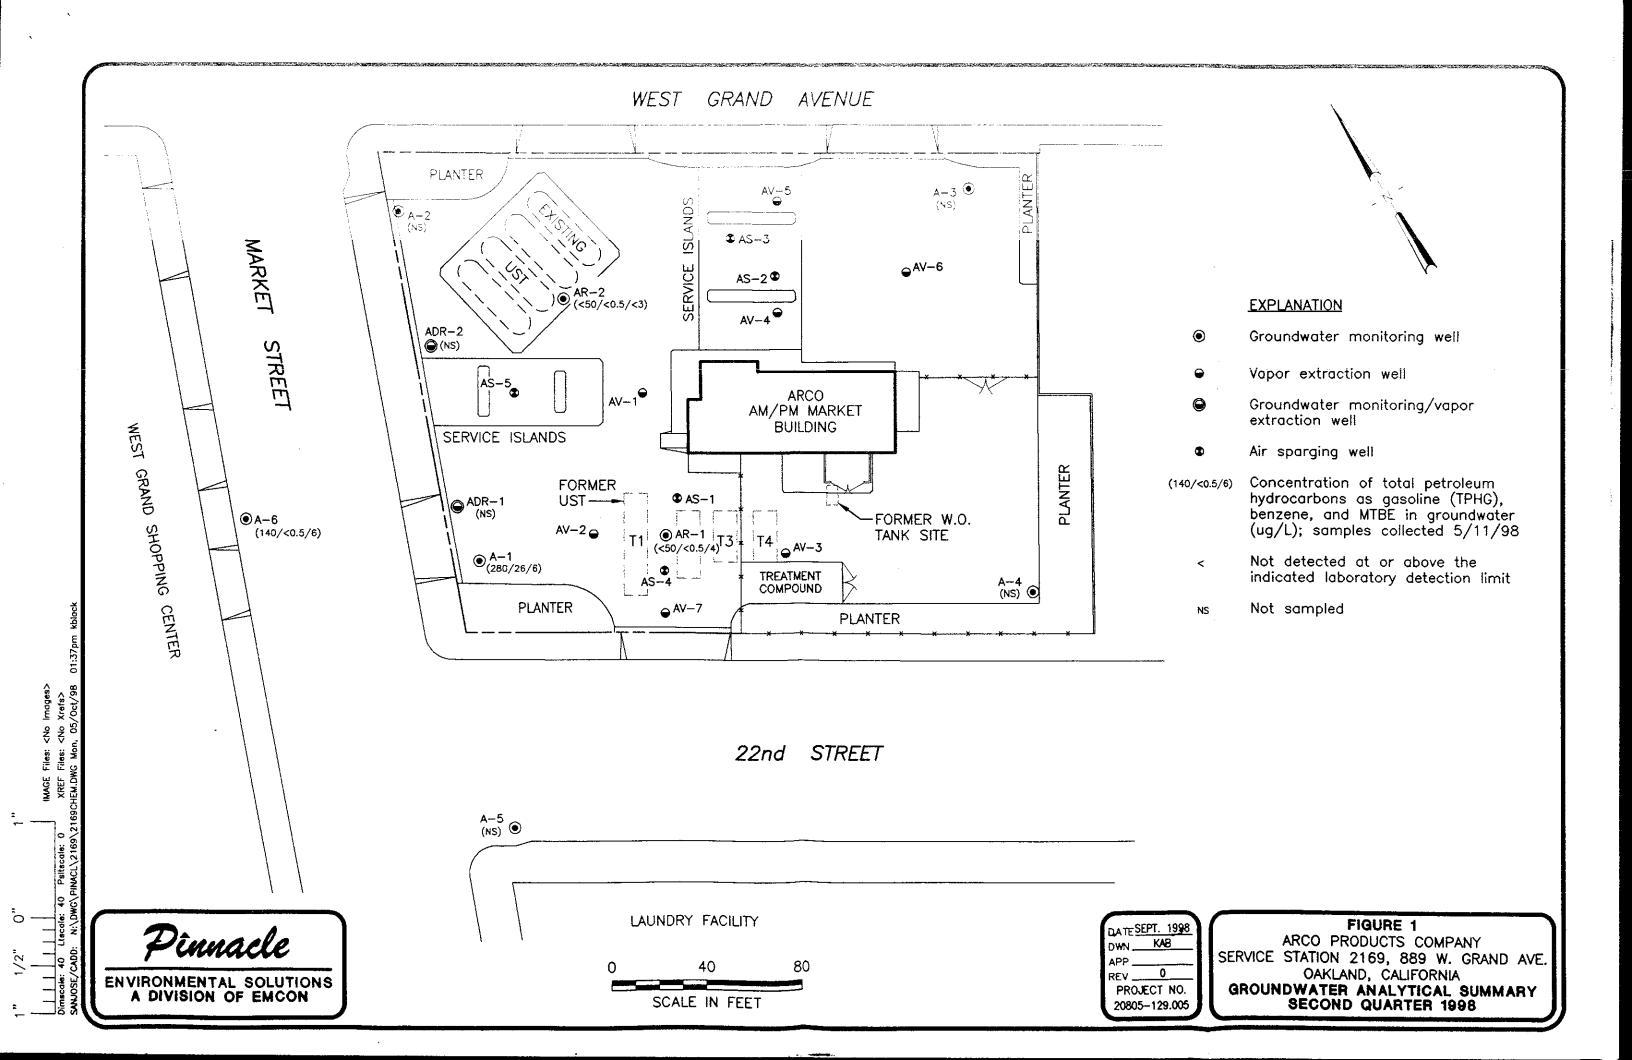

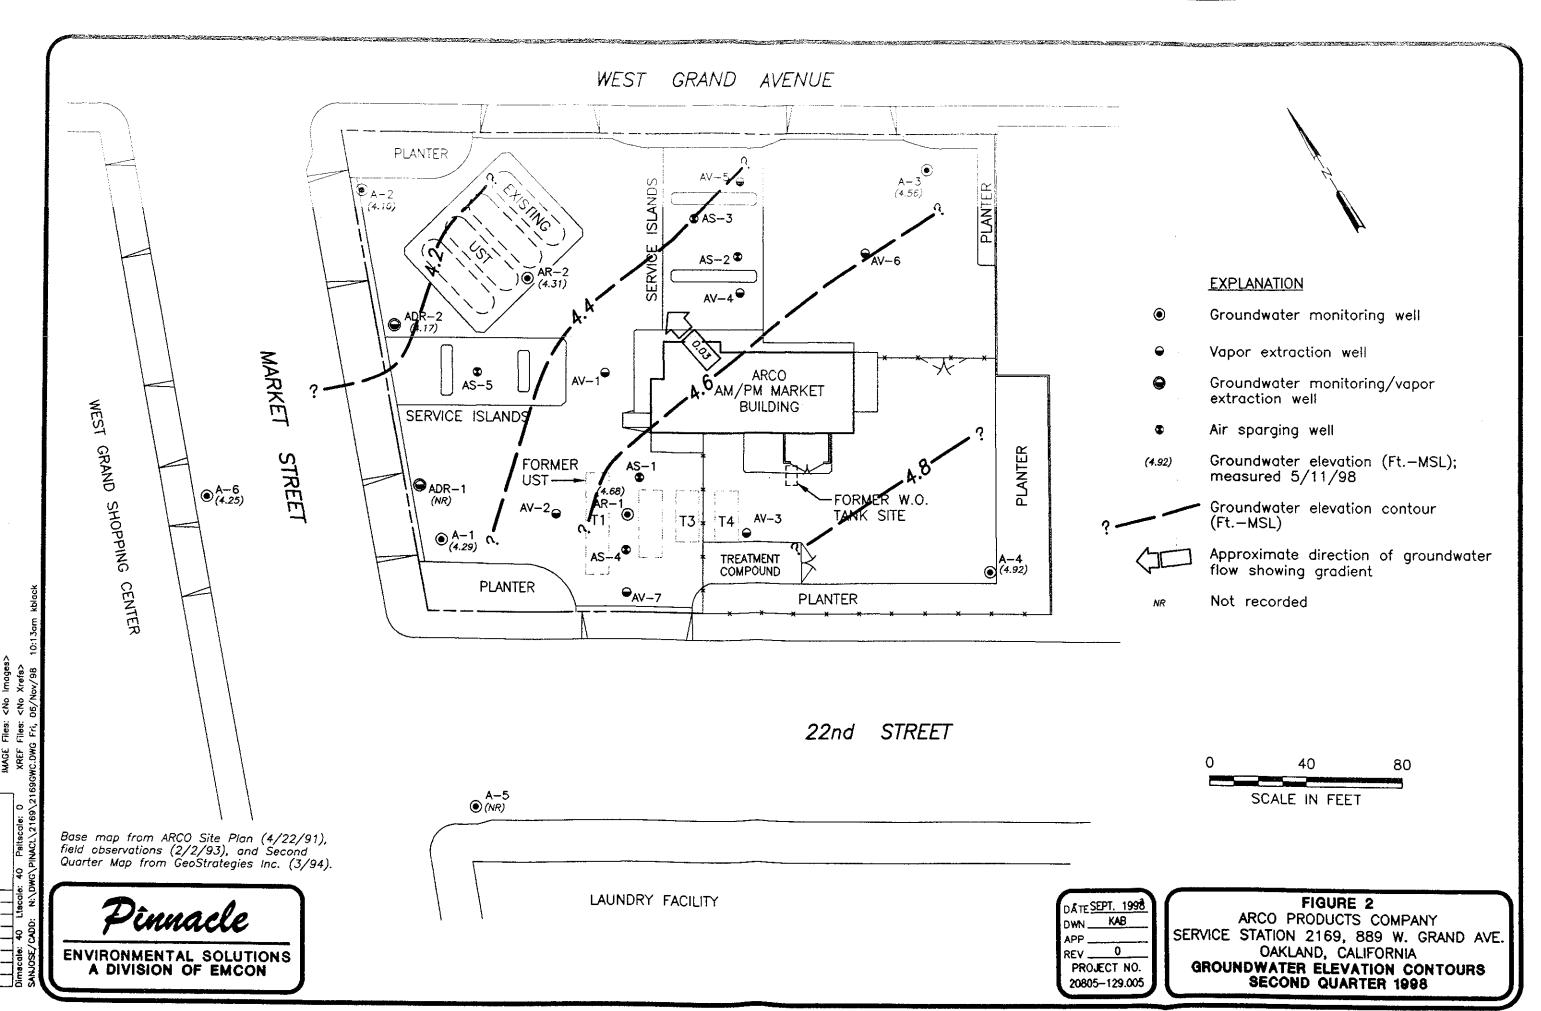

<u>-</u>

APPENDIX A SAMPLING AND ANALYSIS PROCEDURES

APPENDIX A

SAMPLING AND ANALYSIS PROCEDURES

The sampling and analysis procedures for water quality monitoring programs are contained in this appendix. The procedures provided for consistent and reproducible sampling methods, proper application of analytical methods, and accurate and precise analytical results. Finally, these procedures provided guidelines so that the overall objectives of the monitoring program were achieved.

The following documents have been used as guidelines for developing these procedures:

- Procedures Manual for Groundwater Monitoring at Solid Waste Disposal Facilities, Environmental Protection Agency (EPA)-530/SW-611, August 1977
- Resource Conservation and Recovery Act (RCRA) Groundwater Monitoring Technical Enforcement Guidance Document, Office of Solid Waste and Emergency Response (OSWER) 9950.1, September 1986
- Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, EPA SW-846,
 3rd edition, November 1986
- Methods for Organic Chemical Analysis of Municipal and Industrial Waste Water, EPA-600/4-82-057, July 1982
- Methods for Organic Chemical Analysis of Water and Wastes, EPA-600/4-79-020, revised March 1983
- Leaking Underground Fuel Tank (LUFT) Field Manual, California State Water Resources Control Board, revised October 1989

Sample Collection

Sample collection procedures include equipment cleaning, water level and total well depth measurements, and well purging and sampling.

Equipment Cleaning

Before the sampling event was started, equipment that was used to sample groundwater was disassembled and cleaned with detergent water and then rinsed with deionized water. During field sampling, equipment surfaces that were placed in the well or came into contact with groundwater during field sampling were steam cleaned with deionized water before the next well was purged or sampled.

Water Level, Floating Hydrocarbon, and Total Well Depth Measurements

Before purging and sampling occurred, the depth to water, floating hydrocarbon thickness, and total well depth were measured using an oil/water interface measuring system. The oil/water interface measuring system consists of a probe that emits a continuous audible tone when immersed in a nonconductive fluid, such as oil or gasoline, and an intermittent tone when immersed in a conductive fluid, such as water. The floating hydrocarbon thickness and water level were measured by lowering the probe into the well. Liquid levels were recorded relative to the tone emitted at the groundwater surface. The sonic probe was decontaminated by being rinsed with deionized water or steam cleaned after each use. A bottom-filling, clear Teflon bailer was used to verify floating hydrocarbon thickness measurements of less than 0.02 foot. Alternatively, an electric sounder and a bottom-filling Teflon bailer may have been used to record floating hydrocarbon thickness and depth to water.

The electric sounder is a transistorized instrument that uses a reel-mounted, two-conductor, coaxial cable that connects the control panel to the sensor. Cable markings are stamped at 1-foot intervals. The water level was measured by lowering the sensor into the monitoring well. A low-current circuit was completed when the sensor contacted the water, which served as an electrolyte. The current was amplified and fed into an indicator light and audible buzzer, signaling when water had been contacted. A sensitivity control compensated for highly saline or conductive water. The electric sounder was decontaminated by being rinsed with deionized water after each use. The bailer was lowered to a point just below the liquid level, retrieved, and observed for floating hydrocarbon.

Liquid measurements were recorded to the nearest 0.01 foot on the depth to water/floating product survey form. The groundwater elevation at each monitoring well was calculated by subtracting the measured depth to water from the surveyed elevation of the top of the well casing. (Every attempt was made to measure depth to water for all wells on the same day.) Total well depth was then measured by lowering the sensor to the bottom of the well. Total well depth, used to calculate purge volumes and to determine whether the well screen was partially obstructed by silt, was recorded to the nearest 0.1 foot on the depth to water/floating product survey form.

Well Purging

If the depth to groundwater was above the top of screens of the monitoring wells, then the wells were purged. Before sampling occurred, a polyvinyl chloride (PVC) bailer, centrifugal pump, low-flow submersible pump, or Teflon bailer was used to purge standing water in the casing and gravel pack from the monitoring well. Monitoring wells were purged according to the protocol presented in Figure A-1. In most monitoring wells, the amount of water purged before sampling was greater than or equal to three casing volumes. Some monitoring wells were expected to be evacuated to dryness after removing fewer than three casing volumes. These low-yield monitoring wells were allowed to recharge for up to 24 hours. Samples were obtained as soon as the monitoring wells recharged to a level sufficient for sample collection. If insufficient water recharged after 24 hours, the monitoring well was recorded as dry for the sampling event.

Groundwater purged from the monitoring wells was transported in a 500-gallon water trailer, 55-gallon drum, or a 325-gallon truck-mounted tank to EMCON's San Jose or Sacramento office location for temporary storage. EMCON arranged for transport and disposal of the purged groundwater through Integrated Waste Stream Management, Inc.

Field measurements of pH, specific conductance, and temperature were recorded in a waterproof field logbook. Figure A-2 shows an example of the water sample field data sheet on which field data are recorded. Field data sheets were reviewed for completeness by the sampling coordinator after the sampling event was completed.

The pH, specific conductance, and temperature meter were calibrated each day before field activities were begun. The calibration was checked once each day to verify meter performance. Field meter calibrations were recorded on the water sample field data sheet.

Well Sampling

A Teflon bailer was the only equipment acceptable for well sampling. When samples for volatile organic analysis were being collected, the flow of groundwater from the bailer was regulated to minimize turbulence and aeration. Glass bottles of at least 40-milliliters volume and fitted with Teflon-lined septa were used in sampling for volatile organics. These bottles were filled completely to prevent air from remaining in the bottle. A positive meniscus formed when the bottle was completely full. A convex Teflon septum was placed over the positive meniscus to eliminate air. After the bottle was capped, it was inverted and tapped to verify that it contained no air bubbles. The sample containers for other parameters were filled, filtered as required, and capped.

When required, dissolved concentrations of metals were determined using appropriate field filtration techniques. The sample was filtered by emptying the contents of the Teflon bailer into a pressure transfer vessel. A disposable 0.45-micron acrylic copolymer filter was threaded onto the transfer vessel at the discharge point, and the vessel was sealed. Pressure was applied to the vessel with a hand pump and the filtrate directed into the appropriate containers. Each filter was used once and discarded.

Sample Preservation and Handling

The following section specifies sample containers, preservation methods, and sample handling procedures.

Sample Containers and Preservation

Sample containers vary with each type of analytical parameter. Container types and materials were selected to be nonreactive with the particular analytical parameter tested.

Sample Handling

Sample containers were labeled immediately prior to sample collection. Samples were kept cool with cold packs until received by the laboratory. At the time of sampling, each sample was logged on an ARCO chain-of-custody record that accompanied the sample to the laboratory.

Samples that required overnight storage prior to shipping to the laboratory were kept cool (4° C) in a refrigerator. The refrigerator was kept in a warehouse, which was locked when not occupied by an EMCON employee. A sample/refrigerator log was kept to record the date and time that samples were placed into and removed from the refrigerator.

Samples were transferred from EMCON to an ARCO-approved laboratory by courier or taken directly to the laboratory by the environmental sampler. Sample shipments from EMCON to laboratories performing the selected analyses routinely occurred within 24 hours of sample collection.

Sample Documentation

The following procedures were used during sampling and analysis to provide chain-of-custody control during sample handling from collection through storage. Sample documentation included the use of the following:

- Water sample field data sheets to document sampling activities in the field
- Labels to identify individual samples
- Chain-of-custody record sheets for documenting possession and transfer of samples
- Laboratory analysis request sheets for documenting analyses to be performed

Field Logbook

In the field, the sampler recorded the following information on the water sample field data sheet (see Figure A-2) for each sample collected:

- Project number
- · Client's name
- Location
- · Name of sampler
- · Date and time
- · Well accessibility and integrity
- Pertinent well data (e.g., casing diameter, depth to water, well depth)

- Calculated and actual purge volumes
- · Purging equipment used
- Sampling equipment used
- Appearance of each sample (e.g., color, turbidity, sediment)
- Results of field analyses (temperature, pH, specific conductance)
- General comments

The water sample field data sheet was signed by the sampler and reviewed by the sampling coordinator.

Labels

Sample labels contained the following information:

- Project number
- Sample number (i.e., well designation)
- Sample depth

- Sampler's initials
- Date and time of collection
- Type of preservation used (if any)

Sampling and Analysis Chain-of-Custody Record


The ARCO chain-of-custody record initiated at the time of sampling contained, at a minimum, the sample designation (including the depth at which the sample was collected), sample type, analytical request, date of sampling, and the name of the sampler. The record sheet was signed, timed, and dated by the sampler when transferring the samples. The number of custodians in the chain of possession was minimized. A copy of the ARCO chain-of-custody record was returned to EMCON with the analytical results.

Groundwater Sampling and Analysis Request Form

A groundwater sampling and analysis request form (see Figure A-3) was used to communicate to the environmental sampler the requirements of the monitoring event. At a minimum, the groundwater sampling and analysis request form included the following information:

- · Date scheduled
- Site-specific instructions
- Specific analytical parameters

- Well number
- Well specifications (expected total depth, depth of water, and product thickness)

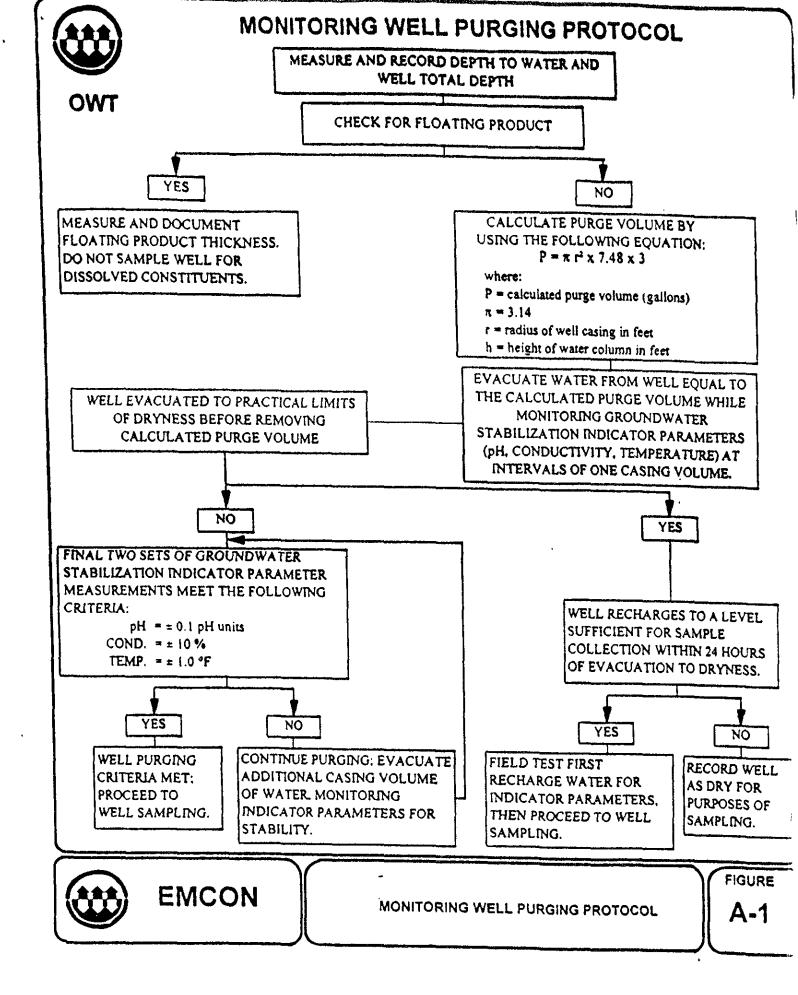

	PROJECT NO :_			SAMPLE ID :	•	
				CLIENT NAME:		فيجهف النباب والنبو والمثم
TWC	SAMPLED BY :			LOCATION:		
YPE: Gr	oundwater			eachate		
ASING DIA	METER (Inches):	3_				
ASING ELE	VATION (feeVMSL)	:	vo	LUME IN CASING	(gal.) :	
DEF	TH OF WELL (feet)		CAL	CULATED PURGE	(gal.) :	
DEPT	H OF WATER (feet)	:	ACT	UAL PURGE VOL	(gal.) :	
DA	TE PURGED :			END PURGE :		
DAT	TE SAMPLED :	7, 7	SA	MPLING TIME :		
TIME	VOLUME	рН	E.C.	TEMPERATURE	TURBIDITY	TIME
(2400 HR)	(gal.)	(units)		(°F)		(2400 HR)
					- 110 - 111 - 110	
		•				
						
						·

OTHER:			ODOR:_		(COBALT 0-100)	(ACT LA 200)
FIELD QC	SAMPLES COLLEC	TED AT THIS W	ELL (i.e. FB-1. XI	DUP-1):		(N10 0-200)
			(·····
	PURGING EQUIPME	<u>:N1</u>		SAMPLIN	G EQUIPMENT	
	ladder Pump		-		mpBaile	r (Teflon)
	trifugal Pump	Bailer (PVC)	•	Bomb Sample		r (Stainless Steel)
Sub	mensible Pump	Bailer (Stainles	s Steel)	Dipper		versible Pump
184		Dedicated	•	Well Wizard		
	· · · · · · · · · · · · · · · · · · ·			Other:		
Other:					LOCI	〈 :
Other:	GRITY:					
Other:	GRITY:					
Other:					ter Serial No.:	



WATER SAMPLE FIELD DATA SHEET

FIGURE

A-2



EMCON - SACRAMENTO GROUNDWATER SAMPLING AND ANALYSIS REQUEST FORM

PROJECT NAME:

SCHEDU	LED DATE :	
--------	------------	--

PECIAL INSTI	RUCTIONS / C	ONSIDERAT	IONS:		Project Authorization: EMCON Project No.: OWT Project No.: Task Code: Originals To:	
CHECK BOX Well Number or Source	X TO AUTHOR Casing Diameter (inches)	IZE DATA EN Casing Length (feet)	Depth to Water (feet)	Site Contact:	Name YSES REQUESTED	Phone #
Laboratory and	Lab QC Istructi	ons:				



EMCON

SAMPLING AND ANALYSIS REQUEST FORM

FIGURE

A-3

APPENDIX B

CERTIFIED ANALYTICAL REPORTS, AND CHAIN OF CUSTODY DOCUMENTATION



May 28, 1998

Service Request No.: <u>\$9801204</u>

Glen Vanderveen
PINNACLE
144 A Mayhew Wy.
Walnut Creek, CA 94596

RE: 20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Dear Mr. Vanderveen:

The following pages contain analytical results for sample(s) received by the laboratory on May 13, 1998. Results of sample analyses are followed by Appendix A which contains sample custody documentation and quality assurance deliverables requested for this project. The work requested has been assigned the Service Request No. listed above. To help expedite our service, please refer to this number when contacting the laboratory.

Analytical results were produced by procedures consistent with Columbia Analytical Services' (CAS) Quality Assurance Manual (with any deviations noted). Signature of this CAS Analytical Report below confirms that pages 2 through 11, following, have been thoroughly reviewed and approved for release in accord with CAS Standard Operating Procedure ADM-DatRev3.

Bernadeth I. Cox for Curtina V Raylung for

Please feel welcome to contact me should you have questions or further needs.

Sincerely,

Steven L. Green

Project Chemist

Greg Anderson

Regional QA Coordinator

Acronyms

A2LA American Association for Laboratory Accreditation

ASTM American Society for Testing and Materials

BOD Biochemical Oxygen Demand

BTEX Benzene, Toluene, Ethylbenzene, Xylenes

CAM California Assessment Metals
CARB California Air Resources Board

CAS Number Chemical Abstract Service registry Number

CFC Chlorofluorocarbon
CFU Colony-Forming Unit
COD Chemical Oxygen Demand

DEC Department of Environmental Conservation
DEQ Department of Environmental Quality
DHS Department of Health Services
DLCS Duplicate Laboratory Control Sample

DMS Duplicate Matrix Spike
DOE Department of Ecology
DOH Department of Health

EPA U. S. Environmental Protection Agency

ELAP Environmental Laboratory Accreditation Program

GC Gas Chromatography

GC/MS Gas Chromatography/Mass Spectrometry

IC Ion Chromatography

ICB Initial Calibration Blank sample

ICP Inductively Coupled Plasma atomic emission spectrometry

ICV Initial Calibration Verification sample

J Estimated concentration. The value is less than the MRL, but greater than or equal to

the MDL. If the value is equal to the MRL, the result is actually <MRL before rounding.

LUFT Leaking Underground Fuel Tank

M Modified

MBAS Methylene Blue Active Substances

MCL Maximum Contaminant Level. The highest permissible concentration of a

substance allowed in drinking water as established by the U. S. EPA.

MDL Method Detection Limit
MPN Most Probable Number
MRL Method Reporting Limit

MS Matrix Spike

MTBE Methyl tert-Butyl Ether

NA Not Applicable
NAN Not Analyzed
NC Not Calculated

NCASI National Council of the paper industry for Air and Stream Improvement
ND Not Detected at or above the method reporting/detection limit (MRL/MDL)

NIOSH National Institute for Occupational Safety and Health

NTU Nephelometric Turbidity Units

ppb Parts Per Billion ppm Parts Per Million

PQL Practical Quantitation Limit
QA/QC Quality Assurance/Quality Control

RCRA Resource Conservation and Recovery Act

RPD Relative Percent Difference SIM Selected Ion Monitoring

SM Standard Methods for the Examination of Water and Wastewater, 18th Ed., 1992

STLC Solubility Threshold Limit Concentration

SW Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, SW-846,

3rd Ed., 1986 and as amended by Updates I, II, IIA, and IIB.

TCLP Toxicity Characteristic Leaching Procedure

TDS Total Dissolved Solids

TPH Total Petroleum Hydrocarbons

tr Trace level. The concentration of an analyte that is less than the PQL but greater than or equal

to the MDL. If the value is equal to the PQL, the result is actually <PQL before rounding.

TRPH Total Recoverable Petroleum Hydrocarbons

T88 Total Suspended Solids

TTLC Total Threshold Limit Concentration

VOA Volatile Organic Analyte(s) ACRONLST.DOC 7/14/95

Analytical Report

Client:

ARCO Products Company

Project:

20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Sample Matrix:

Water

Service Request: S9801204 Date Collected: 5/11/98

Date Received: 5/13/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

A-1(10')

S9801204-001

Units: ug/L (ppb) Basis: NA

Lab Code:

Test Notes:

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	5/15/98	280	
Benzene	EPA 5030	8020	0.5	1	NA	5/15/98	26	
Toluene	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	5/15/98	0.8	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	5/15/98	2.3	
Mothyi tert -Butyl Ether	EPA 5030	8020	3	1	NA	5/15/98	6	

1S22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Sample Matrix: Water

Service Request: \$9801204 Date Collected: 5/11/98 Date Received: 5/13/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

AR-2(11')

Lab Code:

S9801204-002

Test Notes:

Units: ug/L (ppb)
Basis: NA

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	5/15/98	ND	
Benzene	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Methyl tert - Butyl Ether	EPA 5030	8020	3	I	NA	5/15/98	ND	

1S22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Sample Matrix:

Water

Service Request: S9801204

Date Collected: 5/11/98

Date Received: 5/13/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

AR-1(11')

Units: ug/L (ppb)
Basis: NA

Lab Code:

S9801204-003

Test Notes:

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	5/16/98	ND	
Benzene	EPA 5030	8020	0.5	1	NA	5/16/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	5/16/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	5/16/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	5/16/98	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	3	1	NA	5/16/98	4	

1522/020597p

Analytical Report

Client: ARCO Products Company

Project: 20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Sample Matrix: Water

Service Request: S9801204
Date Collected: 5/11/98
Date Received: 5/13/98

BTEX, MTBE and TPH as Gasoline

Sample Name:

A-6(10') \$9801204-004 Units: ug/L (ppb)
Basis: NA

Lab Code: Test Notes:

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	5/16/98	140	
Benzene	EPA 5030	8020	0.5	1	NA	5/16/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	5/16/98	0.7	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	5/16/98	0.6	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	5/16/98	ND	
Methyl tert-Butyl Ether	EPA 5030	8020	3	1	NA	5/16/98	6	

1S22/020597p

Analytical Report

Client:

ARCO Products Company

Project:

20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Sample Matrix:

Water

Service Request: S9801204

Date Collected: NA
Date Received: NA

BTEX, MTBE and TPH as Gasoline

Sample Name:

Method Blank

Units: ug/L (ppb)
Basis: NA

Lab Code:

de: \$980515-WB1

Test Notes:

Analyte	Prep Method	Analysis Method	MRL	Dilution Factor	Date Extracted	Date Analyzed	Result	Result Notes
TPH as Gasoline	EPA 5030	CA/LUFT	50	1	NA	5/15/98	ND	
Benzene	EPA 5030	8020	0.5	i	NA	5/15/98	ND	
Toluene	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Ethylbenzene	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Xylenes, Total	EPA 5030	8020	0.5	1	NA	5/15/98	ND	
Methyl tert -Butyl Ether	EPA 5030	8020	3	1	NA	5/15/98	ND	

LS22/020597p

APPENDIX A

QA/QC Report

ARCO Products Company Client:

Service Request: S9801204

Project:

20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Date Collected: NA Date Received: NA

Sample Matrix:

Water

Date Extracted: NA

Date Analyzed: NA

Surrogate Recovery Summary BTEX, MTBE and TPH as Gasoline

Prep Method:

EPA 5030

Units: PERCENT

Analysis Method: 8020

CA/LUFT

Basis: NA

		Test	Percent	Recovery
Sample Name	Lab Code	Notes	4-Bromofluorobenzene	a,a,a-Trifluorotoluene
A-1(10')	S9801204-001		98	94
AR-2(11')	S9801204-002		103	89
AR-1(11')	S9801204-003		107	87
A-6(10')	S9801204-004		104	94
BATCH QC	S9801131-002MS		109	94
BATCH QC	S9801131-002DMS		108	93
Method Blank	S980515-WB1		102	92

CAS Acceptance Limits:

69-116

69-116

QA/QC Report

Client: ARCO Products Company

Project: 20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Sample Matrix: Water

Service Request: S9801204

Date Collected: NA

Date Received: NA

Date Extracted: NA
Date Analyzed: 5/15/98

Matrix Spike/Duplicate Matrix Spike Summary

BTE

Sample Name:

BATCH QC

Units: ug/L (ppb)

Lab Code:

S9801131-002MS,

S9801131-002DMS

Basis: NA

Test Notes:

Percent Recovery

	Prep	Analysis		Spik	e Level	Sample	Spike	Result			CAS Acceptance	Relative Percent
Analyte	Method	Method	MRL	MS	DMS	Result	MS	DMS	MS	DMS	Limits	Difference
Benzene	EPA 5030	8020	0.5	25	25	ND	27	28	108	112	75-135	4
Toluene	EPA 5030	8020	0.5	25	25	ND	27	28	108	112	73-136	4
Ethylbenzene	EPA 5030	8020	0.5	25	25	ND	28	29	112	116	69-142	4

QA/QC Report

Client: Project: **ARCO Products Company**

20805-129.004/TO#22312.00/RAT8/2169 OAKLAND

Service Request: \$9801204

Date Analyzed: 5/15/98

Initial Calibration Verification (ICV) Summary BTEX, MTBE and TPH as Gasoline

Sample Name:

ICV

Units: ug/L (ppb)

Lab Code:

ICV1

Basis: NA

Test Notes:

ICV Source:					CAS		
					Percent Recovery		
	Prep	Analysis	True		Acceptance	Percent	Result
Analyte	Method	Method	Value	Result	Limits	Recovery	Notes
TPH as Gasoline	EPA 5030	CA/LUFT	250	260	90-110	104	
Benzene	EPA 5030	8020	25	27	85-115	108	
Toluene	EPA 5030	8020	25	26	85-115	104	
Ethylbenzene	EPA 5030	8020	25	26	85-115	104	
Xylenes, Total	EPA 5030	8020	75	85	85-115	113	
Methyl tert -Butyl Ether	EPA 5030	8020	25	22	85-115	88	

ICV/032196

PC. TPH. F **ARCO Products Company** Chain of Custody Task Order No. 22 312 .00 Division of Atlantic/Richfield Company <u>Glen Vanderveen</u> 08)453-7300 (Consultant) (408) 437-95 Laboratory Name City (Facility) Oakland Project manager ARCO Facility no. (Consultant) ARCO engineer Telephone no. (ARCO) Telephone no. Address Consultant name (Consultant) TCLP Sem Metals/D VOA/D VOA/D CAM Metals EPA 6010/7000 TTLC/D STLC/D Method of shipment Sampler will aeliver Matrix Preservation Oil and Grease 413.1 © 413.2 © TPH EPA 418.1/SM 503E TPH Modified 8015 Gas □ Diesel □ Container no. Lead OrgOHSCI Lead EPA 74207 EPA 601/8010 EPA 624/8240 EPA 625/8270 Sampling time Soil Water Other ice Acid Special Detection 5/11/98 Limit/reporting 1150 Lowest 1115 Possible 1124 Special QA/QC 1138 2-1,110 As Normal takan Samoles Remarks RAT8 2-40m1 HCC UOAS Lab Number 59801204 Turnaround Time: **Priority Rush** 1 Business Day 2 Business Days Expedited Temperature received: Condition of sample: 5 Business Days Relinguished by sampler
Relinguished by 5/13/98 K Standard Received by 10 Business Days Date Received by laboratory Date Relinguished by Time

Distribution: White Copy - Laboratory: Canary Copy - ARCO Environmental Engineering: Pink Copy - Consultant

111/11

APPENDIX C FIELD DATA SHEETS

EMCON - Groundwater Sampling and Analysis Request Form

PROJECT NAME: ARCO STATION 2169

DATE REQUESTED: 11-May-98

889 West Grand Avenue, Oakland

Sampling Project #: 21775-235.003
Reporting Project #: 20805-129.004

Groundwater Monitoring Instructions

Treatment System Instructions

Project Manager: Glen Vanderveen

Quarterly Monitoring- 2nd Month Of The Quarter

Bring a trailer for purge water transport. Perform a water level survey prior to sampling. The survey points are the tops of the well casings. Purge three (3) casing volumes. Please use the Reporting Project Number (#20805-129.004) on the chain-of-custody form, sample containers, and analytical results. Sample ID's on the chain-of-custody and the sample containers must include the depth at which the sample was collected.[i.e. MW-1(30)]

Treatment system must be off for one week prior to sampling.
Sample wells as normal. SVE system may be running, but sparge system will be turned off.

Lisle Rath Pager # (408) 798-2928

Site Contact: ? Site Phone: ? Well Locks: ?

Well ID	Casing	Casing	Top Of	
or Source	Diameter	Length	Screen	Analyses Requested
	(inches)	(feet)	(feet)	1
A-4	3.0	28.4	8.0	
A-3	3.0	30.1	9.0	
AR-2	4.0	29.3	8.5	
AR-1	6.0	28.0	8.5	Depth to Water
A-2	3.0	26.2	10.0	Total Depth
A-5	2.0	30.0	5.0	Well Integrity
ADR-2	4.0	26.3	5.0	
ADR-1	4.0	21.9	5.0	
A-6	2.0	28.5	5.0	
A-1	3.0	24.5	9.0	
Above well	s in indicate	ed order		
AR-2				Add:
G.AR-1				Dissolved Oxygen TPHG
IWA-5		(See Above)		BTEX MTBE by EPA 8020a
Cr, A-6				(Fill 2- 40ml HCL VOAs)
ઉ _પ A-1				
Above well	s in indicate	ed order		

Laboratory Instruction IP = Intermitent Product

Provide lowest detection limits possible.

Please use the EMCON Reporting Project Number (#2805-129.004) on the CARs.

ND = None Detected

FIELD REPORT DEPTH TO WATER/FLOATING PRODUCT SURVEY

PROJECT #: 21775-235.003 STATION ADDRESS: 899 West Grand Avenue, Oakland DATE: 5/11/98

ARCO STATION # : 2169 FIELD TECHNICIAN : Manuel Gallegos/ Chris Chaco DAY : Monday

ŀ							_					
		Well	Туре	Well		Туре	FIRST	SECOND	DEPTH TO	FLOATING	WELL	
DTW	WELL	Box	Of Well	Lıd	Lock	Of Well	DEPTH TO	DEPTH TO	FLOATING	PRODUCT	TOTAL	
Order	ID	Seal	Lid	Secure	Number	Сар	WATER	WATER	PRODUCT	THICKNESS	DEPTH	COMMENTS
							(feet)	(feet)	(feet)	(feet)	(feet)	
1	A-4	5	VAULT	OK	NONE	TEC	10.33	10.33	412	LIR	24.7	
2	A-3	OK	VAULT	OK	NONE	TEC	11.19	11.19	KID	1/2	28.3	water in box
3	AR-2	Ola	VAULT	OK	NONE	TEC	10.97	10.97	ALL	12	28,5	
4	'AR-1	0(<	VAULT	OK	NONE	TEC	10.53	10,93	VIN	xIR	27.5	water in Dux
5	A-2	015	VAULT	OK	NONE	TEC	10.45	10.45	MR	1-12	24.5	water in Dox
6/	A-5	1014	G-5	OIC	ARCO	LWC	IW	1~	エー	Iw	IL	Sock stuck in well
7'	ADR-2	OK	VAULT		NONE	TEC	10.47	10.47	KIN	LIR	26.>	
8 1	ADR-1	OK	VAULT	OLC	NONE	TEC	FL	エル	ILU	Iw_	ILL	Bolt Stuck in Box
9 /	A-6	OIC	G-5	٥١٥	ARCO	LWC	9,24	9.24	YIV.	NR	27.0	
10/			VAULT	01	NONE	TEC	9.87	9.87	rin	LIR	23.7	water in Box
											•	
					-							
							<u> </u>					
				L	<u> </u>	L	L				<u> </u>	

SURVEY POINTS ARE TOP OF WELL CASINGS

WATER SAMPLE FIELD DATA SHEET PROJECT NO 21775-235-003 CLIENT NAME ARCOLL 2169 PURGED BY M. Bailesos SAMPLED BY LOCATION OAKLAND, CA. TYPE Groundwater Surface Water Leachate Other CASING DIAMETER (inches) 2 3 4 45 6 Other CASING ELEVATION (feeVMSL) CALCULATED PURGE (gal) DEPTH OF WELL (feet) ACTUAL PURGE VOL (gal) __ DEPTH OF WATER (feet) END PURGE DATE PURGED 5-11-98 DATE SAMPLED DATE SAMPLED TURBIDITY TEMPERATURE COLOR E.C VOLUME TIME (visual) (visual) (µmhos/cm@25°c) (*F) (gal) (units) (2400 HR) 805 653 (len cha-GRAB 6, 89 OTHER: DO= 12 ODOR Strong (NTU 0-200) (COBALT 0-100) MR FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1). SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Dipper Bailer (Stainless Steel) Submersible Pump Dedicated Well Wizard™ Dedicated Well Wizard™ Other. LOCK ARW-Key WELL INTEGRITY. REMARKS all Samples taken Meter Serial No pH. E.C., Temp. Meter Calibration Date 5/11/58 E C 1000 / pH 7 / pH 10 uptil REVIEWED BY MA PAGE 1 OF 5 Temperature *F SIGNATURE Mand

Rev 1/97

WATER SAMPLE FIELD DATA SHEET SAMPLE ID A-5 PROJECT NO 2/775-235-003 PURGED BY M. Gallegos CLIENT NAME ARCU # 2/69 LOCATION DAKLDAID CA :: SAMPLED BY Leachate ____ TYPE Groundwater 🔬 Surface Water ____ 4 ____ 4 5 ___ 6 ___ Other ____ CASING DIAMETER (inches) 2 _____ 3 ____ VOLUME IN CASING (gal.) CASING ELEVATION (feet/MSL) CALCULATED PURGE (gal) DEPTH OF WELL (feet) ACTUAL PURGE VOL (gal) DEPTH OF WATER (feet) END PURGE DATE PURGED SAMPLING TIME DATE SAMPLED TURBIDITY E C TEMPERATURE COLOR VOLUME Ηq TIME (visual) (μmhos/cm@25°c) (°F) (visual) (units) Socie Stuck in weil (gal) (2400 HR) fa kum Samples OTHER: Klim ODOR _____ (NTU 0-200) (COBALT 0-100) FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1): /215 SAMPLING EQUIPMENT PURGING EQUIPMENT Bailer (Teflon) 2" Bladder Pump Bailer (Tefion) Bailer (Stainless Steel) _2" Bladder Pump Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Dipper Bailer (Stainless Steel) Submersible Pump Dedicated Well Wizard™ Dedicated Well Wizard™ Other WELL INTEGRITY D- Sock Stuck In will. LOCK REMARKS: Meter Senal No pH. E.C., Temp. Meter Calibration:Date 5/// pH 10 / pH 4 / EC 1000 / SIGNATURE REVIEWED BY APPAGE Z OF 5 Temperature *F

WATER SAMPLE FIELD DATA SHEET Rev 1/9" PROJECT NO 21775-235-003 SAMPLE ID A-6 (10') PURGED BY M. Baslesos (. Chaco CLIENT NAME ARCOTT 2169 SAMPLED BY LOCATION OAKLAND, CA. LOCATION OAKLAND, CA .: TYPE Groundwater Y Surface Water Leachate Other CASING DIAMETER (inches) 2 3 4 4.5 6 Other VOLUME IN CASING (gal.) CASING ELEVATION (feet/MSL) CALCULATED PURGE (gal.) DEPTH OF WELL (feet) 27.0 ACTUAL PURGE VOL (gal) DEPTH OF WATER (feet) END PURGE DATE PURGED 5- 11- 98 SAMPLING TIME DATE SAMPLED TURBIDITY COLOR E.C TEMPERATURE VOLUME TIME (visual) (visual) (*F) (µmhos/cm@25°c) (units) (2400 HR) (gall) 1128 6512 Cha-6.74 GRAR ODOR Strong MR (COBALT 0-100) FIELD QC SAMPLES COLLECTED AT THIS WELL (1.e. FB-1, XDUP-1) MR SAMPLING EQUIPMENT RURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Oipper Baiter (Stainless Steel) Submersible Pump Well Wizard™ Dedicated Dedicated Well Wizard™ WELL INTEGRITY ____ O K LOCK ARW-Key REMARKS: all samples taken Meter Serial No 87m pH. E.C., Temp. Meter Calibration Date 5/11/28 Time E.C. 1000 / pH.7 / pH.10

SIGNATURE 11 Malls REVIEWED BY MA PAGE 3 OF 5

Temperature *F

WATER SAMPLE FIELD DATA SHEET Rev 1/9" SAMPLE ID AR - 1 (11') PROJECT NO 21775-235-003 PURGED BY M. Bailesos CLIENT NAME ARCOTT 2/69 SAMPLED BY LOCATION ORKLAND, CA.: LOCATION OAKLAND, CA .: TYPE Groundwater Surface Water Leachate Other CASING DIAMETER (inches) 2 3 4 45 6 Other CASING ELEVATION (feeVMSL) DEPTH OF WELL (feet) 27.5 CALCULATED PURGE (gal) ACTUAL PURGE VOL (gal) DEPTH OF WATER (feet) 0, 63 END PURGE SAMPLING TIME 1/24 DATE SAMPLED pH E.C TEMPERATURE COLOR TURBIDITY VOLUME TIME (visual) (visual) (µmhos/cm@25°c) (°F) 66.1 (gal) (units) (2400 HR) PAB 7.04 535 660 Char MR_ OTHER DO=1-2 ODOR none (NTU 0-200) (COBALT 0-100) MR FIELD QC SAMPLES COLLECTED AT THIS WELL (18 FB-1, XDUP-1) SAMPLING EQUIPMENT **PURGING EQUIPMENT** 2" Bladder Pump ______ Bailer (Teflon) Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Bailer (PVC) Centrifugal Pump Submersible Pump Dipper Bailer (Stainless Steel) Submersible Pump Well Wizard™ Dedicated Dedisated Well Wizard™ WELL INTEGRITY. OLC LOCK ARW-ICEX REMARKS: all Samples taken Time _____ Meter Serial No ____ pH. E.C., Temp. Meter Calibration Date 5/11/58

SIGNATURE MINISTER REVIEWED BY MA PAGE 4 OF 5

E C 1000_ _

Temperature *F

WATER SAMPLE FIELD DATA SHEET Rev 1/97 SAMPLE ID AR-2(11') PROJECT NO 21775-235-003 CLIENT NAME ARCOLL 2169 PURGED BY M. Bastesos SAMPLED BY LOCATION OAKLAND, CA. TYPE Groundwater X Surface Water Leachate Other CASING DIAMETER (inches) 2 3 4 4 5 6 Other VOLUME IN CASING (gal.) KIK CASING ELEVATION (feet/MSL) DEPTH OF WELL (feet) 28.5 CALCULATED PURGE (gal) DEPTH OF WELL (feet) ACTUAL PURGE VOL (gal) END PURGE DATE PURGED ______ 5- //- 98 SAMPLING TIME ///5 DATE SAMPLED TURBIDITY TEMPERATURE COLOR E.C VOLUME pΗ TIME (visual) (visual) (µmhos/cm@25°c) (°F) (2400 HR) (gall) (units) 1007 65,3 (has 5,49 MR odor moderat. OTHER: DO= 1 (NTU 0-200) (COBALT 0-100) MR FIELD QC SAMPLES COLLECTED AT THIS WELL (i.e. FB-1, XDUP-1). SAMPLING EQUIPMENT PURGING EQUIPMENT 2" Bladder Pump X Bailer (Teflon) Bailer (Teflon) 2" Bladder Pump Bailer (Stainless Steel) Bomb Sampler Batter (PVC) Centrifugal Pump Submersible Pump Dipper Bailer (Stainless Steel) Submersible Pump Dedicated Well Wizard™ Dedicated Well Wizard™ Other LOCK ARW-Key WELL INTEGRITY OK REMARKS all samples taken pH. E.C., Temp Meter Calibration Date 5/11/58 Time 11:10 Meter Senal No 8718 EC 1000 1040 1000 pH7 725700 pH 10 997 1/000 pH 4 354 1 1165

SIGNATURE Mand 1 white REVIEWED BY MA PAGE 5 OF 5

ARCO) Pr Divisio	odu n of Atk	Cts (Com chfield C	pany	y	· · · · ·		Task Order I	Vo.	23	12	Ô	0	•		,	,						of Custody
ARCO Fa			69				Kland	A		P200	ect me	inage it).	6	le	nl	/ai	101	<u>er</u>	ve	en 108)				Laboratory Massage
ARÇO en	gineer	Pal		CDD		ું ે,લેં	i Tele	phone no. (CO)		38	office of	no.	408)4	53-7	730.	Fax (Con	no. Isultan	06	1CE)	43	7:0	7526	Contract Names
Consultan	t name	EN	1001	V	1 2 m				dress onsultant)										:30				· .	
		ē.		Matrix	,^,`	Pres	ervation		100			(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	O. E.				 	- VOV	4 60 (0/7000	HSC] 74207421C]				Method of shipment Somplete
Sample I.D.	Lab no.	Container no	Soil	Water	Other	lce	Acid	Sampling date	Samping lime	BIEX BEEX & S	BTEXTPH (A)	TPH Hodified 8015 Cas () Dissal ()	Gland Grosse	TPH	EPA 601/8010	EPA 62478240	EPA 625/8270	TCLP Semi Metals D VOACI VOACI	CAN Metats EP. TRICCI STRC	Lead Org/DHSCI Lead EPA 7420/7421CI		-		WITE OCINET Special Detection
4-1(10')		2		×	1,19	×	HCL	5/1.48	1150		Z			ار الم				2 /38 4 / 8					4,40	Limit/reportings
AR X III		Z		×	3 50	<u>ک</u> ر ا	HCL		1115		×			· **				Ş	*				¥;.	LOUGHT Possibe
AR-KUI'		7		叉		×	HCL	3	1124		×	建学				*,	<u>5</u>)		. N . N		·	= ,		
46(10)		7		×		×	HCL	1/	1138		×	i ren ji	198		`		,		,					Special QA/QIC
A-5(-		2		×		×	HCL				Š	100	10	. 5	an	PA	J	19	ke	n				Ass
								,				. ولاية . الكار		,										Normas
					4.65	` .		,	3				观	V 3				· /**	18.				- +	Remarks
```				14.5		- 1 ×			4 / 11/2				3.5	<b>\$</b>		·	`,		Ge S					RATES 2-40m1 HQ UOAs
,							54 5 1) 200								;			2 v 7.				*		
	<u> </u>		1		**************************************		, 11.12.	<u> </u>	, i					预.	<u> </u>				~ (i -52 (c)				3 35 	2-40me still
		ž.		,	(12) A		, 55 - 500 s		3.5	1						<u>.</u>							14375	<i>1995</i>
, mg 2,452	ر. آخرک		,	. 4										\$ P	2,30	1.50	2.2	- #10 141 141				ж		4.0
	- 743	والمن الخ	F 184											120		-1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1					***	، ۲۲ ر ده		Lab Nuncas sur
3		1. V							, , , , , , ,						"į	<b>1980</b>			\$1.7°			**		
			78.5			3.75										10 mg	18 M			Ž		- P. 247.	402	Turneround lines is:
- 2			. YÇ						5											1	36	1		Priority Puers
1987	, ``}	ć .   -	4												Ça:					3				
	1.3	* *	reflection for												<b> </b>		1.5	3						Rush 2 Bushess Dept
Condition	of sam	ple:		ige						Ten	oretu	9 160	ived;				7 Nu					(° ∓ 3°€.		Expedited and server
Relinguis	-7.	6			1		Date /	Jan J	/ Time	20.020	ived:							1	Alle Co		<del>,                                    </del>			5 Busine or Security
Relinguis	hed by	-/;	7.4	MAL.			Date	<u> </u>	Time	7.60						- (* .		1	e say			- , /	7.38 7.2.48	Standard 10 Breakers Company
Relinguis		-					Date						(BtOP/	50	era a di Silik		Date	as with a	Aller Care	Time				
	- 3	27				14.3	7000年	"苦巷"。	1. 198						` '		*		-	1				77, PT 301-201