

RECEIVED

By Alameda County Environmental Health at 4:15 pm, Nov 25, 2013

Mr. Lee Douglas
Douglas Parking Company
1721 Webster Street
Oakland, California 94612

Ms. Barbara Jakub
Alameda County Environmental Health
Department of Environmental Health
1131 Harbor Bay Parkway, 2nd Floor
Alameda, CA 94502-6577

Re: Douglas Parking Company


1721 Webster Street
Oakland, California
ACEH File No. 129

Dear Ms. Jakub:


I, Mr. Lee Douglas, have retained Pangea Environmental Services, Inc. (Pangea) as the environmental consultant for the project referenced above. Pangea is submitting the attached report on my behalf.

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached report are true and correct to the best of my knowledge.

Sincerely,

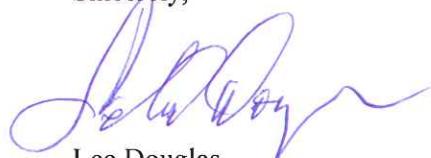

Lee Douglas



October 31, 2013

VIA ALAMEDA COUNTY FTP SITE

Ms. Barbara Jakub
Alameda County Environmental Health
1131 Harbor Bay Parkway, 2nd Floor
Alameda, California 94502

Re: **Groundwater Monitoring Report – Second Half 2013**
Douglas Parking Company
1721 Webster Street
Oakland, California
ACEH File No. 129

Dear Ms. Jakub:

On behalf of the Douglas Parking Company, Pangea Environmental Services, Inc. has prepared this *Groundwater Monitoring Report – Second Half 2013* for the above referenced site. The report describes groundwater monitoring and sampling, and other site activities.


If you have any questions, please call me at (510) 435-8664.

Sincerely,
Pangea Environmental Services, Inc.

Bob Clark-Riddell, P.E.
Principal Engineer

Attachment: *Groundwater Monitoring Report – Second Half 2013*

cc: Mr. Lee Douglas, Douglas Parking Company, 1721 Webster Street, Oakland, California 94612
SWRCB Geotracker Database (electronic copy)



GROUNDWATER MONITORING REPORT - SECOND HALF 2013

**Douglas Parking Company
1721 Webster Street
Oakland, California
File No. 4070**

October 31, 2013

Prepared for:


Mr. Lee Douglas
1721 Webster Street
Oakland, California 94612


Prepared by:

Pangea Environmental Services, Inc.
1710 Franklin Street, Suite 200
Oakland, California 94612

Written by:




Morgan Gillies
Project Manager


Bob Clark-Riddell, P.E.
Principal Engineer

PANGEA Environmental Services, Inc.

1710 Franklin Street, Suite 200, Oakland, CA 94612 Telephone 510.836.3700 Facsimile 510.836.3709 www.pangeaenv.com

Groundwater Monitoring Report – Second Half 2013
1721 Webster Street
Oakland, California
October 31, 2013

INTRODUCTION

On behalf of Douglas Parking Company, Pangea Environmental Services, Inc. (Pangea), performed groundwater monitoring and sampling during this half year at the subject site (Figure 1). Current groundwater analytical results and elevation data are shown on Figure 2. Current and historical groundwater data are summarized on Table 1. Site remediation data are summarized on Table 2.

SITE BACKGROUND

The site is currently being utilized as a parking garage, and is located between 17th and 19th Streets in downtown Oakland, California, approximately four miles east of San Francisco Bay and one quarter of a mile west of Lake Merritt (Figure 1). The site is relatively flat with an elevation of approximately 30 feet (ft) above mean sea level (msl).

Several former underground storage tank (UST) sites are located close to the site, including Prentiss Properties to the northeast at 1750 Webster Street, a former gas station to the east at 1700 Webster, and a former Chevron service station which is located approximately 400 feet to the southwest on the corner of 17th Street and Harrison Street.

On August 3 and 6, 1992, Parker Environmental Services removed one 1,000-gallon and two 500-gallon gasoline underground storage tanks (USTs) from the site. Up to 1,500 milligrams per kilogram (mg/kg) total petroleum hydrocarbons as gasoline (TPHg) and up to 12 mg/kg benzene were detected in the soil samples collected from the UST excavation.

Several investigations have been completed at the site. On July 8 and September 8, 1994, Gen Tech/Piers Environmental, Inc. (Gen Tech) of San Jose, California drilled six exploratory borings and installed three groundwater monitoring wells (MW-1 through MW-3). In February and May 1996, Cambria Environmental Technology (Cambria) of Emeryville, California advanced seven geoprobe soil borings and installed two groundwater monitoring wells (MW-4 and MW-5). On August 8, 2000, *Conduit Study and File Review Report* was submitted by Cambria Environmental Technology. The report provided significant information about offsite hydrocarbon impact and offsite sources, and concluded that there were no identified conduits for contaminant migration in groundwater. On June 27, 2003 Cambria installed two additional offsite monitoring wells (MW-6 and MW-7) to facilitate additional plume delineation.

Limited site remediation has been conducted at the site. In January 1998, Cambria installed ORC socks in well MW-2 to enhance the natural attenuation of dissolved-phase hydrocarbons. Dissolved oxygen (DO) concentrations temporarily increased in well MW-2 following the ORC sock installation. In February and March 1999, a total of 120 gallons of 7.5% hydrogen peroxide solution was added into monitoring wells

Groundwater Monitoring Report – Second Half 2013
1721 Webster Street
Oakland, California
October 31, 2013

MW-2 and MW-3 to oxidize hydrocarbons and also increase DO levels to enhance biodegradation of dissolved-phase hydrocarbons. The hydrogen peroxide *temporarily* increased groundwater DO levels, but hydrocarbon concentrations remained at elevated levels.

On March 4, 2003, Cambria installed a co-axial air sparging/soil vapor extraction well (SV-1/AS-1) and two angled air sparging wells (AS-2 and AS-3) to approximately 30 ft bgs (Figure 3). The wells were installed to facilitate feasibility testing and future site remediation. Site remediation via soil vapor extraction and air sparging began in October 2007. To improve system performance and further evaluate site conditions, Pangea submitted an *Investigation and Remediation Workplan* dated March 5, 2009, which proposed additional investigation, remediation system expansion, and evaluation of groundwater geochemistry.

On November 19, 2010, ACEH issued a letter requesting a cross section, additional information regarding a potential offsite source and a preferential pathway survey. In December 2010, Pangea informed the ACEH that significant information about the offsite hydrocarbon impact was presented in the August 8, 2000 *Conduit Study and File Review Report* prepared by Cambria. In December 2010, the UST Cleanup Fund prepared a 5 Year Review that recommended a site conceptual model (SCM), risk assessment, and sensitive receptor survey to help facilitate selection of a remediation technique. In March 2011, Pangea provided information requested by the ACEH and proposed remediation and assessment tasks to help facilitate regulatory case closure. In a letter dated June 17, 2011, ACEH requested a site conceptual model with a preferential pathway evaluation. The UST Cleanup Fund 5-Year Review of March 12, 2012 also requested an SCM prior to any system modification. Pangea submitted a *Sensitive Receptor Survey, Conduit Study and Site Conceptual Model* dated March 26, 2012. In a letter dated December 21, 2012, ACEH requested a workplan to evaluate vapor intrusion and to investigate secondary source near well MW-2. Pangea submitted a *Workplan for Additional Assessment and Soil Gas Sampling* dated April 4, 2013. Following a meeting with ACEH on May 28, 2013, Pangea submitted a *Revised Data Gap Workplan* dated July 25, 2013.

GROUNDWATER MONITORING AND SAMPLING

On July 29, 2013, Pangea conducted groundwater monitoring and sampling at the site. All site monitoring wells were gauged for depth to water. Following the sampling protocol presented in Appendix A, groundwater samples were collected from select site monitoring wells.

Before well purging, dissolved oxygen (DO) and oxygen reduction potential (ORP) were measured in each well. DO was measured by lowering a downwell sensor to the approximate middle of the water column, and allowing the reading to stabilize during gentle height adjustment. Prior to sample collection approximately three casing volumes of water were purged using disposable bailers, an electric submersible pump or new polyethylene tubing with a check valve. During well purging field technicians measured pH, temperature and conductivity. A groundwater sample was collected from each well with a disposable bailer and decanted into

Groundwater Monitoring Report – Second Half 2013

1721 Webster Street

Oakland, California

October 31, 2013

the appropriate containers supplied by the analytical laboratory. Groundwater samples were labeled, placed in protective plastic bags, and stored on crushed ice at or below 4° C. All samples were transported under chain-of-custody to the State-certified analytical laboratory. Purge water was stored onsite in DOT-approved 55-gallon drums. Field data sheets are presented as Appendix B.

Monitoring Results

Groundwater elevation and analytical data are described below and summarized on Table 1 and Figure 2. Groundwater samples were analyzed for total petroleum hydrocarbons as gasoline (TPHg) by modified EPA Method 8015C; and benzene, toluene, ethylbenzene and xylenes (BTEX), and methyl tertiary butyl ether (MTBE) by EPA Method 8021B. Samples were analyzed by McCampbell Analytical, Inc. of Pittsburg, California, a State-certified laboratory. The laboratory analytical report is included as Appendix C.

Groundwater Flow Direction

Based on depth-to-water measurements collected on July 29, 2013, groundwater beneath the site flowed *north* to *northwestwards* (Figure 2). The groundwater depth measurements and inferred flow direction during this event are consistent with historical site conditions. Groundwater depths at the site have historically ranged from approximately 14 to 23 ft below ground surface (bgs), equivalent to a groundwater elevation range from 5 to 13 feet above msl (Table 1).

Hydrocarbon and MTBE Distribution in Groundwater

TPHg, benzene and MTBE concentrations detected in site groundwater during this monitoring event are shown on Figure 2. The maximum TPHg and benzene concentrations detected were 9,700 µg/L (well MW-3) and 13 µg/L (well MW-2), respectively. Historic low TPHg (82 µg/L) and benzene (1.2 µg/L) concentrations were detected in offsite well MW-6. Continued monitoring will help evaluate if the contaminant concentration reduction in well MW-6 is anomalous.

TPHg and benzene concentration trends in key source area wells MW-2 and MW-3 are graphed on Figure 3. Benzene concentrations have dramatically decreased in source area well MW-2 since the commencement of SVE/AS in October 2007. However, TPHg concentrations remain elevated in wells MW-2 and MW-3. As requested during a May 28, 2013 meeting at the ACEH office, TPHg and benzene concentration trends for key offsite wells (MW-4 and MW-6) and key remediation wells (AS-1 and AS-2) are graphed on Figures 4 and 5, respectively.

Groundwater Monitoring Report – Second Half 2013
1721 Webster Street
Oakland, California
October 31, 2013

MTBE was not detected above reporting limits in any of the sampled wells this monitoring event. The only apparent historical MTBE detection at the site (48 µg/L in well MW-3 by EPA Method 8020) was interpreted to be a false positive, based on the results of confirmation testing using EPA Method 8260 on July 21, 2003. Since the tank was removed in 1992 and because of the lack of confirmed detectable historical MTBE, MTBE is not a compound of concern at this site.

REMEDIATION SYSTEM SUMMARY

Soil Vapor Extraction/Air Sparge System

The soil vapor extraction (SVE) remediation system consisted of a blower that extracted soil vapor from well SVE-1. Extracted vapors were routed through a moisture separator then treated by two 2,000-lb canisters of granular activated carbon plumbed in series. The treated vapor was discharged to the atmosphere in accordance with Bay Area Air Quality Management District (BAAQMD) requirements. The air sparging (AS) system consisted of a compressor for injecting air into wells AS-1, AS-2 and/or AS-3. Injection into AS wells was controlled by timer-activated solenoid valves. Wells SVE-1 and AS-1 are constructed as vertical co-axial wells, with angled wells AS-2 and AS-3 located in the same vault. A cross section of the remediation wells is included as Figure 6. The remediation system layout is shown on Figure 7.

Operation and Performance

The SVE system operated from October 2007 to October 2010 with periodic cycling for rebound testing. By November 23, 2010, the SVE system operated for a total of about 19,396 hours (approximately 808 days) and the system removed a total of approximately 3,212 lbs TPHg and 6.9 lbs benzene. The AS system operated from November 2007 to April 2010, when the AS compressor broke down. Starting in August 2008, air sparge wells AS-1 and AS-3 were disconnected to focus air sparging on well AS-2 to target hydrocarbons in nearby key monitoring well MW-2. System operation and performance data is summarized on Table 2.

OTHER SITE ACTIVITIES

Semi-Annual Groundwater Monitoring

Pangea will conduct semi-annual groundwater monitoring and sampling at the site in accordance with the approved monitoring program shown in Appendix A. All monitoring wells will be gauged for depth to water. Groundwater samples from program wells will be analyzed for TPHg, BTEX and MTBE by EPA Method 8015Cm/8021B.

Groundwater Monitoring Report – Second Half 2013
1721 Webster Street
Oakland, California
October 31, 2013

Data Gap Investigation Workplan

Pangea submitted a *Revised Data Gap Investigation Workplan* dated July 25, 20013, which was approved in an ACEH letter dated September 13, 2013. The purpose of the investigation is to evaluate site conditions compared to the Low Threat Closure Policy (LTCP) criteria adopted by the State Water Resources Control Board (SWRCB), in an effort to identify any remaining impediments to regulatory case closure. Pangea plans to commence implementation of the approved investigation work in November 2013.

ELECTRONIC REPORTING

This report will be submitted to Alameda County Environmental Health via upload to the County's ftp site. Applicable data, maps, and reports for groundwater monitoring and other activities will be uploaded to the State Water Resource Control Board's Geotracker database. As requested, report hard copies will no longer be provided to local agencies.

ATTACHMENTS

- Figure 1 – Vicinity Map
- Figure 2 – Groundwater Elevations and Hydrocarbon Concentration Map
- Figure 3 – TPHg and Benzene Trends in Groundwater in Key Site Wells
- Figure 4 – TPHg and Benzene n Trends in Groundwater in Key Offsite Wells
- Figure 5 – TPHg and Benzene Trends in Groundwater in Key Remediation Wells
- Figure 6 - Cross Section of Remediation Wells
- Figure 7 – Remediation System Layout

- Table 1 – Groundwater Elevation and Analytical Data
- Table 2 – SVE System Performance Summary

- Appendix A – Groundwater Monitoring Program
- Appendix B – Groundwater Monitoring Field Data Sheets
- Appendix C – Laboratory Analytical Report


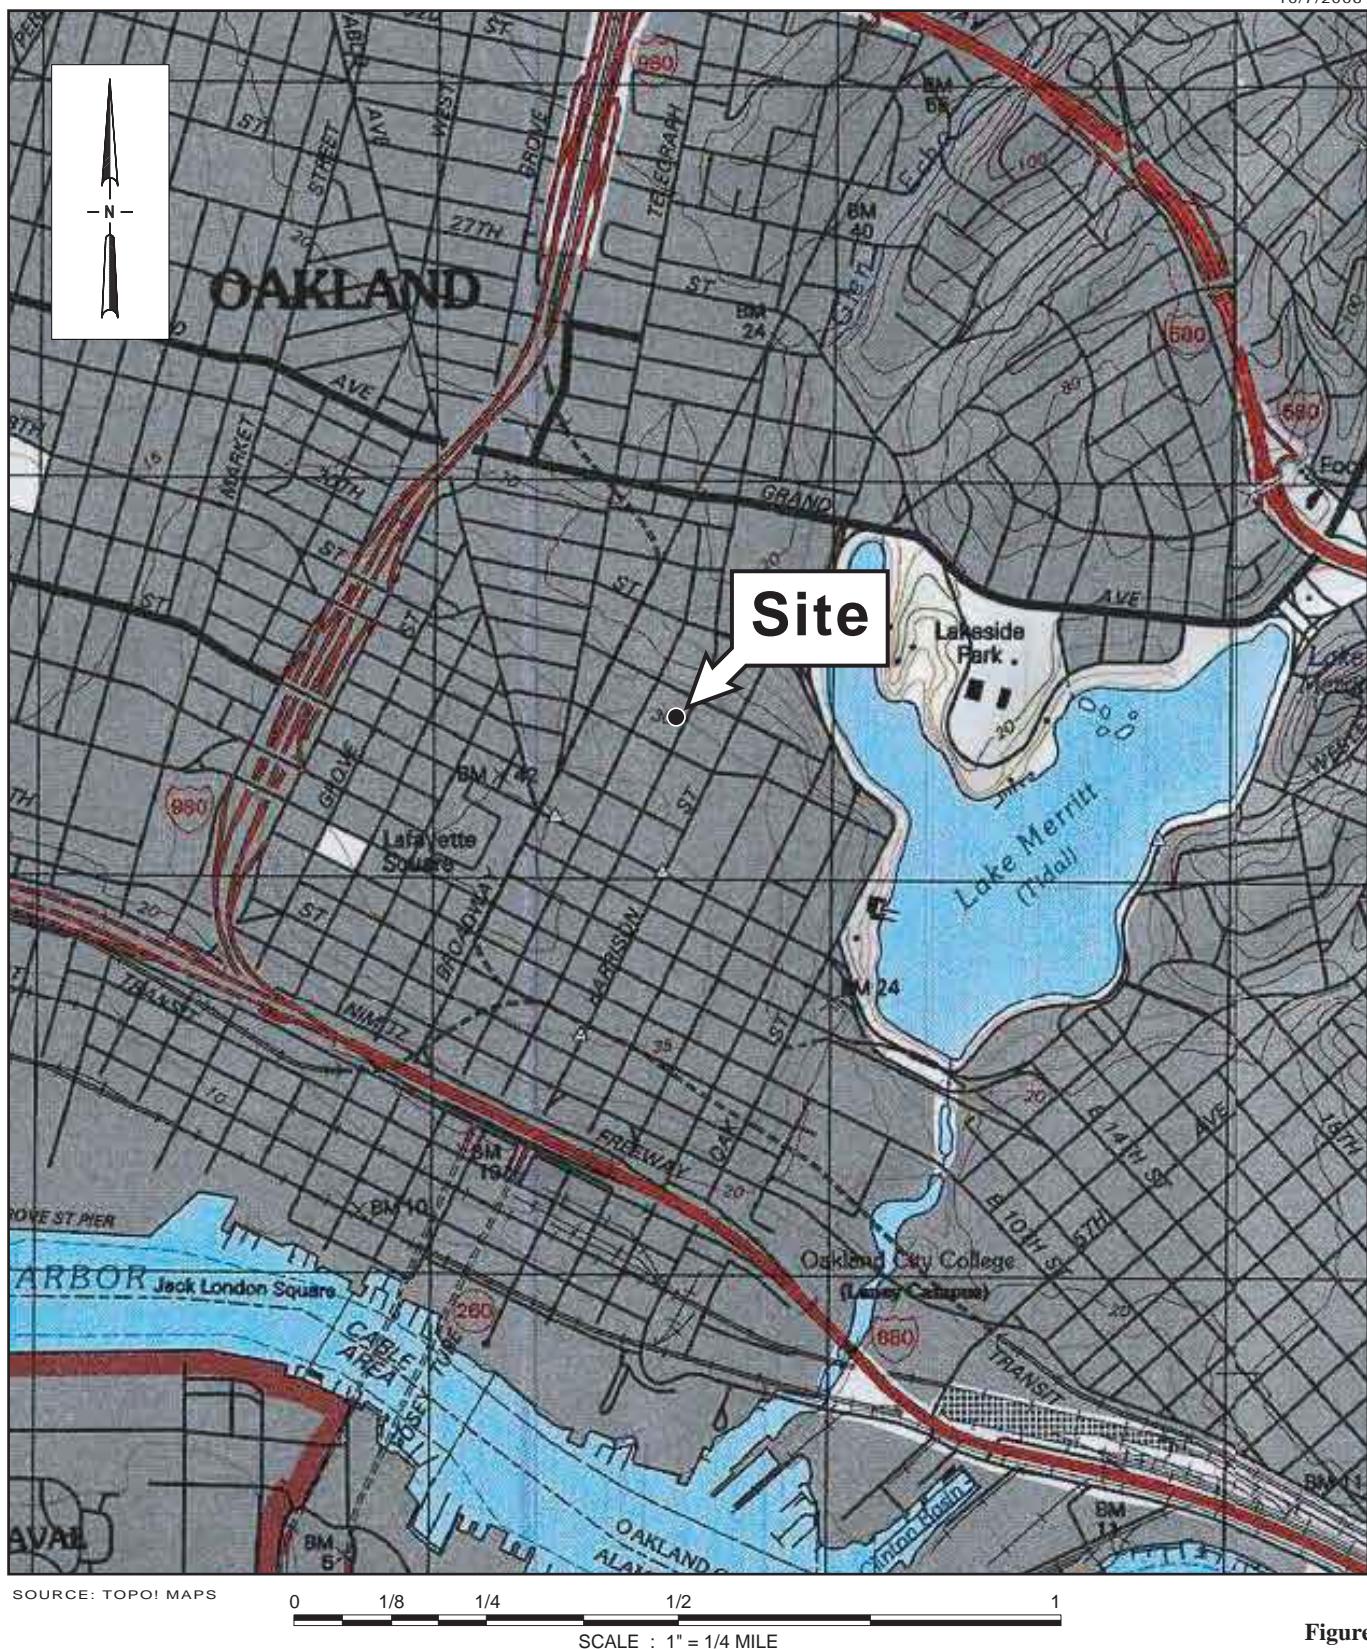


Figure
1

Douglas Parking Facility
1721 Webster Street
Oakland, California



Vicinity Map

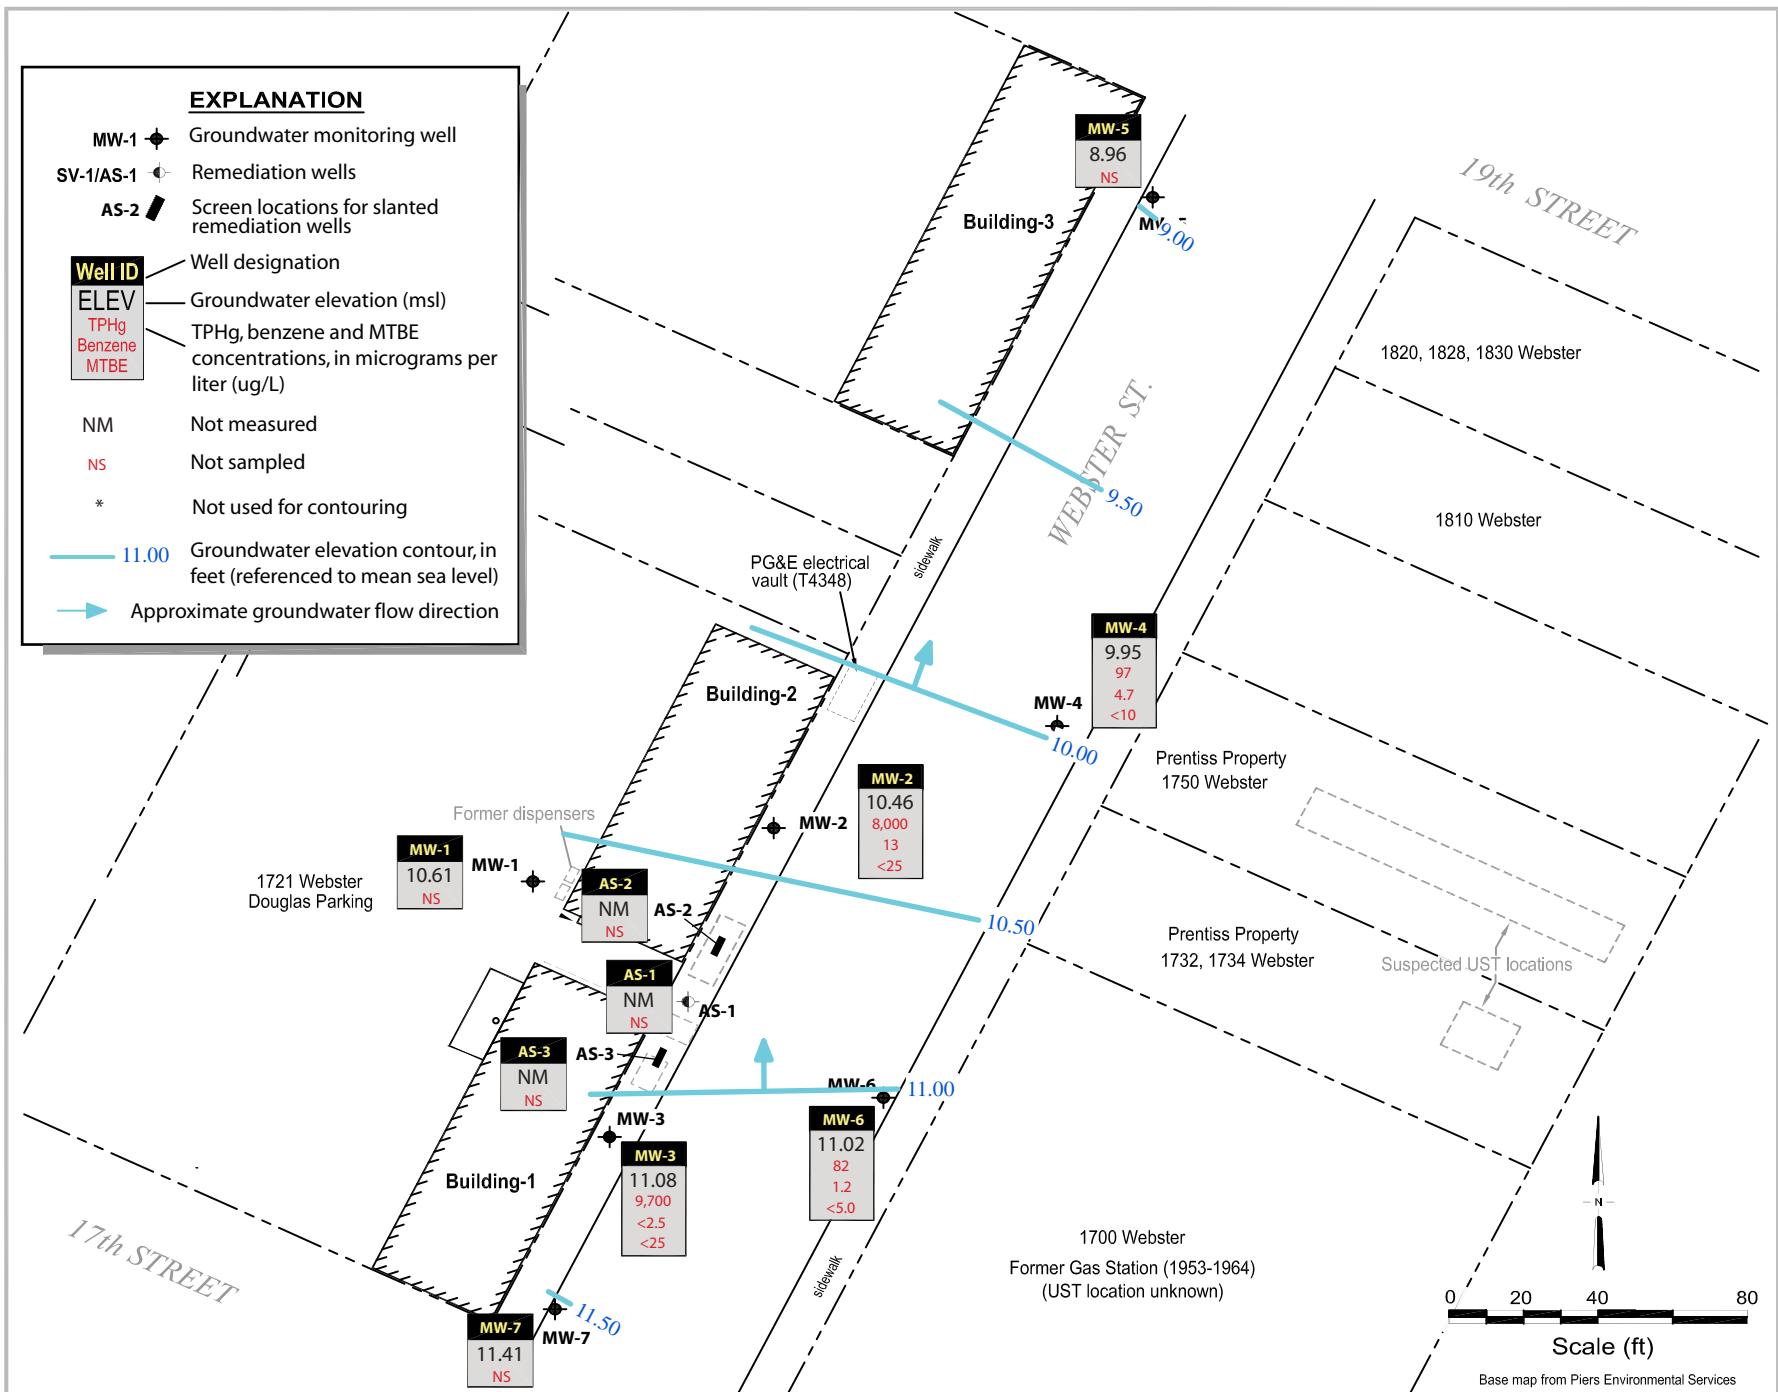

Douglas Parking
1721 Webster Street
Oakland, California



Groundwater Elevations and Hydrocarbon Concentration Map
July 29, 2013

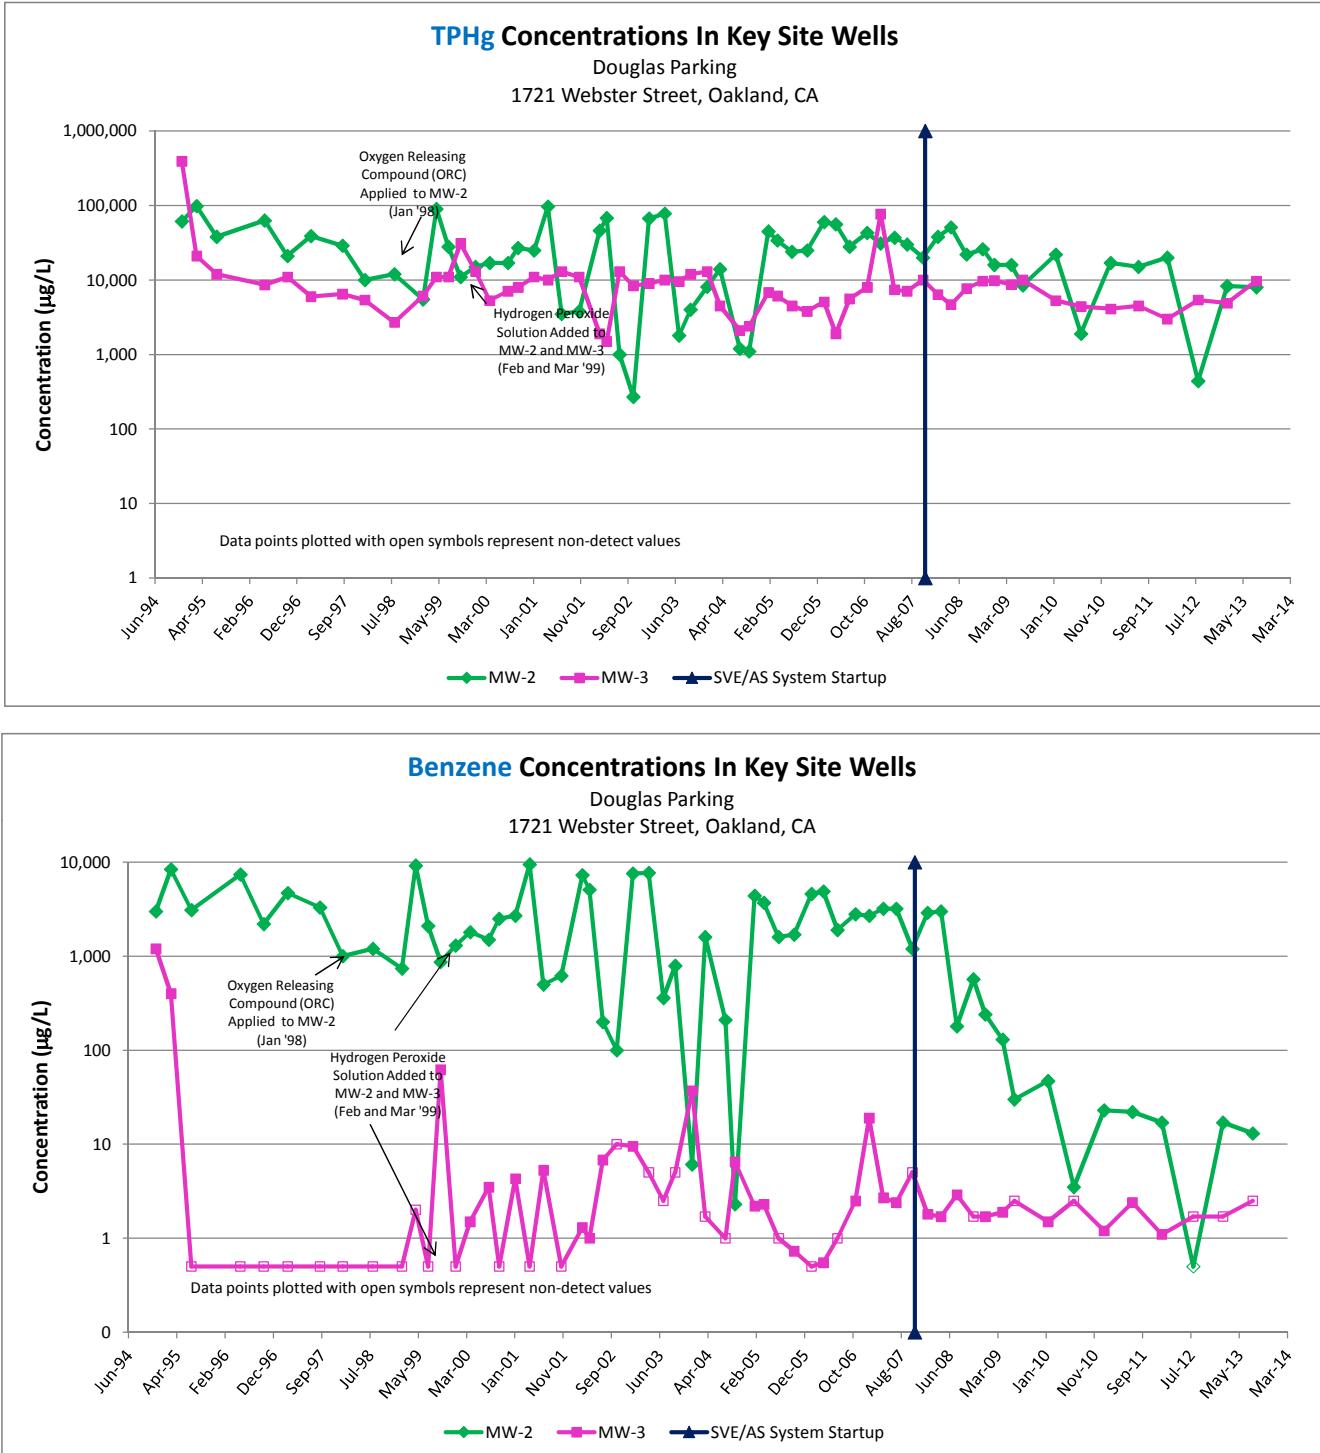


Figure 3 - TPHg and Benzene Trends in Key Onsite Wells

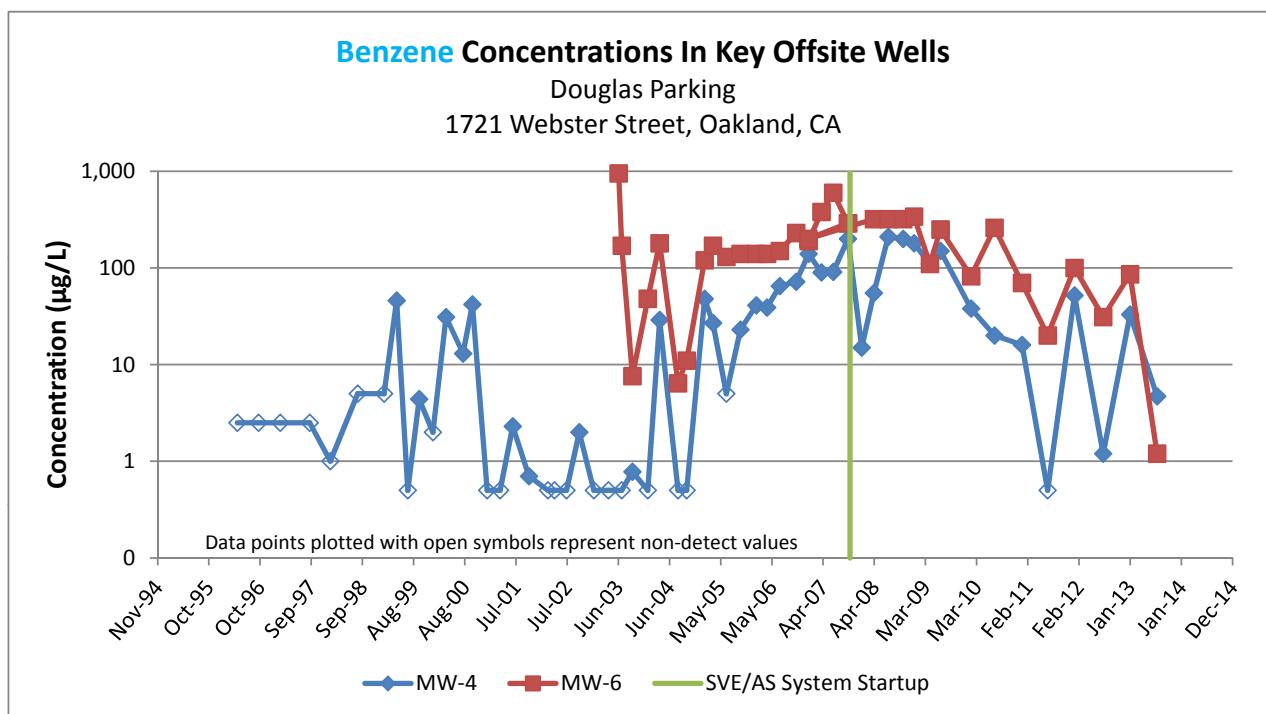
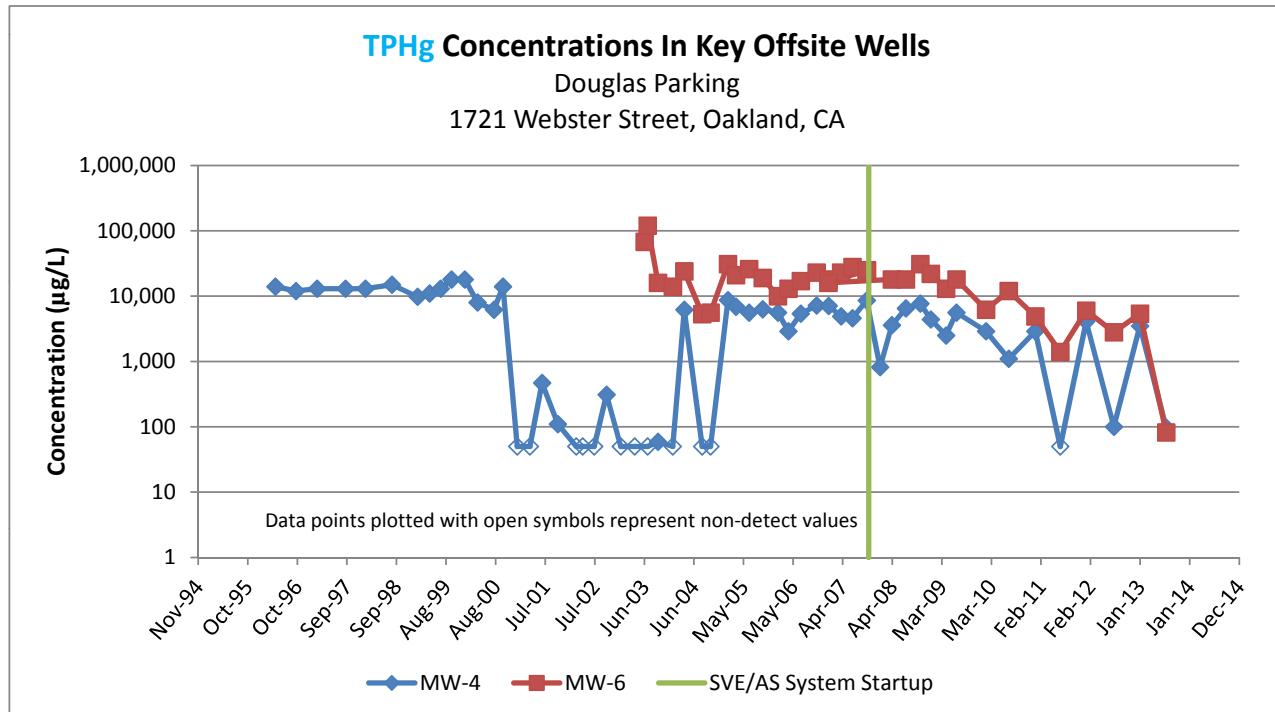


Figure 4 - TPHg and Benzene Trends in Key Offsite Wells



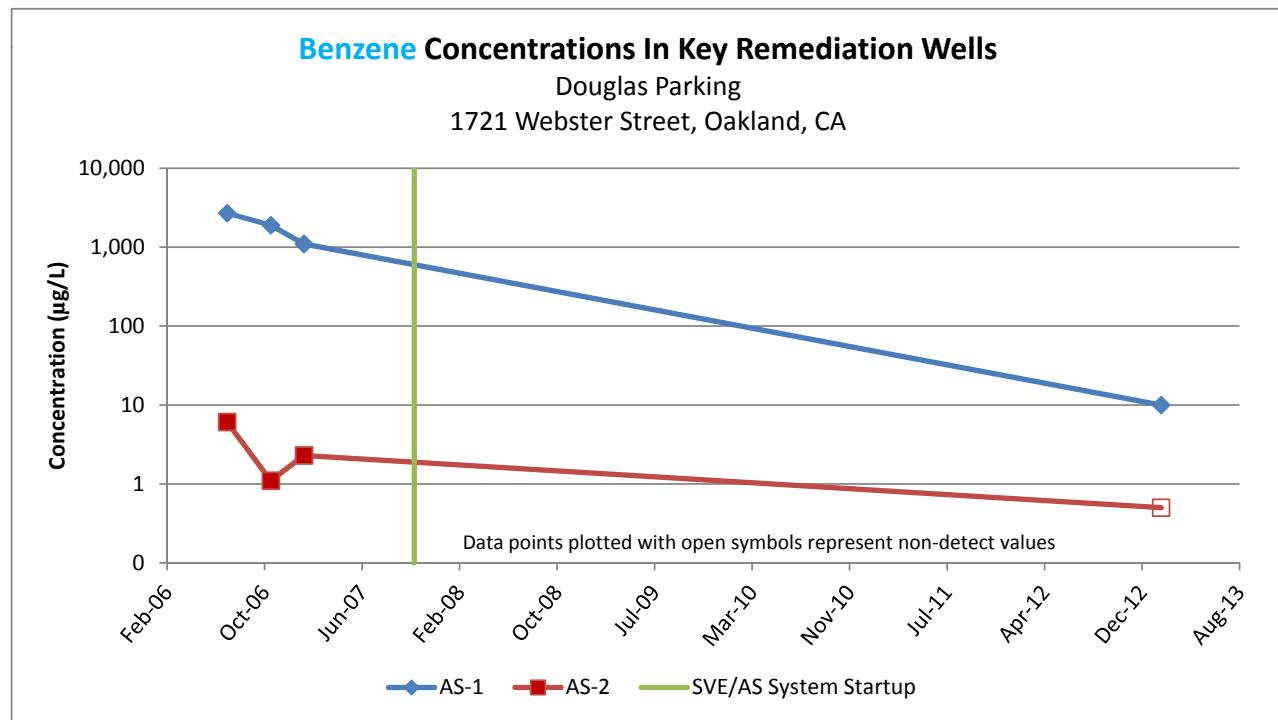


Figure 5 - TPHg and Benzene Trends in Key Remediation Wells

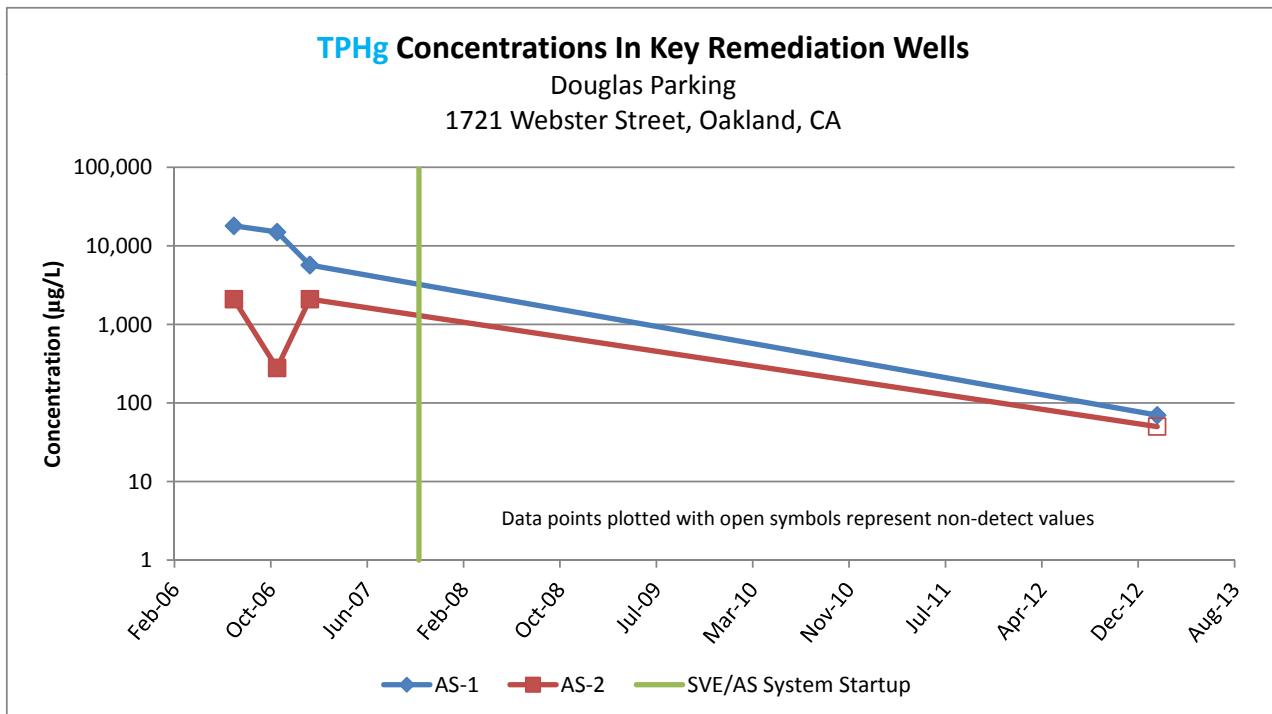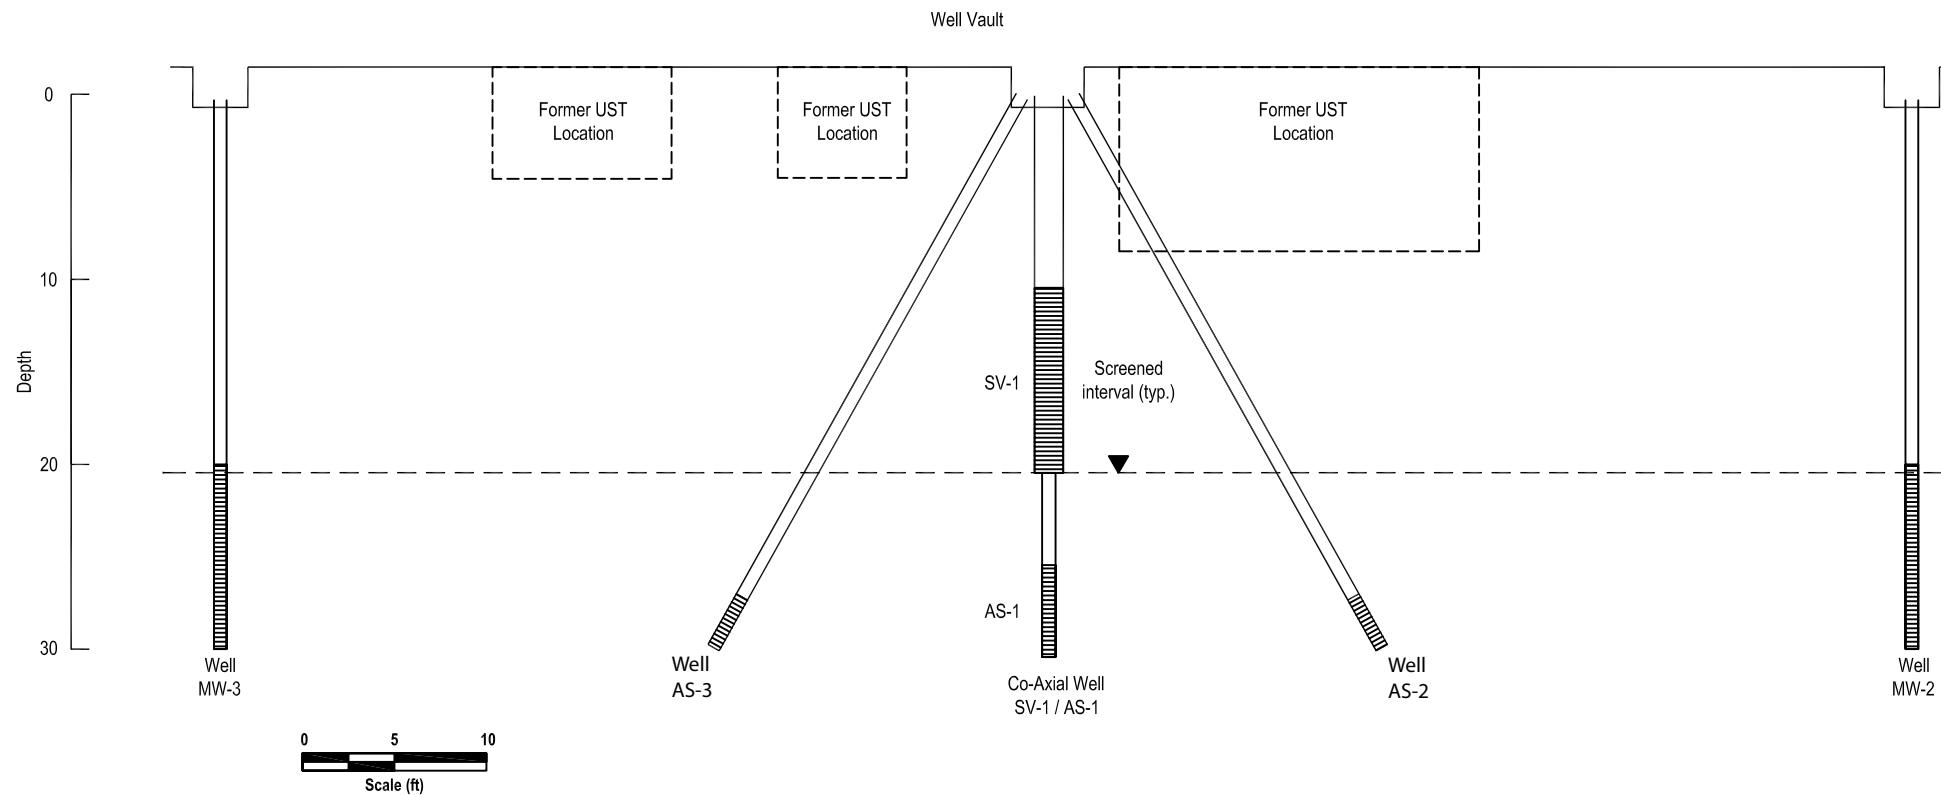

Figure


6

12/12/2006

Douglas Parking
1721 Webster Street
Oakland, California



Cross Section of Remediation Wells
SV-1/AS-1, AS-2, and AS-3

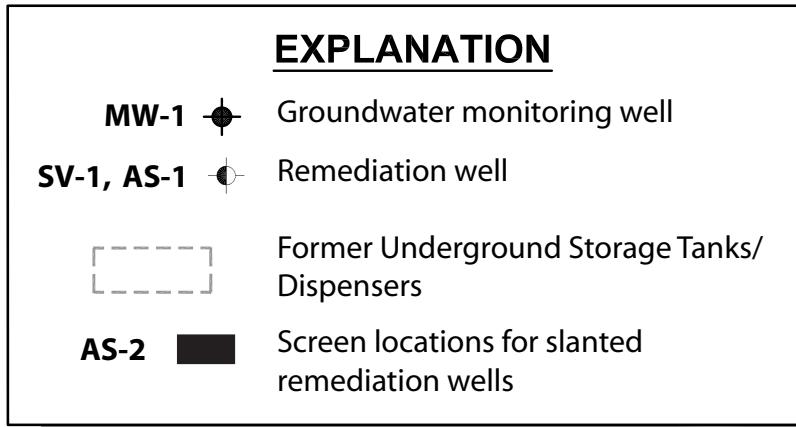

1721 Webster Douglas Parking

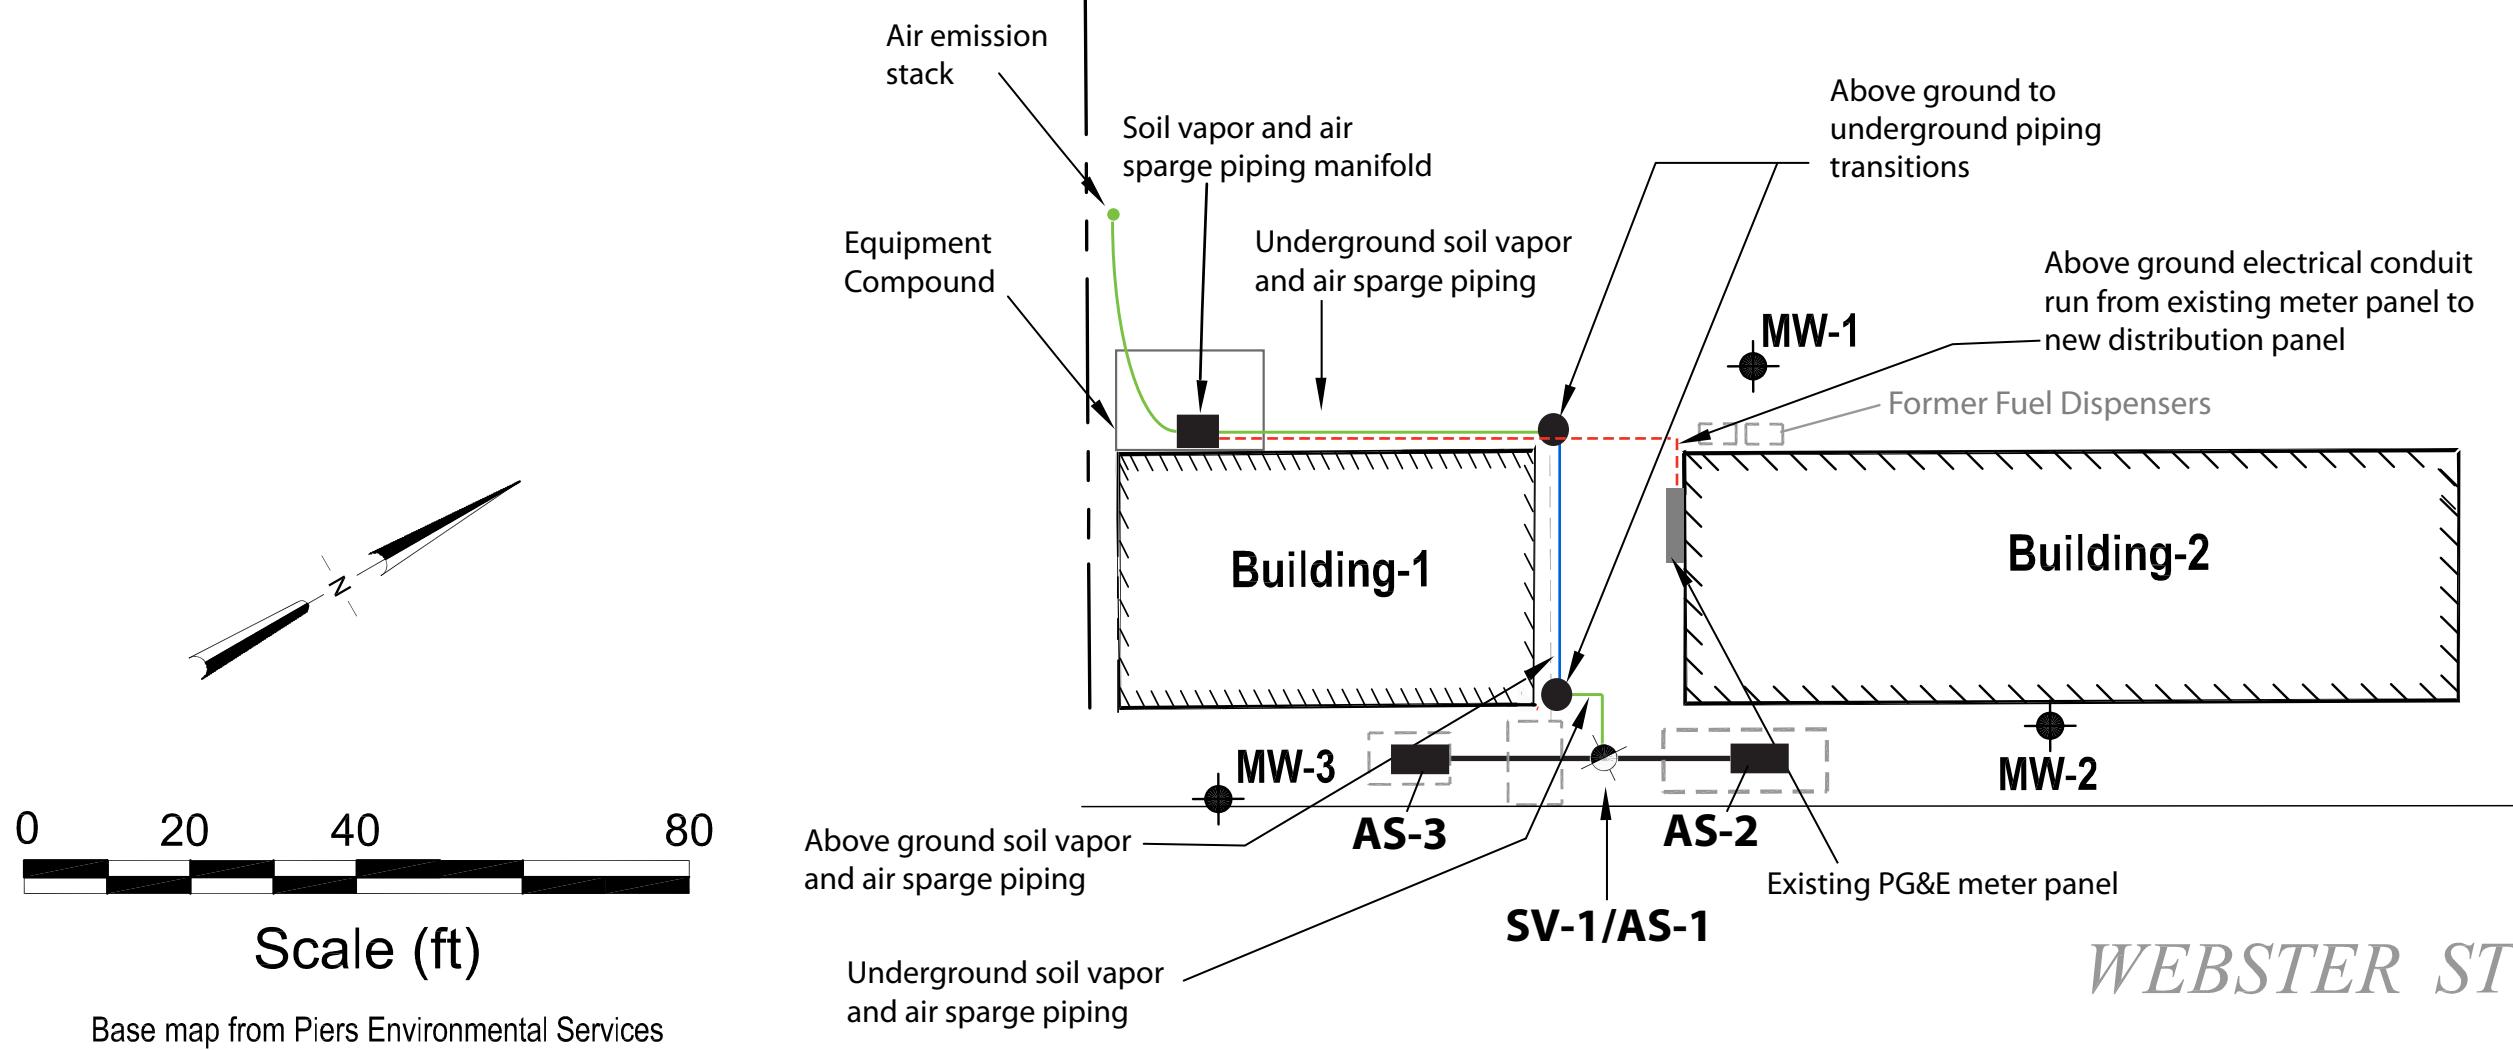


Figure
7

Douglas Parking

1721 Webster Street
Oakland, California

PANGEA

Table 1 - Groundwater Elevation and Analytical Data.

Douglas Parking Company, 1721 Webster Street, Oakland, California

Boring / Well ID TOC	Date	Depth to Water (ft)	Groundwater Elevation (ft amsl)	TPHg	Benzene	Toluene	Ethylbenzene (µg/L)	Xylenes	MTBE
AS-3 (cont'd)	7/16/2007	--	--	--	--	--	--	--	--
	10/15/2007	--	--	--	--	--	--	--	--
	1/17/2008	--	--	--	--	--	--	--	--
	4/9/2008	--	--	--	--	--	--	--	--
	1/25/2013	22.60	--	<50	<0.5	<0.5	0.55	<0.5	<5.0
Trip Blank	01/12/01	-	-	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	4/11/2001	-	-	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	7/6/2001	-	-	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	3/4/2002	-	-	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	10/2/2003	-	-	<50	<0.5	<0.5	<0.5	<0.5	<5.0
	10/15/2007	--	--	--	--	--	--	--	--
Grab Groundwater									
SB-A	2/22/1996	--	--	16,000	38	16	180	620	--
SB-B	2/22/1996	--	--	20,000	100	29	320	590	--
SB-C	2/22/1996	--	--	1,200	130	100	68	230	--
SB-D	2/22/1996	--	--	7,400	550	110	160	89	--
SB-E	2/23/1996	--	--	16,000	31	160	390	1,400	--
SB-F	2/23/1996	--	--	<50	<0.5	1.4	<0.5	2.3	--
SB-G	2/23/1996	--	--	5,200	1.3	<0.5	0.7	<0.5	--
EB-1GWS	7/8/1994	--	--	62,000	<0.5	26	850.0	8,900	--
EB-2GWS	7/8/1994	--	--	160,000	5,300	20,000	2,100	17,000	--
EB-3GWS	7/8/1994	--	--	87,000	1,400	21,000	1,700	19,000	--
EB-4GWS	7/8/1994	--	--	350,000	290	1,300	3,200	31,000	--
EB-5GWS	7/8/1994	--	--	120,000	2,100.0	13,000	1,300.0	16,000	--
EB-6GWS	7/8/1994	--	--	230,000	10,000	34,000	2,300	16,000	--

Notes and Abbreviations:

TOC = Top of casing elevations in feet above mean sea level.

ft amsl = Measured in feet above mean sea level

µg/L = Micrograms per liter.

TPHg = Total petroleum hydrocarbons as gasoline by modified EPA Method 8015C.

BTEX = Benzene, toluene, ethylbenzene, and xylenes by EPA Method 8021B.

MTBE = Methyl tertiary butyl ether by EPA Method 8021B, and by EPA Method 8260 in parenthesis.

<0.5 = Concentration not detected above specific laboratory reporting limit.

-- = Not analyzed, not sampled, or not applicable.

ND = Not detected.

Data prior to 7/11/95 from Gen Tech and Piers Environmental Quarterly Groundwater Monitoring Reports dated December 2, 1994 and March 6, 1995, respectively.

On July 31, 2003, Virgil Chavez Land Surveying of Vallejo, California surveyed monitoring wells using a benchmark in the top of the curb near the SW return of the NW corner of 34th and Broadway.

Table 2. SVE/AS System Performance Summary - 1721 Webster Street, Oakland, California

Date	Sample ID	FIELD MEASUREMENTS				ANALYTICAL RESULTS		REMOVAL					Air Sparge Unit on? (yes/no)	Comments
		Hour Reading (hours)	Meter Flow Rate (cfm)	System Vacuum ('H2O)	Applied FID Reading (ppm)	TPHg Lab Data (ppmv)	Benzene Lab Data (ppmv)	SVE Removal Rate (lbs/day)	TPHg Removal (lbs)	Cumulative SVE Removal Rate (lbs/day)	SVE Benzene Removal (lbs)	Cumulative SVE Benzene Removal (lbs)		
11/08/07	SYS-INF	178.2	47	27	160	---	---	13.3	219.2	0.12	1.74		no	Lab analysis performed for methane; 2.4 ul/L detected in SYS EFF
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							
11/09/07	SYS-INF	200.3	45	31	163	---	---	12.7	230.9	0.11	1.84		no	Shut system down at 200.3 hours for weekend
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							
11/12/07	SYS-INF	206.3	42	28	211	---	---	11.9	233.9	0.11	1.87		yes	Restart system at 200.3 hours on 11/12/07; start air sparge system
	SYS-MID				0	---	---							
	SYS-EFF				2	---	---							
11/13/07	SYS-INF	225.6	46	28	2,937	---	---	13.0	244.3	0.12	1.96		yes	
	SYS-MID				0	---	---							
	SYS-EFF				4	---	---							
11/14/07	SYS-INF	253.0	45	28	4,113	---	---	12.7	258.9	0.11	2.09		yes	
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							
11/15/07	SYS-INF	278.4	45	28	2,810	---	---	12.7	272.3	0.11	2.21		yes	
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							
11/16/07	SYS-INF	301.4	43	28	2,570	---	---	12.1	283.9	0.11	2.31		yes	
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							
11/17/07	SYS-INF	327.1	42	41	11	---	---	11.9	296.6	0.11	2.42		yes	
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							
11/18/07	SYS-INF	352.1	44	41	530	---	---	12.4	309.6	0.11	2.54		yes	
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							
11/19/07	SYS-INF	375.2	42	41	24	22	<0.077	0.3	309.9	0.00	2.54		yes	
	SYS-MID				0	---	---							
	SYS-EFF				0	---	---							

Table 2. SVE/AS System Performance Summary - 1721 Webster Street, Oakland, California

Date	Sample ID	FIELD MEASUREMENTS				ANALYTICAL RESULTS		REMOVAL					Air Sparge Unit on? (yes/no)	Comments
		Hour Reading (hours)	Meter Flow Rate (cfm)	System Vacuum ('H2O)	Applied FID Reading (ppm)	TPHg Lab Data (ppmv)	Benzene Lab Data (ppmv)	SVE Removal Rate (lbs/day)	TPHg Removal (lbs)	Cumulative SVE Removal Rate (lbs/day)	SVE Benzene Removal (lbs)	Cumulative SVE Benzene Removal (lbs)		
09/22/10	SYS-INF	19,173.6	25	0	17	66	0.21	0.5	3,208.0	0.00	6.87		no	Restart system, off on arrival
	SYS-MID				2	<7.0	<0.077							
	SYS-EFF				0	<7.0	<0.077							
10/22/10	SYS-INF	19,345.1	25	0	14	---	---	0.5	3,211.8	0.00	6.88		no	Restart system, off on arrival
	SYS-MID				1	---	---							
	SYS-EFF				0	---	---							
11/23/10	SYS-INF	19,395.5	0	0	NM	---	---	0.0	3,211.8	0.00	6.88		no	Off on arrival, system shutdown October 26, 2010 for rainy season.
	SYS-MID				NM	---	---							
	SYS-EFF				NM	---	---							

Notes:

NM = not measured

cfm = cubic feet per minute.

ppmv = Parts per million by volume

lbs = Pounds

"H2O = Inches of water

SVE/AS = Soil vapor extraction and air sparge

FID = Flame Ionization Detector.

Hydrocarbon Removal/Emission Rate = Rate based on Bay Area Air Quality Management District's Manual of Procedures for Soil Vapor Extraction dated July 17, 1991.

Rate = vapor analytical concentration (ppmv) x system flowrate (scfm) x (1lb-mole/386 ft³) x molecular weight (86 lb/lb-mole for TPH-Gas hexane) x 1440 min/day x 1/1,000,000.

* = Subtracted carbon tip readings of 28, 17, and 10, respectively, from influent, midpoint and effluent readings without carbon tip to account for methane.

(-) = not sampled

*Soil vapor flow rates were not measured on 1/15/08 and 1/23/08 due to equipment breakage. For hydrocarbon mass removal calculation purposes, the flow rate recorded during the 1/10/08 visit was used.

**Vapor flow meter being serviced from 7-24-2008 through 8-18-2008. Flow rates assumed from previous data, field observations, and adjustments made to system.

APPENDIX A

Groundwater Monitoring Program

Table A - Groundwater Monitoring Program
 Douglas Parking Company, 1721 Webster Street, Oakland, CA.

Well ID	Well Type	Screened Interval (ft bgs)	Well Location for Monitoring	Casing Diam. (in)	Gauge Frequency	Sample Frequency	TPHg/BTEX/ MTBE	TAME/TBA/ DIPE/ETBE/ MTBE
Onsite Monitoring and Remediation Wells								
MW-1	Mon	17-30	Source Area	2	1st, 3rd	1st	1st	---
MW-2	Mon	19.5-29.5	Downgradient	2	1st, 3rd	1st, 3rd	1st, 3rd	---
MW-3	Mon	20-30	Upgradient	2	1st, 3rd	1st, 3rd	1st, 3rd	---
AS-1	Rem	27-30	Source Area	1	1st*	1st*	1st*	---
AS-2	Rem	27-30	Source Area	2	1st*	1st*	1st*	---
AS-3	Rem	27-30	Source Area	2	1st*	1st*	1st*	---
Offsite Monitoring Wells								
MW-4	Mon	15-30	Mid-Downgradient	2	1st, 3rd	1st, 3rd	1st, 3rd	---
MW-5	Mon	10-25	Downgradient	2	1st, 3rd	1st	1st	---
MW-6	Mon	15-30	Crossgradient	2	1st, 3rd	1st, 3rd	1st, 3rd	---
MW-7	Mon	15-30	Upgradient	2	1st, 3rd	1st	1st	---

Notes and Abbreviations:

1st = Sampled during the 1st quarter, typically January

1st, 3rd = Sampled during the 1st and 3rd quarters, typically January and July

Mon = Groundwater Monitoring Only

Rem= Remediation Well Only

--- = None or not applicable

AS-1 = Air Sparging Well

* = Sampling of air sparge wells during January 2013 requested by ACEH letter dated December 21, 2012.

APPENDIX B

Groundwater Monitoring Field Data Sheets

Well Gauging Data Sheet

Project Task #: 1135.001 232			Project Name: Douglas Parking - 1721 Webster				
1721 Webster Street, Oakland, CA					Date: <u>7/29/13</u>		
Name: Sanjiv Gill			Signature: <u>S</u>				
Well ID	Well Size (in.)	Time	Depth to Immiscible Liquid (ft)	Thickness of Immiscible Liquid (ft)	Depth to Water (ft)	Total Depth (ft)	Measuring Point
MU-1	2"	06:45			22.14	26.65	TOC
MU-2	2	04:05			19.94	25.95	
MU-3	2	04:00			21.48	26.90	
MU-4	2	03:50			18.34	24.42	
MU-5	2	03:35			16.03	24.50	
MU-6	2	03:55			19.97	25.79	X
MU-7	2	03:40			21.70	28.46	

Comments:

Pangea
ENVIRONMENTAL SERVICES, INC.

MONITORING FIELD DATA SHEET


Well ID: ML-2

Project Task #:	1135.001 232	Project Name:	Douglas Parking 1721 Webster					
Address: 1721 Webster Street, Oaklane, CA								
Date:	7/29/13	Weather: Cloudy						
Well Diameter:	2"	Volume/ft.	1" = 0.04 3" = 0.37 6" = 1.47 2" = 0.16 4" = 0.65 radius ² * 0.163					
Total Depth (TD):	25.95	Depth to Product:						
Depth to Water (DTW):	19.94	Product Thickness:						
Water Column Height:	6.01	1 Casing Volume: 0.96 gallons						
Reference Point: TOC		3 Casing Volumes: 2.88 gallons						
Purging Device: Disposable Bailer, 3" PVC Bailer, Parastaltic Pump, Whal Pump								
Sampling Device: Disposable Bailer								
Time	Temp ©	pH	Cond (µs)	NTU	DO(mg/L)	ORP (mV)	Vol(gal)	DTW
05:40	18.8	6.89	512				1	
05:45	18.8	6.84	517				2	
05:50	18.5	6.79	523				3	

Comments: YSI 550A DO meter pre purge DO = 0.52 mg/l
 post purge DO = mg/l

turbid

pre purge ORP = -90

Sample ID:	ML-2	Sample Time:	05:55
Laboratory:	McCampbell Analytical, INC.	Sample Date:	7/29/13
Containers/Preservative: VOA/HCl			
Analyzed for: TPHg, BTEX, MTBE			
Sampler Name:	Sanjiv Gill	Signature:	

MONITORING FIELD DATA SHEET

Well ID: MU-3

Project Task #: 1135.001 232		Project Name: Douglas Parking 1721 Webster					
Address: 1721 Webster Street, Oaklane, CA							
Date: 7/29/13		Weather: Cloudy					
Well Diameter: 2"		Volume/ft.	1" = 0.04	3" = 0.37	6" = 1.47		
			2" = 0.16	4" = 0.65	radius ² * 0.163		
Total Depth (TD): 26.90		Depth to Product:					
Depth to Water (DTW): 21.48		Product Thickness:					
Water Column Height: 5.42		1 Casing Volume: 0.86 gallons					
Reference Point: TOC		3 Casing Volumes: 2.58 gallons					
Purging Device: <u>Disposable Bailer</u> , 3" PVC Bailer, Parastaltic Pump, Whal Pump							
Sampling Device: Disposable Bailer							
Time	Temp ©	pH	Cond (µs)	NTU	DO(mg/L)	ORP (mV)	Vol(gal)
05:00	18.9	6.51	490				1.0
05:05	18.7	6.60	497				2.0
05:10	18.4	6.64	486				2.5

Comments: YSI 550A DO meter pre purge DO = 0.77 mg/l
'; post purge DO = mg/l

turbid

pre purge ORP = -70

Sample ID: MU-3	Sample Time: 05:15
Laboratory: McCampbell Analytical, INC.	Sample Date: 7/29/13
Containers/Preservative: VOA/HCl	
Analyzed for: TPHg, BTEX, MTBE	
Sampler Name: Sanjiv Gill	Signature: 

MONITORING FIELD DATA SHEET

Well ID: MW-4

Project Task #: 1135.001 232	Project Name: Douglas Parking 1721 Webster							
Address: 1721 Webster Street, Oakland, CA								
Date: 7/29/13	Weather: Cloudy							
Well Diameter: 2 "		Volume/ft.	1" = 0.04	3" = 0.37	6" = 1.47			
			2" = 0.16	4" = 0.65	radius ² * 0.163			
Total Depth (TD): 29.42	Depth to Product:							
Depth to Water (DTW): 18.34	Product Thickness:							
Water Column Height: 11.08	1 Casing Volume: 1.77 gallons							
Reference Point: TOC	3 Casing Volumes: 5.31 gallons							
Purging Device: Disposable Bailer, 3" PVC Bailer, Parastaltic Pump, Whal Pump								
Sampling Device: Disposable Bailer								
Time	Temp ©	pH	Cond (µs)	NTU	DO(mg/L)	ORP (mV)	Vol(gal)	DTW
04:30	18.5	7.21	659				1.5	
04:35	18.7	7.28	634				3.0	
04:40	18.9	7.33	630				5.0	

Comments: YSI 550A DO meter pre purge DO = 0.64 mg/l

; post purge DO = mg/l

turbid

prepurge ORP = -79


Sample ID: MW-4	Sample Time: 04:45
Laboratory: McCampbell Analytical, INC.	Sample Date: 7/29/13
Containers/Preservative: VOA/HCI	
Analyzed for: TPHg, BTEX, MTBE	
Sampler Name: Sanjiv Gill	Signature: 

MONITORING FIELD DATA SHEET

Well ID: MN-6

Project Task #: 1135.001 232	Project Name: Douglas Parking 1721 Webster							
Address: 1721 Webster Street, Oaklane, CA								
Date: 7/29/13	Weather: Cloudy							
Well Diameter: 2 "	Volume/ft.	1" = 0.04 3" = 0.37 6" = 1.47 2" = 0.16 4" = 0.65 radius ² * 0.163						
Total Depth (TD): 25.79	Depth to Product:							
Depth to Water (DTW): 19.97	Product Thickness:							
Water Column Height: 5.82	1 Casing Volume:	0.93 gallons						
Reference Point: TOC	3 Casing Volumes:	2.79 gallons						
Purging Device: Disposable Bailer, 3" PVC Bailer, Parastaltic Pump, Whal Pump								
Sampling Device: Disposable Bailer								
Time	Temp °C	pH	Cond (µs)	NTU	DO(mg/L)	ORP (mV)	Vol(gal)	DTW
06:15	18.0	6.67	729				1	
06:20	18.6	6.75	740				2	
06:25	18.8	6.75	743				3	

Comments: YSI 550A DO meter pre purge DO = 0.48 mg/l
 ; post purge DO = mg/l
 Jmfbird pre purge ORP = -8

Sample ID: MN-6	Sample Time: 06:30
Laboratory: McCampbell Analytical, INC.	Sample Date: 7/29/13
Containers/Preservative: VOA/HCl	
Analyzed for: TPHg, BTEX, MTBE	
Sampler Name: Sanjiv Gill	Signature: 

APPENDIX C

Laboratory Analytical Reports



Analytical Report

Pangea Environmental Svcs., Inc. 1710 Franklin Street, Ste. 200 Oakland, CA 94612	Client Project ID: #1135.001 236; Douglas Parking-1721 Webster Client Contact: Tina De La Fuente Client P.O.:	Date Sampled: 07/29/13 Date Received: 07/29/13 Date Reported: 08/05/13 Date Completed: 08/01/13
---	---	--

WorkOrder: 1307896

August 05, 2013

Dear Tina:

Enclosed within are:

- 1) The results of the **4** analyzed samples from your project: **#1135.001 236; Douglas Parking-1721 Webster,**
- 2) QC data for the above samples, and
- 3) A copy of the chain of custody.

All analyses were completed satisfactorily and all QC samples were found to be within our control limits.

If you have any questions or concerns, please feel free to give me a call. Thank you for choosing
McCampbell Analytical Laboratories for your analytical needs.

Best regards,

Angela Rydelius
Laboratory Manager
McCampbell Analytical, Inc.

The analytical results relate only to the items tested.



CHAIN-OF-CUSTODY RECORD

Page 1 of 1

WorkOrder: 1307896

ClientCode: PEO

WaterTrax WriteOn EDF Excel EQuIS Email HardCopy ThirdParty J-flag

Report to:

Tina De La Fuente
Pangea Environmental Svcs., Inc.
1710 Franklin Street, Ste. 200
Oakland, CA 94612
(510) 836-3700 FAX: (510) 836-3709

Email: tdelafuente@pangeaenv.com
cc:
PO:
ProjectNo: #1135.001 236; Douglas Parking-1712
Webster

Bill to:

Bob Clark-Riddell
Pangea Environmental Svcs., Inc.
1710 Franklin Street, Ste. 200
Oakland, CA 94612

Requested TAT: 5 days

Date Received: 07/29/2013

Date Printed: 07/29/2013

Lab ID	Client ID	Matrix	Collection Date	Hold	Requested Tests (See legend below)												
					1	2	3	4	5	6	7	8	9	10	11	12	
1307896-001	MW-2	Water	7/29/2013 5:55	<input type="checkbox"/>	A												
1307896-002	MW-3	Water	7/29/2013 5:15	<input type="checkbox"/>	A												
1307896-003	MW-4	Water	7/29/2013 4:45	<input type="checkbox"/>	A												
1307896-004	MW-6	Water	7/29/2013 6:30	<input type="checkbox"/>	A												

Test Legend:

1	G-MBTEX_W
6	
11	

2		3		4		5	
7		8		9		10	
12							

Prepared by:

Comments:

NOTE: Soil samples are discarded 60 days after results are reported unless other arrangements are made (Water samples are 30 days). Hazardous samples will be returned to client or disposed of at client expense.



Sample Receipt Checklist

Client Name: **Pangea Environmental Svcs., Inc.** Date and Time Received: **7/29/2013 9:50:04 AM**
Project Name: **#1135.001 236; Douglas Parking-1712 Webster** Login Reviewed by:
WorkOrder N°: **1307896** Matrix: Water Carrier: Client Drop-In

Chain of Custody (COC) Information

Chain of custody present?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Chain of custody signed when relinquished and received?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Chain of custody agrees with sample labels?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Sample IDs noted by Client on COC?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Date and Time of collection noted by Client on COC?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Sampler's name noted on COC?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>

Sample Receipt Information

Custody seals intact on shipping container/coolier?	Yes <input type="checkbox"/>	No <input type="checkbox"/>	NA <input checked="" type="checkbox"/>
Shipping container/coolier in good condition?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	
Samples in proper containers/bottles?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	
Sample containers intact?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	
Sufficient sample volume for indicated test?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	

Sample Preservation and Hold Time (HT) Information

All samples received within holding time?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	
Container/Temp Blank temperature	Cooler Temp: 7.5°C NA <input type="checkbox"/>		
Water - VOA vials have zero headspace / no bubbles?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	No VOA vials submitted <input type="checkbox"/>
Sample labels checked for correct preservation?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	
Metal - pH acceptable upon receipt (pH<2)?	Yes <input type="checkbox"/>	No <input type="checkbox"/>	NA <input checked="" type="checkbox"/>
Samples Received on Ice?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	

(Ice Type: WET ICE)

* NOTE: If the "No" box is checked, see comments below.

Comments:



McCormick Analytical, Inc.
"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Toll Free Telephone: (877) 252-9262 / Fax: (925) 252-9269
<http://www.mccormick.com> / E-mail: main@mccormick.com

Pangea Environmental Svcs., Inc. 1710 Franklin Street, Ste. 200 Oakland, CA 94612	Client Project ID: #1135.001 236; Douglas Parking-1721 Webster	Date Sampled: 07/29/13
		Date Received: 07/29/13
	Client Contact: Tina De La Fuente	Date Extracted: 07/31/13-08/01/13
	Client P.O.:	Date Analyzed: 07/31/13-08/01/13

Gasoline Range (C6-C12) Volatile Hydrocarbons as Gasoline with BTEX and MTBE*

Extraction method: SW5030B

Analytical methods: SW8021B/8015Bm

Work Order: 1307896

Lab ID	Client ID	Matrix	TPH(g)	MTBE	Benzene	Toluene	Ethylbenzene	Xylenes	DF	% SS	Comments
001A	MW-2	W	8000	ND<25	13	13	200	100	5	---#	d1
002A	MW-3	W	9700	ND<25	ND<2.5	ND<2.5	ND<2.5	ND<2.5	5	---#	d1
003A	MW-4	W	97	ND<10	4.7	ND	ND	0.70	1	114	d1
004A	MW-6	W	82	ND	1.2	ND	ND	ND	1	110	d1

Reporting Limit for DF =1; ND means not detected at or above the reporting limit	W	50	5.0	0.5	0.5	0.5	0.5	μg/L
	S	1.0	0.05	0.005	0.005	0.005	0.005	mg/Kg

* water and vapor samples are reported in ug/L, soil/sludge/solid samples in mg/kg, wipe samples in ug/wipe, product/oil/non-aqueous liquid samples and all TCLP & SPLP extracts in mg/L.

cluttered chromatogram; sample peak coelutes w/surrogate peak; low surrogate recovery due to matrix interference. %SS = Percent Recovery of Surrogate Standard;
DF = Dilution Factor

The following descriptions of the TPH chromatogram are cursory in nature and McCormick Analytical is not responsible for their interpretation:

d1) weakly modified or unmodified gasoline is significant



QC SUMMARY REPORT FOR SW8021B/8015Bm

W.O. Sample Matrix: Water

QC Matrix: Water

BatchID: 80010

WorkOrder: 1307896

EPA Method: SW8021B/8015Bm		Extraction: SW5030B		Spiked Sample ID: 1307918-001A						
Analyte	Sample	Spiked	MS	MSD	MS-MSD	LCS	Acceptance Criteria (%)			
	µg/L	µg/L	% Rec.	% Rec.	% RPD	% Rec.	MS / MSD	RPD	LCS	
TPH(btex) [£]	ND	60	92.1	90.5	1.83	93.4	70 - 130	20	70 - 130	
MTBE	ND	10	86.6	82.8	4.54	97.4	70 - 130	20	70 - 130	
Benzene	ND	10	94.6	97.8	3.29	93.2	70 - 130	20	70 - 130	
Toluene	ND	10	95.7	99.3	3.73	94	70 - 130	20	70 - 130	
Ethylbenzene	ND	10	95.2	97.5	2.41	93.2	70 - 130	20	70 - 130	
Xylenes	ND	30	96.4	98.1	1.81	93.9	70 - 130	20	70 - 130	
%SS:	115	10	101	104	2.86	99	70 - 130	20	70 - 130	

All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:
NONE

BATCH 80010 SUMMARY

Lab ID	Date Sampled	Date Extracted	Date Analyzed	Lab ID	Date Sampled	Date Extracted	Date Analyzed
1307896-001A	07/29/13 5:55 AM	07/31/13	07/31/13 8:21 PM	1307896-002A	07/29/13 5:15 AM	08/01/13	08/01/13 8:55 PM
1307896-003A	07/29/13 4:45 AM	07/31/13	07/31/13 9:51 PM	1307896-004A	07/29/13 6:30 AM	07/31/13	07/31/13 3:25 AM

MS = Matrix Spike; MSD = Matrix Spike Duplicate; LCS = Laboratory Control Sample; LCSD = Laboratory Control Sample Duplicate; RPD = Relative Percent Deviation.

% Recovery = 100 * (MS-Sample) / (Amount Spiked); RPD = 100 * (MS - MSD) / ((MS + MSD) / 2).

MS / MSD spike recoveries and / or %RPD may fall outside of laboratory acceptance criteria due to one or more of the following reasons: a) the sample is inhomogenous AND contains significant concentrations of analyte relative to the amount spiked, or b) the spiked sample's matrix interferes with the spike recovery.

£ TPH(btex) = sum of BTEX areas from the FID.

cluttered chromatogram; sample peak coelutes with surrogate peak.

N/A = not enough sample to perform matrix spike and matrix spike duplicate.

NR = matrix interference and/or analyte concentration in sample exceeds spike amount for soil matrix or exceeds 2x spike amount for water matrix or sample diluted due to high matrix or analyte content, or inconsistency in sample containers.