

RECEIVED

9:59 am, May 09, 2008

Alameda County
Environmental Health

May 8, 2008
DELTA Project SCA5251H1
SAP: 135785

Mr. Jerry Wickham
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

**Re: FIRST QUARTER 2008 GROUNDWATER MONITORING
REPORT
Shell-Branded Service Station
5251 Hopyard Road
Pleasanton, California**



Dear Mr. Wickham:

On behalf of Shell Oil Products (SHELL), Delta Consultants (DELTA) has prepared this *First Quarter 2008 Groundwater Monitoring Report* for the above referenced site. The sampling activities at the site were performed by Blaine Tech Services, Inc. under contract to SHELL and included the collection of groundwater samples and static water level measurements. A DELTA staff member under the supervision of a California Registered Civil Engineer or a California Professional Geologist performed the data evaluation.

This quarterly report represents DELTA's professional opinions based upon the currently available information and is arrived at in accordance with currently acceptable professional standards. This report is based upon a specific scope of work requested by the client. The Contract between DELTA and its client outlines the scope of work, and only those tasks specifically authorized by that contract or outlined in this report were performed. This report is intended only for the use of DELTA's Client and anyone else specifically listed on this report. DELTA will not and cannot be liable for unauthorized reliance by any other third party. Other than as contained in this paragraph, DELTA makes no express or implied warranty as to the contents of this report.

a member of:




Mr. Jerry Wickham
Alameda County Health Care Services Agency
May 8, 2008
Page 2

If you have any questions regarding this site, please contact Mr. Richard Garlow (DELTA) at (408) 826-1880 or Mr. Denis Brown (SHELL) at (707) 865-0251.

Sincerely,
Delta Consultants



Richard A. Garlow, M.S., P.G.
Project Manager



Attachment: First Quarter 2008 Groundwater Monitoring Report

cc: Denis Brown, Shell Oil Products US, Carson
Carl Cox, C and J Cox Corporation, Pleasanton
Colleen Winey, Zone 7 Water Agency, Livermore
Danielle Stefani, Livermore-Pleasanton Fire Department, Pleasanton

SHELL QUARTERLY STATUS REPORT

Station Address: 5251 Hopyard Road, Pleasanton, CA
DELTA Project No.: SCA5251H1
SHELL Project Manager / Phone No.: Denis Brown / (707) 865-0251
DELTA Site Manager / Phone No.: Richard Garlow / (408) 826-1880
Primary Agency / Regulatory ID No.: Alameda County Environmental Health / Mr. Jerry Wickham, P.G.,
CHG
Other Agencies to Receive Copies: Zone 7 Water Agency, Livermore-Pleasanton Fire Department

WORK PERFORMED THIS QUARTER (FIRST – 2008):

1. Quarterly groundwater monitoring and sampling. Submitted quarterly report.
2. Monitoring batch extraction system.

WORK PROPOSED FOR NEXT QUARTER (SECOND – 2008):

1. Quarterly groundwater monitoring and sampling. Submit quarterly report.
2. Complete batch extraction, issue batch extraction report.

Current Phase of Project: Groundwater monitoring and interim remediation activities.
Site Use: Shell-branded Service Station
Frequency of Sampling: Quarterly
Frequency of Monitoring: Quarterly
Is Separate Phase Hydrocarbon Present On-site (Well #'s): Yes No
Cumulative SPH Recovered to Date: NA
SPH Recovered This Quarter : None
Groundwater Recovered this Quarter: 218.7 gallons recovered during sampling on February 08,
2008.
Sensitive Receptor(s) and Respective Direction(s): Chabot canal is located approximately 1133 feet north-east of
the site and Hewlett Canal is located approximately 1156 feet
east of the site. No municipal water supply wells were
identified within a 1-mile radius of the site.
General Site Lithology: The site and property to the north are underlain predominantly
by clay and silt.
Current Remediation Techniques: None
Permits for Discharge: None
Approximate Depth to Groundwater: 6.77 to 8.42 feet below top of well casing.
Groundwater Gradient: Northwest at a 0.003 ft/ft gradient, consistent with previous
data
Current Agency Correspondence: July 2, 2007

SHELL QUARTERLY STATUS REPORT (CONT.)

Date of Most Recent Work Plan Approval:	July 02, 2007
Site History:	
Case Opening	September 2004
Onsite Assessment	May 2005
Offsite Assessment	
Passive Remediation	Monitor Natural Attenuation
Active Remediation	Batch Extractions, 2006
Closure	N/A
Summary of Unusual Activity:	Batch extraction system operating

Discussion: Detected concentrations in some wells changing from previous quarter due to batch extraction.
Monitoring Well EW-1 not accessible due to batch extraction.

ATTACHED:

- Table 1 – Well Concentrations
- Figure 1 – Site Location Map
- Figure 2 – Groundwater Elevation Contour Map
- Figure 3 – Groundwater Hydrocarbon Distribution Map
- Appendix A – Field Data Sheets
- Appendix B – Field Procedures
- Appendix C – Laboratory Report and Chain-of-Custody Document

TABLE

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-1	1/25/1991	2,500	1,500	460	<25	130	36	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	4/6/1991	6,700	2,600 a	2,600	14	580	250	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	7/24/1991	8,800	3,800 a	2,300	30	640	220	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	10/18/1991	12,000	3,300 a	3,600	380	990	580	NA	NA	NA	NA	NA	NA	326.73	8.85	317.88	NA
S-1	1/23/1992	1,600	890	450	3	120	17	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	4/27/1992	1,100 g	500 a	610	<10	110	10	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	7/21/1992	5,100	290 c	1,900	54	460	140	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	10/16/1992	13,000	390 c	3,200	310	780	360	NA	NA	NA	NA	NA	NA	326.73	NA	NA	NA
S-1	1/23/1993	2,300	30 d	640	<5	110	13	NA	NA	NA	NA	NA	NA	326.73	7.96	318.77	NA
S-1	4/28/1993	4,600	390	780	<0.5	250	<0.5	NA	NA	NA	NA	NA	NA	326.73	9.07	317.66	NA
S-1	9/22/1993	3,000	610 a	660	28	160	17	NA	NA	NA	NA	NA	NA	326.73	8.68	318.05	NA
S-1	12/8/1993	520	280	210	<2.5	49	<2.5	NA	NA	NA	NA	NA	NA	326.73	8.23	318.50	NA
S-1	3/4/1994	640	NA	190	1.4	18	1.3	NA	NA	NA	NA	NA	NA	326.73	8.81	317.92	NA
S-1 (D)	3/4/1994	640	NA	180	1.7	17	1.3	NA	NA	NA	NA	NA	NA	326.73	8.81	317.92	NA
S-1	6/16/1994	2,500	NA	390	9.5	31	7.5	NA	NA	NA	NA	NA	NA	326.73	8.80	317.93	NA
S-1 (D)	6/16/1994	2,000	NA	410	7.8	120	20	NA	NA	NA	NA	NA	NA	326.73	8.80	317.93	NA
S-1	9/13/1994	1,400	NA	310	7.7	29	8.5	NA	NA	NA	NA	NA	NA	326.73	8.62	318.11	NA
S-1 (D)	9/13/1994	1,400	NA	240	7.9	44	6.3	NA	NA	NA	NA	NA	NA	326.73	8.62	318.11	NA
S-1	5/5/1995	800	NA	120	3.6	26	2.7	NA	NA	NA	NA	NA	NA	326.73	11.54	315.19	NA
S-1 (D)	5/5/1995	710	NA	110	3.4	19	2.7	NA	NA	NA	NA	NA	NA	326.73	11.54	315.19	NA
S-1	5/21/1996	1,500	NA	170	8.5	120	6.7	NA	NA	NA	NA	NA	NA	326.73	8.88	317.85	NA
S-1	5/12/1997	4,700	NA	200	15	210	20	2,300	NA	NA	NA	NA	NA	326.73	11.19	315.54	2.4
S-1 (D)	5/12/1997	4,800	NA	210	16	190	16	3,200	2,900	NA	NA	NA	NA	326.73	11.19	315.54	2.4
S-1	5/8/1998	500	NA	18	2.1	2.3	2	1,000	NA	NA	NA	NA	NA	326.73	8.38	318.35	2.1
S-1	6/27/1999	2,970	NA	117	32.0	69.1	17.5	374	NA	NA	NA	NA	NA	326.73	8.79	317.94	2.4
S-1	4/28/2000	1,920	NA	50.5	15.0	67.2	46.7	276	NA	NA	NA	NA	NA	326.73	8.50	318.23	2.8
S-1	5/30/2001	3,900	NA	27	12	140	28	NA	140	NA	NA	NA	NA	326.73	8.18	318.55	2.6
S-1	6/17/2002	2,700	NA	25	11	51	14	NA	140	NA	NA	NA	NA	326.73	8.39	318.34	3.2

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	--------------	----------------------------	--------------------------	------------------------

S-1	5/30/2003	3,900	NA	12	8.2	47	12	NA	270	NA	NA	NA	NA	326.74	7.41	319.33	1.2
S-1	5/3/2004	3,700	NA	32	21	170	34	NA	410	NA	NA	NA	NA	326.74	11.18	315.56	2.4
S-1	1/14/2005	4,200	NA	22	34	380	33	NA	100	NA	NA	NA	NA	326.74	7.10	319.64	0.58
S-1	5/5/2005	5,000	NA	33	110	970	210	NA	190	<0.50	<0.50	0.95	630	326.74	11.32	315.42	NA
S-1	08/05/2005	4,600	NA	32	52	420	69	NA	110	<40	<40	<40	410	326.74	9.04	317.70	NA
S-1	9/16/2005	3,300	NA	14	28	280	43	NA	60	51	<10	<10	260	326.74	11.37	315.37	NA
S-1	11/8/2005	4,700	NA	19.2	47	416	84.0	NA	50.2	<0.500	<0.500	<0.500	<10.0	326.74	9.06	317.68	NA
S-1	1/31/2006	6,380	NA	21.0	33.1	280	31.0	NA	59.9	<0.500	<0.500	<0.500	306	326.74	8.12	318.62	NA
S-1	5/16/2006	9,080	NA	25.8	46.6	517	86.6 m	NA	69.5	<0.500	<0.500	<0.500	268	326.74	7.95	318.79	NA
S-1	8/23/2006	4,980	NA	19.0	22.7	74.7	38.7	NA	42.9	<0.500	<0.500	<0.500	252	326.74	7.95	318.79	NA
S-1	11/13/2006	7,900	NA	38	41	480	52	NA	44	<5.0	<5.0	<5.0	480	326.74	7.99	318.75	NA
S-1	2/1/2007	1,500	NA	18	15	110	17	NA	27	<10	<10	<10	640	326.74	8.19	318.55	NA
S-1	5/23/2007	5,300 n	NA	35	42	260	67.9	NA	<5.0	<10	<10	<10	720	326.74	10.50	316.24	NA
S-1	8/7/2007	6,900 n	NA	26	31	240	40.9 o	NA	30	<10	<10	<10	270	326.74	8.13	318.61	NA
S-1	11/29/2007	840 n	NA	16	18	120	14.5	NA	26	<2.0	<2.0	<2.0	190	326.74	9.40	317.34	NA
S-1	2/8/2008	4,500 n	NA	25	39	410	37	NA	28	<10	<10	<10	330	326.74	7.91	318.83	NA

S-2	1/25/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	4/16/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	10/18/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	8.83	317.76	NA
S-2	1/23/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	7/17/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	NA	NA	NA
S-2	1/23/1993	<50	140 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	8.10	318.49	NA
S-2	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	9.06	317.53	NA
S-2	9/22/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	8.91	317.68	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-2	12/8/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	9.07	317.52	NA
S-2	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	8.90	317.69	NA
S-2	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.59	8.98	317.61	NA
S-2	9/13/1994	<50	NA	<0.5	2.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	8.78	317.81	NA
S-2	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	8.60	317.99	NA
S-2	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.59	8.75	317.84	NA
S-2	5/12/1997	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	326.59	8.72	317.87	3.4
S-2	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	326.59	8.63	317.96	3.1
S-2	6/27/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.00	NA	NA	NA	NA	NA	326.59	8.79	317.80	2.6
S-2	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	326.59	8.33	318.26	2.0
S-2	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	326.59	8.56	318.03	1.8
S-2	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	326.59	8.87	317.72	i
S-2	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	18	NA	NA	NA	NA	326.47	7.89	318.58	1.7
S-2	5/3/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	510	NA	NA	NA	NA	326.47	5.44	321.03	0.1
S-2	1/14/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	270	NA	NA	NA	NA	326.47	7.88	318.59	NA
S-2	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	280	<0.50	<0.50	0.55	8.9 j	326.47	8.14	318.33	NA
S-2	08/05/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	320	<2.0	<2.0	<2.0	510	326.47	8.24	318.23	NA
S-2	9/16/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	320	<10	<10	<10	1,800	326.47	8.06	318.41	NA
S-2	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	375	<0.500	<0.500	0.610	1,130	326.47	8.20	318.27	NA
S-2	1/31/2006	281	NA	<0.500	<0.500	<0.500	<0.500	NA	354	<0.500	<0.500	<0.500	3,090	326.47	8.18	318.29	NA
S-2	5/16/2006	785	NA	<0.500	<0.500	<0.500	<0.500	NA	282	<0.500	<0.500	<0.500	3,250	326.47	8.34	318.13	NA
S-2	8/23/2006	344	NA	<0.500	<0.500	<0.500	<0.500	NA	194	<0.500	<0.500	0.560	10,600	326.47	8.32	318.15	NA
S-2	11/13/2006	320	NA	<5.0 f	<5.0 f	<5.0 f	<5.0 f	NA	140 f	<5.0 f	<5.0 f	<5.0 f	6,000 f	326.50	8.37	318.13	NA
S-2	2/1/2007	160	NA	<0.50	<0.50	<0.50	<1.0	NA	130	<2.0	<2.0	<2.0	3,900	326.50	8.13	318.37	NA
S-2	5/23/2007	120 n	NA	<0.50	<1.0	<1.0	<1.0	NA	110	<2.0	<2.0	<2.0	1,500	326.50	8.55	317.95	NA
S-2	8/7/2007	93 n,p	NA	<2.5	<5.0	<5.0	<5.0	NA	120	<10	<10	<10	1,700	326.50	8.26	318.24	NA
S-2	11/29/2007	110 n,p	NA	<0.50	<1.0	<1.0	<1.0	NA	98	<2.0	<2.0	<2.0	880	326.50	8.29	318.21	NA
S-2	2/8/2008	110 n,p	NA	<0.50	<1.0	<1.0	<1.0	NA	110	<2.0	<2.0	<2.0	830	326.50	8.07	318.43	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-3	1/25/1991	870	330	230	<2.5	130	<2.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	4/16/1991	190	140 a	12	0.8	6.2	1.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	7/24/1991	1,700	1,200 a	450	4.4	150	2.9	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	10/18/1991	1,900	500	370	3.1	120	220	NA	NA	NA	NA	NA	NA	327.38	9.64	317.74	NA
S-3	1/23/1992	2,000	650 a	580	3	200	<0.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	4/27/1992	1,100	230 a	150	<3	76	14	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	7/17/1992	810	58	200	<2.5	57	3.8	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	10/16/1992	440	190 c	79	1.8	18	4.6	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-3	1/23/1993	670	170 d	79	1.5	46	15	NA	NA	NA	NA	NA	NA	327.38	8.81	318.57	NA
S-3	4/28/1993	2,000	<50	300	3.4	210	38	NA	NA	NA	NA	NA	NA	327.38	9.87	317.51	NA
S-3	9/22/1993	4,800	670 a	2,000	34	150	51	NA	NA	NA	NA	NA	NA	327.38	9.65	317.73	NA
S-3	12/8/1993	1,200	11	440	<5.0	120	29	NA	NA	NA	NA	NA	NA	327.38	9.26	318.12	NA
S-3	3/4/1994	630	NA	130	<0.5	17	0.8	NA	NA	NA	NA	NA	NA	327.38	9.64	317.74	NA
S-3	6/16/1994	1,800	NA	430	19	35	21	NA	NA	NA	NA	NA	NA	327.38	9.78	317.60	NA
S-3	5/5/1995	160	NA	50	0.9	7.2	4.1	NA	NA	NA	NA	NA	NA	327.38	9.38	318.00	NA
S-3	5/21/1996	270	NA	45	<0.5	1.4	<0.5	NA	NA	NA	NA	NA	NA	327.38	9.41	317.97	NA
S-3 (D)	5/21/1996	210	NA	<0.5	<0.5	0.95	<0.5	NA	NA	NA	NA	NA	NA	327.38	9.41	317.97	NA
S-3	5/12/1997	420	NA	<1.0	<1.0	<1.0	<1.0	57	NA	NA	NA	NA	NA	327.38	9.30	318.08	2.5
S-3	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	327.38	9.12	318.26	2.2
S-3	6/27/1999	106	NA	8.51	<0.500	<0.500	<0.500	31.0	NA	NA	NA	NA	NA	327.38	9.39	317.99	2.1
S-3	4/28/2000	139	NA	7.58	<0.500	<0.500	<0.500	42.6	NA	NA	NA	NA	NA	327.38	9.04	318.34	1.8
S-3	5/30/2001	2,200	NA	510	6.9	100	21	NA	33	NA	NA	NA	NA	327.38	9.19	318.19	2.0
S-3	6/17/2002	600	NA	150	2.1	30	11	NA	36	NA	NA	NA	NA	327.38	9.35	318.03	0.1
S-3	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	9.0	NA	NA	NA	NA	327.04	8.39	318.65	1.2
S-3	5/3/2004	61 k	NA	0.90	<0.50	<0.50	<1.0	NA	9.8	NA	NA	NA	NA	327.04	8.73	318.31	1.2
S-3	1/14/2005	94	NA	4.6	<0.50	3.1	1.0	NA	13	NA	NA	NA	NA	327.04	8.00	319.04	NA
S-3	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	5.7	<0.50	<0.50	<0.50	<5.0	327.04	8.31	318.73	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-3	08/05/2005	<50	NA	0.51	<0.50	<0.50	<1.0	NA	6.0	<2.0	<2.0	<2.0	42	327.04	8.32	318.72	NA
S-3	9/16/2005	<50	NA	0.62	<0.50	<0.50	<1.0	NA	7.9	<2.0	<2.0	<2.0	<5.0	327.04	8.29	318.75	NA
S-3	11/8/2005	166	NA	63.0	1.32	7.20	2.99	NA	8.67	<0.500	<0.500	<0.500	<10.0	327.04	8.17	318.87	NA
S-3	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	7.05	<0.500	<0.500	<0.500	<10.0	327.04	8.05	318.99	NA
S-3	5/16/2006	<50.0	NA	3.23	<0.500	1.42	1.63 m	NA	3.92	<0.500	<0.500	<0.500	<10.0	327.04	8.62	318.42	NA
S-3	8/23/2006	<50.0	NA	18.9	<0.500	1.72	0.800	NA	7.65	<0.500	<0.500	<0.500	<10.0	327.04	8.54	318.50	NA
S-3	11/13/2006	530	NA	130 f	3.4 f	10 f	4.6 f	NA	17 f	<2.0 f	<2.0 f	<2.0 f	<80 f	327.01	8.65	318.36	NA
S-3	2/1/2007	430	NA	230	4.4	4.0	<5.0	NA	17	<10	<10	<10	<25	327.01	8.41	318.60	NA
S-3	5/23/2007	1,400 n	NA	370	11	17	11.58 o	NA	21	<2.0	<2.0	<2.0	12	327.01	8.37	318.64	NA
S-3	8/7/2007	1,000 n	NA	150	4.6 o	4.1 o	4.0 o	NA	21	<10	<10	<10	<50	327.01	8.59	318.42	NA
S-3	11/29/2007	710 n	NA	110	3.1	3.8	5.3 o	NA	17	<2.0	<2.0	<2.0	<10	327.01	8.78	318.23	NA
S-3	2/8/2008	300 n	NA	2.7	<1.0	<1.0	<1.0	NA	19	<2.0	<2.0	<2.0	<10	327.01	8.05	318.96	NA
S-4	1/25/1991	<50	<50	<0.5	1.5	<0.5	2.8	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	4/16/1991	<50	0.7	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	10/18/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	8.82	318.56	NA
S-4	1/23/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	7/17/1992	<500	74	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	10/16/1992	<500	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	NA	NA	NA
S-4	1/23/1993	<500	94 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	8.32	319.06	NA
S-4	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	9.76	317.62	NA
S-4	9/22/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.30	318.08	NA
S-4	12/8/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.74	317.64	NA
S-4	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.60	317.78	NA
S-4	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.38	9.42	317.96	NA
S-4	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	9.02	318.36	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-4	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.38	9.29	318.09	NA
S-4	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	140	NA	NA	NA	NA	NA	327.38	7.95	319.43	2.5
S-4	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	250	NA	NA	NA	NA	NA	327.38	8.96	318.42	2.0
S-4	6/27/1999	303	NA	35.8	24.8	12.4	69.8	106	NA	NA	NA	NA	NA	327.38	8.90	318.48	2.6
S-4	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	40.2	NA	NA	NA	NA	NA	327.38	8.37	319.01	1.9
S-4	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	6.8	NA	NA	NA	NA	327.38	8.83	318.55	1.8
S-4	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	31	NA	NA	NA	NA	327.38	9.37	318.01	4.8
S-4	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	130	NA	NA	NA	NA	327.24	8.46	318.78	1.4
S-4	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	170	NA	NA	NA	NA	327.24	8.70	318.54	1.1
S-4	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	25	NA	NA	NA	NA	327.24	8.17	319.07	NA
S-4	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	15	<0.50	<0.50	<0.50	<5.0	327.24	8.25	318.99	NA
S-4	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	6.1	<2.0	<2.0	<2.0	<5.0	327.24	8.14	319.10	NA
S-4	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.01	<0.500	<0.500	<0.500	<10.0	327.24	8.33	318.91	NA
S-4	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	327.24	8.29	318.95	NA
S-4	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	327.24	8.46	318.78	NA
S-4	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	327.24	8.34	318.90	NA
S-4	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<20	327.24	8.23	319.01	NA
S-4	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	327.24	8.56	318.68	NA
S-4	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	0.60 o	<2.0	<2.0	<2.0	<10	327.24	7.92	319.32	NA
S-4	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	0.32 o	<2.0	<2.0	<2.0	<10	327.24	8.52	318.72	NA
S-4	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	327.24	8.58	318.66	NA
S-4	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	327.24	8.07	319.17	NA
S-5	1/25/1991	<50	<50	<0.5	<0.5	<0.5	0.7	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	4/16/1991	<50	<50	<0.5	<0.5	<0.5	0.8	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	10/18/1991	120 e	<50	4.3	<0.5	1	0.7	NA	NA	NA	NA	NA	NA	327.76	10.00	317.76	NA
S-5	1/23/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-5	4/27/1992	50	<50	<0.5	<0.5	<0.5	0.6	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	7/17/1992	<50	70	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	10/16/1992	230	57	13	<0.5	4.9	4.3	NA	NA	NA	NA	NA	NA	327.76	NA	NA	NA
S-5	1/23/1993	<50	150 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	8.88	318.88	NA
S-5	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	10.20	317.56	NA
S-5	9/22/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	9.92	317.84	NA
S-5	12/8/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	10.19	317.57	NA
S-5	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	9.95	317.81	NA
S-5	6/16/1994	<50	NA	0.9	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	10.02	317.74	NA
S-5	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	9.58	318.18	NA
S-5	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	327.76	9.84	317.92	NA
S-5	5/12/1997	360	NA	3.3	<0.50	17	9.8	130	NA	NA	NA	NA	NA	327.76	9.16	318.60	4.2
S-5	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	92	NA	NA	NA	NA	NA	327.76	9.25	318.51	3.8
S-5 (D)	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	100	NA	NA	NA	NA	NA	327.76	9.25	318.51	3.8
S-5	6/27/1999	223	NA	13.7	12.9	8.20	45.8	106	NA	NA	NA	NA	NA	327.76	9.39	318.37	3.0
S-5	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	255	NA	NA	NA	NA	NA	327.76	9.43	318.33	1.2
S-5	5/30/2001	<100	NA	<1.0	<1.0	<1.0	<1.0	NA	480	NA	NA	NA	NA	327.76	9.47	318.29	1.1
S-5	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	210	NA	NA	NA	NA	327.76	9.74	318.02	0.2
S-5	5/30/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	450	NA	NA	NA	NA	327.43	8.87	318.56	1.7
S-5	5/3/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	470	NA	NA	NA	NA	327.43	9.10	318.33	0.7
S-5	1/14/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	230	NA	NA	NA	NA	327.43	8.43	319.00	NA
S-5	5/5/2005	76	NA	16	<0.50	<0.50	<0.50	NA	120	<0.50	<0.50	<0.50	630	327.43	8.71	318.72	NA
S-5	08/05/2005	1,900	NA	57	7.5	22	17	NA	240	<4	<4	<4	480	327.43	8.90	318.53	NA
S-5	9/16/2005	1,400	NA	87	2.0	7.8	5.8	NA	75	<4.0	<4.0	<4.0	630	327.43	8.84	318.59	NA
S-5	11/8/2005	315	NA	35.8	<0.500	<0.500	1.07	NA	49.1	<0.500	<0.500	<0.500	<10.0	327.43	8.86	318.57	NA
S-5	1/31/2006	335	NA	7.74	<0.500	<0.500	<0.500	NA	48.2	<0.500	<0.500	<0.500	337	327.43	8.66	318.77	NA
S-5	5/16/2006	349	NA	3.54	<0.500	<0.500	<0.500	NA	24.7	<0.500	<0.500	<0.500	182	327.43	9.00	318.43	NA
S-5	8/23/2006	<50.0	NA	5.39	<0.500	<0.500	<0.500	NA	17.0	<0.500	<0.500	<0.500	91.0	327.43	8.97	318.46	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-5	11/13/2006	420	NA	19	1.7	<0.50	1.7	NA	19	<0.50	<0.50	<0.50	80	327.43	8.77	318.66	NA
S-5	2/1/2007	280	NA	14	2.1	<0.50	1.4	NA	13	<2.0	<2.0	<2.0	42	327.43	9.30	318.13	NA
S-5	5/23/2007	590 n	NA	19	2.0	<1.0	0.92 o	NA	11	<2.0	<2.0	<2.0	24	327.43	8.73	318.70	NA
S-5	8/7/2007	450 n	NA	10	1.0	<1.0	<1.0	NA	13	<2.0	<2.0	<2.0	17	327.43	9.00	318.43	NA
S-5	11/29/2007	340 n	NA	4.1	0.34 o	<1.0	<1.0	NA	7.1	<2.0	<2.0	<2.0	<10	327.43	9.06	318.37	NA
S-5	2/8/2008	270 n	NA	4.7	<1.0	<1.0	<1.0	NA	6.0	<2.0	<2.0	<2.0	<10	327.43	8.75	318.68	NA
S-6	1/25/1991	<50	<50	<0.5	1.7	<0.5	2.8	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	4/16/1991	<50	<50	<0.5	<0.5	<0.5	0.6	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	7/24/1991	<50	<50	<0.5	<0.5	<0.5	0.5	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	10/18/1991	<50	<50	<0.5	<0.5	<0.5	0.5	NA	NA	NA	NA	NA	NA	326.56	8.84	317.22	NA
S-6	1/23/1992	<50	<50	<0.5	<0.5	<0.5	0.5	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	7/17/1992	400	130	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	NA	NA	NA
S-6	1/23/1993	<50	230 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	7.82	318.74	NA
S-6	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	9.00	317.56	NA
S-6	9/22/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	8.61	317.96	NA
S-6	12/8/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	10.02	316.54	NA
S-6	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	8.88	317.68	NA
S-6	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	9.04	317.52	NA
S-6	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	8.54	318.02	NA
S-6	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.56	8.62	317.94	NA
S-6	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	326.56	8.60	317.96	2.6
S-6	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	326.56	7.90	318.66	2.2
S-6	6/27/1999	430	NA	50.1	30.5	15.2	83.5	8.05	NA	NA	NA	NA	NA	326.56	8.01	318.55	2.3
S-6	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	326.56	8.84	317.72	2.0
S-6	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	326.56	8.54	318.02	1.9

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-6	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	326.56	8.48	318.08	1.3
S-6	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	8.7	NA	NA	NA	NA	326.35	7.36	318.99	1.0
S-6	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	326.35	8.08	318.27	0.9
S-6	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	326.35	7.38	318.97	NA
S-6	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	326.35	7.55	318.80	NA
S-6	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	326.35	7.61	318.74	NA
S-6	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	326.35	7.64	318.71	NA
S-6	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	30.5	326.35	7.90	318.45	NA
S-6	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	326.35	8.16	318.19	NA
S-6	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	10.9	326.35	7.77	318.58	NA
S-6	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<20	326.35	8.15	318.20	NA
S-6	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.2	<2.0	<2.0	<2.0	<5.0	326.35	8.36	317.99	NA
S-6	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	326.35	7.80	318.55	NA
S-6	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	0.39 o	<2.0	<2.0	<2.0	<10	326.35	8.07	318.28	NA
S-6	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	326.35	8.17	318.18	NA
S-6	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	326.35	7.67	318.68	NA
S-7	1/25/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	4/16/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	10/18/1991	<50	140 f	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	8.92	317.57	NA
S-7	1/23/1992	<50	140 f	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	7/17/1992	<50	<50	<0.5	1.8	0.6	4.1	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	NA	NA	NA
S-7	1/23/1993	<50	110 b	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	8.06	318.43	NA
S-7	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	8.94	317.55	NA
S-7	9/22/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	8.57	317.92	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-7	12/8/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	9.00	317.49	NA
S-7	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	8.96	317.53	NA
S-7	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.49	9.12	317.37	NA
S-7	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	8.58	317.91	NA
S-7	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	326.49	8.64	317.85	NA
S-7	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	326.49	8.74	317.75	2.3
S-7	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	326.49	8.00	318.49	2.5
S-7	6/27/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.00	NA	NA	NA	NA	NA	326.49	8.75	317.74	2.9
S-7	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	326.49	8.96	317.53	2.2
S-7	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	326.49	8.65	317.84	2.0
S-7	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	326.49	8.55	317.94	2.3
S-7	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	12	NA	NA	NA	NA	326.36	7.88	318.48	1.8
S-7	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	100	NA	NA	NA	NA	326.36	8.30	318.06	1.2
S-7	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	41	NA	NA	NA	NA	326.36	7.70	318.66	NA
S-7	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	91	<0.50	<0.50	6.8	<5.0	326.36	7.60	318.76	NA
S-7	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	100	<2.0	<2.0	7.5	<5.0	326.36	8.42	317.94	NA
S-7	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	124	<0.500	<0.500	8.70	<10.0	326.36	7.61	318.75	NA
S-7	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	93.0	<0.500	<0.500	4.50	<10.0	326.36	7.85	318.51	NA
S-7	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	76.3	<0.500	<0.500	2.98	<10.0	326.36	8.08	318.28	NA
S-7	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	34.7	<0.500	<0.500	2.02	<10.0	326.36	7.93	318.43	NA
S-7	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	27	<0.50	<0.50	1.6	<20	326.36	8.15	318.21	NA
S-7	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	45	<2.0	<2.0	2.9	28	326.36	8.35	318.01	NA
S-7	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	1.7	<2.0	<2.0	<2.0	<10	326.36	8.11	318.25	NA
S-7	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	23	<2.0	<2.0	<2.0	<10	326.36	8.36	318.00	NA
S-7	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	10	<2.0	<2.0	<2.0	<10	326.36	8.19	318.17	NA
S-7	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	9.2	<2.0	<2.0	<2.0	<10	326.36	7.73	318.63	NA
S-8	1/25/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-8	4/16/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	7/24/1991	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	10/18/1991	<50	360 f	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.62	317.70	NA
S-8	1/23/1992	<50	90	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	4/27/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	7/17/1992	53	<50	<0.5	1	<0.5	1.8	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	10/16/1992	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	NA	NA	NA
S-8	1/23/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.00	318.32	NA
S-8	4/28/1993	<50	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.77	317.55	NA
S-8	9/22/1993	<50	160	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.67	317.65	NA
S-8	12/8/1993	<50	210	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.76	317.56	NA
S-8	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.66	317.66	NA
S-8	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.78	317.54	NA
S-8	5/5/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.42	317.90	NA
S-8	5/21/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	325.32	7.50	317.82	NA
S-8	5/12/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	325.32	7.56	317.76	1.6
S-8	5/8/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	325.32	7.64	317.68	2.0
S-8	6/27/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.00	NA	NA	NA	NA	NA	325.32	7.75	317.57	2.3
S-8	4/28/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	325.32	8.02	317.30	1.8
S-8	5/30/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	325.32	7.34	317.98	1.8
S-8	6/17/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	325.32	7.45	317.87	1.8
S-8	5/30/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	14	NA	NA	NA	NA	325.03	7.39	317.64	3.0
S-8	5/3/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	325.03	7.00	318.03	1.0
S-8	1/14/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	325.03	8.65	316.39	NA
S-8	5/5/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	325.03	6.73	318.30	NA
S-8	8/5/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	325.03	6.93	318.10	NA
S-8	11/8/2005	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	325.03	6.95	318.08	NA
S-8	1/31/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	325.03	6.91	318.12	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-8	5/16/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	325.03	7.02	318.01	NA
S-8	8/23/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	325.03	6.98	318.05	NA
S-8	11/13/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<20	325.03	7.09	317.94	NA
S-8	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	325.03	7.27	317.76	NA
S-8	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.03	6.80	318.23	NA
S-8	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.03	7.04	317.99	NA
S-8	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.03	7.04	317.99	NA
S-8	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.03	6.77	318.26	NA
S-9	11/22/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	325.89	7.61	318.28	NA
S-9	11/27/2006	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	325.89	7.77	318.12	NA
S-9	2/1/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	325.89	8.14	317.75	NA
S-9	5/23/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.89	7.85	318.04	NA
S-9	8/7/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.89	7.77	318.12	NA
S-9	11/29/2007	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.89	7.99	317.90	NA
S-9	2/8/2008	<50 n	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	325.89	7.78	318.11	NA
EW-2	12/14/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	6.25	NA	NA
EW-2	2/8/2008	70 n,p	NA	<0.50	<1.0	<1.0	<1.0	NA	8.9	<2.0	<2.0	<2.0	940	NA	8.42	NA	NA

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	--------------	----------------------------	--------------------------	------------------------

Abbreviations:

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to May 30, 2001 analyzed by EPA Method 8015.

TEPH = Total petroleum hydrocarbons as diesel by modified EPA Method 8015.

BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to May 30, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260B

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260B

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260B

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260B

TOC = Top of Casing Elevation

TOB = Top of Wellbox Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ug/L = Parts per billion

ppm = Parts per million

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

**TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
5251 Hopyard Road
Pleasanton, CA**

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	--------------	----------------------------	--------------------------	------------------------

Notes:


- a = Compounds detected as TEPH appear to be the less volatile constituents of gasoline.
- b = The concentration reported as TEPH primarily due to the presence of a heavier petroleum product.
- c = The concentration reported as TEPH due to the presence of a lighter petroleum product.
- d = Concentrations reported as diesel includes a heavier petroleum product.
- e = Compounds detected within the chromatographic range of TEPH but not characteristic of the standard gasoline pattern.
- f = There was insufficient preservative to reduce the sample pH to less than 2.
- g = Compounds detected within the chromatographic range of TEPH but not characteristic of the standard diesel pattern.
- h = The chromatographic pattern of the purgeable hydrocarbons found in the sample is similar to the pattern of weathered gasoline.
- i = DO reading not taken.
- j = The results may be biased slightly high.
- k = The hydrocarbon reported in the gasoline range does not match the laboratory standard.
- l = Extracted out of holding time.
- m = Analyte was detected in the associated Method Blank.
- n = Analyzed by EPA Method 8015B (M).
- o = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
- p = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Site surveyed April 16, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.

Beginning May 30, 2003, depth to water referenced to Top of Casing elevation.

Wells S-2, S-3 and S-9 were surveyed on November 22, 2006 by Mid Coast Engineers.

FIGURES

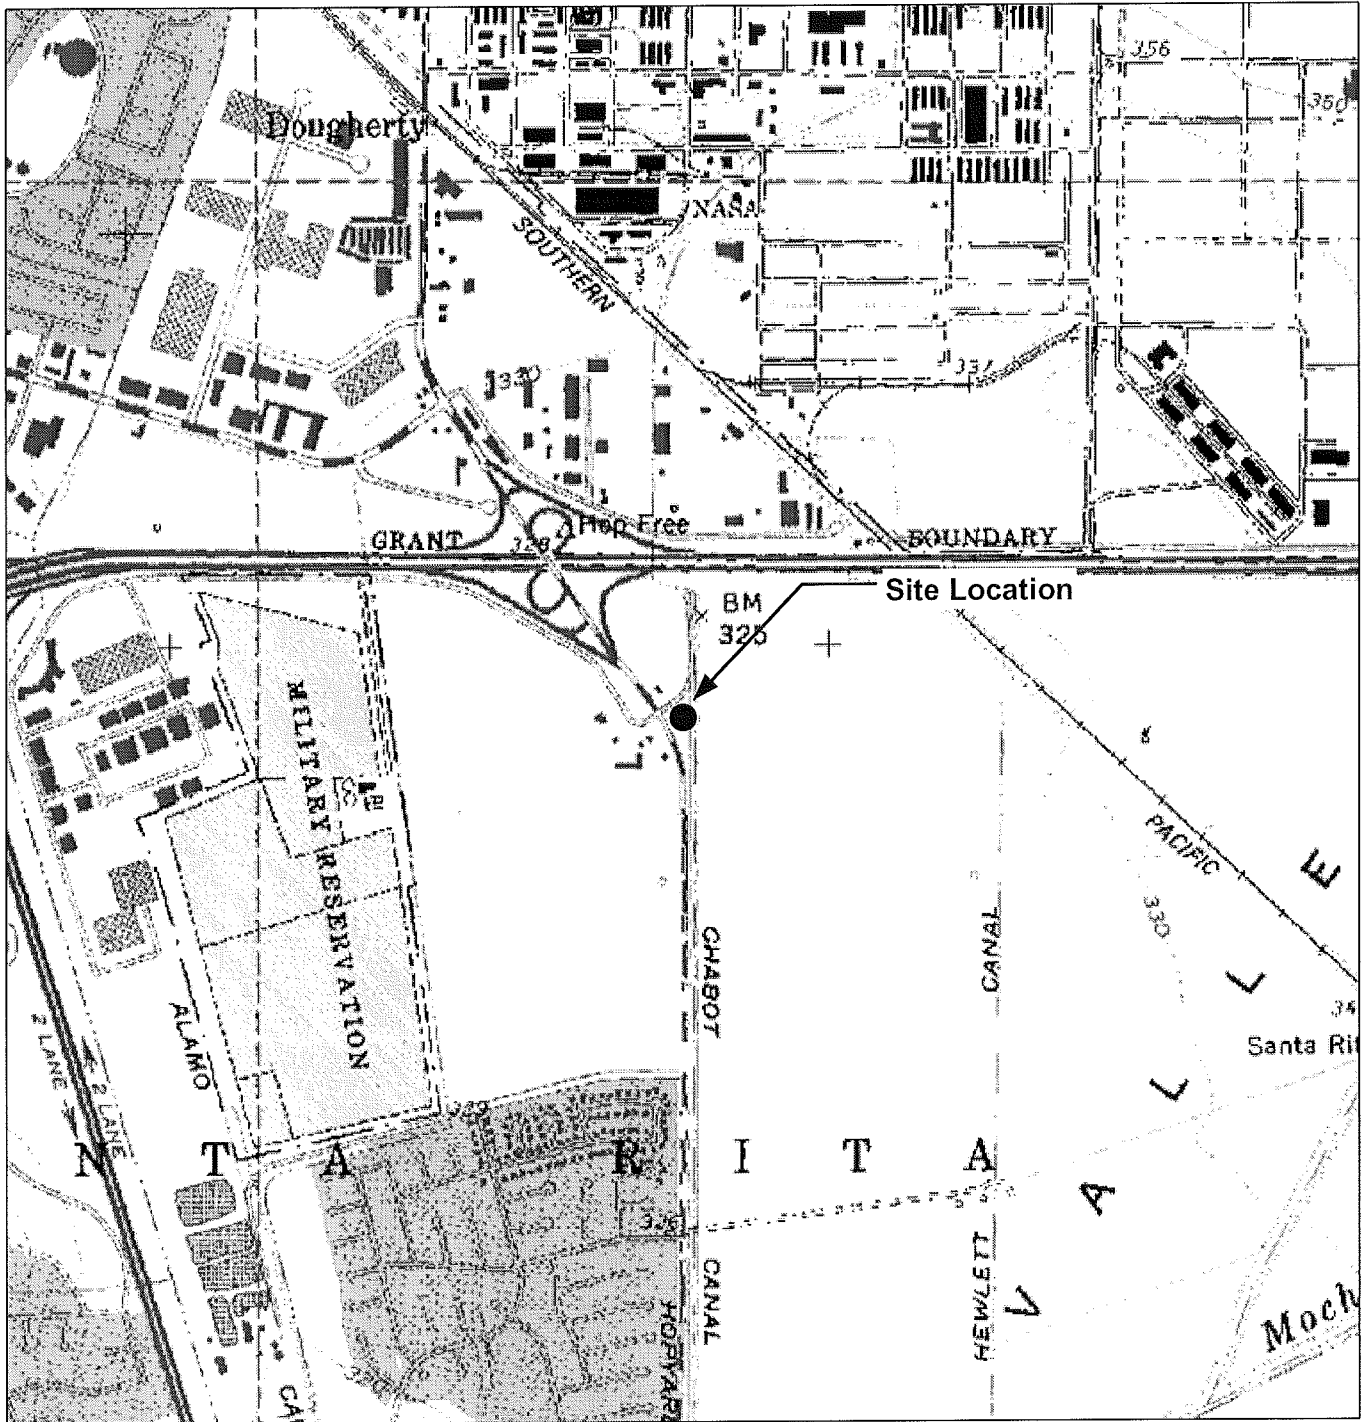

Site Location

GENERAL NOTES:
 Base Map from: DeLorme Yarmouth, ME 04096
 Source Data: USGS



QUADRANGLE LOCATION





FIGURE 1
 SITE LOCATION MAP

SHELL-BRANDED SERVICE STATION
 5251 Hopyard Road
 Pleasanton, California

PROJECT NO. SJ52-51H-1.2005	DRAWN BY V. F. 3/31/05
FILE NO. SJ52-51H-1.2005	PREPARED BY VF
REVISION NO.	REVIEWED BY



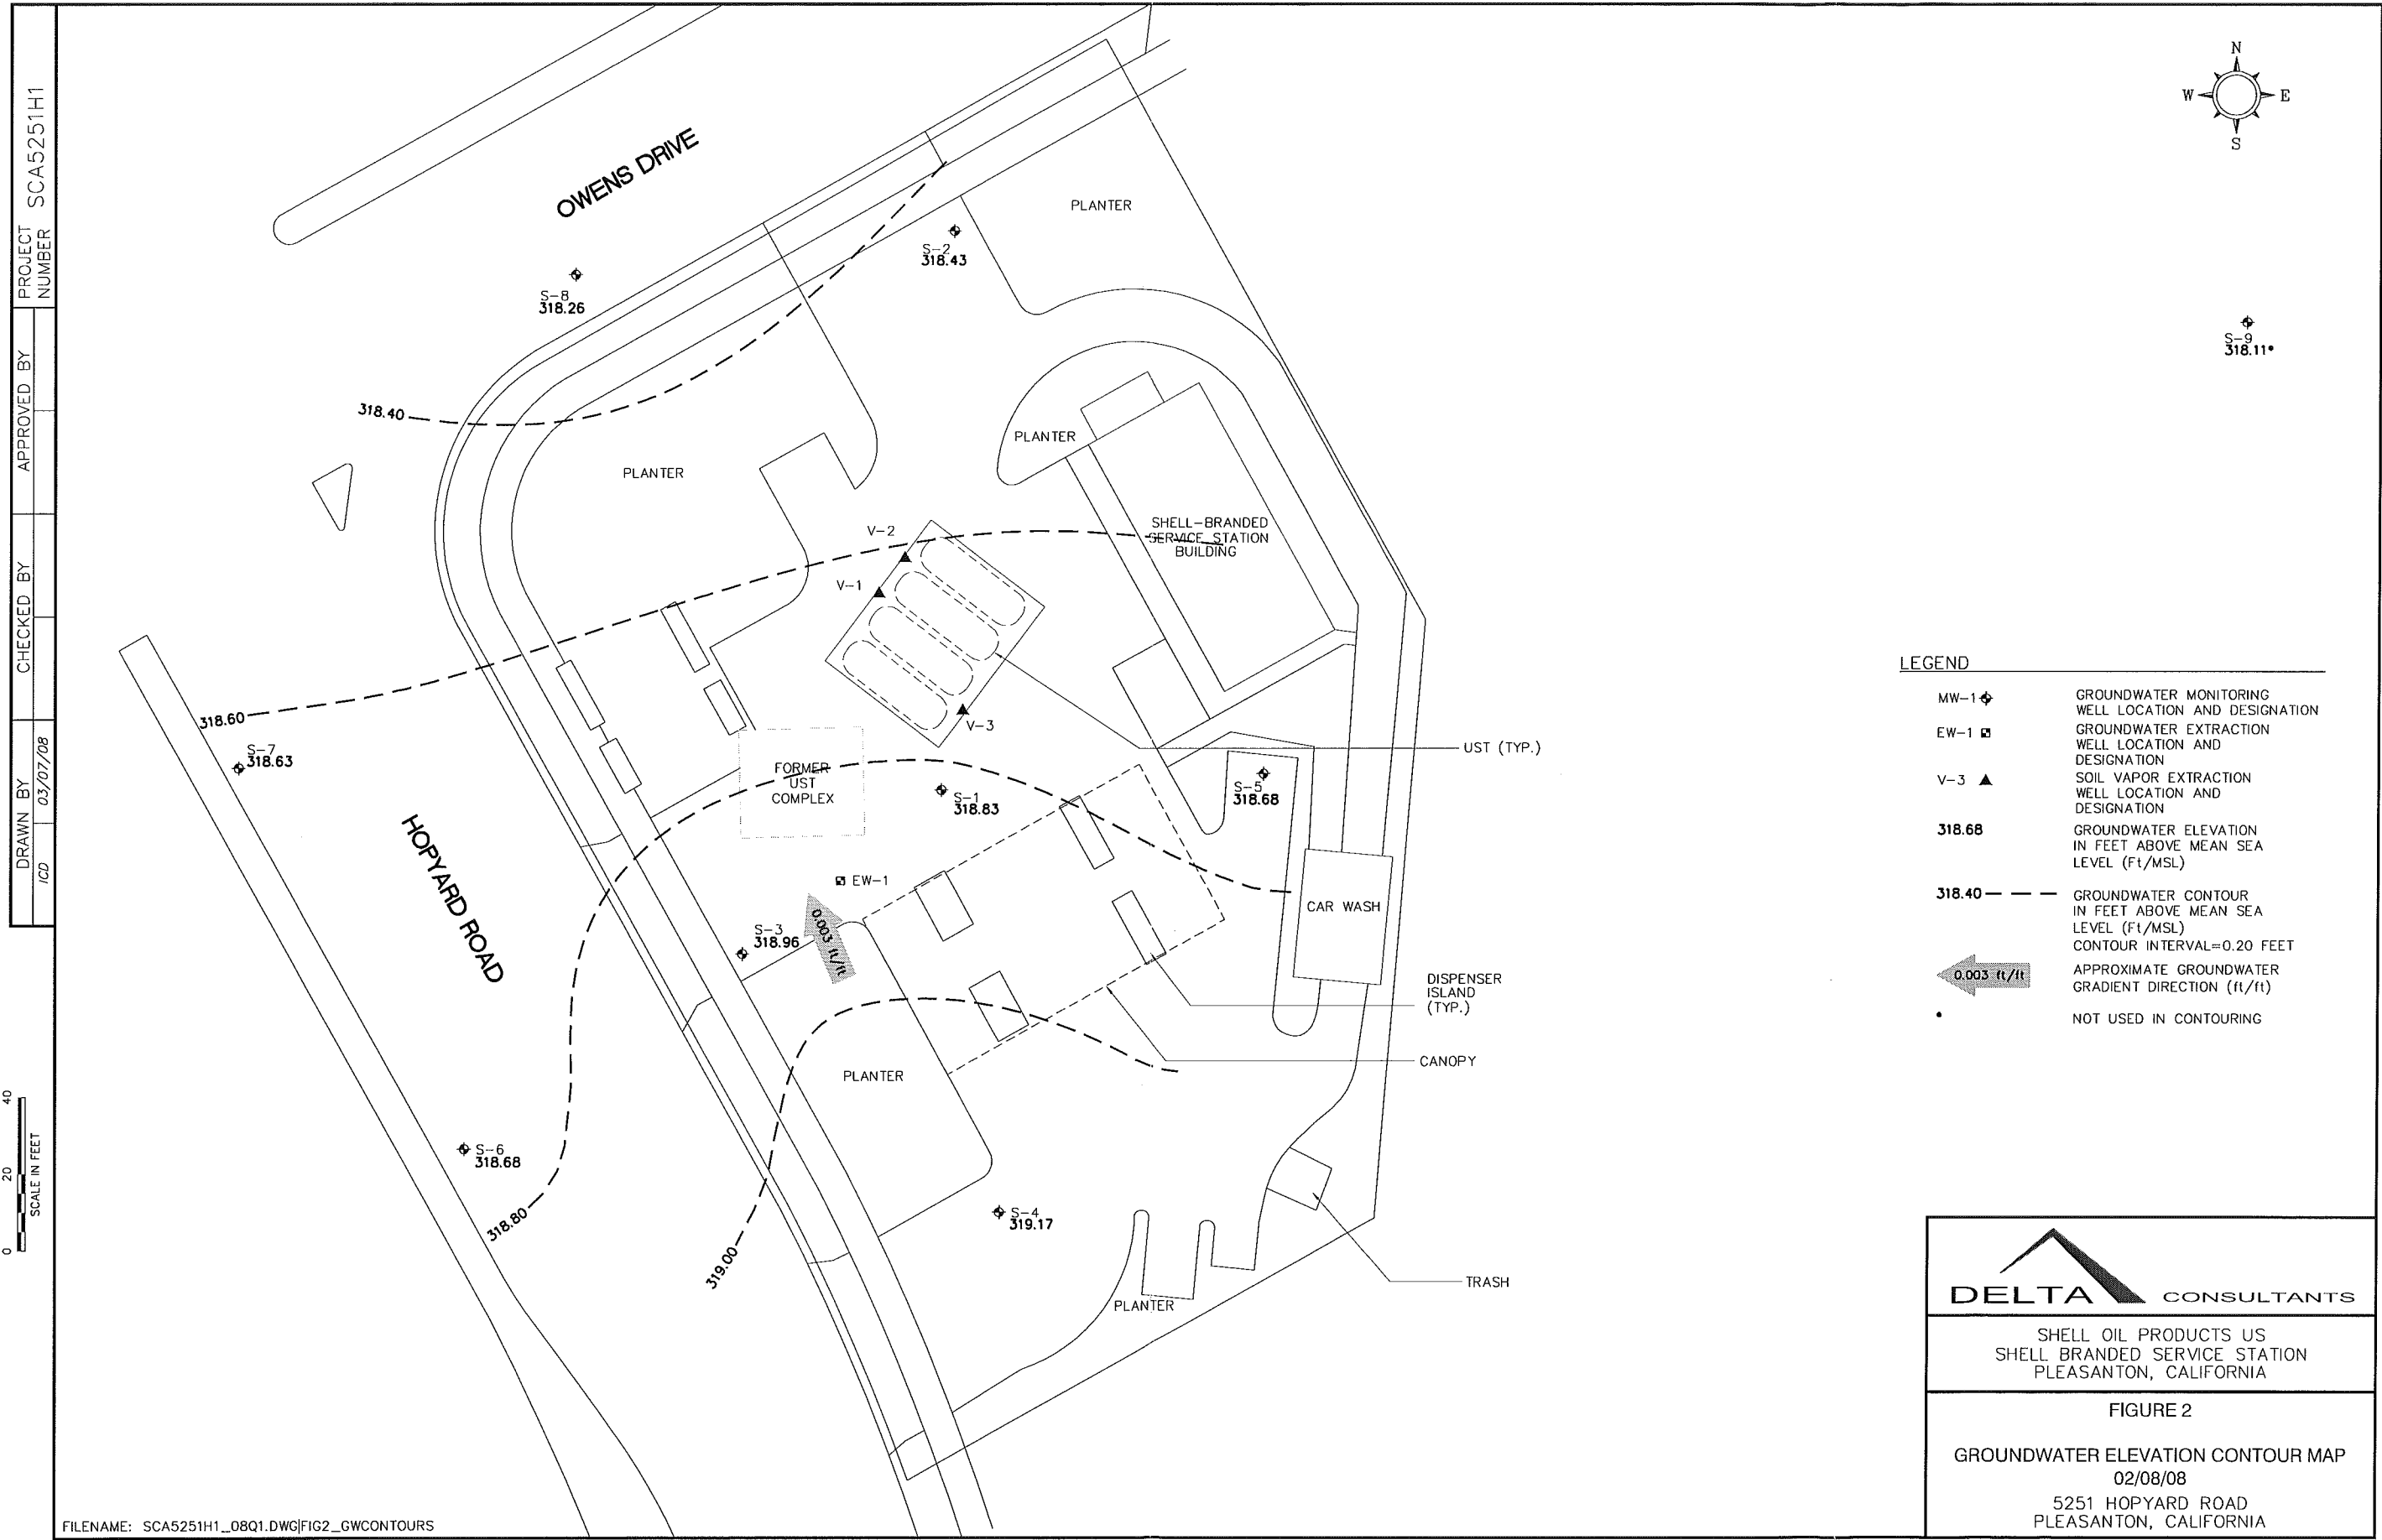

PROJECT NUMBER SCA5251H1
 APPROVED BY
 CHECKED BY
 DRAWN BY ICD 03/07/08

SCALE IN FEET
 0 20 40

LEGEND

MW-1 ◆	GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
EW-1 □	GROUNDWATER EXTRACTION WELL LOCATION AND DESIGNATION
V-3 ▲	SOIL VAPOR EXTRACTION WELL LOCATION AND DESIGNATION
318.68	GROUNDWATER ELEVATION IN FEET ABOVE MEAN SEA LEVEL (Ft/MSL)
318.40 - - -	GROUNDWATER CONTOUR IN FEET ABOVE MEAN SEA LEVEL (Ft/MSL) CONTOUR INTERVAL=0.20 FEET
← 0.003 ft/ft	APPROXIMATE GROUNDWATER GRADIENT DIRECTION (ft/ft)
•	NOT USED IN CONTOURING




DELTA CONSULTANTS

SHELL OIL PRODUCTS US
 SHELL-BRANDED SERVICE STATION
 PLEASANTON, CALIFORNIA

FIGURE 2

GROUNDWATER ELEVATION CONTOUR MAP
 02/08/08
 5251 HOPYARD ROAD
 PLEASANTON, CALIFORNIA

PROJECT NUMBER SCA5251H1
 DRAWN BY /CD
 CHECKED BY 03/07/08
 APPROVED BY

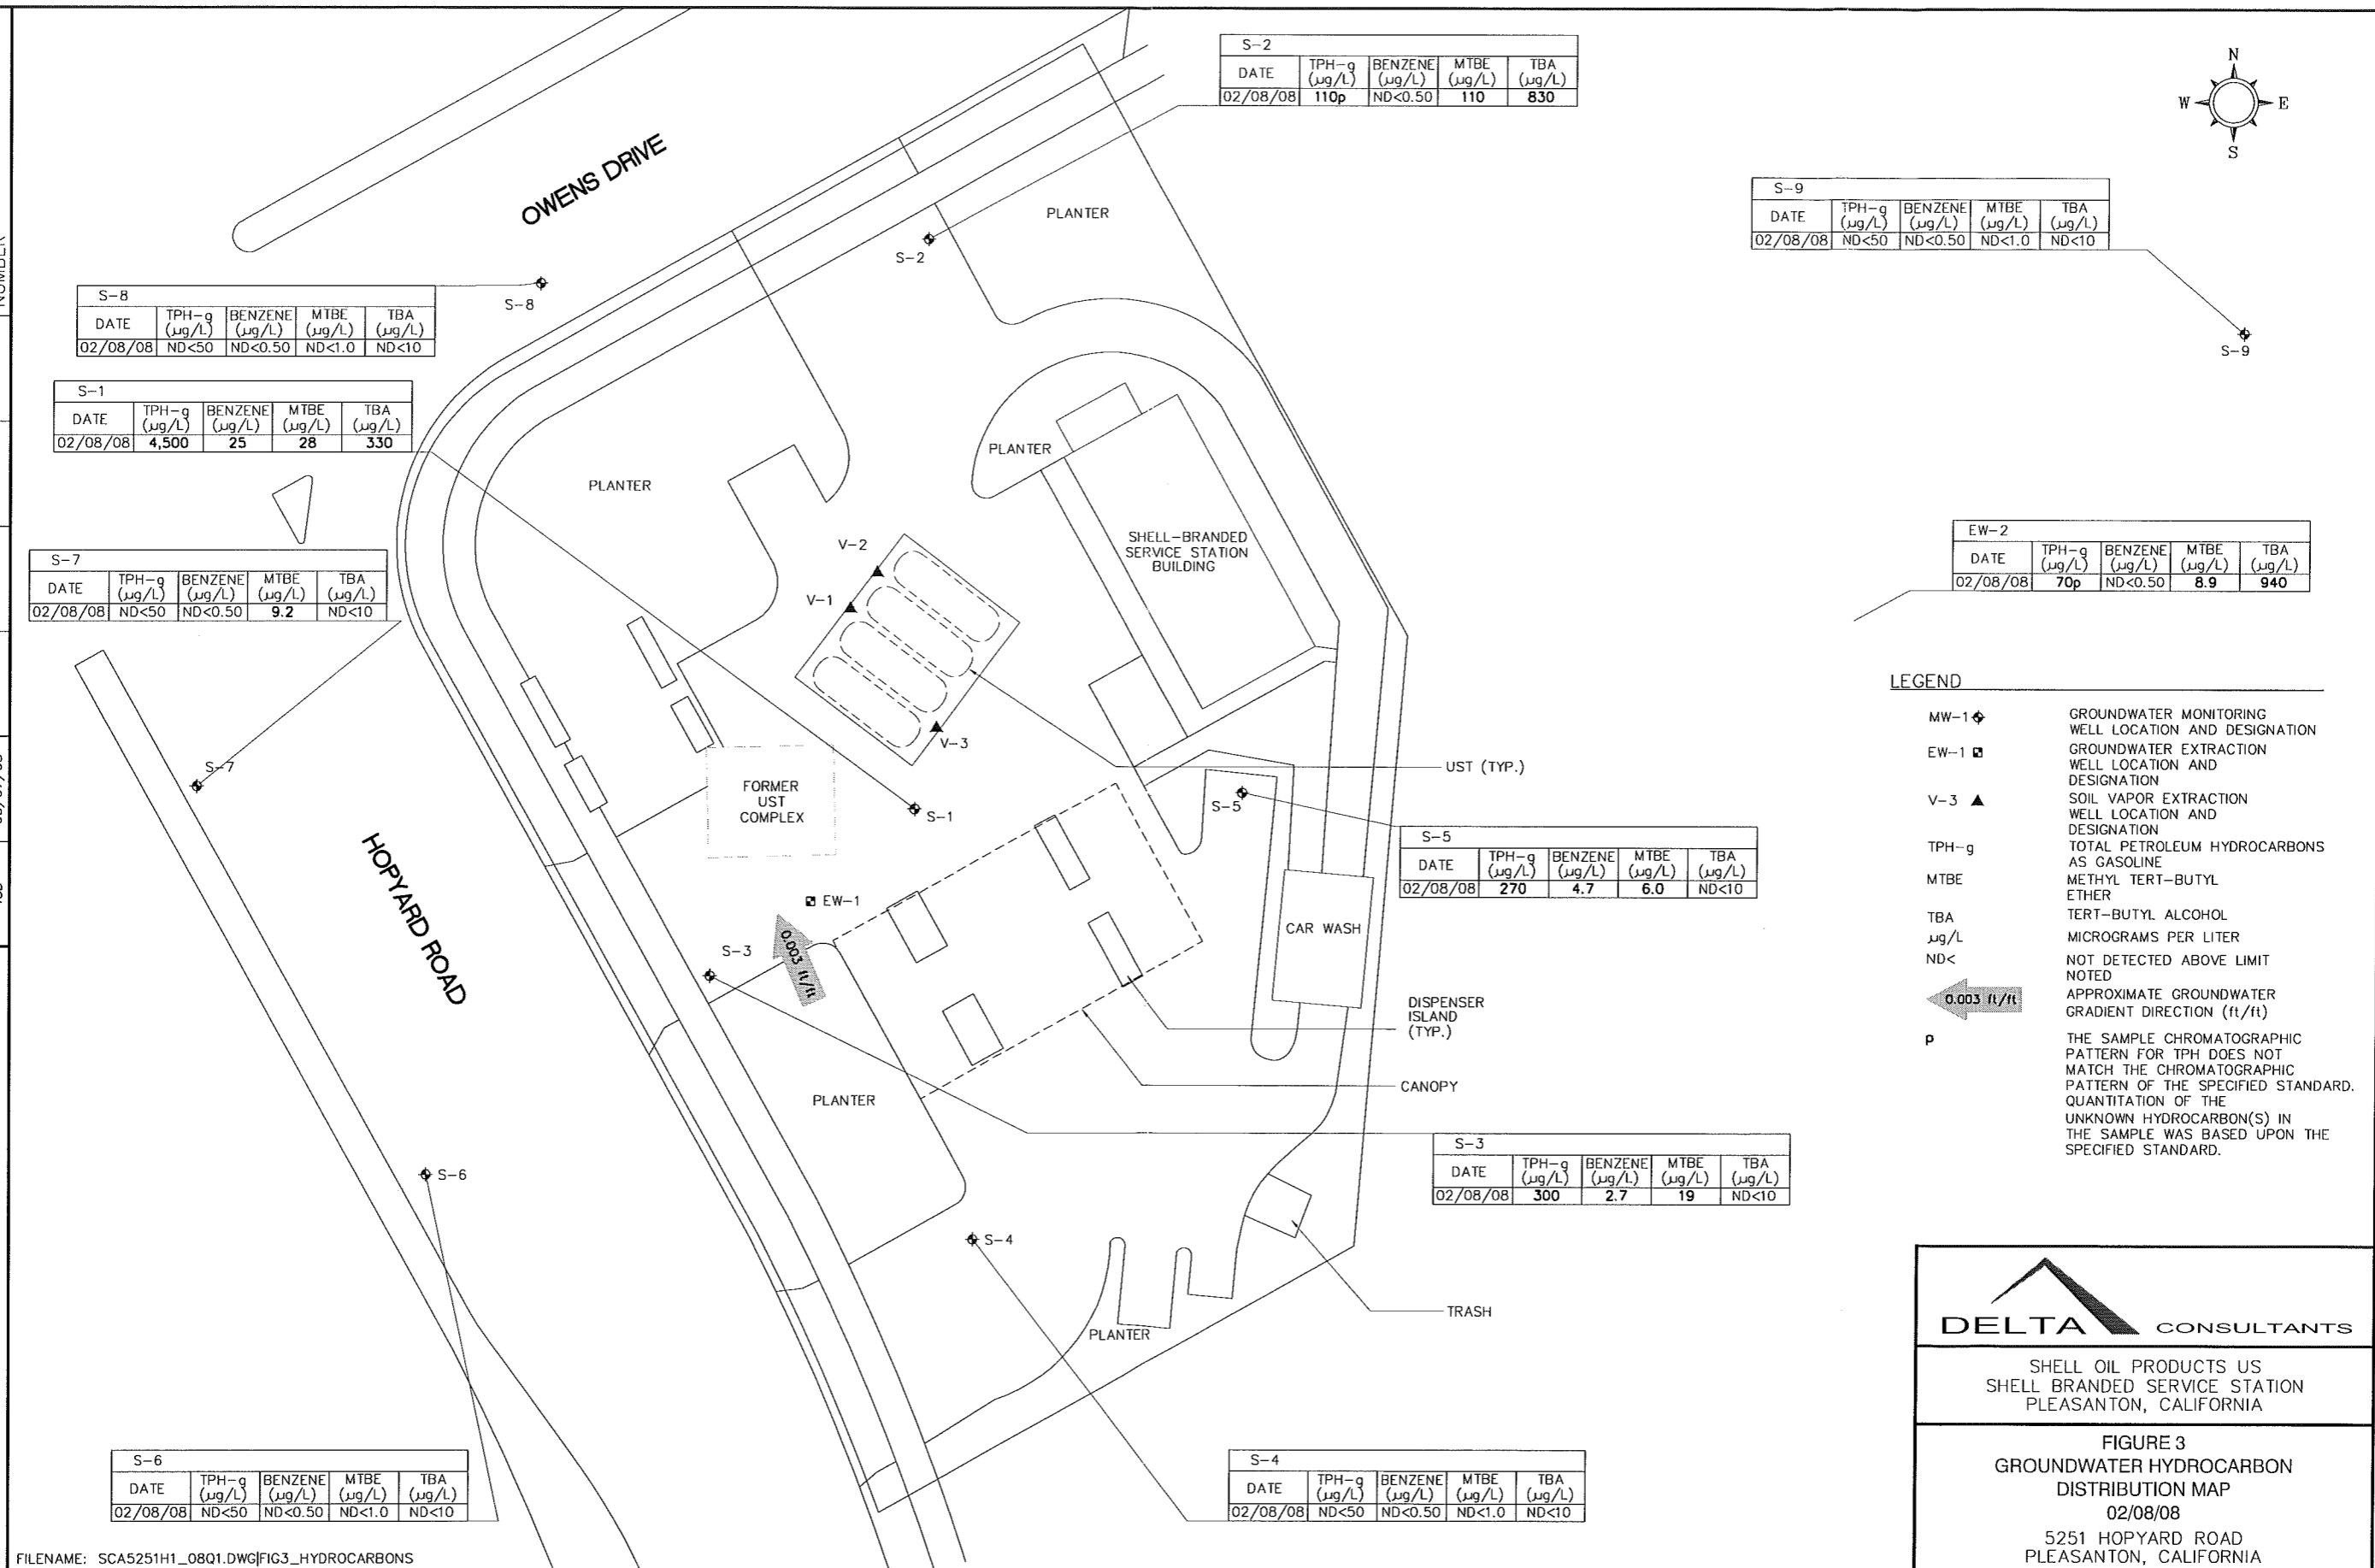

S-8				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	ND<50	ND<0.50	ND<1.0	ND<10

S-1				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	4,500	25	28	330

S-7				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	ND<50	ND<0.50	9.2	ND<10

S-2				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	110p	ND<0.50	110	830

S-9				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	ND<50	ND<0.50	ND<1.0	ND<10

EW-2				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	70p	ND<0.50	8.9	940

S-5				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	270	4.7	6.0	ND<10

S-3				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	300	2.7	19	ND<10

S-6				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	ND<50	ND<0.50	ND<1.0	ND<10

S-4				
DATE	TPH-g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
02/08/08	ND<50	ND<0.50	ND<1.0	ND<10

- LEGEND**
- MW-1 GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
 - EW-1 GROUNDWATER EXTRACTION WELL LOCATION AND DESIGNATION
 - V-3 SOIL VAPOR EXTRACTION WELL LOCATION AND DESIGNATION
 - TPH-g TOTAL PETROLEUM HYDROCARBONS AS GASOLINE
 - MTBE METHYL TERT-BUTYL ETHER
 - TBA TERT-BUTYL ALCOHOL
 - µg/L MICROGRAMS PER LITER
 - ND< NOT DETECTED ABOVE LIMIT NOTED
 - APPROXIMATE GROUNDWATER GRADIENT DIRECTION (ft/ft)
 - THE SAMPLE CHROMATOGRAPHIC PATTERN FOR TPH DOES NOT MATCH THE CHROMATOGRAPHIC PATTERN OF THE SPECIFIED STANDARD. QUANTIFICATION OF THE UNKNOWN HYDROCARBON(S) IN THE SAMPLE WAS BASED UPON THE SPECIFIED STANDARD.



SHELL OIL PRODUCTS US
 SHELL BRANDED SERVICE STATION
 PLEASANTON, CALIFORNIA

FIGURE 3
 GROUNDWATER HYDROCARBON
 DISTRIBUTION MAP
 02/08/08

5251 HOPYARD ROAD
 PLEASANTON, CALIFORNIA

APPENDIX A

FIELD DATA SHEETS

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address S251 HOPYARD RD, PLEASANTON, CA Date 02/08/08
 Job Number 080208-WM1 Technician MM Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
S-1								X	NO TAG; 1/2 BOLTS MISSING
S-2								X	NO TAG
S-3								X	NO TAG
S-4								X	NO TAG
S-5								X	NO TAG
S-6								X	NO TAG
S-7								X	NO TAG
S-8								X	NO TAG / CHRISTY BOX
S-9								X	NO TAG
EW-2								X	NO TAG

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: _____

WELL GAUGING DATA

Project # D80208-WM1 Date 02/08/08 Client SHELL

Site S251 HOPKARD RD, PLEASANTON, CA

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	Notes
S-1	0734	3	odor				7.91	28.52		
S-2	0728	4 3					8.07	24.12		
S-3	0746	3					8.05	24.08		
S-4	0749	3					8.07	24.18		
S-5	0741	3					8.75	24.13		
S-6	1300	3					7.67	25.50		Tr
S-7	1315	3					7.73	25.01		Tr
S-8	1131	3					6.77	24.67		Tr
S-9	0756	2					7.78	19.82		
EW-2	0738	6					8.42	25.87		

SHELL WELL MONITORING DATA SHEET

BTS #: <u>080208-WW1</u>	Site: <u>98995843</u>
Sampler: <u>WW</u>	Date: <u>02/08/08</u>
Well I.D.: <u>S-1</u>	Well Diameter: 2 <u>(3)</u> 4 6 8
Total Well Depth (TD): <u>28.52</u>	Depth to Water (DTW): <u>7.91</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>12.03</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing
 Other: _____

7.6 (Gals.) X	3	= 22.8 Gals.
1 Case Volume	Specified Volumes	Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
30 0959	61.3	7.8	1411	264	7.6	6 dor
45 1000	62.4	7.8	1371	207	15.2	"
1002	62.5	7.7	1371	195	22.8	"

Did well dewater? Yes No Gallons actually evacuated: 22.8

Sampling Date: 02/08/08 Sampling Time: 1007 Depth to Water: 11.22

Sample I.D.: S-1 Laboratory: STL Other CAL SCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see WOC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 020208-WW1	Site: 98995843
Sampler: WW	Date: 02/08/08
Well I.D.: S-2	Well Diameter: 2 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): 24.12	Depth to Water (DTW): 8.07
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <input checked="" type="radio"/> PVC <input type="radio"/> Grade	D.O. Meter (if req'd): YSI <input type="radio"/> HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.28	

Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible

Waterra Peristaltic Extraction Pump Other _____

Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing

Other: _____

$5.9 \text{ (Gals.)} \times 3 = 17.7 \text{ Gals.}$ <p style="font-size: small; margin: 0;">1 Case Volume Specified Volumes Calculated Volume</p>	<table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
35 0857	59.0	7.7	2995	800	5.9	
30 0858	60.2	7.6	2992	349	11.8	
25 0859	61.2	7.6	2910	272	17.7	

Did well dewater? Yes No Gallons actually evacuated: 17.7

Sampling Date: 02/08/08 Sampling Time: 0904 Depth to Water: 10.35

Sample I.D.: S-2 Laboratory: STL Other: CALSUIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see loc

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>080208-WW1</u>	Site: <u>98995843</u>
Sampler: <u>WW</u>	Date: <u>02/08/08</u>
Well I.D.: <u>S-3</u>	Well Diameter: 2 <input type="radio"/> 3 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): <u>24.08</u>	Depth to Water (DTW): <u>8.05</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.26</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

$\frac{5.9 \text{ (Gals.)} \times 3 \text{ Specified Volumes}}{1 \text{ Case Volume}} = 17.7 \text{ Gals. Calculated Volume}$	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
25 0940	58.7	7.5	1965	145	5.9	odor
20 0941	59.8	7.3	1958	113	11.8	"
15 0942	59.8	7.3	1960	122	17.7	"

Did well dewater? Yes No Gallons actually evacuated: 17.7

Sampling Date: 02/08/08 Sampling Time: 0947 Depth to Water: 10.46

Sample I.D.: S-3 Laboratory: STL Other CALSCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see loc

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 08 0208-WW1	Site: 989 95843
Sampler: MW	Date: 02/08/08
Well I.D.: S-4	Well Diameter: 2 (3) 4 6 8
Total Well Depth (TD): 24.0	Depth to Water (DTW): 8.07
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (VOC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.29	

Purge Method:	WATER	Sampling Method:
Bailer	Peristaltic	<input checked="" type="checkbox"/> Bailer
Disposable Bailer	Extraction Pump	Disposable Bailer
Positive Air Displacement	Other _____	Extraction Port
<input checked="" type="checkbox"/> Electric Submersible		Dedicated Tubing

$5.0 \text{ (Gals.)} \times 3 \text{ (Specified Volumes)} = 15.0 \text{ (Calculated Volume)}$ <p style="font-size: small;">Note: 18 is written above the 3, and 1.8 is written above the equals sign.</p>	<table border="1" style="width:100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
0812	60.0	6.7	1004	230	6	
0813	61.0	7.1	972	193	1.2	
0814	61.3	7.2	980	149	1.8	

Did well dewater? Yes No Gallons actually evacuated: 1.8

Sampling Date: 02/08/08 Sampling Time: 0819 Depth to Water: 11.07

Sample I.D.: S-4 Laboratory: STL Other: CALSCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: sel WC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>080208-WW1</u>	Site: <u>9899 5843</u>
Sampler: <u>WW</u>	Date: <u>02-08-08</u>
Well I.D.: <u>S-5</u>	Well Diameter: 2 <input type="radio"/> 3 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): <u>24.13</u>	Depth to Water (DTW): <u>24.3</u> ^(m) <u>8.75</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.83</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Other: _____
 Dedicated Tubing

5.7 (Gals.) X 3 = 17.1 Gals.
 1 Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
0921	58.3	7.5	1340	234	5.7	
0922	60.6	7.2	1265	216	11.4	
0923	60.7	7.2	1248	168	17.1	

Did well dewater? Yes No Gallons actually evacuated: 17.1

Sampling Date: 02/08/08 Sampling Time: 0928 Depth to Water: 11.83

Sample I.D.: S-5 Laboratory: STL Other: CALS SCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see WC

EB I.D. (if applicable): @ _____ Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 020208-WW1	Site: 98995843
Sampler: WW	Date: 02/08/08
Well I.D.: S-6	Well Diameter: 2 <u>(3)</u> 4 8
Total Well Depth (TD): 25.50	Depth to Water (DTW): 7.67
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.24	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

6.6 (Gals.) X 3 = 19.8 Gals. <small>1 Case Volume Specified Volumes Calculated Volume</small>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
45 1304	68.1	7.5	1173	310	6.6	
1305	68.4	7.5	6495	326	13.2	
1306	69.0	7.3	6652	275	19.8	

Did well dewater? Yes No Gallons actually evacuated: 19.8

Sampling Date: 02/08/08 Sampling Time: 1311 Depth to Water: 14.65

Sample I.D.: S-6 Laboratory: STL Other: ALSCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see WC

EB I.D. (if applicable): @ _____ Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>080208WW1</u>	Site: <u>98995843</u>
Sampler: <u>MW</u>	Date: <u>02/08/08</u>
Well I.D.: <u>S-7</u>	Well Diameter: 2 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): <u>25.01</u>	Depth to Water (DTW): <u>7.73</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <input checked="" type="radio"/> PVC <input type="radio"/> Grade	D.O. Meter (if req'd): YSI <input type="checkbox"/> HACH <input type="checkbox"/>
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.19</u>	

Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible

Water: Peristaltic Extraction Pump Other _____

Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing

Other: _____

<u>6.4</u> (Gals.) X <u>3</u> = <u>19.2</u> Gals.			
I Case Volume	Specified Volumes	Calculated Volume	

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
<u>1320</u>	<u>70.1</u>	<u>7.5</u>	<u>5692</u>	<u>227</u>	<u>6.4</u>	
<u>1321</u>	<u>69.7</u>	<u>7.4</u>	<u>4830</u>	<u>263</u>	<u>12.8</u>	
<u>1322</u>	<u>69.9</u>	<u>7.3</u>	<u>5233</u>	<u>216</u>	<u>19.2</u>	

Did well dewater? Yes No Gallons actually evacuated: 19.2

Sampling Date: 02/08/08 Sampling Time: 1327 Depth to Water: 11.64

Sample I.D.: S-7 Laboratory: STL Other: CALSCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see WL

EB I.D. (if applicable): @ _____ Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

D.O. (if req'd): Pre-purge:		mg/L	Post-purge:		mg/L
O.R.P. (if req'd): Pre-purge:		mV	Post-purge:		mV

SHELL WELL MONITORING DATA SHEET

BTS #: 080208-WW1	Site: 98995243
Sampler: WW	Date: 02/08/08
Well I.D.: S-8	Well Diameter: 2 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): 24.67	Depth to Water (DTW): 6.77
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>ve</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 10.35	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

<u>6.6</u> (Gals.) X <u>3</u> = <u>19.8</u> Gals.			
I Case Volume	Specified Volumes	Calculated Volume	

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1134	65.7	7.0	13.42	768	6.6	
1135	66.5	6.9	12.61	341	13.2	
1136	67.2	6.8	13.93	260	19.8	

Did well dewater? Yes No Gallons actually evacuated: 19.8

Sampling Date: 02/08/08 Sampling Time: 1141 Depth to Water: 14.50 (Total)

Sample I.D.: S-8 Laboratory: STL Other: CALSCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see WC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>08020B-MW1</u>	Site: <u>98995843</u>
Sampler: <u>mw</u>	Date: <u>02/08/08</u>
Well I.D.: <u>S-9</u>	Well Diameter: <u>3</u> 4 6 8
Total Well Depth (TD): <u>19.82</u>	Depth to Water (DTW): <u>7.78</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>10.19</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

$1.9 \text{ (Gals.)} \times 3 = 5.7 \text{ Gals.}$ I Case Volume Specified Volumes Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
<u>0835</u>	<u>60.7</u>	<u>7.5</u>	<u>3865</u>	<u>781</u>	<u>1.9</u>	
<u>0836</u>	<u>62.6</u>	<u>7.5</u>	<u>4023</u>	<u>878</u>	<u>3.8</u>	
<u>0837</u>	<u>64.5</u>	<u>7.4</u>	<u>4212</u>	<u>>1000</u>	<u>5.7</u>	

Did well dewater? Yes No Gallons actually evacuated: 5.7

Sampling Date: 02/08/08 Sampling Time: 0842 Depth to Water: 7.99

Sample I.D.: S-9 Laboratory: STL Other CALS EVIDENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see loc

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>80208-WW1</u>	Site: <u>98995843</u>
Sampler: <u>WW</u>	Date: <u>02/08/08</u>
Well I.D.: <u>EW-2</u>	Well Diameter: 2 3 4 <u>6</u> 8
Total Well Depth (TD): <u>25.87</u>	Depth to Water (DTW): <u>8.42</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <input checked="" type="checkbox"/> <u>Grade</u>	D.O. Meter (if req'd): YSI <u> </u> HACH <u> </u>
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.91</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic
 Positive Air Displacement Extraction Pump Disposable Bailer
 Electric Submersible Other _____ Dedicated Tubing

<u>25.7</u> (Gals.) X <u>3</u> = <u>77.1</u> Gals. 1 Case Volume Specified Volumes Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

	Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
15	1022	61.6	7.8	1591	144	25.7	odor
30	1026	64.0	7.8	1575	>1000	51.4	
45	1030	65.7	7.8	1548	862	77.1	

Did well dewater? Yes No Gallons actually evacuated: 77.1

Sampling Date: 02/08/08 Sampling Time: 1035 Depth to Water: 11.89

Sample I.D.: EW-2 Laboratory: STL Other: CALSCIENCE

Analyzed for: TPH-G BTEX MTBE TPH-D Other: see LOC

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

D.O. (if req'd):	Pre-purge: _____ mg/L	Post-purge: _____ mg/L
O.R.P. (if req'd):	Pre-purge: _____ mV	Post-purge: _____ mV

APPENDIX B

FIELD PROCEDURES

BLAINE TECH SERVICES, INC. METHODS AND PROCEDURES FOR THE ROUTINE MONITORING OF GROUNDWATER WELLS AT SHELL SITES

Blaine Tech Services, Inc. performs environmental sampling and documentation as an independent third party. We specialize in groundwater monitoring assignments and intentionally limit the scope of our services to those centered on the generation of objective information.

To avoid conflicts of interest, Blaine Tech Services, Inc. personnel do not evaluate or interpret the information we collect. As a state licensed contractor (C-57 well drilling –water – 746684) performing strictly technical services, we do not make any professional recommendations and perform no consulting of any kind.

SAMPLING PROCEDURES OVERVIEW

SAFETY

All groundwater monitoring assignments performed for Shell comply with Shell's safety guidelines, 29 CFR 1910.120 and SB-198 Injury and Illness Prevention Program (IIPP). All Field Technicians receive the full 40-hour 29CFR 1910.120 OSHA SARA HAZWOPER course, medical clearance and on-the-job training prior to commencing any work on any Shell site.

INSPECTION AND GAUGING

Wells are inspected prior to evacuation and sampling. The condition of the wellhead is checked and noted according to a wellhead inspection checklist.

Standard measurements include the depth to water (DTW) and the total well depth (TD) obtained with industry standard electronic water level indicators that are graduated in increments of hundredths of a foot.

The water in each well is inspected for the presence of immiscibles. When free product is suspected, its presence is confirmed using an electronic interface probe (e.g. MMC). No samples are collected from a well containing over two-hundredths of a foot (0.02') of product.

EVACUATION

Depth to water measurements are collected by our personnel prior to purging and minimum purge volumes are calculated anew for each well based on the height of the water column and the diameter of the well. Expected purge volumes are never less than three case volumes and are set at no less than four case volumes in some jurisdictions.

Well purging devices are selected on the basis of the well diameter and the total volume to be evacuated. In most cases the well will be purged using an electric submersible pump (i.e. Grundfos) suspended near (but not touching) the bottom of the well.

PARAMETER STABILIZATION

Well purging completion standards include minimum purge volumes, but additionally require stabilization of specific groundwater parameters prior to sample collection. Typical groundwater parameters used to measure stability are electrical conductivity, pH, and temperature. Instrument readings are obtained at regular intervals during the evacuation process (no less than once per case volume).

Stabilization standards for routine quarterly monitoring of fuel sites include the following: Temperature is considered to have stabilized when successive readings do not fluctuate more than +/- 1 degree Celsius. Electrical conductivity is considered stable when successive readings are within 10%. pH is considered to be stable when successive readings remain constant or vary no more than 0.2 of a pH unit.

DEWATERED WELLS

Normal evacuation removes no less than three case volumes of water from the well. However, less water may be removed in cases where the well dewateres and does not immediately recharge.

MEASURING RECHARGE

Upon completion of well purging, a depth to water measurement is collected and notated to ensure that the well has recharged to within 80% of its static, pre-purge level prior to sampling.

Wells that do not immediately show 80% recharge or dewatered wells will be allowed a minimum of 2 hours to recharge prior to sampling. The water level at time of sampling will be noted.

PURGEWATER CONTAINMENT

All non-hazardous purgewater evacuated from each groundwater monitoring well is captured and contained in on-board storage tanks on the Sampling Vehicle and/or special water hauling trailers. Effluent from the decontamination of reusable apparatus (sounders, electric pumps and hoses etc.), consisting of groundwater combined with deionized water and non-phosphate soap, is also captured and pumped into effluent tanks.

Non-hazardous purgewater is transported under standard Bill of Lading documentation to a Blaine Tech Services, Inc. facility before being transported to a Shell approved disposal facility.

SAMPLE COLLECTION DEVICES

All samples are collected using a stainless steel, Teflon or disposable bailers.

SAMPLE CONTAINERS

Sample material is decanted directly from the sampling bailer into sample containers provided by the laboratory that will analyze the samples. The transfer of sample material from the bailer to the sample container conforms to specifications contained in the USEPA T.E.G.D. The type of sample container, material of construction, method of closure and filling requirements are specific to the intended analysis. Chemicals needed to preserve the sample material are commonly placed inside the sample containers by the laboratory or glassware vendor prior to delivery of the bottle to our personnel. The laboratory sets the number of replicate containers.

TRIP BLANKS

Trip Blanks, if requested, are taken to the site and kept inside the sample cooler for the duration of the event. They are turned over to the laboratory for analysis with the samples from that site.

DUPLICATES

Duplicates, if requested, may be collected at a site. The Field Technician uses their discretion in choosing the well at which the Duplicate is collected, typically one suspected of containing measurable contaminants. The Duplicate sample is labeled "DUP" and the time of collection is omitted from the COC, thus rendering the sample blind.

SAMPLE STORAGE

All sample containers are promptly placed in food grade ice chests for storage in the field and transport (direct or via our facility) to the designated analytical laboratory. These ice chests contain quantities of restaurant grade ice as a refrigerant material. The samples are maintained in either an ice chest or a refrigerator until relinquished into the custody of the laboratory or laboratory courier.

DOCUMENTATION CONVENTIONS

A label must be affixed to all sample containers. In most cases these labels are generated by our office personnel and are partially preprinted. Labels can also be hand written by our field personnel. The site is identified with the store number and site address, as is the particular groundwater well from which the sample is drawn (e.g. MW-1, MW-2, S-1 etc.). The time and date of sample collection along with the initials of the person who collects the sample are handwritten onto the label.

Chain of Custody records are created using client specific preprinted forms following USEPA specifications.

Bill of Lading records are contemporaneous records created in the field at the site where the non-hazardous purgewater is generated. Field Technicians use preprinted Bill of Lading forms.

DECONTAMINATION

All equipment is brought to the site in clean and serviceable condition and is cleaned after use in each well and before subsequent use in any other well. Equipment is decontaminated before leaving the site.

The primary decontamination device is a commercial steam cleaner. The steam cleaner is de-tuned to function as a hot pressure washer that is then operated with high quality deionized water that is produced at our facility and stored onboard our sampling vehicle. Cleaning is facilitated by the use of proprietary fixtures and devices included in the patented workstation (U.S. Patent 5,535,775) that is incorporated in each sampling vehicle. The steam cleaner is used to decon reels, pumps and bailers.

Any sensitive equipment or parts (i.e. Dissolved Oxygen sensor membrane, water level indicator, etc.) that cannot be washed using the high pressure water, will be sprayed with a non-phosphate soap and deionized water solution and rinsed with deionized water.

DISSOLVED OXYGEN READINGS

Dissolved Oxygen readings are taken pre- and/or post-purge using YSI meters (e.g. YSI Model 54, 58 or 95) or HACH field test kits.

The YSI meters are equipped with a stirring device that enables them to collect accurate in-situ readings. The probe/stirring devices are modified to allow downhole measurements to be taken from wells with diameters as small as two inches. The probe and reel is decontaminated between wells as described above. The meter is calibrated between wells as per the instructions in the operating manual. The probe and stirrer is lowered into the water column. The reading is allowed to stabilize prior to collection.

OXYIDATON REDUCTION POTENTIAL READINGS


All readings are obtained with either Corning or Myron-L meters (e.g. Corning ORP-65 or a Myron-L Ultrameter GP). The meter is cleaned between wells as described above. The meter is calibrated at the start of each day according to the instruction manual.

FERROUS IRON MEASUREMENTS

All field measurements are collected at time of sampling with a HACH test kit.

APPENDIX C

LABORATORY REPORT AND CHAIN-OF-CUSTODY DOCUMENT



February 18, 2008

Michael Ninokata
Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Subject: **Calscience Work Order No.: 08-02-0691**
Client Reference: **5251 Hopyard Rd., Pleasanton, CA**

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 2/9/2008 and analyzed in accordance with the attached chain-of-custody.


Unless otherwise noted, all analytical testing was accomplished in accordance with the guidelines established in our Quality Systems Manual, applicable standard operating procedures, and other related documentation. The original report of subcontracted analysis, if any, is provided herein, and follows the standard Calscience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.


If you have any questions regarding this report, please do not hesitate to contact the undersigned.

Sincerely,

A handwritten signature in black ink, appearing to read "Jessie Kim".

Calscience Environmental
Laboratories, Inc.
Jessie Kim
Project Manager





Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 1 of 3

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-1	08-02-0691-1-E	02/08/08 10:07	Aqueous	GC 18	02/12/08	02/12/08 17:06	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	4500	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	149	38-134		2	

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-2	08-02-0691-2-E	02/08/08 09:04	Aqueous	GC 18	02/12/08	02/12/08 17:39	080212B01

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	110	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	79	38-134			


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-3	08-02-0691-3-E	02/08/08 09:47	Aqueous	GC 18	02/12/08	02/12/08 18:12	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	300	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	79	38-134			

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-4	08-02-0691-4-E	02/08/08 08:19	Aqueous	GC 18	02/12/08	02/12/08 13:12	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	79	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 2 of 3

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-5	08-02-0691-5-E	02/08/08 09:28	Aqueous	GC 18	02/12/08	02/12/08 18:46	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	270	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	79	38-134			

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-6	08-02-0691-6-E	02/08/08 13:11	Aqueous	GC 18	02/12/08	02/12/08 19:19	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	79	38-134			


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-7	08-02-0691-7-E	02/08/08 13:27	Aqueous	GC 18	02/12/08	02/12/08 20:59	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	79	38-134			

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-8	08-02-0691-8-E	02/08/08 11:41	Aqueous	GC 18	02/12/08	02/12/08 21:33	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	80	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 3 of 3

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-9	08-02-0691-9-E	02/08/08 08:42	Aqueous	GC 18	02/12/08	02/12/08 22:06	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	79	38-134			

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
EW-2	08-02-0691-10-E	02/08/08 10:35	Aqueous	GC 18	02/12/08	02/12/08 22:39	080212B01


Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.


Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	70	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	78	38-134			

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
Method Blank	099-12-436-1,450	N/A	Aqueous	GC 18	02/12/08	02/12/08 11:30	080212B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	79	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers





Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 1 of 5

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-1	08-02-0691-1-B	02/08/08 10:07	Aqueous	GC/MS FF	02/14/08	02/15/08 02:10	080214L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	25	2.5	5		Methyl-t-Butyl Ether (MTBE)	28	5.0	5	
Ethylbenzene	410	5.0	5		Tert-Butyl Alcohol (TBA)	330	50	5	
Toluene	39	5.0	5		Diisopropyl Ether (DIPE)	ND	10	5	
p/m-Xylene	37	5.0	5		Ethyl-t-Butyl Ether (ETBE)	ND	10	5	
o-Xylene	ND	5.0	5		Tert-Amyl-Methyl Ether (TAME)	ND	10	5	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	102	74-146		
Toluene-d8	107	88-112			1,4-Bromofluorobenzene	103	74-110		


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-2	08-02-0691-2-B	02/08/08 09:04	Aqueous	GC/MS FF	02/14/08	02/15/08 04:07	080214L02


Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	110	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	830	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	106	74-140			1,2-Dichloroethane-d4	105	74-146		
Toluene-d8	102	88-112			1,4-Bromofluorobenzene	95	74-110		

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-3	08-02-0691-3-D	02/08/08 09:47	Aqueous	GC/MS T	02/16/08	02/16/08 19:23	080216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	2.7	0.50	1		Methyl-t-Butyl Ether (MTBE)	19	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	120	74-140			1,2-Dichloroethane-d4	130	74-146		
Toluene-d8	103	88-112			1,4-Bromofluorobenzene	87	74-110		

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers





Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 2 of 5

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-4	08-02-0691-4-B	02/08/08 08:19	Aqueous	GC/MS FF	02/14/08	02/15/08 02:39	080214L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	108	74-140			1,2-Dichloroethane-d4	105	74-146		
Toluene-d8	103	88-112			1,4-Bromofluorobenzene	94	74-110		


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-5	08-02-0691-5-D	02/08/08 09:28	Aqueous	GC/MS T	02/16/08	02/16/08 19:53	080216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	4.7	0.50	1		Methyl-t-Butyl Ether (MTBE)	6.0	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	117	74-140			1,2-Dichloroethane-d4	130	74-146		
Toluene-d8	100	88-112			1,4-Bromofluorobenzene	86	74-110		

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-6	08-02-0691-6-B	02/08/08 13:11	Aqueous	GC/MS FF	02/14/08	02/15/08 05:34	080214L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	113	74-140			1,2-Dichloroethane-d4	110	74-146		
Toluene-d8	104	88-112			1,4-Bromofluorobenzene	93	74-110		

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

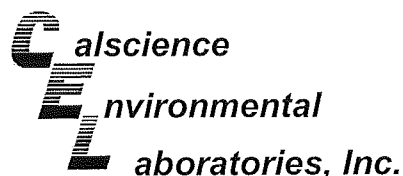

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 3 of 5

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-7	08-02-0691-7-B	02/08/08 13:27	Aqueous	GC/MS FF	02/14/08	02/15/08 06:04	080214L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	9.2	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	112	74-140			1,2-Dichloroethane-d4	110	74-146		
Toluene-d8	104	88-112			1,4-Bromofluorobenzene	94	74-110		


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-8	08-02-0691-8-B	02/08/08 11:41	Aqueous	GC/MS FF	02/14/08	02/15/08 06:33	080214L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	127	74-140			1,2-Dichloroethane-d4	126	74-146		
Toluene-d8	106	88-112			1,4-Bromofluorobenzene	93	74-110		

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-9	08-02-0691-9-B	02/08/08 08:42	Aqueous	GC/MS FF	02/14/08	02/15/08 07:02	080214L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	113	74-140			1,2-Dichloroethane-d4	112	74-146		
Toluene-d8	105	88-112			1,4-Bromofluorobenzene	94	74-110		

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B
Units: ug/L

Project: 5251 Hopyard Rd., Pleasanton, CA

Page 4 of 5

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
EW-2	08-02-0691-10-B	02/08/08 10:35	Aqueous	GC/MS FF	02/14/08	02/15/08 07:32	080214L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	8.9	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	940	20	2	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	107	74-140			1,2-Dichloroethane-d4	106	74-146		
Toluene-d8	103	88-112			1,4-Bromofluorobenzene	93	74-110		


Method Blank	099-10-006-24,435	N/A	Aqueous	GC/MS FF	02/14/08	02/15/08 01:41	080214L02
---------------------	--------------------------	------------	----------------	-----------------	-----------------	-----------------------	------------------


Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	112	74-140			1,2-Dichloroethane-d4	109	74-146		
Toluene-d8	105	88-112			1,4-Bromofluorobenzene	95	74-110		

Method Blank	099-10-006-24,445	N/A	Aqueous	GC/MS FF	02/15/08	02/16/08 03:23	080215L02
---------------------	--------------------------	------------	----------------	-----------------	-----------------	-----------------------	------------------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	116	74-140			1,2-Dichloroethane-d4	123	74-146		
Toluene-d8	102	88-112			1,4-Bromofluorobenzene	95	74-110		

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



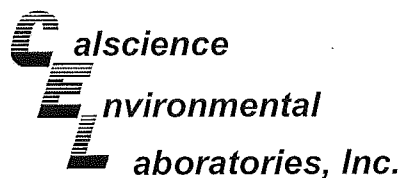

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B
Units: ug/L


Project: 5251 Hopyard Rd., Pleasanton, CA

Page 5 of 5

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
Method Blank	099-10-006-24,451	N/A	Aqueous	GC/MS T	02/16/08	02/16/08 13:51	080216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Toluene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
p/m-Xylene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
o-Xylene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	114	74-140			1,2-Dichloroethane-d4	120	74-146		
Toluene-d8	101	88-112			1,4-Bromofluorobenzene	87	74-110		

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

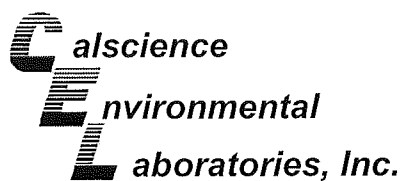

Quality Control - Spike/Spike Duplicate




Blaine Tech Services, Inc.	Date Received:	02/09/08
1680 Rogers Avenue	Work Order No:	08-02-0691
San Jose, CA 95112-1105	Preparation:	EPA 5030B
	Method:	EPA 8015B (M)

Project 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-4	Aqueous	GC 18	02/12/08	02/12/08	080212S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
TPH as Gasoline	86	82	68-122	5	0-18	

RPD - Relative Percent Difference , CL - Control Limit



Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B

Project 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-4	Aqueous	GC/MS FF	02/14/08	02/15/08	080214S02

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	98	97	88-118	0	0-7	
Carbon Tetrachloride	106	105	67-145	1	0-11	
Chlorobenzene	103	103	88-118	0	0-7	
1,2-Dibromoethane	100	104	70-130	3	0-30	
1,2-Dichlorobenzene	98	100	86-116	2	0-8	
1,1-Dichloroethene	96	97	70-130	1	0-25	
Ethylbenzene	106	108	70-130	1	0-30	
Toluene	104	103	87-123	1	0-8	
Trichloroethene	99	98	79-127	1	0-10	
Vinyl Chloride	98	101	69-129	4	0-13	
Methyl-t-Butyl Ether (MTBE)	97	99	71-131	2	0-13	
Tert-Butyl Alcohol (TBA)	98	104	36-168	6	0-45	
Diisopropyl Ether (DIPE)	85	86	81-123	0	0-9	
Ethyl-t-Butyl Ether (ETBE)	90	91	72-126	1	0-12	
Tert-Amyl-Methyl Ether (TAME)	96	99	72-126	3	0-12	
Ethanol	73	76	53-149	4	0-31	

RPD - Relative Percent Difference , CL - Control Limit



Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B

Project 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
08-02-0764-2	Aqueous	GC/MS FF	02/15/08	02/15/08	080215S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	100	100	88-118	1	0-7	
Carbon Tetrachloride	110	109	67-145	1	0-11	
Chlorobenzene	100	99	88-118	1	0-7	
1,2-Dibromoethane	104	104	70-130	0	0-30	
1,2-Dichlorobenzene	99	99	86-116	0	0-8	
1,1-Dichloroethene	99	98	70-130	1	0-25	
Ethylbenzene	103	103	70-130	0	0-30	
Toluene	103	103	87-123	0	0-8	
Trichloroethene	98	100	79-127	2	0-10	
Vinyl Chloride	94	97	69-129	4	0-13	
Methyl-t-Butyl Ether (MTBE)	96	97	71-131	1	0-13	
Tert-Butyl Alcohol (TBA)	85	83	36-168	2	0-45	
Diisopropyl Ether (DIPE)	97	94	81-123	3	0-9	
Ethyl-t-Butyl Ether (ETBE)	97	96	72-126	1	0-12	
Tert-Amyl-Methyl Ether (TAME)	102	100	72-126	2	0-12	
Ethanol	88	79	53-149	11	0-31	

RPD - Relative Percent Difference , CL - Control Limit

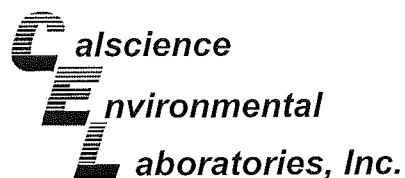

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 02/09/08
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B


Project 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
08-02-0870-2	Aqueous	GC/MS T	02/16/08	02/16/08	080216S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	102	101	88-118	1	0-7	
Carbon Tetrachloride	113	111	67-145	2	0-11	
Chlorobenzene	100	99	88-118	1	0-7	
1,2-Dibromoethane	98	95	70-130	3	0-30	
1,2-Dichlorobenzene	95	96	86-116	2	0-8	
1,1-Dichloroethene	106	107	70-130	1	0-25	
Ethylbenzene	104	104	70-130	1	0-30	
Toluene	101	101	87-123	1	0-8	
Trichloroethene	92	92	79-127	1	0-10	
Vinyl Chloride	118	120	69-129	2	0-13	
Methyl-t-Butyl Ether (MTBE)	91	76	71-131	18	0-13	4
Tert-Butyl Alcohol (TBA)	99	107	36-168	7	0-45	
Diisopropyl Ether (DIPE)	107	109	81-123	2	0-9	
Ethyl-t-Butyl Ether (ETBE)	92	64	72-126	36	0-12	4,3
Tert-Amyl-Methyl Ether (TAME)	92	64	72-126	35	0-12	4,3
Ethanol	124	176	53-149	35	0-31	4,3

RPD - Relative Percent Difference, CL - Control Limit





Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: N/A
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8015B (M)


Project: 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-12-436-1,450	Aqueous	GC 18	02/12/08	02/12/08	080212B01

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
TPH as Gasoline	88	90	78-120	2	0-10	

RPD - Relative Percent Difference , CL - Control Limit





Quality Control - LCS/LCS Duplicate




Blaine Tech Services, Inc.	Date Received:	N/A
1680 Rogers Avenue	Work Order No:	08-02-0691
San Jose, CA 95112-1105	Preparation:	EPA 5030B
	Method:	EPA 8260B


Project: 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-10-006-24,435	Aqueous	GC/MS FF	02/14/08	02/15/08	080214L02

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	99	98	84-120	1	0-8	
Carbon Tetrachloride	107	106	63-147	0	0-10	
Chlorobenzene	102	102	89-119	0	0-7	
1,2-Dibromoethane	104	105	80-120	1	0-20	
1,2-Dichlorobenzene	101	100	89-119	1	0-9	
1,1-Dichloroethene	101	99	77-125	1	0-16	
Ethylbenzene	105	105	80-120	0	0-20	
Toluene	105	105	83-125	0	0-9	
Trichloroethene	97	97	89-119	0	0-8	
Vinyl Chloride	110	106	63-135	3	0-13	
Methyl-t-Butyl Ether (MTBE)	89	102	82-118	14	0-13	X
Tert-Butyl Alcohol (TBA)	97	98	46-154	0	0-32	
Diisopropyl Ether (DIPE)	91	92	81-123	1	0-11	
Ethyl-t-Butyl Ether (ETBE)	95	97	74-122	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	102	103	76-124	0	0-10	
Ethanol	89	79	60-138	12	0-32	

RPD - Relative Percent Difference, CL - Control Limit



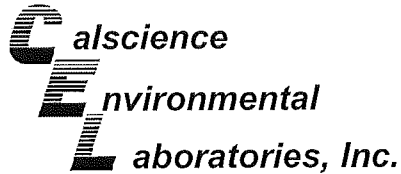

Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: N/A
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B

Project: 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-10-006-24,445	Aqueous	GC/MS FF	02/15/08	02/16/08	080215L02

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	102	101	84-120	1	0-8	
Carbon Tetrachloride	112	109	63-147	3	0-10	
Chlorobenzene	97	99	89-119	2	0-7	
1,2-Dibromoethane	103	104	80-120	1	0-20	
1,2-Dichlorobenzene	102	101	89-119	1	0-9	
1,1-Dichloroethene	102	100	77-125	2	0-16	
Ethylbenzene	101	102	80-120	1	0-20	
Toluene	102	103	83-125	1	0-9	
Trichloroethene	97	98	89-119	0	0-8	
Vinyl Chloride	99	97	63-135	2	0-13	
Methyl-t-Butyl Ether (MTBE)	101	102	82-118	1	0-13	
Tert-Butyl Alcohol (TBA)	86	77	46-154	12	0-32	
Diisopropyl Ether (DIPE)	98	95	81-123	3	0-11	
Ethyl-t-Butyl Ether (ETBE)	102	98	74-122	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	105	103	76-124	1	0-10	
Ethanol	91	88	60-138	4	0-32	

RPD - Relative Percent Difference, CL - Control Limit

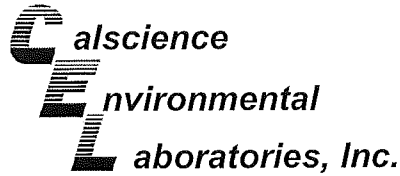

Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: N/A
Work Order No: 08-02-0691
Preparation: EPA 5030B
Method: EPA 8260B

Project: 5251 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-10-006-24,451	Aqueous	GC/MS T	02/16/08	02/16/08	080216L01


Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	102	100	84-120	1	0-8	
Carbon Tetrachloride	109	103	63-147	6	0-10	
Chlorobenzene	100	99	89-119	1	0-7	
1,2-Dibromoethane	103	99	80-120	4	0-20	
1,2-Dichlorobenzene	97	97	89-119	1	0-9	
1,1-Dichloroethene	109	102	77-125	6	0-16	
Ethylbenzene	105	103	80-120	2	0-20	
Toluene	101	101	83-125	0	0-9	
Trichloroethene	94	94	89-119	0	0-8	
Vinyl Chloride	122	121	63-135	1	0-13	
Methyl-t-Butyl Ether (MTBE)	97	88	82-118	9	0-13	
Tert-Butyl Alcohol (TBA)	95	80	46-154	17	0-32	
Diisopropyl Ether (DIPE)	110	108	81-123	2	0-11	
Ethyl-t-Butyl Ether (ETBE)	102	101	74-122	1	0-12	
Tert-Amyl-Methyl Ether (TAME)	101	97	76-124	3	0-10	
Ethanol	110	99	60-138	10	0-32	

RPD - Relative Percent Difference , CL - Control Limit



Work Order Number: 08-02-0691

<u>Qualifier</u>	<u>Definition</u>
*	See applicable analysis comment.
1	Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification.
2	Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification.
3	Recovery of the Matrix Spike (MS) or Matrix Spike Duplicate (MSD) compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification.
4	The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification.
5	The PDS/PDSD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported with no further corrective action required.
A	Result is the average of all dilutions, as defined by the method.
B	Analyte was present in the associated method blank.
C	Analyte presence was not confirmed on primary column.
E	Concentration exceeds the calibration range.
H	Sample received and/or analyzed past the recommended holding time.
J	Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
N	Nontarget Analyte.
ND	Parameter not detected at the indicated reporting limit.
Q	Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater.
U	Undetected at the laboratory method detection limit.
X	% Recovery and/or RPD out-of-range.
Z	Analyte presence was not confirmed by second column or GC/MS analysis.



- TA - Irvine, California
- TA - Morgan Hill, California
- TA - Sacramento, California
- TA - Nashville, Tennessee
- Calscienc
- Other _____

0691

SHELL Chain Of Custody Record

NAME OF PERSON TO BILL: Denis Brown

ENVIRONMENTAL SERVICES

CHECK BOX TO VERIFY IF NO INCIDENT # APPLIES

INCIDENT # (ES ONLY):

9 8 9 9 5 8 4 3

DATE: 02/08/08

NETWORK DEV / FE

BILL CONSULTANT

PO #

SAP or CRMT #

PAGE: 1 of 1

COMPLIANCE

RMT/CRMT

SAMPLING COMPANY:

LOG CODE:

SITE ADDRESS: Street and City

State

GLOBAL ID NO.:

Blaine Tech Services

BTSS

5251 Hopyard Rd., Pleasanton

CA

T0600101267

ADDRESS:

EDF DELIVERABLE TO (Name, Company, Office Location):

PHONE NO.:

E-MAIL:

CONSULTANT PROJECT NO.:

1680 Rogers Avenue, San Jose, CA 95112

Jon Sung, Delta, Monrovia Office

626.256.6662

jsung@deltaenv.com

BTS#

PROJECT CONTACT (Hardcopy or PDF Report to):

SAMPLER NAME(S) (Print):

LAB USE ONLY

Michael Ninokata

TELEPHONE:
408-573-0555

FAX:

408-573-7771

E-MAIL:

mninokata@blainetech.com

WILLIAM WONG

08-02-0691

TAT (STD IS 10 BUSINESS DAYS / RUSH IS CALENDAR DAYS):

RESULTS NEEDED ON WEEKEND

STD 5 DAY 3 DAY 2 DAY 24 HOURS

REQUESTED ANALYSIS

LA - RWQCB REPORT FORMAT UST AGENCY: _____

SPECIAL INSTRUCTIONS OR NOTES:

- EDD NOT NEEDED
- SHELL CONTRACT RATE APPLIES
- STATE REIMB RATE APPLIES
- RECEIPT VERIFICATION REQUESTED

CC Rich Garlow rgarlow@deltaenv.com with final report.

FIELD NOTES:

Container/Preservative
or PID Readings
or Laboratory Notes

TEMPERATURE ON RECEIPT °

LAB USE ONLY	Field Sample Identification		SAMPLING		MATRX	NO. OF CONT.	TPH - Gas, Purgeable (8260B)	TPH - Diesel, Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B) (MTBE, TBA, DIPE, TAME, ETBE)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)	Methanol (8015M)		
			DATE	TIME																	
1	S-1	02/08/08	1007	W	5	X	X	X													
2	S-2		0904			X	X	X													
3	S-3		0947			X	X	X													
4	S-4		0819			X	X	X													
5	S-5		0928			X	X	X													
6	S-6		1316			X	X	X													
7	S-7		1327			X	X	X													
8	S-8		1141			X	X	X													
9	S-9		0842			X	X	X													
10	EW-2		1035			X	X	X													

Relinquished by: (Signature)

Relinquished by: (Signature)


Relinquished by: (Signature)

Received by: (Signature)

Received by: (Signature)

Received by: (Signature)

Date: 02/08/08	Time: 1442
Date: 2/9/08	Time: 1030
Date: 2/9/08	Time: 0828

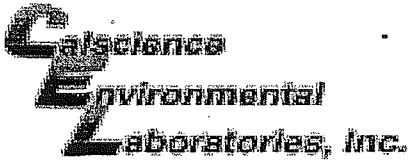

WORK ORDER #: 08 - 02 - 0691

Cooler 1 of 1

SAMPLE RECEIPT FORM

CLIENT: BTS

DATE: 2/9/08

TEMPERATURE - SAMPLES RECEIVED BY:

CALSCIENCE COURIER:

- Chilled, cooler with temperature blank provided.
Chilled, cooler without temperature blank.
Chilled and placed in cooler with wet ice.
Ambient and placed in cooler with wet ice.
Ambient temperature.
C Temperature blank.

LABORATORY (Other than Calscience Courier):

- C Temperature blank.
2.0 C IR thermometer.
Ambient temperature.

Initial: [Signature]

CUSTODY SEAL INTACT:

Sample(s): Cooler: No (Not Intact): Not Present: [check]

Initial: [Signature]

SAMPLE CONDITION:

Table with 4 columns: Description, Yes, No, N/A. Rows include Chain-Of-Custody document(s), Sampler's name, Sample container label(s), Sample container(s) intact, Correct containers and volume, Proper preservation, VOA vial(s) free of headspace, Tedlar bag(s) free of condensation.

Initial: [Signature]

COMMENTS:

Blank lines for handwritten comments.