5500 Shellmound Street, Emeryville, CA 94608-2411

Fax: 510-547-5043 Phone: 510-450-6000

March 23, 1995

Barney Chan Alameda County Department of Environmental Health 1131 Harbor Bay Parkway, 2nd Floor Alameda, CA 94502-6577

Re: Shell Service Station WIC #204-5508-5801 630 High Street Oakland, California ACDEH STID #3737 WA Job #81-0602-105

Dear Mr. Chan:

This letter describes recently completed and anticipated activities at the Shell service station referenced above (Figure 1). This status report satisfies the quarterly reporting requirements prescribed by California Administrative code title 23 Waters, Chapter 3, Subchapter 16, Article 5, Section 2652.d. Included below are descriptions and results of activities performed in the first quarter 1995 and proposed work for the second quarter 1995.

First Quarter 1995 Activities:

- Blaine Tech Services, Inc. (BTS) of San Jose, California measured depths to ground water and collected ground water samples from the site wells. BTS' report describing these activities and the analytic report for the ground water samples are included as Attachment A.
- Weiss Associates (WA) compiled the ground water elevation and analytic data (Tables 1, 2 and 3), and prepared a ground water elevation contour and benzene concentrations in ground water map (Figure 2).
- WA submitted a Risk Based Corrective Action (RBCA) risk evaluation. This is a first step in obtaining a Non-Attainment Area classification for this site.

Anticipated Second Quarter 1995 Activities:

- WA will submit a request to establish a Non-Attainment Area at this site.
- WA will submit a report presenting the results of the second quarter 1995 ground water sampling and ground water depth measurements. As stated in our April 27, 1994 letter report¹, wells MW-2, MW-7, MW-8, MW-9 and MW-10 will be sampled semi-annually in the second and fourth quarters. The report will include tabulated chemical analytic results and a ground water elevation and a benzene concentration in ground water map.

Please call if you have any questions.



Sincerely, Weiss Associates

Grady S. Glasser Technical Assistant

James W. Carmody, C.E.G. Senior Project Hydrogeologist

Attachments:

A - BTS' Ground Water Monitoring Report

cc:

Dan Kirk, Shell Oil Company, P.O. Box 5278, Concord, CA 94520
Paul McAllister, Shell Oil Company, P.O. Box 1380, Houston, TX 77251
Richard Hiett, Water Quality Control Board - San Francisco Bay Region, 2101 Webster

Street, Suite 500, Oakland, CA 94612

GSG/JWC:eac

Weiss Associates, Quarterly letter to Barney Chan of the Alameda County of Environmental Health, April 27, 1994, 3 pp. plus attachments.

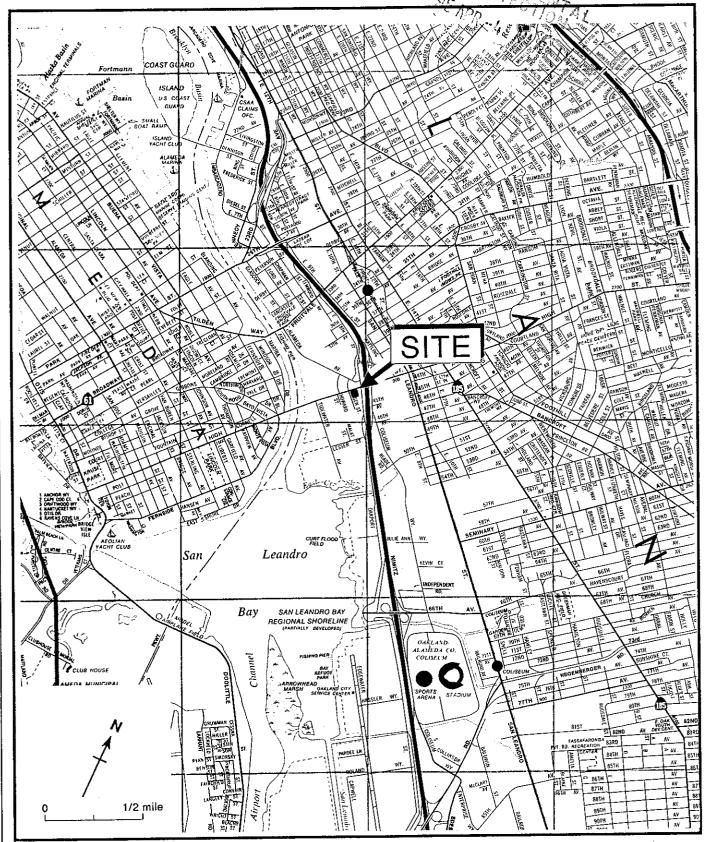


Figure 1. Site Location Map - Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California

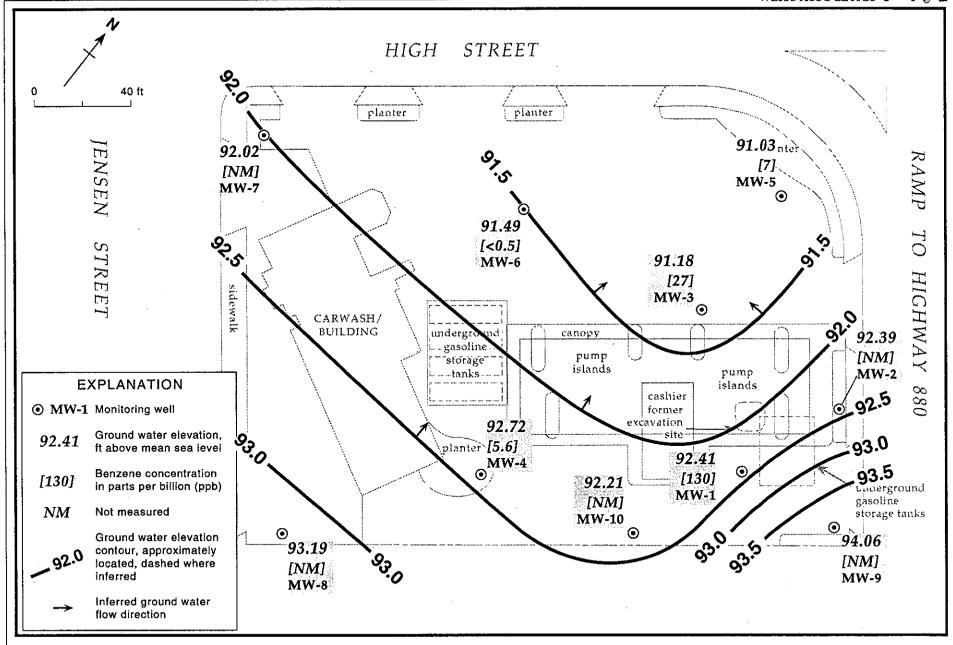


Figure 2. Monitoring Well Locations, Ground Water Elevation Contours and Benzene Concentrations in Ground Water - February 1, 1995 -Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California

Table 1. Ground Water Elevations - Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California

		Top-of-Casing	Depth to	Ground Water
Well		Elevation	Water	Elevation
ID	Date	(ft above msl)	(ft)	(ft above msl)
MW-1	01/29/91	99.35	10.79	88.56
2,2,1,	04/30/91	33.50	9.48	89.87
	07/22/91		10.53	88.82
	02/21/92		8.31	91.04
	05/22/92		10.02	89.33
	07/07/92		10.06	89.29
	08/20/92		10.32	89.03
	11/18/92		10.64	88.71
	02/09/93		8.71	90.64
	06/16/93		9.71	89.64
	08/24/93		10.23	89.12
	11/23/93		10.48	88.87
	02/14/94		9.17	90.18
	05/25/94		9.52	89.83
	08/04/94		10.51	88.84
	11/08/94		10.20	89.15
	02/01/95		6.94	92.41
MW-2	01/29/91	101.15	13.25	87.90
	04/30/91		10.94	90.21
	07/22/91		12.14	89.01
	02/21/92		10.08	91.07
	05/22/92		11.52	89.63
	07/07/92		11.50	89.65
	08/20/92		11.72	89.43
	11/18/92		13.06	88.09
	02/09/93		10.06	91.09
	06/16/93		11.60	89.55
	08/24/93	,	12.16	88.99
	11/23/93		12.74	88.41
	02/14/94		10.91	90.24
	05/25/94		11.06	90.09
	08/04/94		12.04	89.11
	11/08/94		12.38	88.77
	02/01/95		8.76	92.39

Table 1. Ground Water Elevations - Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

		Top-of-Casing	Depth to	Ground Water
Well		Elevation	Water	Elevation
ID	Date	(ft above msl)	(ft)	(ft above msl)
	04/00/04	00.40	11.00	00.40
MW-3	01/29/91	99.49	11.09	88.40
	04/30/91		9.57	89.92
	07/22/91		10.66	88.83
	02/21/92		8.97	90.52
	05/22/92		9.32	90.17
	07/07/92		10.22	89.27
	08/20/92		10.44	89.05
	11/18/92		10.79	88.70
	02/09/93		9.35	90.14
	06/16/93		9.56	89.93
	08/24/93		10.51	88.98
	11/23/93	•	10.77	88.72
	02/14/94		9.61	89.88
	05/25/94		10.00	89.49
	08/04/94		10.63	88.86
	11/08/94		11.02	88.47
	02/01/95		8.31	91.18
MW-4	01/29/91	99.24	10.76	88.48
111 11 -1	04/30/91	<i>,,,</i> ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	9.45	89.79
	07/22/91		10.34	88.90
	02/21/92		7.60	91.64
	05/22/92		9.90	89.34
	07/07/92		10.02	89.22
	08/20/92		10.32	88.92
	11/18/92		10.51	88.73
	02/09/93		8.13	91.11
	06/16/93		9.60	89.64
	08/24/93		10.05	89.19
	11/23/93		10.05	89.99
	02/14/94		8.83	90.41
	05/25/94		9.64	89.60
	08/04/94		10.62	88.62
	11/08/94		9.28	89.96
	02/01/95	and the second of the second o	6.52	92.72

Table 1. Ground Water Elevations - Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

		Top-of-Casing	Depth to	Ground Water
Well		Elevation	Water	Elevation
ID	Date	(ft above msl)	(ft)	(ft above msl)
MW-5	01/29/91	100.08	11.72	88.36
	04/30/91		10.45	89.63
	07/22/91		11.43	88.65
	02/21/92		9.24	90.84
	05/22/92		10.97	89.11
	07/07/92		10.98	89.10
	08/20/92		11.14	88.94
	11/18/92		11.21	88.87
	02/09/93		10.01	90.07
	06/16/93		11.05	89.03
	08/24/93		11.32	88.76
	11/23/93		11.35	88.73
	02/14/94		10.34	89.74
	05/25/94		10.54	89.54
	08/04/94		11.50	88.58
	11/08/94	•	11.24	88.84
	02/01/95		9.05	91.03
MW-6	01/29/91	98.56	10.23	88.33
	04/30/91		9.15	89.41
	07/22/91		10.10	88.46
	02/21/92		7.15	91.41
	05/22/92		9.55	89.01
	07/07/92		9.53	89.03
	08/20/92		9.84	88.72
	11/18/92		10.03	88.53
	02/09/93		7.91	90.65
	06/16/93		8.74	89.82
	08/24/93		9.66	88.90
	11/23/93		9.86	88.70
	02/14/94		8.27	90.29
	05/25/94		8.89	89.67
	08/04/94		10.10	88.46
	11/08/94		8.98	89.58
	02/01/95	的复数电影 化邻苯酚 计二十二级电影影響影响	7.07	91.49

Table 1. Ground Water Elevations - Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

		Top-of-Casing	Depth to	Ground Water Elevation
Well	_	Elevation	Water	
ID	Date	(ft above msl)	(ft)	(ft above msl)
MW-7	01/29/91	97.53	8.91	88.62
ATA TT	04/30/91		8.38	89.15
	07/22/91		9.13	88.40
	02/21/92		6.87	90.66
	05/22/92		8.08	89.45
	07/07/92		8.82	88.71
	08/20/92		8.89	88.64
	11/18/92		9.54	87.99
	02/09/93		7.84	89.69
	06/16/93		7.80	89.73
	08/24/93		8.51	89.02
	11/23/93		8.70	88.83
	02/14/94		7.52	90.01
	05/25/94		9.04	88.49
	08/04/94		9.80	87.83
	11/08/94		8.45	89.08
	02/01/95		5.5 1	92.02
MW-8	01/29/91	97.13	8.47	88.66
111 11 0	04/30/91	, <u>.</u>	7.64	89.49
	07/22/91		8.36	88.77
	02/21/92		6.54	90.59
	05/22/92		7.68	89.45
	07/07/92		8.16	88.97
	08/20/92		8.25	88.88
	11/18/92		8.32	88.81
	02/09/93		5.58	91.55
	06/16/93		7.19	89.94
	08/24/93		7.98	89.15
	11/23/93	•	8.09	89.04
	02/14/94		9.42	87.71
	05/25/94		7.18	89.95
	08/04/94		8.51	88.62
	11/08/94		6.24	90.89
	02/01/95		3.94	93.19

Table 1. Ground Water Elevations - Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

		Top-of-Casing	Depth to	Ground Water
Well		Elevation	Water	Elevation
ID	Date	(ft above msl)	(ft)	(ft above msl)
MW-9	01/29/91	99.72	8.27	91.45
20200	04/30/91		7.62	92.10
	07/22/91		8.48	91.24
	02/21/92		6.91	92.81
	05/22/92		8.64	91.08
	07/07/92		7.55	92.17
	08/20/92		7.38	92.34
	11/18/92		10.17	89.55
	02/09/93		6.89	92.83
	06/16/93		8.74	90.98
	08/24/93		8.32	91.40
	11/23/93		8.17	91.55
	02/14/94		7.67	92.05
	05/25/94		7.89	91.83
	08/04/94		9.76	89.96
	11/08/94		7.75	91.97
	02/01/95		5.66	94.06
MW-10	01/29/91	98.99	10.81	88.18
1V1 VV - 1O	04/30/91	90.99	8.79	90.20
	07/22/91		9.94	89.05
	02/21/92		9.11	89.88
	05/22/92		9.14	89.85
	07/07/92		9.87	89.12
	08/20/92		9.30	89.69
	11/18/92		10.21	88.78
	02/09/93		7.63	91.36
	06/16/93		8.57	90.42
	08/24/93		9.61	89.38
	11/23/93		10.10	88.89
	02/14/94		9.01	89.98
	05/25/94		8.84	90.15
	08/04/94	,	9.82	89.17
	11/08/94		9.40	89.59
	02/01/95		6.78	92.21

Table 2. Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California

Well ID and Sampling	Date	Depth to Water	ТРН-G	TPH-D	ТРН-МО	В	E	Τ	X	VOCs
Frequency	Sampled	(ft)				parts per billio	on (ug/L)			
MW-1	01/29/91	10.7	11 000	21 0002	< 500	310	500	41	400	
	01/29/91	10.7	11,000	21,000°	<500 <500	250	310	41 32	300	
Quarterly		9.4	8,300	2,100						
	07/22/91	10.5	11,000	3,800	< 500	310	290	36 36	280	
	02/24/92	8.3	7,300	8,900 ^b	800	200	340		270	
	05/22/92	10.0	7,600	18,000 ^{bc}		140	300	< 50	140	***
	07/07/92	10.0								
	08/20/92	10.3	9,100	5,200 ^b		530	860	340	540	,
	11/18/92	10.6	15,000	4,100 ^b		220	790	50	340	
	02/09/93	8.7	7,000	1,200		130	220	23	160	
	06/16/93	9.7	4,800			150	320	31	130	
	08/24/93	10.2	10,000			170	610	27	170	
	11/23/93	10.4	7,600			190	430	< 12	140	
	11/23/93 ^{dup}	10.4	4,800			190	430	15	130	
	02/14/94	9.1	8,000			150	210	47	68	
	02/14/94 ^{dup}	9.1	8,900			160	230	45	76	
	05/25/94	9.5	8,800	***		95	210	< 10	63	
	08/04/94	10.5	6,200			150	350	14	180	
	08/04/94 ^{dup}	10.5	6,200			170	280	16	160	
	11/08/94	10.2	7,600			190	480	< 10	200	
	02/01/95	6.9	8,200			130	170	21	130	
	02/01/95 ^{dup}	6.9	7,100		<u></u>	130	170	18	130	
MW-2	01/29/91	13.2	< 50	< 50	< 50	< 0.5	< 0.5	< 0.5	< 0.5	
Bi-annual	04/30/91	10.9	< 50	< 50	< 50	< 0.5	< 0.5	< 0.5	< 0.5	·
2nd and	07/22/91	12.1	<50	<50	< 5 0	< 0.5	< 0.5	< 0.5	< 0.5	
4th	02/23/92	10.0	< 50			< 0.5	< 0.5	< 0.5	<0.5	
Quarter	05/22/92	11.5	<50			< 0.5	< 0.5	< 0.5	< 0.5	

⁻ Table 2 continues on next page -

Table 2. Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

Well ID and Sampling	Date	Depth to Water	TPH-G	TPH-D	ТРН-МО	В	E	Τ	X	VOCs
Frequency	Sampled	(ft)				parts per billic	n (119/T) ——			
requency	- Cumpicu	(xt)				parts per onne	л (ug/15)	·		
	07/07/92	11.5								
	08/20/92	11.7	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/18/92	13.0	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/09/93	10.0	95			< 0.5	< 0.5	< 0.5	< 0.5	
	06/16/93	11.6	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	08/24/93	12.1	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/23/93	12.7	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/14/94	10.9	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	05/25/94	11.0	100			1.2	2.3	4.9	13	
	11/08/94	12.3	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
MW-3	01/29/91	11.0	2,300	410 ^a	< 500	17	10	14.1	230	
Quarterly	04/30/91	9.5	< 50	260	< 500	22	7.0	4.0	17	
•	07/22/91	10.6	2,000	310	< 500	51	< 0.5	< 0.5	< 0.5	
	02/24/92	8.9	2,800	640 ^d		15	< 2.5	2.8	12	
· ·	05/22/92	9.3	3,700	220^{bc}		27	20	11	110	
	07/07/92	10.2								
	08/20/92	10.4	13,000	340 ^b		72	71	85	140	
	11/18/92	10.7	2,100	430 ^b		21	11	3.6	13	
	02/09/93	9.3	3,300	83		21	6.1	5.6	< 0.5	
	02/02/93 ^{dup}	9.3	3,500	130.		18	7.2	8.8	< 0.5	
	06/16/93	9.5	3,500°			66	< 0.5	6	< 0.5	
	08/24/93	10.5	3,400 ^e			110	<5	< 5	< 5	
	11/23/93	10.7	3,000			36	6.9	44	23	
	02/14/94	9.6	4,700 ^g			9.9	8.8	5.2	< 5.0	
	05/25/94	10.0	1,200			< 10	< 10	< 10	< 10	
	08/04/94	10.6	2,600			29	14	<5	11	

Table 2. Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

Well ID and Sampling	Date	Depth to Water	TPH-G	TPH-D	ТРН-МО	В	E	Т	X	VOCs
Frequency	Sampled	(ft)			·	- parts per billie	on (ug/L)			
Trequency	Sampled	(11)				- paris per onni	on (ug/L) ——			
	11/08/94	11.0	2,600			5.5	1.9	1.5	0.9	
	11/08/94 ^{dup}	11.0	2,700			12	6.8	5.0	3.5	
	02/01/95	8.3	4,600		ala kala kata da ka		3.2	1.2	2.5	· <u></u>
MW-4	01/29/91	. 10.7	2,600	1,300	< 500	83	< 0.5	< 0.5	110	
Quarterly	04/30/91	9.4	2,600	750	< 500	22	7.0	4.0	17	
	07/22/91	10.3	4,300	1,200	< 500	120	< 0.5	< 0.5	10	
	02/24/92	7.6	2,000	8,300 ^b		31	3.5	6.3	6.6	
	05/22/92	9.9	3,600	3,400 ^{bc}		55	3	5	10	
	07/07/92	10.0								
	08/20/92	10.3	3,100	3,400		100	14	45	45	
	11/18/92	10.5	2,200	1,400		32	4.2	12	24	
	02/09/93	8.1	1,500	180		1.1	< 0.5	< 0.5	< 0.5	
	06/16/93	9.6	1,100			120	5.1	47	19	
	08/24/93	10.0	2,700			46	25	11	0.97	
	11/23/93	10.2	2,500			23	3.7	5.7	16	
	02/14/94	8.8	1,500			12	< 2.5	7.8	< 2.5	
	05/25/94	9.6	810			20	<2	<2	4.0	w==
	08/04/94	10.6	2,300			99	6.3	15	24	
•	11/08/94	9.2	< 50	·		< 0.5	< 0.5	< 0.5	< 0.5	
	02/01/95	6.5	960			5.6	2.6	2.2	2.8	
MW-5	01/29/91	11.7	3,100	720	< 500	86	24	< 0.5	28	
Quarterly	04/30/91	10.4	< 50	90	< 500	46	9.0	< 0.5	9	
	07/22/91	11.4	1,700	300	< 500	23	6,700	< 0.5	10,000	
	02/23/94	9.2	240	180 ^h	< 0.5	1	< 0.5	< 0.5	1	
	05/22/92	10.9	6,200	$7,100^{bc}$		6	56	95	99	
	07/07/92	10.9								

[—] Table 2 continues on next page —

Table 2. Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

Well ID and Sampling	Date	Depth to Water	TPH-G	ТРН-D	ТРН-МО	В	E	T	x	VOC
Frequency	Sampled	(ft)	4			parts per billio	n (ug/L)			
requency	Dampida	(10)	`	<u> </u>		parts per onne	(46, 2)			
	08/20/92	11.1	7,400	120 ^b		56	91	95	150	
	11/18/92	11.2	3,300	320 ^b		27	20	<12.5	470	
	02/09/93	10.0	160	< 50		< 0.5	< 0.5	< 0.5	< 0.5	
	06/16/93	11.0	140			0.8	< 0.5	< 0.5	< 0.5	
	08/24/93	11.3	1,000			7.9	2.2	<1	< 1.5	
	11/23/93	11.3	2,000		·	67	11	15	33	
	02/14/94	10.3	660			1.3	0.5	< 0.5	0.7	
	05/25/94	10.5	670			0.65	2.6	< 0.5	< 0.5	
	08/04/94	11.5	700			5.0	1.2	< 0.5	< 0.5	
	11/08/94	11.2	810			4.2	1.5	< 0.5	0.8	
	02/01/.95	9.0	110			7.0	< 0.5	<0.5	< 0.5	``
MW-6	01/29/91	10.2	< 50	860	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
Quarterly	04/30/91	9.1	< 50	1,100	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
	07/22/91	10.1	< 50	1,200	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
•	02/23/92	7.1	< 50	60 ^d		< 0.5	< 0.5	< 0.5	< 0.5	
	05/22/92	9.5	< 50	650°		< 0.5	< 0.5	< 0.5	< 0.5	
	07/07/92	9.5						·		
	08/20/92	9.8	140 ^e	510 ^c		< 0.5	< 0.5	< 0.5	< 0.5	
	11/18/92	10.0	200°	350		< 0.5	< 0.5	< 0.5	< 0.5	
	02/09/93	7.9	14,000			< 0.5	< 0.5	< 0.5	< 0.5	
	06/16/93	8.7	5,700°		·	< 0.5	< 0.5	22	34	
	06/16/93 ^{dup}	8.7	5,600			< 0.5	< 0.5	< 0.5	< 0.5	
	08/24/93	9.6	4,300°			<12.5	< 12.5	<12.5	< 12.5	
•	08/24/93 ^{dup}	9.6	3,800°			< 12.5	< 12.5	<12.5	< 12.5	
	11/23/93	9.8	3,300°			< 12	< 12	< 12	< 12	n
	02/14/94	8.2	14,000 ⁱ			< 12.5	< 12.5	< 12.5	< 12.5	
	05/25/94	8.8	$< 1,000^{i}$			< 10	< 10	< 10	< 10	

Table 2. Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

Well ID and Sampling	Date	Depth to Water	TPH-G	TPH-D	ТРН-МО	В	Е	Т	х	VOCs
Frequency	Sampled	(ft)				- parts per billio	on (ug/L)			
	o = (o = (o 4dun									
	05/25/94 ^{dup}	8.8	<1,000 ^j			< 10	< 10	< 10	< 10	
*	08/04/94	10.1	250 ^k			< 0.5	< 0.5	< 0.5	< 0.5	
	11/08/94	8.9	4,600°		uulu Urunungo go ali akenyanu intiki.	< 0.5	< 0.5	< 0.5	< 0.5	
	02/01/95	7.0	710°			<0.5	< 0.5	<0.5	< 0.5	nd-a
MW-7	01/28/91	8.9	< 50	< 50	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
Bi-annual	05/01/91	8.3	< 50	< 50	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
(2nd & 4th	07/23/91	9.1	< 50	< 50	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
Quarters)	02/23/92	6.8	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	05/22/92	8.0	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	07/07/92	8.8								
	08/20/92	8.8	< 50	•		< 0.5	< 0.5	< 0.5	< 0.5	
	11/18/92	9.5	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/09/93	7.8	72			< 0.5	< 0.5	< 0.5	< 0.5	
	06/16/93	7.8	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	08/24/93	8.5	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/23/93	8.7	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/14/94	7.5	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	05/25/94	9.0	< 50			< 0.5	< 0.5	0.63	0.93	
	11/08/94	8.4	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
MW-8	01/28/91	8.4	< 50	< 50	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
Bi-annual	05/01/91	7.6	< 50	< 50	< 500	<0.5	< 0.5	< 0.5	< 0.5	
(2nd & 4th	07/23/91	8.3	< 50	<50	600	<0.5	< 0.5	< 0.5	< 0.5	
Quarters)	02/23/92	6.5	< 50			<0.5	< 0.5	< 0.5	< 0.5	
Ç	05/22/92	7.6	< 50			<0.5	< 0.5	< 0.5	< 0.5	
	07/07/92	8.1								
	08/20/92	8.2	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
			•							

⁻ Table 2 continues on next page -

Table 2. Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

Well ID and Sampling	Date	Depth to Water	ТРН-С	TPH-D	ТРН-МО	В	Е	T	X	VOC
Frequency	Sampled	(ft)				parts per billio	n (ug/L) ——			
	11.110.100	0.0	- 50			40.5	.0.0		- 0 =	
	11/18/92	8.3	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/09/93	5.5	63			< 0.5	< 0.5	< 0.5	< 0.5	
	06/16/93	7.1	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	08/24/93	7.9	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/23/93	8.0	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/14/94	9.4	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	05/25/94	7.1	< 50			< 0.5	< 0.5	1.1	2.5	
	11/08/94	6.2	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
MW-9	01/28/91	8.2	< 50	< 50	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
Bi-annual	05/01/91	7.6	< 50	< 50	< 500	0.6	< 0.5	< 0.5	1.1	
(2nd & 4th	07/23/91	8.4	< 50	< 50	800	< 0.5	< 0.5	< 0.5	< 0.5	
Quarters)	02/23/92	6.9	< 50			<0.5	< 0.5	< 0.5	< 0.5	
(,	05/22/92	8.6	< 50			<0.5	< 0.5	< 0.5	< 0.5	
	07/07/92	7.5								
	08/20/92	7.3	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	08/20/92 ^{dup}	7.3	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/18/92	10.1	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/18/92 ^{dup}	10.1	< 5 0			<0.5	< 0.5	< 0.5	< 0.5	
	02/09/93	6.8	290	110		6	< 0.5	< 0.5	< 0.5	
	06/16/93	8.7	90 ^e			< 0.5	< 0.5	<0.5	< 0.5	
	08/24/93	8.3	50°			<0.5	< 0.5	<0.5	< 0.5	
	11/23/93	8.1	< 5 0							
				***		< 0.5	< 0.5	< 0.5	< 0.5	no
	02/14/94	7.6	<50			< 0.5	< 0.5	< 0.5	< 0.5	
	05/25/94	7.8	56			1.3	1.4	4.0	8.3	
	11/08/94	7.7	< 50			< 0.5	< 0.5	< 0.5	< 0.5	

Table 2. Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California (continued)

Well ID and Sampling	Date	Depth to Water	TPH-G	TPH-D	ТРН-МО	В	E	T	X	VOCs
Frequency	Sampled	(ft)				parts per billio	n (ug/L)			
MW-10	01/28/91	10.8	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
Bi-annual	05/01/91	8.7	< 50	460	< 500	< 0.5	< 0.5	< 0.5	< 0.5	
(2nd & 4th	07/23/91	9.9	< 50	< 50	900	< 0.5	< 0.5	< 0.5	< 0.5	·
Quarter)	02/23/92	9.1	< 50	120		< 0.5	< 0.5	< 0.5	< 0.5	
	05/22/92	9.1	< 50	310		< 0.5	< 0.5	< 0.5	< 0.5	
	07/07/92	9.8								
	08/20/92	9.3	< 50	460		< 0.5	< 0.5	< 0.5	< 0.5	
	11/18/92	10.2	< 50	470		< 0.5	< 0.5	< 0.5	< 0.5	
	02/09/93	7.6	< 50	٠		< 0.5	< 0.5	< 0.5	< 0.5	***
	06/16/93	8.5	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	08/24/93	9.6	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/23/93	10.1	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/11/94	9.0	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	05/25/94	8.8	< 50			< 0.5	< 0.5	1.1	1.4	
	11/08/94	9.4	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
Travel	00/04/00		< 5 0			40.5	10.5	-0.7	.0.7	
	02/24/92		< 50	***		< 0.5	< 0.5	< 0.5	< 0.5	
Blank	05/22/92		< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	08/20/92		< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/18/92		<5 0			< 0.5	< 0.5	< 0.5	< 0.5	
	02/09/93		< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	06/16/93		< 50			< 0.5	<0.5	< 0.5	< 0.5	
	08/24/93	`	< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	11/23/93		< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	02/14/94		< 50			< 0.5	< 0.5	< 0.5	< 0.5	
	05/25/94		< 50			< 0.5	< 0.5	< 0.5	< 0.5	

[—] Table 2 continues on next page —

Table 2.	Analytical Results for Ground Water Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland,
	California (continued)

Well ID and Sampling	Date	Depth to Water	ТРН-G	TPH-D	ТРН-МО	В	E	T	х	VOCs			
Frequency	Sampled	(ft)	← parts per billion (ug/L) —										
	08/04/94		< 50			< 0.5	< 0.5	< 0.5	< 0.5				
	11/08/94		< 50			< 0.5	< 0.5	< 0.5	< 0.5				
	02/01/95		< 50			< 0.5	< 0.5	< 0.5	<0.5				
Bailer	08/20/92		< 50			< 0.5	< 0.5	< 0.5	< 0.5				
Blank	11/18/92		< 50			< 0.5	< 0.5	< 0.5	< 0.5				
DTSC MCLs			NE	NE	NE	1 .	680	100 ¹	1,750				

Abbreviations:

TPH-G = Total petroleum hydrocarbons as gasoline by Modified EPA Method 8015 TPH-D = Total petroleum hydrocarbons as diesel by Modified EPA Method 8015

TPH-MO = Total petroleum hydrocarbons as motor oil by EPA Method 8015

B = Benzene by EPA Method

E = Ethylbenzene by EPA Method

T = Toluene by EPA Method

X = Xylenes by EPA Method

VOC = Volatile organic compounds by EPA Method 8240

NE = Not established

--- = Not analyzed

< n =Not detected at detection limits of n ppb

DTSC MCLs = California Department of Toxic Substances Control maximum contaminant levels for drinking water

nd = not detected at or above the reporting limit for the analysis as performed dup = Duplicate sample

Notes:

- a = Compounds detected and calculated as diesel do not match the diesel standard; pattern is characteristic of weathered diesel.
- b = Concentration reported as diesel is primarily due to the presence of a lighter petroleum product, possible gasoline or kerosene
- c = Concentration reported as diesel is primarily due to a heavier petroleum product, possible motor oil or aged diesel fuel
- d = Compounds detected within the diesel range are not characteristics of the standard diesel chromatographic pattern
- e = Concentration reported as gasoline is partially or primarily due to the presence of a discrete hydrocarbon peak not indicative of gasoline
- f = 26 ppb benzene detected using EPA Method 8240
- g = The concentration reported as gasoline for MW-3 is due to the presence of a combination of gasoline and a discrete peak not indicative of gasoline
- h = Compounds detected and calculated as diesel appear to be the less volatile constituents of gasoline
- i = The concentration reported as gasoline for sample MW-6 is primarily due to the presence of a discrete peak not indicative of gasoline
- j = Sample diluted due to high-non hydrocarbon peak.
- k = The positive result has an atypical pattern for gasoline analysis.
- = DTSC recommended action level; MCL not established.



Table 3. Analytical Results for Nutrients, Hydrocarbon Utilizing Bacteria and Dissolved Oxygen for Shell Service Station WIC #204-5508-5801, 630 High Street, Oakland, California


Well	Date Sampled	Potassium (mg/L)	Phosphorous (mg/L)	Phosphate (mg/L)	Kjeldahl Nitrogen (mg/L)	Heterotrophic Bacteria Plate Count (CFU/ml)	Hydrocarbon Utilizing Bacteria (CFU/ml)	Dissolved Oxygen ^a (mg/L)
MW-1	06/17/93 08/24/93	12.0	0.80	2.4	5.4	80,000	310	1.73/1.58 1.49/1.70
	11/23/93 02/14/94							1.77/2.80 6.2/2.5
MW-4	06/17/93	1.5	3.50	11.0	4.2	8,200	200	1.86/4.82
	08/24/93							1.46/1.27
	11/23/93							5.29/6.59
	02/14/94							2.1/1.9
MW-5	06/17/93	8,8	0.07	0.21	1.0	3,200	490	1.53/2.72
	08/24/93			<u>-</u>				2.69/1.41
	11/23/93							8.20/3.09
	02/14/94							2.0/1.9
MW-6	06/17/93	0.8	0.06	0.19	1.1	2,000	450	8.46/9.73
	08/24/93							2.15/1.52
	11/23/93							3.86/6.75
	02/14/94							2.3/5.2
MW-9	06/17/93	14.0	0.22	0.66	0.8	9,200	2,300	1.51/2.17
	08/24/93					•		2.86/2.74
	11/23/93				•			3.41/3.78
	02/14/94							4.6/5.2

Abbreviations and Notes:

CFU/ml = Colony forming units per milliliter a = Field measurement of dissolved oxygen concentrations before and after well purging

ATTACHMENT A

BTS' GROUND WATER MONITORING REPORT AND ANALYTIC REPORT



BLAINE TECH SERVICES INC.

985 TIMOTHY DRIVE SAN JOSE, CA 95133 (408) 995-5535 FAX (408) 293-8773

February 17, 1995

Shell Oil Company P.O. Box 4023 Concord, CA 94524

Attn: Daniel T. Kirk

SITE: Shell WIC #204-5508-5801 630 High Street Oakland, California

QUARTER: 1st quarter of 1995

QUARTERLY GROUNDWATER SAMPLING REPORT 950201-K-1

This report contains data collected during routine inspection, gauging and sampling of groundwater monitoring wells performed by Blaine Tech Services, Inc. in response to the request of the consultant who is overseeing work at this site on behalf of our mutual client, Shell Oil Company. Data collected in the course of our field work is presented in a TABLE OF WELL GAUGING DATA. The field information was collected during our preliminary gauging and inspection of the wells, the subsequent evacuation of each well prior to sampling, and at the time of sampling.

Measurements taken include the total depth of the well and the depth to water. The surface of water was further inspected for the presence of immiscibles which may be present as a thin film (a sheen on the surface of the water) or as a measurable free product zone (FPZ). At intervals during the evacuation phase, the purge water was monitored with instruments that measure electrical conductivity (EC), potential hydrogen (pH), temperature (degrees Fahrenheit), and turbidity (NTU). In the interest of simplicity, fundamental information is tabulated here, while the bulk of the information is turned over directly to the consultant who is making professional interpretations and evaluations of the conditions at the site.

STANDARD PROCEDURES

Evacuation

Groundwater wells are thoroughly purged before sampling to insure that the sample is collected from water that has been newly drawn into the well from the surrounding geologic formation. The selection of equipment to evacuate each well is based on the physical characteristics of the well and what is known about the performance of the formation in which the well has been installed. There are several suitable devices which can be used for evacuation. The most commonly employed devices are air or gas actuated pumps, electric submersible pumps, and hand or mechanically actuated bailers. Our personnel frequently employ USGS/Middleburg positive displacement pumps or similar air actuated pumps which do not agitate the water standing in the well.

Normal evacuation removes three case volumes of water from the well. More than three case volumes of water are removed in cases where more evacuation is needed to achieve stabilization of water parameters and when requested by the local implementing agency. Less water may be removed in cases where the well dewaters and does not recharge to 80% of its original volume within two hours and any additional time our personnel have reason to remain at the site. In such cases, our personnel return to the site within twenty four hours and collect sample material from the water which has recharged into the well case.

Decontamination

All apparatus is brought to the site in clean and serviceable condition. The equipment is decontaminated after each use and before leaving the site. Effluent water from purging and on-site equipment cleaning is collected and transported to Shell's Martinez Manufacturing Complex in Martinez, California.

Free Product Skimmer

The column headed, VOLUME OF IMMISCIBLES REMOVED (ml) is included in the TABLE OF WELL GAUGING DATA to cover situations where a free product skimming device must be removed from the well prior to gauging. Skimmers are installed in wells with a free product zone on the surface of the water. The skimmer is a free product recovery device which often prevents normal well gauging and free product zone measurements. The 2.0" and 3.0" PetroTraps fall into the category of devices that obstruct normal gauging. In cases where the consultant elects to have our personnel pull the skimmers out of the well and gauge the well, our personnel perform the additional task of draining the accumulated free product out of the PetroTrap before putting it back in the well. This

recovered free product is measured and logged in the VOLUME OF IMMISCIBLES REMOVED column. Gauging at such sites is performed in accordance with specific directions from the professional consulting firm overseeing work at the site on Shell's behalf.

Sample Containers

Sample material is collected in specially prepared containers which are provided by the laboratory that performs the analyses.

Sampling

Sample material is collected in stainless steel bailer type devices normally fitted with both a top and a bottom check valve. Water is promptly decanted into new sample containers in a manner which reduces the loss of volatile constituents and follows the applicable EPA standard for handling volatile organic and semi-volatile compounds.

Following collection, samples are promptly placed in an ice chest containing prefrozen blocks of an inert ice substitute such as Blue Ice or Super Ice. The samples are maintained in either an ice chest or a refrigerator until delivered into the custody of the laboratory.

Sample Designations

All sample containers are identified with a site designation and a discrete sample identification number specific to that particular groundwater well. Additional standard notations (e.g. time, date, sampler) are also made on the label.

Chain of Custody

Samples are continuously maintained in an appropriate cooled container while in our custody and until delivered to the laboratory under a standard Shell Oil Company chain of custody. If the samples are taken charge of by a different party (such as another person from our office, a courier, etc.) prior to being delivered to the laboratory, appropriate release and acceptance records are made on the chain of custody (time, date, and signature of the person releasing the samples followed by the time, date and signature of the person accepting custody of the samples).

Hazardous Materials Testing Laboratory

The samples obtained at this site were delivered to National Environmental Testing, Inc. in Santa Rosa, California. NET is a California Department of Health Services certified Hazardous Materials Testing Laboratory and is listed as DOHS HMTL #178.

Objective Information Collection

Blaine Tech Services, Inc. performs specialized environmental sampling and documentation as an independent third party. In order to avoid compromising the objectivity necessary for the proper and disinterested performance of this work, Blaine Tech Services, Inc. performs no consulting and does not become involved in the marketing or installation of remedial systems of any kind. Blaine Tech Services, Inc. is concerned only with the generation of objective information, not with the use of that information to support evaluations and recommendations concerning the environmental condition of the site. Even the straightforward interpretation of objective analytical data is better performed by interested regulatory agencies, and those engineers and geologists who are engaged in the work of providing professional opinions about the site and proposals to perform additional investigation or design remedial systems.

Reportage

Submission of this report and the attached laboratory report to interested regulatory agencies is handled by the consultant in charge of the project. Any professional evaluations or recommendations will be made by the consultant under separate cover.

amis alle f.

Please call if we can be of any further assistance.

RCB/lp

attachments: table of well gauging data

chain of custody

certified analytical report

cc: Weiss Associates

5500 Shellmound Street

Emeryville, CA 94608-2411

ATTN: Michael Asport

TABLE OF WELL GAUGING DATA

DATA COLLECTION DATE	MEASUREMENT REFERENCED TO	QUALITATIVE OBSERVATIONS	DEPTH TO FIRST IMMISCIBLES LIQUID (FPZ)	THICKNESS OF LIQUID ZONE	VOLUME OF IMMISCIBLES REMOVED	DEPTH TO WATER	DEPTH TO WELL BOTTOM
		(sheen)	(feet)	(feet)	(mt)	(feet)	(feet)
	•						
2/1/95	TOC	ODOR	NONE	_		6.94	13.80
2/1/95	TOC		NONE			8.76	18.86
2/1/95	TOC	ODOR	NONE	_		8.31	17.10
2/1/95	TOC	ODOR	NONE		-	6.52	18.10
2/1/95	TOC	ODOR	NONE			9.05	17.54
2/1/95	TOC	ODOR	NONE	-	_	7.07	19.09
2/1/95	TOC		NONE			5.51	19.04
2/1/95	TOC		NONE			3.94	20.25
2/1/95	TOC		NONE			5.66	11.50
2/1/95	TOC	 ,	NONE	_	-	6.78	12.51
	2/1/95 2/1/95 2/1/95 2/1/95 2/1/95 2/1/95 2/1/95 2/1/95 2/1/95 2/1/95	COLLECTION REFERENCED DATE TO 2/1/95 TOC	COLLECTION DATE REFERENCED TO OBSERVATIONS 2/1/95 TOC (sheen) 2/1/95 TOC 2/1/95 TOC ODOR 2/1/95 TOC 2/1/95 TOC 2/1/95 TOC 2/1/95 TOC	COLLECTION DATE REFERENCED OBSERVATIONS IMMISCIBLES LIQUID (FPZ) 2/1/95 TOC ODOR NONE 2/1/95 TOC NONE 2/1/95 TOC ODOR NONE 2/1/95 TOC NONE	COLLECTION DATE REFERENCED OBSERVATIONS IMMISCIBLES LIQUID (FPZ) IMMISCIBLES LIQUID ZONE (feet) 2/1/95 TOC ODOR NONE — 2/1/95 TOC — NONE — 2/1/95 TOC ODOR NONE — 2/1/95 TOC — NONE —	COLLECTION DATE REFERENCED OBSERVATIONS IMMISCIBLES LIQUID (FPZ) LIQUID ZONE (FPZ) IMMISCIBLES REMOVED (FPZ) (FPZ) 2/1/95 TOC ODOR NONE - - 2/1/95 TOC - NONE - - 2/1/95 TOC ODOR NONE - - 2/1/95 TOC - NONE </td <td>COLLECTION DATE REFERENCED OBSERVATIONS IMMISCIBLES LIQUID (FPZ) LIQUID ZONE (MMISCIBLES TO LIQUID ZONE ZONE ZONE ZONE ZONE ZONE ZONE ZONE</td>	COLLECTION DATE REFERENCED OBSERVATIONS IMMISCIBLES LIQUID (FPZ) LIQUID ZONE (MMISCIBLES TO LIQUID ZONE ZONE ZONE ZONE ZONE ZONE ZONE ZONE

^{*} Sample DUP was a duplicate sample taken from well MW-1.

	SHELL OIL COMPANY RETAIL ENVIRONMENTAL ENGINEERIN										CH	All	10	F C	US	<u>IOI</u>) Y	REC	CORD -K/	Dal	0:2/1/45		
Silo Address:	NVIK	DIMMEN	HAL	ENGI	NEER	ING -	WE	ST				Şo	rlal N	lo:		<u> </u>	220	<u> </u>	<u>-K1</u>	Pag	10 01 /		
	H. 5/	<u>, , , , , , , , , , , , , , , , , , , </u>	DAK	AN	<u>'</u> \				, -	And	alys	is R	equ	lrec	1				LAB: 1	let			
204-550	08 —	580	/																CHICK OHE (I) SOX OHLY	C1/D1	TURN AROUND TIME		
Consultant Contact: ANIEL Consultant Name &	onsullant Name & Address: BLAINE TECH SERVICES INC 955 TIMOTHY DR. SHNJOSE, CA onsullant Contact: Phone No.: 408 1M KEUER Fax 1: 293877				Phone No.: 408		Phone No. 510) 675-6168 Fox #: 675-6160 En VICES INC SANJOSE, CA					6)		BTEX 8020			•				Sat Clourly/Disposal Water]]]]	24 hours PAF. 24 hours 2/4/45 16 days (Hormon)
onsulant Contact: IM KEUER omments: phone No.: 40 8 995-3335 Fax #: 293877					535 38773	5 Mod. Gas)	5 Mod. Diesel)	8020/602)	inics (EPA 824	ğ	TPH 8015 &					pex	Y/N	SOR/Alr Rem, or Sys.	-] eres] eres	HOIT: Holly lob as soon as Foutble of 24/48 hr. 1A1.			
	1/\10						PA 801	(EPA 801	(EPA 80	le Organics	or Disposal	blaatlon			so	ner Size	Preparation Used	l .	MATERIAL		SAMPLE		
Sample ID	Dale	Sludge	Soli	Water	ΛÎr	No. of conts.	TPH (E	IPH (E	आहर (Volafile	Test for	Comb			Asbesios	Container	Prepar	Сотроян	DESCRIPTION		CONDITION/ COMMENTS		
KwI	2/			XX		3						X											
MW3				1								X								_			
MW4												X							- 1-11				
iuws		-										X			·	•							
MW6			- <u></u>									X					-		, , ,				
DUP												X							(2/2/90	L			
EB						4						X							Dell	n la	cb		
TB	4			4		2			//			X							1 6	#			
Rollngulshod By (signaluro) Rollngulshod By (signaluro) Rollngulshod By (signaluro)	<u> </u>	Pilalo	d Name	ine		er_	Date	o: // o: //	2/95	Roce	olvod	(ŋŌu	aluro)	:			P	inlec	I Name:		Date: 2/1/7 Time: 70.22 Dote: Time:		
		THE	LABOR	Alory	MUST P	ROYIDE	Time		THIS	1 4.	-1 l:L	. NY	L 1/1/	3 10	-16 YYQI	CEAN			Mariner Alle		Date: 2395		



Santa Rosa Division 435 Tesconi Circle Santa Rosa, CA 95401

Tel: (707) 526-7200 Fax: (707) 526-9623

Jim Keller Blaine Tech Services 985 Timothy Dr. San Jose, CA 95133 Date: 02/09/1995

NET Client Acct. No: 1821 NET Pacific Job No: 95.00511

Received: 02/03/1995

Client Reference Information

Shell 630 High St., Oakland/950201-K1

Sample analysis in support of the project referenced above has been completed and results are presented on following pages. Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety. Please refer to the enclosed "Key to Abbreviations" for definition of terms. Should you have questions regarding procedures or results, please feel welcome to contact Client Services.

Approved by:

Judy Ridley

Project Coordinator

Operations Manager

Enclosure(s)





Client Acct: 1821 NET Job No: 95.00511 Date: 02/09/1995

ELAP Cert: 1386 Page: 2

Ref: Shell 630 High St., Oakland/950201-K1

SAMPLE DESCRIPTION: MW1

Date Taken: 02/01/1995

Time Taken:

NET Sample No: 235118					•			Run
			Reporting	r		Date	Date	Batch
Parameter	Results	Flags	Limit	Units	Method	Extracted	Analyzed	No.
TPH (Gas/BTXE,Liquid)								
METHOD 5030/M8015							02/04/1995	2555
DILUTION FACTOR*	10						02/04/1995	2555
as Gasoline	8,200		500	ug/L	5030	•	02/04/1995	2555
Carbon Range:	C5-C14						02/04/1995	2555
METHOD 8020 (GC, Liquid)							02/04/1995	2555
Benzene	130		5	ug/L	8020		02/04/1995	2555
Toluene	21		5	ug/L	8020		02/04/1995	2555
Ethylbenzene	170		5	ug/L	8020		02/04/1995	2555
Xylenes (Total)	130		5	ug/L	8020		02/04/1995	2555
SURROGATE RESULTS							02/04/1995	2555
Bromofluorobenzene (SURR)	100			% Rec.	5030		02/04/1995	2555



Client Acct: 1821 NET Job No: 95.00511

Date: 02/09/1995

ELAP Cert: 1386 Page: 3

Ref: Shell 630 High St., Oakland/950201-Kl

SAMPLE DESCRIPTION: MW3

Date Taken: 02/01/1995

Time Taken:

NET Sample No: 235119								Run
			Reporting	I		Date	Date	Batch
Parameter	Results	Flags	Limit	Units	Method	Extracted	Analyzed	No.
TPH (Gas/BTXE, Liquid)								
METHOD 5030/M8015							02/04/1995	2555
DILUTION FACTOR*	1						02/04/1995	2555
as Gasoline	4,600	FC	50	ug/L	5030		02/07/1995	2564
Carbon Range:	C5-C14						02/04/1995	2555
METHOD 8020 (GC, Liquid)							02/04/1995	2555
Benzene	27		0.5	ug/L	8020		02/04/1995	2555 -
Toluene	1.2		0.5	ug/L	8020		02/04/1995	2555
Ethylbenzene	3.2		0.5	ug/L	8020		02/04/1995	2555
Xylenes (Total)	2.5		0.5	ug/L	8020		.02/04/1995	2555
SURROGATE RESULTS							02/04/1995	2555
Bromofluorobenzene (SURR)	120			% Rec.	5030		02/04/1995	2555

FC : Compound quantitated at a 10% dilution factor.

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Acct: 1821 NET Job No: 95.00511 Date: 02/09/1995

ELAP Cert: 1386

Page: 4

Ref: Shell 630 High St., Oakland/950201-K1

SAMPLE DESCRIPTION: MW4

Date Taken: 02/01/1995

Time Taken:

NET Sample No: 235120								Run
			Reporting	J		Date	Date	Batch
Parameter	Results	Flags	Limit	Units	Method	Extracted	Analyzed	No.
TPH (Gas/BTXE, Liquid)								
METHOD 5030/M8015							02/05/1995	2557
DILUTION FACTOR*	ı						02/05/1995	2557
as Gasoline	960		50	ug/L	5030		02/05/1995	2557
Carbon Range:	C5~C14						02/05/1995	2557
METHOD 8020 (GC, Liquid)							02/05/1995	2557
Benzene	5.6		0.5	ug/L	8020		02/05/1995	2557
Toluene	2.2		0.5	ug/L	8020		02/05/1995	2557
Ethylbenzene	2.6		0.5	ug/L	8020		02/05/1995	2557
Xylenes (Total)	2.8		0.5	ug/L	8020		02/05/1995	2557
SURROGATE RESULTS						•	02/05/1995	2557
Bromofluorobenzene (SURR)	90			% Rec.	5030		02/05/1995	2557



Client Acct: 1821 NET Job No: 95.00511 Date: 02/09/1995

ELAP Cert: 1386 Page: 5

Ref: Shell 630 High St., Oakland/950201-K1

SAMPLE DESCRIPTION: MW5

Date Taken: 02/01/1995

Time Taken:

NET Sample No: 235121

NET Sample No: 235121								Kuii
			Reportin	g		Date	Date	Batch
Parameter	Results	Flags	Limit	Units	Method	Extracted	Analyzed	No.
TPH (Gas/BTXE, Liquid)								
METHOD 5030/M8015							02/05/1995	2557
DILUTION FACTOR*	ı						02/05/1995	2557
as Gasoline	110		50	ug/L	5030		02/05/1995	2557
Carbon Range:	C5-C12						02/05/1995	2557
METHOD 8020 (GC, Liquid)							02/05/1995	2557
Benzene	7.0		0.5	ug/L	8020		02/05/1995	2557
Toluene	ND		0.5	ug/L	8020		02/05/1995	2557
Ethylbenzene	ND		0.5	uġ/L	8020		02/05/1995	2557
Xylenes (Total)	ND		0.5	ug/L	8020		02/05/1995	2557
SURROGATE RESULTS							02/05/1995	2557
Bromofluorobenzene (SURR)	80			% Rec.	5030		02/05/1995	2557



Client Acct: 1821

Date: 02/09/1995

ELAP Cert: 1386

Ref: Shell 630 High St., Oakland/950201-K1

SAMPLE DESCRIPTION: MW6

Date Taken: 02/01/1995

Time Taken:

NET Sample No: 235122								Run
			Reporting		•	Date	Date	Batch
Parameter	Results	Flags	Limit	Units	Method	Extracted	Analyzed	No.
TPH (Gas/BTXE, Liquid)								
METHOD 5030/M8015							02/05/1995	2557
DILUTION FACTOR*	1						02/05/1995	2557
as Gasoline	710	G1	50	ug/L	5030		02/05/1995	2557
Carbon Range:	C4-C6						02/05/1995	2557
METHOD 8020 (GC, Liquid)							02/05/1995	2557
Benzene	ND		0.5	ug/L	8020		02/05/1995	2557
Toluene	ND		0.5	ug/L	8020		02/05/1995	2557
Ethylbenzene	ND		0.5	ug/L	8020		02/05/1995	2557
Xylenes (Total)	ND		0.5	ug/L	8020		02/05/1995	2557
SURROGATE RESULTS							02/05/1995	2557
Bromofluorobenzene (SURR)	90			% Rec.	5030		02/05/1995	2557

 ${\tt G1}$: The result for Gasoline is an unk. HC which consists of a single peak.

NOTE: Results apply only to the samples analyzed. Reproduction of this report is permitted only in its entirety.



Client Acct: 1821 NET Job No: 95.00511 Date: 02/09/1995

ELAP Cert: 1386

Page: 7

Ref: Shell 630 High St., Oakland/950201-K1

SAMPLE DESCRIPTION: DUP

Date Taken: 02/01/1995

Time Taken:

NET Sample No: 235123							Run
		Reportin	g		Date	Date	Batch
Parameter	Results Flags	Limit	Units	Method	Extracted	Analyzed	No.
TPH (Gas/BTXE,Liquid)							
METHOD 5030/M8015						02/04/1995	2555
DILUTION FACTOR*	5					02/04/1995	2555
as Gasoline	7,100	200	ug/L	5030		02/04/1995	2555
Carbon Range:	C5-C12					02/04/1995	2555
METHOD 8020 (GC, Liquid)						02/04/1995	2555
Benzene	130	2	ug/L	8020		02/04/1995	2555
Toluene	18	2	ug/L	8020		02/04/1995	2555
Ethylbenzene	170	2	ug/L	8020		02/04/1995	2555
Xylenes (Total)	130	2	ug/L	8020		02/04/1995	2555
SURROGATE RESULTS						02/04/1995	2555
Bromofluorobenzene (SURR)	109		% Rec.	5030		02/04/1995	2555



Client Acct: 1821 NET Job No:

Date: 02/09/1995

02/04/1995 2555

ELAP Cert: 1386

Page: 8

Ref: Shell 630 High St., Oakland/950201-Kl

92

SAMPLE DESCRIPTION: EB

Date Taken: 02/01/1995

Time Taken:

Bromofluorobenzene (SURR)

NET Sample No: 235124 Run Date Reporting Date Batch Parameter Results Flags Units Extracted Analyzed TPH (Gas/BTXE, Liquid) METHOD 5030/M8015 02/04/1995 2555 DILUTION FACTOR* 1 02/04/1995 2555 as Gasoline ND 50 ug/L 5030 02/04/1995 2555 Carbon Range: 02/04/1995 2555 METHOD 8020 (GC, Liquid) 02/04/1995 2555 02/04/1995 2555 Benzene ND 0.5 ug/L 8020 Toluene 0.5 ug/L 8020 02/04/1995 2555 ND 8020 02/04/1995 2555 ug/L Ethylbenzene ND 0.5 02/04/1995 2555 Xylenes (Total) ND 0.5 ug/L 8020 02/04/1995 2555 SURROGATE RESULTS

% Rec.

5030



Client Acct: 1821 NET Job No:

Date: 02/09/1995

ELAP Cert: 1386

Page: 9

Ref: Shell 630 High St., Oakland/950201-Kl

SAMPLE DESCRIPTION: TB

Date Taken: 02/01/1995

Time Taken:

NET Sample No: 235125

Run Reporting Date Date Batch Results Flags Limit Units Method Extracted Analyzed TPH (Gas/BTXE, Liquid) METHOD 5030/M8015 02/04/1995 2555 DILUTION FACTOR* 1 02/04/1995 2555 as Gasoline ND 50 ug/L 5030 02/04/1995 2555 Carbon Range: 02/04/1995 2555 METHOD 8020 (GC, Liquid) 02/04/1995 2555 0.5 ug/L 8020 02/04/1995 2555 Benzene ND ND 0.5 ug/L 8020 02/04/1995 2555 Toluene 02/04/1995 2555 Ethylbenzene ug/L 8020 ND 0.5 02/04/1995 2555 ug/L 8020 Xylenes (Total) ND 0.5 02/04/1995 2555 SURROGATE RESULTS 02/04/1995 2555 Bromofluorobenzene (SURR) % Rec. 5030



Client Acct: 1821 NET Job No: 95.00511 Date: 02/09/199

LAP Cert: 138

Page: 10

Ref: Shell 630 High St., Oakland/950201-K1

CONTINUING CALIBRATION VERIFICATION STANDARD REPORT

		CCV	CCA				
	CCA	Standard	Standard				Run
	Standard	Amount	Amount		Date	Analyst	Batch
Parameter	% Recovery	Found	Expected	Units	Analyzed	Initials	
TPH (Gas/BTXE,Liquid)							
as Gasoline	109.0	1.09	1.00	mg/L	02/04/1995	dfw	2555
Benzene	94.8	4.74	5.00	ug/L	02/04/1995	dfw	2555
Toluene	100.2	5.01	5.00	ug/L	02/04/1995	dfw	2555
Ethylbenzene	94.4	4.72	5.00	ug/L	02/04/1995	ďfw	2555
Xylenes (Total)	94.7	14.2	15.0	ug/L	02/04/1995	dfw	2555
Bromofluorobenzene (SURR)	98.0	98	100	% Rec.	02/04/1995	dfw	2555
TPH (Gas/BTXE, Liquid)							
as Gasoline	113.0	1.13	1.00	mg/L	02/05/1995	dfw	2557
Benzene	97.8	4.89	5.00	ug/L	02/05/1995	dfw	2557
Toluene	92.4	4.62	5.00	ug/L	02/05/1995	dfw	2557
Ethylbenzene	98.4	4.92	5.00	ug/L	02/05/1995	dfw	2557
Xylenes (Total)	98.0	14.7	15.0	ug/L	02/05/1995	dfw	2557
Bromofluorobenzene (SURR)	95.0	95	100	% Rec.	02/05/1995	dfw	2557
TPH (Gas/BTXE,Liquid)							
as Gasoline	96.0	0.96	1.00	mg/L	02/07/1995	aal	2564
Benzene	97.2	4.86	5.00	ug/L	02/07/1995	aal	2564
Toluene	100.6	5.03	5.00	ug/L	02/07/1995	aal	2564
Ethylbenzene	93.4	4.67	5.00	ug/L	02/07/1995	aal	2564
Xylenes (Total)	104.7	15.7	15.0	ug/L	02/07/1995	aal	2564
Bromofluorobenzene (SURR)	106.0	106	100	% Rec.	02/07/1995	aal	2564



Date: 02/09/1995

ELAP Cert: 1386

Page: 11

Ref: Shell 630 High St., Oakland/950201-K1

METHOD BLANK REPORT

	Method				•	
	Blank					Run
	Amount	Reporting		Date	Analyst	Batch
Parameter	Found	Limit	Units	Analyzed	Initials	
TPH (Gas/BTXE, Liquid)						
as Gasoline	ND	0.05	mg/L	02/04/1995	dfw	2555
Benzene	· ND	0.5	ug/L	02/04/1995	dfw	2555
Toluene	ND	0.5	ug/L	02/04/1995	dfw	2555
Ethylbenzene	ND	0.5	ug/L	02/04/1995	dfw	2555
Xylenes (Total)	ND	0.5	ug/L	02/04/1995	dfw	2555
Bromofluorobenzene (SURR)	99		% Rec.	02/04/1995	dfw	2555
TPH (Gas/BTXE, Liquid)						
as Gasoline	ND	0.05	mg/L	02/05/1995	dfw	2557
Benzene	ND	0.5	ug/L	02/05/1995	dfw	2557
Toluene	ND	0.5	ug/L	02/05/1995	dfw	2557
Ethylbenzene	ND	0.5	ug/L	02/05/1995	dfw	2557
Xylenes (Total)	ND	0.5	ug/L	02/05/1995	dfw	2557
Bromofluorobenzene (SURR)	97		% Rec.	02/05/1995	dfw	2557
TPH (Gas/BTXE, Liquid)						
as Gasoline	ND	0.05	mg/L	02/07/1995	aal	2564
Benzene	ND	0.5	ug/L	02/07/1995	aal	2564
Toluene	ND	0.5	ug/L	02/07/1995	aal	2564
Ethylbenzene	ND	0.5	ug/L	02/07/1995	aal	2564
Xylenes (Total)	ND	0.5	ug/L	02/07/1995	aal	2564
Bromofluorobenzene (SURR)	82		% Rec.	02/07/1995	aal	2564



Client Acct: 1821 NET Job No: 95.00511 Date: 02/09/1995

ELAP Cert: 1386 Page: 12

Ref: Shell 630 High St., Oakland/950201-Kl

MATRIX SPIKE / MATRIX SPIKE DUPLICATE

Parameter	Matrix Spike % Rec.	Matrix Spike Dup % Rec.	RPD	Spike <u>Amo</u> unt	Sample	Matrix Spike	Matrix Spike Dup: Conc.	Units	Date Analyzed	Run Batch	Sample Spiked
TPH (Gas/BTXE, Liquid)									,		234971
as Gasoline	90.0	87.0	3.4	1.00	ND	0.90	0.87	mg/L	02/05/1995	2557	234971
Benzene	94.2	96.6	2.5	20.8	ND	19.6	20.1	ug/L	02/05/1995		234971
Toluene	94.5	93.5	1.1	86.1	ND	81.4	80.5	ug/L	02/05/1995		234971
TPH (Gas/BTXE, Liquid)								٥,	,,	200,	235238
as Gasoline	111.0	103.0	7.5	1.00	0.09	1.20	1.12	mg/L	02/07/1995	2564	235238
Benzene	117.5	107.3	9.1	20.6	0.6	24.8	22.7	ug/L	02/07/1995		235238
Toluene	117.6	110.2	6.5	77.8	1.4	92.9	87.1	ug/L	02/07/1995		



KEY TO ABBREVIATIONS and METHOD REFERENCES

<	:	Less than; When appearing in results column indicates analyte
		not detected at the value following. This datum supercedes the listed Reporting Limit.

: Reporting Limits are a function of the dilution factor for any given sample. To obtain the actual reporting limits for this sample, multiply the stated Reporting Limits by the dilution factor (but do not multiply reported values).

ICVS : Initial Calibration Verification Standard (External Standard).

mean : Average; sum of measurements divided by number of measurements.

mg/Kg (ppm): Concentration in units of milligrams of analyte per kilogram of sample, wet-weight basis (parts per million).

mg/L : Concentration in units of milligrams of analyte per liter of sample.

mL/L/hr : Milliliters per liter per hour.

MPN/100 mL : Most probable number of bacteria per one hundred milliliters of sample.

N/A : Not applicable.

NA : Not analyzed.

ND : Not detected; the analyte concentration is less than applicable listed reporting limit.

NTU : Nephelometric turbidity units.

RPD : Relative percent difference, 100 [Value 1 - Value 2]/mean value.

SNA : Standard not available.

ug/Kg (ppb): Concentration in units of micrograms of analyte per kilogram of sample, wet-weight basis (parts per billion).

ug/L : Concentration in units of micrograms of analyte per liter of sample.

umhos/cm : Micromhos per centimeter.

Method References

Methods 100 through 493: see "Methods for Chemical Analysis of Water & Wastes", U.S. EPA, 600/4-79-020, rev. 1983.

Methods 601 through 625: see "Guidelines Establishing Test Procedures for the Analysis of Pollutants" U.S. EPA, 40 CFR, Part 136, rev. 1988.

Methods 1000 through 9999: see "Test Methods for Evaluating Solid Waste", U.S. EPA SW-846, 3rd edition, 1986.

 $\underline{\rm SM}$: see "Standard Methods for the Examination of Water & Wastewater, 17th Edition, APHA, 1989.

COOLER RECEIPT FORM

..

Project: 960201-Kl Cooler received on: 2395	Log No: 5339 by
	(signature)
Were custody papers present?.	YES NO
i e	filled out?
ì	d?
•	d condition (unbroken)?YES NO
)id bottle labels match COC?.	YES NOB
Vere proper bottles used for	analysis indicated?YES) NO
Correct preservatives used?	YES NO
/OA vials checked for headspa Note which voas (if a	ce bubbles?YES NO
Sample descriptor:	Number of vials:
All VOAs with headspace bubb used for analysis	les have been set aside so they will not be
ist here all other jobs rece	ived in the same cooler:
Client Job #	NET log #
	- Control of the Cont

(coolerrec)