

C A M B R I A

3737

July 7, 2000

Barney Chan
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

Re: **Second Quarter 2000 Monitoring Report**
Shell-branded Service Station
630 High Street
Oakland, California
Incident #98995751
Cambria Project #242-0318-002

*Monitoring MTBE release in MW-3
only concern is whether MTBE is result of
1.4.0 or organic release.*



Dear Mr. Chan:

On behalf of Equiva Services LLC, Cambria Environmental Technology, Inc. (Cambria) is submitting this groundwater monitoring report in accordance with the reporting requirements of 23 CCR 2652d.

SECOND QUARTER 2000 ACTIVITIES

Groundwater Monitoring: Blaine Tech Services, Inc. (Blaine) of San Jose, California gauged and sampled all site wells, calculated groundwater elevations, and compiled the analytical data. Cambria prepared a groundwater elevation contour map (Figure 1). Blaine's report, presenting the laboratory report and supporting field documents, is included as Attachment A. The sampling frequency of well MW-3 was increased from annual to semi-annual, effective in second quarter 2000.

ANTICIPATED FUTURE 2000 ACTIVITIES

Groundwater Monitoring: The next sampling event is scheduled for the fourth quarter 2000. Blaine will gauge and sample selected site wells and tabulate the data. Cambria will prepare a monitoring report.

Oakland, CA
San Ramon, CA
Sonoma, CA
Portland, OR

**Cambria
Environmental
Technology, Inc.**

1144 65th Street
Suite B
Oakland, CA 94608
Tel (510) 420-0700
Fax (510) 420-9170

00 JUL 12 AM 10:38
ENVIRONMENTAL
PROTECTION

CLOSING

We appreciate the opportunity to work with you on this project. Please call Stephan Bork at (510) 420-3344 if you have any questions or comments.

Sincerely,
Cambria Environmental Technology, Inc



Anni Kreml
Senior Staff Scientist

Stephan A. Bork, C.E.G., C.H.G.
Associate Hydrogeologist





Figure: 1 - Groundwater Elevation Contour Map

Attachment: A - Blaine Groundwater Monitoring Report and Field Notes

cc: Karen Petryna, Equiva Services LLC, P.O. Box 7869, Burbank, California 91510-7869

g:\oakland630high\qm\2q00qm.doc

RAMP TO HIGHWAY 880



EXPLANATION

- MW-1 Monitoring well location
- * Data anomalous, well not contoured
- Groundwater flow direction
- Groundwater elevation contour, in feet above mean sea level (msl), approximately located; dashed where inferred

Well
ELEV.
 Well designation
 Groundwater elevation, in feet above msl
 Benzene and MTBE concentrations are in parts per billion and are analyzed by EPA Method 8020; MTBE results in parentheses are analyzed by EPA Method 8260.

HIGH STREET

JENSEN STREET

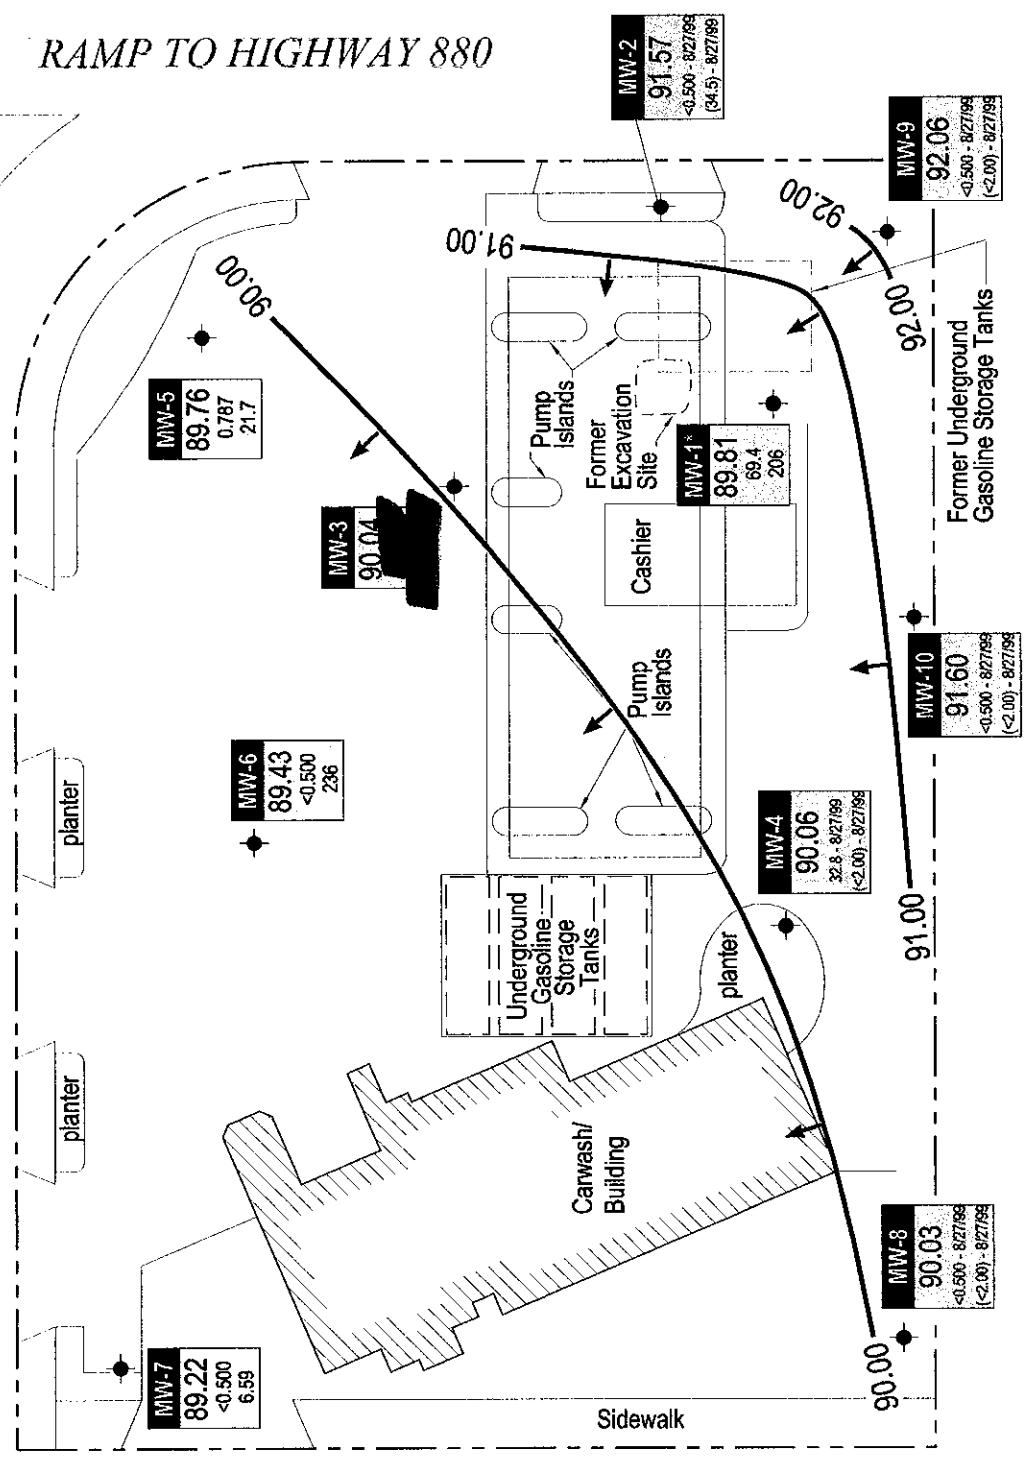


FIGURE 1

G:\OAKLAND\30HIGH\FIGURES\30M00-MP.DWG

Shell-branded Service Station
 630 High Street
 Oakland, California
 Incident #98995751



C A M B R I A

Groundwater Elevation Contour Map

April 26, 2000

ATTACHMENT A
Blaine Groundwater Monitoring Report
and Field Notes

BLAINE
TECH SERVICES, INC.



1680 ROGERS AVENUE
SAN JOSE, CA 95112-1105
(408) 573-7771 FAX
(408) 573-0555 PHONE
CONTRACTOR'S LICENSE #746684
www.blainetech.com

June 1, 2000

Karen Petryna
Equiva Services LLC
P.O. Box 7869
Burbank, CA 91510-7869

Second Quarter 2000 Groundwater Monitoring at
Shell-branded Service Station
630 High Street
Oakland, CA

Monitoring performed on April 26, 2000

Groundwater Monitoring Report **000426-A-2**

This report covers the routine monitoring of groundwater wells at this Shell-branded facility. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purge water (if applicable) is, likewise, collected and transported to the Martinez Refining Company.


Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight hour refresher courses.

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. In order to avoid compromising the objectivity necessary for the proper and disinterested performance of this work, Blaine Tech Services, Inc. concentrates on objective data collection and does not participate in the interpretation of analytical results, the definition of geological or hydrological conditions, the formulation of recommendations, or the marketing of remedial systems.

Please call if you have any questions.

Yours truly,

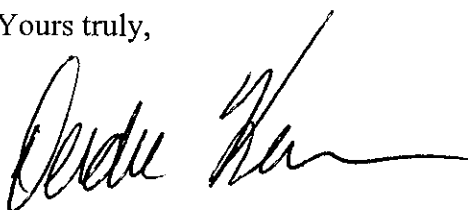A handwritten signature in black ink, appearing to read "Deidre Kerwin", with a long horizontal flourish extending to the right.

Deidre Kerwin
Operations Manager

DK/jt

attachments: Cumulative Table of WELL CONCENTRATIONS
Certified Analytical Report
Field Data Sheets

cc: Anni Kreml
Cambria Environmental Technology, Inc.
1144 65th Street, Suite C
Oakland, CA 94608-2411

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-1 | 01/29/1991 | 11,000 | 21,000a | 310 | 41 | 500 | 400 | NA | NA | 99.35 | 10.79 | 88.56 | NA |
| MW-1 | 04/30/1991 | 8,300 | 2,100 | 250 | 32 | 310 | 300 | NA | NA | 99.35 | 9.48 | 89.87 | NA |
| MW-1 | 07/22/1991 | 11,000 | 3,800 | 310 | 36 | 290 | 280 | NA | NA | 99.35 | 10.53 | 88.82 | NA |
| MW-1 | 02/21/1992 | 7,300 | 8,900b | 200 | 36 | 340 | 270 | NA | NA | 99.35 | 8.31 | 91.04 | NA |
| MW-1 | 05/22/1992 | 7,600 | 18,000b, c | 140 | <50 | 300 | 140 | NA | NA | 99.35 | 10.02 | 89.33 | NA |
| MW-1 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 99.35 | 10.06 | 89.29 | NA |
| MW-1 | 08/20/1992 | 9,100 | 5,200b | 530 | 340 | 860 | 540 | NA | NA | 99.35 | 10.32 | 89.03 | NA |
| MW-1 | 11/18/1992 | 15,000 | 4,100b | 220 | 50 | 790 | 340 | NA | NA | 99.35 | 10.64 | 88.71 | NA |
| MW-1 | 02/09/1993 | 7,000 | 1,200 | 130 | 23 | 220 | 160 | NA | NA | 99.35 | 8.71 | 90.64 | NA |
| MW-1 | 06/16/1993 | 4,800 | NA | 150 | 31 | 320 | 130 | NA | NA | 99.35 | 9.71 | 89.64 | 1.73/1.58k |
| MW-1 | 08/24/1993 | 10,000 | NA | 170 | 27 | 610 | 170 | NA | NA | 99.35 | 10.23 | 89.12 | 1.49/1.70k |
| MW-1 | 11/23/1993 | 7,600 | NA | 190 | <12 | 430 | 140 | NA | NA | 99.35 | 10.48 | 88.87 | 1.77/2.80k |
| MW-1 | 02/14/1994 | 8,000 | NA | 150 | 47 | 210 | 68 | NA | NA | 99.35 | 9.17 | 90.18 | 6.2/2.5k |
| MW-1 | 05/25/1994 | 8,800 | NA | 95 | <10 | 210 | 63 | NA | NA | 99.35 | 9.52 | 89.83 | NA |
| MW-1 | 08/04/1994 | 6,200 | NA | 150 | 14 | 350 | 180 | NA | NA | 99.35 | 10.51 | 88.84 | NA |
| MW-1 | 11/08/1994 | 7,600 | NA | 190 | <10 | 480 | 200 | NA | NA | 99.35 | 10.20 | 89.15 | NA |
| MW-1 | 02/01/1995 | 8,200 | NA | 130 | 21 | 170 | 130 | NA | NA | 99.35 | 6.94 | 92.41 | NA |
| MW-1 | 05/04/1995 | 7,000 | NA | 130 | 47 | 190 | 180 | NA | NA | 99.35 | 8.40 | 90.95 | NA |
| MW-1 | 05/16/1997 | 5,600 | NA | 57 | <10 | 26 | 29 | 84 | NA | 99.35 | 9.93 | 89.42 | 1.5 |
| MW-1 | 11/03/1997 | 6,900 | NA | 81 | <10 | 32 | 30 | 170 | NA | 99.35 | 10.27 | 89.08 | 0.8/0.6k |
| MW-1 | 06/05/1998 | 4,200 | NA | 68 | 7.6 | 39 | 69 | 84 | NA | 99.35 | 8.95 | 90.40 | 1.0/0.5k |
| MW-1 | 11/06/1998 | 6,200 | NA | 87 | <2.5 | 48 | 55 | 200 | NA | 99.35 | 10.69 | 88.66 | 1.2/1.8 |
| MW-1 | 06/07/1999 | 5,210 | NA | 33.6 | 21.9 | 7.42 | <5.00 | 153 | 205 | 99.35 | 9.81 | 89.54 | NA |
| MW-1 | 06/22/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 99.35 | 9.55 | 89.80 | 0.8 |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-1 | 08/27/1999 | 6,080 | NA | 46.0 | <20.0 | <20.0 | 26.1 | 303 | 429 | 99.35 | 10.00 | 89.35 | 0.7/1.5 |
| MW-1 | 11/11/1999 | 7,660 | NA | 92.0 | 20.4 | 28.2 | 46.1 | 520 | 542 | 99.35 | 10.27 | 89.08 | 1.3/1.8 |
| MW-1 | 04/26/2000 | 3,730 | NA | 69.4 | <5.00 | 9.42 | 28.6 | 206 | NA | 99.35 | 9.54 | 89.81 | 2.30/2.71 |
| MW-2 | 01/29/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 13.25 | 87.90 | NA |
| MW-2 | 04/30/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 10.94 | 90.21 | NA |
| MW-2 | 07/22/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 12.14 | 89.01 | NA |
| MW-2 | 02/21/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 10.08 | 91.07 | NA |
| MW-2 | 05/22/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 11.52 | 89.63 | NA |
| MW-2 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 11.50 | 89.65 | NA |
| MW-2 | 08/20/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 11.72 | 89.43 | NA |
| MW-2 | 11/18/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 13.06 | 88.09 | NA |
| MW-2 | 02/09/1993 | 95 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 10.06 | 91.09 | NA |
| MW-2 | 06/16/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 11.60 | 89.55 | NA |
| MW-2 | 08/24/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 12.16 | 88.99 | NA |
| MW-2 | 11/23/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 12.74 | 88.41 | NA |
| MW-2 | 02/14/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 10.91 | 90.24 | NA |
| MW-2 | 05/25/1994 | 100 | NA | 1.2 | 4.9 | 2.3 | 13 | NA | NA | 101.15 | 11.06 | 90.09 | NA |
| MW-2 | 08/04/1994 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 12.04 | 89.11 | NA |
| MW-2 | 11/08/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 12.38 | 88.77 | NA |
| MW-2 | 02/01/1995 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 8.76 | 92.39 | NA |
| MW-2 | 05/04/1995 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 101.15 | 10.20 | 90.95 | NA |
| MW-2 | 05/16/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 11.28 | 89.87 | NA |
| MW-2 | 11/03/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 11.71 | 89.44 | NA |
| MW-2 | 06/05/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 9.85 | 91.30 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-2 | 11/06/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 12.60 | 88.55 | NA |
| MW-2 | 06/07/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 11.03 | 90.12 | NA |
| MW-2 | 08/27/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 19.2 | 34.5 | 101.15 | 10.98 | 90.17 | 0.71/4.0 |
| MW-2 | 11/11/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 10.33 | 90.82 | NA |
| MW-2 | 04/26/2000 | NA | NA | NA | NA | NA | NA | NA | NA | 101.15 | 9.58 | 91.57 | NA |
| MW-3 | 01/29/1991 | 2,300 | 410a | 17 | 14.1 | 10 | 230 | NA | NA | 99.49 | 11.09 | 88.40 | NA |
| MW-3 | 04/30/1991 | <50 | 260 | 22 | 4 | 7 | 17 | NA | NA | 99.49 | 9.57 | 89.92 | NA |
| MW-3 | 07/22/1991 | 2,000 | 310 | 51 | <0.5 | <0.5 | <0.5 | NA | NA | 99.49 | 10.66 | 88.83 | NA |
| MW-3 | 02/21/1992 | 2,800 | 640d | 15 | 2.8 | <2.5 | 12 | NA | NA | 99.49 | 8.97 | 90.52 | NA |
| MW-3 | 05/22/1992 | 3,700 | 220b, c | 27 | 11 | 20 | 110 | NA | NA | 99.49 | 9.32 | 90.17 | NA |
| MW-3 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 99.49 | 10.22 | 89.27 | NA |
| MW-3 | 08/20/1992 | 13,000 | 340b | 72 | 85 | 71 | 140 | NA | NA | 99.49 | 10.44 | 89.05 | NA |
| MW-3 | 11/18/1992 | 2,100 | 430b | 21 | 3.6 | 11 | 13 | NA | NA | 99.49 | 10.79 | 88.70 | NA |
| MW-3 | 02/09/1993 | 3,300 | 83 | 21 | 5.6 | 6.1 | <0.5 | NA | NA | 99.49 | 9.35 | 90.14 | NA |
| MW-3 | 06/16/1993 | 3,500e | NA | 66 | 6 | <0.5 | <0.5 | NA | NA | 99.49 | 9.56 | 89.93 | NA |
| MW-3 | 08/24/1993 | 3,400e | NA | 110 | <5 | <5 | <5 | NA | NA | 99.49 | 10.51 | 88.98 | NA |
| MW-3 | 11/23/1993 | 3,000 | NA | 36 | 44 | 6.9 | 23 | NA | NA | 99.49 | 10.77 | 88.72 | NA |
| MW-3 | 02/14/1994 | 4,700g | NA | 9.9 | 5.2 | 8.8 | <5.0 | NA | NA | 99.49 | 9.61 | 89.88 | NA |
| MW-3 | 05/25/1994 | 1,200 | NA | <10 | <10 | <10 | <10 | NA | NA | 99.49 | 10.00 | 89.49 | NA |
| MW-3 | 08/04/1994 | 2,600 | NA | 29 | <5 | 14 | 11 | NA | NA | 99.49 | 10.63 | 88.86 | NA |
| MW-3 | 11/08/1994 | 2,600 | NA | 5.5 | 1.5 | 1.9 | 0.9 | NA | NA | 99.49 | 11.02 | 88.47 | NA |
| MW-3 | 02/01/1995 | 4,600 | NA | 27 | 1.2 | 3.2 | 2.5 | NA | NA | 99.49 | 8.31 | 91.18 | NA |
| MW-3 | 05/04/1995 | 1,800 | NA | 140 | 11 | 11 | 16 | NA | NA | 99.49 | 8.70 | 90.79 | NA |
| MW-3 | 05/16/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 99.49 | 10.30 | 89.19 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-3 | 11/03/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 99.49 | 10.52 | 88.97 | NA |
| MW-3 | 06/05/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 99.49 | 9.18 | 90.31 | NA |
| MW-3 | 11/06/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 99.49 | 11.00 | 88.49 | NA |
| MW-3 | 06/07/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 99.49 | 10.93 | 88.56 | NA |
| MW-3 | 08/27/1999 | 8,600 | NA | 2,410 | 135 | 279 | 1,390 | 26,400 | 29,500 | 99.49 | 10.23 | 89.26 | 0.8/0.7 |
| MW-3 | 11/11/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 99.49 | 10.46 | 89.03 | NA |
| MW-3 | 04/26/2000 | 7,100 | NA | 1,310 | 573 | 89.2 | 376 | 35,000 | 38,000 | 99.49 | 9.45 | 90.04 | 2.42/2.63 |
| MW-4 | 01/29/1991 | 2,600 | 1,300 | 83 | <0.5 | <0.5 | 110 | NA | NA | 99.24 | 10.76 | 88.48 | NA |
| MW-4 | 04/30/1991 | 2,600 | 750 | 22 | 4 | 7 | 17 | NA | NA | 99.24 | 9.45 | 89.79 | NA |
| MW-4 | 07/22/1991 | 4,300 | 1,200 | 120 | <0.5 | <0.5 | 10 | NA | NA | 99.24 | 10.34 | 88.90 | NA |
| MW-4 | 02/21/1992 | 2,000 | 8,300b | 31 | 6.3 | 3.5 | 6.6 | NA | NA | 99.24 | 7.60 | 91.64 | NA |
| MW-4 | 05/22/1992 | 3,600 | 3,400b, c | 55 | 5 | 3 | 10 | NA | NA | 99.24 | 9.90 | 89.34 | NA |
| MW-4 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 10.02 | 89.22 | NA |
| MW-4 | 08/20/1992 | 3,100 | 3,400 | 100 | 45 | 14 | 45 | NA | NA | 99.24 | 10.32 | 88.92 | NA |
| MW-4 | 11/18/1992 | 2,200 | 1,400 | 32 | 12 | 4.2 | 24 | NA | NA | 99.24 | 10.51 | 88.73 | NA |
| MW-4 | 02/09/1993 | 1,500 | 180 | 1.1 | <0.5 | <0.5 | <0.5 | NA | NA | 99.24 | 8.13 | 91.11 | NA |
| MW-4 | 06/16/1993 | 1,100 | NA | 120 | 47 | 5.1 | 19 | NA | NA | 99.24 | 9.60 | 89.64 | 1.86/4.82k |
| MW-4 | 08/24/1993 | 2,700 | NA | 46 | 11 | 25 | 0.97 | NA | NA | 99.24 | 10.05 | 89.19 | 1.46/1.27k |
| MW-4 | 11/23/1993 | 2,500 | NA | 23 | 5.7 | 3.7 | 16 | NA | NA | 99.24 | 10.25 | 89.99 | 5.29/6.59k |
| MW-4 | 02/14/1994 | 1,500 | NA | 12 | 7.8 | <2.5 | <2.5 | NA | NA | 99.24 | 8.83 | 90.41 | 2.1/1.9k |
| MW-4 | 05/25/1994 | 810 | NA | 20 | <2 | <2 | 4 | NA | NA | 99.24 | 9.64 | 89.60 | NA |
| MW-4 | 08/04/1994 | 2,300 | NA | 99 | 15 | 6.3 | 24 | NA | NA | 99.24 | 10.62 | 88.62 | NA |
| MW-4 | 11/08/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.24 | 9.28 | 89.96 | NA |
| MW-4 | 02/01/1995 | 960 | NA | 5.6 | 2.2 | 2.6 | 2.8 | NA | NA | 99.24 | 6.52 | 92.72 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|

| | | | | | | | | | | | | | |
|------|------------|-------|----|------|------|-------|------|------|-------|-------|-------|-------|---------|
| MW-4 | 05/04/1995 | 960 | NA | 20 | 4.7 | 3.7 | 5.6 | NA | NA | 99.24 | 8.40 | 90.84 | NA |
| MW-4 | 05/16/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 9.35 | 89.89 | NA |
| MW-4 | 11/03/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 10.17 | 89.07 | NA |
| MW-4 | 06/05/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 8.85 | 90.39 | NA |
| MW-4 | 11/06/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 10.17 | 89.07 | NA |
| MW-4 | 06/07/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 11.06 | 88.18 | NA |
| MW-4 | 08/27/1999 | 1,520 | NA | 32.8 | 6.25 | <2.50 | 5.65 | 61.5 | <2.00 | 99.24 | 10.25 | 88.99 | 1.0/1.4 |
| MW-4 | 11/11/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 10.11 | 89.13 | NA |
| MW-4 | 04/26/2000 | NA | NA | NA | NA | NA | NA | NA | NA | 99.24 | 9.18 | 90.06 | NA |

| | | | | | | | | | | | | | |
|------|------------|-------|-----------|------|-------|-------|--------|----|----|--------|-------|-------|------------|
| MW-5 | 01/29/1991 | 3,100 | 720 | 86 | <0.5 | 24 | 28 | NA | NA | 100.08 | 11.72 | 88.36 | NA |
| MW-5 | 04/30/1991 | <50 | 90 | 46 | <0.5 | 9 | 9 | NA | NA | 100.08 | 10.45 | 89.63 | NA |
| MW-5 | 07/22/1991 | 1,700 | 300 | 23 | <0.5 | 6,700 | 10,000 | NA | NA | 100.08 | 11.43 | 88.65 | NA |
| MW-5 | 02/21/1992 | 240 | 180h | 1 | <0.5 | <0.5 | 1 | NA | NA | 100.08 | 9.24 | 90.84 | NA |
| MW-5 | 05/22/1992 | 6,200 | 7,100b, c | 6 | 95 | 56 | 99 | NA | NA | 100.08 | 10.97 | 89.11 | NA |
| MW-5 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 100.08 | 10.98 | 89.10 | NA |
| MW-5 | 08/20/1992 | 7,400 | 120b | 56 | 95 | 91 | 150 | NA | NA | 100.08 | 11.14 | 88.94 | NA |
| MW-5 | 11/18/1992 | 3,300 | 320b | 27 | <12.5 | 20 | 470 | NA | NA | 100.08 | 11.21 | 88.87 | NA |
| MW-5 | 02/09/1993 | 160 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 100.08 | 10.01 | 90.07 | NA |
| MW-5 | 06/16/1993 | 140 | NA | 0.8 | <0.5 | <0.5 | <0.5 | NA | NA | 100.08 | 11.05 | 89.03 | 1.53/2.72k |
| MW-5 | 08/24/1993 | 1,000 | NA | 7.9 | <1 | 2.2 | <1.5 | NA | NA | 100.08 | 11.32 | 88.76 | 2.69/1.41k |
| MW-5 | 11/23/1993 | 2,000 | NA | 67 | 15 | 11 | 33 | NA | NA | 100.08 | 11.35 | 88.73 | 8.20/3.09k |
| MW-5 | 02/14/1994 | 660 | NA | 1.3 | <0.5 | 0.5 | 0.7 | NA | NA | 100.08 | 10.34 | 89.74 | 2.0/1.9k |
| MW-5 | 05/25/1994 | 670 | NA | 0.65 | <0.5 | 2.6 | <0.5 | NA | NA | 100.08 | 10.54 | 89.54 | NA |
| MW-5 | 08/04/1994 | 700 | NA | 5 | <0.5 | 1.2 | <0.5 | NA | NA | 100.08 | 11.50 | 88.58 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-5 | 11/08/1994 | 810 | NA | 4.2 | <0.5 | 1.5 | 0.8 | NA | NA | 100.08 | 11.24 | 88.84 | NA |
| MW-5 | 02/01/1995 | 110 | NA | 7 | <0.5 | <0.5 | <0.5 | NA | NA | 100.08 | 9.05 | 91.03 | NA |
| MW-5 | 05/04/1995 | 260 | NA | 3.1 | 1.3 | 2 | 1.5 | NA | NA | 100.08 | 10.35 | 89.73 | NA |
| MW-5 | 05/16/1997 | 440 | NA | 2.4 | 3.1 | 1.6 | 3.3 | 7.1 | NA | 100.08 | 11.21 | 88.87 | 2.9 |
| MW-5 | 11/03/1997 | 1,400 | NA | 34 | <2.5 | 2.8 | 4.4 | 33 | NA | 100.08 | 11.43 | 88.65 | 3.0/1.2k |
| MW-5 | 06/05/1998 | 230 | NA | 3.6 | 0.5 | <0.50 | 1.3 | 34 | NA | 100.08 | 10.35 | 89.73 | 3.2/1.4k |
| MW-5 | 11/06/1998 | 1,800 | NA | 29 | <0.50 | 3.8 | 7.1 | 26 | NA | 100.08 | 11.89 | 88.19 | 2.6/3.0 |
| MW-5 | 06/07/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 19.5 | NA | 100.08 | 10.28 | 89.80 | NA |
| MW-5 | 06/22/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 100.08 | 10.74 | 89.34 | 0.6 |
| MW-5 | 08/27/1999 | 254 | NA | 5.09 | 1.08 | <0.500 | <0.500 | 9.97 | 12.0 | 100.08 | 11.01 | 89.07 | NA |
| MW-5 | 11/11/1999 | 549 | NA | 16.4 | 3.29 | 2.18 | 3.16 | 18.2 | NA | 100.08 | 11.33 | 88.75 | 2.3/2.7 |
| MW-5 | 04/26/2000 | 338 | NA | 0.787 | 2.30 | <0.500 | 3.01 | 21.7 | NA | 100.08 | 10.32 | 89.76 | 1.99/3.01 |
| MW-6 | 01/29/1991 | <50 | 860 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 10.23 | 88.33 | NA |
| MW-6 | 04/30/1991 | <50 | 1,100 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 9.15 | 89.41 | NA |
| MW-6 | 07/22/1991 | <50 | 1,200 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 10.10 | 88.46 | NA |
| MW-6 | 02/21/1992 | <50 | 60d | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 7.15 | 91.41 | NA |
| MW-6 | 05/22/1992 | <50 | 650c | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 9.55 | 89.01 | NA |
| MW-6 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 98.56 | 9.53 | 89.03 | NA |
| MW-6 | 08/20/1992 | 140e | 510c | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 9.84 | 88.72 | NA |
| MW-6 | 11/18/1992 | 200e | 350 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 10.03 | 88.53 | NA |
| MW-6 | 02/09/1993 | 14,000e | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 7.91 | 90.65 | NA |
| MW-6 | 06/16/1993 | 5,700e | NA | <0.5 | 22 | <0.5 | 34 | NA | NA | 98.56 | 8.74 | 89.82 | 8.46/9.73k |
| MW-6 | 08/24/1993 | 4,300e | NA | <12.5 | <12.5 | <12.5 | <12.5 | NA | NA | 98.56 | 9.66 | 88.90 | 2.15/1.52k |
| MW-6 | 11/23/1993 | 3,300e | NA | <12 | <12 | <12 | <12 | NA | NA | 98.56 | 9.86 | 88.70 | 3.86/6.75k |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-6 | 02/14/1994 | 14,000e | NA | <12.5 | <12.5 | <12.5 | <12.5 | NA | NA | 98.56 | 8.27 | 90.29 | 2.3/5.2k |
| MW-6 | 05/25/1994 | <1,000i | NA | <10 | <10 | <10 | <10 | NA | NA | 98.56 | 8.89 | 89.67 | NA |
| MW-6 | 08/04/1994 | 250j | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 10.10 | 88.46 | NA |
| MW-6 | 11/08/1994 | 4,600e | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 8.98 | 89.58 | NA |
| MW-6 | 02/01/1995 | 710 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 7.07 | 91.49 | NA |
| MW-6 | 05/04/1995 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.56 | 8.56 | 90.00 | NA |
| MW-6 | 05/16/1997 | <500 | NA | <5.0 | <5.0 | <5.0 | <5.0 | 1,700 | NA | 98.56 | 9.57 | 88.99 | 6.2 |
| MW-6 | 11/03/1997 | <500 | NA | <5.0 | <5.0 | <5.0 | <5.0 | 990 | NA | 98.56 | 9.76 | 88.80 | 1.4/1.0k |
| MW-6 | 06/05/1998 | <50 | NA | <0.50 | <0.50 | <0.50 | <0.50 | 590 | NA | 98.56 | 8.50 | 90.06 | 1.5/1.1k |
| MW-6 | 11/06/1998 | <250 | NA | <2.5 | <2.5 | <2.5 | <2.5 | 810 | NA | 98.56 | 10.00 | 88.56 | 2.0/1.4 |
| MW-6 | 06/07/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 71.5 | NA | 98.56 | 9.35 | 89.21 | NA |
| MW-6 | 06/22/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 98.56 | 9.20 | 89.36 | 1.9 |
| MW-6 | 08/27/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 197 | 276 | 98.56 | 9.52 | 89.04 | 1.5/7.8 |
| MW-6 | 11/11/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 212 | NA | 98.56 | 9.87 | 88.69 | 1.4/1.7 |
| MW-6 | 04/26/2000 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 236 | NA | 98.56 | 9.13 | 89.43 | 1.93/2.90 |
| MW-7 | 01/29/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.91 | 88.62 | NA |
| MW-7 | 04/30/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.38 | 89.15 | NA |
| MW-7 | 07/22/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 9.13 | 88.40 | NA |
| MW-7 | 02/21/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 6.87 | 90.66 | NA |
| MW-7 | 05/22/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.08 | 89.45 | NA |
| MW-7 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 97.53 | 8.82 | 88.71 | NA |
| MW-7 | 08/20/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.89 | 88.64 | NA |
| MW-7 | 11/18/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 9.54 | 87.99 | NA |
| MW-7 | 02/09/1993 | 72 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 7.84 | 89.69 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|

| | | | | | | | | | | | | | |
|------|------------|-------|----|--------|--------|--------|--------|-------|------|-------|------|-------|-----------|
| MW-7 | 06/16/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 7.80 | 89.73 | NA |
| MW-7 | 08/24/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.51 | 89.02 | NA |
| MW-7 | 11/23/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.70 | 88.83 | NA |
| MW-7 | 02/14/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 7.52 | 90.01 | NA |
| MW-7 | 05/25/1994 | <50 | NA | <0.5 | 0.63 | <0.5 | 0.93 | NA | NA | 97.53 | 9.04 | 88.49 | NA |
| MW-7 | 08/04/1994 | NA | NA | NA | NA | NA | NA | NA | NA | 97.53 | 9.80 | 87.83 | NA |
| MW-7 | 11/08/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.45 | 89.08 | NA |
| MW-7 | 02/01/1995 | NA | NA | NA | NA | NA | NA | NA | NA | 97.53 | 5.51 | 92.02 | NA |
| MW-7 | 05/04/1995 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.53 | 8.34 | 89.19 | NA |
| MW-7 | 05/16/1997 | <50 | NA | <0.50 | <0.50 | <0.50 | <0.50 | 2.7 | NA | 97.53 | 8.80 | 88.73 | 2.8 |
| MW-7 | 11/03/1997 | <50 | NA | <0.50 | <0.50 | <0.50 | <0.50 | <2.5 | NA | 97.53 | 8.95 | 88.58 | 1.6/1.2k |
| MW-7 | 06/05/1998 | <50 | NA | <0.50 | <0.50 | <0.50 | <0.50 | 4.3 | NA | 97.53 | 7.75 | 89.78 | 1.5/1.1k |
| MW-7 | 11/06/1998 | <50 | NA | <0.50 | <0.50 | <0.50 | <0.50 | 4.5 | NA | 97.53 | 9.20 | 88.33 | 4.1/2.2 |
| MW-7 | 06/07/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | <2.50 | NA | 97.53 | 8.39 | 89.14 | NA |
| MW-7 | 06/22/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 97.53 | 8.43 | 89.10 | 0.4 |
| MW-7 | 06/22/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 97.53 | 8.43 | 89.10 | 0.4 |
| MW-7 | 08/27/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | 4.33 | 97.53 | 8.82 | 88.71 | 1.3/1.9 |
| MW-7 | 11/11/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 4.30 | NA | 97.53 | 8.64 | 88.89 | 1.1/1.0 |
| MW-7 | 04/26/2000 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | 6.59 | NA | 97.53 | 8.31 | 89.22 | 1.09/2.41 |

| | | | | | | | | | | | | | |
|------|------------|-----|-----|------|------|------|------|----|----|-------|------|-------|----|
| MW-8 | 01/29/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 8.47 | 88.66 | NA |
| MW-8 | 04/30/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 7.64 | 89.49 | NA |
| MW-8 | 07/22/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 8.36 | 88.77 | NA |
| MW-8 | 02/21/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 6.54 | 90.59 | NA |
| MW-8 | 05/22/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 7.68 | 89.45 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-8 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 8.16 | 88.97 | NA |
| MW-8 | 08/20/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 8.25 | 88.88 | NA |
| MW-8 | 11/18/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 8.32 | 88.81 | NA |
| MW-8 | 02/09/1993 | 63 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 5.58 | 91.55 | NA |
| MW-8 | 06/16/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 7.19 | 89.94 | NA |
| MW-8 | 08/24/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 7.98 | 89.15 | NA |
| MW-8 | 11/23/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 8.09 | 89.04 | NA |
| MW-8 | 02/14/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 9.42 | 87.71 | NA |
| MW-8 | 05/25/1994 | <50 | NA | <0.5 | 1.1 | <0.5 | 2.5 | NA | NA | 97.13 | 7.18 | 89.95 | NA |
| MW-8 | 08/04/1994 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 8.51 | 88.62 | NA |
| MW-8 | 11/08/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 6.24 | 90.89 | NA |
| MW-8 | 02/01/1995 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 3.94 | 93.19 | NA |
| MW-8 | 05/04/1995 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 97.13 | 5.04 | 92.09 | NA |
| MW-8 | 05/16/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 7.65 | 89.48 | NA |
| MW-8 | 11/03/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 7.03 | 90.10 | NA |
| MW-8 | 06/05/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 6.47 | 90.66 | NA |
| MW-8 | 11/06/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 8.27 | 88.86 | NA |
| MW-8 | 06/07/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 8.69 | 88.44 | NA |
| MW-8 | 08/27/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | <2.00 | 97.13 | 7.82 | 89.31 | 1.5/2.0 |
| MW-8 | 11/11/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 7.91 | 89.22 | NA |
| MW-8 | 04/26/2000 | NA | NA | NA | NA | NA | NA | NA | NA | 97.13 | 7.10 | 90.03 | NA |
| MW-9 | 01/29/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 8.27 | 91.45 | NA |
| MW-9 | 04/30/1991 | <50 | <50 | 0.6 | <0.5 | <0.5 | 1.1 | NA | NA | 99.72 | 7.62 | 92.10 | NA |
| MW-9 | 07/22/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 8.48 | 91.24 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-9 | 02/21/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 6.91 | 92.81 | NA |
| MW-9 | 05/22/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 8.64 | 91.08 | NA |
| MW-9 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 7.55 | 92.17 | NA |
| MW-9 | 08/20/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 7.38 | 92.34 | NA |
| MW-9 | 11/18/1992 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 10.17 | 89.55 | NA |
| MW-9 | 02/09/1993 | 290 | 110 | 6 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 6.89 | 92.83 | NA |
| MW-9 | 06/16/1993 | 90e | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 8.74 | 90.98 | 1.51/2.17k |
| MW-9 | 08/24/1993 | 50e | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 8.32 | 91.40 | 2.86/2.74k |
| MW-9 | 11/23/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 8.17 | 91.55 | 3.41/3.78k |
| MW-9 | 02/14/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 7.67 | 92.05 | 4.6/5.2k |
| MW-9 | 05/25/1994 | 56 | NA | 1.3 | 4 | 1.4 | 8.3 | NA | NA | 99.72 | 7.89 | 91.83 | NA |
| MW-9 | 08/04/1994 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 9.76 | 89.96 | NA |
| MW-9 | 11/08/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 7.75 | 91.97 | NA |
| MW-9 | 02/01/1995 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 5.66 | 94.06 | NA |
| MW-9 | 05/04/1995 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 99.72 | 7.40 | 92.32 | NA |
| MW-9 | 05/16/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 7.72 | 92.00 | NA |
| MW-9 | 11/03/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 6.93 | 92.79 | NA |
| MW-9 | 06/05/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 7.23 | 92.49 | NA |
| MW-9 | 11/06/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 9.91 | 89.81 | NA |
| MW-9 | 06/07/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 9.03 | 90.69 | NA |
| MW-9 | 08/27/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | <2.00 | 99.72 | 7.45 | 92.27 | 3.5/4.3 |
| MW-9 | 11/11/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 7.40 | 92.32 | NA |
| MW-9 | 04/26/2000 | NA | NA | NA | NA | NA | NA | NA | NA | 99.72 | 7.66 | 92.06 | NA |
| MW-10 | 01/29/1991 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 10.81 | 88.18 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
| MW-10 | 04/30/1991 | <50 | 460 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 8.79 | 90.20 | NA |
| MW-10 | 07/22/1991 | <50 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 9.94 | 89.05 | NA |
| MW-10 | 02/21/1992 | <50 | 120 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 9.11 | 89.88 | NA |
| MW-10 | 05/22/1992 | <50 | 310 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 9.14 | 89.85 | NA |
| MW-10 | 07/07/1992 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 9.87 | 89.12 | NA |
| MW-10 | 08/20/1992 | <50 | 460 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 9.30 | 89.69 | NA |
| MW-10 | 11/18/1992 | <50 | 470 | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 10.21 | 88.78 | NA |
| MW-10 | 02/09/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 7.63 | 91.36 | NA |
| MW-10 | 06/16/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 8.57 | 90.42 | NA |
| MW-10 | 08/24/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 9.61 | 89.38 | NA |
| MW-10 | 11/23/1993 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 10.10 | 88.89 | NA |
| MW-10 | 02/14/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 9.01 | 89.98 | NA |
| MW-10 | 05/25/1994 | <50 | NA | <0.5 | 1.1 | <0.5 | 1.4 | NA | NA | 98.99 | 8.84 | 90.15 | NA |
| MW-10 | 08/04/1994 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 9.82 | 89.17 | NA |
| MW-10 | 11/08/1994 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 9.40 | 89.59 | NA |
| MW-10 | 02/01/1995 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 6.78 | 92.21 | NA |
| MW-10 | 05/04/1995 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 7.00 | 91.99 | NA |
| MW-10 | 05/16/1997 | <50 | NA | <0.5 | <0.5 | <0.5 | <0.5 | NA | NA | 98.99 | 8.66 | 90.33 | NA |
| MW-10 | 11/03/1997 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 9.37 | 89.62 | NA |
| MW-10 | 06/05/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 7.27 | 91.72 | NA |
| MW-10 | 11/06/1998 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 9.48 | 89.51 | NA |
| MW-10 | 06/07/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 8.72 | 90.27 | NA |
| MW-10 | 08/27/1999 | <50.0 | NA | <0.500 | <0.500 | <0.500 | <0.500 | <5.00 | <2.00 | 98.99 | 8.62 | 90.37 | 1.6/1.6 |
| MW-10 | 11/11/1999 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 8.55 | 90.44 | NA |
| MW-10 | 04/26/2000 | NA | NA | NA | NA | NA | NA | NA | NA | 98.99 | 7.39 | 91.60 | NA |

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|

Abbreviations:

TPPH= Total petroleum hydrocarbons as gasoline by modified EPA Method 8015

TEPH = Total petroleum hydrocarbons as diesel by modified EPA Method 8015

BTEX = benzene, toluene, ethylbenzene, xylenes by EPA Method 8020

MTBE = methyl-tertiary-butyl ether

TOC = Top of Casing Elevation

GW = Groundwater

DO = Dissolved Oxygen

ug/L = parts per billion

msl = Mean sea level

ft = Feet

<n = Below detection limit

D = Duplicate sample

NA = Not Applicable

n/n = 1st case volume/3rd case volume D.O.'s

ppm = parts per million

Notes:

a =Compounds detected and calculated as TEPH do not match the diesel standard; pattern is characteristic of weathered diesel.

b =Concentration reported as TEPH is primarily due to the presence of a lighter petroleum product, possibly gasoline or kerosene.

c =Concentration reported as TEPH is primarily due to a heavier petroleum product, possibly motor oil or aged diesel fuel.

d =Compounds detected within the TEPH range are not characteristic of the standard diesel chromatographic pattern.

e =Concentration reported as TPPH is primarily due to the presence of a discrete hydrocarbon peak not indicative of gasoline.

f =26 ug/L benzene detected using EPA Method 8240.

g =The concentration reported as TPPH is due to the presence of a combination of gasoline and a discrete peak not indicative of gasoline.

h =Compounds detected and calculated as TPPH appear to be the less volatile constituents of gasoline.

WELL CONCENTRATIONS
Shell-Branded Service Station
630 High Street
Oakland, CA
WIC #204-5508-5801

| Well ID | Date | TPPH (ug/L) | TEPH (ug/L) | B (ug/L) | T (ug/L) | E (ug/L) | X (ug/L) | MTBE 8020 (ug/L) | MTBE 8260 (ug/L) | TOC (MSL) | Depth to Water (ft.) | GW Elevation (MSL) | DO Reading (ppm) |
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|
|---------|------|----------------|----------------|-------------|-------------|-------------|-------------|------------------------|------------------------|--------------|----------------------------|--------------------------|------------------------|

i =Sample diluted due to high-non hydrocarbon peak.

j =The positive result has an atypical pattern for gasoline analysis.

k =Field measurement of DO concentrations before and after well purging.



Sequoia Analytical

885 Jarvis Drive
Morgan Hill, CA 95037
(408) 776-9600
FAX (408) 782-6308
www.sequoialabs.com

May 15, 2000

Nick Sudano
Blaine Tech Services (Shell)
1680 Rogers Avenue
San Jose, CA 95112

RE: Shell

Dear Nick Sudano

Enclosed are the results of analyses for sample(s) received by the laboratory on April 27, 2000. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Ted Terrasas
Project Manager

CA ELAP Certificate Number 1210





Blaine Tech Services (Shell)
1680 Rogers Avenue
San Jose, CA 95112

Project: Shell
Project Number: 630 High St
Project Manager: Nick Sudano


Sampled: 4/26/00
Received: 4/27/00
Reported: 5/15/00 11:24

ANALYTICAL REPORT FOR SAMPLES:

| Sample Description | Laboratory Sample Number | Sample Matrix | Date Sampled |
|--------------------|--------------------------|---------------|--------------|
| MW-1 | MJD0857-01 | Water | 4/26/00 |
| MW-3 | MJD0857-02 | Water | 4/26/00 |
| MW-5 | MJD0857-03 | Water | 4/26/00 |
| MW-6 | MJD0857-04 | Water | 4/26/00 |
| MW-7 | MJD0857-05 | Water | 4/26/00 |

Sequoia Analytical - Morgan Hill

*The results in this report apply to the samples analyzed in accordance with the chain of custody document.
This analytical report must be reproduced in its entirety.*

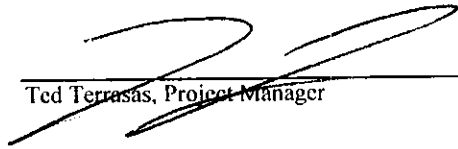

Ted Terrasas, Project Manager





| | | |
|--|---|--|
| Blaine Tech Services (Shell) 1680 Rogers Avenue San Jose, CA 95112 | Project: Shell Project Number: 630 High St Project Manager: Nick Sudano | Sampled: 4/26/00 Received: 4/27/00 Reported: 5/15/00 11:24 |
|--|---|--|

Total Purgeable Hydrocarbons (C6-C12), BTEX and MTBE by DHS LUFT
Sequoia Analytical - Morgan Hill

| Analyte | Batch Number | Date Prepared | Date Analyzed | Specific Method | Reporting Limit | Result | Units | Notes* |
|-----------------------------------|--------------|---------------|---------------|-------------------|-----------------|--------|--------------|--------|
| MW-1 | | | | MJD0857-01 | | | Water | |
| Purgeable Hydrocarbons | 0E09001 | 5/9/00 | 5/9/00 | DHS LUFT | 500 | 3730 | ug/l | P-01 |
| Benzene | " | " | " | DHS LUFT | 5.00 | 69.4 | " | |
| Toluene | " | " | " | DHS LUFT | 5.00 | ND | " | |
| Ethylbenzene | " | " | " | DHS LUFT | 5.00 | 9.42 | " | |
| Xylenes (total) | " | " | " | DHS LUFT | 5.00 | 28.6 | " | |
| Methyl tert-butyl ether | " | " | " | DHS LUFT | 25.0 | 206 | " | |
| Surrogate: a,a,a-Trifluorotoluene | " | " | " | 70-130 | | 108 | % | |
| MW-3 | | | | MJD0857-02 | | | Water | |
| Purgeable Hydrocarbons | 0E09001 | 5/9/00 | 5/9/00 | DHS LUFT | 5000 | 7100 | ug/l | P-01 |
| Benzene | " | " | " | DHS LUFT | 50.0 | 1310 | " | |
| Toluene | " | " | " | DHS LUFT | 50.0 | 573 | " | |
| Ethylbenzene | " | " | " | DHS LUFT | 50.0 | 89.2 | " | |
| Xylenes (total) | " | " | " | DHS LUFT | 50.0 | 376 | " | |
| Methyl tert-butyl ether | " | " | 5/10/00 | DHS LUFT | 1000 | 35000 | " | M-03 |
| Surrogate: a,a,a-Trifluorotoluene | " | " | 5/9/00 | 70-130 | | 96.1 | % | |
| MW-5 | | | | MJD0857-03 | | | Water | |
| Purgeable Hydrocarbons | 0E09001 | 5/9/00 | 5/9/00 | DHS LUFT | 50.0 | 338 | ug/l | P-01 |
| Benzene | " | " | " | DHS LUFT | 0.500 | 0.787 | " | |
| Toluene | " | " | " | DHS LUFT | 0.500 | 2.30 | " | |
| Ethylbenzene | " | " | " | DHS LUFT | 0.500 | ND | " | |
| Xylenes (total) | " | " | " | DHS LUFT | 0.500 | 3.01 | " | |
| Methyl tert-butyl ether | " | " | " | DHS LUFT | 2.50 | 21.7 | " | |
| Surrogate: a,a,a-Trifluorotoluene | " | " | " | 70-130 | | 75.2 | % | |
| MW-6 | | | | MJD0857-04 | | | Water | |
| Purgeable Hydrocarbons | 0E09001 | 5/9/00 | 5/9/00 | DHS LUFT | 50.0 | ND | ug/l | |
| Benzene | " | " | " | DHS LUFT | 0.500 | ND | " | |
| Toluene | " | " | " | DHS LUFT | 0.500 | ND | " | |
| Ethylbenzene | " | " | " | DHS LUFT | 0.500 | ND | " | |
| Xylenes (total) | " | " | " | DHS LUFT | 0.500 | ND | " | |
| Methyl tert-butyl ether | " | " | " | DHS LUFT | 2.50 | 236 | " | |
| Surrogate: a,a,a-Trifluorotoluene | " | " | " | 70-130 | | 97.2 | % | |
| MW-7 | | | | MJD0857-05 | | | Water | |
| Purgeable Hydrocarbons | 0E09001 | 5/9/00 | 5/9/00 | DHS LUFT | 50.0 | ND | ug/l | |
| Benzene | " | " | " | DHS LUFT | 0.500 | ND | " | |





| | | |
|--|---|--|
| Blaine Tech Services (Shell) 1680 Rogers Avenue San Jose, CA 95112 | Project: Shell Project Number: 630 High St Project Manager: Nick Sudano | Sampled: 4/26/00 Received: 4/27/00 Reported: 5/15/00 11:24 |
|--|---|--|

**Total Purgeable Hydrocarbons (C6-C12), BTEX and MTBE by DHS LUFT
Sequoia Analytical - Morgan Hill**

| Analyte | Batch Number | Date Prepared | Date Analyzed | Specific Method | Reporting Limit | Result | Units | Notes* |
|--|--------------|---------------|---------------|-------------------|-----------------|-------------|--------------|--------|
| MW-7 (continued) | | | | MJD0857-05 | | | Water | |
| Toluene | 0E09001 | 5/9/00 | 5/9/00 | DHS LUFT | 0.500 | ND | ug/l | |
| Ethylbenzene | " | " | " | DHS LUFT | 0.500 | ND | " | |
| Xylenes (total) | " | " | " | DHS LUFT | 0.500 | ND | " | |
| Methyl tert-butyl ether | " | " | " | DHS LUFT | 2.50 | 6.59 | " | |
| <i>Surrogate: a,a,a-Trifluorotoluene</i> | " | " | " | 70-130 | | 91.9 | % | |





| | | |
|--|---|--|
| Blaine Tech Services (Shell) 1680 Rogers Avenue San Jose, CA 95112 | Project: Shell Project Number: 630 High St Project Manager: Nick Sudano | Sampled: 4/26/00 Received: 4/27/00 Reported: 5/15/00 11:24 |
|--|---|--|

**MTBE by EPA Method 8260A
Sequoia Analytical - Morgan Hill**

| Analyte | Batch Number | Date Prepared | Date Analyzed | Specific Method | Reporting Limit | Result | Units | Notes* |
|----------------------------------|--------------|---------------|---------------|-------------------|-----------------|--------------|--------------|--------|
| MW-3 | | | | MJD0857-02 | | | Water | |
| Methyl tert-butyl ether | 0E11022 | 5/10/00 | 5/11/00 | EPA 8260A | 2000 | 38000 | ug/l | |
| Surrogate: 1,2-Dichloroethane-d4 | " | " | " | 70-130 | | 118 | % | |





| | | |
|--|---|--|
| Blaine Tech Services (Shell) 1680 Rogers Avenue San Jose, CA 95112 | Project: Shell Project Number: 630 High St Project Manager: Nick Sudano | Sampled: 4/26/00 Received: 4/27/00 Reported: 5/15/00 11:24 |
|--|---|--|

**Total Purgeable Hydrocarbons (C6-C12), BTEX and MTBE by DHS LUFT/Quality Control
Sequoia Analytical - Morgan Hill**

| Analyte | Date Analyzed | Spike Level | Sample Result | QC Result | Units | Reporting Limit Recov. Limits | Recov. % | RPD Limit | RPD % | Notes* |
|-----------------------------------|---------------|--------------------------------|---------------|-----------|---|-------------------------------|----------|-----------|-------|--------|
| Batch: 0E09001 | | Date Prepared: 5/9/00 | | | Extraction Method: EPA 5030B [P/T] | | | | | |
| Blank | | 0E09001-BLK1 | | | | | | | | |
| Purgeable Hydrocarbons | 5/9/00 | | | ND | ug/l | 50.0 | | | | |
| Benzene | " | | | ND | " | 0.500 | | | | |
| Toluene | " | | | ND | " | 0.500 | | | | |
| Ethylbenzene | " | | | ND | " | 0.500 | | | | |
| Xylenes (total) | " | | | ND | " | 0.500 | | | | |
| Methyl tert-butyl ether | " | | | ND | " | 2.50 | | | | |
| Surrogate: a,a,a-Trifluorotoluene | " | 10.0 | | 9.70 | " | 70-130 | 97.0 | | | |
| LCS | | 0E09001-BS1 | | | | | | | | |
| Benzene | 5/9/00 | 10.0 | | 9.79 | ug/l | 70-130 | 97.9 | | | |
| Toluene | " | 10.0 | | 9.69 | " | 70-130 | 96.9 | | | |
| Ethylbenzene | " | 10.0 | | 9.71 | " | 70-130 | 97.1 | | | |
| Xylenes (total) | " | 30.0 | | 29.4 | " | 70-130 | 98.0 | | | |
| Surrogate: a,a,a-Trifluorotoluene | " | 10.0 | | 9.65 | " | 70-130 | 96.5 | | | |
| Matrix Spike | | 0E09001-MS1 MJD0857-05 | | | | | | | | |
| Benzene | 5/9/00 | 10.0 | ND | 10.3 | ug/l | 60-140 | 103 | | | |
| Toluene | " | 10.0 | ND | 10.1 | " | 60-140 | 101 | | | |
| Ethylbenzene | " | 10.0 | ND | 9.97 | " | 60-140 | 99.7 | | | |
| Xylenes (total) | " | 30.0 | ND | 30.3 | " | 60-140 | 101 | | | |
| Surrogate: a,a,a-Trifluorotoluene | " | 10.0 | | 9.85 | " | 70-130 | 98.5 | | | |
| Matrix Spike Dup | | 0E09001-MSD1 MJD0857-05 | | | | | | | | |
| Benzene | 5/9/00 | 10.0 | ND | 10.3 | ug/l | 60-140 | 103 | 25 | 0 | |
| Toluene | " | 10.0 | ND | 10.2 | " | 60-140 | 102 | 25 | 0.985 | |
| Ethylbenzene | " | 10.0 | ND | 10.2 | " | 60-140 | 102 | 25 | 2.28 | |
| Xylenes (total) | " | 30.0 | ND | 31.0 | " | 60-140 | 103 | 25 | 2.28 | |
| Surrogate: a,a,a-Trifluorotoluene | " | 10.0 | | 9.82 | " | 70-130 | 98.2 | | | |





| | | |
|--|---|--|
| Blaine Tech Services (Shell) 1680 Rogers Avenue San Jose, CA 95112 | Project: Shell Project Number: 630 High St Project Manager: Nick Sudano | Sampled: 4/26/00 Received: 4/27/00 Reported: 5/15/00 11:24 |
|--|---|--|

**MTBE by EPA Method 8260A/Quality Control
Sequoia Analytical - Morgan Hill**

| Analyte | Date Analyzed | Spike Level | Sample Result | QC Result | Reporting Limit Units | Recov. % | RPD Limit | RPD % | Notes* |
|----------------------------------|---------------|--------------------------------|---------------|---|-----------------------|----------|-----------|-------|--------|
| Batch: 0E11022 | | Date Prepared: 5/10/00 | | Extraction Method: EPA 5030B [P/T] | | | | | |
| Blank | | 0E11022-BLK1 | | | | | | | |
| Methyl tert-butyl ether | 5/10/00 | | | ND | ug/l | 1.00 | | | |
| Surrogate: 1,2-Dichloroethane-d4 | " | 10.0 | | 12.2 | " | 70-130 | 122 | | |
| LCS | | 0E11022-BS1 | | | | | | | |
| Methyl tert-butyl ether | 5/10/00 | 10.0 | | 10.1 | ug/l | 70-130 | 101 | | |
| Surrogate: 1,2-Dichloroethane-d4 | " | 10.0 | | 11.9 | " | 70-130 | 119 | | |
| Matrix Spike | | 0E11022-MS1 MJD0905-02 | | | | | | | |
| Methyl tert-butyl ether | 5/10/00 | 10.0 | 3.65 | 14.1 | ug/l | 70-130 | 105 | | |
| Surrogate: 1,2-Dichloroethane-d4 | " | 10.0 | | 12.4 | " | 70-130 | 124 | | |
| Matrix Spike Dup | | 0E11022-MSD1 MJD0905-02 | | | | | | | |
| Methyl tert-butyl ether | 5/10/00 | 10.0 | 3.65 | 14.8 | ug/l | 70-130 | 112 | 25 | 4.84 |
| Surrogate: 1,2-Dichloroethane-d4 | " | 10.0 | | 12.3 | " | 70-130 | 123 | | |





Blaine Tech Services (Shell)
1680 Rogers Avenue
San Jose, CA 95112

Project: Shell
Project Number: 630 High St
Project Manager: Nick Sudano

Sampled: 4/26/00
Received: 4/27/00
Reported: 5/15/00 11:24

Notes and Definitions

| # | Note |
|--------|---|
| M-03 | Sample was analyzed at a second dilution per clients request. |
| P-01 | Chromatogram Pattern: Gasoline C6-C12 |
| DET | Analyte DETECTED |
| ND | Analyte NOT DETECTED at or above the reporting limit |
| NR | Not Reported |
| dry | Sample results reported on a dry weight basis |
| Recov. | Recovery |
| RPD | Relative Percent Difference |



BLAINE

TECH SERVICES INC.

1880 ROGERS AVENUE
 SAN JOSE, CALIFORNIA 95112-1105
 FAX (408) 573-7771
 PHONE (408) 573-0555

CONDUCT ANALYSIS TO DETECT

LAB SEQUOIA

DHS #

ALL ANALYSES MUST MEET SPECIFICATIONS AND DETECTION LIMITS SET BY CALIFORNIA DHS AND

EPA

RWQCB REGION

LIA

OTHER

MJD0857

SPECIAL INSTRUCTIONS

Send invoice to Equiva

Incident # 98995751

Send report to Blaine Tech Services

Attn: Ann Pember

CHAIN OF CUSTODY
000-426-A3

CLIENT
 Equiva - Karen Petryna

SITE
 630 High Street
 Oakland, CA

C = COMPOSITE ALL CONTAINERS

TPH - Gas, BTEX

MTBE by 8020

MTBE by 8260

TPH-diesel

Oxygenates by 8260

1,2-DCA & EDB by 8010

| SAMPLE I.D. | S = SOIL W = H2O | CONTAINERS | |
|-------------|---------------------|------------|----------|
| | | TOTAL | Vol/Voas |

| SAMPLE I.D. | S = SOIL W = H2O | TOTAL | Vol/Voas | TPH - Gas, BTEX | MTBE by 8020 | MTBE by 8260 | TPH-diesel | Oxygenates by 8260 | 1,2-DCA & EDB by 8010 | ADD'L INFORMATION | STATUS | CONDITION | LAB SAMPLE # |
|-------------|---------------------|-------|----------|-----------------|--------------|--------------|------------|--------------------|-----------------------|-----------------------------|--------|-----------|--------------|
| - MW-1 | 42600 | 1240 | W | 3 | X | X | | | | Confirm highest | | | 1 |
| - MW-3 | 42600 | 1302 | W | 3 | X | X | | | | detected MTBE concentration | | | 2 |
| - MW-5 | 42600 | 1220 | W | 3 | X | X | | | | By EPA 8260 | | | 3 |
| - MW-6 | 42600 | 1145 | W | 3 | X | X | | | | | | | 4 27 10 31 |
| - MW-7 | 42600 | 1209 | W | 3 | X | X | | | | | | | 5 |

| | | | | | |
|--------------------|-----------|-----------|-----------------------|------------------------------|-------|
| SAMPLING COMPLETED | DATE | TIME | SAMPLING PERFORMED BY | RESULTS NEEDED NO LATER THAN | |
| | 42600 | 1315 | Oscar | | |
| RELEASED BY | DATE | TIME | RECEIVED BY | DATE | TIME |
| <i>[Signature]</i> | 4/27/00 | 8:45 | <i>[Signature]</i> | 4/27/00 | 8:45 |
| RELEASED BY | DATE | TIME | RECEIVED BY | DATE | TIME |
| <i>[Signature]</i> | 4/27/00 | | BW | 4/27/00 | 10:31 |
| RELEASED BY | DATE | TIME | RECEIVED BY | DATE | TIME |
| | | | | | |
| SHIPPED VIA | DATE SENT | TIME SENT | COOLER # | | |

WELL GAUGING DATA

Project # 000426-1A2

Date 4-26-00

Client Equiv a

Site 630 Wigh St Oakland Ca.

| Well ID | Well Size (in.) | Sheen / Odor | Depth to Immiscible Liquid (ft.) | Thickness of Immiscible Liquid (ft.) | Volume of Immiscibles Removed (ml) | Depth to water (ft.) | Depth to well bottom (ft.) | Survey Point: TOB or TOC |
|---------|-----------------|--------------|----------------------------------|--------------------------------------|------------------------------------|----------------------|----------------------------|--------------------------|
| MW 1 | 4 | | | | | 9.59 | 13.79 | TOC |
| MW 2 | 4 | | | | | 9.58 | 19.22 | } |
| MW 3 | 4 | | | | | 9.45 | 17.29 | |
| MW 4 | 4 | | | | | 9.18 | 11.79 | |
| MW 5 | 4 | | | | | 10.32 | 17.76 | |
| MW 6 | 4 | | | | | 9.13 | 19.27 | |
| MW 7 | 4 | | | | | 8.31 | 19.39 | |
| MW 8 | 4 | | | | | 7.10 | 20.56 | |
| MW 9 | 4 | | | | | 7.66 | 11.97 | |
| MW 10 | 4 | | | | | 7.39 | 12.46 | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

EQUIVA WELL MONITORING DATA SHEET

| | |
|---------------------------------|--|
| BTS #: 000926-42 | Site: 204-5508-5801 |
| Sampler: DSCAV | Date: 4-26-00 |
| Well I.D.: MW-1 | Well Diameter: 2 3 <u>4</u> 6 8 |
| Total Well Depth: 13.79 | Depth to Water: 9.59 |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>PVC</u> Grade | D.O. Meter (if req'd): <u>YSI</u> HACH |

Purge Method:

- Bailer
- Disposable Bailer
- Middleburg
- Electric Submersible
- Waterra
- Peristaltic
- Extraction Pump
- Other _____

Sampling Method:

- Bailer
- Disposable Bailer
- Extraction Port
- Dedicated Tubing

Other: _____

| | | | | | |
|---------------|-----------|-------------------|---|-------------------|-------|
| 2.7 | (Gals.) X | 3 | = | 8 | Gals. |
| 1 Case Volume | | Specified Volumes | | Calculated Volume | |

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | <u>4"</u> | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

| Time | Temp (°F) | pH | Cond. | Turbidity | Gals. Removed | Observations |
|------|-----------|-----|-------|-----------|---------------|--------------|
| 1232 | 73.6 | 6.8 | 1142 | 9 | 3 | |
| 1232 | 75.0 | 6.9 | 1145 | 11 | 6 | |
| 1234 | 74.9 | 6.8 | 1203 | 14 | 8 | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated: 8

Sampling Time: 1240 Sampling Date: 4-26-00

Sample I.D.: ~~MW-1~~ MW-1 Laboratory: Sequoia Columbia Other _____

Analyzed for: PPH-G BTEX MTBE TPH-D Other: _____

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: 3rd Per Sam.

D.O. (if req'd): Pre-purge: 2.30 mg/L Post-purge: 2.71 mg/L

O.R.P. (if req'd): Pre-purge: _____ mV Post-purge: _____ mV

EQUIVA WELL MONITORING DATA SHEET

| | |
|---------------------------------|---------------------------------------|
| BTS #: 000926-A2 | Site: 209-5508-5801 |
| Sampler: OSCAV | Date: 4-26-00 |
| Well I.D.: MW-3 | Well Diameter: 2, 3, <u>4</u> , 6, 8 |
| Total Well Depth: 17.29 | Depth to Water: 9.45 |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>PVC</u> Grade | D.O. Meter (if req'd): <u>SI</u> HACH |

Purge Method:

- Bailer
 Disposable Bailer
 Middleburg
 Electric Submersible
 Waterra
 Peristaltic
 Extraction Pump
 Other _____

Sampling Method:

- Bailer
 Disposable Bailer
 Extraction Port
 Dedicated Tubing
 Other: _____

| | | | | | |
|---------------|-----------|-------------------|---|-------------------|-------|
| 5.0 | (Gals.) X | 3 | = | 15 | Gals. |
| I Case Volume | | Specified Volumes | | Calculated Volume | |

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | <u>4"</u> | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

| Time | Temp (°F) | pH | Cond. | Turbidity | Gals. Removed | Observations |
|------|-----------|-----|-------|-----------|---------------|--------------|
| 1255 | 71.7 | 6.9 | 1428 | 99 | 5 | |
| 1256 | 71.3 | 6.9 | 1362 | 25 | 10 | |
| 1257 | 71.5 | 6.9 | 1382 | 20 | 15 | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated: 15

Sampling Time: 1302 Sampling Date: 4-26-00

Sample I.D.: MW-3 Laboratory: Sequoia Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other: 3rd Peram.

D.O. (if req'd): Pre-purge: 2.47 mg/L Post-purge: 2.63 mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

EQUIVA WELL MONITORING DATA SHEET

| | |
|---------------------------------|--|
| BTS #: 000426-AZ | Site: 204-5508-5801 |
| Sampler: DSCAV | Date: 4-26-00 |
| Well I.D.: MW-5 | Well Diameter: 2 3 <u>4</u> 6 8 |
| Total Well Depth: 17.76 | Depth to Water: 10.32 |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>PVC</u> Grade | D.O. Meter (if req'd): <u>YSI</u> HACH |

Purge Method:

- | | |
|--|-----------------|
| Bailer | Waterra |
| Disposable Bailer | Peristaltic |
| Middleburg | Extraction Pump |
| Electric Submersible <input checked="" type="checkbox"/> | Other _____ |

Sampling Method:

- Bailer
- Disposable Bailer
- Extraction Port
- Dedicated Tubing

Other: _____

4.8 (Gals.) X 3 = 14.4 Gals.
 I Case Volume Specified Volumes Calculated Volume

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | <u>4"</u> | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

| Time | Temp (°F) | pH | Cond. | Turbidity | Gals. Removed | Observations |
|------|-----------|-----|-------|-----------|---------------|--------------|
| 1213 | 68.3 | 6.9 | 1111 | 16 | 5 | |
| 1219 | 69.9 | 6.8 | 1109 | 29 | 10 | |
| 1215 | 70.1 | 6.8 | 1184 | 98 | 15 | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated: 15

Sampling Time: 1220 Sampling Date: 4-26-00

Sample I.D.: ~~1111~~ MW-5 Laboratory: Sequoia Columbia Other _____

Analyzed for: PPH-G BTEX MTBE TPH-D Other: _____

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

D.O. (if req'd): Pre-purge: 1.99 ^{mg/L} Post-purge: 3.01 ^{mg/L}

O.R.P. (if req'd): Pre-purge: _____ mV Post-purge: _____ mV

EQUIVA WELL MONITORING DATA SHEET

| | |
|---------------------------------|--|
| BTS #: 000926-AZ | Site: 209-5508-5801 |
| Sampler: OSCAV | Date: 4-26-00 |
| Well I.D.: MW-6 | Well Diameter: 2 3 <u>4</u> 6 8 |
| Total Well Depth: 19.27 | Depth to Water: 9.13 |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>PVC</u> Grade | D.O. Meter (if req'd): <u>YSI</u> HACH |

Purge Method:
 Bailer Waterra
 Disposable Bailer Peristaltic
 Middleburg Extraction Pump
 Electric Submersible Other: _____

Sampling Method:
 Bailer Disposable Bailer
 Extraction Port
 Dedicated Tubing
 Other: _____

6.5 (Gals.) X 3 = 19.5 Gals.
 1 Case Volume Specified Volumes Calculated Volume

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | <u>4"</u> | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

| Time | Temp (°F) | pH | Cond. | Turbidity | Gals. Removed | Observations |
|------|-----------|-----|-------|-----------|---------------|--------------|
| 1133 | 69.8 | 6.7 | 799 | 38 | 7 | |
| 1135 | 69.7 | 6.8 | 909 | 8 | 14 | |
| 1137 | 69.9 | 6.8 | 1021 | 4 | 20 | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated: 20

Sampling Time: 1145 Sampling Date: 4-26-00

Sample I.D.: MW-6 Laboratory: Sequora Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: 3 RD Petrol.

| | | | | |
|--------------------|-------------------|-----------|--------------------|-----------|
| D.O. (if req'd): | <u>Pre-purge:</u> | 1.93 mg/L | <u>Post-purge:</u> | 2.90 mg/L |
| O.R.P. (if req'd): | <u>Pre-purge:</u> | mV | <u>Post-purge:</u> | mV |

EQUIVA WELL MONITORING DATA SHEET

| | |
|---------------------------------|--|
| BTS #: 000426-AZ | Site: 204-5308-5801 |
| Sampler: DSCAV | Date: 4-26-00 |
| Well I.D.: MW-7 | Well Diameter: 2 3 <u>4</u> 6 8 |
| Total Well Depth: 19.39 | Depth to Water: 8.31 |
| Depth to Free Product: | Thickness of Free Product (feet): |
| Referenced to: <u>PVC</u> Grade | D.O. Meter (if req'd): <u>YSI</u> HACH |

Purge Method:
 Bailer Waterra
 Disposable Bailer Peristaltic
 Middleburg Extraction Pump
 Electric Submersible Other _____

Sampling Method:
 Bailer
 Disposable Bailer
 Extraction Port
 Dedicated Tubing
 Other: _____

$$7.2 \text{ (Gals.)} \times 3 = 21.6 \text{ Gals.}$$

1 Case Volume Specified Volumes Calculated Volume

| Well Diameter | Multiplier | Well Diameter | Multiplier |
|---------------|------------|---------------|-----------------------------|
| 1" | 0.04 | <u>4"</u> | 0.65 |
| 2" | 0.16 | 6" | 1.47 |
| 3" | 0.37 | Other | radius ² * 0.163 |

| Time | Temp (°F) | pH | Cond. | Turbidity | Gals. Removed | Observations |
|------|-----------|-----|-------|-----------|---------------|--------------|
| 1152 | 66.5 | 6.9 | 1081 | 19 | 7 | |
| 1154 | 66.7 | 7.0 | 1099 | 7 | 14 | |
| 1157 | 66.0 | 7.0 | 1096 | 28 | 22 | |
| | | | | | | |
| | | | | | | |

Did well dewater? Yes No Gallons actually evacuated: 22

Sampling Time: 12:04 Sampling Date: 4-26-00

Sample I.D.: MW-7 Laboratory: Sequōia Columbia Other _____

Analyzed for: PPH-G BTEX MTBE TPH-D Other: _____

EB I.D. (if applicable): @ _____ Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: 3rd Resam.

| | | |
|--------------------|----------------------|-----------------------|
| D.O. (if req'd): | Pre-purge: 1.09 mg/L | Post-purge: 2.41 mg/L |
| O.R.P. (if req'd): | Pre-purge: mV | Post-purge: mV |