

ENVIRONESTAL PROTECTION 35 FEB 29 PM 2: UL

February 27, 1995

QUARTERLY GROUNDWATER MONITORING REPORT FEBRUARY 3, 1995 SAMPLING ASE JOB NO. 2659

at
Romak Iron Works
3250 Hollis Street
Oakland, California 94662

Submitted by:
AQUA SCIENCE ENGINEERS, INC.
2411 Old Crow Canyon Road, #4
San Ramon, CA 94583
NOLLOGIONE (510) 820-9391

ENVIRONMENTAL PROTECTION

WE'VE MOVED TO 2411 OLD CROW CANYON RD #4 SAN RAMON, CA 94583 510-820-9391



#### 1.0 INTRODUCTION

This report outlines the methods and findings of Aqua Science Engineer's, Inc. (ASE) quarterly groundwater sampling at the Romak Iron Works property located at 3250 Hollis Street in Oakland, California (Figures 1 and 2).

#### 2.0 GROUNDWATER SAMPLING

On February 3, 1995, ASE measured the depth to water in the site monitoring well using an electric water level sounder. The well was also checked for the presence of free-floating hydrocarbons. The well contained a hydrocarbon sheen. Prior to sampling, the well was purged of four well casing volumes of groundwater using a pre-cleaned PVC bailer. The samples were collected from the well with a dedicated polyethylene bailer. The groundwater samples were decanted from the bailer into three (3) 40-ml volatile organic analysis (VOA) vials and three (3) 1-liter amber glass bottles. The samples were preserved with hydrochloric acid, labeled, placed in protective foam sleeves, and placed into an ice chest containing wet ice for transport to American Environmental Network (AEN) of Pleasant Hill, California (DOHS #1172) under chain of custody.

Well sampling purge water was contained in DOT 17H drums and stored on-site for handling by the client at a later date. See Appendix B for a copy of the well sample field log.

#### 3.0 ANALYTICAL RESULTS FOR GROUNDWATER

The groundwater samples were analyzed by AEN for total petroleum hydrocarbons as gasoline (TPH-G) by EPA Method 5030/8015, total petroleum hydrocarbons as diesel (TPH-D) by EPA Method 3510/8015, benzene, toluene, ethylbenzene and total xylenes (BTEX) by EPA Method 8020 and total and hydrocarbon oil and grease (O&G) by EPA Method 5520B&F. The analytical results are tabulated below in Tables One and Two, and the certified analytical report and chain of custody form are included in Appendix A.

TPH-G was detected in the groundwater sample at 20,000 parts per billion (ppb), TPH-D was detected at 4,600 ppb, total oil and grease was detected at 9,300 ppb, hydrocarbon oil and grease was detected at 9,300 ppb and BTEX was detected between 11 and 3,400 ppb. The benzene concentration of 3,400 ppb exceeded the California EPA Department of Toxic Substances Control (DTSC) maximum contaminant level (MCL) for drinking water of 1

ppb, and the ethylbenzene concentration of 810 ppb exceeded the DTSC MCL of 680 ppb. The analytical results from this quarter are consistent with the previous quarters results.

TABLE ONE
Summary of Chemical Analysis of GROUNDWATER Samples
TPH-G, TPH-D and BTEX
All results are in parts per billion

Sampling Date	TPH Gasoline	TPH Diesel	Benzene	Toluene	Ethyl Benzene	Total Xylenes
08-04-93	12,000		7.6	9.7	9.9	29
11-18-93	10,270		3,169	38.3	661.2	659.4
02-09-94	17,000		6,200	64	770	420
05-25-94	24,000		6,200	27	1,100	210
08-18-94	22,000		5,000	10	740	150
11-14-94	20,000	4,200	4,200	25	860	450
02-03-95	20,000	4,600*	3,400	11	810	100
DTSC		Not				
MCL		Established	1.0	100**	680	1,750
EPA		5030/	602 or	602 or	602 or	602 or
METHOD		8015	8020	8020	8020	8020

<sup>--- =</sup> Not analyzed

DTSC = California EPA Department of Toxic Substance Control

MCL = maximum contaminant level for drinking water

# TABLE TWO Summary of Chemical Analysis of GROUNDWATER Samples Oil and Grease All results are in parts per billion

Sampling Date	Total Oil & Grease	Hydrocarbon Oil & Grease
11-14-94 02-07-95	4,000 11,000	<1,000 9,300
EPA METHOD	5520C	5520F

<sup>\* =</sup> motor oil detected

<sup>\*\* =</sup> DTSC recommended action level for drinking water; MCL not established

#### 4.0 CONCLUSIONS AND RECOMMENDATIONS

High TPH-G, TPH-D, total oil and grease, hydrocarbon oil and grease, benzene and ethylbenzene concentrations (20,000 ppb, 4,600 ppb, 11,000 ppb, 9,300 ppb, 3,400 ppb and 810 ppb, respectively) were detected in groundwater samples collected from monitoring well MW-1. These concentrations are consistent with previous quarter's results.

Future plans for this site include determining the groundwater gradient and flow direction beneath the site utilizing wells at other surrounding sites, and installing one (1) well downgradient of the site.

#### 5.0 REPORT LIMITATIONS

The results of this investigation represent conditions at the time of the groundwater sampling, at the specific locations at which the samples were collected, and for the specific parameters analyzed for by the laboratory.

It does not fully characterize the site for contamination resulting from unknown sources, or for parameters not analyzed for by the laboratory. All of the laboratory work cited in this report was prepared under the direction of an independent CSDHS certified laboratory. The independent laboratory is solely responsible for the contents and conclusions of the chemical analysis data.

Aqua Science Engineers appreciates the opportunity to assist Romak Iron Works with its environmental needs. Should you have any questions or comments, please feel free to call us at (510) 820-9391.

No. REA-05442

Respectfully submitted,

AQUA SCIENCE ENGINEERS, INC.

Robert E. Kitay, R.E.A.

Project Geologist

cc:

Attachments: Figures 1 and 2


Appendices A and B


Mr. Kevin Romak, Romak Iron Works

Ms. Susan Hugo, Alameda County Health Care Services Agency

Mr. Kevin Graves, California Regional Water Quality Control Board

Romak Quarterly Report - February 1995

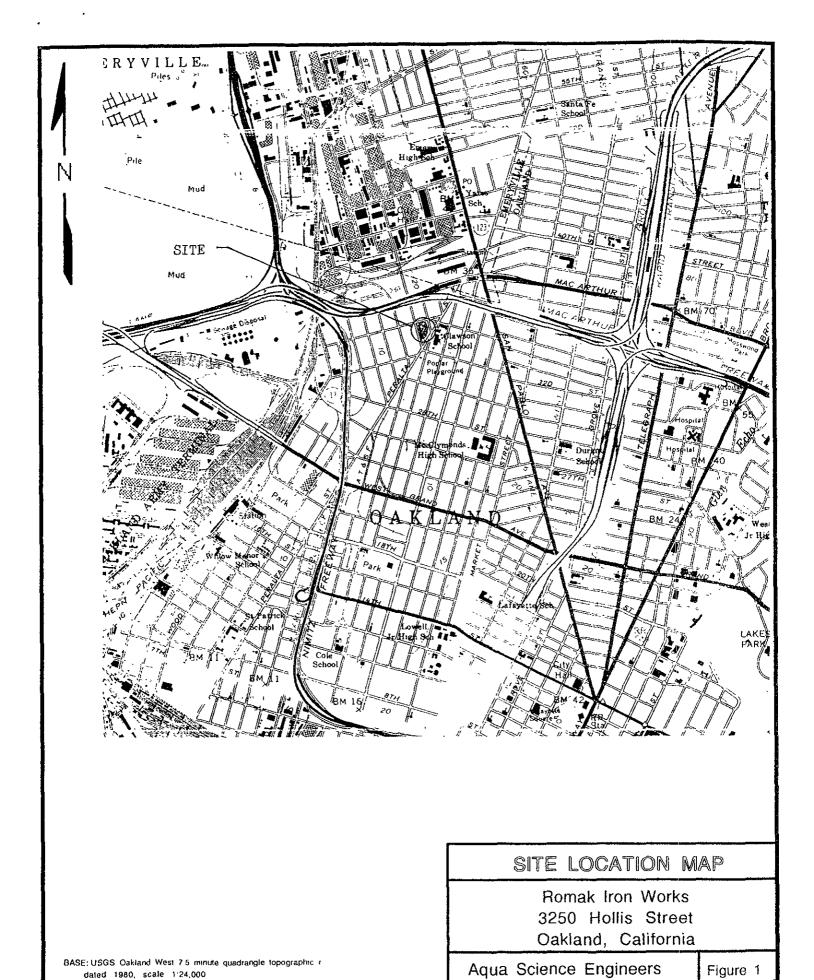

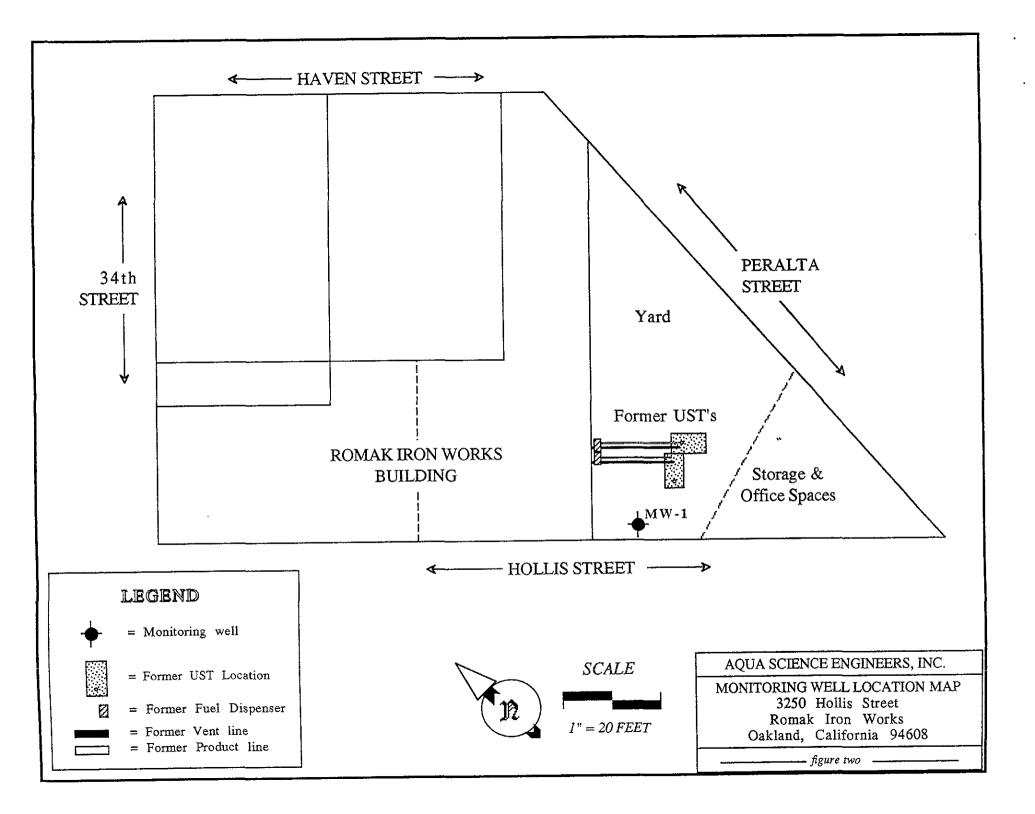

## APPENDIX A

Analytical Report and Chain of Custody Form

## American Environmental Network

#### Certificate of Analysis

1

DOHS Certification: 1172

AIHA Accreditation: 11134

PAGE 1

AQUA SCIENCE ENGINEERS, INC 2411 OLD CROW CANYON RD. #4 SAN RAMON. CA 94583

ATTN: DAVID ALLEN CLIENT PROJ. ID: 2659 CLIENT PROJ. NAME: ROMAK REPORT DATE: 02/22/95

DATE(S) SAMPLED: 02/03/95

DATE RECEIVED: 02/07/95

AEN WORK ORDER: 9502066

#### PROJECT SUMMARY:

On February 7, 1995, this laboratory received 1 water sample(s).

Client requested sample(s) be analyzed for organic parameters. Results of analysis are summarized on the following page(s). Please see quality control report for a summary of QC data pertaining to this project.

Samples will be stored for 30 days after completion of analysis, then disposed of in accordance with State and Federal regulations. Samples may be archived by prior arrangement.

If you have any questions, please contact Client Services at (510) 930-9090.

Larry Klein

Laboratory Director

#### AQUA SCIENCE ENGINEERS, INC.

AEN JOB NO: 9502066 DATE SAMPLED: 02/03/95 DATE RECEIVED: 02/07/95 CLIENT PROJ. ID: 2659

Client Sample Id	AEN Lab Id	Purgeable Hydrocarbons as Gasoline (ug/L)	Extractable Hydrocarbons as Diesel (ug/L)	Oil & Grease (ug/L)	Hydrocarbons (ug/L)	Benzene (ug/L)	Toluene (ug/L)	Ethylbenzene (ug/L)	Total Xylenes (ug/L)
MW-1	01	20,000	4,600 *	11,000	9,300	3,400	11	810	100
Reporting 1	Limit	1000	50	500	500	10	10	10	40
EPA Method	:	5030 GCF1D	3510 GCFID	5520C	5520C,F	8020	8020	8020	8020
Date(s) Ex	tracted:	NA	02/08/95	02/08/95	02/08/95	NA	NA	NA	NA
Date(s) Ana	alyzed:	02/10/95	02/09/95	02/10/95	02/10/95	02/10/95	02/10/95	02/10/95	02/10/95

#### Motor oil detected

Reporting limit elevated for gasoline/BTEX due to high levels of target compounds; sample run at dilution.

NA = Not Applicable ND = Not Detected

#### AEN (CALIFORNIA) QUALITY CONTROL REPORT

AEN JOB NUMBER: 9502066

CLIENT PROJECT ID: 2659

#### Quality Control and Project Summary

All laboratory quality control parameters were found to be within established limits.

#### <u>**Definitions**</u>

Laboratory Control Sample (LCS)/Method Spike(s): Control samples of known composition. LCS and Method Spike data are used to validate batch analytical results.

Matrix Spike(s): Aliquot of a sample (aqueous or solid) with added quantities of specific compounds and subjected to the entire analytical procedure. Matrix spike and matrix spike duplicate QC data are advisory.

Method Blank: An analytical control consisting of all reagents, internal standards, and surrogate standards carried through the entire analytical process. Used to monitor laboratory background and reagent contamination.

Not Detected (ND): Not detected at or above the reporting limit.

Relative Percent Difference (RPD): An indication of method precision based on duplicate analysis.

Reporting Limit (RL): The lowest concentration routinely determined during laboratory operations. The RL is generally 1 to 10 times the Method Detection Limit (MDL). Reporting limits are matrix, method, and analyte dependent and take into account any dilutions performed as part of the analysis.

Surrogates: Organic compounds which are similar to analytes of interest in chemical behavior, but are not found in environmental samples. Surrogates are added to all blanks, calibration and check standards, samples, and spiked samples. Surrogate recovery is monitored as an indication of acceptable sample preparation and instrumental performance.

- D: Surrogates diluted out.
- #: Indicates result outside of established laboratory QC limits.

#### QUALITY CONTROL DATA

METHOD: EPA 3510 GCFID

;

AEN JOB NO: 9502066 DATE(S) EXTRACTED: 02/08/95

INSTRUMENT: C MATRIX: WATER

#### Surrogate Standard Recovery Summary

Date Analyzed	Client Id.	Lab Id.	Percent Recovery n-Pentacosane
02/09/95	MW-1	01	104
QC Limits:			89-139

DATE EXTRACTED: 02/03/95 DATE ANALYZED: 02/04/95 SAMPLE SPIKED: DI WATER INSTRUMENT: C

#### Method Spike Recovery Summary

	0 :1			QC Lim	its
Analyte	Spike Added (mg/L)	Average Percent Recovery	RPD	Percent Recovery	RPD
Diesel	1.7	93	5	65-103	12

Daily method blanks for all associated analytical runs showed no contamination over the reporting limit.

#### QUALITY CONTROL DATA

METHOD: SM 5520

AEN JOB NO: 9502066
DATE EXTRACTED: 02/02/95
DATE ANALYZED: 02/03/95
SAMPLE SPIKED: DI WATER
INSTRUMENT: IR

MATRIX: WATER

#### Method Spike Recovery Summary

	0.11	<b>A</b>		QC Lim	its
Analyte	Spike Added (mg/L)	Average Percent Recovery	Percent RPD Recovery		RPD
Oil	6.9	92	<1	80-109	5

Daily method blanks for all associated analytical runs showed no contamination over the reporting limit.

#### QUALITY CONTROL DATA

METHOD: EPA 8020, 5030 GCFID

AEN JOB NO: 9502066 INSTRUMENT: H MATRIX: WATER

#### Surrogate Standard Recovery Summary

٠,

Date Analyzed	Client Id.	Lab Id.	Percent Recovery Fluorobenzene
02/10/95	MW-1	01	103
QC Limits:			92-109

DATE ANALYZED: 02/10/95 SAMPLE SPIKED: 9502064-02 INSTRUMENT: H

#### Matrix Spike Recovery Summary

				QC Limi	ts
Analyte	Spike Added (ug/L)	Average Percent Recovery	RPD	Percent Recovery	RPD
Benzene Toluene	18.2 52.8	101 102	<1 <1	85-109 87-111	17 16
Hydrocarbons as Gasoline	500	99	5	66-117	19

Daily method blanks for all associated analytical runs showed no contamination over the reporting limit.

Chain of Custody tody

DATE 2/7/95 PAGE LOF ( Aqua Science Engineers, Inc. 2411 Old Crow Canyon Road, #4, San Ramon, CA 94583 (510) 820-9391 - FAX (510) 837-4853 ROMAK PROJECT NAME \_\_\_\_ (PHONE NO.) SAMPLERS (SIGNATURE) Oakland ADDRESS \_\_ 820-9391 TPH-DIESEL (EPA 3510/8015)
PURGABLE AROMATICS (EPA 602/0220)
PURGABLE HALOCARBONS (EPA 601/8010) ANALYSIS REQUEST TPH-GASOLINE/BTEX (EPA 5030/8015-8020) VOLATTLE ORGAUCS (EPA 624/8240) OIL & GREASE | (EPA 5520 E&F OF TCLP (EPA 1311/1310)
STLC- CAM WET (EPA 1311/1310) SPECIAL INSTRUCTIONS: BASE/NUETRALS, ( EPA 625/8270) REACTI VI TY CORROSI VI TY I GRU TABI LLI TY NO. OF SAMPLE ID. DATE TIME MATRIX SAMPLES 14:60 Water J-F/MW-1 RECEIVED BY LABORATORY: COMMENTS: RELINQUISHED BY: RECEIVED BY REHNQUISHED BY: (time) (time) signature) (signature) (printed name) (date) (printed name) (date) D. HW-

(printed name)

Company- AEU

Company- AEM

Company- AFA

(printed name)

Company. ASS

### APPENDIX B

Well Sampling Field Log



## WELL SAMPLING FIELD LOG

Project Name and Address:
Job #: 269 Date of sampling: 2.3.95
Well Name: MW-1 Sampled by: DA
Total depth of well (feet): 21.65 Well diameter (inches): 2
Depth to water before sampling (feet): 9.50 rising Expense pressure reces
Thickness of floating product if any: Sheen
Depth of well casing in water (feet): 12.15
Number of gallons per well casing volume (gallons): 2,03
Number of well casing volumes to be removed:  4
Read volume of groundwater to be purged before sampling (gallons): \(\frac{\chi}{2}\)
Equipment used to purge the well: Dedicated PVC Bailar
Time Evacuation Began: 14: 10 Time Evacuation Finished: 14:35
Approximate volume of groundwater purged:
Did the well go dry?: VO After how many gallons:
Time samples were collected: 14:40
Depth to water at time of sampling: 9.68
Percent recovery at time of sampling: 99%
Samples collected with: Dedicated Polyethylene Bailer
Sample color: cloudy / clear Odor: moderate / Stro-9
Description of sediment in sample: fire self
Dosoription of somment in sumpro.
SAMPLES COLLECTED
DAM LES COLLECTED
Sample # of containers Volume & type container Pres Iced? Analysis
MW-1 3 40 ML VOX V TPH-G/BTEX
11 2 1-liter amberglass V V TPH-D
" 1 V V O+G