

RECEIVED

By dehloptoxic at 8:51 am, Oct 24, 2006

C A M B R I A

October 13, 2006

Mr. Mark Borsuk
1626 Vallejo St.
San Francisco, CA 94123-5116

Re: **Groundwater Monitoring Report
Third Quarter 2006**
Allright Parking
1432 Harrison Street
Oakland, California
Cambria Project #540-0188



Dear Mr. Borsuk:

As requested, Cambria Environmental Technology, Inc. (Cambria) has prepared this *Groundwater Monitoring Report – Third Quarter 2006*. Presented in the report are the third quarter 2006 activities and results, and the anticipated fourth quarter 2006 activities. Please forward the original report to Mr. Don Hwang with the Alameda County Health Care Services Agency (ACHCSA). A copy of the report is included for your file.

If you have any questions or comments regarding this report, please call me at (510) 420-3307.

Sincerely,

Cambria Environmental Technology, Inc.

Mark Jonas, P.G.
Senior Project Geologist

Attachments: *Groundwater Monitoring Report - Third Quarter 2006* (1 original and 1 copy)

**Cambria
Environmental
Technology, Inc.**

5900 Hollis Street
Suite A
Emeryville, CA 94608
Tel (510) 420-0700
Fax (510) 420-9170

GROUNDWATER MONITORING REPORT – THIRD QUARTER 2006

Allright Parking
1432 Harrison Street
Oakland, California
Cambria Project #540-0188

October 13, 2006

Prepared for:

Mr. Mark Borsuk
1626 Vallejo Street
San Francisco, California 94123-5116

Prepared by:

Cambria Environmental Technology, Inc.
5900 Hollis Street, Suite A
Emeryville, California 94608

Written by:

Glenn D Reiss


Glenn Reiss
Senior Staff Geologist

Cambria Environmental Technology, Inc. (Cambria) prepared this document for use by our client and appropriate regulatory agencies. It is based partially on information available to Cambria from outside sources and/or in the public domain, and partially on information supplied by Cambria and its subcontractors. Cambria makes no warranty or guarantee, expressed or implied, included or intended in this document, with respect to the accuracy of information obtained from these outside sources or the public domain, or any conclusions or recommendations based on information that was not independently verified by Cambria. This document represents the best professional judgment of Cambria. None of the work performed hereunder constitutes or shall be represented as a legal opinion of any kind or nature.

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge.

Mark Jonas

Mark Jonas, P.G.
Senior Project Geologist




GROUNDWATER MONITORING REPORT – THIRD QUARTER 2006

Allright Parking
1432 Harrison Street
Oakland, California
Cambria Project #540-0188

October 13, 2006

INTRODUCTION



On behalf of Mr. Mark Borsuk, Cambria Environmental Technology, Inc. (Cambria) has prepared this *Groundwater Monitoring Report – Third Quarter 2006* for the above-referenced site (see Figure 1). Presented in this report are the third quarter 2006 groundwater monitoring activities and results, and the anticipated fourth quarter 2006 activities.

Table 1 contains recent and historic well water depth measurements, separate phase hydrocarbon (SPH) measurements, and groundwater elevation data. In addition, it provides recent and historic hydrochemical data. Appendix A contains the field data sheets for the third quarter 2006 monitoring events. Appendix B contains the analytical laboratory report from the September 7, 2006 groundwater sampling event. Appendix C contains benzene concentration and depth to water versus time graphs.

THIRD QUARTER 2006 ACTIVITIES AND RESULTS

Monitoring Activities

Field Activities: On September 7, 2006, Cambria coordinated with Muskan Environmental Sampling (MES) to conduct quarterly monitoring activities. MES gauged groundwater levels and inspected for SPH in all monitoring wells. No SPH was detected in any of the wells and groundwater samples were collected from wells MW-1, MW-2, MW-4, and MW-5. Groundwater monitoring field data sheets are presented as Appendix A. The groundwater monitoring data has been submitted to the GeoTracker database.

Field activities associated with well sampling included well purging, water quality measurements, sample collection, and equipment decontamination. Prior to sampling, the monitoring wells were purged by repeated bailing using a new, disposable bailer for each well. Field measurements of pH, specific conductance, and temperature of the purged groundwater were measured after extraction of each successive casing volume or at regular volume intervals. Casing volumes were calculated based on the well diameter and the height of the water column in the well casing.

Typically, well purging continued until at least three casing volumes of water were extracted and consecutive pH, conductivity, and temperature measurements were within 10 percent. Field water

quality measurements, purge volumes, and sample collection data were recorded on field sampling data forms (Appendix A).

Groundwater samples were collected using disposable bailers. The samples were decanted from the bailers into 40-milliliter (mL) glass volatile organic analysis (VOA) vials supplied by McCampbell Analytical, Inc. (McCampbell) of Pacheco, California. Immediately after collection, the sample containers were labeled and placed on water-based ice in a cooler. Chain-of-custody procedures were followed from sample collection to transfer to the laboratory (Appendix B).

To minimize the potential for cross-contamination, groundwater monitoring equipment was decontaminated prior to being deployed in the first monitoring well and between successive wells. The probe of the electric well sounder used for water level measurements was rinsed thoroughly with distilled water and Alconox™ detergent prior to first use and between subsequent water level measurements. The disposable bailers were discarded after use at each well.

Sample Analyses: Groundwater samples were analyzed for total petroleum hydrocarbons as gasoline (TPHg) by modified EPA Method 8015; and benzene, toluene, ethylbenzene, and xylenes (BTEX) and methyl tertiary-butyl ether (MTBE) by EPA Method 8021B. All analyses were performed by McCampbell. The laboratory analytical report is included as Appendix B. Hydrocarbon concentrations are summarized on Figure 1 and presented in Table 1. The analytical data were submitted to the GeoTracker database.

Monitoring Results


Groundwater Flow Direction: Based on depth-to-water measurements collected during the September 7, 2006 site visit, groundwater beneath the site apparently flows toward the northeast at a gradient of 0.004 feet/foot. Groundwater flow conditions observed during the third quarter 2006 are consistent with conditions observed during previous monitoring events. Groundwater elevation data is summarized on Figure 1 and presented in Table 1.

Hydrocarbon Distribution in Groundwater: Hydrocarbon concentrations were detected in all four of the sampled wells. TPHg concentrations ranged from 8,600 micrograms per liter ($\mu\text{g/L}$) to 34,000 $\mu\text{g/L}$, with the highest concentration detected in well MW-1. Benzene concentrations ranged from 540 $\mu\text{g/L}$ to 4,800 $\mu\text{g/L}$, with the highest concentration detected in well MW-2. Toluene concentrations ranged from 12 $\mu\text{g/L}$ to 630 $\mu\text{g/L}$, with the highest concentration detected in well MW-1. Ethylbenzene concentrations ranged from 170 $\mu\text{g/L}$ to 940 $\mu\text{g/L}$, with the highest concentration detected in well MW-2. Xylenes concentrations ranged from 220 $\mu\text{g/L}$ to 7,000 $\mu\text{g/L}$, with the highest concentration detected in well MW-1. No MTBE was detected above laboratory reporting in any of the wells. Refer to Table 1 for dissolved hydrocarbon concentrations, and

Appendix C for benzene concentration trend graphs for wells MW-1 through MW-6. The unshaded symbols on the graphs represent results below laboratory detection limits.

ANTICIPATED FOURTH QUARTER 2006 ACTIVITIES

Monitoring Activities



Cambria will coordinate with MES to perform quarterly monitoring activities. MES will gauge all monitoring wells; check wells for SPH; and collect groundwater samples from wells not containing SPH. As per the sampling schedule, wells MW-1, MW-2, MW-4, and MW-5 will be sampled during the fourth quarter event. Wells MW-3 and MW-6 are sampled on an annual basis during the first quarter. Groundwater samples will be analyzed for TPHg by modified EPA Method 8015, and BTEX and MTBE by EPA Method 8021B. If MTBE is detected above laboratory detection limits in any sample, confirmation analysis by EPA Method 8260 will be performed. Groundwater monitoring and sampling results will be submitted to the State's GeoTracker database. Cambria will summarize groundwater monitoring activities and results in the *Groundwater Monitoring Report - Fourth Quarter 2006*.

Corrective Action Activities

Cambria proposed to conduct a risk-based corrective action (RBCA) analysis to evaluate the site as a low-risk case closure candidate. As requested by the Alameda County Health Care Services Agency, Cambria has prepared and submitted a *Risk Assessment Work Plan* dated April 6, 2006. Cambria is waiting for agency approval to initiate the RBCA analysis.

ATTACHMENTS


Figure 1 – Groundwater Elevation and Hydrocarbon Concentration Map

Table 1 – Groundwater Elevations and Analytical Data

Appendix A – Groundwater Monitoring Field Data Sheets

Appendix B – Analytical Results for Groundwater Sampling

Appendix C – Benzene Concentration and Depth to Water versus Time Trend Graphs

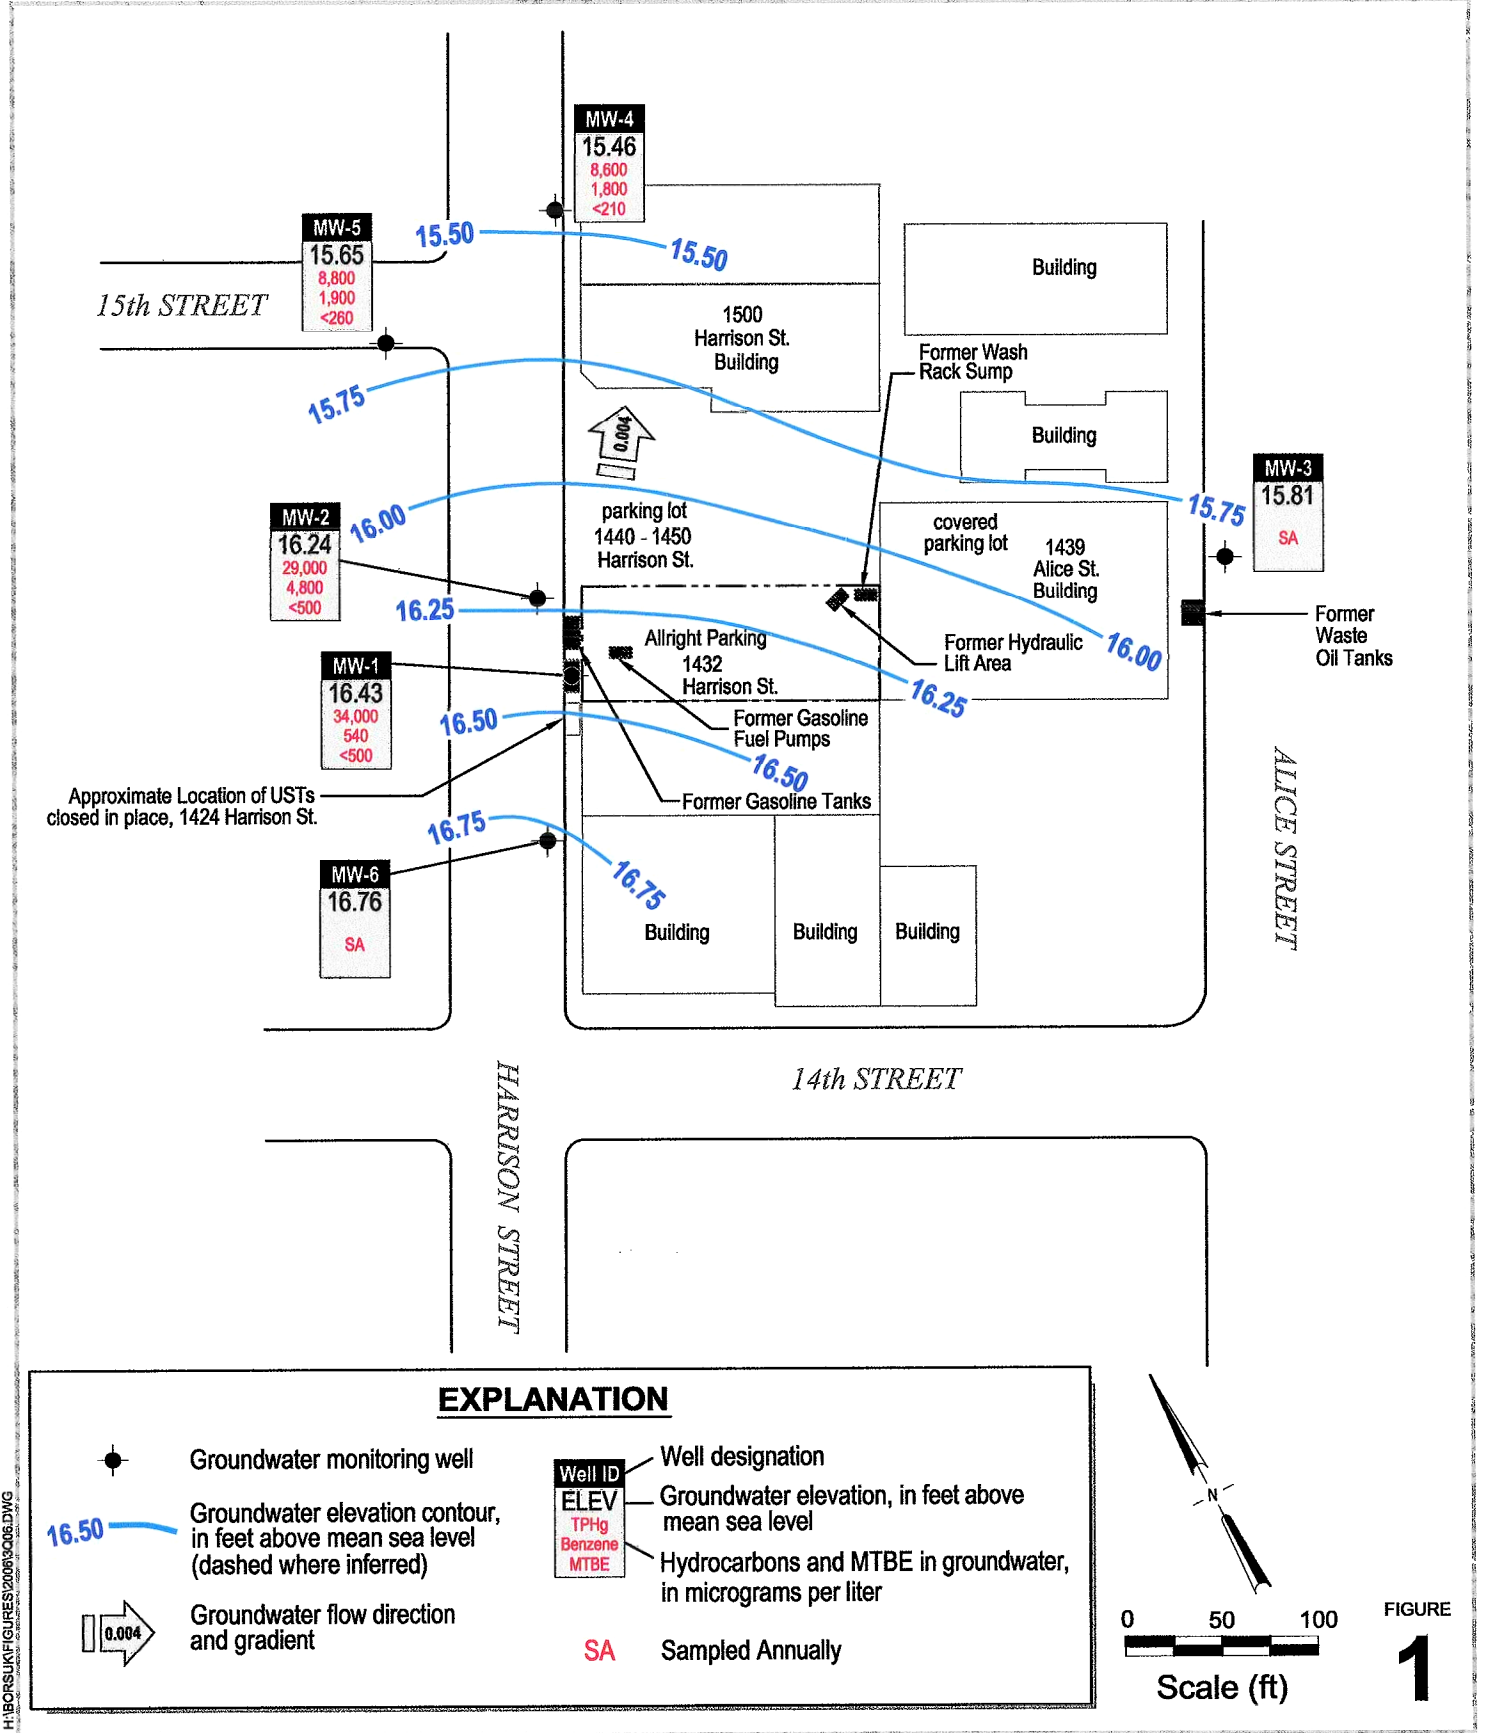

H:\BORS\FIGURES\2006\3006.DWG

Allright Parking
 1432 Harrison Street
 Oakland, California



Groundwater Elevation and Hydrocarbon Concentration Map
 September 7, 2006

CAMBRIA

Table 1. Groundwater Elevations and Analytical Data - Allright Parking, 1432 Harrison Street, Oakland, California

Well ID Sample ID	Date	Depth to Groundwater (ft amsl)	SPH Thickness (feet)	Groundwater Elevation (feet)	TPHg	Benzene	Toluene	Ethylbenzene	Xylenes	MTBE	Notes
					← (µg/L) →						
<i>Grab Groundwater Sample Results:</i>											
SB-A	7/6/1995	-20	--	--	330	16	3.6	1.3	4.9	--	ij
SB-B	7/7/1995	-20	--	--	450	55	3.1	5.1	5.0	--	a
SB-C	7/6/1995	-20	--	--	44,000	6,600	5,900	980	4,400	--	a
SB-D	7/6/1995	-20	--	--	70,000	7,400	10,000	1,600	7,200	--	a
SB-E	7/6/1995	-20	--	--	25,000	1,000	3,000	610	2,700	--	a
SB-G	7/7/1995	-20	--	--	84,000	9,400	16,000	2,200	9,900	--	a,b
SB-I	7/7/1995	-20	--	--	24,000	6,100	1,400	680	1,600	--	a
SB-J	7/7/1995	-20	--	--	960	110	66	8.7	71	--	a
SB-K	7/7/1995	-20	--	--	72,000	9,600	9,600	1,800	7,000	--	a
CB-1-W	7/22/1999	--	--	--	110,000	1,300	16,000	2,700	12,000	<3000*	a,b,c
CB-2-W	7/22/1999	--	--	--	4,700	21	13	170	76	<50*	a,c
<i>Monitoring Well Sample Results:</i>											
MW-1	8/1/1994	--	--	--	170,000	35,000	51,000	2,400	13,000	--	--
34.95	12/21/1994	19.53	--	15.42	180,000	41,000	64,000	3,100	100,000	--	--
	3/13/1995	18.66	--	16.29	150,000	31,000	45,000	2,500	17,000	--	--
	6/27/1995	18.20	--	16.75	71,000	17,000	18,000	1,600	7,700	--	--
	7/7/1995	18.35	--	16.60	71,000	17,000	18,000	1,600	7,700	--	--
	9/28/1995	18.20	--	16.75	110,000	27,000	34,000	1,700	14,000	--	--
	12/20/1995	19.96	--	14.99	120,000	33,000	43,000	2,300	15,000	--	--
	3/26/1996	19.27	--	15.68	140,000	29,000	36,000	1,900	13,000	<200*	d
	6/20/1996	18.64	--	16.31	110,000	30,000	38,000	2,200	13,000	<200*	--
	9/26/1996	19.35	--	15.60	170,000	28,000	40,000	2,200	15,000	ND**	--
	10/28/1996	19.58	--	15.37	--	--	--	--	--	--	--
	12/12/1996	19.68	--	15.27	110,000	36,000	47,000	2,500	16,000	ND*	--
	3/31/1997	18.80	--	16.15	160,000	24,000	39,000	1,900	13,000	ND*	--
	6/27/1997	19.26	--	15.69	130,000	25,000	36,000	2,000	14,000	ND*	--
	9/9/1997	19.70	--	15.25	99,000	22,000	27,000	1,600	13,000	270*	--
	12/18/1997	19.25	--	15.70	160,000	30,000	44,000	2,200	15,000	ND***	--
	3/12/1998	17.52	--	17.43	190,000	20,000	49,000	2,500	18,000	ND***	--
	6/22/1998	18.63	--	16.32	90,000	19,000	40,000	2,100	16,000	--	--
	9/18/1998	18.60	--	16.35	190,000	29,000	48,000	2,400	17,000	--	--
	12/23/1998	19.18	--	15.77	140,000	24,000	44,000	2,000	8,200	--	--
	3/29/1999	18.52	--	16.43	181,000	22,200	40,100	1,844	12,200	--	--
	6/23/1999	18.60	--	16.35	80,000	20,000	33,000	1,600	11,000	--	--
	9/24/1999	19.05	--	15.90	117,000	15,100	20,700	1,550	11,800	--	--
	12/23/1999	19.95	--	15.00	186,000	25,900	39,000	1,990	12,400	--	--
	3/21/2000	18.48	--	16.47	210,000	35,000	42,000	2,200	13,000	<3,000	a
	7/3/2000	18.95	--	16.00	200,000	33,000	46,000	2,200	15,000	<200*	a
	9/7/2000	19.45	Sheen	15.50	--	--	--	--	--	--	--
	12/5/2000	19.90	--	15.05	220,000	42,000	57,000	2,700	17,000	<200	a
	3/6/2001	18.20	--	16.75	180,000	27,000	39,000	2,000	13,000	<1200 (<20)	a,l
	6/8/2001	20.14	--	14.81	170,000	28,000	40,000	1,900	13,000	<200	a
	8/27/2001	21.19	--	13.76	130,000	24,000	33,000	1,600	11,000	<350	a
	10/25/2001	21.74	--	13.21	160,000	22,000	28,000	1,500	10,000	<350	a
	3/1/2002	21.39	0.41	13.84 ^a	--	--	--	--	--	--	--
	6/10/2002	22.30	--	12.65	210,000	30,000	51,000	3,100	22,000	<1,000*	a
34.96	9/3/2002	21.40	--	13.56	2,500,000	31,000	170,000	29,000	170,000	2,500,000	a
	12/22/2002	20.50	--	14.46	89,000	2,600	9,300	530	28,000	<1,700	a,m
	1/23/2003	18.57	--	16.39	130,000	600	1,600	<100	41,000	<50***	a,b,l
	6/12/2003	19.10	0.07	15.91 ^a	--	--	--	--	--	--	--
	7/23/2003	19.42	0.07	15.59 ^a	--	--	--	--	--	--	--
35.37#	12/22/2003	17.09	0.01	18.29 ^a	--	--	--	--	--	--	--
	3/10/2004	13.82	--	21.55	22,000	190	250	<10	5,100	<100	a,c
	6/16/2004	14.75	--	20.62	2,700	23	160	13	520	<25	a
	9/27/2004	18.02	--	17.35	27,000	580	2,000	56	6,800	<10***	a,m
	12/22/2004	11.25	--	24.12	250	3.5	18	<0.5	47	<0.5***	a,m
	3/3/2005	14.42	--	20.95	320	5.2	13	3.2	46	<5.0	a
34.96##	6/9/2005	17.80	--	17.16	--	--	--	--	--	--	+
	9/9/2005	18.26	--	16.70	--	--	--	--	--	--	+
	12/20/2005	18.68	--	16.28	--	--	--	--	--	--	+
	3/26/2006	16.96	--	18.00	23,000	270	400	65	4,400	<50	a
	6/23/2006	17.55	--	17.41	30,000	340	680	170	6,900	<500	a,m
	9/7/2006	18.53	--	16.43	34,000	540	630	190	7,000	<500	a
MW-2	8/1/1994	--	--	--	130,000	28,000	35,000	3,000	12,000	--	--
35.18	12/21/1994	19.91	--	15.27	200	140,000	200,000	3,500	22,000	--	--
	3/13/1995	19.15	--	16.03	500	9,200	23,000	7,000	36,000	--	--
	6/27/1995	18.74	--	16.44	120,000	23,000	30,000	2,700	13,000	--	--
	7/7/1995	18.80	--	16.38	120,000	23,000	30,000	2,700	13,000	--	--
	9/28/1995	19.30	--	15.88	110,000	23,000	29,000	2,500	11,000	--	--
	12/20/1995	20.24	--	14.94	83,000	980	1,800	2,200	10,000	--	--

CAMBRIA

Table 1. Groundwater Elevations and Analytical Data - Allright Parking, 1432 Harrison Street, Oakland, California

Well ID Sample ID TOC (ft amsl)	Date	Depth to Groundwater (ft amsl)	SPH Thickness (feet)	Groundwater Elevation (feet)	TPHg	Benzene	Toluene	Ethylbenzene	Xylenes	MTBE	Notes
					← (µg/L) →						
MW-2	3/26/1996	19.69	--	15.49	150,000	23,000	32,000	2,800	12,000	<200*	d
Continued	6/20/1996	19.20	--	15.98	94,000	15,000	23,000	2,400	12,000	<200*	--
	9/26/1996	19.80	--	15.38	150,000	20,000	29,000	2,800	12,000	ND**	--
	10/28/1996	20.18	--	15.00	--	--	--	--	--	--	--
	12/12/1996	20.17	--	15.01	58,000	3,100	11,000	1,700	8,100	220*	--
	3/31/1997	19.67	--	15.51	38,000	6,000	7,900	690	3,300	ND*	--
	6/27/1997	19.68	--	15.50	62,000	13,000	16,000	1,300	6,000	ND*	--
	9/9/1997	20.20	--	14.98	81,000	16,000	18,000	1,800	8,600	ND***	--
	12/18/1997	19.80	--	15.38	110,000	18,000	26,000	2,200	9,500	ND***	--
	3/12/1998	18.07	--	17.11	120,000	16,000	26,000	2,200	9,400	ND***	--
	6/22/1998	18.29	--	16.89	38,000	9,800	9,500	1,500	6,000	--	--
	9/18/1998	19.09	--	16.09	68,000	12,000	16,000	1,400	5,900	--	--
	12/23/1998	19.67	--	15.51	180,000	16,000	22,000	2,200	8,300	--	--
	3/29/1999	18.97	--	16.21	16,600	1,380	1,920	373	1,840	--	--
	6/23/1999	18.25	--	16.93	41,000	10,000	9,400	1,100	5,000	--	--
	9/24/1999	19.60	--	15.58	40,600	4,880	3,490	1,090	4,560	--	--
	12/23/1999	20.21	--	14.97	61,900	6,710	9,320	1,150	5,360	--	--
	3/21/2000	18.93	--	16.25	98,000	14,000	21,000	1,600	6,900	<1600	a
	7/3/2000	19.38	--	15.80	140,000	18,000	33,000	2,600	11,000	<200*	a
	9/7/2000	19.83	--	15.35	110,000	17,000	21,000	2,200	9,700	<100***	a,l
	12/5/2000	20.30	--	14.88	130,000	19,000	28,000	2,500	11,000	<200	a
	3/6/2001	19.57	--	15.61	32,000	3,400	3,400	580	2,500	<200	a
	6/8/2001	20.59	--	14.59	72,000	9,400	9,200	1,300	5,800	<200	a
	8/27/2001	21.79	--	13.39	110,000	17,000	28,000	2,600	11,000	<950	a
	10/25/2001	22.05	--	13.13	110,000	15,000	18,000	2,000	8,700	<350	a
	3/1/2002	21.80	--	13.38	3,100	370	180	62	330	<5.0*	a
	6/10/2002	22.83	--	12.35	7,800	2,000	1,100	76	570	<100*	a
35.21	9/3/2002	22.03	--	13.18	21,000	2,400	2,900	320	1,400	<500	a
	12/22/2002	22.70	--	12.51	630	48	56	19	82	<5.0	a
	1/23/2003	20.49	--	14.72	1,100	27	32	19	150	<25	a
	6/12/2003	21.03	--	14.18	10,000	2,100	1,600	150	660	<250	a
	7/23/2003	21.40	--	13.81	28,000	4,800	4,800	380	1,700	<500	a
	12/22/2003	19.33	--	15.88	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	3/10/2004	19.33	--	15.88	3,100	460	290	38	240	<50	a
	6/16/2004	19.90	--	15.31	9,100	1,600	1,200	220	830	<400	a
	9/27/2004	22.08	--	13.13	14,000	2,800	490	340	1,600	<350	a
	12/22/2004	21.74	--	13.47	1,100	300	28	22	71	<15	a
	3/3/2005	19.60	--	15.61	340	12	4.4	9.1	28	<10	a
	6/9/2005	18.65	--	16.56	240	22	2.7	6.4	27	<10	a
	9/9/2005	19.27	--	15.94	7,800	1,100	170	380	690	<160	a
	12/20/2005	19.70	--	15.51	150	10	1.9	2.8	10	<5.0	a
	3/26/2006	18.51	--	16.70	2,200	93	19	66	130	<50	a
	6/23/2006	18.47	--	16.74	8,800	1,600	110	500	480	<500	a,m
	9/7/2006	18.97	--	16.24	29,000	4,800	280	940	1,000	<500	n
MW-3	8/1/1994	--	--	--	<50	<0.5	<0.5	<0.5	<2.0	--	--
33.97	12/21/1994	18.82	--	15.15	<50	<0.5	<0.5	<0.5	<0.5	--	--
(annual sampling)	3/13/1995	17.86	--	16.11	<50	<0.5	<0.5	<0.5	<0.5	--	e
	7/7/1995	18.25	--	15.72	--	--	--	--	--	--	f,g
	9/28/1995	18.00	--	15.97	--	--	--	--	--	--	h
	12/20/1995	18.74	--	15.23	--	--	--	--	--	--	--
	3/26/1996	18.25	--	15.72	--	--	--	--	--	--	--
	6/20/1996	18.35	--	15.62	--	--	--	--	--	--	--
	9/26/1996	19.12	--	14.85	--	--	--	--	--	--	--
	10/28/1996	19.11	--	14.86	--	--	--	--	--	--	--
	12/12/1996	18.61	--	15.36	--	--	--	--	--	--	--
	3/31/1997	18.35	--	15.62	--	--	--	--	--	--	--
	6/27/1997	18.81	--	15.16	--	--	--	--	--	--	--
	9/9/1997	19.18	--	14.79	--	--	--	--	--	--	--
	12/18/1997	18.64	--	15.33	--	--	--	--	--	--	--
	3/12/1998	17.56	--	16.41	--	--	--	--	--	--	--
	6/22/1998	18.64	--	15.33	--	--	--	--	--	--	--
	9/18/1998	18.33	--	15.64	--	--	--	--	--	--	--
	12/23/1998	18.60	--	15.37	--	--	--	--	--	--	--
	3/29/1999	17.85	--	16.12	--	--	--	--	--	--	--
	6/23/1999	18.67	--	15.30	--	--	--	--	--	--	--
	9/24/1999	18.64	--	15.33	--	--	--	--	--	--	--
	12/23/1999	19.32	--	14.65	--	--	--	--	--	--	--
	3/21/2000	17.89	--	16.08	--	--	--	--	--	--	--
	7/3/2000	18.40	--	15.57	--	--	--	--	--	--	--

CAMBRIA

Table 1. Groundwater Elevations and Analytical Data - Allright Parking, 1432 Harrison Street, Oakland, California

Well ID Sample ID TOC (ft amsl)	Date	Depth to Groundwater (ft amsl)	SPH Thickness (feet)	Groundwater Elevation (feet)	TPHg	Benzene	Toluene (µg/L)	Ethylbenzene	Xylenes	MTBE	Notes
MW-3 34.01 <i>Cont'd</i>	9/7/2000	18.75	--	15.22	--	--	--	--	--	--	--
	12/5/2000	19.03	--	14.94	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	3/6/2001	18.12	--	15.85	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/8/2001	20.02	--	13.95	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	8/27/2001	21.09	--	12.88	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	10/25/2001	21.29	--	12.68	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	3/1/2002	21.14	--	12.83	<50	<0.5	<0.5	<0.5	<0.5	<5.0*	--
	6/10/2002	21.99	--	11.98	<50	<0.5	<0.5	<0.5	<0.5	<5.0*	--
	9/3/2002	21.17	--	12.84	--	--	--	--	--	--	--
	12/22/2002	21.94	--	12.07	--	--	--	--	--	--	--
	1/23/2003	20.08	--	13.93	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/12/2003	20.95	--	13.06	--	--	--	--	--	--	--
	7/23/2003	21.28	--	12.73	--	--	--	--	--	--	--
	12/22/2003	19.05	--	14.96	--	--	--	--	--	--	--
	3/10/2004	18.22	--	15.79	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/16/2004	18.82	--	15.19	--	--	--	--	--	--	--
	9/27/2004	21.03	--	12.98	--	--	--	--	--	--	--
	12/22/2004	20.69	--	13.32	--	--	--	--	--	--	--
	3/3/2005	17.94	--	16.07	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/9/2005	18.00	--	16.01	--	--	--	--	--	--	--
	9/9/2005	18.43	--	15.58	--	--	--	--	--	--	--
	12/20/2005	18.18	--	15.83	--	--	--	--	--	--	--
	3/26/2006	17.42	--	16.59	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
6/23/2006	17.77	--	16.24	--	--	--	--	--	--	--	
9/7/2006	18.20	--	15.81	--	--	--	--	--	--	--	
MW-4 33.75	10/28/1996	19.32	--	14.43	10,000	3,900	420	400	360	<200*	n
	12/12/1996	19.42	--	14.33	11,000	4,200	410	420	260	32*	--
	3/31/1997	18.67	--	15.08	ND	ND	ND	ND	ND	ND*	--
	6/27/1997	19.08	--	14.67	160	49	1.2	ND	5.9	ND*	--
	9/9/1997	19.33	--	14.42	7,400	5,000	410	230	470	33*	--
	12/18/1997	19.17	--	14.58	710	170	8.0	ND	39	ND***	--
	3/12/1998	17.68	--	16.07	1,300	410	21	ND	57	ND***	--
	6/22/1998	17.63	--	16.12	ND	ND	ND	ND	ND	--	--
	9/18/1998	18.58	--	15.17	ND	42	1.6	ND	4.8	--	--
	12/23/1998	19.01	--	14.74	1,900	1,000	76	50	120	--	--
	3/29/1999	18.35	--	15.40	ND	ND	ND	ND	ND	--	--
	6/23/1999	17.58	--	16.17	ND	ND	ND	ND	ND	--	--
	9/24/1999	19.05	--	14.70	9,150	3,270	131	34	537	--	--
	12/23/1999	19.41	--	14.34	12,200	5,360	275	424	592	--	--
	3/21/2000	18.42	--	15.33	45,000	16,000	1,100	1,400	1,900	1400* (<35)***	a,l
	7/3/2000	18.82	--	14.93	33,000	10,000	720	840	1,800	<200*	a
	9/7/2000	19.21	--	14.54	26,000	8,800	800	740	1,500	<50***	a,c,l
	12/5/2000	19.60	--	14.15	41,000	11,000	840	930	1,900	<200	a
	3/6/2001	18.24	--	15.51	1,100	400	5.7	<0.5	20	<5.0	a
	6/8/2001	20.91	--	12.84	92	19	<0.5	<0.5	1	<5.0	a
	8/27/2001	21.63	--	12.12	49,000	17,000	1700	1,700	3,200	<260	a
	10/25/2001	21.70	--	12.05	57,000	16,000	1,500	1,600	2,600	<300	a
	3/1/2002	21.53	--	12.22	400	140	2.3	<0.5	12	<5.0*	a
	6/10/2002	22.23	--	11.52	<50	2.5	<0.5	<0.5	<0.5	<5.0*	--
	9/3/2002	21.85	--	11.90	31,000	9,700	300	650	1,100	<1,000	a
	12/22/2002	22.39	--	11.36	35,000	13,000	310	1,100	1,800	<1,500	a
	1/23/2003	20.61	--	13.14	51,000	18,000	430	1,500	2,200	<5.0***	a,l
6/12/2003	21.20	--	12.55	80	12	<0.5	<0.5	1.0	<10	a	
7/23/2003	21.51	--	12.24	20,000	7,600	100	65	660	<250	a	
12/22/2003	19.60	--	14.15	26,000	9,500	200	380	1,100	<150	a	
3/10/2004	18.81	--	14.94	14,000	4,800	150	320	530	<400	a	
6/16/2004	19.32	--	14.43	2,800	1,100	24	17	100	<50	a	
9/27/2004	21.45	--	12.30	45,000	16,000	260	1,700	2,000	<25***	a	
12/22/2004	21.15	--	12.60	29,000	10,000	160	890	1,200	<5.0***	a,j	
3/3/2005	18.60	--	15.15	18,000	6,400	98	500	610	<600	a	
6/9/2005	18.11	--	15.64	20,000	6,100	110	460	580	<500	a	
9/9/2005	18.65	--	15.10	17,000	6,400	100	470	730	<250	a	
12/20/2005	19.01	--	14.74	26,000	8,500	160	640	800	<120	a	
3/26/2006	17.84	--	15.91	1,900	700	22	49	85	<50	a	
6/23/2006	17.96	--	15.79	12,000	3,400	130	370	510	260	a	
9/7/2006	18.29	--	15.46	8,600	1,800	100	170	220	<210	a,j	
MW-5 34.63	10/28/1996	19.88	--	14.75	90	4.0	0.6	<0.50	<0.50	16*	--
	12/12/1996	20.09	--	14.54	230	5.6	0.9	ND	0.9	3.6*	n
	3/31/1997	19.24	--	15.39	90	3.1	ND	ND	ND	ND*	--
	6/27/1997	19.16	--	15.47	ND	ND	ND	ND	ND	ND*	--

CAMBRIA

Table 1. Groundwater Elevations and Analytical Data - Allright Parking, 1432 Harrison Street, Oakland, California

Well ID Sample ID TOC (ft amsl)	Date	Depth to Groundwater (ft amsl)	SPH Thickness (feet)	Groundwater Elevation (feet)	TPHg	Benzene	Toluene	Ethylbenzene	Xylenes	MTBE	Notes
						← (µg/L) →					
MW-5	9/9/1997	19.93	--	14.70	ND	ND	ND	ND	ND	ND*	--
Continued	12/18/1997	19.77	--	14.86	ND	ND	ND	ND	ND	ND***	--
	3/12/1998	19.77	--	14.86	79	2.3	ND	0.8	ND	ND*	--
	6/22/1998	18.08	--	16.55	ND	ND	ND	ND	ND	--	--
	9/18/1998	19.12	--	15.51	ND	ND	ND	ND	ND	--	--
	12/23/1998	19.60	--	15.03	ND	0.8	0.9	ND	ND	--	--
	3/29/1999	18.88	--	15.75	ND	ND	ND	ND	ND	--	--
	6/23/1999	18.05	--	16.58	ND	ND	ND	ND	ND	--	--
	9/24/1999	19.61	--	15.02	ND	ND	ND	ND	ND	--	--
	12/23/1999	20.01	--	14.62	ND	ND	ND	ND	ND	--	--
	3/21/2000	19.05	--	15.58	140	<0.5	<0.5	<0.5	<0.5	<5.0*	--
	7/3/2000	19.40	--	15.23	85	8.1	3.1	1.6	7.8	<5.0*	k
	9/7/2000	19.62	--	15.01	<50	<0.5	<0.5	<0.5	<0.5	<5.0*	a
	12/5/2000	20.25	--	14.38	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	3/6/2001	19.07	--	15.56	91	5.5	<0.5	<0.5	<0.5	<5.0	--
	6/8/2001	20.77	--	13.86	290	22.0	0.8	<0.5	<0.5	<5.0	--
	8/27/2001	21.33	--	13.30	660	24.0	2.2	1.3	4.0	<25	a
	10/25/2001	21.62	--	13.01	55	3.5	<0.5	<0.5	<0.5	<5.0	a
	3/1/2002	21.49	--	13.14	200	1.9	0.69	<0.5	<0.5	<5.0*	a
	6/10/2002	22.15	--	12.48	<50	<0.5	<0.5	<0.5	<0.5	<5.0*	a
	9/3/2002	21.50	--	13.13	60	1.9	<0.5	<0.5	0.77	<5.0	--
	12/22/2002	22.19	--	12.44	82	0.57	<0.5	0.68	<0.5	<5.0	a
	1/23/2003	20.27	--	14.36	<50	2.1	<0.5	<0.5	<0.5	<5.0	a
	6/12/2003	21.10	--	13.53	<50	0.88	<0.5	<0.5	<0.5	<5.0	--
	7/23/2003	21.47	--	13.16	<50	4.0	<0.5	<0.5	<0.5	<5.0	--
	12/22/2003	19.57	--	15.06	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	3/10/2004	19.61	--	15.02	990	200	2.9	4.0	20	<70	--
	6/16/2004	20.15	--	14.48	250	42	<0.5	0.88	<0.5	<35	a
	9/27/2004	22.14	--	12.49	1,600	140	4.8	45	18	<110	a
	12/22/2004	21.81	--	12.82	<50	5.3	<0.5	<0.5	0.66	<5.0	--
	3/3/2005	19.35	--	15.28	2,000	330	4.4	63	39	<150	a
	6/9/2005	18.73	--	15.90	250	42	1.4	14	3.2	<5.0	a
	9/9/2005	19.30	--	15.33	2,000	390	5.0	71	38	<400	a
	12/20/2005	19.65	--	14.98	4,300	760	18	170	150	<35	a
	3/26/2006	18.58	--	16.05	1,600	460	3.3	35	32	<50	a
	6/23/2006	18.57	--	16.06	1,900	500	3.9	81	56	<17	a
	9/7/2006	18.98	--	15.65	8,800	1,900	12	350	220	<260	a,i
MW-6	10/28/1996	20.02	--	15.87	<50	<0.50	<0.50	<0.50	<0.50	<2.0*	--
35.89	12/12/1996	20.18	--	15.71	ND	ND	ND	ND	ND	ND*	n
(annual sampling)	3/31/1997	19.81	--	16.08	--	--	--	--	--	--	--
	6/27/1997	19.76	--	16.13	--	--	--	--	--	--	--
	9/9/1997	20.06	--	15.83	ND	ND	ND	ND	ND	ND*	--
	12/18/1997	19.90	--	15.99	ND	ND	ND	ND	ND	--	--
	3/12/1998	18.00	--	17.89	ND	ND	ND	ND	ND	ND*	--
	6/22/1998	18.43	--	17.46	ND	ND	ND	ND	ND	--	--
	9/18/1998	19.10	--	16.79	ND	ND	ND	ND	ND	--	--
	12/23/1998	19.61	--	16.28	ND	ND	ND	ND	ND	--	--
	3/29/1999	18.92	--	16.97	ND	ND	ND	ND	ND	--	--
	6/23/1999	18.41	--	17.48	ND	ND	ND	ND	ND	--	--
	9/24/1999	19.61	--	16.28	ND	ND	ND	ND	ND	--	--
	12/23/1999	20.30	--	15.59	ND	ND	ND	ND	ND	--	--
	3/21/2000	18.97	--	16.92	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	7/3/2000	19.46	--	16.43	59	5.1	2.3	1.1	5.3	<5.0*	--
	9/7/2000	19.95	--	15.94	<50	<0.5	<0.5	<0.5	<0.5	<5.0*	a
	12/5/2000	20.50	--	15.39	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	3/6/2001	19.54	--	16.35	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/8/2001	20.92	--	14.97	<50	<0.5	<0.5	<0.5	<0.5	<5.1	--
	8/27/2001	21.37	--	14.52	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	10/25/2001	21.59	--	14.30	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	3/1/2002	21.33	--	14.56	<50	<0.5	<0.5	<0.5	<0.5	<5.0*	--
	6/10/2002	21.97	--	13.92	<50	<0.5	<0.5	<0.5	<0.5	<5.0*	--
	9/3/2002	21.55	--	14.34	--	--	--	--	--	--	--
	12/22/2002	22.25	--	13.64	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	1/23/2003	20.47	--	15.42	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/12/2003	21.09	--	14.80	--	--	--	--	--	--	--
	7/23/2003	21.42	--	14.47	--	--	--	--	--	--	--
	12/22/2003	19.49	--	16.40	--	--	--	--	--	--	--
	3/10/2004	20.20	--	15.69	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/16/2004	20.73	--	15.16	--	--	--	--	--	--	--
	9/27/2004	22.88	--	13.01	--	--	--	--	--	--	--
	12/22/2004	22.53	--	13.36	--	--	--	--	--	--	--
	3/3/2005	19.87	--	16.02	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--

CAMBRIA

Table 1. Groundwater Elevations and Analytical Data - Allright Parking, 1432 Harrison Street, Oakland, California

Well ID Sample ID TOC (ft amsl)	Date	Depth to Groundwater (ft amsl)	SPH Thickness (feet)	Groundwater Elevation (feet)	TPHg	Benzene	Toluene (µg/L)	Ethylbenzene	Xylenes	MTBE	Notes
MW-6 Continued	6/9/2005	18.95	--	16.94	--	--	--	--	--	--	--
	9/9/2005	19.45	--	16.44	--	--	--	--	--	--	--
	12/20/2005	19.90	--	15.99	--	--	--	--	--	--	--
	3/26/2006	18.85	--	17.04	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	6/23/2006	18.57	--	17.32	--	--	--	--	--	--	--
	9/7/2006	19.13	--	16.76	--	--	--	--	--	--	--
Trip Blank	3/21/2000	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--
	9/7/2000	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--

Abbreviations, Methods, & Notes

TOC = Top of casing elevation

ft amsl = feet above mean sea level

SPH = Separate-phase hydrocarbons

TPHg = Total petroleum hydrocarbons as gasoline by modified EPA Method SW8015C

Benzene, toluene, ethylbenzene, and xylenes by EPA Method SW8021B

MTBE = Methyl tert-butyl ether * = MTBE by EPA Method SW8021B

** = MTBE by EPA Method SW8240

*** = MTBE by EPA Method SW8260

µg/L = micrograms per liter, equivalent to parts per billion

-- = Not sampled, not analyzed, or not applicable

<n = Not detected in sample above n µg/L

ND = Not detected above laboratory detection limit

x = Groundwater elevation adjusted for SPH by the relation:

Groundwater Elevation = TOC Elevation - Depth to Groundwater + (0.7 x SPH thickness)

= The wellhead elevation was raised by 0.41 feet when well MW-1 was connected to the SVE system on October 31, 2003.

= The wellhead elevation was lowered by 0.41 feet when well MW-1 was disconnected from the SVE system on April 30, 2005.

+ = Well de-watered during purging, no measurable water to sample.

a = Unmodified or weakly modified gasoline is significant.

b = Lighter than water immiscible sheen is present.

c = Liquid sample that contains greater than ~2 vol. % sediment.

d = MTBE result confirmed by secondary column or GC/MS analysis.

e = Sample analyzed for purgeable hydrocarbons by EPA Method SW8010, no purgeable hydrocarbons were detected.

f = Sample analyzed for VOCs by EPA Method SW8240, no non-BTEX compounds were detected.

g = Sample analyzed for Total Petroleum Hydrocarbons as motor oil (TPHmo) by Modified EPA Method SW8015, no TPHmo was detected.

h = Analytic sampling discontinued. Approved by Alameda County Department of Environmental Health.

i = Lighter than gasoline range compounds are significant.

j = Gasoline range compounds having broad chromatographic peaks are significant.

k = No recognizable pattern.

l = Sample diluted due to high organic content.

m = Liquid sample that contains greater than ~1 vol. % sediment.

n = TOC well elevation was increased by 3 ft based on a benchmark discrepancy discovered during a well survey performed on September 11, 2002

APPENDIX A

Groundwater Monitoring Field Data Sheets



WELL GAUGING SHEET

Client: Cambria Environmental Technology Inc.

Site

Address: 1432 Harrison Street, Oakland, CA

Date: 9/7/2006

Signature: 

Well ID	Time	Depth to SPH	Depth to Water	SPH Thickness	Depth to Bottom	Comments
MW-1	2:10		18.53		20.77	MW-2 odor
MW-2	2:00		18.97		25.63	
MW-3	1:30		18.20		23.90	
MW-4	1:55		18.29		24.81	
MW-5	1:50		18.98		28.45	
MW-6	1:40		19.13		28.29	




WELL SAMPLING FORM

Date:		9/7/2006				
Client:		Cambria Environmental Technology Inc.				
Site Address:		1432 Harrison Street, Oakland, CA				
Well ID:		MW-1				
Well Diameter:		4"				
Purging Device:		Disposable Bailer				
Sampling Method:		Disposable Bailer				
Total Well Depth:		20.77	Fe= mg/L			
Depth to Water:		18.53	ORP= mV			
Water Column Height:		2.24	DO= mg/L			
Gallons/ft:		0.65				
1 Casing Volume (gal):		1.46	COMMENTS: very turbid, dewatered after 3.5 gallons @ 4:47, well did not recharge 80%, sampled after waiting one hour, DTW = 20.09			
3 Casing Volumes (gal):		4.37				
TIME:	CASING VOLUME (gal)	TEMP (Celsius)			pH	COND. (µS)
4:35	1.5	18.7			6.89	590
4:45	3.0	18.4			6.95	540
4:47	3.5	Dewatered				
Sample ID:	Sample Date:	Sample Time:	Container Type	Preservative	Analytes	Method
MW-1	9/7/2006	6:00	40 ml VOA	HCl, ICE	TPHg, BTEX, MTBE	8015, 8021, confirmation by 8260
Signature:						




WELL SAMPLING FORM

Date:		9/7/2006					
Client:		Cambria Environmental Technology Inc.					
Site Address:		1432 Harrison Street, Oakland, CA					
Well ID:		MW-2					
Well Diameter:		2"					
Purging Device:		Disposable Bailer					
Sampling Method:		Disposable Bailer					
Total Well Depth:		25.63	Fe= mg/L				
Depth to Water:		18.97	ORP= mV				
Water Column Height:		6.66	DO= mg/L				
Gallons/ft:		0.16					
1 Casing Volume (gal):		1.07					
3 Casing Volumes (gal):		3.20					
COMMENTS:		turbid, odor					
TIME:	CASING VOLUME (gal)				TEMP (Celsius)	pH	COND. (µS)
3:55	1.1				18.5	7.11	648
4:00	2.1				18.1	7.06	616
4:05	3.2				18.3	7.09	623
Sample ID:	Sample Date:	Sample Time:	Container Type	Preservative	Analytes	Method	
MW-2	9/7/2006	4:10	40 ml VOA	HCl, ICE	TPHg, BTEX, MTBE	8015, 8021, confirmation by 8260	
				Signature: 			



WELL SAMPLING FORM

Date: 9/7/2006						
Client: Cambria Environmental Technology Inc.						
Site Address: 1432 Harrison Street, Oakland, CA						
Well ID: MW-4						
Well Diameter: 2"						
Purging Device: Disposable Bailer						
Sampling Method: Disposable Bailer						
Total Well Depth:		24.81	Fe= mg/L			
Depth to Water:		18.29	ORP= mV			
Water Column Height:		6.52	DO= mg/L			
Gallons/ft:		0.16				
1 Casing Volume (gal):		1.04	COMMENTS:			
3 Casing Volumes (gal):		3.13				
TIME:	CASING VOLUME (gal)	TEMP (Celsius)			pH	COND. (µS)
3:15	1.0	18.8	7.29	728		
3:20	2.1	18.4	7.21	745		
3:25	3.1	18.1	7.25	741		
Sample ID:	Sample Date:	Sample Time:	Container Type	Preservative	Analytes	Method
MW-4	9/7/2006	3:30	40 ml VOA	HCl, ICE	TPHg, BTEX, MTBE	8015, 8021, confirmation by 8260
				Signature:		



WELL SAMPLING FORM

Date: 9/7/2006						
Client: Cambria Environmental Technology Inc.						
Site Address: 1432 Harrison Street, Oakland, CA						
Well ID: MW-5						
Well Diameter: 2"						
Purging Device: Disposable Bailer						
Sampling Method: Disposable Bailer						
Total Well Depth:		28.45	Fe= mg/L			
Depth to Water:		18.98	ORP= mV			
Water Column Height:		9.47	DO= mg/L			
Gallons/ft:		0.16				
1 Casing Volume (gal):		1.52	COMMENTS:			
3 Casing Volumes (gal):		4.55				
TIME:	CASING VOLUME (gal)	TEMP (Celsius)			pH	COND. (µS)
2:25	1.5	18.2			7.19	633
2:30	3.0	18.5			7.15	640
2:35	4.5	18.5			7.17	649
Sample ID:	Sample Date:	Sample Time:	Container Type	Preservative	Analytes	Method
MW-5	9/7/2006	2:40	40 ml VOA	HCl, ICE	TPHg, BTEX, MTBE	8015, 8021, confirmation by 8260
Signature:						

APPENDIX B

Analytical Results for Groundwater Sampling



McC Campbell Analytical, Inc.

"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
Web: www.mccampbell.com E-mail: main@mccampbell.com
Telephone: 877-252-9262 Fax: 925-252-9269

Cambria Env. Technology 5900 Hollis St, Suite A Emeryville, CA 94608	Client Project ID: 540-0188; Borsuk	Date Sampled: 09/07/06
		Date Received: 09/08/06
	Client Contact: Mark Jonas	Date Reported: 09/12/06
	Client P.O.:	Date Completed: 09/12/06

WorkOrder: 0609163

September 12, 2006

Dear Mark:

Enclosed are:

- 1). the results of 4 analyzed samples from your **540-0188; Borsuk project**,
- 2). a QC report for the above samples
- 3). a copy of the chain of custody, and
- 4). a bill for analytical services.

All analyses were completed satisfactorily and all QC samples were found to be within our control limits.

If you have any questions please contact me. McC Campbell Analytical Laboratories strives for excellence in quality, service and cost. Thank you for your business and I look forward to working with you again.

Best regards,

Angela Rydelius, Lab Manager



McC Campbell Analytical, Inc.

"When Quality Counts"

1534 Willow Pass Road, Pittsburg, CA 94565-1701
 Web: www.mccampbell.com E-mail: main@mccampbell.com
 Telephone: 877-252-9262 Fax: 925-252-9269

Cambria Env. Technology 5900 Hollis St, Suite A Emeryville, CA 94608	Client Project ID: 540-0188; Borsuk	Date Sampled: 09/07/06
		Date Received: 09/08/06
	Client Contact: Mark Jonas	Date Extracted 09/10/06-09/11/06
	Client P.O.:	Date Analyzed: 09/10/06-09/11/06

Gasoline Range (C6-C12) Volatile Hydrocarbons as Gasoline with BTEX and MTBE*

Extraction method: SW5030B

Analytical methods: SW8021B/8015Cm

Work Order: 0609163


Lab ID	Client ID	Matrix	TPH(g)	MTBE	Benzene	Toluene	Ethylbenzene	Xylenes	DF	% SS
001A	MW-1	W	34,000,a	ND<500	540	630	190	7000	100	107
002A	MW-2	W	29,000,a	ND<500	4800	280	940	1000	100	113
003A	MW-4	W	8600,a,i	ND<210	1800	100	170	220	10	101
004A	MW-5	W	8800,a,i	ND<260	1900	12	350	220	10	105

Reporting Limit for DF =1; ND means not detected at or above the reporting limit	W	50	5.0	0.5	0.5	0.5	0.5	1	µg/L
	S	NA	NA	NA	NA	NA	NA	1	mg/Kg

* water and vapor samples and all TCLP & SPLP extracts are reported in ug/L, soil/sludge/solid samples in mg/kg, wipe samples in µg/wipe, product/oil/non-aqueous liquid samples in mg/L.

cluttered chromatogram; sample peak coelutes with surrogate peak.

+The following descriptions of the TPH chromatogram are cursory in nature and McC Campbell Analytical is not responsible for their interpretation: a) unmodified or weakly modified gasoline is significant; b) heavier gasoline range compounds are significant(aged gasoline?); c) lighter gasoline range compounds (the most mobile fraction) are significant; d) gasoline range compounds having broad chromatographic peaks are significant; biologically altered gasoline?; e) TPH pattern that does not appear to be derived from gasoline (stoddard solvent / mineral spirit?); f) one to a few isolated non-target peaks present; g) strongly aged gasoline or diesel range compounds are significant; h) lighter than water immiscible sheen/product is present; i) liquid sample that contains greater than ~1 vol. % sediment; j) reporting limit raised due to high MTBE content; k) TPH pattern that does not appear to be derived from gasoline (aviation gas). m) no recognizable pattern; n) TPH(g) range non-target isolated peaks subtracted out of the TPH(g) concentration at the client's request; p) see attached narrative.

 Angela Rydelius, Lab Manager



QC SUMMARY REPORT FOR SW8021B/8015Cm

W.O. Sample Matrix: Water

QC Matrix: Water

WorkOrder: 0609163

EPA Method: SW8021B/8015Cm		Extraction: SW5030B			BatchID: 23604			Spiked Sample ID: 0609144-006A		
Analyte	Sample	Spiked	MS	MSD	MS-MSD	LCS	LCSD	LCS-LCSD	Acceptance Criteria (%)	
	µg/L	µg/L	% Rec.	% Rec.	% RPD	% Rec.	% Rec.	% RPD	MS / MSD	LCS / LCSD
TPH(btex) [£]	ND	60	103	99.4	3.27	96.8	105	7.99	70 - 130	70 - 130
MTBE	ND	10	95.5	88.6	7.44	105	99	5.90	70 - 130	70 - 130
Benzene	ND	10	105	100	4.20	104	101	3.11	70 - 130	70 - 130
Toluene	ND	10	101	96.1	5.26	96.7	92.6	4.36	70 - 130	70 - 130
Ethylbenzene	ND	10	105	95.6	9.08	102	99.3	2.64	70 - 130	70 - 130
Xylenes	ND	30	100	92	8.33	95.7	91.3	4.63	70 - 130	70 - 130
%SS:	104	10	102	101	0.702	103	101	2.03	70 - 130	70 - 130

All target compounds in the Method Blank of this extraction batch were ND less than the method RL with the following exceptions:
NONE

BATCH 23604 SUMMARY

Sample ID	Date Sampled	Date Extracted	Date Analyzed	Sample ID	Date Sampled	Date Extracted	Date Analyzed
0609163-001A	9/07/06 6:00 PM	9/10/06	9/10/06 12:38 AM	0609163-002A	9/07/06 4:10 PM	9/10/06	9/10/06 1:08 AM
0609163-003A	9/07/06 3:30 PM	9/10/06	9/10/06 1:37 AM	0609163-004A	9/07/06 2:40 PM	9/11/06	9/11/06 11:44 PM

MS = Matrix Spike; MSD = Matrix Spike Duplicate; LCS = Laboratory Control Sample; LCSD = Laboratory Control Sample Duplicate; RPD = Relative Percent Deviation.

% Recovery = 100 * (MS-Sample) / (Amount Spiked); RPD = 100 * (MS - MSD) / ((MS + MSD) / 2).

MS / MSD spike recoveries and / or %RPD may fall outside of laboratory acceptance criteria due to one or more of the following reasons: a) the sample is inhomogenous AND contains significant concentrations of analyte relative to the amount spiked, or b) the spiked sample's matrix interferes with the spike recovery.

£ TPH(btex) = sum of BTEX areas from the FID.

cluttered chromatogram; sample peak coelutes with surrogate peak.

N/A = not applicable or not enough sample to perform matrix spike and matrix spike duplicate.

NR = analyte concentration in sample exceeds spike amount for soil matrix or exceeds 2x spike amount for water matrix or sample diluted due to high matrix or analyte content.

QA/QC Officer

McC Campbell Analytical, Inc.

1534 Willow Pass Rd
 Pittsburg, CA 94565-1701
 (925) 252-9262

CHAIN-OF-CUSTODY RECORD

WorkOrder: 0609163

ClientID: CETE

EDF: YES

Report to:
 Mark Jonas
 Cambria Env. Technology
 5900 Hollis St, Suite A
 Emeryville, CA 94608

Email: mjonas@cambria-env.com
 TEL: (510) 420-0700 FAX: (510) 420-9170
 ProjectNo: 540-0188; Borsuk
 PO:

Bill to:
 Accounts Payable
 Cambria Env. Technology
 5900 Hollis St, Ste. A
 Emeryville, CA 94608

Requested TAT: 5 days

Date Received: 09/08/2006

Date Printed: 09/08/2006

Sample ID	ClientSampID	Matrix	Collection Date	Hold	Requested Tests (See legend below)												
					1	2	3	4	5	6	7	8	9	10	11	12	
0609163-001	MW-1	Water	9/7/06 6:00:00 PM	<input type="checkbox"/>	A	A											
0609163-002	MW-2	Water	9/7/06 4:10:00 PM	<input type="checkbox"/>	A												
0609163-003	MW-4	Water	9/7/06 3:30:00 PM	<input type="checkbox"/>	A												
0609163-004	MW-5	Water	9/7/06 2:40:00 PM	<input type="checkbox"/>	A												

Test Legend:

1	G-MBTX_W	2	PREFD REPORT	3		4		5	
6		7		8		9		10	
11		12							

Prepared by: Nickole White

Comments:

NOTE: Samples are discarded 60 days after results are reported unless other arrangements are made. Hazardous samples will be returned to client or disposed of at client expense.

CETE #0609163

McCAMPBELL ANALYTICAL, INC.

110 2nd AVENUE SOUTH, #D7
PACHECO, CA 94553-5560

Website: www.mccampbell.com Email: main@mccampbell.com
Telephone: (925) 798-1620 Fax: (925) 798-1622

CHAIN OF CUSTODY RECORD

TURN AROUND TIME

RUSH 24 HR 48 HR 72 HR 5 DAY

EDF Required? Yes No

Report To: Mack Jonas Bill To: Cambria Environmental Technology
Company: Cambria Environmental Technology
5900 Hollis St. Ste A
Emeryville, CA 94608 E-Mail: mjonas@cambria-env.com
Tele: 510-420-3307 Fax: (510) 420-9170
Project #: 540-0188 Project Name: Borsuk
Project Location: 1432 Harrison St., Oakland, CA
Sampler Signature: Muskan Environmental Sampling

Analysis Request

Other Comments

SAMPLE ID (Field Point Name)	LOCATION	SAMPLING		# Containers	Type Containers	MATRIX					METHOD PRESERVED									
		Date	Time			Water	Soil	Air	Sludge	Other	ICE	HCL	HNO ₃	Other						
MW-1		9-7-06	6:00	4	100	X					X	X								
MW-2			4:10								X	X								
MW-4			3:30								X	X								
MW-5			2:40	X							X	X								
TB		X		1	X	X					X	X								

MTBE / BTEX & TPH as Gas (802 / 8021 + 8015)	
MTBE / BTEX ONLY (EPA 602 / 8021)	
TPH as Diesel / Motor Oil (8015)	
Total Petroleum Oil & Grease (1664 / 5520 E/B&F)	
Total Petroleum Hydrocarbons (418.1)	
EPA 502.2 / 601 / 8010 / 8021 (HVOCs)	
EPA 505 / 608 / 8081 (CI Pesticides)	
EPA 608 / 8082 PCB's ONLY; Aroclors / Congeners	
EPA 507 / 8141 (NP Pesticides)	
EPA 515 / 8151 (Acidic CI Herbicides)	
EPA 524.2 / 624 / 8260 (VOCs)	
Fuel Additives (MTBE, ETBE, TAME, D1PE, TBA, 1,2 - DCA, 1,2 - EDB, ethanol) by 8260B	
TPHg by 8015 M	
VOCs and fuel additives by 8260	
TPHg / BTEX (8015 / 8020)	

confirmatory MTBE hits by 8260

Filter Samples for Metals analysis: Yes / No

+
+
+
+

Hold

Relinquished By: [Signature] Date: 9-8-06 Time: 4:21
Received By: [Signature]
Relinquished By: _____ Date: _____ Time: _____
Received By: _____


ICEA*
GOOD CONDITION _____ APPROPRIATE CONTAINERS _____
HEAD SPACE ABSENT _____ PRESERVED IN LAB _____
DECHLORINATED IN LAB _____
PRESERVATION VOAS | O&G | METALS | OTHER

APPENDIX C

Benzene Concentration and Depth to Water versus Time Trend Graphs


MW-1: Benzene Concentration and Depth to Water vs. Time

Allright Parking, 1432 Harrison Street, Oakland, California

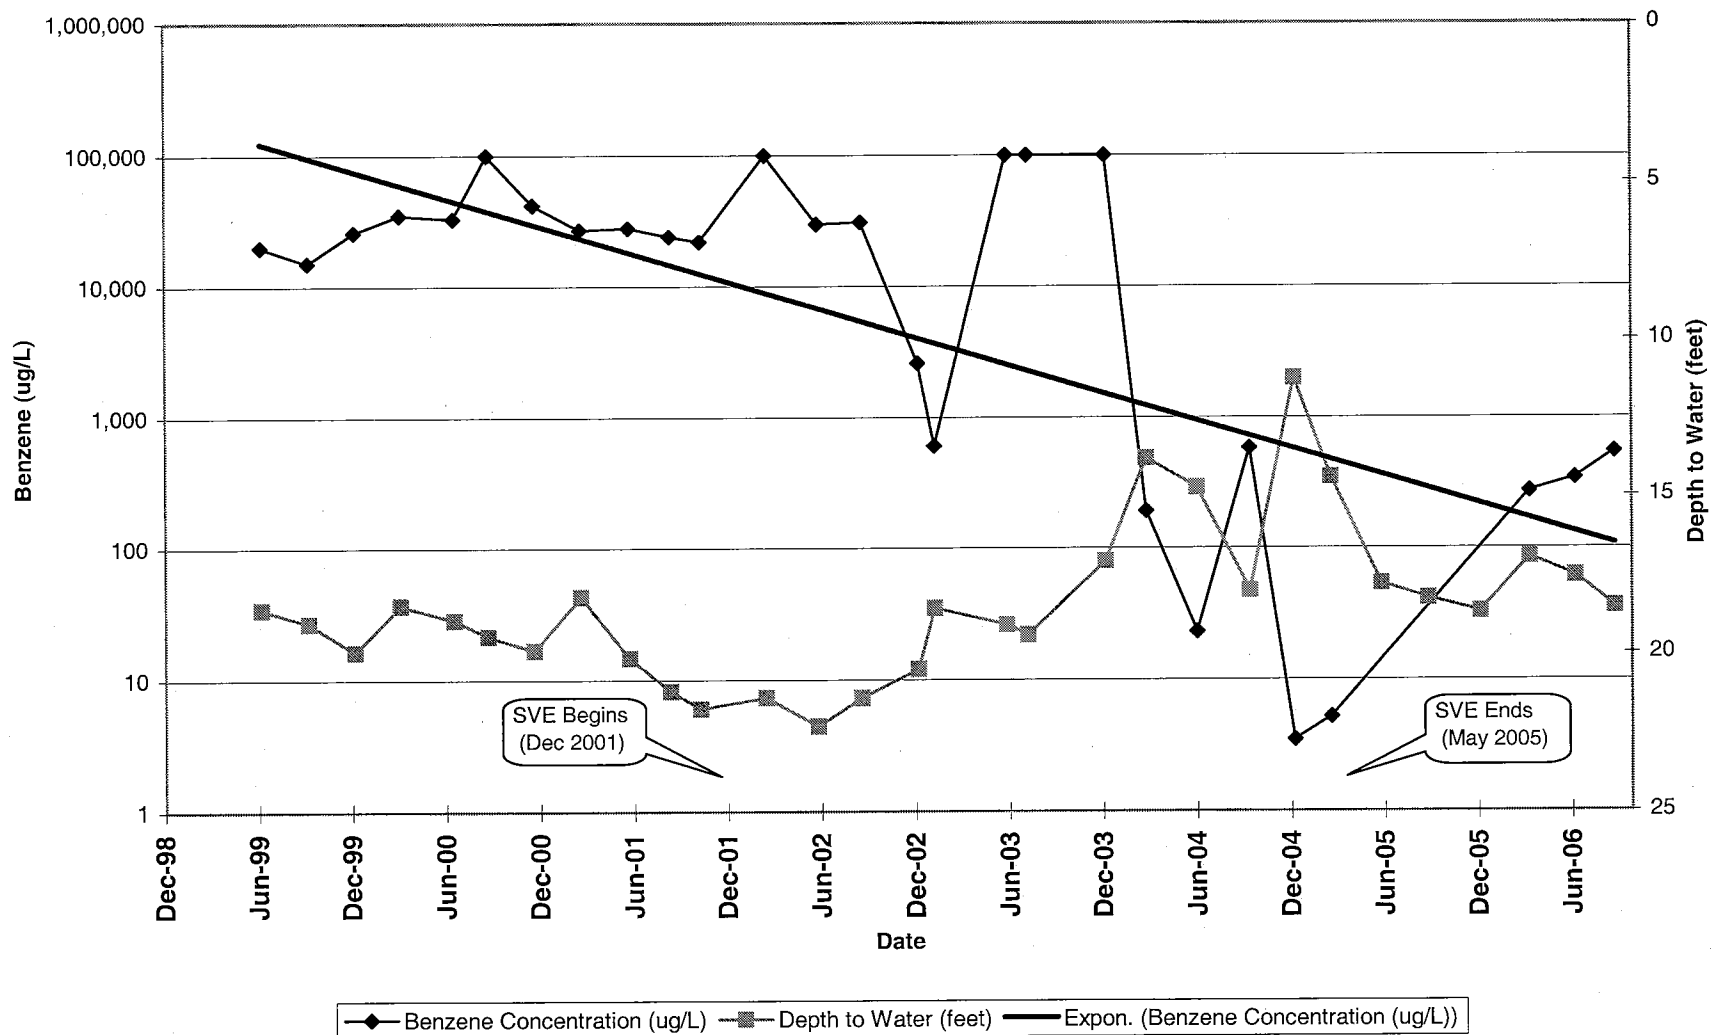

MW-2: Benzene Concentration and Depth to Water vs. Time


Allright Parking, 1432 Harrison Street, Oakland, California

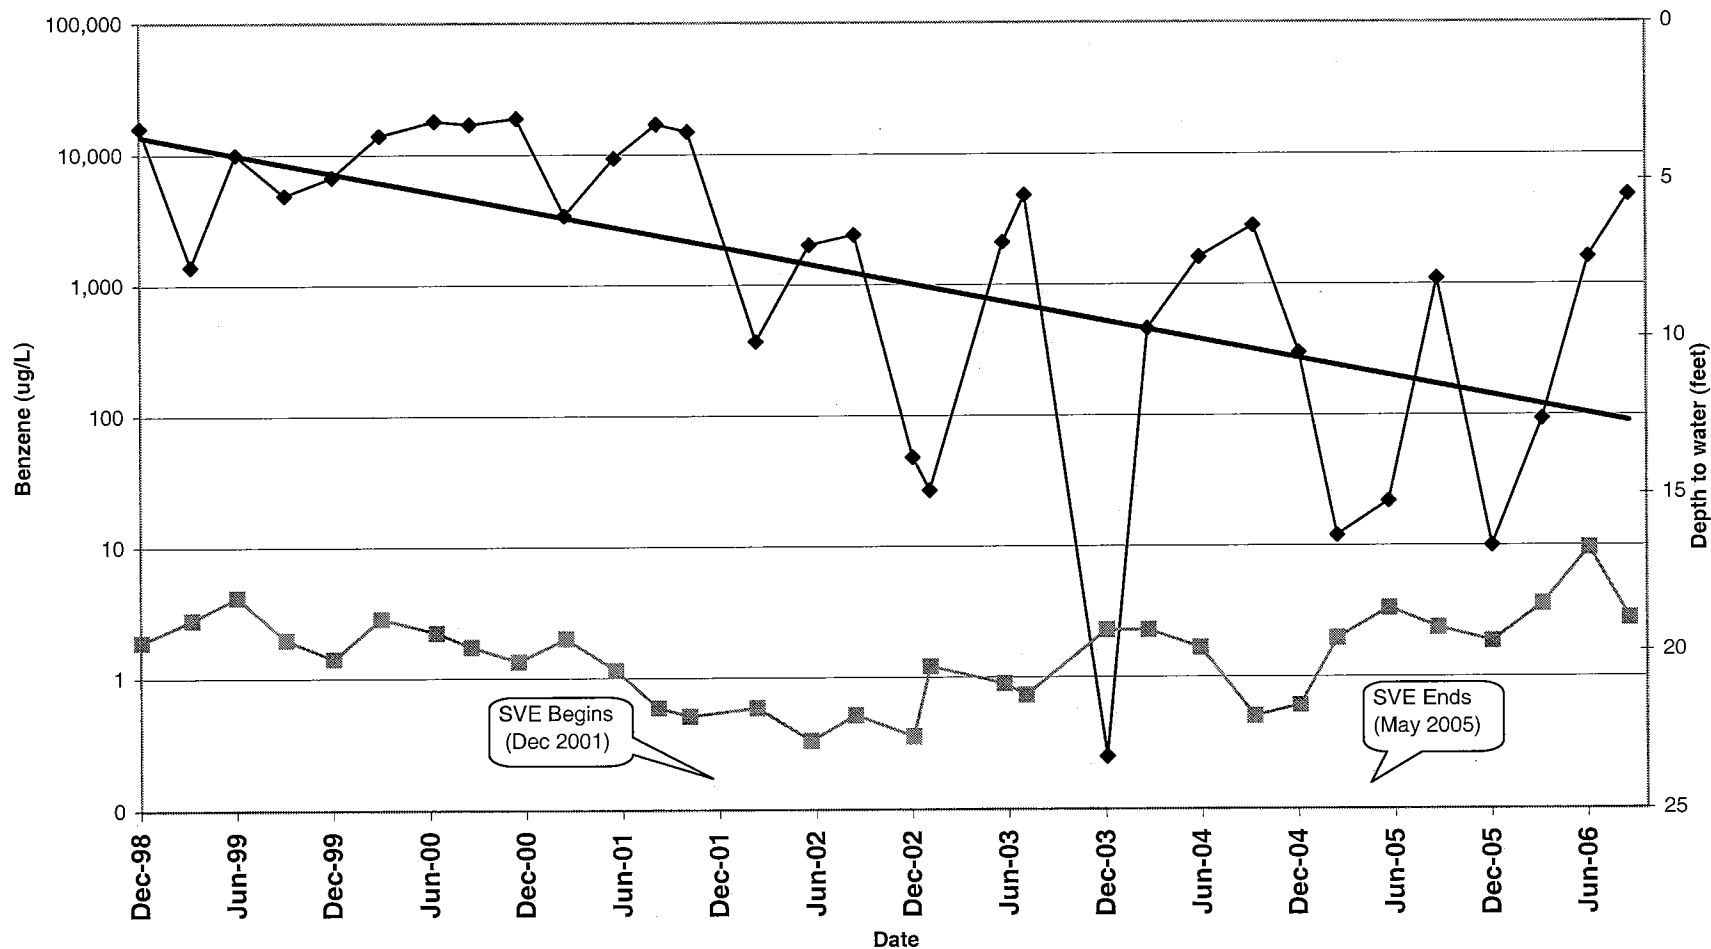

◆ Benzene Concentration (ug/L) ■ Depth to Water (feet) — Expon. (Benzene Concentration (ug/L))


MW-3: Benzene Concentration and Depth to Water vs. Time

Allright Parking, 1432 Harrison Street, Oakland, California

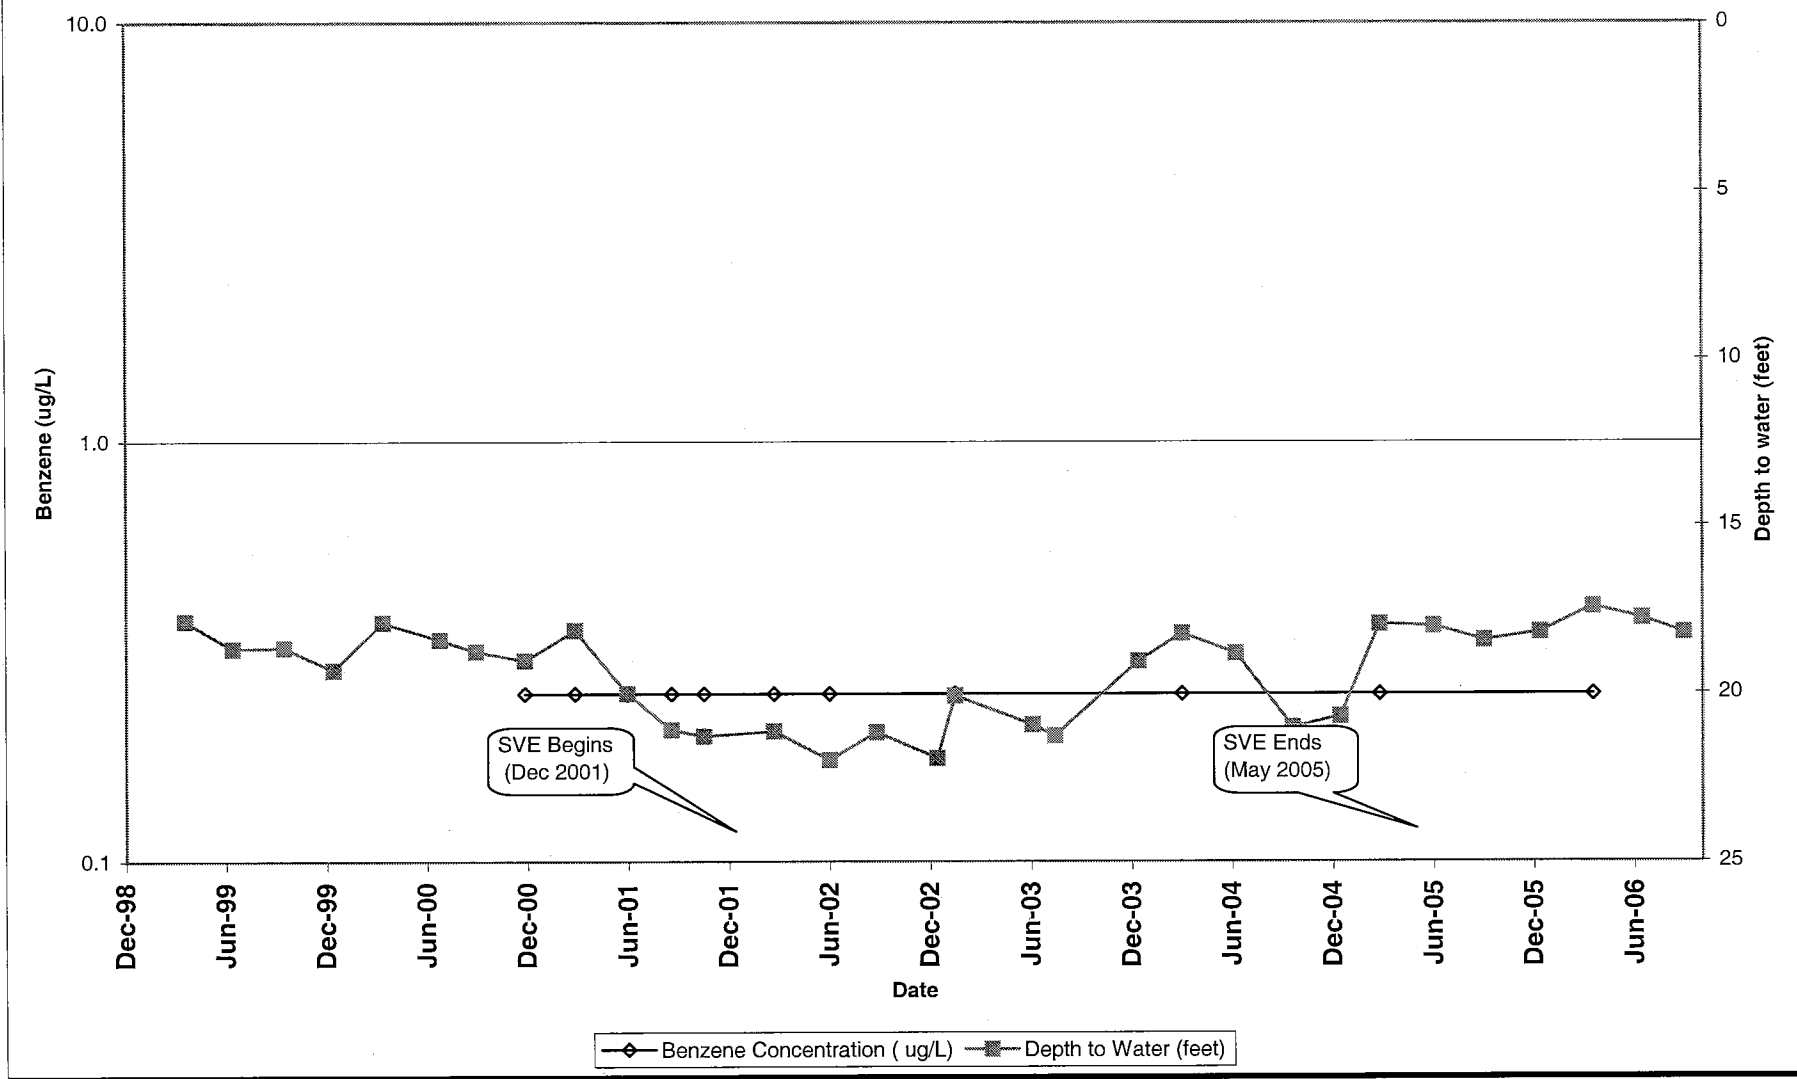


MW-4: Benzene Concentration and Depth to Water vs. Time

Allright Parking, 1432 Harrison Street, Oakland, California

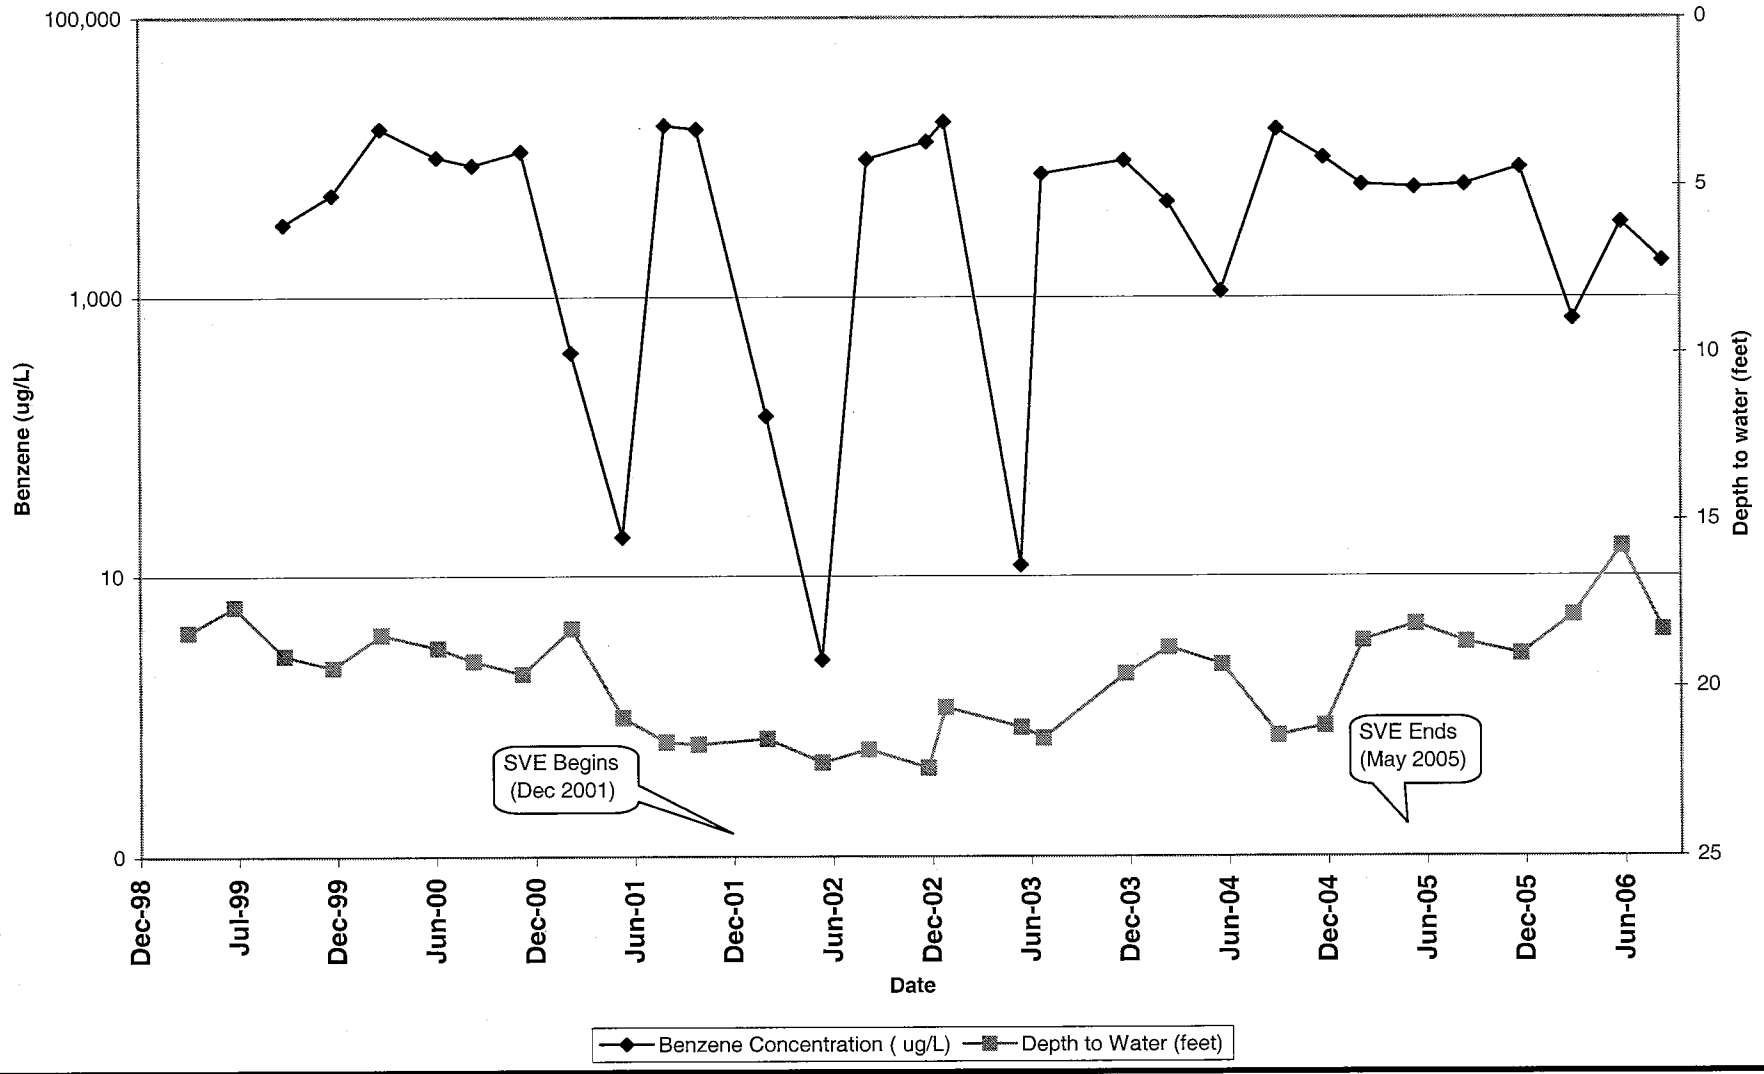

MW-5: Benzene Concentration and Depth to Water vs. Time

Allright Parking, 1432 Harrison Street, Oakland, California

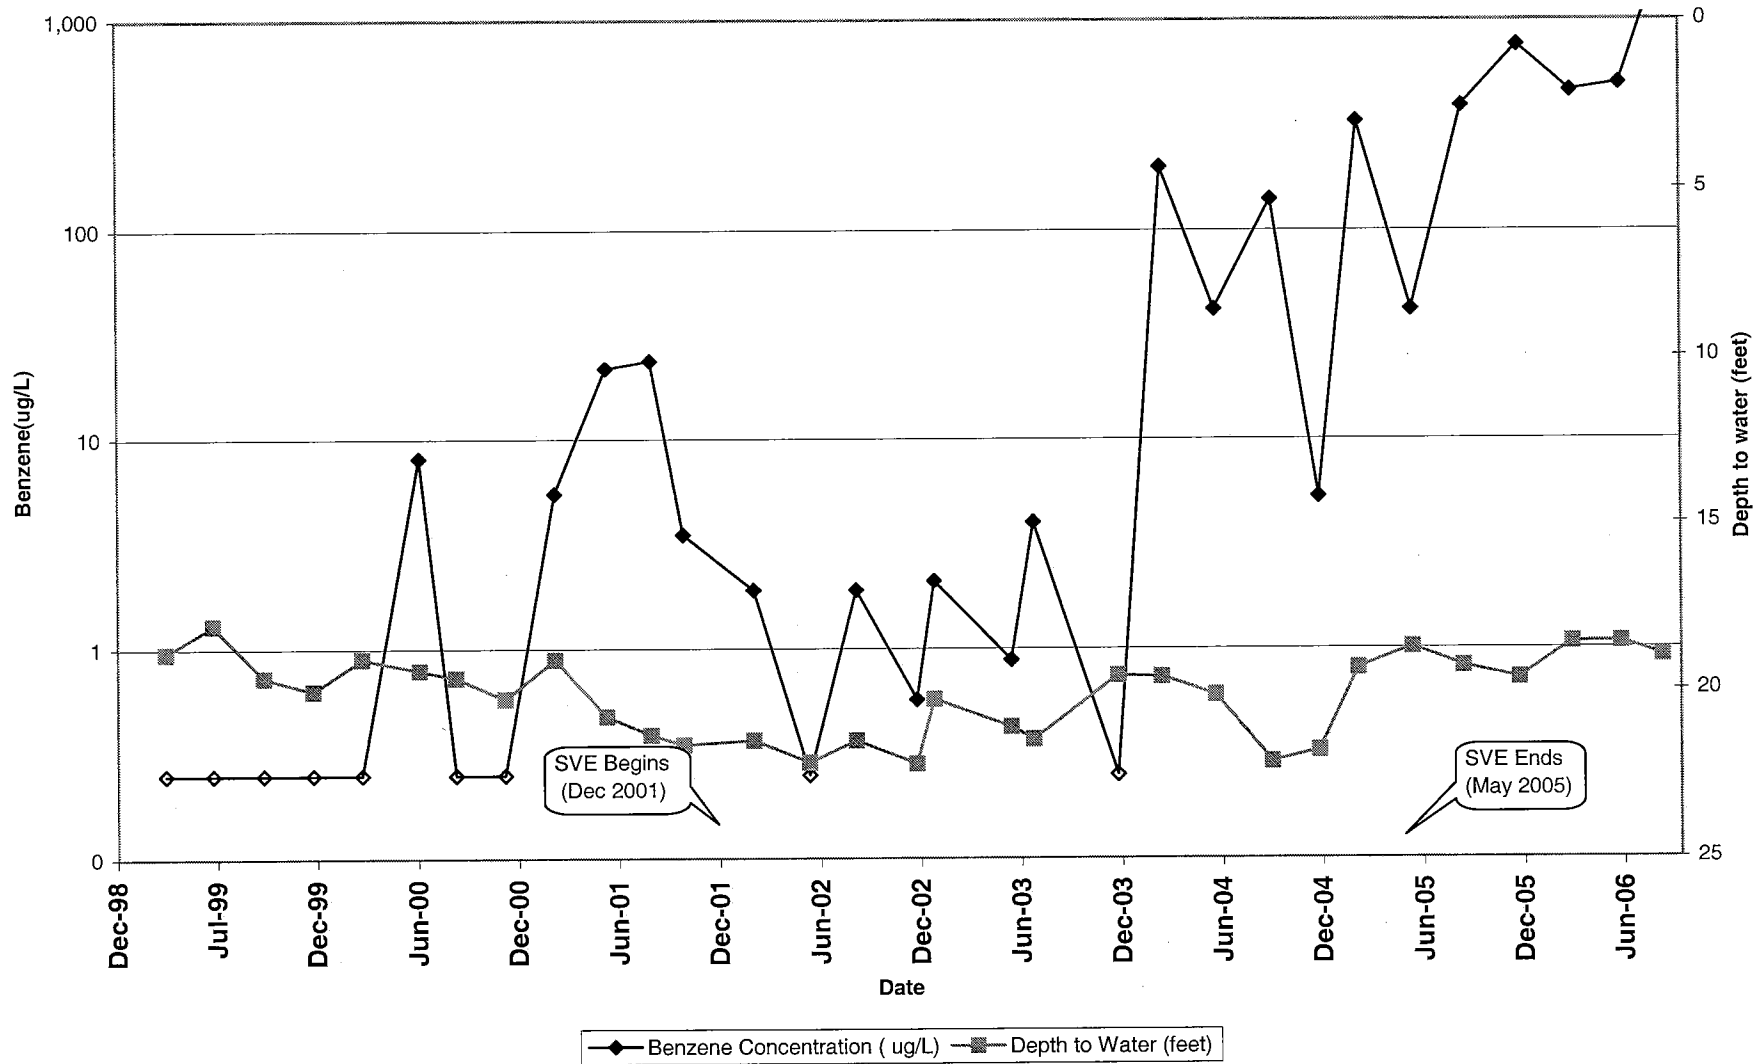

MW-6: Benzene Concentration and Depth to Water vs. Time

Allright Parking, 1432 Harrison Street, Oakland, California

