Atlantic Richfield Company

Shannon Couch Operations Project Manager

PO Box 1257 San Ramon, CA 94583 Phone: (925) 275-3804 Fax: (925) 275-3815 E-Mail: shannon.couch@bp.com

October 26, 2012

e: Third Quarter 2012 Monitoring Report

Former BP Service Station #11104 1716 Webster Street Alameda, California ACEH Case #RO0000281

RECEIVED

2:42 pm, Nov 01, 2012


Alameda County Environmental Health

"I declare, that to the best of my knowledge at the present time, that the information and/or recommendations contained in the attached document are true and correct.

Submitted by,

Shannon Couch Operations Project Manager

Attachment



broadbentinc.com

October 26, 2012

Project No. 06-88-644

Atlantic Richfield Company P.O. Box 1257 San Ramon, California 94583 Submitted via ENFOS

Attn.: Ms. Shannon Couch

Re:

Third Quarter 2012 Monitoring Report, Former BP Service Station #11104,

1716 Webster Street, Alameda, Alameda County, California

ACEH Case #RO0000281

Dear Ms. Couch:

Provided herein is the *Third Quarter 2012 Monitoring Report* for Former BP Service Station #11104 located at 1716 Webster Street, Alameda, California (Site). Should you have questions regarding the work performed or results obtained, please do not hesitate to contact me at (707) 455-7290.

Sincerely,

BROADBENT & ASSOCIATES, INC.

Alexander J. Martinez Senior Staff Geologist

alex Meds

Kristene Tidwell, P.G., C.H.G.

Senior Geologist

enclosures

cc: Ms. Dilan Roe, Alameda County Environmental Health (Submitted via ACEH ftp site)

Ms. Shelby Lathrop, ConocoPhillips, 76 Broadway, Sacramento, California 95818

Electronic copy uploaded to GeoTracker

THIRD QUARTER 2012 MONITORING REPORT FORMER ARCO STATION #11104, ALAMEDA, CALIFORNIA

Broadbent & Associates, Inc. (Broadbent) is pleased to present this *Third Quarter 2012 Monitoring Report* on behalf of Atlantic Richfield Company (a BP affiliated company) for former BP Station # 11104 (presently a Union 76 Station) located at 1716 Webster Street in Alameda, Alameda County, California. Monitoring activities at the site were performed in accordance with an agency directive issued by the Alameda County Environmental Health (ACEH). Details of work performed, discussion of results, and recommendations are provided below.

| Facility Name / Address: | Former BP Station #11104 / 1716 Webster Street, Alameda, CA |
|-------------------------------------|---|
| Client Project Manager / Title: | Ms. Shannon Couch / Operations Project Manager |
| Broadbent Contact: | Ms. Kristene Tidwell, P.G., C.H.G. |
| Broadbent Project No.: | 06-88-644 |
| Primary Regulatory Agency / ID No.: | ACEH / Case #RO0000281 |
| Current phase of project: | Monitoring |
| List of Acronyms / Abbreviations: | See end of report text for list of acronyms/abbreviations used in report. |

WORK PERFORMED THIS QUARTER (Third Quarter 2012):

- 1. Broadbent submitted a Second Quarter 2012 Status Report.
- 2. Broadbent conducted groundwater monitoring/sampling on August 15, 2012 for Third Quarter 2012.

WORK SCHEDULED FOR NEXT QUARTER (Fourth Quarter 2012):

- 1. Submit *Third Quarter 2012 Monitoring Report* (contained herein).
- 2. No environmental work activities are scheduled to be conducted at the Site during the Fourth Quarter 2012.

QUARTERLY MONITORING PLAN SUMMARY:

| Groundwater level gauging: | MW-1 through MW-5 and RW-1 | (Semi-Annually: 1Q & 3Q) |
|------------------------------------|----------------------------|--------------------------|
| Groundwater sample collection: | MW-1 and RW-1 | (Semi-Annually: 1Q & 3Q) |
| | MW-2 through MW-5 | (Annually: 1Q) |
| Biodegradation indicator parameter | | |
| monitoring: | None | |

OUARTERLY RESULTS SUMMARY:

LNAPL

| LNAPL observed this quarter: | Yes (RW-1) | (yes\no) |
|-------------------------------|------------|----------|
| LNAPL recovered this quarter: | None | (gal) |
| Cumulative LNAPL recovered: | None | (gal) |

Groundwater Elevation and Gradient:

| Depth to groundwater: | 5.62 ft (RW-1) to 6.90 ft (MW-3) | (ft below TOC) |
|------------------------------|----------------------------------|-----------------------------|
| Gradient direction: | North-Northeast | (compass direction) |
| Gradient magnitude: | 0.003 ft/ft | (ft/ft) |
| Average change in elevation: | -0.008 | (ft since last measurement) |

Laboratory Analytical Data

Summary: Analytical results are as follows:

- GRO was detected in one well with a concentration of 1,800 µg/L in MW-1
- Benzene was detected in well with a concentration of 19 μg/L in MW 1
- Ethylbenzene was detected in one well with a concentration of 8.2 μg/L in MW-1

- Toluene was detected in one well with a concentration of 1.1 µg/L in MW-1
- Total Xylenes was detected in one well with a concentration of 340 µg/L in MW-1
- MTBE was detected in one well with a concentration of 16 µg/L in MW-1
- TBA was detected in one well with a concentration of 180 µg/L in MW-1
- TAME was detected in one well with a concentration of 1.3 µg/L in MW-1.

ACTIVITIES CONDUCTED & RESULTS:

On August 15, 2012 Broadbent conducted the Third Quarter 2012 groundwater monitoring and sampling event at Station #11104 in accordance with the quarterly monitoring plan summary detailed above. No irregularities were noted during water level gauging except for MW-5 which was not accessible due to being paved over. Water levels were gauged in the five accessible wells associated with Station #11104. Light non-aqueous phase liquid (LNAPL) was observed in well RW-1 (see discussion below). No other irregularities were noted during water level gauging at Station #11104. Depth to water measurements at the Site ranged from 5.62 ft at well RW-1 to 6.90 ft at MW-3. Resulting groundwater surface elevations at the Site ranged from 6.76 ft above datum at well MW-2 to 5.97 ft at well MW-4. Groundwater elevation for well RW-1 was corrected to account for the presence of LNAPL. Water level elevations yielded a potentiometric groundwater gradient direction and magnitude to the north-northeast at 0.003 ft/ft. Field methods used during groundwater monitoring are provided in Appendix A. Field data sheets are included in Appendix B. Measured depths to groundwater and respective groundwater elevations are summarized in Table 1. Current and historic groundwater gradient directions and magnitudes are provided within Table 3. A Site Location Map is provided as Drawing 1. Potentiometric groundwater elevation contours are presented in Drawing 2.

Generally consistent with the current groundwater sampling schedule, water samples were collected from wells MW-1 through MW-4. Due to the presence of LNAPL, water samples were not collected from wells RW-1. No other irregularities were encountered during sampling at the Site. Collected groundwater samples were submitted to Test America Laboratories, Inc. (Test America) of Irvine, California for analysis of GRO, by EPA Method 8015B; for BTEX, MTBE, ETBE, TAME, DIPE, TBA, EDB, 1,2-DCA and Ethanol by EPA Method 8260B. No significant irregularities were reported during analysis of the samples.

As stated above, LNAPL was present in well RW-1 during Third Quarter 2012. Broadbent personnel measured approximately 0.01 feet of LNAPL in well RW-1, which historically has not contained LNAPL.

Current and historic groundwater elevations and groundwater sample analytical data are provided in Tables 1 and 2. Laboratory analytical report and chain of custody record for are provided in Appendix C. Groundwater monitoring data (GEO_WELL) and laboratory analytical results (EDF) were uploaded to the GeoTracker AB2886 database. Upload confirmation receipts are provided in Appendix D.

DISCUSSION:

Groundwater levels and gradient data indicate that the gradient measured during First Quarter 2012 monitoring is consistent with predominant measurements observed historic minimum and maximum

elevations at the site. During Third Quarter 2012, groundwater elevations decreased an average of 0.008 feet across the site relative to measurements collected during First Quarter 2012.

Review of historical groundwater results indicate that well MW-1 contains the highest residual petroleum hydrocarbon concentrations at the site. Despite the well's location to the Underground Storage Tanks (UST) and RW-1, concentrations have decreased since the First Quarter 2012 with no presence of LNAPL. The concentrations in well MW-1 appear to be a non-factor in both the down gradient well MW-4 and up gradient well MW-2 and MW-3.

Detected analytical concentrations were within historic minimum and maximum ranges recorded for each well with the exception of LNAPL in RW-1. Broadbent and ARC are currently evaluating the source of the diesel product in this well. Previously the product from well RW-1 has been sampled and the fingerprint indicated that the product was likely diesel. Diesel was not dispensed historically at the Site, but is dispensed by the current operations. Broadbent and ARC are currently evaluating the possible solutions of this LNAPL.

RECOMMENDATIONS:

No environmental work activities are scheduled to be conducted at the Site during the Fourth Quarter 2012. The next quarterly monitoring event is scheduled for the First Quarter 2013. Unless directed by ACEH, no change to the monitoring program at Station #11104 is presently deemed warranted or recommended.

LIMITATIONS:

The findings presented in this report are based upon observations of field personnel, points investigated, results of laboratory tests performed by Calscience Environmental Laboratories, Inc. and our understanding of ACEH guidelines. Our services were performed in accordance with the generally accepted standard of practice at the time this report was written. No other warranty, expressed or implied was made. This report has been prepared for the exclusive use of ARC. It is possible that variations in soil or groundwater conditions could exist beyond points explored in this investigation. Also, changes in site conditions could occur in the future due to variations in rainfall, temperature, regional water usage, or other factors.

ATTACHMENTS:

Drawing 1: Site Location Map

Drawing 2: Third Quarter 2012 Groundwater Elevation Contour and Analytical Summary Map

Table 1: Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory

Analyses

Table 2: Summary of Fuel Additive Analytical DataTable 3: Historic Groundwater Gradient Information

Appendix A: Field Methods
Appendix B: Field Data Sheets

Appendix C: Laboratory Report and Chain-of-Custody Documentation

Appendix D: GeoTracker Upload Confirmation Receipts

LIST OF COMMONLY USED ACCRONYMS/ABBREVIATIONS:

ACEH Alameda County Environmental Health gal: gallons

ARC: Atlantic Richfield Company GRO: gasoline range organics (C6-12)

Third Quarter 2012 Monitoring Report Former BP Station #11104 October 26, 2012 Page 4


BAI: Broadbent & Associates, Inc. LNAPL: light non-aqueous phase liquid BTEX: benzene, toluene, ethylbenzene, total xylenes MTBE: methyl tertiary butyl ether

1,2-DCA: 1,2-dichloroethane RWQCB: California Regional Water Quality
DIPE: di-isopropyl ether Control Board-San Francisco Bay Region

DO: dissolved oxygen TAME: tert-amyl methyl ether

ESLs: RWQCB Environmental Screening Levels TBA: tert-butyl alcohol

EDB: 1,2-dibromometriane μg/L: micrograms per lite ft/ft: feet per foot

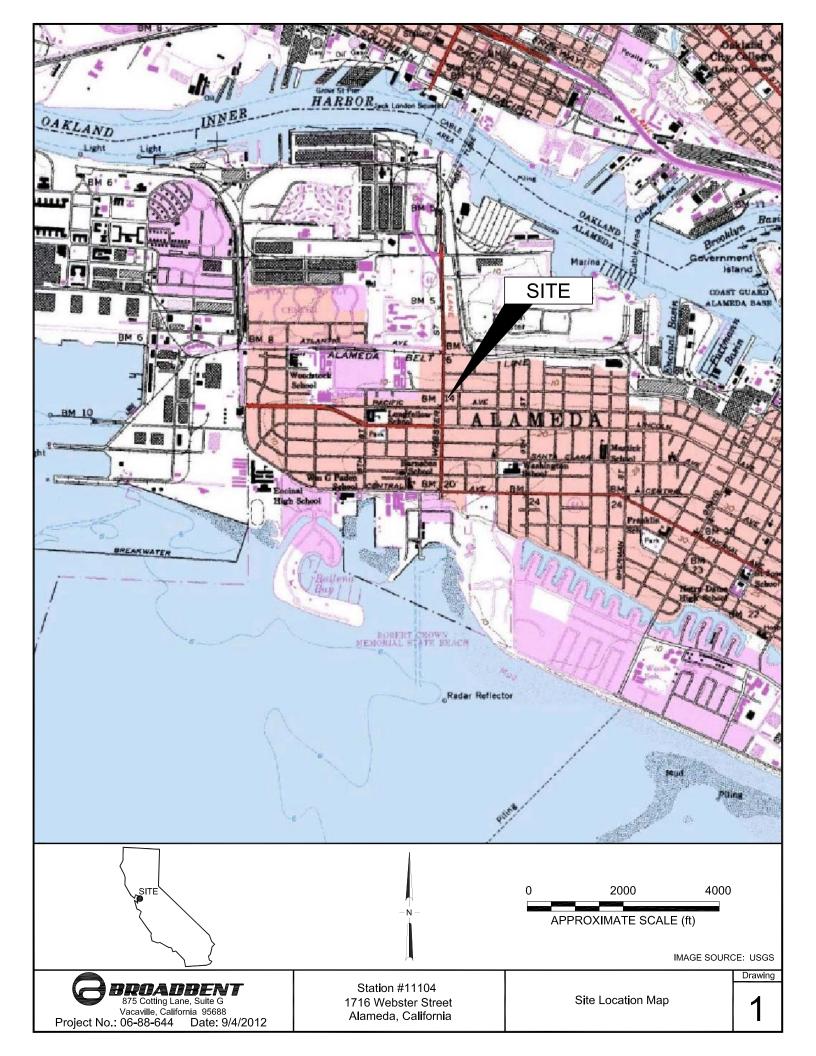

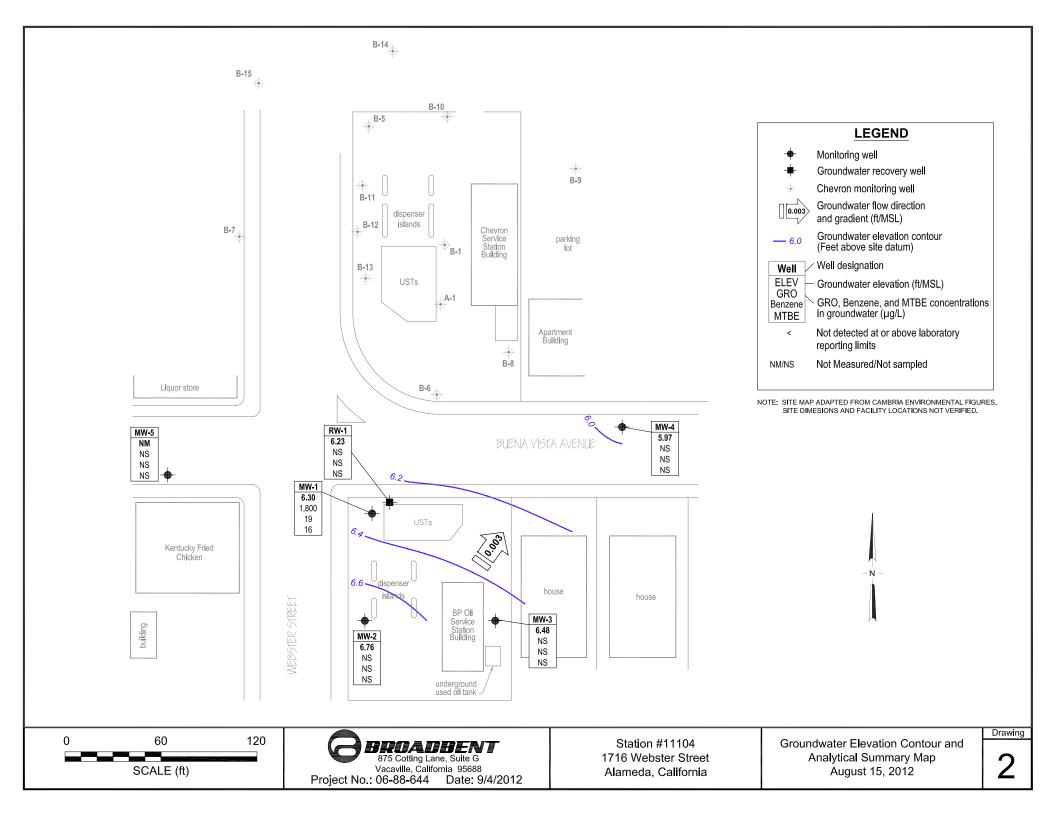


Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | тос | Depth to | LNAPL | Water Level | | | Concentr | ations in µ | g/L | | | | |
|----------------|------|-----------|----------|-----------|-------------|---------|---------|----------|-------------|---------|---------|--------|----|----------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-1 | | | | | | | | | | | | | | |
| 7/21/1992 | | 11.98 | 5.91 | 0.00 | 6.07 | 34,000 | 7,000 | 1,700 | 2,500 | 6,900 | | | | |
| 10/20/1992 | | | 6.66 | 0.00 | 5.32 | | | | | | | | | |
| 3/5/1993 | | | 4.56 | 0.00 | 7.42 | | | | | | | | | |
| 4/1/1993 | | | 4.57 | 0.00 | 7.41 | | | | | | | | | |
| 7/9/1993 | | | 5.25 | 0.00 | 6.73 | 79,000 | 16,000 | 1,500 | 2,200 | 7,700 | 12,952 | | | c, d, k |
| 7/9/1993 | | | 5.25 | 0.00 | 6.73 | 77,000 | 15,000 | 1,400 | 2,100 | 7,400 | 11,919 | | | c, k |
| 10/8/1993 | | | 6.01 | 0.00 | 5.97 | 42,000 | 7,100 | 270 | 2,700 | 4,700 | | | | k |
| 1/6/1994 | | | 6.24 | 0.00 | 5.74 | 45,000 | 12,000 | 4,300 | 3,000 | 6,700 | | | | k |
| 4/26/1994 | | | 5.26 | 0.00 | 6.72 | 39,000 | 6,500 | 500 | 1,800 | 1,200 | 16,663 | 6.3 | | c, k |
| 7/25/1994 | | | 5.60 | 0.00 | 6.38 | 38,000 | 6,300 | 240 | 1,500 | 1,100 | 26,428 | 1.7 | | c, k |
| 10/13/1994 | | | 6.15 | 0.00 | 5.83 | 25,000 | 6,300 | 130 | 1,300 | 830 | | 2.3 | | k |
| 10/13/1994 | | | 6.15 | 0.00 | 5.83 | 25,000 | 7,300 | 120 | 1,200 | 740 | | | | d, k |
| 1/17/1995 | | | 4.19 | 0.00 | 7.79 | 8,400 | 3,100 | 1,200 | 470 | 1,000 | | | | d |
| 1/17/1995 | | | 4.19 | 0.00 | 7.79 | 7,800 | 3,100 | 1,100 | 460 | 850 | | 7.9 | | |
| 3/31/1995 | | | 4.48 | 0.00 | 7.50 | 40,000 | 6,900 | 7,300 | 1,300 | 5,000 | | | | d |
| 3/31/1995 | | | 4.48 | 0.00 | 7.50 | 37,000 | 6,700 | 6,900 | 1,200 | 4,500 | | 6.4 | | |
| 5/1/1995 | | | 4.39 | 0.00 | 7.59 | | | | | | | | | |
| 7/12/1995 | | | 5.02 | 0.00 | 6.96 | 29,000 | 7,000 | 300 | 1,500 | 3,900 | | 7.2 | | |
| 7/12/1995 | | | 5.02 | 0.00 | 6.96 | 29,000 | 6,600 | 380 | 1,500 | 3,900 | | | | d |
| 10/12/1995 | | | 5.68 | 0.00 | 6.30 | 20,000 | 3,400 | 310 | 1,100 | 3,000 | 15,000 | 6.3 | | |
| 10/12/1995 | | | 5.68 | 0.00 | 6.30 | 20,000 | 3,500 | 310 | 1,100 | 3,000 | 14,000 | | | d |
| 2/27/1996 | | | 4.18 | 0.00 | 7.80 | 18,000 | 4,400 | 2,900 | 860 | 2,380 | 5,500 | 7.9 | | |
| 5/8/1996 | | | 4.89 | 0.00 | 7.09 | | | | | | | | | |
| 5/9/1996 | | | | | | 14,000 | 2,300 | 1,900 | 540 | 3,340 | 2,700 | 6.1 | | |
| 8/9/1996 | | | 5.13 | 0.00 | 6.85 | | | | | | | | | |
| 8/12/1996 | | | | | | 13,000 | 2,800 | 190 | 1,300 | 3,040 | 1,800 | 7.1 | | |
| 11/7/1996 | | | 5.65 | 0.00 | 6.33 | 12,000 | 2,100 | 35 | <25 | <25 | 2,100 | 7.2 | | |
| 2/10/1997 | | | 4.80 | 0.00 | 7.18 | 180,000 | 1,900 | < 500 | < 500 | < 500 | 160,000 | 6.8 | | |
| 2/10/1997 | | | 4.80 | 0.00 | 7.18 | 180,000 | 2,100 | < 500 | < 500 | <500 | 160,000 | | | d |
| 8/4/1997 | | | 5.69 | 0.00 | 6.29 | <25000 | 2,600 | < 50 | 1,200 | 1,100 | 260,000 | | | d |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | TOC | Depth to | LNAPL | Water Level | | | Concentr | ations in µ | g/L | | | | |
|----------------|------|-----------|----------|-----------|-------------|----------|---------|----------|-------------|---------|----------------|--------|------|----------------------------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-1 Cont. | | | | | | | | | | | | | | |
| 8/4/1997 | | 11.98 | 5.69 | 0.00 | 6.29 | 14,000 | 2,700 | <50 | 1,200 | 1,220 | 250,000 | 7.2 | | |
| 1/27/1998 | | | 3.96 | 0.00 | 8.02 | 390,000 | 4,400 | 4,300 | 1,600 | 2,890 | 490,000 | 6.4 | | |
| 9/2/1998 | | | 5.03 | 0.00 | 6.95 | 230,000 | 3,900 | <50 | 1,900 | 1,000 | 230,000 | 6.3 | | |
| 2/24/1999 | | | 4.94 | 0.00 | 7.04 | 82,000 | 3,000 | 520 | 2,600 | 3,200 | 90,000/200,000 | | | h |
| 8/30/1999 | | | 6.31 | 0.00 | 5.67 | 11,000 | 2,100 | <25 | 1,800 | 580 | 48,000 | | | |
| 2/21/2000 | | | 4.47 | 0.00 | 7.51 | 12,000 i | 1,200 | 250 | 930 | 1,800 | 31,000 | | | i |
| 8/8/2000 | | | 5.59 | 0.00 | 6.39 | 4,500 | 160 | 2.8 | 76 | 88 | 60,000 | | | |
| 2/12/2001 | | | 6.04 | 0.00 | 5.94 | 14,000 | 363 | <12.5 | 108 | 293 | 18,000 | | | |
| 8/13/2001 | | | 6.44 | 0.00 | 5.54 | 14,000 | 161 | 17.1 | 255 | 545 | 5,590 | | | |
| 2/4/2002 | | | 4.49 | 0.00 | 7.49 | 17,000 | 176 | 57.9 | 538 | 1,670 | 2,470 | | | |
| 8/29/2002 | | | 5.22 | 0.00 | 6.76 | 4,8001 | 180 | 43 | 130 | 540 | 3,100 | | | 1 |
| 2/5/2003 | | | 5.43 | 0.00 | 6.55 | 770 | 29 | 9.8 | 4.2 | 47 | 590 m,n | | | m,n |
| 8/14/2003 | | | 6.34 | 0.00 | 5.64 | 5,400 | 210 | <50 | 90 | 200 | 4,500 | | | p |
| 02/12/2004 | P | | 4.55 | 0.00 | 7.43 | 2,600 | 140 | 20 | 87 | 170 | 1,200 | | 6.8 | |
| 08/12/2004 | P | | 5.22 | 0.00 | 6.76 | 5,700 | 500 | 12 | 41 | 1,400 | 260 | | 6.3 | |
| 02/10/2005 | P | | 4.48 | 0.00 | 7.50 | 2,400 | 120 | 10 | 72 | 110 | 730 | | 6.1 | |
| 08/11/2005 | P | | 4.60 | 0.00 | 7.38 | 4,600 | 500 | 13 | 44 | 870 | 190 | | 6.8 | |
| 02/09/2006 | P | | 4.47 | 0.00 | 7.51 | 2,600 | 180 | 12 | 96 | 230 | 380 | | 7.0 | |
| 8/10/2006 | | | 4.77 | 0.00 | 7.21 | 7,000 | 720 | 17 | 62 | 870 | 47 | | 6.7 | |
| 2/8/2007 | P | | 5.13 | 0.00 | 6.85 | 2,200 | 100 | 6.3 | 53 | 120 | 130 | 5.52 | 6.82 | |
| 8/8/2007 | P | | 5.47 | 0.00 | 6.51 | 1,500 | 78 | 4.9 | 43 | 120 | 140 | 4.32 | 7.04 | t (BZ, EBZ, XYLENES, MTBE) |
| 2/22/2008 | P | | 4.40 | 0.00 | 7.58 | 4,400 | 130 | 71 | 390 | 1,200 | 59 | 5.01 | 7.06 | |
| 8/13/2008 | P | | 5.55 | 0.00 | 6.43 | 7,500 | 220 | 16 | 130 | 1,600 | 370 | 0.48 | 8.13 | |
| 2/11/2009 | P | | 5.51 | 0.00 | 6.47 | 1,900 | 26 | <2.0 | 15 | 35 | 68 | 0.57 | 6.62 | |
| 8/27/2009 | P | | 5.45 | 0.00 | 6.53 | 3,300 | 37 | 2.4 | 9.5 | 650 | 20 | 0.61 | 7.51 | |
| 2/18/2010 | P | | 4.71 | 0.00 | 7.27 | 2,700 | 32 | 7.6 | 42 | 95 | 48 | 0.81 | 6.80 | |
| 8/12/2010 | NP | | 5.48 | 0.00 | 6.50 | 3,200 | 50 | 2.4 | 52 | 220 | 76 | 1.72 | 6.9 | |
| 2/17/2011 | P | | 4.82 | 0.00 | 7.16 | 2,400 | 44 | <2.0 | 160 | 230 | 40 | 0.75 | 7.2 | |
| 7/5/2011 | | | 4.86 | 0.00 | 7.12 | 6,900 | 110 | 5.5 | 190 | 1,900 | 22 | 0.41 | 7.2 | |
| 2/28/2012 | P | | 5.63 | 0.00 | 6.35 | 9,600 | 310 | 13 | 560 | 1,700 | 610 | 0.53 | 6.57 | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | TOC | Depth to | LNAPL | Water Level | | | Concentr | ations in µ | g/L | | | | |
|----------------|------|-----------|----------|-----------|-------------|-------|---------|----------|-------------|---------|-------|--------|------|----------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | ТРНд | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-1 Cont. | | | | | | | | | | | | | | |
| 8/15/2012 | P | 11.98 | 5.68 | 0.00 | 6.30 | 1,800 | 19 | 1.1 | 8.2 | 340 | 16 | 1.62 | 7.37 | |
| MW-2 | | | | | | | | | | | | | | |
| 7/21/1992 | | 12.98 | 6.44 | 0.00 | 6.54 | <50 | < 0.5 | <0.5 | < 0.5 | < 0.5 | | | | |
| 10/20/1992 | | | 7.39 | 0.00 | 5.59 | | | | | | | | | |
| 3/5/1993 | | | 4.91 | 0.00 | 8.07 | | | | | | | | | |
| 4/1/1993 | | | 4.92 | 0.00 | 8.06 | | | | | | | | | |
| 7/9/1993 | | | 5.60 | 0.00 | 7.38 | <50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | k |
| 10/8/1993 | | | 6.50 | 0.00 | 6.48 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | d, k |
| 10/8/1993 | | | 6.50 | 0.00 | 6.48 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | k |
| 1/6/1994 | | | 6.25 | 0.00 | 6.73 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | k |
| 4/26/1994 | | | 5.73 | 0.00 | 7.25 | <50 | < 0.5 | < 0.5 | <0.5 | <0.5 | < 5.0 | 7.5 | | k |
| 7/25/1994 | | | 6.07 | 0.00 | 6.91 | <50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | 11.59 | 2.4 | | k |
| 10/13/1994 | | | 6.80 | 0.00 | 6.18 | <50 | < 0.5 | < 0.5 | <0.5 | <0.5 | | 2.4 | | k |
| 1/17/1995 | | | 5.10 | 0.00 | 7.88 | | | | | | | | | |
| 3/31/1995 | | | 4.69 | 0.00 | 8.29 | <50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | | 7.3 | | |
| 5/1/1995 | | | 5.23 | 0.00 | 7.75 | | | | | | | | | |
| 7/12/1995 | | | 5.40 | 0.00 | 7.58 | | | | | | | | | |
| 10/12/1995 | | | 6.06 | 0.00 | 6.92 | <50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | < 5.0 | 6.9 | | |
| 2/27/1996 | | | 4.66 | 0.00 | 8.32 | <50 | <0.5 | <1 | <1 | <1 | <10 | 8.7 | | |
| 5/8/1996 | | | 5.28 | 0.00 | 7.70 | | | | | | | | | |
| 8/9/1996 | | | 5.59 | 0.00 | 7.39 | <50 | <0.5 | <1.0 | <1.0 | <1.0 | <10 | 7.8 | | |
| 11/7/1996 | | | 6.11 | 0.00 | 6.87 | | | | | | | | | |
| 2/10/1997 | | | 5.26 | 0.00 | 7.72 | | | | | | | | | |
| 8/4/1997 | | | 6.14 | 0.00 | 6.84 | <50 | <0.5 | <1.0 | <1.0 | <1.0 | <10 | 6.5 | | |
| 1/27/1998 | | | 4.42 | 0.00 | 8.56 | | | | | | | | | |
| 9/2/1998 | | | 5.47 | 0.00 | 7.51 | 100 | 0.56 | 3.6 | <1.0 | 3 | 110 | 6.9 | | |
| 2/24/1999 | | | 5.12 | 0.00 | 7.86 | <50 | <1.0 | <1.0 | <1.0 | <1.0 | 8.2 | | | |
| 8/30/1999 | | | 6.60 | 0.00 | 6.38 | | | | | | | | | |
| 2/21/2000 | | | 4.64 | 0.00 | 8.34 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | 0.72 | | | |
| 2/12/2001 | | | 5.13 | 0.00 | 7.85 | <50 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | | | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | тос | Depth to | LNAPL | Water Level | | | Concentr | ations in µ | g/L | | | | |
|----------------|------|-----------|----------|-----------|-------------|------|---------|----------|-------------|---------|--------|--------|------|----------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-2 Cont. | | | | | | | | | | | | | | |
| 2/4/2002 | | 12.98 | 5.63 | 0.00 | 7.35 | < 50 | < 0.5 | < 0.5 | < 0.5 | <1.0 | < 0.5 | | | |
| 8/29/2002 | | | 5.79 | 0.00 | 7.19 | | | | | | | | | |
| 2/5/2003 | | | 5.61 | 0.00 | 7.37 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | <2.5 | | | n |
| 8/14/2003 | | | | | | | | | | | | | | o |
| 02/12/2004 | P | | 5.19 | 0.00 | 7.79 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 6.4 | p |
| 08/12/2004 | | | 6.17 | 0.00 | 6.81 | | | | | | | | | |
| 02/10/2005 | P | | 5.01 | 0.00 | 7.97 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 5.9 | |
| 08/11/2005 | | | 6.39 | 0.00 | 6.59 | | | | | | | | | |
| 02/09/2006 | P | | 4.80 | 0.00 | 8.18 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 6.8 | |
| 8/10/2006 | | | 6.18 | 0.00 | 6.80 | | | | | | | | | |
| 2/8/2007 | P | | 5.67 | 0.00 | 7.31 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 5.94 | 7.04 | |
| 8/8/2007 | | | 6.00 | 0.00 | 6.98 | | | | | | | | | |
| 2/22/2008 | P | | 5.15 | 0.00 | 7.83 | 52 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 5.81 | 7.12 | |
| 8/13/2008 | | | 6.20 | 0.00 | 6.78 | | | | | | | | | |
| 2/11/2009 | P | | 6.02 | 0.00 | 6.96 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.90 | 6.73 | |
| 8/27/2009 | | | 6.12 | 0.00 | 6.86 | | | | | | | | | |
| 2/18/2010 | P | | 5.45 | 0.00 | 7.53 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 1.31 | 6.56 | |
| 8/12/2010 | | | 5.92 | 0.00 | 7.06 | | | | | | | | | |
| 2/17/2011 | NP | | 5.56 | 0.00 | 7.42 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 2.83 | 7.6 | |
| 7/5/2011 | | | 5.54 | 0.00 | 7.44 | | | | | | | | | |
| 2/28/2012 | P | | 6.25 | 0.00 | 6.73 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 2.20 | 6.24 | |
| 8/15/2012 | | | 6.22 | 0.00 | 6.76 | | | | | | | | | |
| MW-3 | | | | | | | | | | | | | | |
| 7/21/1992 | | 13.38 | 7.07 | 0.00 | 6.31 | < 50 | 0.95 | < 0.5 | < 0.5 | < 0.5 | | | | e |
| 10/20/1992 | | | 8.06 | 0.00 | 5.32 | | | | | | | | | |
| 3/5/1993 | | | 5.16 | 0.00 | 8.22 | | | | | | | | | |
| 4/1/1993 | | | 5.25 | 0.00 | 8.13 | | | | | | | | | |
| 7/9/1993 | | | 5.80 | 0.00 | 7.58 | <50 | 0.6 | < 0.5 | < 0.5 | < 0.5 | | | | k |
| 10/8/1993 | | | 7.17 | 0.00 | 6.21 | < 50 | 0.6 | < 0.5 | < 0.5 | < 0.5 | | | | k |
| 1/6/1994 | | | 6.94 | 0.00 | 6.44 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | k |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | тос | Depth to | LNAPL | Water Level | | | Concentr | ations in μ | g/L | | | | |
|----------------|------|-----------|----------|-----------|-------------|------|---------|----------|-------------|---------|--------|--------|-----|----------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-3 Cont. | | | | | | | | | | | | | | |
| 4/26/1994 | | 13.38 | 6.18 | 0.00 | 7.20 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | <5.0 | 3.1 | | k |
| 7/25/1994 | | | 6.67 | 0.00 | 6.71 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 5.0 | 2.2 | | k |
| 10/13/1994 | | | 7.43 | 0.00 | 5.95 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | 2.1 | | k |
| 1/17/1995 | | | 5.07 | 0.00 | 8.31 | | | | | | | | | |
| 3/31/1995 | | | 4.03 | 0.00 | 9.35 | < 50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | | 6.6 | | |
| 5/1/1995 | | | 4.94 | 0.00 | 8.44 | | | | | | | | | |
| 7/12/1995 | | | 5.80 | 0.00 | 7.58 | | | | | | | | | |
| 10/12/1995 | | | 6.64 | 0.00 | 6.74 | < 50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | < 5.0 | 6.4 | | |
| 2/27/1996 | | | 4.75 | 0.00 | 8.63 | < 50 | < 0.5 | <1 | <1 | <1 | <10 | 8.5 | | |
| 5/8/1996 | | | 5.86 | 0.00 | 7.52 | | | | | | | | | |
| 8/9/1996 | | | 5.70 | 0.00 | 7.68 | < 50 | < 0.5 | <1.0 | <1.0 | <1.0 | <10 | 7.9 | | |
| 11/7/1996 | | | 6.21 | 0.00 | 7.17 | | | | | | | | | |
| 2/10/1997 | | | 5.14 | 0.00 | 8.24 | | | | | | | | | |
| 8/4/1997 | | | 6.01 | 0.00 | 7.37 | < 50 | < 0.5 | <1.0 | <1.0 | <1.0 | <10 | 6.6 | | |
| 1/27/1998 | | | 4.30 | 0.00 | 9.08 | | | | | | | | | |
| 9/2/1998 | | | 5.80 | 0.00 | 7.58 | < 50 | < 0.5 | 2.2 | <1.0 | <1.0 | <10 | 6.6 | | |
| 2/24/1999 | | | 4.34 | 0.00 | 9.04 | < 50 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | | | |
| 8/30/1999 | | | 6.59 | 0.00 | 6.79 | | | | | | | | | |
| 2/21/2000 | | | 4.56 | 0.00 | 8.82 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | |
| 2/12/2001 | | | 4.98 | 0.00 | 8.40 | | | | | | | | | j |
| 2/4/2002 | | | 6.11 | 0.00 | 7.27 | | | | | | | | | j |
| 8/29/2002 | | | 6.22 | 0.00 | 7.16 | | | | | | | | | j |
| 2/5/2003 | | | | | | | | | | | | | | f |
| 8/14/2003 | | | | | | | | | | | | | | 0 |
| 02/12/2004 | P | | 4.94 | 0.00 | 8.44 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 6.0 | p |
| 08/12/2004 | | | 6.22 | 0.00 | 7.16 | | | | | | | | | |
| 02/10/2005 | P | | 5.45 | 0.00 | 7.93 | <50 | < 0.50 | <0.50 | < 0.50 | < 0.50 | < 0.50 | | 5.1 | |
| 08/11/2005 | | | 5.77 | 0.00 | 7.61 | | | | | | | | | r |
| 02/09/2006 | P | | 5.17 | 0.00 | 8.21 | <50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 6.7 | |
| 8/10/2006 | | | 5.86 | 0.00 | 7.52 | | | | | | | | | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | тос | Depth to | LNAPL | Water Level | | | Concentr | ations in µ | g/L | | | | |
|----------------|------|-----------|----------|-----------|-------------|------|---------|----------|-------------|---------|--------|--------|------|----------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-3 Cont. | | | | | | | | | | | | | | |
| 2/8/2007 | P | 13.38 | 6.00 | 0.00 | 7.38 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 5.34 | 7.04 | |
| 8/8/2007 | | | 6.68 | 0.00 | 6.70 | | | | | | | | | |
| 2/22/2008 | P | | 5.38 | 0.00 | 8.00 | 54 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 3.81 | 6.87 | |
| 8/13/2008 | | | 6.37 | 0.00 | 7.01 | | | | | | | | | |
| 2/11/2009 | P | | 6.70 | 0.00 | 6.68 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.79 | 7.18 | |
| 8/27/2009 | | | 6.78 | 0.00 | 6.60 | | | | | | | | | |
| 2/18/2010 | P | | 5.80 | 0.00 | 7.58 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 1.39 | 6.12 | |
| 8/12/2010 | | | 6.60 | 0.00 | 6.78 | | | | | | | | | |
| 2/17/2011 | NP | | 5.66 | 0.00 | 7.72 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.92 | 6.5 | |
| 7/5/2011 | | | 6.20 | 0.00 | 7.18 | | | | | | | | | |
| 2/28/2012 | P | | 6.78 | 0.00 | 6.60 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 2.56 | 6.20 | |
| 8/15/2012 | | | 6.90 | 0.00 | 6.48 | | | | | | | | | |
| MW-4 | | | | | | | | | | | | | | |
| 3/5/1993 | | 11.80 | 4.81 | 0.00 | 6.99 | < 50 | < 0.5 | < 0.5 | < 0.5 | <0.5 | | | | |
| 4/1/1993 | | | 4.80 | 0.00 | 7.00 | | | | | | | | | |
| 7/9/1993 | | | 5.54 | 0.00 | 6.26 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | k |
| 10/8/1993 | | | 6.28 | 0.00 | 5.52 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | k |
| 1/6/1994 | | | 5.82 | 0.00 | 5.98 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 5.0 | | | k |
| 4/26/1994 | | | 5.50 | 0.00 | 6.30 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 5.0 | 7.4 | | k |
| 7/25/1994 | | | 5.83 | 0.00 | 5.97 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 5.0 | 7.2 | | k |
| 10/13/1994 | | | 6.26 | 0.00 | 5.54 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | 6.7 | | k |
| 1/17/1995 | | | 4.19 | 0.00 | 7.61 | | | | | | | | | |
| 3/31/1995 | | | 3.96 | 0.00 | 7.84 | < 50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | | 7.1 | | |
| 5/1/1995 | | | 4.49 | 0.00 | 7.31 | | | | | | | | | |
| 7/12/1995 | | | 5.16 | 0.00 | 6.64 | | | | | | | | | |
| 10/12/1995 | | | 5.80 | 0.00 | 6.00 | < 50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | < 5.0 | 6.9 | | |
| 2/27/1996 | | | 4.22 | 0.00 | 7.58 | < 50 | < 0.5 | <1 | <1 | <1 | <10 | 8.9 | | |
| 5/8/1996 | | | 5.00 | 0.00 | 6.80 | | | | | | | | | |
| 8/9/1996 | | | 5.13 | 0.00 | 6.67 | < 50 | < 0.5 | <1.0 | <1.0 | <1.0 | <10 | 8.5 | | |
| 11/7/1996 | | | 5.65 | 0.00 | 6.15 | | | | | | | | | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | тос | Depth to | LNAPL | Water Level | | | Concentr | ations in µ | g/L | | | | |
|----------------|------|-----------|----------|-----------|-------------|------|---------|----------|-------------|---------|--------|--------|------|----------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-4 Cont. | | | | | | | | | | | | | | |
| 2/10/1997 | | 11.80 | 4.81 | 0.00 | 6.99 | | | | | | | | | |
| 8/4/1997 | | | 5.72 | 0.00 | 6.08 | < 50 | < 0.5 | <1.0 | <1.0 | <1.0 | <10 | 6.4 | | |
| 1/27/1998 | | | 4.06 | 0.00 | 7.74 | | | | | | | | | |
| 9/2/1998 | | | 4.89 | 0.00 | 6.91 | < 50 | < 0.5 | <1.0 | <1.0 | <1.0 | <10 | 5.8 | | |
| 2/24/1999 | | | 3.89 | 0.00 | 7.91 | < 50 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | | | |
| 8/30/1999 | | | 5.62 | 0.00 | 6.18 | | | | | | | | | |
| 2/21/2000 | | | 4.00 | 0.00 | 7.80 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | 0.66 | | | |
| 2/12/2001 | | | 4.93 | 0.00 | 6.87 | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | 0.982 | | | |
| 2/4/2002 | | | 4.49 | 0.00 | 7.31 | < 50 | < 0.5 | < 0.5 | < 0.5 | <1.0 | < 0.5 | | | |
| 8/29/2002 | | | 5.38 | 0.00 | 6.42 | | | | | | | | | |
| 2/5/2003 | | | 4.50 | 0.00 | 7.30 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | <2.5 | | | n |
| 8/14/2003 | | | | | | | | | | | | | | O |
| 02/12/2004 | P | | 4.41 | 0.00 | 7.39 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 6.3 | p |
| 08/12/2004 | | | 5.20 | 0.00 | 6.60 | | | | | | | | | |
| 02/10/2005 | P | | 4.43 | 0.00 | 7.37 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 5.5 | |
| 08/11/2005 | | | 5.09 | 0.00 | 6.71 | | | | | | | | | |
| 02/09/2006 | P | | 4.32 | 0.00 | 7.48 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | | 6.8 | |
| 7/26/2006 | | | | | | | | | | | | | | |
| 8/10/2006 | | | 5.07 | 0.00 | 6.73 | | | | | | | | | |
| 2/8/2007 | P | | 5.10 | 0.00 | 6.70 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 5.63 | 7.07 | |
| 8/8/2007 | | | 5.55 | 0.00 | 6.25 | | | | | | | | | |
| 2/22/2008 | P | | 4.35 | 0.00 | 7.45 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 3.61 | 6.88 | |
| 8/13/2008 | | | 5.70 | 0.00 | 6.10 | | | | | | | | | |
| 2/11/2009 | P | | 6.58 | 0.00 | 5.22 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.66 | 6.36 | |
| 8/27/2009 | | | 5.64 | 0.00 | 6.16 | | | | | | | | | |
| 2/18/2010 | P | | 4.69 | 0.00 | 7.11 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.92 | 6.37 | |
| 8/12/2010 | | | 5.39 | 0.00 | 6.41 | | | | | | | | | |
| 2/17/2011 | P | | 4.75 | 0.00 | 7.05 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.84 | 6.7 | |
| 7/5/2011 | | | 4.91 | 0.00 | 6.89 | | | | | | | | | |
| 2/28/2012 | P | | 5.81 | 0.00 | 5.99 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 1.86 | 5.76 | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| New ID and Date Monitored P/NP Elevation (feet) (f | Footnote k k k k |
|--|-------------------|
| MW-4 Cont. 8/15/2012 11.80 5.83 0.00 5.97 <th< th=""><th>k k k</th></th<> | k k k |
| 8/15/2012 11.80 5.83 0.00 5.97 | k k k |
| MW-5 4/1/1993 11.62 4.77 0.00 6.85 <50 | k k k |
| 4/1/1993 11.62 4.77 0.00 6.85 <50 <0.5 <0.5 <0.5 | k k k |
| 7/9/1993 5.40 0.00 6.22 <50 <0.5 <0.5 <0.5 </th <th>k k k</th> | k k k |
| 10/8/1993 5.87 0.00 5.75 <50 | k k k |
| 1/6/1994 5.75 0.00 5.87 <50 | k k |
| 4/26/1994 5.49 0.00 6.13 <50 | k |
| 7/25/1994 5.69 0.00 5.93 <50 | |
| 10/13/1994 6.03 0.00 5.59 <50 | |
| 1/17/1995 4.74 0.00 6.88 | k |
| 3/31/1995 4.58 0.00 7.04 <50 | k |
| 5/1/1995 4.79 0.00 6.83 - | |
| 7/12/1995 5.32 0.00 6.30 | |
| | |
| 10/12/1995 5.70 0.00 5.92 <50 <0.50 <0.50 <0.50 <1.0 <5.0 6.7 | |
| | |
| 2/27/1996 | f |
| 5/8/1996 4.91 0.00 6.71 | |
| 8/9/1996 5.01 0.00 6.61 <50 <0.5 <1.0 <1.0 <1.0 <1.0 7.7 | |
| 11/7/1996 5.54 0.00 6.08 | |
| 2/10/1997 4.66 0.00 6.96 | |
| 8/4/1997 5.51 0.00 6.11 <50 <0.5 <1.0 <1.0 <1.0 <1.0 6.9 | |
| 1/27/1998 4.01 0.00 7.61 | |
| 9/2/1998 5.17 0.00 6.45 <50 <0.5 <1.0 <1.0 <1.0 <1.0 6.4 | |
| 2/24/1999 4.52 0.00 7.10 <50 <1.0 <1.0 <1.0 <1.0 <-1.0 | |
| 8/30/1999 6.02 0.00 5.60 | |
| 2/21/2000 4.62 0.00 7.00 <50 <0.5 <0.5 <0.5 <0.5 < | |
| 2/12/2001 4.80 0.00 6.82 <50 <0.5 <0.5 <0.5 <0.5 < | |
| 2/4/2002 4.63 0.00 6.99 <50 <0.5 <0.5 <0.5 <1.0 <0.5 | |
| 8/29/2002 5.15 0.00 6.47 | |
| 2/5/2003 4.36 0.00 7.26 <50 <0.50 <0.50 <0.50 <0.50 <2.5 | |
| 8/14/2003 | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | TOC | Depth to | LNAPL | Water Level | | Concentrations in µg/L | | | | | | | |
|----------------|------|-----------|----------|-----------|-------------|------|------------------------|---------|---------|---------|--------|--------|------|---------------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| MW-5 Cont. | | | | | | | | | | | | | | |
| 02/12/2004 | | 11.62 | | | | | | | | | | | | f |
| 08/12/2004 | | | 4.91 | 0.00 | 6.71 | | | | | | | | | |
| 02/10/2005 | P | | 4.54 | 0.00 | 7.08 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.90 | | 6.1 | |
| 08/11/2005 | | | 4.92 | 0.00 | 6.70 | | | | | | | | | |
| 02/09/2006 | | | | | | | | | | | | | | s |
| 8/10/2006 | | | 5.07 | 0.00 | 6.55 | | | | | | | | | |
| 2/8/2007 | P | | 5.10 | 0.00 | 6.52 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 6.01 | 7.20 | |
| 8/8/2007 | | | 5.42 | 0.00 | 6.20 | | | | | | | | | |
| 2/22/2008 | P | | 4.20 | 0.00 | 7.42 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 5.52 | 7.25 | |
| 8/13/2008 | | | 5.27 | 0.00 | 6.35 | | | | | | | | | |
| 2/11/2009 | P | | 4.81 | 0.00 | 6.81 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 0.87 | 6.71 | |
| 8/27/2009 | | | 4.99 | 0.00 | 6.63 | | | | | | | | | |
| 2/18/2010 | P | | 5.60 | 0.00 | 6.02 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 1.35 | 6.87 | |
| 8/12/2010 | | | | | | | | | | | | | | f |
| 2/17/2011 | | | | | | | | | | | | | | f, paved over |
| QC-2 | | | | | | | | | | | | | | |
| 7/9/1993 | | NS | | | | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | g,k |
| 10/8/1993 | | | | | | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | g,k |
| 1/6/1994 | | | | | | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 5.0 | | | g,k |
| 4/26/1994 | | | | | | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 5.0 | | | g,k |
| 7/25/1994 | | | | | | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | < 5.0 | | | g,k |
| 10/13/1994 | | | | | | < 50 | < 0.5 | < 0.5 | < 0.5 | < 0.5 | | | | g,k |
| 1/17/1995 | | | | | | < 50 | <0.5 | <0.5 | < 0.5 | <1 | | | | g |
| 3/31/1995 | | | | | | < 50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | | | | g |
| 7/12/1995 | | | | | | < 50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | | | | g |
| 10/12/1995 | | | | | | < 50 | < 0.50 | < 0.50 | < 0.50 | <1.0 | < 5.0 | | | g |
| 2/27/1996 | | | | | | < 50 | < 0.5 | <1 | <1 | <1 | <10 | | | g |
| 5/9/1996 | | | | | | < 50 | < 0.5 | <1 | <1 | <1 | <10 | | | g |
| RW-1 | | | | | | | | | | | | | | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | тос | Depth to | LNAPL | Water Level Concentrations in µg/L | | | | | | | | | |
|----------------|------|-----------|----------|-----------|------------------------------------|---------|---------|---------|---------|---------|---------|--------|----|----------|
| Well ID and | | Elevation | Water | Thickness | Elevation | GRO/ | | | Ethyl- | Total | | DO | | |
| Date Monitored | P/NP | (feet) | (feet) | (feet) | (feet) | TPHg | Benzene | Toluene | Benzene | Xylenes | MTBE | (mg/L) | pН | Footnote |
| RW-1 Cont. | | | | | | | | | | | | | | |
| 1/6/1994 | | 11.84 | 5.59 | 0.00 | 6.25 | 24,000 | 3,700 | 210 | 830 | 2,000 | 4,562 | | | c,d,k |
| 1/6/1994 | | | 5.59 | 0.00 | 6.25 | 23,000 | 3,800 | 210 | 840 | 2,100 | 4,663 | | | c,k |
| 4/26/1994 | | | 5.21 | 0.00 | 6.63 | 22,000 | 3,300 | 110 | 700 | 1,700 | 6,909 | | | c,d,k |
| 4/26/1994 | | | 5.21 | 0.00 | 6.63 | 24,000 | 3,500 | 120 | 800 | 1,700 | 8,145 | 6.4 | | c,k |
| 7/25/1994 | | | 5.52 | 0.00 | 6.32 | 31,000 | 4,800 | 290 | 1,100 | 1,700 | <5.0 | 5.5 | | c,k |
| 7/25/1994 | | | 5.52 | 0.00 | 6.32 | 28,000 | 4,400 | 240 | 960 | 1,400 | 20,608 | | | c,d,k |
| 10/13/1994 | | | 6.05 | 0.00 | 5.79 | 20,000 | 4,200 | 46 | 990 | 440 | | 6.8 | | k |
| 1/17/1995 | | | 4.02 | 0.00 | 7.82 | 9,600 | 1,500 | 65 | 300 | 2,700 | | 7.7 | | |
| 3/31/1995 | | | 3.81 | 0.00 | 8.03 | 16,000 | 1,500 | 780 | 370 | 2,000 | | 7.8 | | |
| 5/1/1995 | | | 4.21 | 0.00 | 7.63 | | | | | | | | | |
| 7/12/1995 | | | 4.93 | 0.00 | 6.91 | 22,000 | 3,700 | 150 | 950 | 2,800 | | 7.2 | | |
| 10/12/1995 | | | 5.46 | 0.00 | 6.38 | 30,000 | 1,600 | 1,500 | 1,700 | 8,500 | 4,300 | 7.0 | | |
| 2/27/1996 | | | 4.00 | 0.00 | 7.84 | 1,600 | 30 | 23 | 38 | 420 | 50 | | | d |
| 2/27/1996 | | | 4.00 | 0.00 | 7.84 | 1,800 | 30 | 24 | 41 | 440 | 52 | 7.7 | | |
| 5/8/1996 | | | 4.65 | 0.00 | 7.19 | | | | | | | | | |
| 5/9/1996 | | | | | | 2,900 | 15 | 15 | 78 | 700 | < 50 | | | d |
| 5/9/1996 | | | | | | 3,200 | 19 | 19 | 97 | 800 | < 50 | 7.1 | | |
| 8/9/1996 | | | 4.96 | 0.00 | 6.88 | | | | | | | | | |
| 8/12/1996 | | | | | | 6,900 | 210 | 270 | 390 | 1,920 | <100 | 7.9 | | |
| 8/12/1996 | | | | | | 8,200 | 270 | 330 | 450 | 2,330 | <100 | | | d |
| 11/7/1996 | | | 5.50 | 0.00 | 6.34 | 6,800 | 360 | 45 | <10 | <10 | 500 | | | d |
| 11/7/1996 | | | 5.50 | 0.00 | 6.34 | 6,100 | 320 | 45 | <10 | <10 | 430 | 6.9 | | |
| 2/10/1997 | | | 3.85 | 0.00 | 7.99 | 170,000 | <120 | <250 | <250 | <250 | 150,000 | 6.7 | | |
| 8/4/1997 | | | 4.72 | 0.00 | 7.12 | <25000 | 580 | 450 | 630 | 3,700 | 230,000 | 6.9 | | |
| 1/27/1998 | | | 3.80 | 0.00 | 8.04 | 52,000 | 380 | 330 | 490 | 2,970 | 38,000 | 6.1 | | |
| 1/27/1998 | | | 3.80 | 0.00 | 8.04 | 51,000 | 380 | 300 | 480 | 2,980 | 36,000 | | | d |
| 9/2/1998 | | | 4.91 | 0.00 | 6.93 | 280,000 | 2,400 | <50 | 1,400 | 3,170 | 270,000 | | | d |
| 9/2/1998 | | | 4.91 | 0.00 | 6.93 | 260,000 | 2,500 | 56 | 1,400 | 3,070 | 250,000 | 6.6 | | |
| 2/24/1999 | | | 4.16 | 0.00 | 7.68 | 120 | <1.0 | <1.0 | 1.5 | 13 | 130/140 | | | h |
| 8/30/1999 | | | 5.52 | 0.00 | 6.32 | 3,100 | 320 | <25 | 120 | 28 | 60,000 | | | |

Table 1. Summary of Groundwater Monitoring Data: Relative Water Elevations and Laboratory Analyses
Former BP Station #11104, 1716 Webster St., Alameda, CA

| | | тос | Depth to | LNAPL | Water Level | Concentrations in µg/L | | | | | | | | |
|-------------------------------|------|------------------|-----------------|---------------------|---------------------|------------------------|---------|---------|-------------------|------------------|--------|--------------|------|----------|
| Well ID and Date Monitored | P/NP | Elevation (feet) | Water (feet) | Thickness (feet) | Elevation (feet) | GRO/ TPHg | Benzene | Toluene | Ethyl- Benzene | Total Xylenes | MTBE | DO (mg/L) | pН | Footnote |
| RW-1 Cont. | | | | | | | | | | | | | | |
| 2/21/2000 | | 11.84 | 3.68 | 0.00 | 8.16 | 340 i | 8.6 | 1.8 | 11 | 66 | 2,500 | | | i |
| 8/8/2000 | | | 4.85 | 0.00 | 6.99 | 1,600 | 3.2 | < 0.5 | 0.82 | 1.2 | 19,000 | | | |
| 2/12/2001 | | | 4.26 | 0.00 | 7.58 | 1,500 | 1.33 | < 0.5 | < 0.5 | 5.69 | 2,420 | | | |
| 8/13/2001 | | | 5.34 | 0.00 | 6.50 | 290 | < 0.5 | < 0.5 | < 0.5 | <1.5 | 314 | | | |
| 2/4/2002 | | | 4.08 | 0.00 | 7.76 | 570 | 9.15 | 0.874 | 19.2 | 83.8 | 97.4 | | | |
| 8/29/2002 | | | 5.12 | 0.00 | 6.72 | < 50 | 0.59 | < 0.50 | < 0.50 | < 0.50 | 19 | | | |
| 2/5/2003 | | | 5.21 | 0.00 | 6.63 | < 50 | < 0.50 | < 0.50 | 0.68 | 1.7 | 18 | | | n |
| 8/14/2003 | | | 5.07 | 0.00 | 6.77 | < 500 | < 5.0 | <5.0 | < 5.0 | 5.4 | 490 | | | p |
| 02/12/2004 | P | | 4.19 | 0.00 | 7.65 | 120 | 1.6 | <1.0 | 3.0 | 4.1 | 51 | | 5.9 | |
| 08/12/2004 | P | | 5.11 | 0.00 | 6.73 | 170 | 6.9 | < 0.50 | 4.5 | 10 | 57 | | 6.0 | |
| 02/10/2005 | P | | 4.15 | 0.00 | 7.69 | 64 | 1.6 | < 0.50 | 0.94 | < 0.50 | 39 | | 5.9 | |
| 08/11/2005 | P | | 4.82 | 0.00 | 7.02 | 480 | 6.5 | < 0.50 | 7.0 | 14 | 40 | | 6.5 | |
| 02/09/2006 | P | | 3.95 | 0.00 | 7.89 | < 50 | 1.3 | < 0.50 | 0.83 | 0.80 | 7.8 | | 6.9 | |
| 8/10/2006 | | | 4.90 | 0.00 | 6.94 | 780 | 43 | <1.0 | 150 | 200 | 9.9 | | 6.5 | |
| 2/8/2007 | P | | 5.03 | 0.00 | 6.81 | 140 | 4.0 | <1.0 | <1.0 | 1.8 | 14 | 4.17 | 6.99 | |
| 8/8/2007 | P | | 5.40 | 0.00 | 6.44 | 150 | 4.4 | < 0.50 | < 0.50 | 1.9 | 3.0 | 3.92 | 6.91 | |
| 2/22/2008 | P | | 4.13 | 0.00 | 7.71 | 120 | 0.87 | < 0.50 | < 0.50 | < 0.50 | 13 | 3.68 | 6.78 | |
| 8/13/2008 | P | | 5.50 | 0.00 | 6.34 | 1,900 | 60 | 2.2 | 4.1 | 670 | 9.0 | 0.45 | 8.72 | |
| 2/11/2009 | P | | 5.35 | 0.00 | 6.49 | 220 | 14 | < 0.50 | < 0.50 | < 0.50 | 6.2 | 0.54 | 6.92 | |
| 8/27/2009 | P | | 5.40 | 0.00 | 6.44 | 630 | 11 | 0.87 | < 0.50 | 180 | 9.9 | 0.58 | 7.23 | |
| 2/18/2010 | NP | | 4.57 | 0.00 | 7.27 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 6.1 | 1.08 | 6.73 | |
| 8/12/2010 | NP | | 5.38 | 0.00 | 6.46 | 100 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 23 | 0.65 | 7.5 | |
| 2/17/2011 | NP | | 4.88 | 0.00 | 6.96 | < 50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | 3.2 | 0.68 | 6.6 | |
| 7/5/2011 | | | 4.92 | 0.01 | 6.93 | | | | | | | | | |
| 2/28/2012 | | | 5.82 | 0.06 | 6.07 | | | | | | | | | |
| 8/15/2012 | | | 5.62 | 0.01 | 6.23 | | | | | | | | | |

Symbols & Abbreviations:

DO = Dissolved oxygen

ft bgs = Feet below ground surface

ft MSL = Feet above mean sea level

GRO = Gasoline range organics, range C4-C12

mg/L = Milligrams per liter

MTBE = Methyl tert-butyl ether

NP = Well not purged prior to sampling

P = Well purged prior to sampling

TPH-g = Total petroleum hydrocarbons as gasoline

 $\mu g/L = Micrograms per liter$

--/--- Not applicable/available/analyzed/measured

< = Not detected at or above specified laboratory reporting limit

PACE = Pace Analytical Services, Inc.

ATI = Analytical Technologies, Inc.

SPL = Southern Petroleum Laboratories

SEQ/SEQM = Sequoia Analytical/Sequoia Morgan Hill (Laboratories)

CEL = CalScience Environmental Laboratories, Inc.

TOC = Top of casing measured in ft MSL

DTW = Depth to water measured in ft bgs

GWE = Groundwater elevation measured in ft MSL

Footnotes:

- a = TOC elevations surveyed in reference to USGS benchmark 14.108 ft MSL at northwest corner of Webster Street and Pacific Avenue
- b = Groundwater elevations in ft MSL
- c = A copy of the documentation for this data is included in Appendix C of Alisto report 10-155-07-001
- d = Blind duplicate
- e = Sample also analyzed for cadmium, nickel, chromium, lead, and zinc. None were detected above the reported detection limit
- f = Well inaccessible
- g = Travel blank
- h = MTBE by EPA Methods 8020/8260
- i = Gasoline does not include MTBE
- i = Unable to sample
- k = A copy of the documentation for this data can be found in Baline Tech Services report 010813-N-2. No chromatograms could be located for MTBE data from wells MW-2,MW-3, MW-4, MW-5, and QC-2, sampled on July 9, 1993; all wells sampled on October 8, 1993; wells MW-1, MW-2, and MW-3, sampled on Junuary 6, 1994; and all wells sampled on October 13, 1994
- 1 = Chromatogrom Pattern: Gasoline C6-C10
- m = The concentration indicated for this analyte is an estimated value above the calibration range of the instrument
- n =The closing calibration was outside acceptance limits by 1% high. This should be considered inevaluating the result. The avg. % difference for all analytes met the 15% requirement and the QC suggests that calibration linearity is not a factor
- o = The original scope of work only called for annual gauging of well. This issue has been addressed, and in the future, gauging of this well will be semi-annual 1st and 3rd quarter.
- p = Groundwater samples analyzed by EPA Method 8260B for TPH-g, BTEX, and MTBE
- q = Beginning in the fourth quarter 2003, the laboratory modified the reported analyte list. TPH-g was changed to GRO. The resulting data may be impacted by the potential inclusion of non-TPH-g analytes within the requested fuel range resulting in a higher concentration being reported
- r = Possible obstruction in well
- s = Car parked over well
- t = Sample > 4x spike concentration

Notes

During the second quarter of 2002, URS Corporation assumed groundwater monitoring activities for BP

GRO analysis was completed by EPA method 8260B (C4-C12) for samples collected from the time period April 2006 through February 4, 2008. The analysis for GRO was changed to EPA method 8015B (C6-C12) for samples collected from the time period February 5, 2008 through the present

Note: The data within this table collected prior to April 2006 was provided to Broadbent & Associates, Inc. by Atlantic Richfield Company and their previous consultants. Broadbent & Associates, Inc. has not verified the

accuracy of this information

Table 2. Summary of Fuel Additives Analytical Data Former BP Station #11104, 1716 Webster St., Alameda, CA

| Well ID and | | | | Concentrat | ions in μg/L | | | | |
|----------------|---------|--------|---------------|------------|--------------|------|---------|------|----------|
| Date Monitored | Ethanol | TBA | MTBE | DIPE | ETBE | TAME | 1,2-DCA | EDB | Footnote |
| MW-1 | | | | | | | | | |
| | | | 12.052 | | | | | | |
| 7/9/1993 | | | 12,952 | | | | | | |
| 7/9/1993 | | | 11,919 | | | | | | |
| 4/26/1994 | | | 16,663 | | | | | | |
| 7/25/1994 | | | 26,428 | | | | | | |
| 10/12/1995 | | | 15,000 | | | | | | |
| 10/12/1995 | | | 14,000 | | | | | | |
| 2/27/1996 | | | 5,500 | | | | | | |
| 5/9/1996 | | | 2,700 | | | | | | |
| 8/12/1996 | | | 1,800 | | | | | | |
| 11/7/1996 | | | 2,100 | | | | | | |
| 2/10/1997 | | | 160,000 | | | | | | |
| 2/10/1997 | | | 160,000 | | | | | | |
| 8/4/1997 | | | 260,000 | | | | | | |
| 8/4/1997 | | | 250,000 | | | | | | |
| 1/27/1998 | | | 490,000 | | | | | | |
| 9/2/1998 | | | 230,000 | | | | | | |
| 2/24/1999 | | | 90,000/200,00 | | | | | | |
| 8/30/1999 | | | 48,000 | | | | | | |
| 2/21/2000 | | | 31,000 | | | | | | |
| 8/8/2000 | | | 60,000 | | | | | | |
| 2/12/2001 | | | 18,000 | | | | | | |
| 8/13/2001 | | | 5,590 | | | | | | |
| 2/4/2002 | | | 2,470 | | | | | | |
| 8/29/2002 | | | 3,100 | | | | | | |
| 2/5/2003 | | | 590 m,n | | | | | | |
| 8/14/2003 | <10,000 | <2,000 | 4,500 | < 50 | <50 | 89 | <50 | <50 | a |
| 02/12/2004 | <2,000 | 960 | 1,200 | <10 | <10 | 33 | <10 | <10 | |
| 08/12/2004 | <1,000 | 730 | 260 | < 5.0 | <5.0 | 9.3 | <5.0 | <5.0 | |
| 02/10/2005 | <1,000 | 2,300 | 730 | <5.0 | <5.0 | 26 | <5.0 | <5.0 | b |
| 08/11/2005 | <1,000 | 460 | 190 | <5.0 | <5.0 | 10 | <5.0 | <5.0 | |
| 02/09/2006 | <3,000 | 400 | 380 | <5.0 | <5.0 | 18 | <5.0 | <5.0 | b, c |
| 8/10/2006 | <3,000 | <200 | 47 | <5.0 | <5.0 | <5.0 | <5.0 | <5.0 | 0, 0 |
| 0/10/2000 | ₹3,000 | \200 | 47 | ₹3.0 | . | 3.0 | 3.0 | ₩.0 | |

Table 2. Summary of Fuel Additives Analytical Data Former BP Station #11104, 1716 Webster St., Alameda, CA

| Well ID and | | | | Concentrati | ions in ug/L | | | | |
|------------------------|---------|-----|---------------|-------------|--------------|--------|---------|--------|----------|
| Date Monitored | Ethanol | TBA | MTBE | DIPE | ETBE | TAME | 1,2-DCA | EDB | Footnote |
| MW-1 Cont. | | | | | | | | | |
| 2/8/2007 | <3,000 | 210 | 130 | <5.0 | <5.0 | 7.8 | <5.0 | <5.0 | |
| 8/8/2007 | <300 | 190 | 140 | < 0.50 | < 0.50 | 8.7 | < 0.50 | < 0.50 | d (MTBE) |
| 2/22/2008 | <300 | 51 | 59 | < 0.50 | < 0.50 | 3.1 | < 0.50 | < 0.50 | ` ' |
| 8/13/2008 | <3,000 | 340 | 370 | <5.0 | <5.0 | 22 | <5.0 | < 5.0 | |
| 2/11/2009 | <1,200 | 480 | 68 | <2.0 | <2.0 | 3.4 | <2.0 | <2.0 | |
| 8/27/2009 | <1,200 | 180 | 20 | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 | |
| 2/18/2010 | <1,200 | 160 | 48 | <2.0 | <2.0 | 2.8 | <2.0 | <2.0 | |
| 8/12/2010 | <1,200 | 140 | 76 | <2.0 | <2.0 | 6.4 | <2.0 | <2.0 | |
| 2/17/2011 | <1,200 | 120 | 40 | <2.0 | <2.0 | 3.1 | <2.0 | <2.0 | |
| 7/5/2011 | <1,500 | 59 | 22 | <2.5 | <2.5 | <2.5 | <2.5 | <2.5 | |
| 2/28/2012 | <6,000 | 750 | 610 | <10 | <10 | 64 | <10 | <10 | |
| 8/15/2012 | <150 | 180 | 16 | <0.50 | < 0.50 | 1.3 | <0.50 | < 0.50 | |
| MW-2 | | | | | | | | | |
| 4/06/1004 | | | .5.0 | | | | | | |
| 4/26/1994 7/25/1994 | | | <5.0 11.59 | | | | | | |
| 10/12/1995 | | | <5.0 | | | | | | |
| 2/27/1996 | | | <10 | | | | | | |
| 8/9/1996 | | | <10 | | | | | | |
| 8/4/1997 | | | <10 | | | | | | |
| 9/2/1998 | | | 110 | | | | | | |
| 2/24/1999 | | | 8.2 | | | | | | |
| 2/21/2000 | | | 0.72 | | | | | | |
| 2/12/2001 | | | <0.5 | | | | | | |
| 2/4/2002 | | | <0.5 | | | | | | |
| 2/5/2003 | | | <2.5 | | | | | | |
| 02/12/2004 | <100 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 02/10/2005 | <100 | <20 | < 0.50 | < 0.50 | < 0.50 | <0.50 | <0.50 | < 0.50 | b |
| 02/09/2006 | <300 | <20 | <0.50 | <0.50 | <0.50 | <0.50 | <0.50 | < 0.50 | b, c |
| 2/8/2007 | <300 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/22/2008 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/11/2009 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |

Table 2. Summary of Fuel Additives Analytical Data Former BP Station #11104, 1716 Webster St., Alameda, CA

| Well ID and | Concentrations in µg/L | | | | | | | | |
|----------------|------------------------|-----|--------|--------|--------|--------|---------|--------|----------|
| Date Monitored | Ethanol | TBA | MTBE | DIPE | ETBE | TAME | 1,2-DCA | EDB | Footnote |
| MW-2 Cont. | | | | | | | | | |
| 2/18/2010 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/17/2011 | <300 | <10 | <0.50 | <0.50 | <0.50 | <0.50 | <0.50 | <0.50 | |
| 2/28/2012 | <300 | <10 | <0.50 | <0.50 | <0.50 | <0.50 | <0.50 | <0.50 | |
| | <300 | <10 | <0.50 | ₹0.50 | ₹0.50 | <0.50 | <0.50 | <0.50 | |
| MW-3 | | | | | | | | | |
| 4/26/1994 | | | < 5.0 | | | | | | |
| 7/25/1994 | | | <5.0 | | | | | | |
| 10/12/1995 | | | < 5.0 | | | | | | |
| 2/27/1996 | | | <10 | | | | | | |
| 8/9/1996 | | | <10 | | | | | | |
| 8/4/1997 | | | <10 | | | | | | |
| 9/2/1998 | | | <10 | | | | | | |
| 2/24/1999 | | | <1.0 | | | | | | |
| 2/21/2000 | | | < 0.5 | | | | | | |
| 02/12/2004 | <100 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 02/10/2005 | <100 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | b |
| 02/09/2006 | <300 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/8/2007 | <300 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/22/2008 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/11/2009 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/18/2010 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/17/2011 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/28/2012 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| MW-4 | | | | | | | | | |
| 1/6/1994 | | | <5.0 | | | | | | |
| 4/26/1994 | | | <5.0 | | | | | | |
| 7/25/1994 | | | <5.0 | | | | | | |
| 10/12/1995 | | | <5.0 | | | | | | |
| 2/27/1996 | | | <10 | | | | | | |
| 8/9/1996 | | | <10 | | | | | | |
| 8/4/1997 | | | <10 | | | | | | |

Table 2. Summary of Fuel Additives Analytical Data Former BP Station #11104, 1716 Webster St., Alameda, CA

| Well ID and | Concentrations in μg/L | | | | | | | | |
|----------------|------------------------|-----|--------|--------|--------|--------|---------|--------|----------|
| Date Monitored | Ethanol | TBA | MTBE | DIPE | ETBE | TAME | 1,2-DCA | EDB | Footnote |
| MW-4 Cont. | | | | | | | | | |
| 0/2/1009 | | | -10 | | | | | | |
| 9/2/1998 | | | <10 | | | | | | |
| 2/24/1999 | | | <1.0 | | | | | | |
| 2/21/2000 | | | 0.66 | | | | | | |
| 2/12/2001 | | | 0.982 | | | | | | |
| 2/4/2002 | | | <0.5 | | | | | | |
| 2/5/2003 | | | <2.5 | | | | | | |
| 02/12/2004 | <100 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 02/10/2005 | <100 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | b, c |
| 02/09/2006 | <300 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/8/2007 | <300 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/22/2008 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/11/2009 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/18/2010 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/17/2011 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/28/2012 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| MW-5 | | | | | | | | | |
| 1/6/1004 | | | .5.0 | | | | | | |
| 1/6/1994 | | | <5.0 | | | | | | |
| 4/26/1994 | | | <5.0 | | | | | | |
| 7/25/1994 | | | <5.0 | | | | | | |
| 10/12/1995 | | | <5.0 | | | | | | |
| 8/9/1996 | | | <10 | | | | | | |
| 8/4/1997 | | | <10 | | | | | | |
| 9/2/1998 | | | <10 | | | | | | |
| 2/24/1999 | | | <1.0 | | | | | | |
| 2/21/2000 | | | < 0.5 | | | | | | |
| 2/12/2001 | | | < 0.5 | | | | | | |
| 2/4/2002 | | | <0.5 | | | | | | |
| 2/5/2003 | | | <2.5 | | | | | | |
| 02/10/2005 | <100 | <20 | 0.90 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | b, c |
| 2/8/2007 | <300 | <20 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/22/2008 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |

Table 2. Summary of Fuel Additives Analytical Data Former BP Station #11104, 1716 Webster St., Alameda, CA

| Well ID and | | | | Concentrat | | | | | |
|----------------|---------|-----|---------|------------|--------|--------|---------|--------|----------|
| Date Monitored | Ethanol | TBA | MTBE | DIPE | ETBE | TAME | 1,2-DCA | EDB | Footnote |
| MW-5 Cont. | | | | | | | | | |
| 2/11/2009 | <300 | <10 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/18/2010 | <300 | <10 | <0.50 | <0.50 | <0.50 | <0.50 | <0.50 | < 0.50 | |
| QC-2 | | | | | | | | | |
| 1/6/1994 | | | <5.0 | | | | | | |
| 4/26/1994 | | | <5.0 | | | | | | |
| 7/25/1994 | | | <5.0 | | | | | | |
| 10/12/1995 | | | <5.0 | | | | | | |
| 2/27/1996 | | | <10 | | | | | | |
| 5/9/1996 | | | <10 | | | | | | |
| RW-1 | | | | | | | | | |
| | | | | | | | | | |
| 1/6/1994 | | | 4,562 | | | | | | |
| 1/6/1994 | | | 4,663 | | | | | | |
| 4/26/1994 | | | 6,909 | | | | | | |
| 4/26/1994 | | | 8,145 | | | | | | |
| 7/25/1994 | | | <5.0 | | | | | | |
| 7/25/1994 | | | 20,608 | | | | | | |
| 10/12/1995 | | | 4,300 | | | | | | |
| 2/27/1996 | | | 50 | | | | | | |
| 2/27/1996 | | | 52 | | | | | | |
| 5/9/1996 | | | <50 | | | | | | |
| 5/9/1996 | | | <50 | | | | | | |
| 8/12/1996 | | | <100 | | | | | | |
| 8/12/1996 | | | <100 | | | | | | |
| 11/7/1996 | | | 500 | | | | | | |
| 11/7/1996 | | | 430 | | | | | | |
| 2/10/1997 | | | 150,000 | | | | | | |
| 8/4/1997 | | | 230,000 | | | | | | |
| 1/27/1998 | | | 38,000 | | | | | | |
| 1/27/1998 | | | 36,000 | | | | | | |
| 9/2/1998 | | | 270,000 | | | | | | |

Table 2. Summary of Fuel Additives Analytical Data Former BP Station #11104, 1716 Webster St., Alameda, CA

| Well ID and | | | | Concentrat | ions in μg/L | | | | |
|----------------|---------|------|---------|------------|--------------|--------|---------|--------|----------|
| Date Monitored | Ethanol | TBA | MTBE | DIPE | ETBE | TAME | 1,2-DCA | EDB | Footnote |
| RW-1 Cont. | | | | | | | | | |
| 9/2/1998 | | | 250,000 | | | | | | |
| 2/24/1999 | | | 130/140 | | | | | | |
| 8/30/1999 | | | 60,000 | | | | | | |
| 2/21/2000 | | | 2,500 | | | | | | |
| 8/8/2000 | | | 19,000 | | | | | | |
| 2/12/2001 | | | 2,420 | | | | | | |
| 8/13/2001 | | | 314 | | | | | | |
| 2/4/2002 | | | 97.4 | | | | | | |
| 8/29/2002 | | | 19 | | | | | | |
| 2/5/2003 | | | 18 | | | | | | |
| 8/14/2003 | <1,000 | <200 | 490 | < 5.0 | <5.0 | 11 | < 5.0 | < 5.0 | a |
| 02/12/2004 | <200 | 83 | 51 | <1.0 | <1.0 | 1.2 | <1.0 | <1.0 | |
| 08/12/2004 | <100 | 500 | 57 | < 0.50 | < 0.50 | 1.0 | < 0.50 | < 0.50 | |
| 02/10/2005 | <100 | 69 | 39 | < 0.50 | < 0.50 | 0.68 | < 0.50 | < 0.50 | b, c |
| 08/11/2005 | <100 | 390 | 40 | < 0.50 | < 0.50 | 1.3 | < 0.50 | < 0.50 | c |
| 02/09/2006 | <300 | 31 | 7.8 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 8/10/2006 | <600 | 190 | 9.9 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| 2/8/2007 | <600 | 220 | 14 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| 8/8/2007 | <300 | 170 | 3.0 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/22/2008 | <300 | 56 | 13 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 8/13/2008 | <300 | 38 | 9.0 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/11/2009 | <300 | 69 | 6.2 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 8/27/2009 | <300 | 100 | 9.9 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 2/18/2010 | <300 | <10 | 6.1 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |
| 8/12/2010 | <300 | 250 | 23 | < 0.50 | < 0.50 | 0.81 | < 0.50 | < 0.50 | |
| 2/17/2011 | <300 | <10 | 3.2 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | < 0.50 | |

Symbols & Abbreviations:

TBA = tert-Butyl alcohol

MTBE = Methyl tert-butyl ether

DIPE = Diisopropyl ether

ETBE = Ethyl tert-butyl ether

TAME = tert-Amyl Methyl ether

1,2-DCA = 1,2-Dibromoethane

EDB = 1,2-Dichloroethane

 $\mu g/L = Micrograms per liter$

- < = Not detected at or above specified laboratory reporting limit
- -- = Not sampled/analyzed

Footnotes:

- a = The continuing calibration was outside of client contractual acceptance limits by 3.4% low. However, it was within the method acceptance limit. The data should still be useful for its intended purpose
- b = Possible high bias for 1,2-DCA due to CCV falling outside acceptance criteria
- c = Callibration verification for ethanol was within method limits but outside contract limits
- d = Sample > 4x spike concentration

Notes:

All fuel oxygenate compounds analyzed using EPA Method 8260B

Note: The data within this table collected prior to April 2006 was provided to Broadbent & Associates, Inc. by Atlantic Richfield Company and their previous consultants. Broadbent & Associates, Inc. has not verified the accuracy of this information

Table 3. Historical Groundwater Gradient - Direction and Magnitude Former BP Station #11104, 1716 Webster St., Alameda, CA

| Date Measured | Approximate Gradient Direction | Approximate Gradient Magnitude (ft/ft) |
|---------------|--------------------------------|--|
| 2/9/2006 | North-Northwest | 0.007 |
| 8/10/2006 | North-Northwest | 0.007 |
| 2/8/2007 | North-Northwest | 0.007 |
| 8/8/2007 | North-Northwest | 0.004 |
| 9/11/2007 | East | 0.006 |
| 2/22/2008 | North-Northwest | 0.003 |
| 8/13/2008 | North-Northwest | 0.007 |
| 2/11/2009 | Northeast | 0.004 |
| 8/27/2009 | Northeast | 0.004 |
| 2/18/2010 | North-Northwest | 0.008 |
| 8/12/2010 | North-Northeast | 0.005 |
| 2/17/2011 | North-Northwest | 0.008 |
| 7/5/2011 | North-Northeast | 0.003 |
| 2/28/2012 | North-Northeast | 0.005 |
| 8/15/2012 | North-Northeast | 0.003 |

Notes:

The data within this table collected prior to April 2006 was provided to Broadbent & Associates, Inc. by Atlantic Richfield Company and their previous consultants. Broadbent & Associates, Inc. has not verified the accuracy of this information

APPENDIX A

FIELD METHODS

QUALITY ASSURANCE/QUALITY CONTROL FIELD METHODS

Field methods discussed herein were implemented to provide for accuracy and reliability of field activities, data collection, sample collection, and handling. Discussion of these methods is provided below.

1.0 Equipment Calibration

Equipment calibration was performed per equipment manufacturer specifications before use.

2.0 Depth to Groundwater and Light Non-Aqueous Phase Liquid Measurement

Depth to groundwater was measured in wells identified for gauging in the scope of work using a decontaminated water level indicator. The depth to water measurement was taken from a cut notch or permanent mark at the top of the well casing to which the well head elevation was originally surveyed.

Once depth to water was measured, an oil/water interface meter or a new disposable bailer was utilized to evaluate the presence and, if present, to measure the "apparent" thickness of light non-aqueous phase liquid (LNAPL) in the well. If LNAPL was present in the well, groundwater purging and sampling were not performed, unless sampling procedures in the scope of work specified collection of samples in the presence of LNAPL. Otherwise, time allowing, LNAPL was bailed from the well using either a new disposable bailer, or the disposal bailer previously used for initial LNAPL assessment. Bailing of LNAPL continued until the thickness of LNAPL (or volume) stabilized in each bailer pulled from the well, or LNAPL was no longer present. After LNAPL thickness either stabilized or was eliminated, periodic depth to water and depth to LNAPL measurements were collected as product came back into the well to evaluate product recovery rate and to aid in further assessment of LNAPL in the subsurface. LNAPL thickness measurements were recorded as "apparent." If a bailer was used for LNAPL thickness measurement, the field sampler noted the bailer entry diameter and chamber diameter to enable correction of thickness measurements. Recovered LNAPL was stored on-site in a labeled steel drum(s) or other appropriate container(s) prior to disposal.

3.0 Well Purging and Groundwater Sample Collection

Well purging and groundwater sampling were performed in wells specified in the scope of work after measuring depth to groundwater and evaluating the presence of LNAPL. Purging and sampling were performed using one of the methods detailed below. The method used was noted in the field records. Purge water was stored on-site in labeled steel drum(s) or other appropriate container(s) prior to disposal or on-site treatment (in cases where treatment using an on-site system is authorized).

3.1 Purging a Predetermined Well Volume

Purging a predetermined well volume is performed per ASTM International (ASTM) D4448-01. This purging method has the objective of removing a predetermined volume of stagnant water from the well prior to sampling. The volume of stagnant water

is defined as either the volume of water contained within the well casing, or the volume within the well casing and sand/gravel in the annulus if natural flow through these is deemed insufficient to keep them flushed out.

This purging method involves removal of a minimum of three stagnant water volumes from the well using a decontaminated pump with new disposable plastic discharge or suction tubing, dedicated well tubing, or using a new disposable or decontaminated reusable bailer. If a new disposable bailer was used for assessment of LNAPL, that bailer may be used for purging. The withdrawal rate used is one that minimizes drawdown while satisfying time constraints.

To evaluate when purging is complete, one or more groundwater stabilization parameters are monitored and recorded during purging activities until stabilization is achieved. Most commonly, stabilization parameters include temperature, conductivity, and pH, but field procedures detailed in the scope of work may also include monitoring of dissolved oxygen concentrations, oxidation reduction potential, and/or turbidity¹. Parameters are considered stable when two (2) consecutive readings recorded three (3) minutes apart fall within ranges provided below in Table 1. In the event that the parameters have not stabilized and five (5) well casing volumes have been removed, purging activities will cease and be considered complete. Once the well is purged, a groundwater sample(s) is collected from the well using a new disposable bailer. If a new disposable bailer was used for purging, that bailer may be used to collect the sample(s). A sample is not collected if the well is inadvertently purged dry.

Table 1. Criteria for Defining Stabilization of Water-Quality Indicator Parameters

| Tuble 1: Criteria for Berning Busingua | on or water Quarty marcutor rurameters |
|--|---|
| Parameter | Stabilization Criterion |
| Temperature | ± 0.2°C (± 0.36°F) |
| pН | ± 0.1 standard units |
| Conductivity | ± 3% |
| Dissolved oxygen | ± 10% |
| Oxidation reduction potential | $\pm~10~mV$ |
| Turbidity ¹ | ± 10% or 1.0 NTU (whichever is greater) |

3.2 Low-Flow Purging and Sampling

"Low-Flow", "Minimal Drawdown", or "Low-Stress" purging is performed per ASTM D6771-02. It is a method of groundwater removal from within a well's screened interval that is intended to minimize drawdown and mixing of the water column in the well casing. This is accomplished by pumping the well using a decontaminated pump with new disposable plastic discharge or suction tubing or dedicated well tubing at a low flow rate while evaluating the groundwater elevation during pumping.

¹ As stated in ASTM D6771-02, turbidity is not a chemical parameter and not indicative of when formation-quality water is being purged; however, turbidity may be helpful in evaluating stress on the formation during purging. Turbidity measurements are taken at the same time that stabilization parameter measurements are made, or, at a minimum, once when purging is initiated and again just prior to sample collection, after stabilization parameters have stabilized. To avoid artifacts in sample analysis, turbidity should be as low as possible when samples are collected. If turbidity values are persistently high, the withdrawal rate is lowered until turbidity decreases. If high turbidity persists even after lowering the withdrawal rate, the purging is stopped for a period of time until turbidity settles, and the purging process is then restarted. If this fails to solve the problem, the purging/sampling process for the well is ceased, and well maintenance or redevelopment is considered.

The low flow pumping rate is well specific and is generally established at a volume that is less than or equal to the natural recovery rate of the well. A pump with adjustable flow rate control is positioned with the intake at or near the mid-point of the submerged well screen. The pumping rate used during low-flow purging is low enough to minimize mobilization of particulate matter and drawdown (stress) of the water column. Low-flow purging rates will vary based on the individual well characteristics; however, the purge rate should not exceed 1.0 Liter per minute (L/min) or 0.25 gallon per minute (gal/min). Low-flow purging should begin at a rate of approximately 0.1 L/min (0.03 gal/min)², or the lowest rate possible, and be adjusted based on an evaluation of drawdown. Water level measurements should be recorded at approximate one (1) to two (2) minute intervals until the low-flow rate has been established, and drawdown is minimized. As a general rule, drawdown should not exceed 25% of the distance between the top of the water column and the pump in-take.

To evaluate when purging is complete, one or more groundwater stabilization parameters are monitored and recorded during purging activities until stabilization is achieved. Most commonly, stabilization parameters include temperature, conductivity, and pH, but field procedures detailed in the scope of work may also include monitoring of dissolved oxygen concentrations, oxidation reduction potential, and/or turbidity¹. The frequency between measurements will be at an interval of one (1) to three (3) minutes; however, if a flow cell is used, the frequency will be determined based on the time required to evacuate one cell volume. Stabilization is defined as three (3) consecutive readings recorded several minutes apart falling within ranges provided in Table 1. Samples will be collected by filling appropriate containers from the pump discharge tubing at a rate not to exceed the established pumping rate.

3.3 Minimal Purge, Discrete Depth, and Passive Sampling

Per ASTM D4448-01, sampling techniques that do not rely on purging, or require only minimal purging, may be used if a particular zone within a screened interval is to be sampled or if a well is not capable of yielding sufficient groundwater for purging. To properly use these sampling techniques, a water sample is collected within the screened interval with little or no mixing of the water column within the casing. These techniques include minimal purge sampling which uses a dedicated sampling pump capable of pumping rates of less than 0.1 L/min (0.03 gal/min)², discrete depth sampling using a bailer that allows groundwater entry at a controlled depth (e.g. differential pressure bailer), or passive (diffusion) sampling. These techniques are based on certain studies referenced in ASTM D4448-01 that indicate that under certain conditions, natural groundwater flow is laminar and horizontal with little or no mixing within the well screen.

² According to ASTM D4448-01, studies have indicated that at flow rates of 0.1 L/min, low-density polyethylene (LDPE) and plasticized polypropylene tubing materials are prone to sorption. Therefore, TFE-fluorocarbon or other appropriate tubing material is used, particularly when tubing lengths of 50 feet or longer are used.

4.0 Decontamination

Reusable groundwater sampling equipment were cleaned using a solution of Alconox or other acceptable detergent, rinsed with tap water, and finally rinsed with distilled water prior to use in each well. Decontamination water was stored on-site in labeled steel drum(s) or other appropriate container(s) prior to disposal.

5.0 Sample Containers, Labeling, and Storage

Samples were collected in laboratory prepared containers with appropriate preservative (if preservative was required). Samples were properly labeled (site name, sample I.D., sampler initials, date, and time of collection) and stored chilled (refrigerator or ice chest with ice) until delivery to a certified laboratory, under chain of custody procedures.

6.0 Chain of Custody Record and Procedure

The field sampler was personally responsible for care and custody of the samples collected until they were properly transferred to another party. To document custody and transfer of samples, a Chain of Custody Record was prepared. The Chain of Custody Record provided identification of the samples corresponding to sample labels and specified analyses to be performed by the laboratory. The original Chain of Custody Record accompanied the shipment, and a copy of the record was stored in the project file. When the samples were transferred, the individuals relinquishing and receiving them signed, dated, and noted the time of transfer on the record.

7.0 Field Records

Daily Report and data forms were completed by staff personnel to provide daily record of significant events, observations, and measurements. Field records were signed, dated, and stored in the project file.

APPENDIX B

FIELD DATA SHEETS



DAILY REPORT Page ____ of ___

| Project:BF | > 1110 9 Project | ct No.: <u>06-83</u> | :-644 | |
|-----------------------|---|---------------------------------------|-------------|-----------------|
| • | tive(s): AM/JR Day: | | | 5/12 |
| • | om: 1330 To: 1530; From: | , | | |
| ★ Signed H ★ UST Em. | ASP _ Safety Glasses _ Hard Hergency System Shut-off Switches Located evel of Barricading _ Other PPE (description) | Hat <u>⊀</u> Steel <u></u> → Prope | Toe Boots 🔀 | Safety Vest |
| Weather:S | enny | | | |
| | se: <u>Peristallie pump, wat</u> interface probe | | | vater Level |
| TIME: | WORK DESC | CRIPTION: | | |
| 1330 | Arrived onsite/conducted: | safety ta | ilgate | |
| 1410 | Set up @ MW-1 \$ RW-1 | 9 | | |
| , | - 1 | | | |
| 1445 | Proceeded to tag wells A | 1W-2,MW-3 | MW-4, M | V·S |
| 1530 | signed out & left site | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| Signature: | Jan R | | | Revision 1/24/2 |
| | // | | | Revision 1/24/2 |

| BROADBENT & ASSOCIATES, INC. |
|--|
| ENVIRONMENTAL, WATER RESOURCES & ENGINEERING |

GROUNDWATER MONITORING SITE SHEET

Page / of 3

| Project: | 98 | (110 | -/ | | | | Proje | ct No.:_ | 06-8 | E-6 | H | D | ate: d | 5-15- | (ک |
|----------------|------------------------|---------------------------------------|---------------------------------------|---------------------------------|--------------|------------------------|-----------------------------------|---------------------|--------------------------|--------------|--------|-------|--------|-------|-----|
| Field Represer | ntative: | JR/1 | 411 | | | | Ele | evation: | | | | | | | |
| Formation rec | | | | | High | Low | | | | | • | | | | |
| W. L. Indicato | | | | O | il/Water | Interfac | e ID#: | | (| List # | s of a | ll eq | uip us | ed.) | |
| | WELL ID | | D | | W | | | RECORI |) | | LA | AB A | NAL | SES | |
| Well ID | Well Sampling Order | As-Built Well Diameter (inches) | As-Built Well Screen Interval (ft) | Previous Depth to Water (ft) | Time (24:00) | Depth to LNAPL (ft) | Apparent LNAPL Thickness (ft)* | Depth to Water (fl) | Well Total Depth (ft) | | | | | | |
| MW-1 | | | | | 147 | <u> </u> | | 6 ,5,65 | | | | _ | | | |
| MW-2 | | | | | 1454 | | | 6.22 | 15,25 | | | | | | |
| MW-3 | | | | | 1207 | | | 6.90 | 15,03 | | | _ | | | |
| MW-4 | | | | | 1208 | <u> </u> | | 5.93 | | | _ | | | | |
| MW-5 | | | | | 1 | T | 1 | Jer | i | | | _ | | | |
| RW-1 | | | | | 1415 | 5,61 | 0.01 | 5.62 | 23.62 | | | | | | |
| | | | | | ļ | | | | | | | | | | |
| | | | | | | | | | | | _ | | | | |
| | | | | ļ | | <u> </u> | - | | <u> </u> | | | | | | - |
| | | · · · · · · · · · · · · · · · · · · · | | - | | - | | <u> </u> | | - | | | | | |
| | | | | <u> </u> | - | ļ | | | | - | | | | | |
| | | | - | | <u> </u> | | | | | | - | | | | |
| | | | | | | | | | | - | | | | - | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | - | |
| | | | | | | | | | | - | | | | | |
| | | | | | | | | | | + | | | | | |
| | | _ | | | | | | | + | | | | | | |
| | | | | | | | | | | | | | | | |
| | _ | | | | | | | | | | | | | | |
| | | | | | | | | | | | - | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| * Device use | d to mess | re I NIA1 | PI thicks | 1666. | Baile | er v | 10i1/v | Vater Inte | rface Me | ter) | | (cir | cle on | e) | _ , |

Signature:

Revision: 8/19/11



GROUNDWATER SAMPLING DATA SHEET Page 2 of 3

| ject: | BP III | . i | | J | Project No.: | 06-88- | 644 | Date: 8 | 15-12 |
|--|------------------|--|--------------|------------------|----------------------|--|------------------------|------------------------|------------------|
| | | AW/JR | dan. | | | | | | |
| ili ID: | M W-1 | S | tart Time: | | End Time: | ······································ | Total Time (n | ninutes): | |
| | | | | | | ⊀_ Fl | | | |
| JRGE EQU | IPMENT | D: | sp. Bailer | 12 % Pa | eieraltic Punn | | | | |
| <u> </u> | isp, Tubing | 12 | V Pump | | ristaltic Pump | Otter Ton. | | | |
| Contract of the last of the la | | | | Comments: | | | | | |
| | Improvement N | | (circle one) | | | | | (circle | one) |
| | | | | /ell Volume 1 | ow-Flow Othe | r: | LOW- | | |
| | | IINED WEL | | | וחו | Previous Low-Flo | | ILOW | (lpm) |
| | | olume (gal/ft) (| | | | Total Well Depth | | | (fi) |
| | 1.25" (0.08) | | 3" (0.38) | 1 | | Initial Depth to V | | _ | (ft) |
| (0.66) | 6" (1.50) | 8" ((2.60) | 12" (5.81) | (fi) | a | Pump In-take De | | _ | (ft) |
| ial Well Dept | | | | (ft) | ₩ | | able Drawdown = | (a-b)/8: | (ft |
| tial Depth to | | (| | (ft) | = | Low-Flow Purge | | - | (Lpm)* |
| ater Column I | teight (WCH) = | :(a - 0): -:WCU - Unit 1 | Volume: | | | Comments: | | | |
| | | | voidine. | (gai) | | - | | | |
| | Volumes = WC | | | (gal) | J | *Low-flow purge rai | te should be within ru | nge of instruments use | d but should not |
| | olumes = WCV | x 3. | | (ft) | ▼ □ | exceed 0.25 gpm, D. | randown should not e | exceed Maximum Allov | vable Drawdown. |
| ımp Depth (if | pump useu). | | GROUNDWA | TER STABI | LIZATION PA | RAMETER RI | ECORD | | |
| 70: | Cumulative | Temperature | pH | Conductivity | DO | ORP | Turbidity | Ю | TES |
| Time (24:00) | Volume (L) | °C | F | μS o(mS) | mg/L | mV | NTU | Odor, color, s | theen or other |
| 1431 | 0 | 24.71 | 7.46 | 6.630 0.621 | 2.17 | -[44 | 0.0 | Na II | J HC |
| 1434 | 0.5 | 34.11 | 7.39 | | 2.02 | -158 | 2:/ | 000 | <u> </u> |
| 1437 | 1.0 | 23,95 | 1.36 | 0.614 | 1.73 | -157 | 1. 1 | 000 | ~ |
| 1440 | (,5 | 123.91 | 7.34 | 0.608 | 1.62 | -156 | 0.0 | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | _ | | | | | | | | ····· |
| | | <u> </u> | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | ļ <u>.</u> | | | | | | |
| | | | <u> </u> | | | | | | |
| | | | | - | | | | | |
| | | | | | | | | | <u> </u> |
| Draujous Stab | ilized Parameter | rs | 1 | | | | | <u> </u> | |
| | OMPLETIO | | X Low Flow | w & Parameters S | Stable 3 C | using Volumes & I | Parameters Stable | 5 Casing Vo | olumes |
| PURGEC | OWN LETTO | I RECORD | Other: | | | | | | |
| | <u></u> | SAMDLE CO | LLECTION I | RECORD | | | GEOCHEMI | CAL PARAME | ETERS |
| | | - AL- | | acoro | | P | arameter | Time | Measuremen |
| | ter at Sampling: | | | | | | | 1440 | 1.67 |
| Sample Coll | ected Via: | _ Disp. Bailer | Dedicated | Pump Tubing | | DO (mg/L) | | 1 5 4 - | |
| | Pump Tubing | Other: | | g . | 1115 | Ferrous Iron | | 1111111 | -156 |
| | MW- | \ | Sample Colle | ection Time: | <u> 145 (</u> 24:00) | Redox Pote | ntial (mV) | 1440 | -130 |
| Containers | #1: 6 VOA | (X preserve | ed or unpre | served) | Liter Amber | Alkalinity (| ing/L) | | |
| Comunicia | Other | ······································ | | Other: | | Other: | | | |
| | Other | | | Other: | | Other: | | | |
| L | Oner. | -/- | | | | | | | Revision: 8 |



GROUNDWATER SAMPLING DATA SHEET Page 3 of 3

| ject: | BP III | 0-1 | | | Project No.: | <u> 36-88-6</u> | <u>ulul</u> | Date: 8 | 12-12 |
|---------------|---------------------------------------|----------------|--------------------------|------------------------|---|--------------------|-------------------|-------------------------|------------------|
| , | ntative: | | | | | | | | |
| • | · · · · · · · · · · · · · · · · · · · | | Start Time: | | End Time: | | Total Time | (minutes): | |
| | | | | | 120V Pump | FI | ow Cell | | ļ |
| - | IPMENT | | isp. Bailer | | Peristaltic Pump | | 011 0011 | | |
| | isp. Tubing | | | Comments: | | | and at | the bolt | Athine 8 |
| | INTEGRIT | | un, etc.) (circle me) | Comments: | er deriveligendigen stander delt werde stander. | <u> </u> | omen. | , 10, 20,11 | 77.3 |
| | AMPLING M | | Predetermined V | Vell Volume | Low-Flow Other | | | (circl | e one) |
| | | | L VOLUME | | | | LOW | -FLOW | |
| | iameter Unit V | | | | | Previous Low-Flo | w Purge Rate: | | (lpm) |
| | 1.25" (0.08) | | 3" (0.38) | Other: | | Total Well Depth | (a): | | (ft) |
| (0.66) | | | 12" (5.81) | | | Initial Depth to V | Valer (b): | | (ft) |
| al Well Dept | | | | (ft) | | Pump In-take De | | | (ft |
| ial Depth to | | | | (ft) | │─┼ ┋ [▼] ङ् │ | Maximum Allow | able Drawdown | = (a-b)/8: | (fi |
| iter Column I | leight (WCH) = | (a - b): | | (ft) | | Low-Flow Purge | Rate: | | (Lpm) |
| ter Column ' | Volume (WCV) | = WCH x Unit | Volume: | (gal) | 1 1 | Comments: | | | |
| hree Casing | Volumes = WC | V x 3: | | (gal | 게 [] [| | | | . U. atould and |
| ive Casing V | olumes = WCV | x 5: | | (gal | ` | | | range of instruments to | |
| mp Depth (if | pump used): | | | (fi | | | | t exceed Maximum Alle | Antime Diambiant |
| | | | | 1 | ILIZATION PAR | ORP | Turbidity | NO | DTES |
| Time | Cumulative | Temperature | pН | Conductivity µS or mS | DO mg/L | mV | NTU | | sheen or other |
| (24:00) | Volume (L) | <u>°C</u> | | μο σι πιο | ing/L | 311 4 | | 1 | s product |
| | | | | | | | | | 4 |
| | | | | | | | | in Dich n | iot sample |
| | | | | | | | | \$ 0.01 | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | <u> </u> | | | | | | |
| | | | | | | - | | | |
| | | | | | | | | | |
| | | | - | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | <u> </u> | | | | | | | - | |
| | ilized Parameter | | | | Stable 3 Cas | ina Valumas & F | Parameters Stable | 5 Casing V | olumes |
| PURGE C | OMPLETIO | 4 RECORD | | v & Parameters | Stable 3 Cas | ing voidines & r | arameters Status | 5 Custing . | |
| | | | Other: | | wr | 1 | OFOCUEN | ICAL PARAM | ETERS |
| | S | AMPLE CO | LLECTION I | RECORD | | | | | 1 |
| | ter at Sampling: | | | | | Pi | rameter | Time | Measurement |
| Sample Colle | ected Via: | _ Disp. Bailer | Dedicated | Pump Tubing | | DO (mg/L) | | | |
| | ump Tubing | | | | | Ferrous Iron | (mg/L) | | |
| | | | Sample Colle | ection Time: | (24:00) | Redox Poter | uial (mV) | | |
| | | | d or unpre | | | Alkalinity (r | ng/L) | | |
| Comanions (| | | | | | Other: | | | |
| | Other | | | Other: | | Other: | | | |
| | | | - | | | | | <u> </u> | |

NO. 689905

BESI#

NON-HAZARDOUS WASTE DATA FORM

| Generator's Name and Mailing Address BP WEST COAST PRODUCTS, LLC P.O. BOX 80249 RANCHO SANTA MARGARITA, CA 92688 Generator's Phone: 949-460-5200 Container type removed from site: Drums Generator's Site Address (if different than mailing address) BP 1110-4 1716 Webster Street A laweda, California Container type transported to receiving facility: Drums Vacuum Truck Roll-off Truck Dump Dump | |
|--|---|
| P.O. BOX 80249 RANCHO SANTA MARGARITA, CA 92888 A laweda, California Generator's Phone: 949-480-5200 Container type removed from site: Container type transported to receiving facility: | |
| Generator's Phone: 949-480-5200 Container type removed from site: Container type transported to receiving facility: | |
| Generator's Phone: 949-480-5200 Container type removed from site: Container type transported to receiving facility: | |
| Generator's Phone: 949-460-5200 Container type removed from site: Container type transported to receiving facility: | |
| Container type removed from site: Container type transported to receiving facility: | |
| | |
| ☐ Drums ☐ Vacuum Truck ☐ Roll-off Truck ☐ Dump Truck ☐ Drums ☐ Vacuum Truck ☐ Roll-off Truck ☐ Dump | |
| | Truck |
| □ Other | |
| Quantity 1, 5 (ν) Quantity Volume | |
| Quantity | ATER_ |
| COMPONENTS OF WASTE PPM % COMPONENTS OF WASTE PPM | % |
| В water 99-100% 3. | |
| O 1WATER 99-100% 3 | *************************************** |
| 2. TPH <1% | |
| Waste Profile PROPERTIES: pH 7-10 □ SOLID XIX LIQUID □ SLUDGE □ SLURRY □ OTHER_ | |
| MATARIAN AND ARREST STREET, A DROTTOTOT CONDITION | |
| HANDLING INSTRUCTIONS: WEAR ALL APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT. | |
| HANDLING INSTRUCTIONS: WEAR ALL APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT. | |
| Generator Printed/Typed Name Signature Month | |
| Generator Printed/Typed Name Signature Month | Day Yea |
| Generator Printed/Typed Name Signature Month Some Signature For Generator Certifies that the waste as described is 100% non-hazardous | |
| Generator Printed/Typed Name Signature Month S The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Month S Phone# 530-568-1400 | |
| Generator Printed/Typed Name Signature Month S The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month | Day Yea |
| Generator Printed/Typed Name Signature Month S The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month S Month | 15/12 |
| Generator Printed/Typed Name Signature Month S The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month ASSOCIATES, INC> Month ASSOCIATES, INC> | Day Yea |
| Generator Printed/Typed Name Signature Month S The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month S Month | Day Yea |
| Generator Printed/Typed Name Signature Month S The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month S Month | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Phone# Signature Month Signature Phone# Transporter 1 Printed/Typed Name Transporter 2 Company Name Phone# | Day Yes |
| Generator Printed/Typed Name Tawls Rams The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BROADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter 2 Company Name Transporter 2 Company Name Signature Month Signature | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BRO ADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter 2 Company Name Transporter 2 Company Name Signature Phone# Transporter 2 Printed/Typed Name Signature Month Signature Phone# | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BRO ADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter 2 Company Name Transporter 2 Company Name Signature Phone# Transporter 2 Printed/Typed Name Signature Month Signature Phone# | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BRO ADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter 2 Company Name Transporter 2 Company Name Transporter 2 Printed/Typed Name Signature Month Signature Month Signature Phone# | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BRO ADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter 2 Company Name Transporter 2 Company Name Transporter 2 Printed/Typed Name Signature Month Signature Month Signature Phone# | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BRO ADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter Acknowledgment of Receipt of Materials Transporter 2 Company Name Signature Phone# Transporter 2 Printed/Typed Name Signature Month Signature Phone# | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BRO ADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter 2 Company Name Transporter 2 Company Name Signature Transporter 2 Printed/Typed Name Signature Month Signature Phone# Transporter 2 Printed/Typed Name Signature Phone# | Day Yes |
| Generator Printed/Typed Name Tawls Raws The Generator certifies that the waste as described is 100% non-hazardous Transporter 1 Company Name BRO ADBENT & ASSOCIATES, INC> Transporter 1 Printed/Typed Name Signature Month Signature Month Transporter 2 Company Name Transporter 2 Company Name Signature Phone# Transporter 2 Printed/Typed Name Signature Month Signature Month Signature Phone# | Day Yea |
| Generator Printed/Typed Name Jawls Raws Jawls Jawls | Day Yea |

APPENDIX C

LABORATORY REPORT AND CHAIN-OF-CUSTODY DOCUMENTATION

ANALYTICAL REPORT

TestAmerica Laboratories, Inc. TestAmerica Irvine 17461 Derian Ave Suite 100 Irvine, CA 92614-5817

Tel: (949)261-1022

TestAmerica Job ID: 440-20669-1

Client Project/Site: ARCO 11104, Alameda

For:

Broadbent & Associates, Inc. 875 Cotting Lane Suite G Vacaville, California 95688

Attn: Kristene Tidwell

Authorized for release by: 8/30/2012 12:59:20 PM

Pat Abe Project Manager I pat.abe@testamericainc.com

The test results in this report meet all 2003 NELAC and 2009 TNI requirements for accredited parameters, exceptions are noted in this report. This report may not be reproduced except in full, and with written approval from the laboratory. For questions please contact the Project Manager at the e-mail address or telephone number listed on this page.

This report has been electronically signed and authorized by the signatory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

TestAmerica Job ID: 440-20669-1

Table of Contents

| Cover Page | 1 |
|-----------------------|----|
| Table of Contents | 2 |
| Sample Summary | 3 |
| Case Narrative | 4 |
| Client Sample Results | 5 |
| Chronicle | 6 |
| QC Sample Results | 7 |
| QC Association | 10 |
| Definitions | 11 |
| Certification Summary | 12 |
| Chain of Custody | 13 |
| Receipt Checklists | 14 |

6

0

9

Sample Summary

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

TestAmerica Job ID: 440-20669-1

| Lab Sample ID | Client Sample ID | Matrix | Collected | Received |
|---------------|------------------|--------|----------------|----------------|
| 440-20669-1 | MW-1 | Water | 08/15/12 14:45 | 08/16/12 09:45 |

3

4

6

R

9

10

11

Case Narrative

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

TestAmerica Job ID: 440-20669-1

Job ID: 440-20669-1

Laboratory: TestAmerica Irvine

Narrative

Job Narrative 440-20669-1

Comments

No additional comments.

Receipt

The samples were received on 8/16/2012 9:45 AM; the samples arrived in good condition, properly preserved and, where required, on ice. The temperature of the cooler at receipt was 5.7° C.

GC/MS VOA

Method(s) 8260B: Due to the high concentration of MTBE in the source sample, the matrix spike / matrix spike duplicate (MS/MS) does not provide useful spike recovery and precision information for batch 46911. The batch was accepted based on acceptable recoveries in the associated laboratory control sample (LCS).

No other analytical or quality issues were noted.

GC VOA

Method(s) 8015B: Surrogate recovery for the following sample(s) was outside control limits: MW-1 (440-20669-1). Evidence of matrix interference is present; therefore, re-extraction and/or re-analysis was not performed.

No other analytical or quality issues were noted.

VOA Prep

No analytical or quality issues were noted.

3

4

6

_

0

9

10

1

TestAmerica Job ID: 440-20669-1

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

Lab Sample ID: 440-20669-1

Matrix: Water

Client Sample ID: MW-1 Date Collected: 08/15/12 14:45 Date Received: 08/16/12 09:45

| Analyte | Result | Qualifier | RL | Unit | D | Prepared | Analyzed | Dil Fac |
|------------------------------------|----------------|-----------|----------|------|---|----------|----------------|---------|
| 1,2-Dibromoethane (EDB) | ND | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| 1,2-Dichloroethane | ND | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| Benzene | 19 | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| Ethanol | ND | | 150 | ug/L | | | 08/22/12 03:14 | 1 |
| Ethylbenzene | 8.2 | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| Ethyl-t-butyl ether (ETBE) | ND | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| Isopropyl Ether (DIPE) | ND | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| m,p-Xylene | 340 | | 1.0 | ug/L | | | 08/22/12 03:14 | 1 |
| Methyl-t-Butyl Ether (MTBE) | 16 | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| o-Xylene | 1.1 | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| Tert-amyl-methyl ether (TAME) | 1.3 | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| tert-Butyl alcohol (TBA) | 180 | | 10 | ug/L | | | 08/22/12 03:14 | 1 |
| Toluene | 1.1 | | 0.50 | ug/L | | | 08/22/12 03:14 | 1 |
| Xylenes, Total | 340 | | 1.0 | ug/L | | | 08/22/12 03:14 | 1 |
| Surrogate | %Recovery | Qualifier | Limits | | | Prepared | Analyzed | Dil Fac |
| 4-Bromofluorobenzene (Surr) | 110 | | 80 - 120 | | - | | 08/22/12 03:14 | 1 |
| Dibromofluoromethane (Surr) | 103 | | 80 - 120 | | | | 08/22/12 03:14 | 1 |
| Toluene-d8 (Surr) | 99 | | 80 - 120 | | | | 08/22/12 03:14 | 1 |
| - Method: 8015B/5030B - Gasolin | e Range Organi | cs (GC) | | | | | | |
| Analyte | Result | Qualifier | RL | Unit | D | Prepared | Analyzed | Dil Fac |
| GRO (C6-C12) | 1800 | | 1000 | ug/L | | | 08/24/12 21:41 | 20 |
| Surrogate | %Recovery | Qualifier | Limits | | | Prepared | Analyzed | Dil Fac |
| 4-Bromofluorobenzene (Surr) | | LH | 65 - 140 | | - | | 08/24/12 21:41 | |

Lab Chronicle

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda TestAmerica Job ID: 440-20669-1

Lab Sample ID: 440-20669-1

Matrix: Water

Date Collected: 08/15/12 14:45 Date Received: 08/16/12 09:45

Client Sample ID: MW-1

| | Batch | Batch | | Dil | Initial | Final | Batch | Prepared | | |
|-----------|----------|-------------|-----|--------|---------|--------|--------|----------------|---------|---------|
| Prep Type | Type | Method | Run | Factor | Amount | Amount | Number | or Analyzed | Analyst | Lab |
| Total/NA | Analysis | 8260B/5030B | | 1 | 10 mL | 10 mL | 46911 | 08/22/12 03:14 | YK | TAL IRV |
| Total/NA | Analysis | 8015B/5030B | | 20 | 10 mL | 10 mL | 47405 | 08/24/12 21:41 | PH | TAL IRV |

Laboratory References:

TAL IRV = TestAmerica Irvine, 17461 Derian Ave, Suite 100, Irvine, CA 92614-5817, TEL (949)261-1022

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

Method: 8260B/5030B - Volatile Organic Compounds (GC/MS)

Lab Sample ID: MB 440-46911/3 Client Sample ID: Method Blank Matrix: Water Prep Type: Total/NA

Analysis Batch: 46911

| | MB | MR | | | | | | |
|-------------------------------|--------|-----------|------|------|---|----------|----------------|---------|
| Analyte | Result | Qualifier | RL | Unit | D | Prepared | Analyzed | Dil Fac |
| 1,2-Dibromoethane (EDB) | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| 1,2-Dichloroethane | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| Benzene | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| Ethanol | ND | | 150 | ug/L | | | 08/21/12 22:30 | 1 |
| Ethylbenzene | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| Ethyl-t-butyl ether (ETBE) | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| Isopropyl Ether (DIPE) | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| m,p-Xylene | ND | | 1.0 | ug/L | | | 08/21/12 22:30 | 1 |
| Methyl-t-Butyl Ether (MTBE) | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| o-Xylene | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| Tert-amyl-methyl ether (TAME) | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| tert-Butyl alcohol (TBA) | ND | | 10 | ug/L | | | 08/21/12 22:30 | 1 |
| Toluene | ND | | 0.50 | ug/L | | | 08/21/12 22:30 | 1 |
| Xylenes, Total | ND | | 1.0 | ug/L | | | 08/21/12 22:30 | 1 |
| | | | | | | | | |

MB MB

| Surrogate | %Recovery Qualifier | Limits | Prepared | Analyzed | Dil Fac |
|-----------------------------|---------------------|----------|----------|----------------|---------|
| 4-Bromofluorobenzene (Surr) | 105 | 80 - 120 | | 08/21/12 22:30 | 1 |
| Dibromofluoromethane (Surr) | 101 | 80 - 120 | | 08/21/12 22:30 | 1 |
| Toluene-d8 (Surr) | 97 | 80 - 120 | | 08/21/12 22:30 | 1 |

Lab Sample ID: LCS 440-46911/4

Matrix: Water

Analyte

Benzene

Ethanol

Ethylbenzene

m,p-Xylene

o-Xylene

Toluene

Analysis Batch: 46911

1,2-Dibromoethane (EDB)

Ethyl-t-butyl ether (ETBE)

Isopropyl Ether (DIPE)

tert-Butyl alcohol (TBA)

1,2-Dichloroethane

Client Sample ID: Lab Control Sample Prep Type: Total/NA

LCS LCS Spike %Rec. Added Result Qualifier Unit %Rec Limits 25.0 26.4 75 _ 125 106 ug/L 25.0 27.0 ug/L 108 60 - 140 25.0 22.7 ug/L 91 70 - 120 74 250 186 ug/L 40 - 155 25.0 26.7 107 75 - 125 ug/L 25.0 24.3 ug/L 97 65 - 135 25.0 21.7 87 60 - 135 ug/L 75 - 125 50.0 51.5 ug/L 103 25.0 24.8 99 60 - 135 Methyl-t-Butyl Ether (MTBE) ug/L 25.0 26.8 107 75 - 125 ug/L Tert-amyl-methyl ether (TAME) 25.0 24.2 97 60 - 135 ug/L

128

24.4

ug/L

ug/L

103

97

70 - 135

70 - 120

LCS LCS Surrogate %Recovery Qualifier Limits 80 - 120 4-Bromofluorobenzene (Surr) 103 Dibromofluoromethane (Surr) 105 80 - 120 80 - 120 Toluene-d8 (Surr) 99

> TestAmerica Irvine 8/30/2012

125

25.0

TestAmerica Job ID: 440-20669-1

2

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

Method: 8260B/5030B - Volatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: 440-20826-A-2 MS

Matrix: Water

Client Sample ID: Matrix Spike
Prep Type: Total/NA

Analysis Batch: 46911

| | Sample | Sample | Spike | MS | MS | | | | %Rec. | |
|-------------------------------|--------|-----------|-------|--------|-----------|------|---|------|---------------------|--|
| Analyte | Result | Qualifier | Added | Result | Qualifier | Unit | D | %Rec | Limits | |
| 1,2-Dibromoethane (EDB) | ND | | 25.0 | 28.2 | | ug/L | | 113 | 70 - 130 | |
| 1,2-Dichloroethane | ND | | 25.0 | 27.2 | | ug/L | | 109 | 60 - 140 | |
| Benzene | ND | | 25.0 | 23.0 | | ug/L | | 92 | 65 _ 125 | |
| Ethanol | ND | | 250 | 191 | | ug/L | | 76 | 40 - 155 | |
| Ethylbenzene | ND | | 25.0 | 27.7 | | ug/L | | 111 | 65 - 130 | |
| Ethyl-t-butyl ether (ETBE) | ND | | 25.0 | 23.5 | | ug/L | | 94 | 60 - 135 | |
| Isopropyl Ether (DIPE) | ND | | 25.0 | 20.4 | | ug/L | | 82 | 60 - 140 | |
| m,p-Xylene | ND | | 50.0 | 53.7 | | ug/L | | 107 | 65 _ 130 | |
| Methyl-t-Butyl Ether (MTBE) | 340 | EY | 25.0 | 362 | EY BB | ug/L | | 99 | 55 ₋ 145 | |
| o-Xylene | ND | | 25.0 | 27.1 | | ug/L | | 108 | 65 - 125 | |
| Tert-amyl-methyl ether (TAME) | 1.9 | | 25.0 | 25.5 | | ug/L | | 94 | 60 - 140 | |
| tert-Butyl alcohol (TBA) | 130 | | 125 | 262 | | ug/L | | 105 | 65 _ 140 | |
| Toluene | ND | | 25.0 | 25.0 | | ug/L | | 100 | 70 - 125 | |

MS MS

| | Surrogate | %Recovery | Qualifier | Limits |
|---|-----------------------------|-----------|-----------|----------|
| | 4-Bromofluorobenzene (Surr) | 105 | | 80 - 120 |
| | Dibromofluoromethane (Surr) | 97 | | 80 - 120 |
| ĺ | Toluene-d8 (Surr) | 99 | | 80 - 120 |

Lab Sample ID: 440-20826-A-2 MSD

Matrix: Water

Analysis Batch: 46911

| Client Sample ID: Matrix Spike Duplicate | |
|--|--|
| Prep Type: Total/NA | |

| - 1 | Analysis Batom 400 m | | | | | | | | | | | |
|-----|-------------------------------|--------|-----------|-------|--------|-----------|------|---|------|----------|-----|-------|
| İ | | Sample | Sample | Spike | MSD | MSD | | | | %Rec. | | RPD |
| | Analyte | Result | Qualifier | Added | Result | Qualifier | Unit | D | %Rec | Limits | RPD | Limit |
| | 1,2-Dibromoethane (EDB) | ND | | 25.0 | 25.8 | | ug/L | | 103 | 70 - 130 | 9 | 25 |
| İ | 1,2-Dichloroethane | ND | | 25.0 | 28.2 | | ug/L | | 113 | 60 - 140 | 3 | 20 |
| İ | Benzene | ND | | 25.0 | 21.7 | | ug/L | | 87 | 65 - 125 | 6 | 20 |
| İ | Ethanol | ND | | 250 | 174 | | ug/L | | 69 | 40 - 155 | 9 | 30 |
| İ | Ethylbenzene | ND | | 25.0 | 25.5 | | ug/L | | 102 | 65 - 130 | 8 | 20 |
| İ | Ethyl-t-butyl ether (ETBE) | ND | | 25.0 | 22.3 | | ug/L | | 89 | 60 - 135 | 5 | 25 |
| İ | Isopropyl Ether (DIPE) | ND | | 25.0 | 19.7 | | ug/L | | 79 | 60 - 140 | 3 | 25 |
| ı | m,p-Xylene | ND | | 50.0 | 49.1 | | ug/L | | 98 | 65 - 130 | 9 | 25 |
| İ | Methyl-t-Butyl Ether (MTBE) | 340 | EY | 25.0 | 371 | EY BB | ug/L | | 137 | 55 - 145 | 3 | 25 |
| İ | o-Xylene | ND | | 25.0 | 25.2 | | ug/L | | 101 | 65 - 125 | 7 | 20 |
| İ | Tert-amyl-methyl ether (TAME) | 1.9 | | 25.0 | 26.1 | | ug/L | | 97 | 60 - 140 | 2 | 30 |
| İ | tert-Butyl alcohol (TBA) | 130 | | 125 | 257 | | ug/L | | 102 | 65 - 140 | 2 | 25 |
| ı | Toluene | ND | | 25.0 | 23.4 | | ug/L | | 94 | 70 - 125 | 7 | 20 |
| | | | | | | | | | | | | |

| | MSD | MS |
|----------|-------------|----|
| urromata | 9/ Bassyany | A |

| Surrogate | %Recovery | Qualifier | Limits |
|-----------------------------|-----------|-----------|----------|
| 4-Bromofluorobenzene (Surr) | 104 | | 80 - 120 |
| Dibromofluoromethane (Surr) | 101 | | 80 - 120 |
| Toluene-d8 (Surr) | 100 | | 80 - 120 |

3

4

6

R

9

4 4

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda TestAmerica Job ID: 440-20669-1

Method: 8015B/5030B - Gasoline Range Organics (GC)

Lab Sample ID: MB 440-47405/32 Client Sample ID: Method Blank Matrix: Water Prep Type: Total/NA

Analysis Batch: 47405

мв мв Result Qualifier RL Unit D Analyzed Dil Fac Analyte Prepared 50 08/24/12 09:16 GRO (C6-C12) ND ug/L

MB MB

Qualifier Limits Dil Fac Surrogate %Recovery Prepared Analyzed 65 - 140 08/24/12 09:16 4-Bromofluorobenzene (Surr) 85

Lab Sample ID: LCS 440-47405/31 Client Sample ID: Lab Control Sample Matrix: Water Prep Type: Total/NA

Analysis Batch: 47405

LCS LCS Spike %Rec. Added Qualifier Analyte Result Unit Limits %Rec GRO (C4-C12) 800 ug/L 87 80 - 120 699

LCS LCS Surrogate %Recovery Qualifier Limits 65 - 140 4-Bromofluorobenzene (Surr) 109

Lab Sample ID: 440-20422-A-2 MS Client Sample ID: Matrix Spike Matrix: Water Prep Type: Total/NA

Analysis Batch: 47405

MS MS %Rec. Sample Sample Spike Qualifier Added Qualifier Result Result Unit %Rec Limits GRO (C4-C12) ND 800 717 ug/L 65 - 140

MS MS Qualifier Surrogate %Recovery Limits 4-Bromofluorobenzene (Surr) 124 65 - 140

Lab Sample ID: 440-20422-A-2 MSD Client Sample ID: Matrix Spike Duplicate Prep Type: Total/NA

Matrix: Water

Analysis Batch: 47405

Sample Sample MSD MSD %Rec. RPD Spike Analyte Result Qualifier Added Result Qualifier Unit D %Rec Limits **RPD** Limit GRO (C4-C12) ND 800 714 ug/L 89 65 - 140 20

MSD MSD %Recovery Qualifier Surrogate Limits 4-Bromofluorobenzene (Surr) 129 65 - 140

QC Association Summary

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

TestAmerica Job ID: 440-20669-1

GC/MS VOA

Analysis Batch: 46911

| Lab Sample ID | Client Sample ID | Prep Type | Matrix | Method Prep Batch |
|-------------------|------------------------|-----------|--------|-------------------|
| 440-20669-1 | MW-1 | Total/NA | Water | 8260B/5030B |
| 440-20826-A-2 MS | Matrix Spike | Total/NA | Water | 8260B/5030B |
| 440-20826-A-2 MSD | Matrix Spike Duplicate | Total/NA | Water | 8260B/5030B |
| LCS 440-46911/4 | Lab Control Sample | Total/NA | Water | 8260B/5030B |
| MB 440-46911/3 | Method Blank | Total/NA | Water | 8260B/5030B |

GC VOA

Analysis Batch: 47405

| Lab Sample ID | Client Sample ID | Prep Type | Matrix | Method | Prep Batch |
|-----------------|---------------------------|-----------|--------|-------------|------------|
| 440-20422-A-2 M | S Matrix Spike | Total/NA | Water | 8015B/5030B | |
| 440-20422-A-2 M | SD Matrix Spike Duplicate | Total/NA | Water | 8015B/5030B | |
| 440-20669-1 | MW-1 | Total/NA | Water | 8015B/5030B | |
| LCS 440-47405/3 | 1 Lab Control Sample | Total/NA | Water | 8015B/5030B | |
| MB 440-47405/32 | 2 Method Blank | Total/NA | Water | 8015B/5030B | |

2

- 1

5

6

1

8

9

1 N

1 1

Definitions/Glossary

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda TestAmerica Job ID: 440-20669-1

Qualifiers GC/MS VOA

| Qualifier | Qualifier Description |
|-----------|---------------------------------|
| ВВ | Sample > 4X spike concentration |

Toxicity Equivalent Quotient (Dioxin)

ΕY Result exceeds normal dynamic range; reported as a min. est.

GC VOA

| Qualifier | Qualifier Description |
|-----------|---|
| LH | Surrogate Recoveries were higher than QC limits |

Glossary

TEQ

| Abbreviation | These commonly used abbreviations may or may not be present in this report. |
|----------------|--|
| \$ | Listed under the "D" column to designate that the result is reported on a dry weight basis |
| %R | Percent Recovery |
| CNF | Contains no Free Liquid |
| DL, RA, RE, IN | Indicates a Dilution, Reanalysis, Re-extraction, or additional Initial metals/anion analysis of the sample |
| EDL | Estimated Detection Limit |
| EPA | United States Environmental Protection Agency |
| MDL | Method Detection Limit |
| ML | Minimum Level (Dioxin) |
| ND | Not detected at the reporting limit (or MDL or EDL if shown) |
| PQL | Practical Quantitation Limit |
| QC | Quality Control |
| RL | Reporting Limit |
| RPD | Relative Percent Difference, a measure of the relative difference between two points |
| TEF | Toxicity Equivalent Factor (Dioxin) |

Certification Summary

Client: Broadbent & Associates, Inc. Project/Site: ARCO 11104, Alameda

TestAmerica Job ID: 440-20669-1

2

Laboratory: TestAmerica Irvine

All certifications held by this laboratory are listed. Not all certifications are applicable to this report.

| Authority | Program | EPA Region | Certification ID | Expiration Date |
|--------------------------|-----------------------------|------------|-------------------|-----------------|
| Arizona | State Program | 9 | AZ0671 | 10-13-12 |
| California | LA Cty Sanitation Districts | 9 | 10256 | 01-31-13 |
| California | NELAC | 9 | 1108CA | 01-31-13 |
| California | State Program | 9 | 2706 | 06-30-14 |
| Guam | State Program | 9 | Cert. No. 12.002r | 01-23-13 |
| Hawaii | State Program | 9 | N/A | 01-31-13 |
| Nevada | State Program | 9 | CA015312007A | 07-31-12 |
| New Mexico | State Program | 6 | N/A | 01-31-12 |
| Northern Mariana Islands | State Program | 9 | MP0002 | 01-31-13 |
| Oregon | NELAC | 10 | 4005 | 09-12-12 |
| USDA | Federal | | P330-09-00080 | 06-06-14 |

A

5

7

8

9

10

10

Temp Blank: Yes / No

440-20669

Populari de la company de la c

| | UD | Laborat | ory Wal | nag | em | eni | | og | rar. | // L | civi) | , (| ,na | 111 (| טוכ | us | roa | уп | IECO. | u | | | | | | | rage | 01 |
|---|---------------------------|---------|-------------------|-------------------------------|---|---------------------------------------|--------------------------|---------------------|-------------|-------------------------------|-----------------------|--------------|---|-------------------|--|---------------------------|------------------------|------------------|--|---------------------------------|--|-----------|-------------------|------------------|-------------------------------------|--|-------------------|---------|
| | | BP Site | BP Site Node Path | | | | :BP 11104 | | | | | | | | Req Due Date (mm/dd/yy): | | | | | | | | | Rush TAT: Yes No | | | | |
| | | ВР | Facility No | : | | | | 11 | 104 | | | | | | | Lab \ | Nork | Orde | er Num | ber: | | | | | | | | |
| Lab Name: Test America | | | | | | Facility Address: 1716 Webster Avenue | | | | | | | | | Consultant/ | | | | | ant/Co | t/Contractor: Broadbent & Associates Inc. | | | | | | | |
| Lab Address: 17461 Derian Avenue, Suite 100, Irvine, CA | | | | | City, State, ZIP Code: Alameda, CA | | | | | | | | | Consultar | | | | | ant/Co | ontractor Project No: 09-88-601 | | | | | | | | |
| Lab PM: Pat Abe | | | | | | Lead Regulatory Agency: ACEH | | | | | | | | | Address: 875 Cotting Lane, Suite G, Va | | | | | | | acaville, | wille, California | | | | | |
| Lab Phone: 949-261-1022 | | | | | California Global ID No.: T0600101651 | | | | | | | | Consul | | | | | | consultant/Contractor PM: Kristene Tidwell | | | | | | | | | |
| Lab Shipping Accnt: Fed ex#: 11103-6633-7 | | | | | Enfos Proposal No/ WR#: 005G6-0003-/ WR245692 | | | | | | | | 92 | 2 Phone: 707-455- | | | | | | 5-7290 / | 7290 / 707-455-7295 (f) Email: ktidwell@broadbentinc.com | | | | | | | |
| Lab Bottle Order No: 0114301X | | | | | Accounting Mode: Provision x OOC-BU | | | | | | | | | OOC-RM E | | | | | Email EDD To: <u>ktidwell@broadben</u> | | | | | lbentii | tinc.com and to lab.enfosdoc@bp.com | | | |
| Other Info: | | | | | Stage: Execute (40) Activity: Project Spend | | | | | | | (80) | (80) | | | | | Invoice To: BP x | | | | <u>x</u> | Contractor | | | | | |
| BP Project Manager (PM): Shannon Couch | | | | | Matrix I | | | | | No. Containers / Preservative | | | | | | | | | Requested Analyses | | | | | | | Report Type & QC Level | | |
| BP PM Phone: 925-275-3804 | | | | | | | | \int | | | | | 000000000000000000000000000000000000000 | | | | 8260 | | | | | | | | | | andard | |
| BP PM Email: shannon.couch@bp.com | | | | 1 | | | ے | Container | | | | | adeliticación | | | | l by 8 | | | | | | | | | Full Data P | ackage | |
| Lab No. | Sample Description | Date | Time | Soil / Solid | Water / Liquid | Air / Vapor | Is this location a well? | Total Number of Con | Unpreserved | H2SO4 | HNO3 | Ę | Methanol | | GRO by 8015M | BTEX/5 FO +EDB | 1,2-DCA and Ethanol by | | | | | | | | | C Note: If sample not Sample* in commen and initial any prepr | ts and single-str | ike out |
| | MW-1 | 8/15/12 | 1445 | | х | | у | 6 | х | | | х | A CONTRACTOR | | х | x | x | | | | | | | | | | | |
| | am - | -S | 1230000 | | .X | | , | 6 | | | District of the least | 7 | a constitue | | } (=== | - X | ¥ | as | | | | | | | | | | |
| | TB -11104- 08152012 | 8/15/12 | *ntition | | х | | | 2 | | | | х | * Announce | | | | | | | | | | | | | | ON HOLD | |
| | | | | | | | | | | | | | Arabat statu | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | *************************************** | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | and a decision | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | - Contraction | | | | | | | | | ļ | | | | | | |
| | | | | | | | | | | | | | 0.000 | | | | | | | | | <u> </u> | _ | | | | | |
| | | | | | | | | | | | | | 0.000.00000 | | | | | | | | | | | _ | | | | |
| | | | | | | | | | | | | | Sections | | <u> </u> | | | | | | | | | | | | T = | |
| Sampler's Name: Alex Martine 2 | | | | Relinquished By / Affiliation | | | | | | | | Date Time | | | | Accepted By / Affiliation | | | | | | | | Date | Time | | | |
| Sampler's Company: Broadbent & Associates | | | | Olen Modern | | | | | | | t | 7/ 15 | /K | 163 | 0 | ert ee ee | W | SA | ul | | U | 41 | | 8/14/12 | 9-45 | | | |
| Shipment Method: Fed Ex Ship Date: \$/15/17 | | | | | | | | | | | | | - | | | | | | | | | | | | | | | |
| Shipme | ent Tracking No: \$005 31 | | | | | | | | | | | Α. | 20.00000 | | <u> </u> | | | | | | | | | | | | | |
| Specia | al Instructions: 🚶 📚 🕤 🦪 | 125U1+5 | 5e 00 | (a | re. | 5. | ~0 V | M | 4 | 77 | | 517 | € 🕴 | | | | | _ | _ | \ | | | A., | | | | | |

Cooler Temp on Receipt: _

THIS LINE - LAB USE ONLY: Custody Seals in Practice 30, 2012

Trip Blank Yes //No

MS/MSD Sample Submitted: Yes No

BP LaMP COG-Rev. 7, Aug 23, 2011

Login Sample Receipt Checklist

Client: Broadbent & Associates, Inc.

Job Number: 440-20669-1

Login Number: 20669 List Source: TestAmerica Irvine

List Number: 1

Creator: Freitag, Kevin R

| . | | |
|--|--------|---------------|
| Question | Answer | Comment |
| Radioactivity either was not measured or, if measured, is at or below background | True | |
| The cooler's custody seal, if present, is intact. | True | |
| The cooler or samples do not appear to have been compromised or tampered with. | True | |
| Samples were received on ice. | True | |
| Cooler Temperature is acceptable. | True | |
| Cooler Temperature is recorded. | True | |
| COC is present. | True | |
| COC is filled out in ink and legible. | True | |
| COC is filled out with all pertinent information. | True | |
| Is the Field Sampler's name present on COC? | True | Alex Martinez |
| There are no discrepancies between the sample IDs on the containers and the COC. | True | |
| Samples are received within Holding Time. | True | |
| Sample containers have legible labels. | True | |
| Containers are not broken or leaking. | True | |
| Sample collection date/times are provided. | True | |
| Appropriate sample containers are used. | True | |
| Sample bottles are completely filled. | True | |
| Sample Preservation Verified. | N/A | |
| There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs | True | |
| VOA sample vials do not have headspace or bubble is <6mm (1/4") in diameter. | True | |
| Multiphasic samples are not present. | True | |
| Samples do not require splitting or compositing. | True | |
| Residual Chlorine Checked. | N/A | |
| | | |

2

А

5

0

10

11

APPENDIX D

GEOTRACKER UPLOAD AND CONFIRMATION RECEIPTS

GeoTracker ESI Page 1 of 1

STATE WATER RESOURCES CONTROL BOARD

GEOTRACKER ESI

UPLOADING A EDF FILE

SUCCESS

Processing is complete. No errors were found! Your file has been successfully submitted!

Submittal Type: EDF

Report Title: 3Q12 GW Monitoring

Report Type: Monitoring Report - Semi-Annually

Facility Global ID: T0600101651
Facility Name: BP #11104

File Name: 440-20669-1_30 Aug 12 1401_EDF.zip

Organization Name: Broadbent & Associates, Inc.

Username: BROADBENT-C IP Address: 67.118.40.90

Submittal Date/Time: 10/15/2012 9:55:37 AM

Confirmation Number: 6365659356

VIEW QC REPORT

VIEW DETECTIONS REPORT

Copyright © 2012 State of California

GeoTracker ESI Page 1 of 1

STATE WATER RESOURCES CONTROL BOARD

GEOTRACKER ESI

UPLOADING A GEO_WELL FILE

SUCCESS

Processing is complete. No errors were found! Your file has been successfully submitted!

Submittal Type: GEO_WELL

Report Title: 3Q12 GEO_WELL 11104

Facility Global ID: T0600101651
Facility Name: BP #11104

File Name: GEO WELL.zip

Organization Name: Broadbent & Associates, Inc.

Username: BROADBENT-C IP Address: 67.118.40.90

Submittal Date/Time: 10/15/2012 9:58:41 AM

Confirmation Number: 6165242016

Copyright © 2012 State of California