



76 Broadway
Sacramento, California 95818

RECEIVED

2:20 pm, Oct 16, 2007

Alameda County
Environmental Health

October 11, 2007

Ms. Donna Drogos
Supervising Hazardous Materials Specialist
Alameda County Health Agency
1131 Harbor Bay Parkway
Alameda, California 94502

Re: Hydropunch Groundwater Investigation Report
76 Service Station No. 3072
2445 Castro Valley Blvd.
Castro Valley, CA

Dear Ms. Drogos:

I declare under penalty of perjury that to the best of my knowledge the information and/or recommendations contained in the attached report is/are true and correct.

If you have any questions or need additional information, please contact me at (916) 558-7612.

Sincerely,

A handwritten signature in black ink that reads "Bill Borgh".

Bill Borgh
Site Manager – Risk Management and Remediation

Attachment



1590 Solano Way
#A
Concord, CA 94520

925.688.1200 PHONE
925.688.0388 FAX

www.TRCsolutions.com

October 10, 2007

TRC Project No. 125874

Ms. Donna Drogos
Supervising Hazardous Materials Specialist
Alameda County Environmental Health
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

SITE: 76 SERVICE STATION NO. 3072
2445 CASTRO VALLEY BLVD
CASTRO VALLEY, CALIFORNIA

RE: HYDROPUNCH GROUNDWATER INVESTIGATION REPORT

Dear Ms. Drogos:

On behalf of ConocoPhillips, TRC submits this *Hydropunch Groundwater Investigation Report* documenting additional groundwater investigation activities at the 76 Service Station No. 3072, located at 2445 Castro Valley Blvd in Castro Valley, California. This work was performed in accordance to a work plan submitted to the Alameda County Environmental Health (ACEH) as a response to a results obtained during a baseline completed for ConocoPhillips.

Please call Keith Woodburne at (925) 688-2488 if you have any questions regarding this report.

Sincerely,

Rachelle Dunn
Senior Staff Geologist

Keith Woodburne, P.G.
Senior Project Manager

Enclosure

cc: Bill Borgh, ConocoPhillips (electronic upload only)

HYDROPUNCH GROUNDWATER INVESTIGATION REPORT

October 10, 2007

76 Service Station No. 3072
2445 Castro Valley Blvd.
Castro Valley, California

TRC Project No. 125874

Prepared For:

ConocoPhillips Company
76 Broadway
Sacramento, California 94818

By:



Rachelle Dunn
Senior Staff Geologist



Keith Woodburne P.G.
Senior Project Manager



TRC
1590 Solano Way
Concord, California
(925) 688-1200



TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1.0 INTRODUCTION	1
2.0 SITE DESCRIPTION	1
2.1 GEOLOGY AND HYDROGEOLOGY	1
3.0 SITE BACKGROUND	2
4.0 SITE INVESTIGATION ACTIVITIES	3
4.1 PRE-FIELD ACTIVITIES	3
4.2 CPT HYDROPUNCH GROUNDWATER INVESTIGATION	3
4.3 ANALYTICAL RESULTS	4
5.0 CONCLUSIONS AND RECOMMENDATIONS	4

Figures

- 1 Vicinity Map
- 2 Site Plan Showing CPT Hydropunch and Proposed Monitoring Well Locations

Tables

- 1 Grab Groundwater Analytical Results

Appendices

- A Drilling Permits
- B CPT Site Investigation Report (Gregg Drilling)
- C Laboratory Analytical Reports and Chains of Custody Records



Hydropunch Groundwater Investigation Report

76 Service Station 3072

October 10, 2007

Page 1

1.0 INTRODUCTION

On behalf of ConocoPhillips, TRC submits this report of additional site assessment performed at 76 Service Station No. 3072, located at 2445 Castro Valley Blvd. in Castro Valley, California (the Site, Figure 1). This work was performed in accordance with the Additional Soil and Groundwater Investigation Work Plan submitted to the Alameda County Health Care Services Agency (ACHCS) on February 14, 2006.

The objective of this assessment was to further characterize the extent of the dissolved-phase hydrocarbons in the shallow water-bearing zone onsite.

The scope of work for this assessment involved the following:

- Advancement of Cone Penetrometer Test (CPT) borings at five onsite locations.
- Collection of depth-discreet grab groundwater samples using a hydropunch sampler for analysis at a state certified laboratory.
- Evaluate groundwater data to determine the lateral and vertical extent of groundwater impacts and determine if monitoring wells are required to better define the dissolved-phase hydrocarbon plume.

This report documents the CPT hydropunch groundwater investigation completed between May 3 and May 4, 2007.

2.0 SITE DESCRIPTION

The site is currently an active 76 service station located on the corner of Castro Valley Boulevard and Strobridge Avenue in Castro Valley, California (Figure 1). Current site facilities include a station building, lube bay, an auto service building, three underground fuel storage tanks, one underground waste oil storage tank, and three dispenser islands. Locations of the pertinent site features are shown on Figure 2.

2.1 Geology and Hydrogeology

Based on data collected during the recent baseline assessment and previous soil and groundwater investigations conducted at the site, lithologies observed beneath the site consist of silts, clays, and fine sands. Shale has also been observed underlying the clay and fine sands from 10 to 50 feet below grade (fbg).

Groundwater has been encountered at the site historically between 6 and 9 fbg. During the recent baseline investigation, groundwater was encountered at depths of between 15 and 25 fbg on the northern portion of the site and 47 to 50 fbg on the southern portion of the site (TRC, 2005). Historically, the groundwater flow direction has been to the northeast (Kaprealian Engineering (KEI), 1991).



Hydropunch Groundwater Investigation Report

76 Service Station 3072

October 10, 2007

Page 2

3.0 SITE BACKGROUND

November 1989 through February 1990: Three 10,000-gallon underground storage tanks (USTs), one 550-gallon waste oil UST, and the associated product piping were removed and replaced. The UST pits were over excavated to remove impacted soil (KEI, 1991).

November 14, 1989: Six soil samples (A1, A2, B1, B2, C1, and C2) were collected from below the fuel USTs and one soil sample (WO1) was collected from below the waste oil UST. Samples collected from beneath the gasoline USTs contained concentrations of total petroleum hydrocarbons as gasoline (TPH-g) ranging from below laboratory reporting limits to 11 parts per million (ppm). Benzene, toluene, ethylbenzene, and xylenes (BTEX) were below laboratory reporting limits. Total petroleum hydrocarbons as diesel (TPH-d) were below reported laboratory limits in the sample collected from beneath the diesel UST. The soil samples collected from beneath the waste oil tank contained reportable concentrations of TPH-g, metals, and 1,1-dichloroethene (1,1-DCE). Analytical results for all other analytes were below laboratory reporting limits (KEI, 1991).

November 16, 1989: Six sidewall soil samples (SW1 through SW6) and a grab water sample were collected from the fuel UST excavation. Samples SW1 and SW4 contained TPH-g concentrations of 140 ppm and 160 ppm, respectively. TPH-d was detected at a concentration of 24 ppm in sample SW4 (KEI, 1991).

December 22, 1989: Eight soil sidewall samples (SW1 (17), SW2 (17), SW7 through SW11, and SW3 (17)) were collected after additional excavation of the UST pits. The maximum reported TPH-g concentrations were 1,500 ppm and 1,900 ppm (KEI, 1991).

January 18 and 19, 1990: Three 2-inch diameter monitoring wells (MW1, MW2, and MW3) were installed onsite (KEI, 1991).

February 14, 1990: Three soil samples (P1, P2, and P3) were collected from the product pipeline trenches. Low to non-detect concentrations of TPH-g and BTEX were detected with a maximum TPH-g concentration of 87 ppm (KEI, 1991).

March 9, 1990: Three sidewall soil samples (SWB, SWC, and SWD) were collected from the sidewalls of the waste oil UST pit. Low to non-detect concentrations of TPH-g and BTEX were detected with a maximum TPH-g concentration of 37 ppm (KEI, 1991).

April 24 and 25, 1990: Eight exploratory soil borings (EB1 through EB8) were drilled and soil sampled collected. The borings were backfilled with neat cement. Low to non-detect concentrations of TPH-g and BTEX were detected with a maximum TPH-g concentration of 5 ppm (KEI, 1991).

August 13, 1990: Two 2-inch monitoring wells (MW4 and MW5) were installed. Soil samples from the monitoring well pilot borings contained non-detect concentrations of TPH-g and BTEX in all samples. Benzene was detected at a maximum concentration of 3.2 ppb (KEI, 1991).



Hydropunch Groundwater Investigation Report

76 Service Station 3072

October 10, 2007

Page 3

January 24, 25 and 31, 2005: TRC conducted a Baseline Site Assessment (TRC, 2005) which involved the advancement of six direct-push borings (SB-1 through SB-6) to assess the presence of hydrocarbon-affected soil and groundwater beneath the site. TPPH was detected in two soil samples at a maximum concentration of 480 milligrams per kilogram (mg/kg) in SB-1 at a depth of 8 fbg. Methyl tertiary butyl ether (MTBE) was detected in two soil samples at a maximum concentration of 0.11 mg/kg in SB-3 at a depth of 18 fbg. MTBE was detected in three of the four grab groundwater samples at a maximum concentration of 87 micrograms per liter ($\mu\text{g/L}$) in boring SB-1.

4.0 SITE INVESTIGATION ACTIVITIES

Under the supervision of a TRC field geologist, Gregg In Situ, Inc. of Martinez, California (Gregg) advanced exploratory borings at five onsite locations using a CPT rig for the purpose of characterizing site lithology, identifying potential deeper water-bearing zones, and assessing groundwater quality within those zones. Boring locations are shown in Figure 2.

4.1 Pre-Field Activities

Underground Services Alert (USA) was notified at least two days prior to field activities to mark underground utilities near proposed boring locations. In addition, a private utility locating service was contracted to check and clear proposed boring locations prior to drilling. Drilling permits were obtained from Alameda County Public Works and are included in Appendix A.

A site and job specific health and safety plan was prepared for the site that promotes personnel safety and preparedness during the planned field activities. Prior to beginning field activities each day, a "tailgate" safety meeting was conducted with all exclusion zone workers to discuss the health and safety issues and concerns related to the specific scope of work. A copy of the health and safety plan was maintained onsite throughout the field investigation.

4.2 CPT Hydropunch Groundwater Investigation

At each of the boring locations, up to three separate co-located borings were advanced. The first boring at each location was advanced to a total depth of 60 fbg or refusal to assess soil behavior types using the integrated electronic cone system of the CPT rig. Data obtained from the initial logging run was then used to identify potential water-bearing zones for subsequent hydropunch groundwater sampling. The second and third co-located borings were advanced to the desired depths based on an assessment of the stratigraphic soil behavior logs (Appendix B). The use of separate co-located borings for each depth-discrete groundwater sample minimizes the potential for cross-contamination during boring advancement.

Where feasible, grab groundwater sampling was attempted in two potential water-bearing zones identified at depth intervals of between 14 and 40 fbg (shallow) and 45 to 55 fbg (deep). At proposed location CPT-3, it was not feasible to advance the boring due to the presence of an underground utility. A total of four grab groundwater samples were collected during the investigation, two from the shallow water-bearing zone and two from the apparent deeper water-bearing zone.



Hydropunch Groundwater Investigation Report

76 Service Station 3072

October 10, 2007

Page 4

At boring locations CPT-2 and CPT-5, only the shallow grab groundwater samples were collected due to refusal at depths of 36.4 fbg and 22.3 fbg, respectively. Therefore, hydropunch grab groundwater samples were collected from borings CPT-2 and CPT-5 at depths of 36 fbg and 22 fbg, respectively.

At boring locations CPT-1 and CPT-4, the apparent shallow water-bearing zone did not produce enough water to collect a sample. However, grab groundwater samples were collected from the deeper water-bearing zone at these two locations encountered at depths of 55 fbg and 51 fbg, respectively. A total of four onsite grab groundwater samples were collected during this investigation.

The four grab groundwater samples were submitted to a State-certified laboratory for analysis, and analyzed for TPH-d by EPA Method 8015 and for total purgeable petroleum hydrocarbons (TPPH), BTEX, MTBE, and other fuel oxygenates including tertiary butyl alcohol (TBA), diisopropyl ether (DIPE), tertiary amyl methyl ether (TAME), ethyl tertiary butyl ether (ETBE), 1,2-dichloroethane (1,2-DCA), 1,2-dibromoethane (EDB), and ethanol by EPA Method 8260B.

4.3 Analytical Results

TPH-d, MTBE and TBA were detected in the grab groundwater samples collected during the investigation. TPH-d was detected in all four of the samples analyzed, and at a maximum concentration of 800 µg/L in the deeper water-bearing zone sample from boring CPT-4. MTBE was detected in three of the four samples analyzed, and at a maximum concentration of 10 µg/L in the deeper water-bearing zone sample from boring CPT-4. TBA was detected in one of the samples at a concentration of 54 µg/L in the shallow water-bearing zone sample from boring CPT-2.

Analytical results of the grab groundwater samples are presented in Table 1. Copies of the laboratory analytical reports and chain of custody records are provided in Appendix C.


5.0 CONCLUSIONS AND RECOMMENDATIONS

TPH-d was detected in all four samples analyzed and is present at elevated concentrations in the both the shallow and apparent deeper water-bearing zones onsite. MTBE was also identified at relatively low concentrations in samples from both depth zones and TBA was detected only within the shallow water-bearing zone. Data obtained during this investigation indicates groundwater impacts have occurred onsite and those impacts may have migrated down into the apparent deeper water-bearing zone.

At the end of October 2007, environmental consulting responsibilities for this site will be transferred to Delta Environmental Consultants, Inc. (Delta). As such, Delta will evaluate the existing site data and provide all future recommendations regarding additional work at the site.



FIGURES

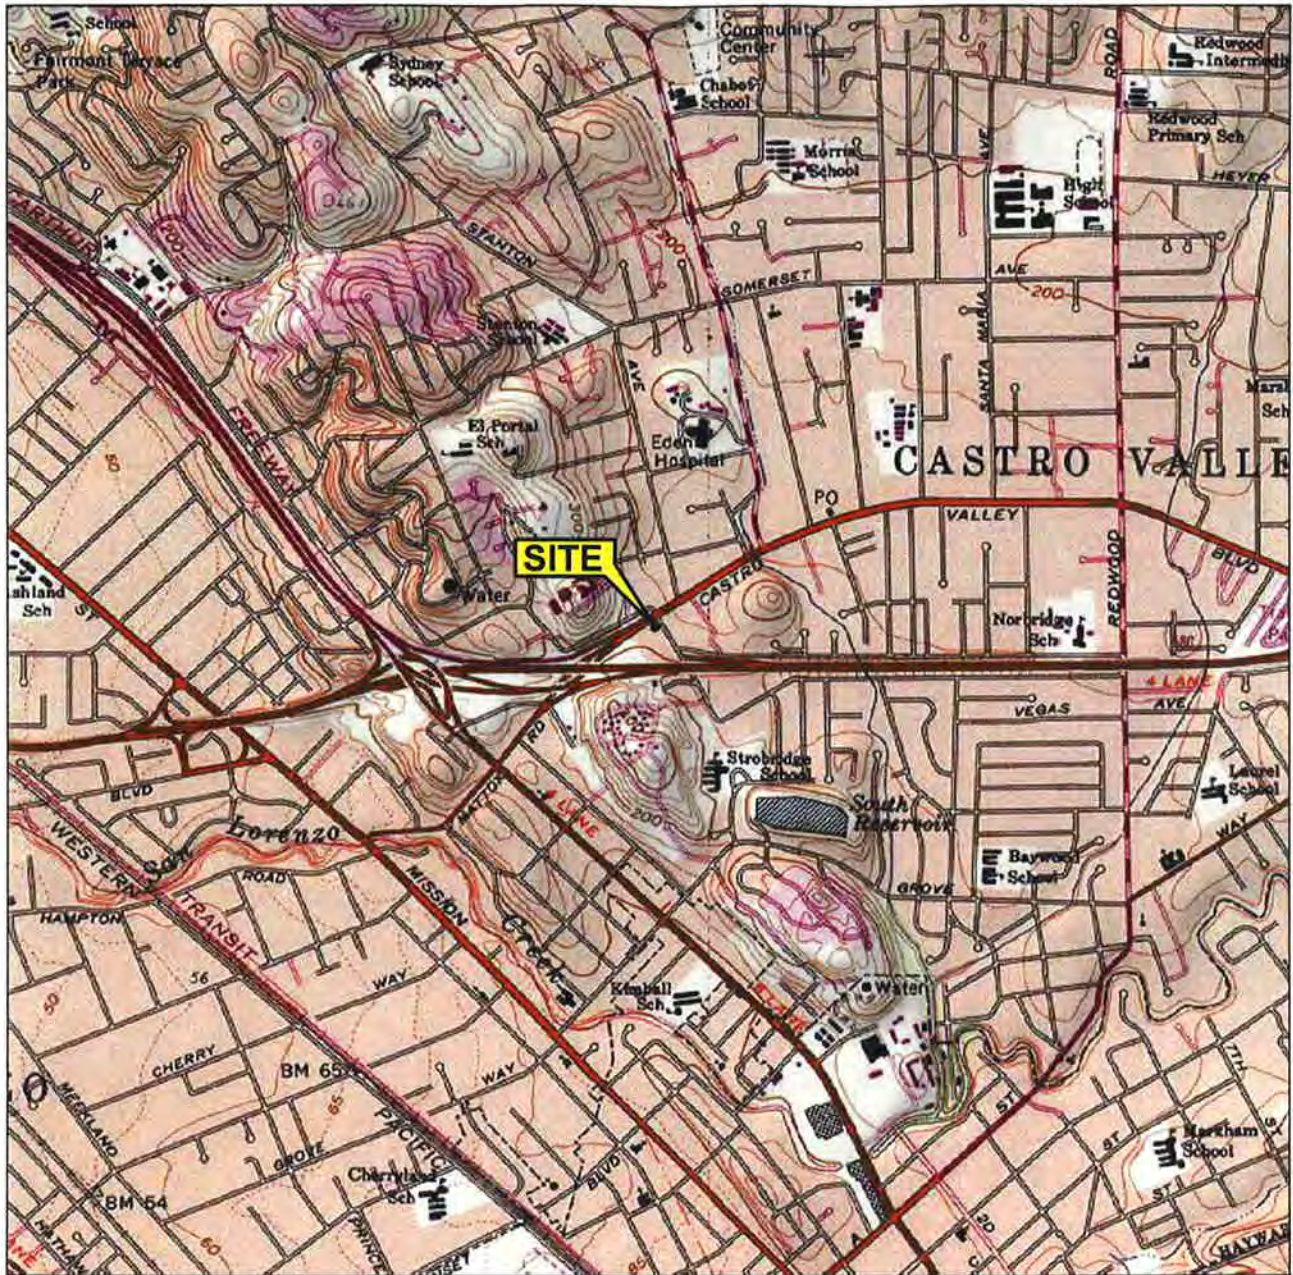

1 MILE 3/4 1/2 1/4 0 1 MILE



SCALE 1 : 24,000



SOURCE:


United States Geological Survey
7.5 Minute Topographic Maps:
Hayward Quadrangle
California

VICINITY MAP

76 Service Station #3072
2445 Castro Valley Boulevard
Castro Valley, California



FIGURE 1

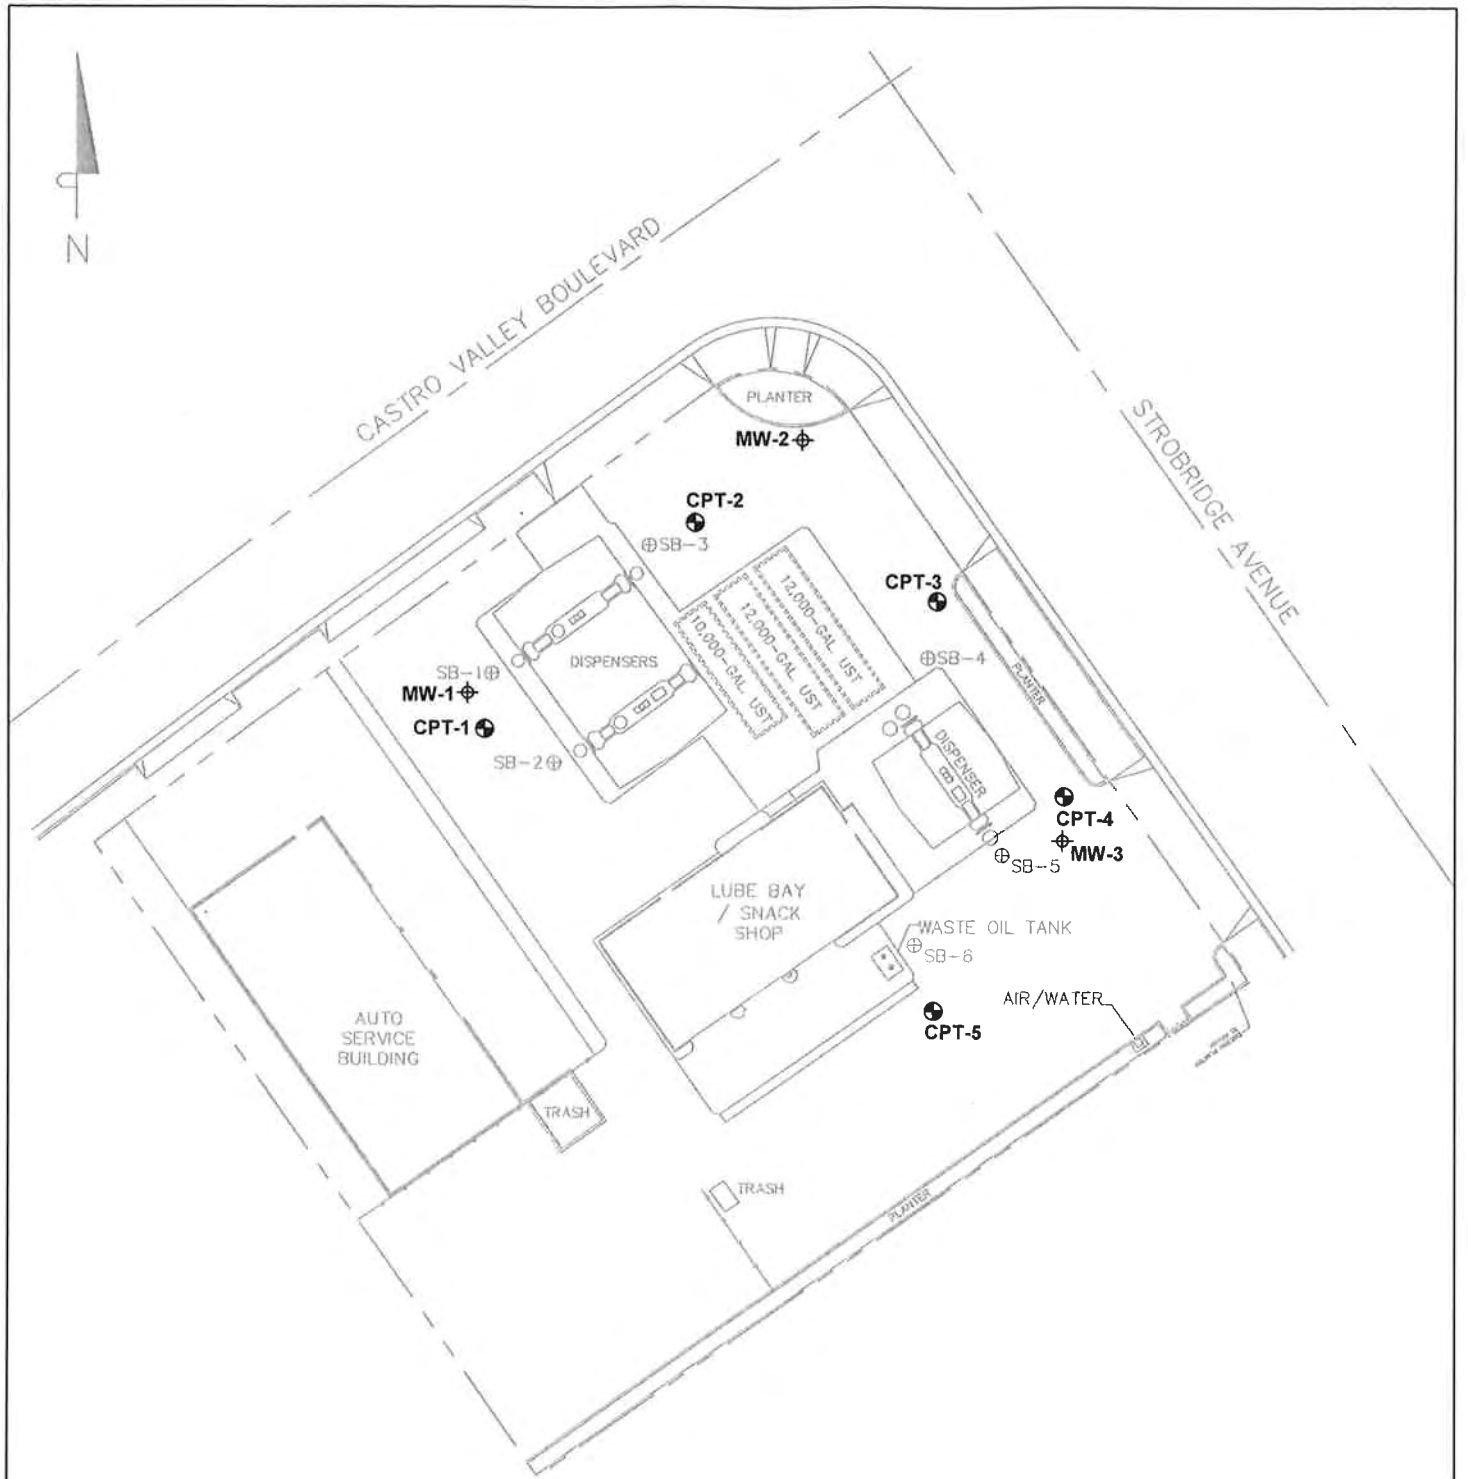

CASTRO VALLEY BOULEVARD

STOBRIDGE AVENUE

APPROXIMATE SCALE (FEET)



LEGEND	
	Property Boundary
	Fence
	SB-6 Previous Soil Boring
	CPT-5 CPT Hydropunch Location
	MW-3 Proposed Monitoring Well Locations

SITE PLAN SHOWING CPT HYDROPUNCH & PROPOSED MONITORING WELL LOCATIONS

76 Service Station #3072
 2445 Castro Valley Boulevard
 Castro Valley, California



FIGURE 2

SOURCE: Client-provided site plan prepared by A&S Engineering, October 1997.

TABLE

Table 1
GRAB GROUNDWATER ANALYTICAL RESULTS
76 Service Station #3072
2445 Castro Valley Boulevard, Castro Valley, CA

Sample ID	Date Sampled	Sample Depth (fbg)	TPH-d	TPPH	Benzene	Toluene	Ethyl- benzene	Total Xylenes	MTBE	TAME	TBA	DIPE	EDB	ETBE	1,2-DCA	Ethanol
			EPA 8015	EPA Method 8260B												
Concentrations in micrograms per liter (µg/L)																
Shallow Water-Bearing Zone																
CPT-2	5/3/2007	36	500	<50	<0.50	<0.50	<0.50	<0.50	6.3	<0.50	54	<0.50	<0.50	<0.50	<0.50	<250
CPT-5	5/3/2007	22	280	<50	<0.50	<0.50	<0.50	<0.50	5.2	<0.50	<10	<0.50	<0.50	<0.50	<0.50	<250
Deeper Water-Bearing Zone																
CPT-1	5/2/2007	55	490	<50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<10	<0.50	<0.50	<0.50	<0.50	<250
CPT-4	5/2/2007	51	800	<50	<0.50	<0.50	<0.50	<0.50	10	<0.50	<10	<0.50	<0.50	<0.50	<0.50	<250
Notes:																
TPH-d = total petroleum hydrocarbons as diesel (C12-C24)									EDB = 1,2-dibromoethane							
TPPH = total purgable petroleum hydrocarbons (C6-C12)									ETBE = ethyl tertiary butyl ether							
MTBE = methyl tertiary butyl ether									1,2-DCA = 1,2-dichloroethane							
TAME = tertiary amyl methyl ether									fbg = feet below grade							
TBA = tertiary butyl alcohol									-- = not analysed							
DIPE = di-isopropyl ether									N/A = not applicable							

APPENDIX A
Drilling Permits

Alameda County Public Works Agency - Water Resources Well Permit



399 Elmhurst Street
Hayward, CA 94544-1395
Telephone: (510)670-6633 Fax:(510)782-1939

Application Approved on: 04/19/2007 By jamesy

Permit Numbers: W2007-0531
Permits Valid from 05/02/2007 to 05/04/2007

Application Id: 1176398684583
Site Location: 76 Service Station #3072
Project Start Date: 2445 Castro Valley Boulevard
05/02/2007

City of Project Site:Castro Valley

Completion Date:05/04/2007

Applicant: TRC - Monika Krupa
1590 Solano Way, Suite A, Concord, CA 94520
Property Owner: Jagdish and Janki Moorjani
2445 Castro Valley Boulevard, Castro Valley, CA 94546
Client: Eric Hetrick
ConocoPhillips, 76 Broadway, Sacramento, CA 95818

Phone: 925-688-2482

Phone: --

Phone: --

Receipt Number: WR2007-0173	Total Due:	\$200.00
Payer Name : TRC Companis, Inc.	Total Amount Paid:	\$200.00
Paid By: CHECK		PAID IN FULL

Works Requesting Permits:

Borehole(s) for Investigation-Geotechnical Study/CPT's - 5 Boreholes
Driller: Gregg Drilling and Testing, Inc. - Lic #: 485165 - Method: CPT

Work Total: \$200.00

Specifications

Permit Number	Issued Dt	Expire Dt	# Boreholes	Hole Diam	Max Depth
W2007-0531	04/19/2007	07/31/2007	5	4.00 in.	60.00 ft

Specific Work Permit Conditions

1. Backfill bore hole by tremie with cement grout or cement grout/sand mixture. Upper two-three feet replaced in kind or with compacted cuttings. All cuttings remaining or unused shall be containerized and hauled off site.
2. Boreholes shall not be left open for a period of more than 24 hours. All boreholes left open more than 24 hours will need approval from Alameda County Public Works Agency, Water Resources Section. All boreholes shall be backfilled according to permit destruction requirements and all concrete material and asphalt material shall be to Caltrans Spec or County/City Codes. No borehole(s) shall be left in a manner to act as a conduit at any time.
3. Permittee shall assume entire responsibility for all activities and uses under this permit and shall indemnify, defend and save the Alameda County Public Works Agency, its officers, agents, and employees free and harmless from any and all expense, cost, liability in connection with or resulting from the exercise of this Permit including, but not limited to, properly damage, personal injury and wrongful death.
4. Applicant shall contact Vicky Hamlin for an inspection time at 510-670-5443 or email to vickyh@acpwa.org at least five (5) working days prior to starting, once the permit has been approved. Confirm the scheduled date(s) at least 24 hours prior to drilling.
5. Copy of approved drilling permit must be on site at all times. Failure to present or show proof of the approved permit application on site shall result in a fine of \$500.00.
6. Permit is valid only for the purpose specified herein. No changes in construction procedures, as described on this

Alameda County Public Works Agency - Water Resources Well Permit

permit application. Boreholes shall not be converted to monitoring wells, without a permit application process.

APPENDIX B
CPT Site Investigation Report
(Gregg Drilling)





GREGG IN SITU, INC.

GEOTECHNICAL AND ENVIRONMENTAL INVESTIGATION SERVICES

May 7, 2007

TRC Solutions
Attn: Keith Woodburne
1590 Solano Way, Suite A
Concord, California 94520

Subject: CPT Site Investigation
Conoco Phillips #3072
Castro Valley, California
GREGG Project Number: 07-137MA

Dear Mr. Woodburne:

The following report presents the results of GREGG Drilling & Testing's Cone Penetration Test investigation for the above referenced site. The following testing services were performed:

1	Cone Penetration Tests	(CPTU)	<input checked="" type="checkbox"/>
2	Pore Pressure Dissipation Tests	(PPD)	<input checked="" type="checkbox"/>
3	Seismic Cone Penetration Tests	(SCPTU)	<input type="checkbox"/>
4	Resistivity Cone Penetration Tests	(RCPTU)	<input type="checkbox"/>
5	UVIF Cone Penetration Tests	(UVIFCPTU)	<input type="checkbox"/>
6	Groundwater Sampling	(GWS)	<input checked="" type="checkbox"/>
7	Soil Sampling	(SS)	<input type="checkbox"/>
8	Vapor Sampling	(VS)	<input type="checkbox"/>
9	Vane Shear Testing	(VST)	<input type="checkbox"/>
10	SPT Energy Calibration	(SPTE)	<input type="checkbox"/>

A list of reference papers providing additional background on the specific tests conducted is provided in the bibliography following the text of the report. If you would like a copy of any of these publications or should you have any questions or comments regarding the contents of this report, please do not hesitate to contact our office at (925) 313-5800.

Sincerely,
GREGG Drilling & Testing, Inc.

Mary Walden
Operations Manager




TRC SOLUTIONS

Site: CONOCO PHILLIPS #3072 Engineer: K.WOODBURNE

Sounding: CPT-01

Date: 5/3/2007 05:45

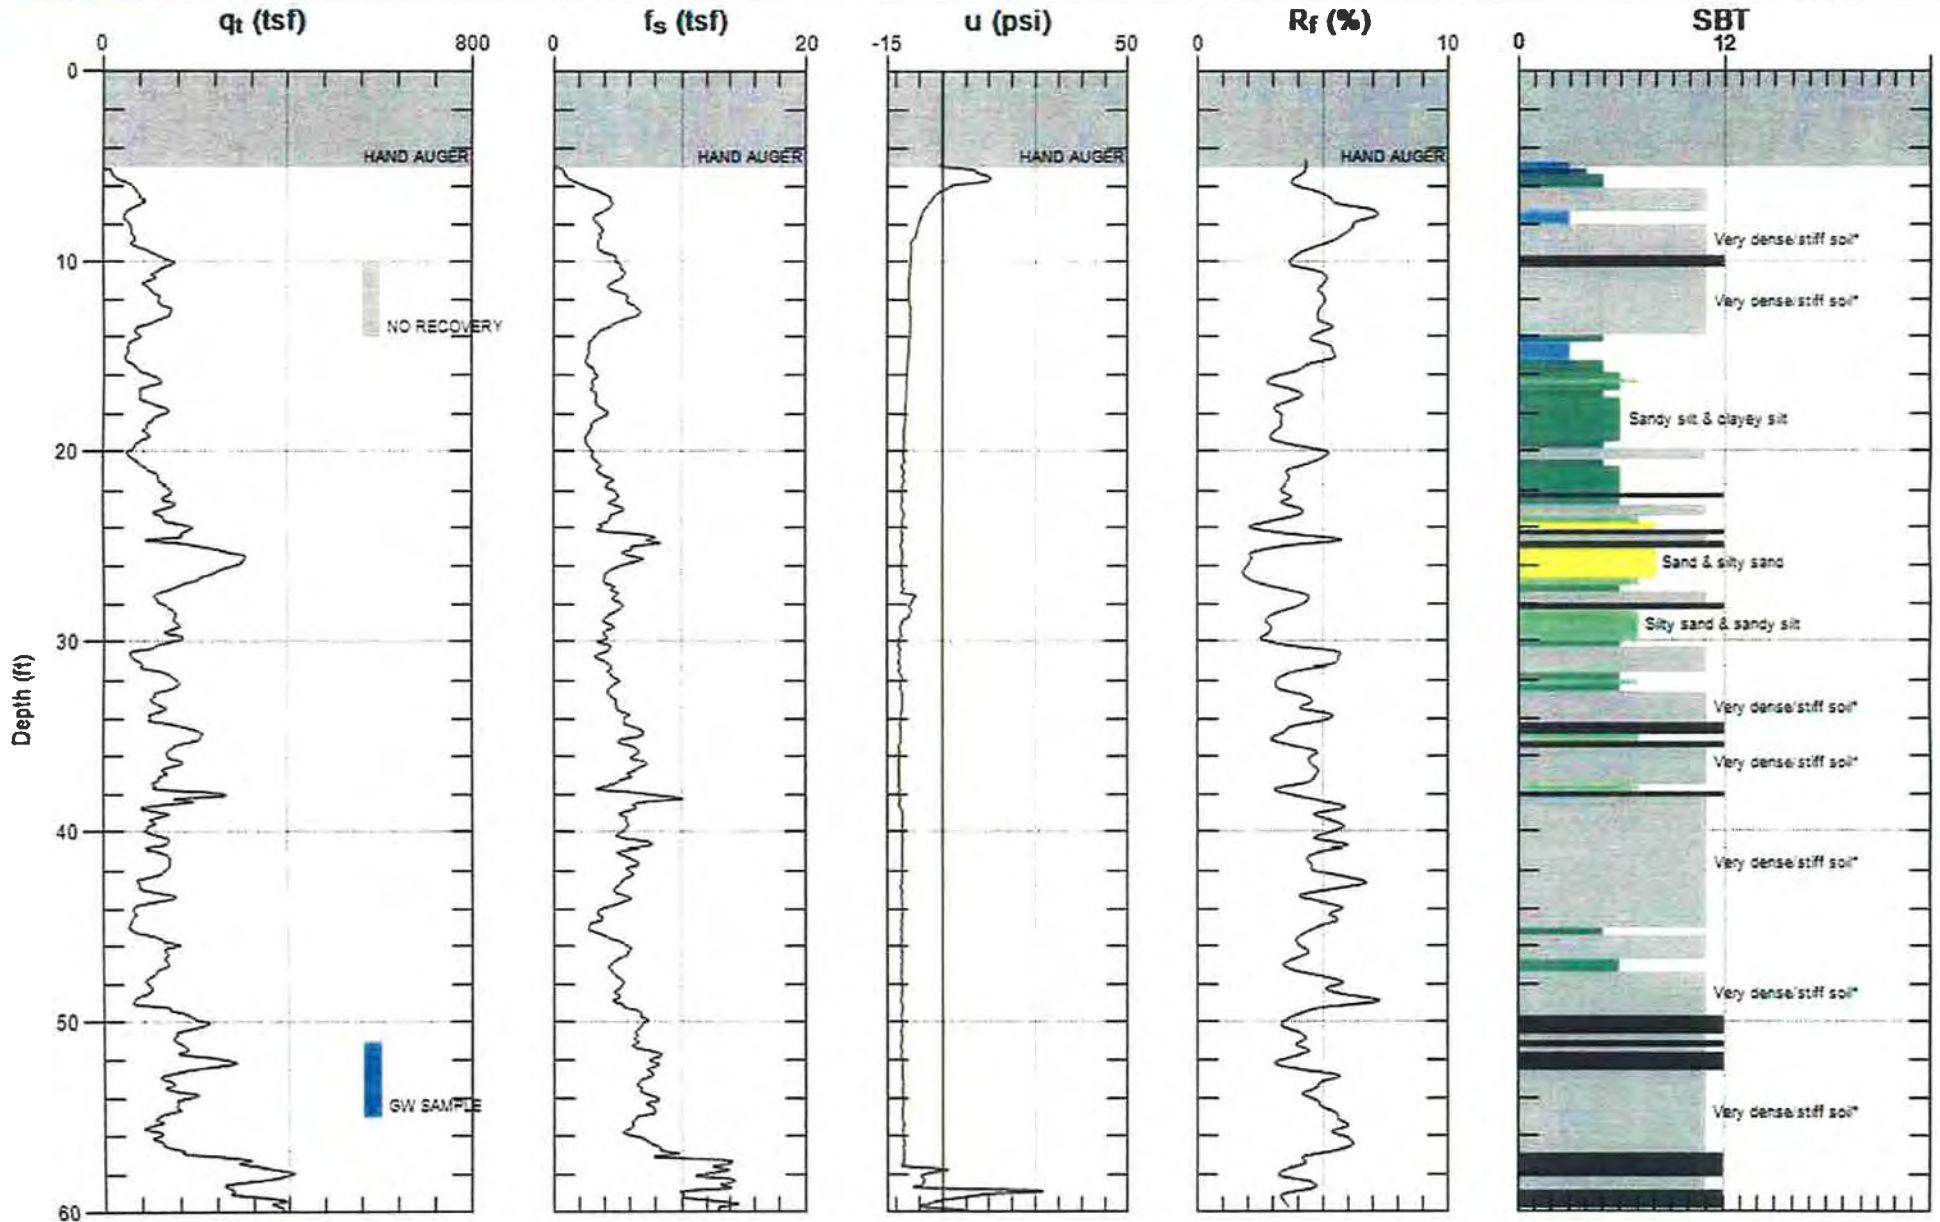

Max. Depth: 60.039 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)




TRC SOLUTIONS

Site: CONOCO PHILLIPS #3072 Engineer: K.WOODBURNE

Sounding: CPT-02

Date: 5/3/2007 12:15

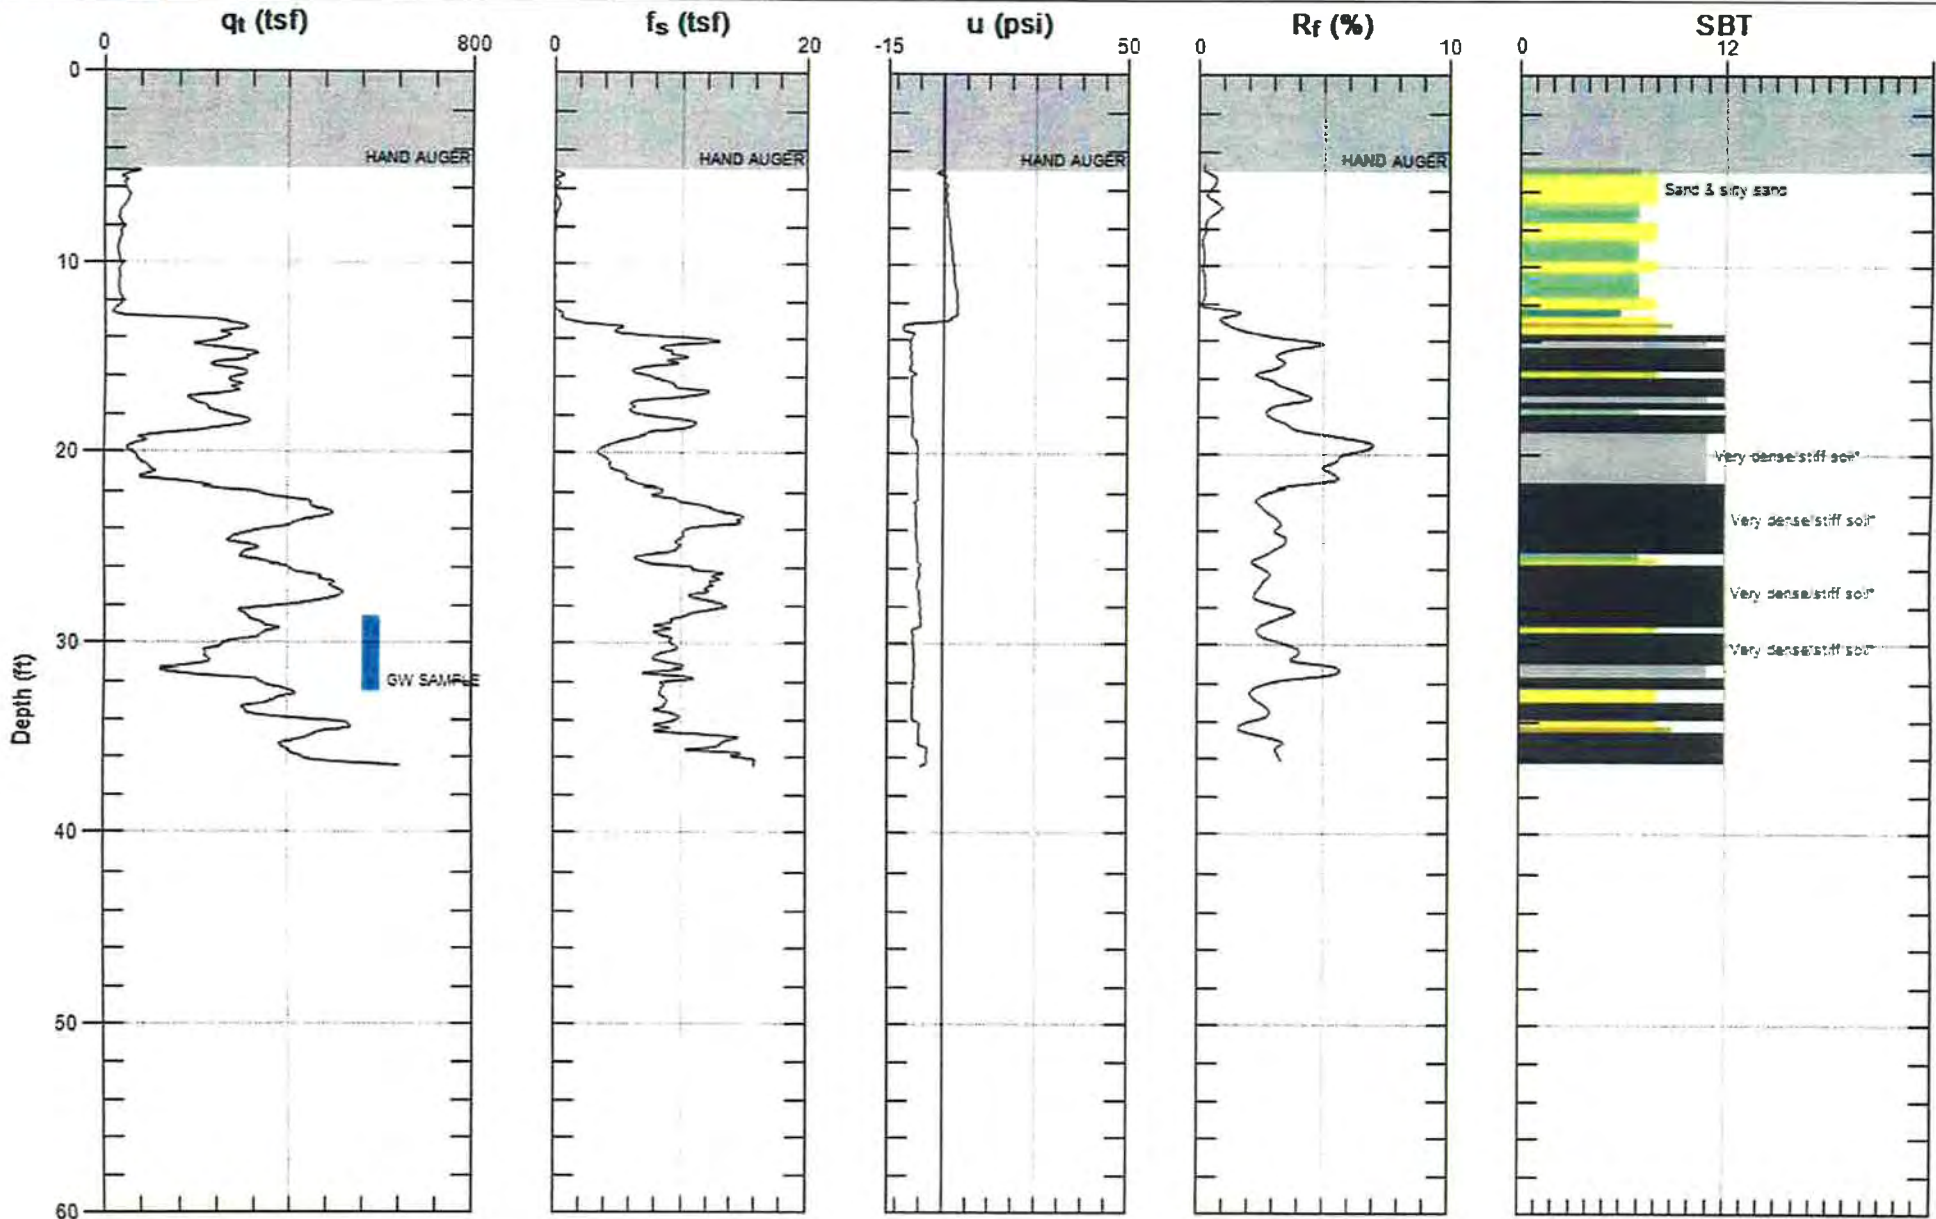

Max. Depth: 36.417 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)




TRC SOLUTIONS

Site: CONOCO PHILLIPS #3072 Engineer: K.WOODBURNE

Sounding: CPT-04

Date: 5/3/2007 08:37

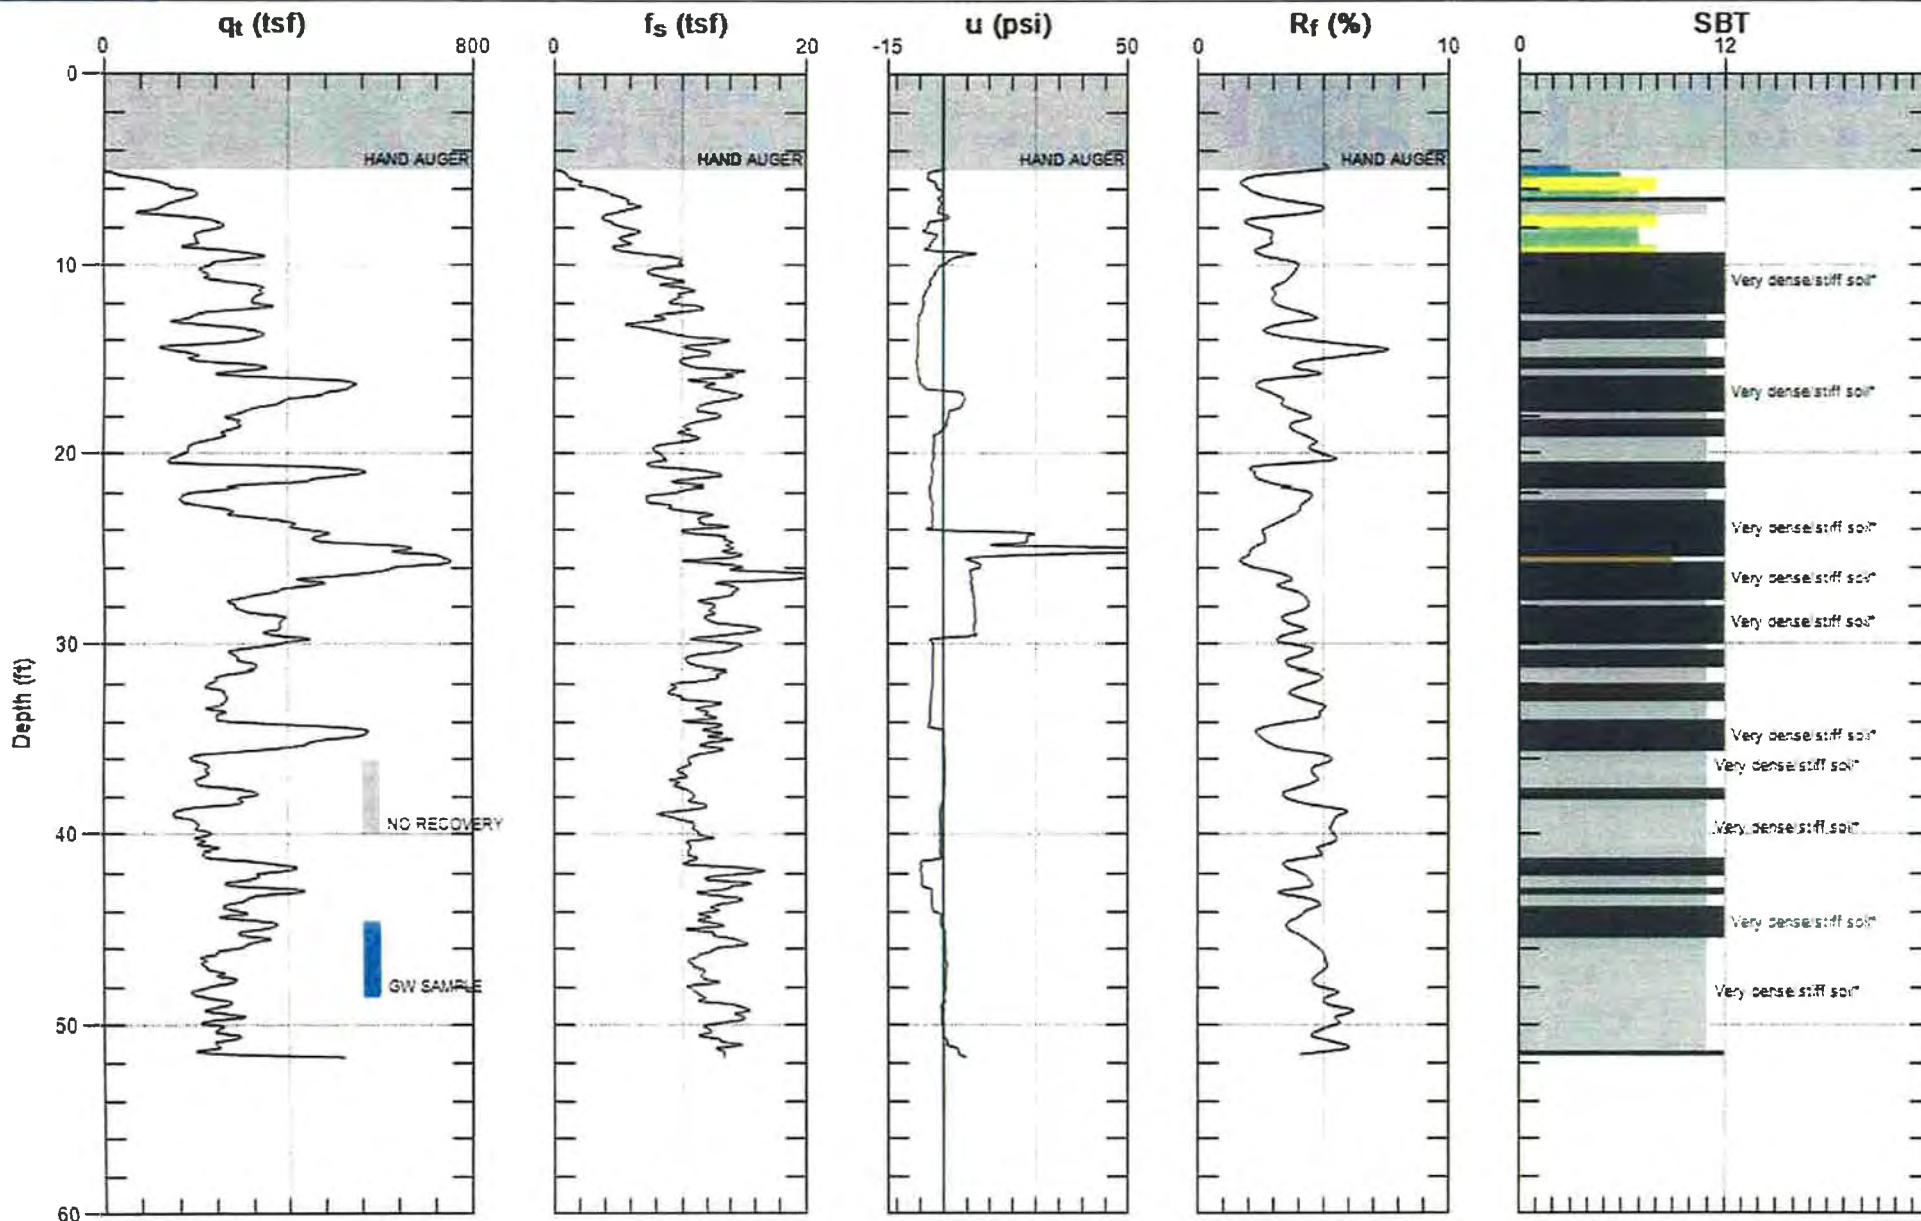

Max. Depth: 51.673 (ft)
Avg. Interval: 0.328 (ft)

SBT: Soil Behavior Type (Robertson 1990)




TRC SOLUTIONS

Site: CONOCO PHILLIPS #3072 Engineer: K.WOODBURNE

Sounding: CPT-05

Date: 5/4/2007 05:23

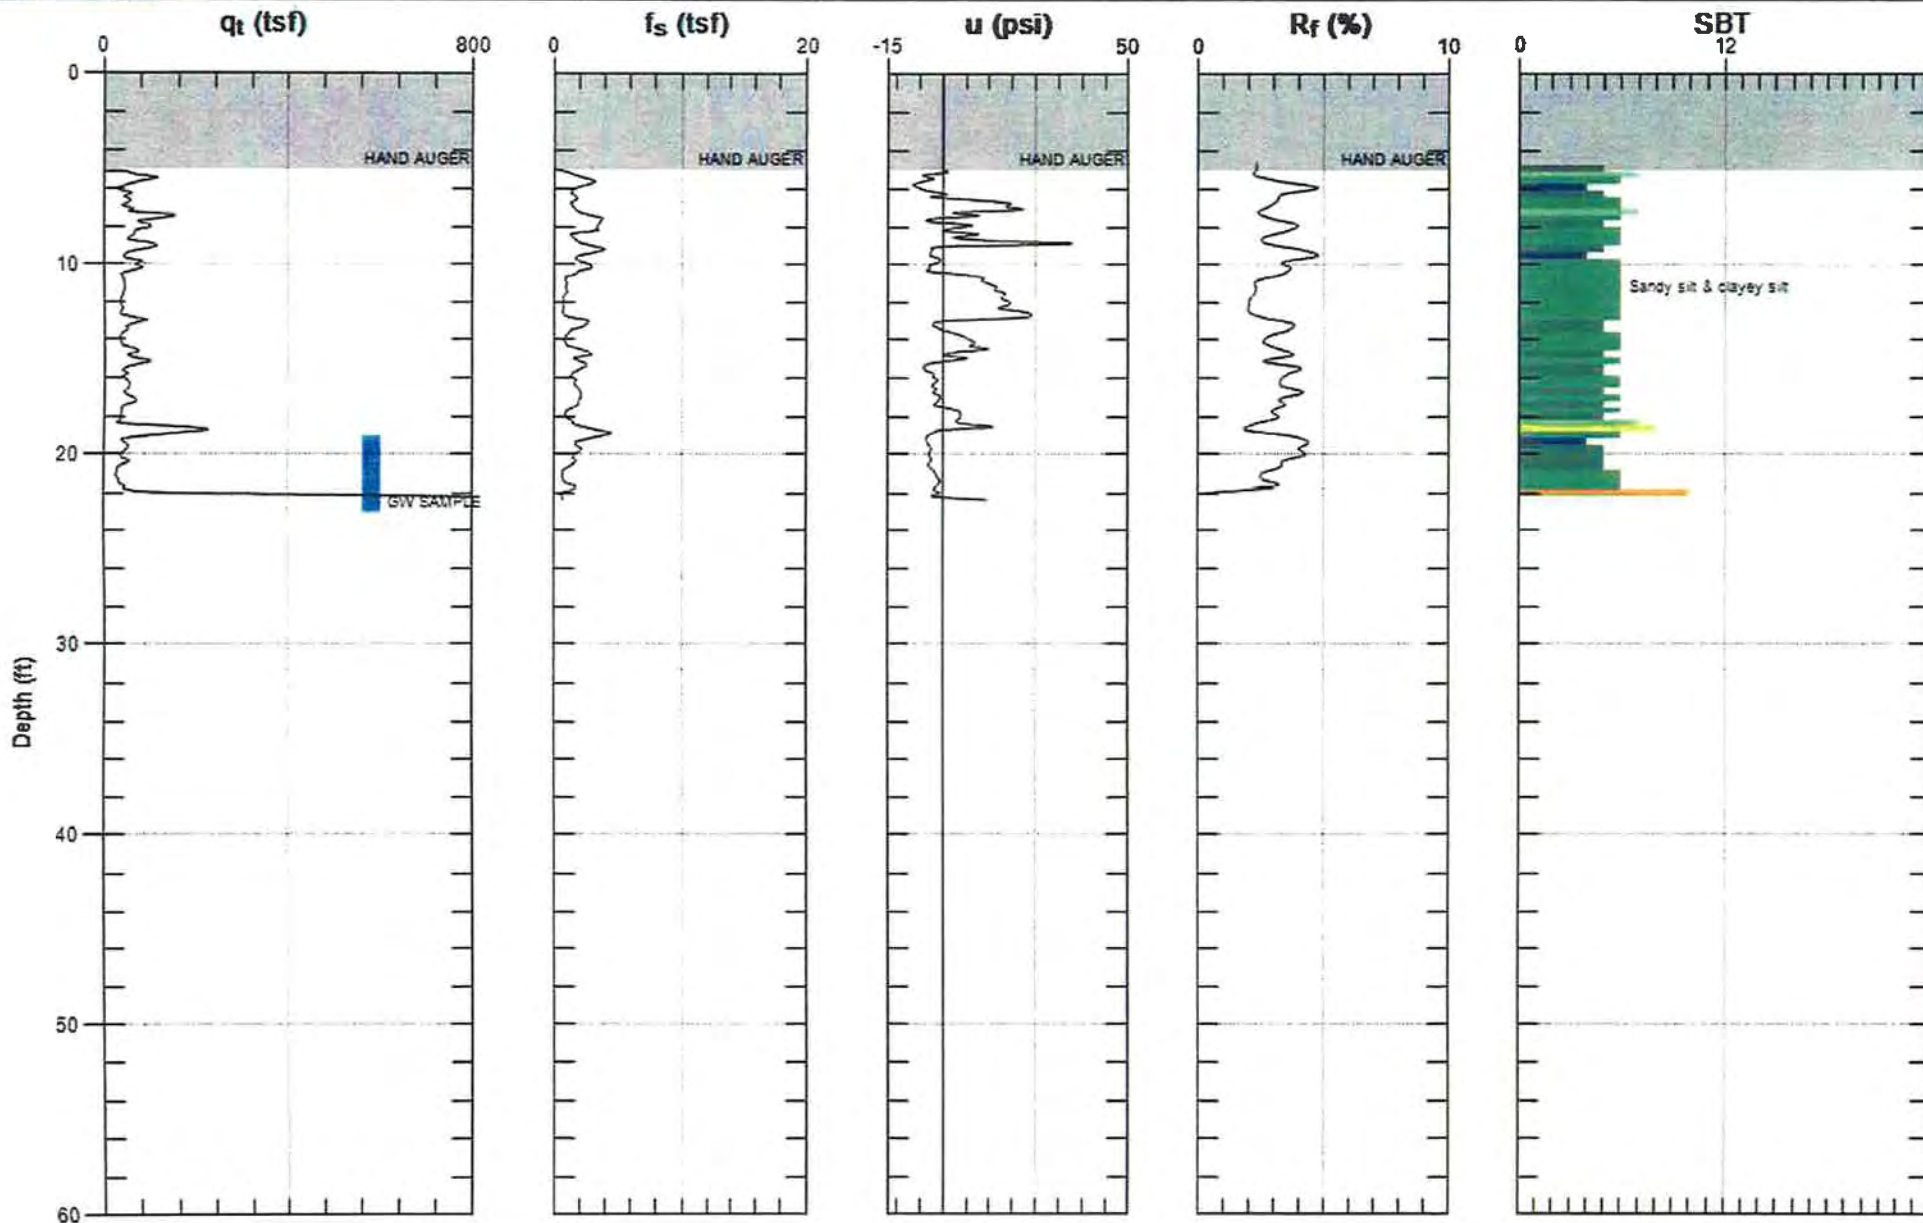

Max. Depth: 22.310 (ft)
Avg. Interval: 0.328 (ft)


SBT: Soil Behavior Type (Robertson 1990)

TRC SOLUTIONS

Site: CONOCO PHILLIPS #3072
Location: CPT-05

Oversite: K.WOODBURNE
Date: 05:04:07 05:23

PORE PRESSURE DISSIPATION RECORD

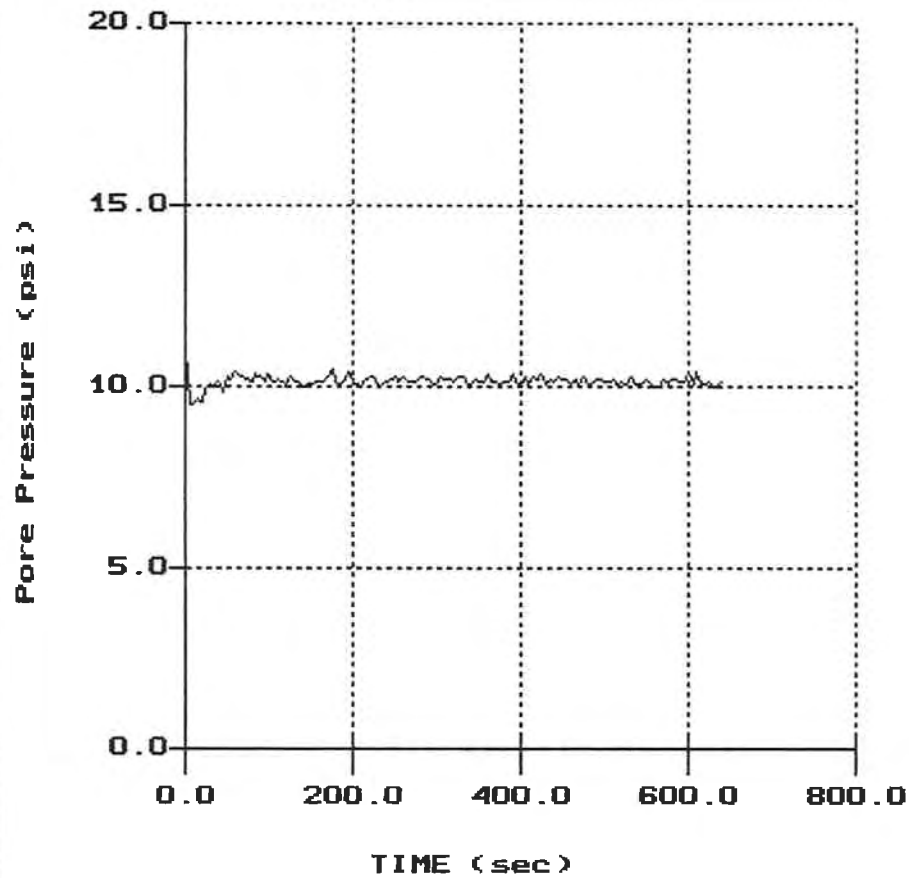

File: 137C05.PPC
Depth (m): 6.80
(ft): 22.31
Duration: 640.0s
U-min: 9.50 5.0s
U-max: 11.07 0.0s

APPENDIX CPT



Cone Penetration Testing Procedure (CPT)

Gregg Drilling & Testing, Inc. carries out all Cone Penetration Tests (CPT) using an integrated electronic cone system, *Figure CPT*. The soundings were conducted using a 20 ton capacity cone with a tip area of 15 cm² and a friction sleeve area of 225 cm². The cone is designed with an equal end area friction sleeve and a tip end area ratio of 0.85.

The cone takes measurements of cone bearing (q_c), sleeve friction (f_s) and penetration pore water pressure (u_2) at 5-cm intervals during penetration to provide a nearly continuous hydrogeologic log. CPT data reduction and interpretation is performed in real time facilitating on-site decision making. The above mentioned parameters are stored on disk for further analysis and reference. All CPT soundings are performed in accordance with revised (2002) ASTM standards (D 5778-95).

The cone also contains a porous filter element located directly behind the cone tip (u_2), *Figure CPT*. It consists of porous plastic and is 5.0mm thick. The filter element is used to obtain penetration pore pressure as the cone is advanced as well as Pore Pressure Dissipation Tests (PPDT's) during appropriate pauses in penetration. It should be noted that prior to penetration, the element is fully saturated with silicon oil under vacuum pressure to ensure accurate and fast dissipation.

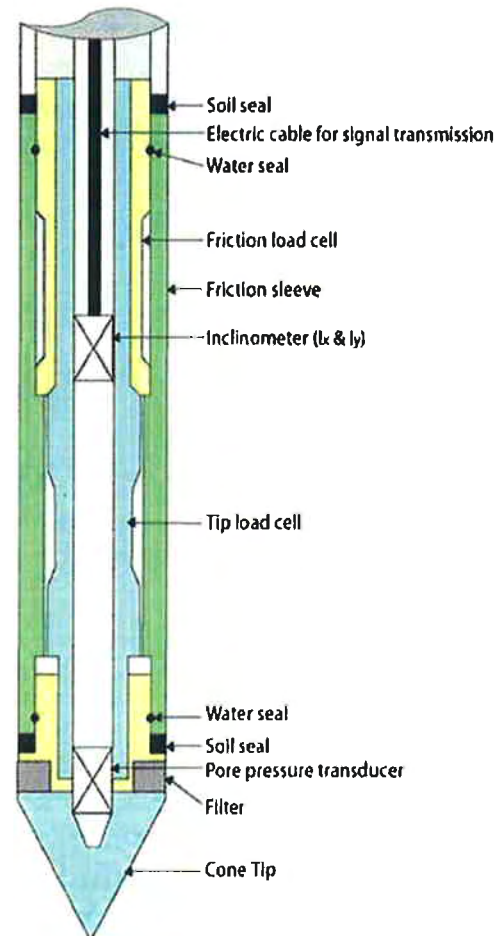


Figure CPT

When the soundings are complete, the test holes are grouted using a Gregg In Situ support rig. The grouting procedures generally consist of pushing a hollow CPT rod with a "knock out" plug to the termination depth of the test hole. Grout is then pumped under pressure as the tremie pipe is pulled from the hole. Disruption or further contamination to the site is therefore minimized.



Cone Penetration Test Data & Interpretation

Soil behavior type and stratigraphic interpretation is based on relationships between cone bearing (q_c), sleeve friction (f_s), and pore water pressure (u_2). The friction ratio (R_f) is a calculated parameter defined by $100f_s/q_c$ and is used to infer soil behavior type. Generally:

Cohesive soils (clays)

- High friction ratio (R_f) due to small cone bearing (q_c)
- Generate large excess pore water pressures (u_2)


Cohesionless soils (sands)

- Low friction ratio (R_f) due to large cone bearing (q_c)
- Generate very little excess pore water pressures (u_2)

A complete set of baseline readings are taken prior to and at the completion of each sounding to determine temperature shifts and any zero load offsets. Corrections for temperature shifts and zero load offsets can be extremely important, especially when the recorded loads are relatively small. In sandy soils, however, these corrections are generally negligible.

The cone penetration test data collected from your site is presented in graphical form in Appendix CPT. The data includes CPT logs of measured soil parameters, computer calculations of interpreted soil behavior types (SBT), and additional geotechnical parameters. A summary of locations and depths is available in Table 1. Note that all penetration depths referenced in the data are with respect to the existing ground surface.

Soil interpretation for this project was conducted using recent correlations developed by Robertson et al, 1990, *Figure SBT*. Note that it is not always possible to clearly identify a soil type based solely on q_c , f_s , and u_2 . In these situations, experience, judgment, and an assessment of the pore pressure dissipation data should be used to infer the soil behavior type.

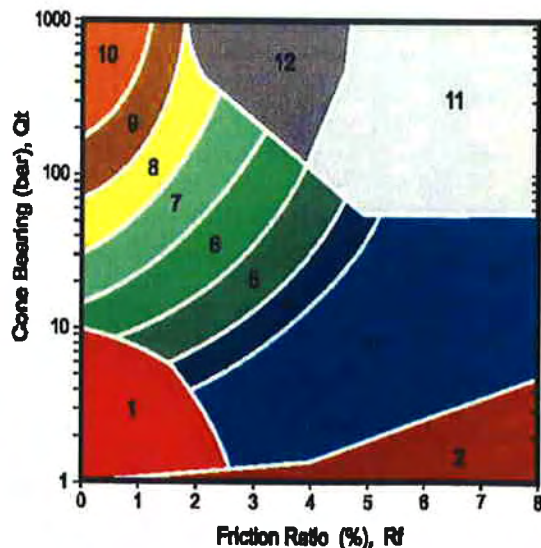

ZONE	Qt/N	SBT
1	2	Sensitive, fine grained
2	1	Organic materials
3	1	Clay
4	1.5	Silty clay to clay
5	2	Clayey silt to silty clay
6	2.5	Sandy silt to clayey silt
7	3	Silty sand to sandy silt
8	4	Sand to silty sand
9	5	Sand
10	6	Gravelly sand to sand
11	1	Very stiff fine grained*
12	2	Sand to clayey sand*

*over consolidated or cemented

Figure SBT

APPENDIX PPD



Pore Pressure Dissipation Tests (PPDT)

Pore Pressure Dissipation Tests (PPDT's) conducted at various intervals measured hydrostatic water pressures and determined the approximate depth of the ground water table. A PPDT is conducted when the cone is halted at specific intervals determined by the field representative. The variation of the penetration pore pressure (u) with time is measured behind the tip of the cone and recorded by a computer system.

Pore pressure dissipation data can be interpreted to provide estimates of:

- Equilibrium piezometric pressure
- Phreatic Surface
- In situ horizontal coefficient of consolidation (c_h)
- In situ horizontal coefficient of permeability (k_h)

In order to correctly interpret the equilibrium piezometric pressure and/or the phreatic surface, the pore pressure must be monitored until such time as there is no variation in pore pressure with time, *Figure PPDT*. This time is commonly referred to as t_{100} , the point at which 100% of the excess pore pressure has dissipated.

A complete reference on pore pressure dissipation tests is presented by Robertson et al. 1992.

A summary of the pore pressure dissipation tests is summarized in Table 1. Pore pressure dissipation data is presented in graphical form in Appendix PPDT.

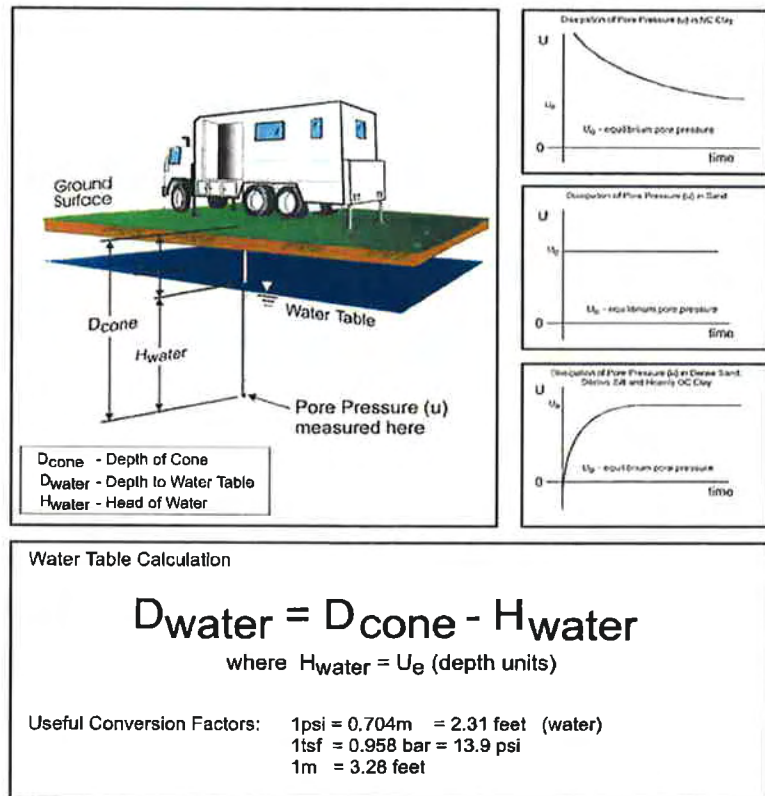


Figure PPDT

APPENDIX GWS



Groundwater Sampling (GWS)

Gregg In Situ, Inc. conducts groundwater sampling using a Hydropunch® type groundwater sampler, *Figure GWS*. The groundwater sampler has a retrievable stainless steel or disposable PVC screen with steel drop off tip. This allows for samples to be taken at multiple depth intervals within the same sounding location. In areas of slower water recharge, provisions may be made to set temporary PVC well screens during sampling to allow the drill rig to advance to the next sample location while the groundwater is allowed to infiltrate.

The groundwater sampler operates by advancing 1 3/4 inch hollow push rods with the filter tip in a closed configuration to the base of the desired sampling interval. Once at the desired sample depth, the push rods are retracted; exposing the encased filter screen and allowing groundwater to infiltrate hydrostatically from the formation into the inlet screen. A small diameter bailer (approximately 1/2 or 3/4 inch) is lowered through the push rods into the screen section for sample collection. The number of downhole trips with the bailer and time necessary to complete the sample collection at each depth interval is a function of sampling protocols, volume requirements, and the yield characteristics and storage capacity of the formation. Upon completion of sample collection, the push rods and sampler, with the exception of the PVC screen and steel drop off tip are retrieved to the ground surface, decontaminated and prepared for the next sampling event.

A summary of the groundwater samples collected, including the sampling date, depth and location identification, is presented in Table 1 and the corresponding CPT plot.

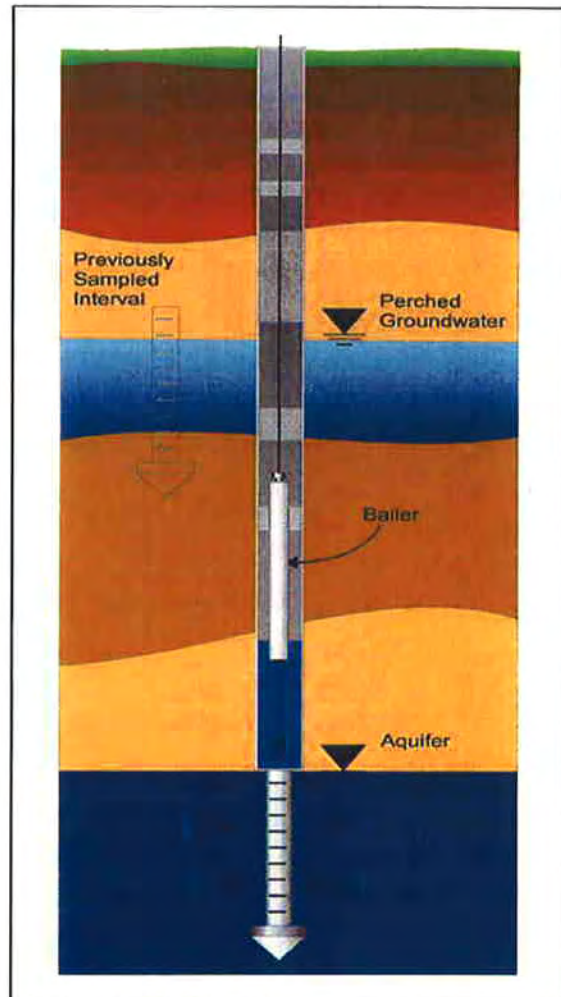


Figure GWS

For a detailed reference on direct push groundwater sampling, refer to Zemo et. al., 1992.



Bibliography

Lunne, T., Robertson, P.K. and Powell, J.J.M., "Cone Penetration Testing in Geotechnical Practice"
E & FN Spon. ISBN 0 419 23750, 1997

Robertson, P.K., "Soil Classification using the Cone Penetration Test", Canadian Geotechnical Journal, Vol. 27,
1990 pp. 151-158.

Mayne, P.W., "NHI (2002) Manual on Subsurface Investigations: Geotechnical Site Characterization", available
through www.ce.gatech.edu/~geosys/Faculty/Mayne/papers/index.html, Section 5.3, pp. 107-112.

Robertson, P.K., R.G. Campanella, D. Gillespie and A. Rice, "Seismic CPT to Measure In-Situ Shear Wave Velocity",
Journal of Geotechnical Engineering ASCE, Vol. 112, No. 8, 1986
pp. 791-803.

Robertson, P.K., Sully, J., Woeller, D.J., Lunne, T., Powell, J.J.M., and Gillespie, D.J., "Guidelines for Estimating
Consolidation Parameters in Soils from Piezocone Tests", Canadian Geotechnical Journal, Vol. 29, No. 4,
August 1992, pp. 539-550.

Robertson, P.K., T. Lunne and J.J.M. Powell, "Geo-Environmental Application of Penetration Testing", Geotechnical
Site Characterization, Robertson & Mayne (editors), 1998 Balkema, Rotterdam, ISBN 90 5410 939 4 pp 35-47.

Campanella, R.G. and I. Weemeees, "Development and Use of An Electrical Resistivity Cone for Groundwater
Contamination Studies", Canadian Geotechnical Journal, Vol. 27 No. 5, 1990 pp. 557-567.

DeGroot, D.J. and A.J. Lutenegeger, "Reliability of Soil Gas Sampling and Characterization Techniques", International
Site Characterization Conference - Atlanta, 1998.

Woeller, D.J., P.K. Robertson, T.J. Boyd and Dave Thomas, "Detection of Polyaromatic Hydrocarbon Contaminants
Using the UVIF-CPT", 53rd Canadian Geotechnical Conference Montreal, QC October pp. 733-739, 2000.

Zemo, D.A., T.A. Delfino, J.D. Gallinatti, V.A. Baker and L.R. Hilpert, "Field Comparison of Analytical Results from
Discrete-Depth Groundwater Samplers" BAT EnviroProbe and QED HydroPunch, Sixth national Outdoor Action
Conference, Las Vegas, Nevada Proceedings, 1992, pp 299-312.

Copies of ASTM Standards are available through www.astm.org



APPENDIX C

**Laboratory Analytical Reports
and
Chain of Custody Records**



Date of Report: 05/18/2007

Keith Woodburne

TRC

1590 Solano Way, Suite A
Concord, CA 94520

RE: 3072

BC Work Order: 0705306

Enclosed are the results of analyses for samples received by the laboratory on 05/07/2007 22:35. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Contact Person: Vanessa Hooker
Client Service Rep

Authorized Signature

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Laboratory / Client Sample Cross Reference

Laboratory	Client Sample Information				
0705306-01	COC Number:	---	Receive Date:	05/07/2007 22:35	Delivery Work Order:
	Project Number:	3072	Sampling Date:	05/02/2007 09:08	Global ID:
	Sampling Location:	CPT-1	Sample Depth:	---	Matrix: W
	Sampling Point:	CPT-1	Sample Matrix:	Water	Sample QC Type (SACode): CS
	Sampled By:	J. Kearns of TRCC			Cooler ID:
0705306-02	COC Number:	---	Receive Date:	05/07/2007 22:35	Delivery Work Order:
	Project Number:	3072	Sampling Date:	05/02/2007 13:27	Global ID:
	Sampling Location:	CPT-4	Sample Depth:	---	Matrix: W
	Sampling Point:	CPT-4	Sample Matrix:	Water	Sample QC Type (SACode): CS
	Sampled By:	J. Kearns of TRCC			Cooler ID:
0705306-03	COC Number:	---	Receive Date:	05/07/2007 22:35	Delivery Work Order:
	Project Number:	3072	Sampling Date:	05/03/2007 07:25	Global ID:
	Sampling Location:	CPT-2	Sample Depth:	---	Matrix: W
	Sampling Point:	CPT-2	Sample Matrix:	Water	Sample QC Type (SACode): CS
	Sampled By:	J. Kearns of TRCC			Cooler ID:
0705306-04	COC Number:	---	Receive Date:	05/07/2007 22:35	Delivery Work Order:
	Project Number:	3072	Sampling Date:	05/03/2007 09:05	Global ID:
	Sampling Location:	CPT-5	Sample Depth:	---	Matrix: W
	Sampling Point:	CPT-5	Sample Matrix:	Water	Sample QC Type (SACode): CS
	Sampled By:	J. Kearns of TRCC			Cooler ID:
0705306-05	COC Number:	---	Receive Date:	05/07/2007 22:35	Delivery Work Order:
	Project Number:	3072	Sampling Date:	05/03/2007 09:30	Global ID:
	Sampling Location:	COMB	Sample Depth:	---	Matrix: W
	Sampling Point:	COMB	Sample Matrix:	Solids	Sample QC Type (SACode): CS
	Sampled By:	J. Kearns of TRCC			Cooler ID:

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

BCL Sample ID:	0705306-01												
Client Sample Name:	3072, CPT-1, CPT-1, 5/2/2007 9:08:00AM, J. Kearns												
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instrument ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Benzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
1,2-Dibromoethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Ethylbenzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Methyl t-butyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Toluene	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Total Xylenes	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
t-Amyl Methyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
t-Butyl alcohol	ND	ug/L	10		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Diisopropyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Ethanol	ND	ug/L	250		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Ethyl t-butyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
Total Purgeable Petroleum Hydrocarbons	ND	ug/L	50		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane-d4 (Surrogate)	94.7	%	76 - 114 (LCL - UCL)		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443		
Toluene-d8 (Surrogate)	95.6	%	88 - 110 (LCL - UCL)		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443		
4-Bromofluorobenzene (Surrogate)	103	%	86 - 115 (LCL - UCL)		EPA-8260	05/08/07	05/08/07 23:40	SDU	MS-V10	1	BQE0443		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

BCL Sample ID: 0705306-01		Client Sample Name: 3072, CPT-1, CPT-1, 5/2/2007 9:08:00AM, J. Kearns											
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instru-ment ID	Dilution	QC Batch ID	MB Bias	Lab Quas
Diesel Range Organics (C12 - C24)	490	ug/L	50		Luft/TPHd	05/10/07	05/17/07 07:05	MRW	GC-5	1	BQE1132	ND	
Tetracosane (Surrogate)	55.4	%	42 - 125 (LCL - UCL)		Luft/TPHd	05/10/07	05/17/07 07:05	MRW	GC-5	1	BQE1132		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

BCL Sample ID:	0705306-02												
Client Sample Name:	3072, CPT-4, CPT-4, 5/2/2007 1:27:00PM, J. Kearns												
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instru- ment ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Benzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
1,2-Dibromoethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Ethylbenzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Methyl t-butyl ether	10	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Toluene	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Total Xylenes	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
t-Amyl Methyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
t-Butyl alcohol	ND	ug/L	10		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Diisopropyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Ethanol	ND	ug/L	250		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Ethyl t-butyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
Total Purgeable Petroleum Hydrocarbons	ND	ug/L	50		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane-d4 (Surrogate)	95.3	%	76 - 114 (LCL - UCL)		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443		
Toluene-d8 (Surrogate)	96.4	%	88 - 110 (LCL - UCL)		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443		
4-Bromofluorobenzene (Surrogate)	103	%	86 - 115 (LCL - UCL)		EPA-8260	05/08/07	05/08/07 23:58	SDU	MS-V10	1	BQE0443		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

BCL Sample ID: 0705306-02		Client Sample Name: 3072, CPT-4, CPT-4, 5/2/2007 1:27:00PM, J. Kearns											
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instrument ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Diesel Range Organics (C12 - C24)	800	ug/L	50		Luft/TPHd	05/10/07	05/17/07 07:19	MRW	GC-5	1	BQE1132	ND	
Tetracosane (Surrogate)	68.5	%	42 - 125 (LCL - UCL)		Luft/TPHd	05/10/07	05/17/07 07:19	MRW	GC-5	1	BQE1132		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

BCL Sample ID:	0705306-03		Client Sample Name:	3072, CPT-2, CPT-2, 5/3/2007 7:25:00AM, J. Kearns									
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instrument ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Benzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
1,2-Dibromoethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Ethylbenzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Methyl t-butyl ether	6.3	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Toluene	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Total Xylenes	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
t-Amyl Methyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
t-Butyl alcohol	54	ug/L	10		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Diisopropyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Ethanol	ND	ug/L	250		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Ethyl t-butyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
Total Purgeable Petroleum Hydrocarbons	ND	ug/L	50		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane-d4 (Surrogate)	94.7	%	76 - 114 (LCL - UCL)		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443		
Toluene-d8 (Surrogate)	93.3	%	88 - 110 (LCL - UCL)		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443		
4-Bromofluorobenzene (Surrogate)	101	%	86 - 115 (LCL - UCL)		EPA-8260	05/08/07	05/09/07 00:16	SDU	MS-V10	1	BQE0443		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

BCL Sample ID: 0705306-03		Client Sample Name: 3072, CPT-2, CPT-2, 5/3/2007 7:25:00AM, J. Kearns											
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instru-ment ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Diesel Range Organics (C12 - C24)	500	ug/L	50		Luf/TPHd	05/10/07	05/17/07 07:32	MRW	GC-5	1	BQE1132	ND	
Tetracosane (Surrogate)	65.8	%	42 - 125 (LCL - UCL)		Luf/TPHd	05/10/07	05/17/07 07:32	MRW	GC-5	1	BQE1132		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

BCL Sample ID:	0705306-04		Client Sample Name:	3072, CPT-5, CPT-5, 5/3/2007 9:05:00AM, J. Kearns									
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instrument ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Benzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
1,2-Dibromoethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Ethylbenzene	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Methyl t-butyl ether	5.2	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Toluene	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Total Xylenes	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
t-Amyl Methyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
t-Butyl alcohol	ND	ug/L	10		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Diisopropyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Ethanol	ND	ug/L	250		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Ethyl t-butyl ether	ND	ug/L	0.50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
Total Purgeable Petroleum Hydrocarbons	ND	ug/L	50		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443	ND	
1,2-Dichloroethane-d4 (Surrogate)	97.3	%	76 - 114 (LCL - UCL)		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443		
Toluene-d8 (Surrogate)	94.4	%	88 - 110 (LCL - UCL)		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443		
4-Bromofluorobenzene (Surrogate)	103	%	86 - 115 (LCL - UCL)		EPA-8260	05/08/07	05/09/07 00:34	SDU	MS-V10	1	BQE0443		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

BCL Sample ID: 0705306-04		Client Sample Name: 3072, CPT-5, CPT-5, 5/3/2007 9:05:00AM, J. Kearns											
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instru-ment ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Diesel Range Organics (C12 - C24)	280	ug/L	50		Luft/TPHd	05/10/07	05/17/07 07:46	MRW	GC-5	1	BQE1132	ND	
Tetracosane (Surrogate)	80.1	%	42 - 125 (LCL - UCL)		Luft/TPHd	05/10/07	05/17/07 07:46	MRW	GC-5	1	BQE1132		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

BCL Sample ID:	0705306-05		Client Sample Name:	3072, COMB, COMB, 5/3/2007 9:30:00AM, J. Kearns										
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instrument ID	Dilution	QC Batch ID	MB Bias	Lab Quals	
Benzene	ND	mg/kg	0.025		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
1,2-Dibromoethane	ND	mg/kg	0.025		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
1,2-Dichloroethane	ND	mg/kg	0.025		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Ethylbenzene	ND	mg/kg	0.025		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Methyl t-butyl ether	ND	mg/kg	0.025		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Toluene	ND	mg/kg	0.025		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Total Xylenes	ND	mg/kg	0.050		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
t-Amyl Methyl ether	ND	mg/kg	0.0050		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
t-Butyl alcohol	ND	mg/kg	0.25		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Diisopropyl ether	ND	mg/kg	0.025		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Ethanol	ND	mg/kg	5.0		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Ethyl t-butyl ether	ND	mg/kg	0.0050		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
Total Purgeable Petroleum Hydrocarbons	ND	mg/kg	1.0		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486	ND	A01,Z1	
1,2-Dichloroethane-d4 (Surrogate)	99.6	%	70 - 121 (LCL - UCL)		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486			
Toluene-d8 (Surrogate)	97.7	%	81 - 117 (LCL - UCL)		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486			
4-Bromofluorobenzene (Surrogate)	84.6	%	74 - 121 (LCL - UCL)		EPA-8260	05/08/07	05/11/07 22:56	CAW	MS-V3	5	BQE0486			

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

BCL Sample ID: 0705306-05		Client Sample Name: 3072, COMB, COMB, 5/3/2007 9:30:00AM, J. Kearns											
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instru-ment ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Diesel Range Organics (C12 - C24)	ND	mg/kg	1400		Luf/TPHd	05/11/07	05/17/07 09:50	MRW	GC-5	136.36	BQE1039	ND	
Tetracosane (Surrogate)	102	%	58 - 120 (LCL - UCL)		Luf/TPHd	05/11/07	05/17/07 09:50	MRW	GC-5	136.36	BQE1039		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Concentrations (TTLC)

BCL Sample ID: 0705306-05		Client Sample Name: 3072, COMB, COMB, 5/3/2007 9:30:00AM, J. Kearns											
Constituent	Result	Units	PQL	MDL	Method	Prep Date	Run Date/Time	Analyst	Instru-ment ID	Dilution	QC Batch ID	MB Bias	Lab Quals
Lead	8.3	mg/kg	5.0		EPA-6010B	05/08/07	05/08/07 21:17	JCC	TJA61E	1.923	BQE0461	ND	A01

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

Quality Control Report - Precision & Accuracy

Constituent	Batch ID	QC Sample Type	Source Sample ID	Source Result	Result	Spike Added	Units	RPD	Percent Recovery	Control Limits		Lab Quals
										RPD	Percent Recovery	
Benzene	BQE0443	Matrix Spike	0705275-01	0.74000	28.380	25.000	ug/L		111		70 - 130	
		Matrix Spike Duplicate	0705275-01	0.74000	27.430	25.000	ug/L	3,7	107	20	70 - 130	
Toluene	BQE0443	Matrix Spike	0705275-01	1.9500	29.320	25.000	ug/L		109		70 - 130	
		Matrix Spike Duplicate	0705275-01	1.9500	29.020	25.000	ug/L	0,9	108	20	70 - 130	
1,2-Dichloroethane-d4 (Surrogate)	BQE0443	Matrix Spike	0705275-01	ND	9.3100	10.000	ug/L		93,1		76 - 114	
		Matrix Spike Duplicate	0705275-01	ND	9.0800	10.000	ug/L		90,8		76 - 114	
Toluene-d8 (Surrogate)	BQE0443	Matrix Spike	0705275-01	ND	9.8100	10.000	ug/L		98,1		88 - 110	
		Matrix Spike Duplicate	0705275-01	ND	9.8400	10.000	ug/L		98,4		88 - 110	
4-Bromofluorobenzene (Surrogate)	BQE0443	Matrix Spike	0705275-01	ND	10.200	10.000	ug/L		102		86 - 115	
		Matrix Spike Duplicate	0705275-01	ND	10.100	10.000	ug/L		101		86 - 115	
Benzene	BQE0486	Matrix Spike	0703711-64	0	0.12296	0.12500	mg/kg		98,4		70 - 130	
		Matrix Spike Duplicate	0703711-64	0	0.12825	0.12500	mg/kg	4,6	103	20	70 - 130	
Toluene	BQE0486	Matrix Spike	0703711-64	0	0.12182	0.12500	mg/kg		97,5		70 - 130	
		Matrix Spike Duplicate	0703711-64	0	0.12139	0.12500	mg/kg	0,4	97,1	20	70 - 130	
1,2-Dichloroethane-d4 (Surrogate)	BQE0486	Matrix Spike	0703711-64	ND	0.049610	0.050000	mg/kg		99,2		70 - 121	
		Matrix Spike Duplicate	0703711-64	ND	0.049700	0.050000	mg/kg		99,4		70 - 121	
Toluene-d8 (Surrogate)	BQE0486	Matrix Spike	0703711-64	ND	0.051450	0.050000	mg/kg		103		81 - 117	
		Matrix Spike Duplicate	0703711-64	ND	0.049860	0.050000	mg/kg		99,7		81 - 117	
4-Bromofluorobenzene (Surrogate)	BQE0486	Matrix Spike	0703711-64	ND	0.049840	0.050000	mg/kg		99,7		74 - 121	
		Matrix Spike Duplicate	0703711-64	ND	0.048920	0.050000	mg/kg		97,8		74 - 121	

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

Quality Control Report - Precision & Accuracy

Constituent	Batch ID	QC Sample Type	Source Sample ID	Source Result	Result	Spike Added	Units	RPD	Percent Recovery	Control Limits		Lab Quals
										RPD	Percent Recovery	
Diesel Range Organics (C12 - C24)	BQE1039	Matrix Spike	0701337-15		ND	16.722	mg/kg				54 - 119	Q03
		Matrix Spike Duplicate	0701337-15		11.982	16.779	mg/kg			30	54 - 119	Q02
Tetracosane (Surrogate)	BQE1039	Matrix Spike	0701337-15	ND	0.47806	0.66890	mg/kg		71.5		58 - 120	
		Matrix Spike Duplicate	0701337-15	ND	0.73339	0.67114	mg/kg		109		58 - 120	
Diesel Range Organics (C12 - C24)	BQE1132	Matrix Spike	0701337-99	19.000	344.84	500.00	ug/L		65.2		41 - 139	
		Matrix Spike Duplicate	0701337-99	19.000	481.35	500.00	ug/L	34.6	92.5	30	41 - 139	M02
Tetracosane (Surrogate)	BQE1132	Matrix Spike	0701337-99	ND	31.229	40.000	ug/L		78.1		42 - 125	
		Matrix Spike Duplicate	0701337-99	ND	49.344	40.000	ug/L		123		42 - 125	

TRC
 1590 Solano Way, Suite A
 Concord, CA 94520

Project: 3072
 Project Number: [none]
 Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Concentrations (TTLIC)

Quality Control Report - Precision & Accuracy

Constituent	Batch ID	QC Sample Type	Source Sample ID	Source Result	Result	Spike Added	Units	RPD	Percent Recovery	Control Limits		Lab Quals
										RPD	Percent Recovery	
Lead	BQE0461	Duplicate	0705308-04	5.9902	5.9314		mg/kg	1.0		20		A01
		Matrix Spike	0705308-04	5.9902	100.98	98.039	mg/kg		96.9		75 - 125	A01
		Matrix Spike Duplicate	0705308-04	5.9902	103.24	98.039	mg/kg	2.3	99.2	20	75 - 125	A01

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

Quality Control Report - Laboratory Control Sample

Constituent	Batch ID	QC Sample ID	QC Type	Result	Spike Level	PQL	Units	Percent Recovery	RPD	Control Limits		Lab Quals
										Percent Recovery	RPD	
Benzene	BQE0443	BQE0443-BS1	LCS	26.050	25.000	1.0	ug/L	104		70 - 130		
Toluene	BQE0443	BQE0443-BS1	LCS	26.310	25.000	1.0	ug/L	105		70 - 130		
1,2-Dichloroethane-d4 (Surrogate)	BQE0443	BQE0443-BS1	LCS	9.2500	10.000		ug/L	92.5		76 - 114		
Toluene-d8 (Surrogate)	BQE0443	BQE0443-BS1	LCS	9.8000	10.000		ug/L	98.0		88 - 110		
4-Bromofluorobenzene (Surrogate)	BQE0443	BQE0443-BS1	LCS	10.320	10.000		ug/L	103		86 - 115		
Benzene	BQE0486	BQE0486-BS1	LCS	0.12501	0.12500	0.0050	mg/kg	100		70 - 130		
Toluene	BQE0486	BQE0486-BS1	LCS	0.11827	0.12500	0.0050	mg/kg	94.6		70 - 130		
1,2-Dichloroethane-d4 (Surrogate)	BQE0486	BQE0486-BS1	LCS	0.050090	0.050000		mg/kg	100		70 - 121		
Toluene-d8 (Surrogate)	BQE0486	BQE0486-BS1	LCS	0.049080	0.050000		mg/kg	98.2		81 - 117		
4-Bromofluorobenzene (Surrogate)	BQE0486	BQE0486-BS1	LCS	0.047590	0.050000		mg/kg	95.2		74 - 121		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

Quality Control Report - Laboratory Control Sample

Constituent	Batch ID	QC Sample ID	QC Type	Result	Spike Level	PQL	Units	Percent Recovery	RPD	Control Limits		Lab Quals
										Percent Recovery	RPD	
Diesel Range Organics (C12 - C24)	BQE1039	BQE1039-BS1	LCS	13.866	16.393	10	mg/kg	84.6		58 - 131		
Tetracosane (Surrogate)	BQE1039	BQE1039-BS1	LCS	0.83436	0.65574		mg/kg	127		58 - 120		S09
Diesel Range Organics (C12 - C24)	BQE1132	BQE1132-BS1	LCS	313.81	500.00	50	ug/L	62.8		62 - 101		
Tetracosane (Surrogate)	BQE1132	BQE1132-BS1	LCS	28.441	40.000		ug/L	71.1		42 - 125		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Concentrations (TTLC)

Quality Control Report - Laboratory Control Sample

Constituent	Batch ID	QC Sample ID	QC Type	Result	Spike Level	PQL	Units	Percent Recovery	RPD	Control Limits		Lab Quals
										Percent Recovery	RPD	
Lead	BQE0461	BQE0461-BS1	LCS	10.045	10.441	2.5	mg/kg	96.2		75 - 125		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

Quality Control Report - Method Blank Analysis

Constituent	Batch ID	QC Sample ID	MB Result	Units	PQL	MDL	Lab Quals
Benzene	BQE0443	BQE0443-BLK1	ND	ug/L	1.0		
1,2-Dibromoethane	BQE0443	BQE0443-BLK1	ND	ug/L	0.50		
1,2-Dichloroethane	BQE0443	BQE0443-BLK1	ND	ug/L	0.50		
Ethylbenzene	BQE0443	BQE0443-BLK1	ND	ug/L	1.0		
Methyl t-butyl ether	BQE0443	BQE0443-BLK1	ND	ug/L	2.0		
Toluene	BQE0443	BQE0443-BLK1	ND	ug/L	1.0		
Total Xylenes	BQE0443	BQE0443-BLK1	ND	ug/L	1.0		
t-Amyl Methyl ether	BQE0443	BQE0443-BLK1	ND	ug/L	2.0		
t-Butyl alcohol	BQE0443	BQE0443-BLK1	ND	ug/L	10		
Diisopropyl ether	BQE0443	BQE0443-BLK1	ND	ug/L	2.0		
Ethanol	BQE0443	BQE0443-BLK1	ND	ug/L	1000		
Ethyl t-butyl ether	BQE0443	BQE0443-BLK1	ND	ug/L	2.0		
Total Purgeable Petroleum Hydrocarbons	BQE0443	BQE0443-BLK1	ND	ug/L	50		
1,2-Dichloroethane-d4 (Surrogate)	BQE0443	BQE0443-BLK1	96.2	%		76 - 114 (LCL - UCL)	
Toluene-d8 (Surrogate)	BQE0443	BQE0443-BLK1	97.0	%		88 - 110 (LCL - UCL)	
4-Bromofluorobenzene (Surrogate)	BQE0443	BQE0443-BLK1	102	%		86 - 115 (LCL - UCL)	
Benzene	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0050		
1,2-Dibromoethane	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0050		
1,2-Dichloroethane	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0050		
Ethylbenzene	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0050		
Methyl t-butyl ether	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0050		
Toluene	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0050		
Total Xylenes	BQE0486	BQE0486-BLK1	ND	mg/kg	0.010		
t-Amyl Methyl ether	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0010		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Volatile Organic Analysis (EPA Method 8260)

Quality Control Report - Method Blank Analysis

Constituent	Batch ID	QC Sample ID	MB Result	Units	PQL	MDL	Lab Quals
t-Butyl alcohol	BQE0486	BQE0486-BLK1	ND	mg/kg	0.20		
Diisopropyl ether	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0050		
Ethanol	BQE0486	BQE0486-BLK1	ND	mg/kg	1.0		
Ethyl t-butyl ether	BQE0486	BQE0486-BLK1	ND	mg/kg	0.0010		
Total Purgeable Petroleum Hydrocarbons	BQE0486	BQE0486-BLK1	ND	mg/kg	0.20		
1,2-Dichloroethane-d4 (Surrogate)	BQE0486	BQE0486-BLK1	99.3	%		70 - 121 (LCL - UCL)	
Toluene-d8 (Surrogate)	BQE0486	BQE0486-BLK1	96.6	%		81 - 117 (LCL - UCL)	
4-Bromofluorobenzene (Surrogate)	BQE0486	BQE0486-BLK1	94.1	%		74 - 121 (LCL - UCL)	

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Petroleum Hydrocarbons

Quality Control Report - Method Blank Analysis

Constituent	Batch ID	QC Sample ID	MB Result	Units	PQL	MDL	Lab Quals
Diesel Range Organics (C12 - C24)	BQE1039	BQE1039-BLK1	ND	mg/kg	10		
Tetracosane (Surrogate)	BQE1039	BQE1039-BLK1	94.1	%	58 - 120 (LCL - UCL)		
Diesel Range Organics (C12 - C24)	BQE1132	BQE1132-BLK1	ND	ug/L	50		
Tetracosane (Surrogate)	BQE1132	BQE1132-BLK1	81.7	%	42 - 125 (LCL - UCL)		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Total Concentrations (TTLC)

Quality Control Report - Method Blank Analysis

Constituent	Batch ID	QC Sample ID	MB Result	Units	PQL	MDL	Lab Quals
Lead	BQE0461	BQE0461-BLK1	ND	mg/kg	2.5		

TRC
1590 Solano Way, Suite A
Concord, CA 94520

Project: 3072
Project Number: [none]
Project Manager: Keith Woodburne

Reported: 05/18/2007 10:30

Notes And Definitions

MDL Method Detection Limit

ND Analyte Not Detected at or above the reporting limit

PQL Practical Quantitation Limit

RPD Relative Percent Difference

A01 PQL's and MDL's are raised due to sample dilution.

M02 Analyte detected in the Method Blank at a level between the PQL and 1/2 the PQL.

Q02 Matrix spike precision is not within the control limits.

Q03 Matrix spike recovery(s) is(are) not within the control limits.

S09 The surrogate recovery on the sample for this compound was not within the control limits.

Z1 This sample clogged the needle, which caused the surrogate's recovery to be out of range. Second analysis was ran to verify the surrogate's %

#07-05306

BC LABORATORIES, INC.

4100 Atlas Court □ Bakersfield, CA 93308
(661) 327-4911 □ FAX (661) 327-1918

CHAIN OF CUSTODY

Analysis Requested

Bill to: Conoco Phillips/ TRC		Consultant Firm: TRC		MATRIX (GW) Ground-water (S) Soil (WW) Waste-water (SL) Sludge	BTEX/MTBE by 8021B, Gas by 8015	TPH GAS by 8015M	TPH DIESEL by 8015	8260 full list w/ oxygenates	BTEX/MTBE/GAS BY 8260B	ETHANOL by 8260B	TPH -G by GC/MS	TPH by 8240B	TPH, PIPE, TAME, EDGE, 1,2-DCA, ED8	TOTAL LEAD	Turnaround Time Requested
Address: 2445 CASTRO VALLEY BLVD.		24 Technology Drive 1590 SOLANO WY SUITE A IRVINE, CA 92618-2302 CONCORD, CA 94520 Attn: Anju Farfan ATTN: KETH WOODBRANE													
City: CASTRO VALLEY		4-digit site#: 3072													
State: CA Zip:		Project #: 42013903													
Conoco Phillips Mgr:		Sampler Name: J. KEARNS													
Lab#	Sample Description	Field Point Name	Date & Time Sampled												
	CPT-1 -1		5/2/07 0908	G.W.			X		X	X		X	X		
	CPT-4 -2		5/2/07 1327	↓			↓		↓	↓		↓	↓		
	CPT-2 -3		5/3/07 0725	↓			↓		↓	↓		↓	↓		
	CPT-5 -4		5/3/07 0905	↓			↓		↓	↓		↓	↓		
	COMB. -5		5/3/07 0930	S			↓		↓	↓		↓	↓	X	

60 MR. J. K. SIMPSON

Comments: PLEASE COMBINE SAMPLES FOR COMPOSIT ANALYSIS. GLOBAL ID:	Relinquished by: (Signature) <i>J. Kearns</i>	Received by: <i>Ross Dickey</i>	Date & Time 5/7/07 1450
	Relinquished by: (Signature) <i>Ross Dickey 5/7/07</i>	Received by: <i>R. Ruynd</i>	Date & Time 5-7-07 1900
	Relinquished by: (Signature) <i>R. Ruynd 5-7-07 2235</i>	Received by: <i>[Signature]</i>	Date & Time 5/7/07 2235

(A) = ANALYSIS (C) = CONTAINER (P) = PRESERVATIVE