

Ultramar

Ultramar, Inc.
P.O. Box 466
525 W. Third Street
Hanford, CA 93232-0466
(209) 582-0241

Telecopy: 209-585-5685 Credit
209-583-3330 Administrative
209-583-3302 Information Services
209-583-3358 Accounting

*Sampling of
MW5, MW6, & NW07
Quarterly*

March 18, 1996

Ms. Amy Leech ✓
Senior Hazardous Materials Specialist
Alameda County Health Care Services
80 Swan Way, Room 200
Oakland, CA 94621

SUBJECT: FORMER BEACON STATION NO. 574, 22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA

Dear Ms. Leech:

Enclosed is a copy of the **Fourth Quarter 1995 Groundwater Monitoring Report** for the above-referenced Ultramar facility prepared by El Dorado Environmental, Inc. Also included with the report is a copy of the Quarterly Status report describing the work performed this quarter and the work anticipated to be conducted in the next quarter.

Please do not hesitate to call if you have any questions about this project at (209) 583-5571.

Sincerely,

ULTRAMAR INC.



Kenneth R. Earnest
Environmental Specialist II
Marketing Environmental Department

Enclosure: Fourth Quarter 1995 Groundwater Monitoring Report
Quarterly Status Report

cc w/encl: Mr. Rich Hiett, San Francisco Bay Region, RWQCB
Mr. Peter J. Pugnale, Shell Oil Company



A Member of the Ultramar Group of Companies

BEACON
#1 Quality and Service

ENVIRONMENTAL
PROTECTION
05 MAR 20 PM 1:05

Ultramar

Ultramar, Inc.
P.O. Box 466
525 W. Third Street
Hanford, CA 93232-0466
(209) 582-0241

Telecopy: 209-585-5685 Credit
209-583-3330 Administrative
209-583-3302 Information Services
209-583-3358 Accounting

ENVIRONMENTAL PROJECT QUARTERLY STATUS REPORT

DATE REPORT SUBMITTED: March 18, 1996
QUARTER ENDING: December 31, 1995

FORMER SERVICE STATION NO.: 574
ADDRESS: 22315 Redwood Road, Castro Valley, CA
COUNTY: Alameda
ULTRAMAR CONTACT: Kenneth R. Earnest

TEL. NO: 209-583-5571

BACKGROUND:

On May 5, 1987, five underground storage tanks (two gasoline, two diesel and one waste oil) were excavated and removed from the site. Soil samples were collected from beneath the tanks and analyzed for hydrocarbon constituents. Based on preliminary analytical data related to the collected soil samples, it was determined that elevated levels of gasoline and diesel were present in the soil beneath the former fuel tanks. Soil was overexcavated from beneath the former fuel tanks. Soil samples were collected after the over-excavation and confirmed that the addition excavation was successful.

During March 1991, three ground-water monitoring wells were installed on-site. Laboratory analysis of soil samples obtained from the borings for the installation of the monitoring wells indicated that the soil near the soil/water interface exhibited gasoline range hydrocarbons.

Quarterly monitoring was initiated during the fourth quarter 1991.

Installed five new groundwater monitoring wells in May of 1993. With the installation of these new wells the site is fully defined.

Conducted a soil gas survey/performance test, aquifer pump test and air sparging test during first quarter 1994.

Submitted PAR/RAP during the fourth quarter 1994.

SUMMARY OF THIS QUARTER'S ACTIVITIES:

Performed fourth quarter monitoring on December 27, 1995.



A Member of the Ultramar Group of Companies

BEACON
#1 Quality and Service

Page 2
Former Station #574
Castro Valley, CA

RESULT OF QUARTERLY MONITORING:

Results indicate that the dissolved petroleum hydrocarbon plume continues to be defined.

PROPOSED ACTIVITY OR WORK FOR NEXT QUARTER:

<u>ACTIVITY</u>	<u>ESTIMATED COMPLETION DATE</u>
First quarter monitoring	March 1996
Initiate MTBE sampling	March 1996

El Dorado Environmental, Inc.

2221 Goldorado Trail, El Dorado, California 95623

(916) 626-3898
Fax (916) 626-3899

RECEIVED

MAR 14 1996

March 12, 1996

Mr. Kenneth Earnest
Environmental Specialist
Ultramar Inc.
525 West Third Street
Hanford, California 93232-0466

Subject: **Fourth Quarter 1995 Ground Water Monitoring Report**
Former Beacon Station #574
22315 Redwood Road, Castro Valley, California

Dear Mr. Earnest:

El Dorado Environmental, Inc. (EDE) has prepared this report to document the results of quarterly ground water monitoring conducted on December 27, 1995 at the subject site (Figure 1). The monitoring, conducted by Doulos Environmental (Doulos), included measurements of depth to ground water, subjective analysis for the presence or absence of free product, ground water purging and collection of ground water samples. Doulos reports that all field activities were conducted in accordance with the Ultramar Field Procedures described in Attachment A.

GROUND WATER ELEVATIONS

Prior to purging, Doulos collected depth to ground water measurements. Copies of Doulos' field data sheets are contained in Attachment B. Ground water elevation data collected since March 1992 are summarized in Table 1. Historical ground water elevation data are contained in Attachment C. On the basis of the current measurements, ground water flows toward the southwest (Figure 2) at a gradient of 0.01 foot per foot. Ground water levels have increased an average of 0.40 feet compared to the last monitoring event.

GROUND WATER SAMPLING AND ANALYSES

Ground water samples were collected from three monitoring wells. In accordance with an agreement with Alameda County, monitoring wells MW-1, MW-2, MW-3, MW-4 and MW-8 were not sampled this quarter. All samples were analyzed for concentrations of:

- TPH, as gasoline, by modified EPA Method 8015.
- BTEX by EPA Method 602.

Analytical results collected since March 1992 are summarized in Table 2. Historical analytical data are contained in Attachment D. Figure 3 illustrates the inferred distribution of dissolved benzene in ground water based on the current data. The laboratory report and chain-of-custody form for the current sampling event are included in Attachment E. Benzene was not present at detectable concentrations in ground water samples collected from monitoring wells MW-5, MW-6, and MW-7.

A copy of this quarterly monitoring report should be forwarded to:

Mr. Scott Seery
Senior Hazardous Materials Specialist
Alameda County Health Agency
Division of Hazardous Materials
Department of Environmental Health
80 Swan Way, Room 350
Oakland, California 94621

Mr. Rich Hiatt
California Regional Water Quality Control Board
San Francisco Bay Region
2101 Webster Street, Suite 500
Oakland, California 94612

FIGURES:

FIGURE 1 SITE LOCATION MAP

FIGURE 2 GROUND WATER CONTOUR MAP
DECEMBER 27, 1995

FIGURE 3 DISSOLVED BENZENE DISTRIBUTION MAP
DECEMBER 27, 1995

TABLES:

TABLE 1 GROUND WATER ELEVATION DATA

TABLE 2 GROUND WATER ANALYTICAL RESULTS

ATTACHMENTS:


A ULTRAMAR FIELD PROCEDURES

B DOULOS ENVIRONMENTAL
FIELD DATA SHEETS

C HISTORICAL GROUND WATER ELEVATION DATA


D HISTORICAL GROUND WATER ANALYTICAL DATA

E LABORATORY REPORT AND
CHAIN-OF-CUSTODY FORM

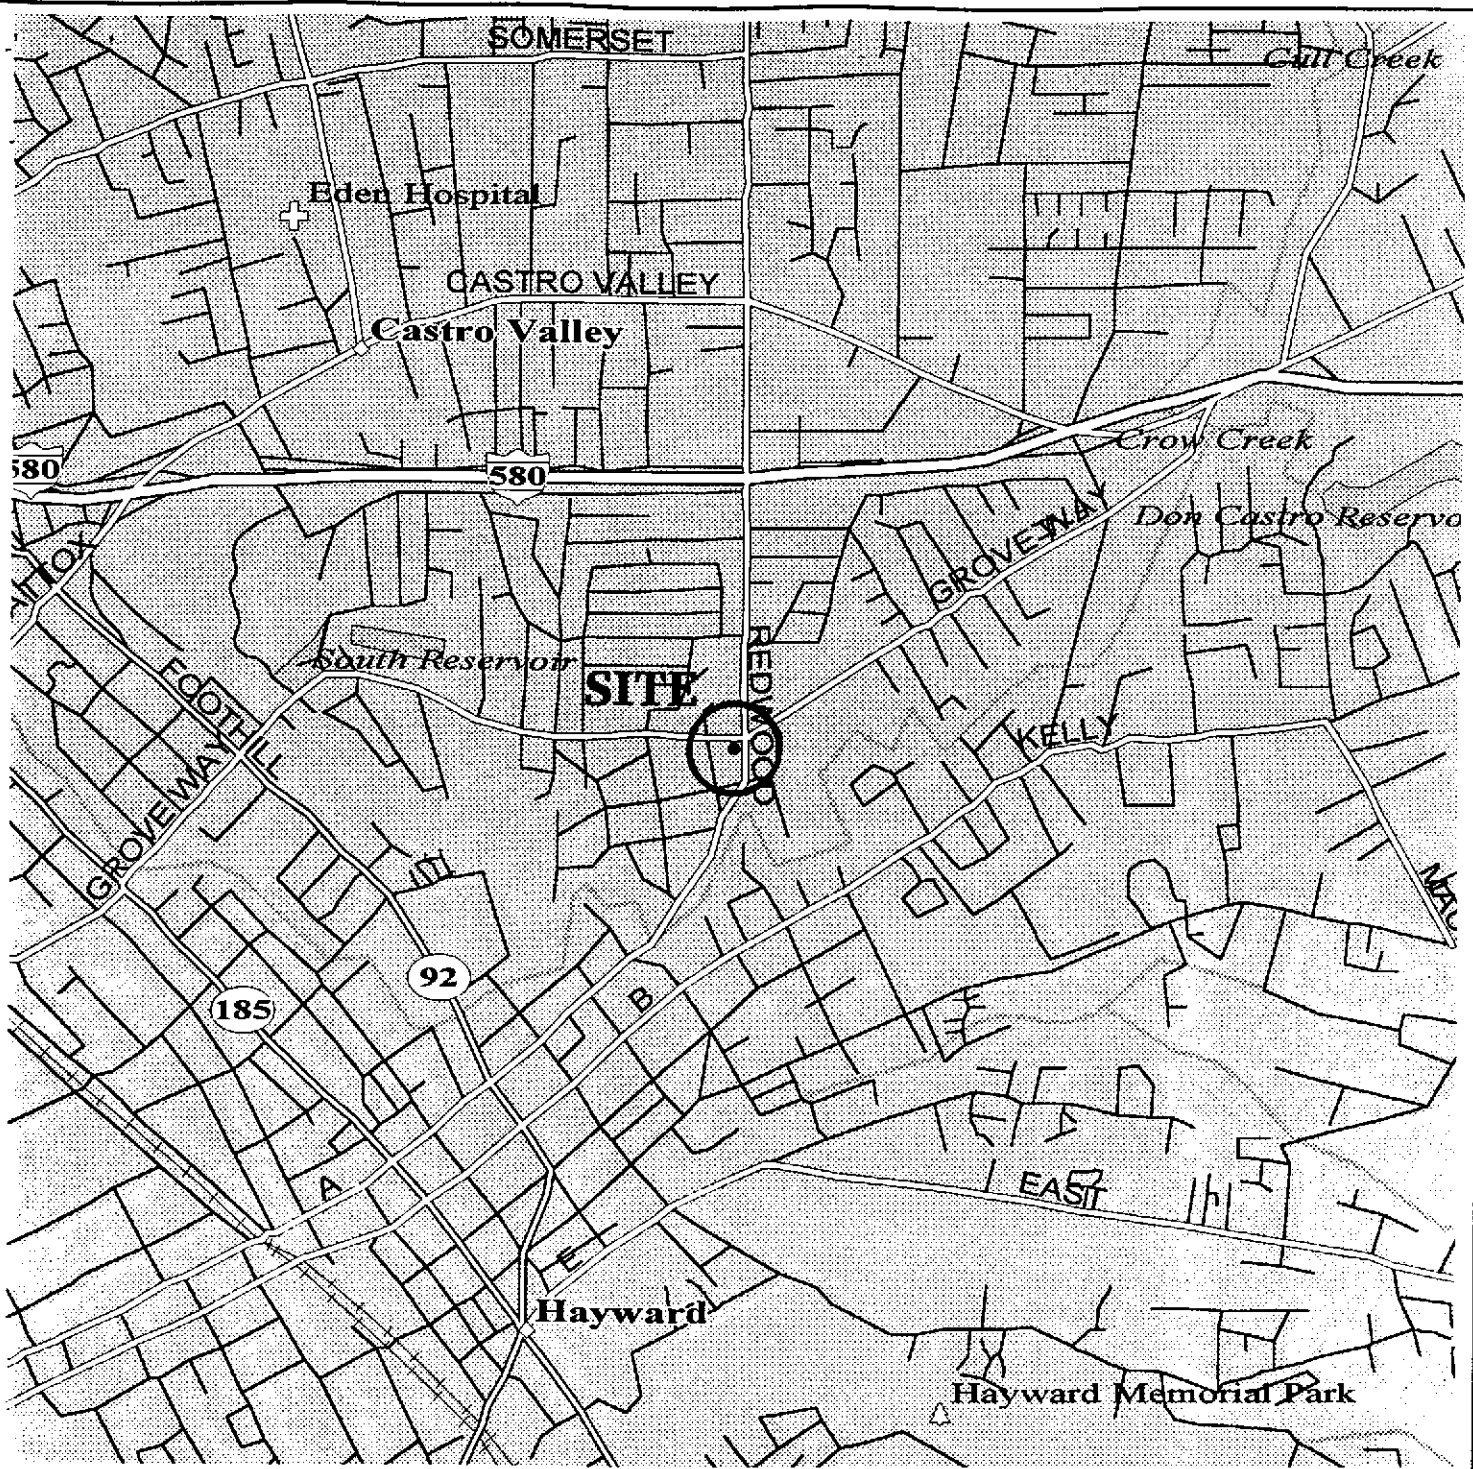

SITE LOCATION MAP		FIGURE 1
BEACON STATION #574 22315 REDWOOD ROAD CASTRO VALLEY, CALIFORNIA		PROJECT NUMBER: U065.01
EL DORADO ENVIRONMENTAL, INC.		DRAWN BY: D.A.V.D.
		CHECKED BY: D.V.D.

SOURCE: STREET ATLAS U.S.A., DELORME MAPPING, 1994

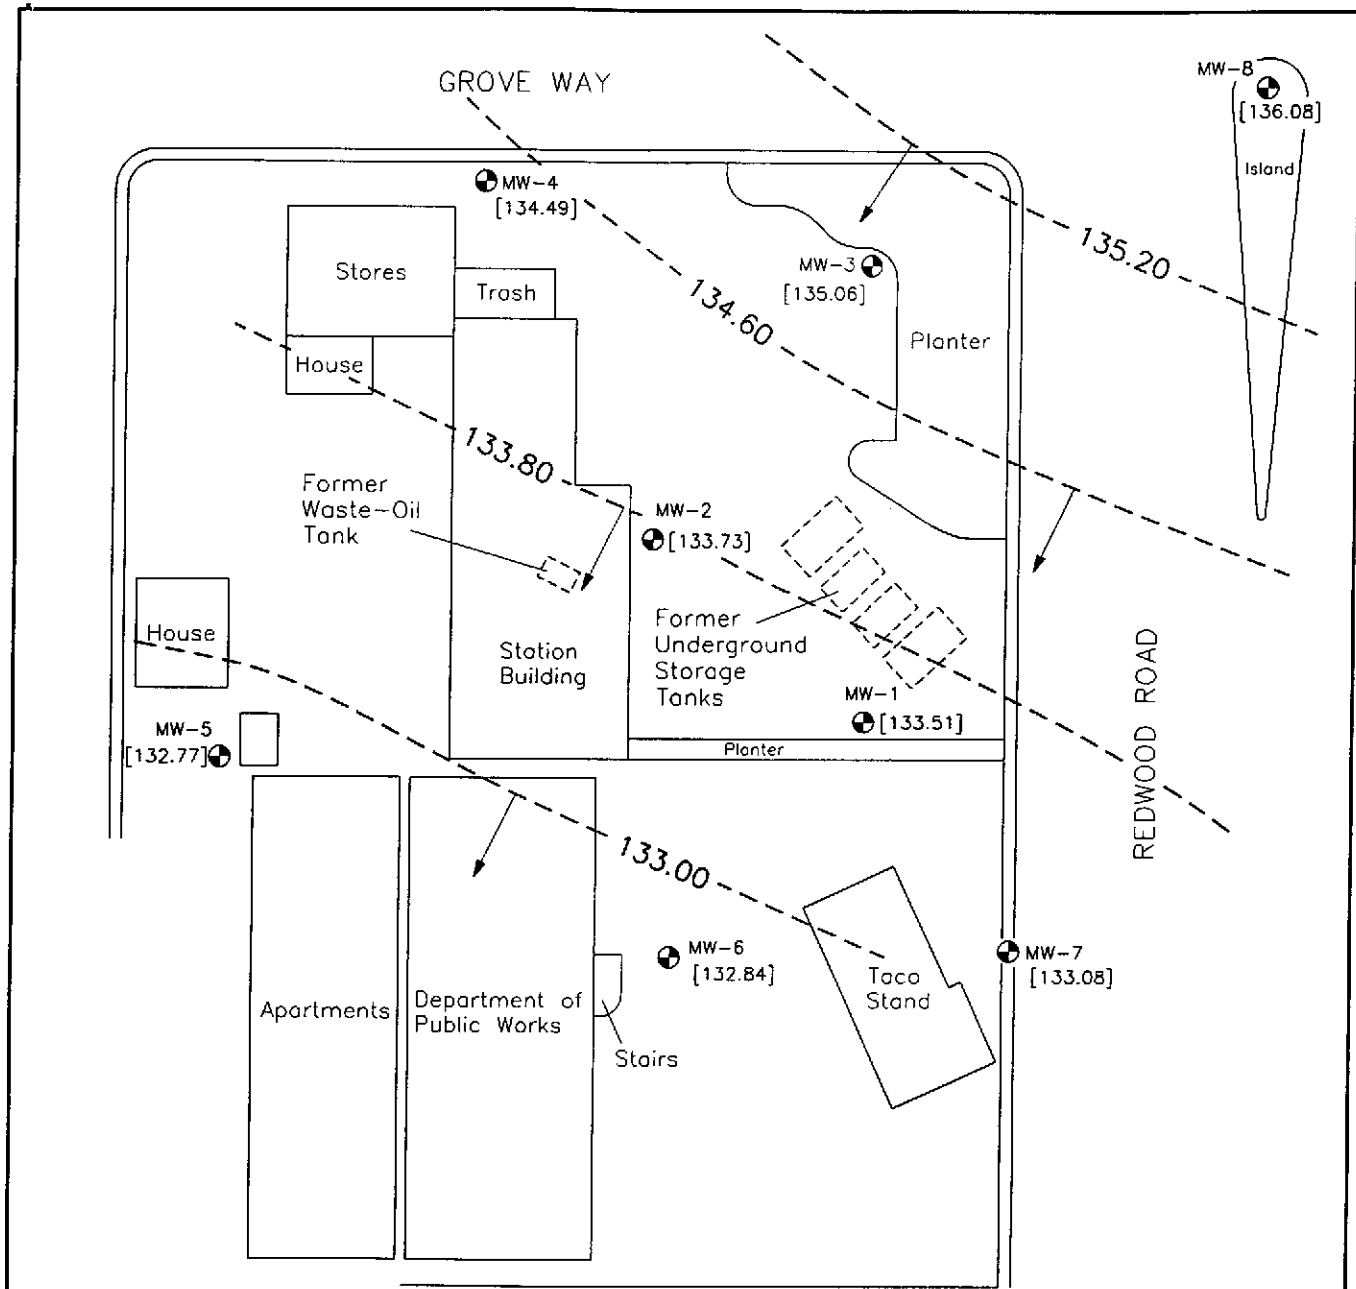

EXPLANATION

MW-8 ● Monitoring Well Location

[136.08] Elevation of Ground Water Measured in Feet; Datum is Mean Sea Level


133.80 --- Line of Equal Elevation of Ground Water Measured in Feet; Datum is Mean Sea Level

↙ Inferred Direction of Ground Water Flow



SOURCE: FIGURE MODIFIED FROM DRAWING PROVIDED BY FUGRO WEST, INC.

GROUND WATER CONTOUR MAP, DECEMBER 27, 1995	FIGURE 2
BEACON STATION #574 22315 REDWOOD ROAD CASTRO VALLEY, CALIFORNIA	PROJECT NUMBER: U065.01
	DRAWN BY: D.A.
EL DORADO ENVIRONMENTAL, INC.	CHECKED BY: <i>D.A.</i>

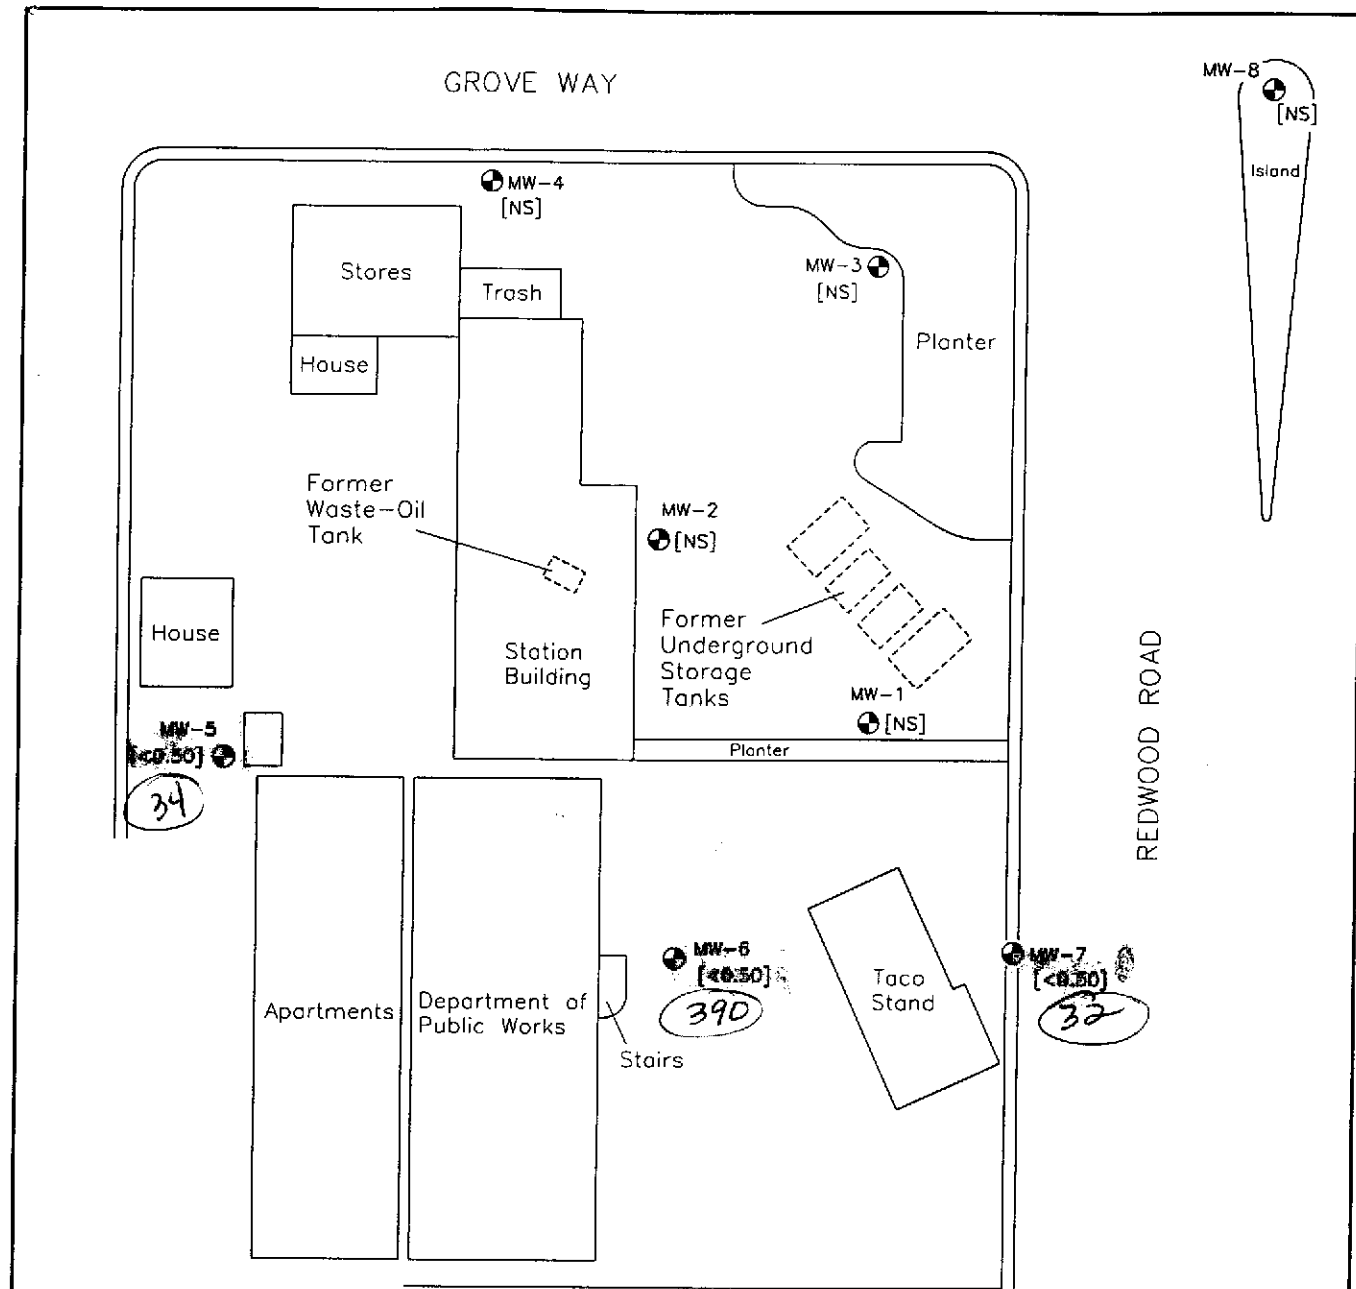

○ = MTBE ppb

EXPLANATION

- MW-8 ● Monitoring Well Location
- [<0.50] Concentration of Benzene in Ground Water; Concentration in Micrograms per Liter
- [NS] Well Not Sampled
- - - 50 - - - Line of Equal Concentration of Benzene in Ground Water; Concentration in Micrograms per Liter



SOURCE: FIGURE MODIFIED FROM DRAWING PROVIDED BY FUGRO WEST, INC.

DISSOLVED BENZENE DISTRIBUTION MAP, DECEMBER 27, 1995	FIGURE 3
BEACON STATION #574 22315 REDWOOD ROAD CASTRO VALLEY, CALIFORNIA	PROJECT NUMBER: U065.01
	DRAWN BY: D.A.
EL DORADO ENVIRONMENTAL, INC.	CHECKED BY: D.D.

TABLE 1
GROUND WATER ELEVATION DATA
BEACON STATION #574
22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA
(Measurements in feet)

Monitoring Well	Date	Reference Elevation (top of casing) ¹	Depth to Ground Water ¹	Ground Water Elevation ²	Well Depth	Comments
MW-1	03/27/92	156.55	22.43	134.12	---	
	06/04/92		23.40	133.15	---	
	09/23/92		24.07	132.48	---	
	11/12/92		24.16	132.39	29.33	
	02/02/93		21.87	134.68	29.80	
	05/07/93		22.58	133.97	29.84	
	05/18/93		22.66	133.89	---	
	08/11/93		23.41	133.14	29.81	
	11/05/93		24.09	132.46	29.81	
	03/01/94		22.76	133.79	29.85	
	06/02/94		23.24	133.31	29.85	
	09/09/94		23.93	132.62	29.86	
	12/20/94		22.94	133.61	29.85	
	03/08/95		22.20	134.35	29.71	
	06/14/95		22.65	133.90	29.70	
	09/26/95		23.44	133.11	29.71	
12/27/95	23.04	133.51	29.72			
MW-2	03/27/92	155.17	20.82	134.35	---	
	06/04/92		21.81	133.36	---	
	09/23/92		22.45	132.72	---	
	11/12/92		22.60	132.57	29.71	
	02/02/93		20.28	134.89	29.73	
	05/07/93		20.97	134.20	29.73	
	05/18/93		21.06	134.11	---	
	08/11/93		21.85	133.32	29.70	
	11/05/93		22.32	132.85	29.70	
	03/01/94		21.19	133.98	29.68	
	06/02/94		21.59	133.58	29.69	
	09/09/94		22.33	132.84	29.66	
	12/20/94		21.37	133.80	29.65	
	03/08/95		20.60	134.57	29.52	
	06/14/95		21.04	134.13	29.54	
	09/26/95		21.84	133.33	29.53	
12/27/95	21.44	133.73	29.56			
MW-3	03/27/92	157.13	21.46	135.67	---	
	06/04/92		22.34	134.79	---	
	09/23/92		22.84	134.29	---	
	11/12/92		23.04	134.09	29.55	
	02/02/93		21.03	136.10	29.45	
	05/07/93		21.59	135.54	29.53	
	05/18/93		21.73	135.40	---	
	08/11/93		22.31	134.82	29.41	
	11/05/93		22.85	134.28	29.41	
	03/01/94		21.97	135.16	29.55	
	06/02/94		22.29	134.84	29.56	
	09/09/94		22.91	134.22	29.56	
	12/20/94		22.11	135.02	29.54	
	03/08/95		21.40	135.73	29.38	
	06/14/95		21.80	135.33	29.36	
	09/26/95		22.38	134.75	29.37	
12/27/95	22.07	135.06	29.37			

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing.
2 = Elevation referenced to mean sea level.
Well Depth = Measurement from top of casing to bottom of well.
--- = Not measured.

TABLE 1
GROUND WATER ELEVATION DATA
BEACON STATION #574
22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA
(Measurements in feet)

Monitoring Well	Date	Reference Elevation (top of casing) ¹	Depth to Ground Water ¹	Ground Water Elevation ²	Well Depth	Comments
MW-4	05/18/93	151.96	17.55	134.41	---	
	08/11/93		17.50	134.46	28.43	
	11/05/93		15.84	136.12	28.43	
	03/01/94		17.35	134.61	28.11	
	06/02/94		17.68	134.28	28.12	
	09/09/94		18.19	133.77	28.13	
	12/20/94		17.52	134.44	28.10	
	03/08/95		16.82	135.14	27.97	
	06/14/95		17.22	134.74	27.97	
	09/26/95		17.79	134.17	27.91	
	12/27/95		17.47	134.49	27.89	
MW-5	05/18/93	148.68	15.72	132.96	—	
	08/11/93		16.42	132.26	25.43	
	11/05/93		16.92	131.76	25.43	
	03/01/94		15.54	133.14	25.00	
	06/02/94		16.19	132.49	25.00	
	09/09/94		16.87	131.81	25.00	
	12/20/94		15.84	132.84	25.01	
	03/08/95		15.11	133.57	24.85	
	06/14/95		15.69	132.99	24.86	
	09/26/95		16.46	132.22	24.81	
	12/27/95		15.91	132.77	24.80	
MW-6	05/18/93	153.96	20.80	133.16	—	
	08/11/93		21.64	132.32	31.15	
	11/05/93		22.11	131.85	31.15	
	03/01/94		20.80	133.16	29.96	
	06/02/94		21.37	132.59	29.98	
	09/09/94		22.05	131.91	29.96	
	12/20/94		21.06	132.90	29.89	
	03/08/95		20.29	133.67	29.67	
	06/14/95		20.81	133.15	29.65	
	09/26/95		21.62	132.34	29.66	
	12/27/95		21.12	132.84	29.63	
MW-7	05/18/93	156.09	22.64	133.45	—	
	08/11/93		23.25	132.84	30.75	
	11/05/93		23.93	132.16	30.75	
	03/01/94		22.72	133.37	30.11	
	06/02/94		23.22	132.87	30.12	
	09/09/94		23.90	132.19	30.12	
	12/20/94		22.98	133.11	30.10	
	03/08/95		22.14	133.95	29.91	
	06/14/95		22.61	133.48	29.91	
	09/26/95		23.43	132.66	29.90	
	12/27/95		23.01	133.08	29.90	

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing.
2 = Elevation referenced to mean sea level.
Well Depth = Measurement from top of casing to bottom of well.
--- = Not measured.

TABLE 1
GROUND WATER ELEVATION DATA
BEACON STATION #574
22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA
(Measurements in feet)

Monitoring Well	Date	Reference Elevation (top of casing) ¹	Depth to Ground Water ¹	Ground Water Elevation ²	Well Depth	Comments
MW-8	05/18/93	158.04	21.55	136.49	—	
	08/11/93		22.43	135.61	34.82	
	11/05/93		23.00	135.04	34.82	
	03/01/94		22.05	135.99	34.04	
	06/02/94		22.29	135.75	34.04	
	09/09/94		22.99	135.05	34.04	
	12/20/94		22.14	135.90	33.98	
	03/08/95		21.25	136.79	34.48	
	06/14/95		21.70	136.34	34.49	
	09/26/95		22.29	135.75	34.40	
	12/27/95		21.96	136.08	34.43	

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing.
2 = Elevation referenced to mean sea level.
Well Depth = Measurement from top of casing to bottom of well.
— = Not measured.

TABLE 2
GROUND WATER ANALYTICAL RESULTS
BEACON STATION #574
22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA
(All results in micrograms per Liter)

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics			
		Gasoline	Diesel	Motor Oil	Benzene	Toluene	Ethyl-benzene	Total Xylenes
MW-1	03/27/92	5,600	<50	<50	760	900	230	1,100
	06/04/92	2,600	<800	NA	270	57	230	440
	09/23/92	3,400	NA	NA	480	430	110	550
	11/12/92	2,700	NA	NA	5.8	<5.0	140	340
	02/02/93	8,500	NA	NA	760	770	250	1,200
	05/07/93	7,700	NA	NA	970	630	280	1,500
	08/11/93	11,000	NA	NA	1,400	1,000	260	1,600
	11/05/93	36,000	NA	NA	6,200	4,700	1,400	7,100
	03/01/94	3,800	NA	NA	580	490	110	620
	06/02/94	8,900	NA	NA	1,900	1,200	420	2,100
	09/09/94	4,300	NA	NA	740	290	200	630
	12/20/94	3,900	NA	NA	550	260	150	510
	03/08/95	8,100	NA	NA	1,100	540	250	1,100
	06/14/95	NS	NS	NS	NS	NS	NS	NS
	09/26/95	8,600	NA	NA	2,100	550	420	1,300
12/27/95	NS	NS	NS	NS	NS	NS	NS	
MW-2	03/27/92	18,000	<50	<50	2,400	2,300	870	3,300
	06/04/92	14,000	<5,000	NA	1,900	1,700	580	2,300
	09/23/92	22,000	NA	NA	2,100	1,500	760	2,900
	11/12/92	29,000	NA	NA	2,400	860	540	3,500
	02/02/93	24,000	NA	NA	2,700	1,900	590	2,600
	05/07/93	19,000	NA	NA	1,800	1,300	460	2,600
	08/11/93	23,000	NA	NA	2,300	1,500	550	2,300
	11/05/93	30,000	NA	NA	3,100	2,900	860	3,700
	03/01/94	13,000	NA	NA	1,500	490	350	1,000
	06/02/94	12,000	NA	NA	2,000	790	460	1,300
	09/09/94	13,000	NA	NA	1,800	660	440	1,000
	12/20/94	16,000	NA	NA	2,300	1,000	650	1,900
	03/08/95	16,000	NA	NA	2,200	1,000	550	2,100
	06/14/95	NS	NS	NS	NS	NS	NS	NS
	09/26/95	18,000	NA	NA	2,500	1,000	770	2,700
12/27/95	NS	NS	NS	NS	NS	NS	NS	
MW-3	03/27/92	160	<50	<50	9.2	4.8	10	23
	06/04/92	120	<50	NA	7.5	2.7	0.5	15
	09/23/92	220	NA	NA	8.3	4.3	6.2	19
	11/12/92	230	NA	NA	12	5.5	7.7	19
	02/02/93	86	NA	NA	2.4	0.71	2.7	6.2
	05/07/93	140	NA	NA	2.6	1.2	3.9	8.4
	08/11/93	490	NA	NA	15	8.1	14	37
	11/05/93	820	NA	NA	45	24	34	93
	03/01/94	410	NA	NA	7.4	2.7	5.6	10
	06/02/94	440	NA	NA	13	4.9	14	31
	09/09/94	620	NA	NA	12	4.8	9.7	20
	12/20/94	770	NA	NA	24	11	16	36
	03/08/95	300	NA	NA	6.1	0.97	4.8	7.5
	06/14/95	NS	NS	NS	NS	NS	NS	NS
	09/26/95	130	NA	NA	4.8	1.6	4.8	9.4
12/27/95	NS	NS	NS	NS	NS	NS	NS	

NOTES: < = Below indicated detection limit.
NS = Not sampled.
NA = Not analyzed.
* = Product is not typical gasoline.

TABLE 2
GROUND WATER ANALYTICAL RESULTS
BEACON STATION #574
22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA
(All results in micrograms per Liter)

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics			
		Gasoline	Diesel	Motor Oil	Benzene	Toluene	Ethyl-benzene	Total Xylenes
MW-4	05/18/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/01/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/08/95	NS	NS	NS	NS	NS	NS	NS
	06/14/95	NS	NS	NS	NS	NS	NS	NS
	09/26/95	NS	NS	NS	NS	NS	NS	NS
	12/27/95	NS	NS	NS	NS	NS	NS	NS
MW-5	05/18/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/01/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/08/95	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/14/95	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/26/95	<50	NA	NA	<0.50	<0.50	<0.50	<0.50
	12/27/95	<50	NA	NA	<0.50	<0.50	<0.50	<0.50
MW-6	05/18/93	170	NA	NA	<0.5	<0.5	<0.5	<0.5
	08/11/93	78	NA	NA	<0.5	<0.5	<0.5	<0.5
	11/05/93	170	NA	NA	<0.5	<0.5	<0.5	0.65
	03/01/94	210	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/02/94	190	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/09/94	140	NA	NA	<0.5	<0.5	<0.5	<0.5
	12/20/94	210	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/08/95	180*	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/14/95	220*	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/26/95	110*	NA	NA	<0.50	<0.50	<0.50	<0.50
	12/27/95	130*	NA	NA	<0.50	<0.50	<0.50	<0.50
MW-7	05/18/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/01/94	60	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/08/95	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/14/95	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/26/95	<50	NA	NA	<0.50	<0.50	<0.50	<0.50
	12/27/95	<50	NA	NA	<0.50	<0.50	<0.50	<0.50
MW-8	05/18/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/01/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA	<0.5	<0.5	<0.5	<0.5
	03/08/95	NS	NS	NS	NS	NS	NS	NS
	06/14/95	NS	NS	NS	NS	NS	NS	NS
	09/26/95	NS	NS	NS	NS	NS	NS	NS
	12/27/95	NS	NS	NS	NS	NS	NS	NS

NOTES: < = Below indicated detection limit.
NS = Not sampled.
NA = Not analyzed.
* = Product is not typical gasoline.

ATTACHMENT A
ULTRAMAR FIELD PROCEDURES

ATTACHMENT A - ULTRAMAR FIELD PROCEDURES

The following section describes procedures used by field personnel in the performance of ground water sampling at Ultramar Inc. sites.

Ground Water Level and Total Depth Determination

A water level indicator is lowered down the well and a measurement of the depth to water from an established reference point on the casing is taken. The indicator probe is used to sound the bottom of the well and a measurement of the total depth of the well is taken. Both the water level and total depth measurements are taken to the nearest 0.01-foot.

Visual Analysis of Ground Water

Prior to purging and sampling ground water monitoring wells, a water sample is collected from each well for subjective analysis. The visual analysis involves gently lowering a clean, disposable, polyethylene bailer to approximately one-half the bailer length past the water table interface. The bailer is then retrieved, and the sample contained within the bailer is examined for floating product or the appearance of a petroleum product sheen. If measurable free product is noted in the bailer, a water/product interface probe is used to determine the thickness of the free product to the nearest 0.01-foot. The thickness of free product is determined by subtracting the depth to product from the depth to water.

Monitoring Well Purging and Sampling

Monitoring wells are purged by removing approximately four casing volumes of water from the well using a clean disposable bailer or electrical submersible purge pump. Purge volumes are calculated prior to purging. During purging, the temperature, pH, and electric conductivity of the purge water are monitored. The well is considered to be sufficiently purged when: The four casing volumes have been removed; the temperature, pH, and conductivity values have stabilized to within 10% of the initial readings; and the ground water being removed is relatively free of suspended solids. After purging, ground water levels are allowed to stabilize to within 80% of the initial water level reading. A water sample is then collected from each well with a clean, disposable polyethylene bailer. If the well is bailed or pumped dry prior to removing the minimum volume of water, the ground water is allowed to recharge. If the well has recharged to within 80% of the initial depth to water reading within two hours, the well will continue to be purged until the minimum volume of water has been removed. If the well has not recharged to at least 80% of the initial depth to water reading within two hours, the well is considered to contain formational water and a ground water sample is collected. Ground water removed from the well is stored in 55-gallon drums at the site and labeled pending disposal.

In wells where free product is detected, the wells will be bailed to remove the free product. An estimate of the volume of product and water well be recorded. If the free product thickness is reduced to the point where a measurable thickness is no longer present in the well, a ground water sample will be collected. If free product persists throughout the purging process, a final free product thickness measurement will be taken and a ground water sample will not be collected.

Ground water samples are stored in 40-milliliter vials so that air passage through the sample is minimized (to prevent volatilization of the sample). The vial is tilted and filled slowly until an upward convex meniscus forms over the mouth of the vial. The Teflon™ side of the septum (in cap) is then placed against the meniscus, and the cap is screwed on tightly. The sample is then inverted and the bottle is tapped lightly to check for air bubbles. If an air bubble is present in the vial, the cap is removed and more sample is transferred from the bailer. The vial is then resealed and rechecked for air bubbles. The sample is then appropriately labeled and stored on ice from the time of collection through the time of delivery to the laboratory. The Chain-of-Custody form is completed to ensure sample integrity. Ground water samples are transported to a state-certified laboratory and analyzed within the U.S. Environmental Protection Agency-specified hold times for the specified analytes.

ATTACHMENT B

DOULOS ENVIRONMENTAL FIELD DATA SHEETS

**DOULOS ENVIRONMENTAL COMPANY
GROUNDWATER/LIQUID LEVEL DATA
(measurements in feet)**

Project Address: Beacon #574, 22315 Redwood Rd.

Date: 12-27-95

Castro Valley, CA

Project No.: 94-574-01

Recorded by: Hal Hansen

Well No	Time	Well Elev. TOC	Depth to Gr. Water	Measured Total Depth	Gr. Water Elevation	Depth to Product	Product Thickness	Comments
MW-1	1139		23.04	29.72				
MW-2	1143		21.44	29.56				
MW-3	1147		22.07	29.37				
MW-4	1151		17.47	27.89				
MW-5	1130		15.91	24.80				no odor no oil
MW-6	1133		21.12	29.63				no odor no oil
MW-7	1136		23.01	29.90				no odor no oil
MW-8	1155		21.96	34.43				

Notes:

Client: Ultramar

Sampling Date: 12-27-95

Site: Beacon #574

Project No.: 94-574-01

22315 Redwood Road

Well Designation: MW-5

Castro Valley, CA

Is setup of traffic control devices required? NO YES time: _____ hours
 Is there standing water in well box? NO YES Above TOC Below TOC
 Is top of casing cut level? NO YES If no, see remarks
 Is well cap sealed and locked? NO YES If no, see remarks
 Height of well casing riser (in inches): 3
 Well cover type: 8" UV 12" UV _____ 12" EMCO _____ 8" BK _____
 12" BK _____ 12" DWP _____ 12" CNI _____ 36" CNI _____ Other _____
 General condition of wellhead assembly: Excellent Good Fair Poor

Purging Equipment: _____ 2" disposable bailer _____ Submersible pump
 _____ 2" PVC bailer _____ Dedicated bailer
 _____ 4" PVC bailer Centrifugal pump

Sampled with: Disposal bailer: Teflon bailer: _____

Well Diameter: 2" 4" _____ 6" _____ 8" _____

Purge Vol. Multiplier: 0.16 0.65 1.47 2.61 gal/ft.
Initial Measurement Recharge Measurement
 Time: 1130 Time: 1211 Calculated purge: 5.7 gal
 Depth of well: 24.80 Depth to water: 17.60 Actual purge: 5.7 gal
 Depth to water: 15.91

Start purge: 1200 Sampling time: 1212

Time	Temp.	E.C.	pH	Turbidity	Volume
1201	67.4	762	730	—	1
1202	66.4	731	731	—	2
1202	66.5	762	727	—	3
1203	66.8	594	725	—	4

Sample appearance: clear Lock: dolphin

Equipment replaced: (Check all that apply) Note condition of replaced item
 2" Locking Cap: _____ Lock #3753: _____ 7/32 Allenhead: _____
 4" Locking Cap: _____ Lock-Dolphin: _____ 9/16 Bolt: _____
 6" Locking Cap: _____ Pinned Allenhead (DWP): _____

Remarks: _____

Signature: Hal Adams

Client: Ultramar

Sampling Date: 12-27-95

Site: Beacon #574

Project No.: 94-574-01

22315 Redwood Road

Well Designation: MW-7

Castro Valley, CA

Is setup of traffic control devices required? NO YES time: _____ hours
 Is there standing water in well box? NO YES Above TOC Below TOC
 Is top of casing cut level? NO YES If no, see remarks
 Is well cap sealed and locked? NO YES If no, see remarks
 Height of well casing riser (in inches): 6
 Well cover type: 8" UV _____ 12" UV _____ 12" EMCO _____ 8" BK _____
 12" BK _____ 12" DWP _____ 12" CNI _____ 36" CNI _____ Other _____
 General condition of wellhead assembly: Excellent Good Fair Poor

Purging Equipment: _____ 2" disposable bailer _____ Submersible pump
 _____ 2" PVC bailer _____ Dedicated bailer
 _____ 4" PVC bailer Centrifugal pump

Sampled with: Disposal bailer: Teflon bailer: _____

Well Diameter: 2" 4" _____ 6" _____ 8" _____

Purge Vol. Multiplier: 0.16 0.65 1.47 2.61 gal/ft.
Initial Measurement Recharge Measurement
 Time: 1136 Time: 1252 Calculated purge: 4.6 gal
 Depth of well: 2990 Depth to water: 2428 Actual purge: 2.6 gal
 Depth to water: 23.01

Start purge: 1237 Sampling time: 1253

Time	Temp.	E.C.	pH	Turbidity	Volume
1238	70.4	831	731	—	1
1239	68.2	802	730	—	2
1240	67.1	781	724	—	3
1241	69.4	763	723	—	4

Sample appearance: clear Lock: Dolphin

Equipment replaced: (Check all that apply) Note condition of replaced item
 2" Locking Cap: _____ Lock #3753: _____ 7/32 Allenhead: _____
 4" Locking Cap: _____ Lock-Dolphin: _____ 9/16 Bolt: _____
 6" Locking Cap: _____ Pinned Allenhead (DWP): _____

Remarks: _____

Signature: [Signature]

ATTACHMENT C
HISTORICAL GROUND WATER ELEVATION DATA

ATTACHMENT D

HISTORICAL GROUND WATER ANALYTICAL DATA

TABLE 3
GROUND WATER ANALYTICAL RESULTS
 (concentrations in parts per billion)

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics			Total Xylenes
		Gasoline	Diesel	Motor Oil	Benzene	Toluene	Ethylbenzene	
MW-1	04-01-91	4,100	<100	-	140	570	76	460
	03-27-92	5,600	<50	<50	760	900	230	1,100
	06-04-92	2,600	<800	-	270	57	230	440
	09-23-92	3,400	-	-	480	430	110	550
	11-12-92	2,700	-	-	5.8	<5.0	140	340
	02-02-93	8,500	-	-	760	770	250	1,200
	05-07-93	7,700	-	-	970	630	280	1,500
MW-2	04-01-91	10,000	<100	-	650	640	150	960
	03-27-92	18,000	<50	<50	2,400	2,300	870	3,300
	06-04-92	14,000	<5,000	-	1,900	1,700	580	2,300
	09-23-92	22,000	-	-	2,100	1,500	760	2,900
	11-12-92	29,000	-	-	2,400	860	540	3,500
	02-02-93	24,000	-	-	2,700	1,900	590	2,600
	05-07-93	19,000	-	-	1,800	1,300	460	2,600
MW-3	04-01-91	3,100	<100	-	41	91	37	420
	03-27-92	160	<50	<50	9.2	4.8	10	23
	06-04-92	120	<50	-	7.5	2.7	0.5	15
	09-23-92	220	-	-	8.3	4.3	6.2	19
	11-12-92	230	-	-	12	5.5	7.7	19
	02-02-93	86	-	-	2.4	0.71	2.7	6.2
	05-07-93	140	-	-	2.6	1.2	3.9	8.4
MW-4	05-18-93	<50	-	-	<0.50	<0.50	<0.50	<0.50
MW-5	05-18-93	<50	-	-	<0.50	<0.50	<0.50	<0.50
MW-6	05-18-93	170	-	-	<0.50	<0.50	<0.50	<0.50
MW-7	05-18-93	<50	-	-	<0.50	<0.50	<0.50	<0.50
MW-8	05-18-93	<50	-	-	<0.50	<0.50	<0.50	<0.50

Note: Dash (-) indicates that the sample was not analyzed for this constituent.

ATTACHMENT E

**LABORATORY REPORT AND
CHAIN-OF-CUSTODY FORM**


January 5, 1996
Sample Log 13689

MTBE (Methyl-t-butyl ether) Results

From : Beacon 574 (Proj. # 94-574-01)
Sampled : 12/27/95
Received : 12/29/95
Matrix : Water

MTBE	(MRL) $\mu\text{g/L}$	Measured Value $\mu\text{g/L}$
MW-5	(5.0)	34
MW-6	(5.0)	390
MW-7	(5.0)	32

Approved By:



Joel Kiff
Senior Chemist

Sample: **MW-5**

From : Beacon 574 (Proj. # 94-574-01)


Sampled : 12/27/95

Dilution : 1:1

QC Batch : 2136T

Matrix : Water

Parameter	(MRL) ug/L	Measured Value ug/L
Benzene	(.50)	<.50
Toluene	(.50)	<.50
Ethylbenzene	(.50)	<.50
Total Xylenes	(.50)	<.50
TPH as Gasoline	(50)	<50
Surrogate Recovery		101 %

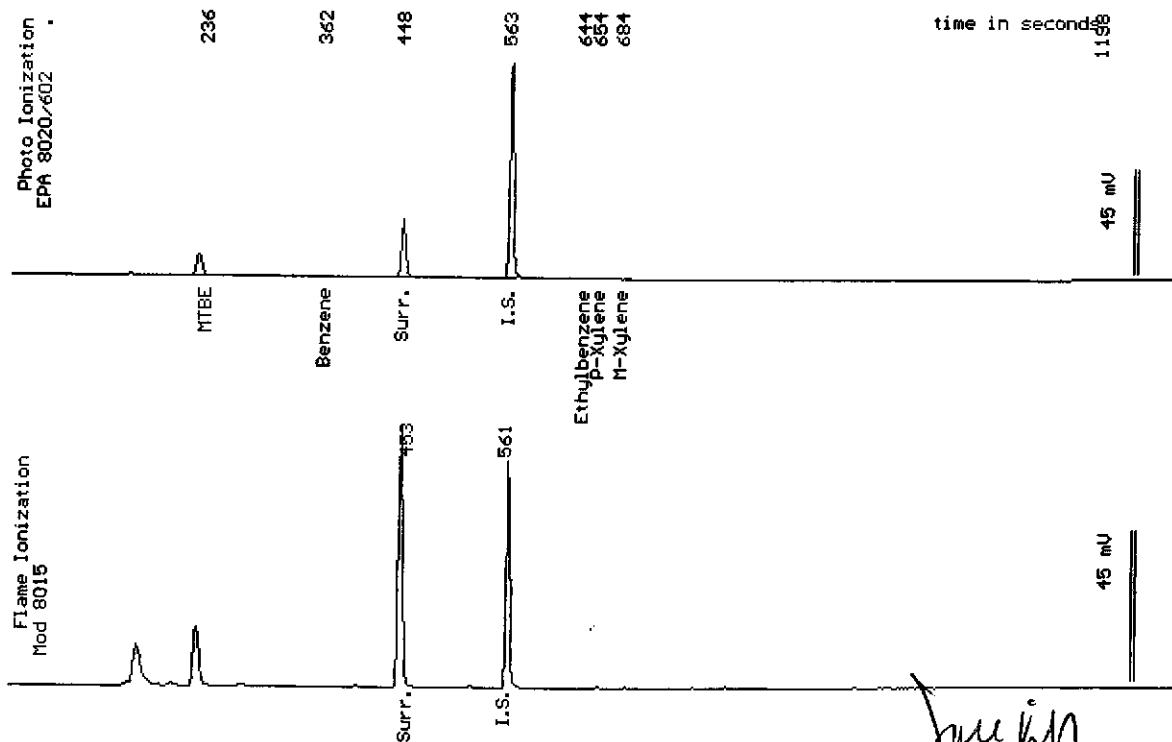

Date Analyzed: 01-05-96
 Column : 0.53mm ID X 30m DBWAX (J&W Scientific)

Joel Kiff
 Joel Kiff
 Senior Chemist

Sample: **MW-6**

From : Beacon 574 (Proj. # 94-574-01)

Sampled : 12/27/95


Dilution : 1:1

QC Batch : 2136T

Matrix : Water

Parameter	(MRL) ug/L	Measured Value ug/L
Benzene	(.50)	<.50
Toluene	(.50)	<.50
Ethylbenzene	(.50)	<.50
Total Xylenes	(.50)	<.50
TPH as Gasoline	(50)	130 * ✓
Surrogate Recovery		101 %

* Product is not typical gasoline.

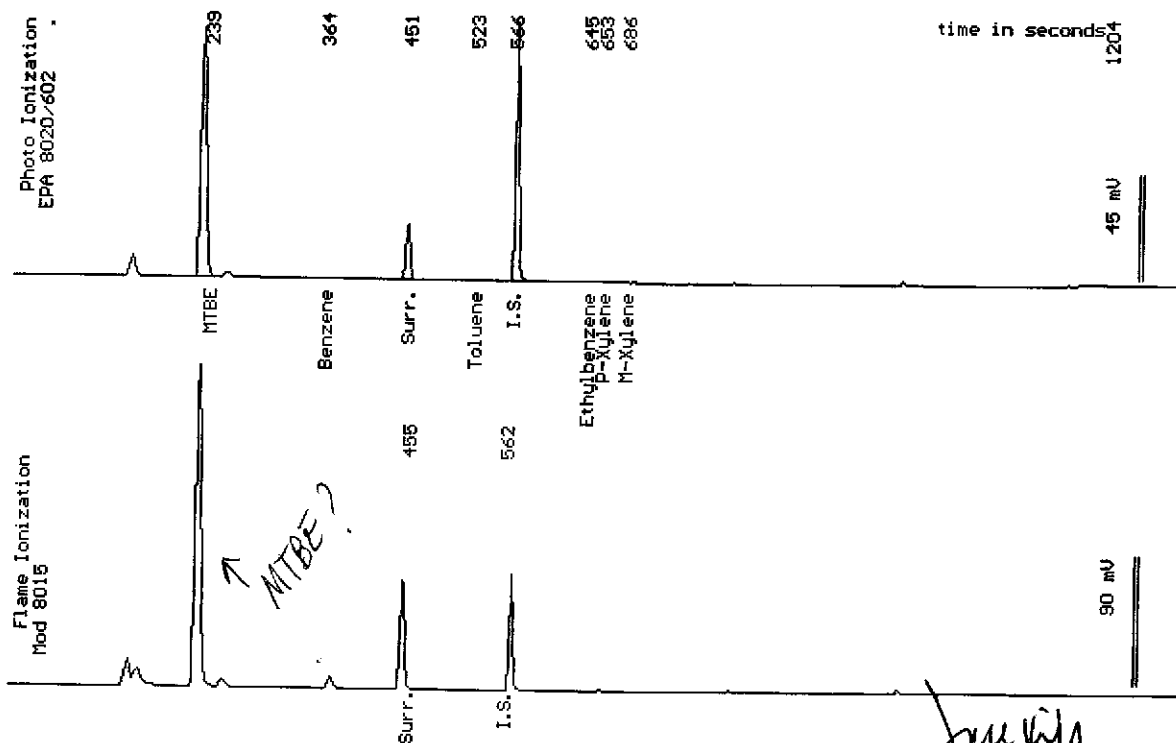

Date Analyzed: 01-05-96
 Column : 0.53mm ID X 30m DBWAX (J&W Scientific)

Joel Kiff
 Joel Kiff
 Senior Chemist

Sample: **MW-7**

From : Beacon 574 (Proj. # 94-574-01)


Sampled : 12/27/95

Dilution : 1:1

Matrix : Water

QC Batch : 2136T

Parameter	(MRL) ug/L	Measured Value ug/L
Benzene	(.50)	<.50
Toluene	(.50)	<.50
Ethylbenzene	(.50)	<.50
Total Xylenes	(.50)	<.50
TPH as Gasoline	(50)	<50
Surrogate Recovery		100 %

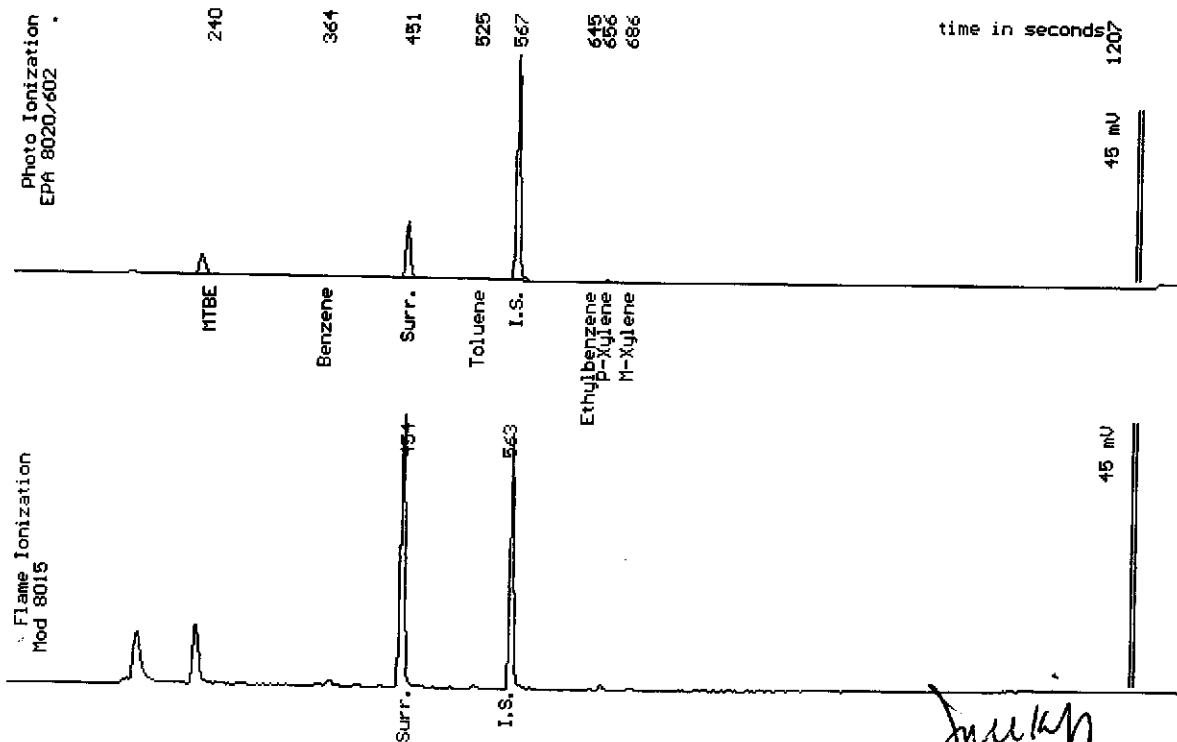

Date Analyzed: 01-05-96
 Column : 0.53mm ID X 30m DBWAX (J&W Scientific)

Joe Kiff
 Joe Kiff
 Senior Chemist



Ultramar Inc.
CHAIN OF CUSTODY REPORT

BEACON

Beacon Station No. 574		Sampler (Print Name) Hal Hansen			ANALYSES				Date 12-27-95	Form No. 1 of 1
Project No. 94-574-01		Sampler (Signature) <i>Hal Hansen</i>			BTEX	TPH (gasoline)	TPH (diesel)	No. of Containers	Standard TAT REMARKS	
Project Location Castro Valley, CA		Affiliation Doulos Environmental								
Sample No./Identification	Date	Time	Lab No.							
MW-5	12-27-95	12:12		XX						
MW-6	↓	12:33								
MW-7	↓	12:53								
Relinquished by: (Signature/Affiliation) <i>Hal Hansen Doulos Env</i>		Date 12/29/95	Time 13:27	Received by: (Signature/Affiliation) <i>Jonny A. Jumper WEST</i>		Date 12/29/95	Time 17:43	DATE <i>12/29/95</i> 1743 0 M		
Relinquished by: (Signature/Affiliation) <i>Jonny A. Jumper WEST</i>		Date 12/29/95	Time 17:43	Received by: (Signature/Affiliation)		Date	Time			
Relinquished by: (Signature/Affiliation)		Date	Time	Received by: (Signature/Affiliation)		Date	Time			
Report To: Dak Van Dam				Bill to: ULTRAMAR INC. 525 West Third Street Hanford, CA 93230 Attention: <i>John Mast</i> <i>Kenneth Earnest</i>						

WHITE: Return to Client with Report

YELLOW: Laboratory Copy

PINK: Originator Copy