

# Ultramar

Ultramar, Inc.  
P.O. Box 466  
525 W. Third Street  
Hanford, CA 93232-0466  
(209) 582-0241

Telecopy: 209-585-5685 Credit  
209-583-3330 Administrative  
209-583-3302 Information Services  
209-583-3358 Accounting

April 5, 1999

Mr. Scott Seery  
Senior Hazardous Materials Specialist  
Alameda County Health Care Services Agency,  
Environmental Health Services  
1131 Harbor Bay Parkway, Suite 250  
Oakland, CA 94502-6577

**SUBJECT: Supplement To Risk-Based Corrective Action  
Tier 1 And Tier 2 Analyses  
Former Beacon Station #574  
22315 Redwood Road, Castro Valley, California**


Dear Mr. Seery:

Enclosed is a copy of the *Supplement To Risk-Based Corrective Action, Tier 1 And Tier 2 Analyses*, prepared by El Dorado Environmental Inc., for the above-referenced Ultramar facility. This report has been prepared in response to correspondence prepared by Alameda County Health Care Services Agency dated May 28, 1997, and July 23, 1998.

If you have questions regarding this report, please contact me at (559) 583-3231.

Sincerely,

ULTRAMAR INC.

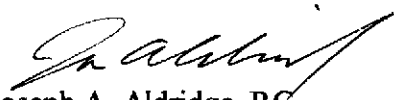  
Joseph A. Aldridge, RG  
Senior Project Manager  
Retail Environmental Services

99 APR -8 PM 2:52  
ENVIRONMENTAL  
PROTECTION

Enclosure: Supplement To Risk-Based Corrective Action, Tier 1 And Tier 2 Analyses

cc w/encl.: Mr. Rich Hiatt, CRWQCB-San Francisco Bay Region  
Mr. Paul Wilson, 1238 Stanyan Street, San Francisco, CA 94117



A Member of the Ultramar Group of Companies

**BEACON**  
#1 Quality and Service

RECEIVED

MAR 29 1999

SUPPLEMENT TO RISK-BASED CORRECTIVE ACTION  
TIER 1 AND TIER 2 ANALYSES

FORMER BEACON STATION #574  
22315 REDWOOD ROAD  
CASTRO VALLEY, CALIFORNIA

March 25, 1999


Prepared For:  
Ultramar Inc.  
525 West Third Street  
Hanford, California 92320

Prepared By:  
El Dorado Environmental, Inc.  
2221 Goldorado Trail  
El Dorado, California 95623

*Dale A. van Dam*

---

Dale A. van Dam, R.G.

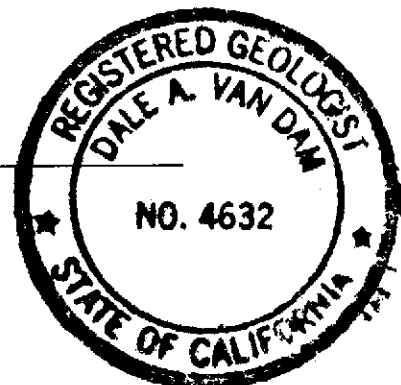

## TABLE OF CONTENTS

1.0	INTRODUCTION .....	5
1.1	Purpose .....	5
2.0	SITE ASSESSMENT .....	5
2.1	Site Location and Description .....	5
2.2	Regional Geologic and Hydrogeologic Setting .....	6
2.3	Local Water Supply .....	6
3.0	RESULTS OF HYDROGEOLOGIC INVESTIGATION .....	7
3.1	Underground Storage Tank Removal, Previous Investigation and/or Remediation .....	7
3.2	Installation of Additional Soil Borings, Monitoring Wells, and Vapor Extraction Wells .....	7
3.3	Hydrogeologic Testing Results .....	9
4.0	SUMMARY OF HYDROGEOLOGICAL ASSESSMENT .....	10
4.1	Distribution of Petroleum Constituents in Soil .....	10
4.2	Distribution of Petroleum Constituents in Ground Water .....	10
5.0	RBCA EVALUATION .....	11
5.1	Site Classification and Initial Response Action .....	11
5.2	Tier 1 Evaluation .....	11
5.2.1	Tier 1 Look-Up Tables .....	12
5.2.2	Tier 1 Exposure Assessment .....	13
5.2.2.1	Potentially Exposed Populations .....	13
5.2.2.2	Potential Exposure Pathways .....	14
5.2.2.3	Site-Specific Input Parameters .....	15
5.2.3	Evaluation of Tier 1 Screening Results .....	17
5.3	Tier 2 Evaluation .....	19
5.3.1	General Approach .....	19
5.3.2	Tier 2 Exposure Assessment .....	20
5.3.2.1	Potentially Exposed Populations .....	20
5.3.2.2	Potential Exposure Pathways .....	21
5.3.2.3	Exposure Equations and Assumptions .....	22
5.3.2.4	Calculation of Natural Attenuation Factors .....	22
5.3.2.5	Tier 2 Assessment Assumptions .....	22
5.3.2.6	Site-Specific Input Parameters .....	23
5.4	Tier 2 SSTLs and Screening Results .....	25
6.0	CALCULATION OF LIMIT OF TOXICITY ASSOCIATED WITH MTBE .....	28
7.0	CONCLUSIONS AND RECOMMENDATIONS .....	28
8.0	REFERENCES .....	30

## FIGURES

- FIGURE 1 SITE LOCATION MAP
- FIGURE 2 SITE MAP
- FIGURE 3 GROUND WATER CONTOUR MAP, DECEMBER 12, 1998
- FIGURE 4 DISSOLVED BENZENE DISTRIBUTION MAP, AUGUST 31, 1998

## TABLES

- TABLE 1 GROUND WATER ELEVATION DATA
- TABLE 2 GROUND WATER ANALYTICAL RESULTS
- TABLE 3 SUMMARY OF TIER 1 EVALUATION RESULTS
- TABLE 4 SUMMARY OF TIER 2 EVALUATION RESULTS

## APPENDICES

APPENDIX A	SOIL BORING LOGS
APPENDIX B	SOIL SAMPLE ANALYTICAL RESULTS
APPENDIX C	MONITORING WELL CONSTRUCTION SPECIFICATION DIAGRAMS
APPENDIX D	GEOLOGIC CROSS-SECTIONS
APPENDIX E	ASTM LOOK-UP TABLES FOR SOIL AND GROUND WATER
APPENDIX F	PHYSICAL, CHEMICAL, CONCENTRATION, AND TOXICITY INFORMATION FOR BETX COMPOUNDS
APPENDIX G	TIER 1 EVALUATION INPUTS SUMMARY AND RESULTS TABLES
APPENDIX H	EQUATIONS AND ASSUMPTIONS USED TO DESCRIBE TRANSPORT AND ATTENUATION OF CONSTITUENTS OF CONCERN
APPENDIX I	TIER 2 EVALUATION INPUTS SUMMARY AND RESULTS TABLES
APPENDIX J	SUMMARY CALCULATION SHEET, LIMIT OF TOXICITY ASSOCIATED WITH MTBE

**SUPPLEMENT TO RISK-BASED CORRECTIVE ACTION  
TIER 1 AND TIER 2 ANALYSES  
FORMER BEACON STATION #574  
22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**

**1.0 INTRODUCTION**

**1.1 Purpose**

El Dorado Environmental, Inc. (EDE) has been authorized by Ultramar to prepare this supplement to a Risk-Based Corrective Action (RBCA) assessment initially prepared and submitted to the Alameda County Health Care Services Agency (ACHCSA) for review on December 21, 1996. This supplement to the original RBCA has been prepared to address concerns expressed in a letters from Ms. Amy Leech and Ms. Madhulla Logan, dated May 28, 1997 and Mr. Scott Seery, dated July 23, 1998. The subject property is located at 22315 Redwood Road, in Castro Valley, Alameda County, California (Figure 1), and was formerly operated as Beacon station #574. The site is currently operated as a small shopping center, with multiple retail tenants.

Information available to EDE indicates that all underground storage tanks (USTs) were removed from the site on May 5, 1987. Subsequent detection of petroleum hydrocarbon constituents in soil beneath the former USTs prompted a soil and ground water investigation, which included advancing soil borings and installation of ground water monitoring wells. Aquifer pumping and soil vapor extraction tests were also performed at the site. Quarterly ground water monitoring is currently being conducted at the site.

An overview of the RBCA process was described in the December 21, 1996, RBCA; as such, that information is not repeated here. The reader is referred to that document for an overview of the RBCA process.

The purpose of this supplemental RBCA assessment is to evaluate the risk to human health and the environment from exposure to soil and ground water which may contain petroleum constituents left in place at the subject site. This RBCA analysis was completed using the American Society for Testing and Materials (ASTM) standard guidelines ES 1739-95, "Standard Guide for Risk-Based Corrective Action Applied to Petroleum Release Sites" and was facilitated by use of the "Tier 2 RBCA Guidance Manual for Risk-Based Corrective Action" (Conner, et al, 1995). Specifically, this RBCA analysis is a revision of the analysis described in the December 21, 1996 report and the current analysis updates the former RBCA and is intended to address the comments of the Alameda County Health Care Services Agency (Alameda County) as received in correspondence dated May 28, 1997.

**2.0 SITE ASSESSMENT**

**2.1 Site Location and Description**

The site is located at the intersection of Redwood Road and Grove Way in Castro Valley, 700 feet

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 6

north of the southwestward-flowing San Lorenzo Creek. An unnamed creek (tributary to San Lorenzo Creek) is located approximately 500 feet north of the site. The elevation of the site is approximately 150 feet above sea level. Castro Valley is situated in the east San Francisco Bay Area, south of the San Leandro Hills and northwest of Walpert Ridge. Ground surface in the area of the site generally slopes toward the southwest. The site is bounded on the north by Grove Way and on the east by Redwood Road. The surrounding area is predominantly commercial properties with residences located west and southwest of the subject site (Figure 2).

A total of eight monitoring wells have been installed on or near the site by Delta Environmental Consultants, Inc. (Delta) and Acton•Mickelson•van Dam, Inc. (AMV) since 1991. Ultramar leased the site and petroleum product storage and piping equipment and operated a retail gasoline service station at this site from 1981 to 1987. Prior to 1981, the site had reportedly been leased and operated by Shell Oil Company (Shell). Information provided by Ultramar indicates that in 1987, when Ultramar ceased leasing the property, all USTs then in existence were removed. Available data indicate that at least one previous generation of USTs had been installed and used at the site by Shell. The first generation of USTs was removed prior to Ultramar's lease of the property in 1981. It is EDE's understanding that Ultramar is not aware of any specific incidents in which gasoline leaked from the former USTs or was spilled during filling of any of the USTs. The site is currently occupied by commercial businesses in separate suites within a single building (Figure 2).

### **2.2 Regional Geologic and Hydrogeologic Setting**

The site is located in Castro Valley, California, in the eastern San Francisco Bay Area. Ground water has been reported at depths ranging from 13 to 24 feet below grade at the site. The land surface in the Castro Valley area is covered with Quaternary, non-marine alluvium (referred to as "older alluvium" and described as dissected terrace deposits), probably deposited by San Lorenzo Creek and its tributaries (Wagner, et al., 1991). Cretaceous marine sedimentary rocks, assigned to the Panoche Formation, underlie the alluvium in the Castro Valley area, and form the surrounding hills and ridges. The northwest-trending Hayward Fault zone is present west of the site.

### **2.3 Local Water Supply**

Potable water is supplied to the site and other local users in the area by the East Bay Municipal Utilities District (EBMUD). EBMUD imports water derived from surface water sources from the Sierra Nevada foothills; no municipal water wells are located in the area.

Well permit records available through the California State Department of Water Resources indicated the existence of a private water well, reportedly used for "irrigation" purposes at 22447 Charlene Way, approximately 400 feet south-southeast (cross-gradient) of the site. The "Water Well Drillers Report" for this well indicates a total depth of 52 feet below grade with perforated plastic casing

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 7

between 32 and 52 feet below grade. This well was installed in September 1977; neither the current status nor the current use of water produced by this well (if any) is known.

### 3.0 RESULTS OF HYDROGEOLOGIC INVESTIGATION

A portion of the information contained in this section first appeared in the "Problem Assessment Report/Remedial Action Plan, Former Beacon Station #574," dated November 10, 1994, by AMV.

#### 3.1 Underground Storage Tank Removal and Remediation by Over-Excavation

According to a work plan prepared by Ultramar for the site dated January 12, 1993, all USTs were removed from the site on May 5, 1987. Underground fuel storage at the site had previously consisted of two 5,000-gallon-capacity diesel USTs, a 7,000-gallon-capacity gasoline UST, and one 8,000-gallon-capacity gasoline UST. In addition, a 500-gallon-capacity waste oil UST was present at the site. Records made available by Ultramar indicate that these tanks were originally installed and owned by Shell. These tanks replaced a set of three USTs that were removed by Shell sometime prior to the end of 1981, when Ultramar assumed the lease on the property. The results of soil samples collected at the time of UST removal in 1981 indicated the presence of petroleum hydrocarbon constituents in soil underlying the USTs. Over excavation of the UST basin to a depth of approximately 20 feet below grade was performed on May 18, 1987. After over excavation, three of the seven soil samples collected at the limits of the excavation contained total volatile hydrocarbons at concentrations of 125.5, 208.7, and 1,989 parts per million (ppm).

#### 3.2 Installation of Soil Borings and Monitoring Wells

On March 26, 1991, three soil borings were advanced at the site to depths of approximately 30 feet below grade and completed as 4-inch-diameter monitoring wells MW-1, MW-2, and MW-3 (Figure 2). Ground water was encountered in the borings for these wells at approximately 22 feet below grade. Soil borings containing descriptions of soil encountered as the borings were advanced are contained in Appendix A. Soil samples collected as the borings for monitoring wells MW-1 and MW-2 were advanced consisted of gravelly sand to a depth of 6.5 feet below grade, underlain by sandy clay or clayey sand to approximately 22 feet, and sand and silty sand to the total boring depth of 30 feet below grade (Appendix A).

Soil samples collected from the soil borings were submitted for laboratory analysis of benzene, toluene, ethylbenzene, total xylenes (BTEX), total petroleum hydrocarbons as gasoline (TPHg), and total petroleum hydrocarbons as diesel (TPHd). The results are compiled in Appendix B, Table 1. None of the soil samples contained detectable concentrations of TPHd. The soil samples collected from above the water table in the boring for monitoring well MW-2 (near the northwest corner of the first generation of USTs operated by Shell) contained detectable concentrations of TPHg. The



## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 8

samples collected from 10 and 15 feet below grade from this boring contained 8.1 and 3,200 ppm TPHg, respectively.

The monitoring wells were installed as described in well construction diagrams contained in Appendix C. Water level measurements made in monitoring wells MW-1, MW-2, and MW-3 on March 26 and April 1, 1991 (Table 1), indicated a direction of ground water flow toward the southwest. The gradient of ground water flow was approximately 0.015 foot per foot. Ground water samples collected from monitoring wells MW-1, MW-2, and MW-3 on April 1, 1991, did not contain detectable concentrations of TPHd. BTEX and TPHg were detected in ground water samples collected from these wells. Benzene concentrations ranged from 41 micrograms per Liter ( $\mu\text{g/L}$ ) in a sample from monitoring well MW-3 to 650  $\mu\text{g/L}$  in the sample collected from monitoring well MW-2 (Table 2).

Based on the results of installation of monitoring wells MW-1, MW-2, and MW-3, Ultramar prepared a work plan for installation of additional monitoring wells ("Work Plan, Subsurface Environmental Investigation at Former Beacon No. 574, 22315 Redwood Road, Castro Valley, California," dated January 11, 1993). The work plan proposed installation of five additional ground water monitoring wells. After approval of Ultramar's work plan by the Alameda County Health Care Services Agency, Environmental Health Services Division (Alameda County), the proposed work plan was executed by AMV on May 13 and 18, 1993. AMV advanced and sampled five soil borings which were then converted to 2-inch-diameter monitoring wells MW-4, MW-5, MW-6, MW-7, and MW-8 (Figure 2).

Soil encountered by AMV in the boring for monitoring well MW-6 included silty clay from the surface to 8.5 feet below grade, silty sand between 8.5 and 14 feet below grade, silty clay beneath the silty sand to a depth of 19.5 feet, sandy silt between 19.5 and 27 feet below grade, and gravelly sand between 27 and 30 feet (the total depth of the boring). Ground water was encountered at about 20 feet below grade in the borings for monitoring wells MW-4 through MW-8. Soil boring logs for monitoring wells MW-4 through MW-8 are contained in Appendix A.

AMV submitted a total of 23 soil samples for laboratory analysis of BTEX and TPHg. None of the soil samples collected from the borings for monitoring wells MW-4 through MW-8 contained detectable concentrations of petroleum constituents (Appendix B, Table 1).

AMV completed monitoring wells MW-4 through MW-8 as described on well construction diagrams contained in Appendix C. AMV measured depth to ground water in each existing monitoring well (MW-1 through MW-8) on May 18, 1993. Depth to ground water ranged from 15.72 to 22.66 feet below the top of the well casings (Table 1). AMV's water level measurements indicated a direction of ground water flow toward the southwest at a gradient of 0.01 foot per foot.

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 9

AMV collected ground water samples for analysis from monitoring wells MW-4 through MW-8 only on May 18, 1993 (monitoring wells MW-1 through MW-3 had been sampled on May 7, 1993) for laboratory analysis of BTEX and TPHg. BTEX constituents were not present at detectable concentrations in ground water samples collected from monitoring wells MW-4 through MW-8 on this date (Table 2). The sample collected from monitoring well MW-6 did contain 170  $\mu\text{g/L}$  TPHg.

The most recent quarterly monitoring event at the site was conducted on December 12, 1998, by Doulos Environmental and reported by EDE. Depth to ground water on this date ranged from 15.75 (MW-5) to 22.87 (MW-1) feet below grade. (Monitoring wells MW-7 and MW-8 were abandoned during the fall of 1998 as part of a street up-grade on Redwood Road.) The direction of ground water flow was generally toward the southwest (Figure 3), at a gradient of 0.01 foot per foot.

Ground water samples were also collected on December 12, 1998, but only from an abbreviated list of monitoring wells in accordance with an agreement with Alameda County. The most recent monitoring event for which analyses were performed on all wells at the site was conducted on August 31, 1998. Analytical results of ground water samples collected on August 31, 1998, indicate that BTEX constituents were detected in samples collected from monitoring wells MW-1, MW-2, and MW-3. Methyl-tertiary-butyl ether (MTBE) was detected in ground water samples collected from monitoring wells MW-1 through MW-3, MW-6, and MW-7. The inferred distribution of dissolved benzene in ground water on August 31, 1998, is illustrated in Figure 4.

### **3.3 Hydrogeologic Testing Results**

On January 31 and February 1 and 2, 1994, AMV conducted an aquifer test, an air sparging test, and a vapor extraction test using monitoring wells at the site. Starting on January 31, 1994, a 24-hour continuous pumping test was conducted, using monitoring well MW-1 as the pumping well. The pumping rate throughout the test was maintained at approximately 0.25 gallon per minute (gpm). Water levels were recorded in the pumping well and monitoring well MW-2 using an automated data logger. Monitoring well MW-2 is located approximately 55 feet from MW-1. After 24 hours of pumping, a drawdown of approximately 4.2 feet was measured in the pumping well, and approximately 0.11 foot of drawdown was measured in monitoring well MW-2. AMV reported that aquifer test analytical methods indicated a calculated hydraulic conductivity (K) of approximately 0.005 foot per minute (ft/min). AMV inferred that the observed drawdown at monitoring well MW-2 (located northwest and cross gradient of the pumping well), indicated a down gradient capture zone extent of approximately 17 feet, and a cross gradient capture zone width of approximately 110 feet.

The soil vapor extraction test was performed over a 4 hour period using monitoring well MW-1 as the extraction well. Pumping of ground water from monitoring wells MW-1 was continued during the soil vapor extraction test to maximize the open screened area in this well during the vapor extraction test. AMV reported that the airflow rate during the test was approximately 43.6 standard

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 10

cubic feet per minute (scfm). Throughout the vapor extraction test, AMV measured a vacuum influence of about 0.35 inch of water column at monitoring well MW-2, indicating a zone of vacuum influence around monitoring well MW-1 with a radius of at least 55 feet. Air samples collected during the vapor extraction test by AMV contained 66 ppm benzene and 7,800 ppm TPHg at the start of the test and 42 ppm benzene and 4,500 ppm TPHg at the end of the test. Based on the analytical and air flow rate data, AMV calculated an initial extraction rate to TPHg of 67.7 pounds per day (lbs/day). AMV's calculated initial extraction rate for benzene was 0.57 lbs/day.

AMV conducted an 8-hour sparge test by injecting air through a temporary sparge point installed approximately 15 feet from monitoring well MW-1. Air was injected at a rate ranging from 7.0 to 7.7 scfm. Dissolved oxygen, carbon dioxide (CO<sub>2</sub>), and TPHg concentrations in water and air from monitoring well MW-2 were monitored in the field and with samples collected for laboratory analysis during the test. Dissolved oxygen content in water samples collected from monitoring well MW-2 increased from 2.6 percent (sample collected before sparging began) to 6.5 percent (sample collected at the end of the sparge test). AMV inferred that these measurements indicated that a sparge rate averaging 7.4 scfm at monitoring well MW-1 had an influence at least 15 feet away at monitoring well MW-2.

## 4.0 SUMMARY OF HYDROGEOLOGIC ASSESSMENT

### 4.1 Distribution of Petroleum Constituents in Soil

Soil samples collected from the soil borings for monitoring wells MW-4, MW-5, MW-6, MW-7, and MW-8 did not contain detectable concentrations of petroleum constituents. Soil samples collected from the borings for monitoring wells MW-1 and MW-3 at 20 feet below grade contained detectable concentrations of petroleum constituents; however, these samples were collected within the zone of water table fluctuation and probably reflect the presence of these constituents in ground water rather than the presence of these constituents in the vadose zone above ground water. Only the samples collected from above the water table in the boring for monitoring wells MW-2, located near or possibly adjacent to the tank basin of the first generation tanks operated by Shell, contained detectable concentrations of TPHg. Soil sample analytical results (Appendix B) and the results of a vapor extraction test performed on monitoring well MW-1 indicate that only soil in the vicinity of the former USTs contains petroleum constituents.

AMV constructed two soil cross-sections to illustrate the inferred distribution of petroleum constituents in soil underlying the site. The cross-sections and a location map are contained in Appendix D.

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 11

### **4.2 Distribution of Petroleum Constituents in Ground Water**

The direction of ground water flow beneath the site has been consistently toward the southwest. The ground water gradient has typically been 0.01 foot per foot.

The distribution of petroleum constituents in ground water is defined up gradient, down gradient, and cross gradient of the site. Ground water samples collected from monitoring wells MW-8 (up gradient), MW-5 (down gradient), and MW-4 (cross gradient) have historically not contained detectable concentrations of petroleum constituents.

Ground water samples collected from monitoring well MW-1, MW-2, and MW-3 have consistently contained detectable concentrations of petroleum constituents. Benzene concentrations have been, on average, highest in ground water samples collected from monitoring well MW-2, ranging from 1,500 to 14,000  $\mu\text{g/L}$  (the maximum benzene concentration in ground water (15,000  $\mu\text{g/L}$ ) was detected in a sample collected from monitoring well MW-1 on March 19, 1998, after an anomalously wet winter had resulted in the highest ground water levels ever measured at the site). The most recent benzene distribution map (Figure 4) indicates ground water containing dissolved petroleum constituents is limited to the area of the former USTs, with some dispersion toward the north (monitoring well MW-3). The nearest monitoring wells at off-site locations do not contain dissolved benzene.

## **5.0 RBCA EVALUATION**

### **5.1 Site Classification and Initial Response Action**

As site information is gathered and evaluated, ASTM RBCA guidance recommends classifying the site based on the urgency for response. The four possible site categories include: immediate, short-term, long-term, or no demonstrable threat to human health, safety, or sensitive environmental receptors. Once a site is classified, ASTM RBCA recommends appropriate initial response actions corresponding to each classification category.

As described in the preceding section, initial response at the site has been limited to removal of the USTs and product piping and excavation of impacted soils in the area of the former UST basin. Current site conditions indicate that the site does not pose an immediate or short-term threat to receptors. Available records indicate that the nearest water well in the vicinity of the site is located approximately 400 feet south-southeast (cross-gradient) of the subject site. Since ground water beneath the site has been impacted, the site would be classified under the ASTM RBCA scheme as potentially representing a long-term threat. Therefore, the potential for a long-term threat from the site is evaluated in this tiered approach and the appropriate response is recommended in Section 6.0 of this report.

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 12

### **5.2 Tier 1 Evaluation**

This section of the report presents the results of a Tier 1 screening. The first subsection introduces the Tier 1 Look-Up Tables and discusses their components and their development. The second subsection presents the exposure assessment which helps identify appropriate populations and pathways for consideration in screening. The last subsection discusses the Tier 1 screening results.

#### **5.2.1 Tier 1 Look-Up Tables**

The RBSL Look-Up Tables, as developed by ASTM, were used for the initial screening. The Look-Up Tables are compilations of media-specific chemical concentrations based on potential exposure pathways and acceptable risk levels. The Look-Up Tables containing RBSLs for chemicals of concern in soil and ground water are contained in Appendix E. Appendix F contains information regarding the potential chemicals of concern included in the Look-Up Tables. The information in Appendix F includes physical, chemical, and toxicity information, and fate and transport characteristics that subsequently influence the likelihood of exposure pathways becoming complete. Exposure pathways are discussed in detail in Section 5.2.2.

RBSLs are determined by combining target risk levels with toxicity values and standard default values for specific exposure scenarios. As recommended by ASTM, the information used to develop RBSLs was verified as current with accepted USEPA methodology prior to using the published Tier 1 Look-Up Tables. Exposure frequency and duration variables used in the calculations are considered standard default values and represent the reasonable maximum exposure (RME) expected to occur under both current and future land-use conditions. RME values are considered plausible estimates of the individual exposure for persons at the upper, or high, end of an exposure distribution. The high end of the distribution means above the 90 percentile of the population distribution, but not higher than the individual in the population who has the highest exposure.

RBSLs for some of the exposure pathways were calculated using attenuation factors. Attenuation factors adjust for reduction in chemical concentrations with distance and time due to processes such as diffusion, dispersion, adsorption, degradation, and other natural processes. The attenuation factors used by ASTM to calculate RBSLs were developed using the Johnson and Ettinger (1991) fate and transport equation.

Tier 1 target risk levels are numeric values that are determined using conservative assumptions in order to be protective of human health. Target risk levels are established for both carcinogens and non-carcinogens. For non-carcinogens, the target risk level is set at one (refer to Appendix F). For carcinogens, USEPA states that to be protective of human health, exposure should be limited so as to result in an individual upper bound excess lifetime carcinogenic risk level of 1 in 10,000 or less (USEPA, 1989). USEPA has set the target risk level range for carcinogens between 1 in 10,000 to

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 13

1 in 1,000,000. The mid-range, 1 in 100,000, is a commonly accepted remediation goal for a commercial or industrial setting. For the purposes of this evaluation, the risk level used in this Tier 1 evaluation for commercial exposure to carcinogens has been set at 1 in 100,000; for evaluating any potential residential exposure to carcinogens, the conservative target risk of 1 in 1,000,000 is used.

The following sections present the evaluation of exposure potential at the site and identify the potential exposure populations and pathways at the source. Section 5.2.3 presents the tables, compares the appropriate RBSLs to the maximum concentrations detected at the site, and evaluates the results.

### 5.2.2 Tier 1 Exposure Assessment

In the Tier 1 exposure assessment, potentially exposed populations near the source and potential exposure pathways are identified. The site physical description, hydrogeological conditions, land zoning, and water use in the surrounding area are all considered in determining potential exposure at the site. The site is not suitable habitat for wildlife, therefore, the following sections focus on potentially exposed human populations.

#### 5.2.2.1 Potentially Exposed Populations

The site is located in a well-developed area of Castro Valley and is surrounded by commercial and residential properties. A discussion of land use in the area is contained in Section 2.1.

The site is currently used for commercial purposes, with several units in a single building, each with a separate commercial business. Potentially exposed populations at the site under current conditions are business workers who spend most of their time indoors. This receptor group is considered in the Tier 1 evaluation. Customers are not typically evaluated in Tier 1 RBCA assessments due to their sporadic, short-term exposure and because their potential exposures would be less than that estimated for a full-time worker.

There are no known construction or excavation activities ongoing at the site, although these activities could occur in the future. Future activities, such as building erection or underground utilities work, could feasibly bring a construction worker into contact with hydrocarbon-impacted soil at the site. Although exposure would be of short duration, hypothetical future construction workers are conservatively considered in the Tier 1 evaluation.

Future land use of the property and surrounding area is not expected to change due to the current development in the area and the property's current commercial zoning, therefore, future receptors at the site are not expected to change. Since the zoning of the property is not expected to change from commercial to residential, a future resident on site was not evaluated.

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 14

The nearest offsite buildings to the site are the residences and apartments located to the west/southwest and the commercial building and restaurant located south of the site. Zoning of the off-site properties is assumed to remain unchanged. The general direction of ground water flow has historically been toward the south-southwest. The residents of the houses and the apartment building are considered as the potentially exposed off-site population. Since the property to the south is used commercially, the maximally potentially exposed population in the future for the adjacent property on the south would be a full-time office worker. However, exposure for this hypothetical receptor would be less than that for a full-time office worker on site. Therefore the potential risk to a full-time off-site office worker were not evaluated in this assessment.

Other residences and commercial buildings are located further from the source than the buildings identified above. Because exposure concentrations decrease rapidly with distance, the risk to occupants in a building located further from the site will be lower than the risk to occupants in buildings identified above. Therefore, exposure and risk were not determined for occupants of buildings located at greater distances.

### 5.2.2.2 Potential Exposure Pathways

An exposure pathway is the course that a chemical takes from the hydrocarbon source to the exposed individual. An exposure pathway consists of the following four elements:

- A source of chemical released to the environment (such as impacted soil or ground water).
- An environmental transport medium (soil, ground water, or air).
- A point of potential human contact with the hydrocarbon-impacted medium (a Tier 1 evaluation considers the point of contact as near the source).
- An exposure route (ingestion, inhalation, or dermal contact).

Each exposure pathway describes a unique mechanism by which a population may be exposed to the hydrocarbons from the site. For an exposure pathway to be complete, all four elements listed above must be present. Pathways that are incomplete, such as when a hydrocarbon compound is released but there is no potential for contact with a receptor, are excluded from this evaluation.

One potential exposure pathway is consumption of ground water pumped from on-site wells. Currently, drinking water for the site and local area is supplied by EBMUD. Although ground water beneath the site has been found to contain detectable concentrations of petroleum constituents, there are no drinking water wells on site. According to records researched at the California State

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 15

Department of Water Resources by others, there is a potential water supply well in existence within approximately 1,000 feet north (up-gradient) of the site. The Tier 1 evaluation is limited to on- or near-site receptors. Since it is unlikely that a water well will ever be drilled on this property with the intent of supplying potable water, this exposure pathway will not be considered complete for the Tier 1 analysis.

All hydrocarbon-impacted soils and ground water are located beneath the surface. Because of the asphalt and concrete surface coverings, current direct human exposure such as through ingestion or dermal contact to hydrocarbon-containing media is not likely. Although no future construction activities are planned for the property, should future construction or excavation take place, direct exposure to hydrocarbon-impacted soil and ground water may occur. Construction-worker exposure to hydrocarbon-impacted soil is conservatively evaluated in the Tier 1 analysis.

Although vapors containing petroleum constituents have never been reported by occupants of the on-site buildings, it is possible that vapors from hydrocarbon-containing soil and ground water could migrate through the soil to the surface or into buildings. The most likely receptor point is inside the on-site building, since potential office workers at the commercial building are indoors full-time.

Historical ground water monitoring indicates that BTEX constituents have not been detected in the off-site monitoring wells. Although available data indicate the possibility is unlikely, should hydrocarbon-impacted ground water migrate from the site to beneath a down gradient building, it is theoretically possible that vapor intrusion into an off-site structure may occur. However, off-site receptors are not considered as part of the Tier 1 evaluation. Therefore, this pathway is ignored for the Tier 1 evaluation.

In summary, based on current site conditions and anticipated future conditions as described, potentially completed exposure pathways for the purpose of a Tier 1 evaluation include:

- Vapor transport from hydrocarbon-impacted soil and ground water through the soil into indoor air and inhalation by on-site workers.
- Direct exposure by ingestion, inhalation, and dermal contact as a result of future on-site excavation into hydrocarbon-impacted soil or ground water (construction exposure).

### 5.2.2.3 Site Specific Input Parameters

All parameters regarding RBCA chemical exposure (i.e., averaging times, body weight, exposure duration, ingestion rates, etc.) were default values as provided by Connor, et al., 1995. A site specific value for the contaminated soil area was calculated by measuring the inferred extent of soil



## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 16

containing detectable concentrations of petroleum constituents as depicted on soil cross-sections contained in Appendix D; the area used was 9,600 square feet.

To calculate the length of affected soil parallel to the prevailing wind direction, it was assumed that the prevailing wind was westerly-northwesterly. The distance across all soil areas containing detectable petroleum hydrocarbons was then measured; the distance used was 80 feet.

To calculate the length of affected soil parallel to the direction of ground water flow, a southwest flow direction was assumed. The distance across all soil areas containing detectable petroleum hydrocarbons was then measured; the distance used was 120 feet.

The thickness of affected surface soil was assumed to be 5 feet; any soil sample collected within 5 feet of the surface was assumed to represent "surface soil."

The ground water infiltration rate was calculated by multiplying the average rainfall for Castro Valley (approximately 25 inches annually) by 10%. Since the site is almost fully capped by either asphalt or concrete, it is likely that at least 90% of all precipitation runs over the surface and off the site.

The value used for saturated hydraulic conductivity was taken from an aquifer pumping test conducted on the site (see Section 3.3). This value was 7.2 feet per day. The ground water gradient (0.01 foot per foot) was calculated using measurements made on August 31, 1998.

The effective porosity of the water-bearing unit was approximated by noting the soil types encountered in soil borings for monitoring wells MW-1 through MW-8 (sand, silty sand, silty clay, clayey sand, sandy silt, and clayey silt) at the water table, then consulting a textbook for correlative porosity values. The value used (20%) appeared in Blatt, Middleton, and Murray (1980).

Because no site-specific data regarding the total organic carbon content of soils was available, the default value of 0.001 (unit-less) as provided by Connor, et. al., 1995, was used.

The depth to ground water was calculated for the site by averaging the depth to ground water in all eight wells over the last 4 quarters of ground water monitoring. The depth used for this parameter was 19.63 feet. Based on information contained in Conner, et. al., 1995, the zone of capillary action was considered to be 1.6% of the depth to ground water (at this site, approximately 0.31 feet).

Although the pH of soil beneath the site has not been measured, the pH of ground water samples recovered during quarterly monitoring events has averaged 6.00. This value was used for soil and ground water pH after assuming that soil and ground water would be in equilibrium with regards to pH.

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 17

Volumetric water content within the saturated zone was calculated as  $\frac{9}{10}$  of total porosity using information contained in Connor, et. al., 1995. In the vadose zone, a volumetric water content value of approximately  $\frac{1}{3}$  was used in accordance with values from Connor, et. al., 1995. The balance of the pore space in both cases was assumed to be filled with air.

Representative chemical concentrations in hydrocarbon-impacted ground water samples were determined by selecting the mean concentration values for benzene, ethylbenzene, toluene, total xylenes, methyl-tertiary-butyl ether detected in ground water samples collected from monitoring wells MW-1 through MW-7 between December 1997 and August 1998 (the last 4 quarterly monitoring events). These monitoring wells were selected because petroleum constituents (specifically MTBE) have consistently been detected in ground water samples collected from these wells between December 1997 and August 1998; ground water samples collected from monitoring well MW-8 have never contained detectable concentrations of petroleum constituents. Representative concentrations of BETX in surficial soils (less than 5 feet below grade) were determined by calculating the 95% upper confidence limit concentration values in soil samples collected from within 5 feet of the surface in soil borings for monitoring wells MW-4 through MW-8 (no shallow soil samples were collected from soil borings MW-1 through MW-3).

Representative concentrations of BETX in subsurface soil were determined by calculating the 95% upper confidence limit concentration values in soil samples collected from around the UST basin in May 1987 and from soil borings for monitoring wells MW-1, MW-2, and MW-3 (these are the only soil borings in which BETX constituents were detected in soil samples). The benzene concentration in UST basin soil samples was calculated (as suggested in the Alameda County letter dated May 28, 1997) by multiplying the TPHg values by 3.2%.

### 5.2.3 Evaluation of Tier 1 Screening Results

This section of the report compares representative constituents of concern concentrations detected in on-site soil and ground water samples to media specific RBSLs and evaluates the results. The Tier 1 analysis was facilitated using software developed by Conner, et. al., 1995. Representative chemical concentrations of hydrocarbon-impacted surface (collected at depths of 5 or less feet below grade) and sub-surface soil samples (collected at depths of 5 or more feet below grade) were determined by calculating the upper confidence limit (UCL) benzene, ethylbenzene, toluene, and xylenes concentrations detected in selected samples between 1987 and 1993 at the site. If soil samples did not contain detectable concentrations of petroleum constituents, the value used for benzene, toluene, ethylbenzene, and total xylenes in soil samples was 0.0025 mg/Kg (one half of the method detection limit). For subsurface soil samples, the UCL values were 0.030, 0.052, 0.047, and 0.15 mg/Kg for benzene, toluene, ethylbenzene, and total xylenes, respectively. None of the soil samples collected were analyzed for MTBE. Appendix G contains tables which compare the representative concentrations of COCs detected at the site to relevant Tier 1 RBSLs based on

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 18

potentially completed exposure pathways.

The two completed, Tier 1 exposure pathways for this site are volatilization from hydrocarbon-impacted soil and ground water through soil into indoor air and inhalation by on-site commercial workers and direct exposure to surface soils by temporary, on-site construction workers. Of these two completed pathways, the Tier 1 analysis indicates that volatilization to indoor air and inhalation by on-site commercial workers is the most critical path (i.e., the path with the lowest RBSLs). The Tier 1 analysis calculated an RBSL for benzene in subsurface soil of 0.035 mg/Kg. When corrected for California's more restrictive MCL by multiplying by 0.29, this value for the allowable concentration of benzene in surface soil becomes 0.010 mg/Kg. This value was exceeded by the UCL subsurface soil benzene concentration of 8.6 mg/Kg. The Tier 1 risk assessment indicates that RBSLs for ethylbenzene and total xylenes in subsurface soils would not be exceeded even with concentrations of these constituents equal to residual saturation values. The RBSLs for MTBE and toluene in subsurface soil were calculated to be 310 mg/Kg and 42 mg/Kg, respectively. None of the soil samples collected at this site have been analyzed for MTBE. The calculated RBSL for toluene was not exceeded by the UCL value for toluene in subsurface soils of 1.2 mg/Kg.

The calculated RBSL for benzene in surface soil (which may volatilize to indoor air) beneath the site was 71 mg/Kg. When corrected for California's more restrictive MCL by multiplying by 0.29, this value for the allowable concentration of benzene in sub-surface soil becomes 20.59 mg/Kg. This value was not exceeded by the UCL surface soil benzene concentration of 0.0025 mg/Kg (none of the surface soil samples collected were reported to contain detectable concentrations of benzene). The Tier 1 risk assessment indicates that RBSLs for toluene, ethylbenzene, and total xylenes in surface soils would not be exceeded even with concentrations of these constituents equal to residual saturation values. The RBSL calculated for MTBE was 240 mg/Kg; none of the surface soil samples collected at the site were analyzed for MTBE.

The calculated RBSL for benzene in ground water (which may volatilize to indoor air) beneath the site was 0.022 mg/Kg. When corrected for California's more restrictive MCL by multiplying by 0.29, this value for the allowable concentration of benzene in ground water becomes 0.006 mg/Kg. This value was exceeded by the mean ground water benzene concentration of 0.011 mg/Kg. The Tier 1 risk assessment indicates that RBSLs for ethylbenzene and total xylenes in ground water would not be exceeded even with concentrations of these constituents equal to solubility limits. The RBSLs calculated for toluene and MTBE are 260 and 6,700 mg/Kg, respectively. The RBSLs for toluene and MTBE are not exceeded by the mean concentration values for these compounds in ground water of 0.0058 and 0.059 mg/Kg, respectively.

Results of the Tier 1 analysis are summarized in Table 3.

**TABLE 3**  
**SUMMARY OF TIER 1 EVALUATION RESULTS**  
**FORMER BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**

Completed Exposure Pathway		RBSL Benzene Concentrations (California) (mg/Kg)	Site Benzene Concentrations (mg/Kg)	RBSL Exceeded?
Volatilization to Indoor Air and Inhalation by On-Site Commercial Workers	from Sub-Surface Soils	0.010	8.6 <sup>1</sup>	Yes
	from Surface Soils	20.59	0.0025 <sup>1</sup>	No
	from Ground Water	0.006	0.011 <sup>2</sup>	Yes
Ingestion, Inhalation, and Dermal Contact by Temporary Construction Workers		20.59	0.0025 <sup>1</sup>	No

Notes: 1 = UCL Concentration Values  
 2 = Mean Concentration Values

Because RBSLs for benzene in sub-surface soils were exceeded by UCL concentration values of samples actually collected from the site, RBCA Tier 2 analysis is necessary. The only completed pathway for which RBSL values were exceeded is volatilization from sub-surface soil to indoor air and subsequent inhalation by on-site commercial workers. To conservatively assess the risk to other potential off-site receptors, a Tier 2 analysis was also performed for other pathways.

### **5.3 Tier 2 Evaluation**

This section of the report presents the Tier 2 evaluation for determining site-specific target levels (SSTLs) at the site. A Tier 2 evaluation may include a recommendation for alternative compliance points, use of site-specific data in the RBCA Tier 1 fate and transport algorithms, or use of site-specific data in other predictive models.

#### **5.3.1 General Approach**

Predictive models are used to account for chemical attenuation with time and distance from the

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 20

source and are usually characterized by the following:

- The models are relatively simple and are often algebraic or semi-analytical expressions.
- Input to the model is limited to practicably attainable site-specific data, or easily estimated quantities, such as soil bulk density and total porosity.
- The models are based on descriptions of relevant physical/chemical phenomena. These simple models may neglect certain mechanisms; however, this generally results in lower, more conservative SSTLs (for example, assuming constant concentrations in the source area).
- The models involve some degree of uncertainty, but are based on assumptions that tend to over-estimate the predicted exposure risk and, therefore, are conservative and protective of human health and the environment.

The approach taken and the specific equations applied in this Tier 2 evaluation are described in Conner, et. al, 1995. The attenuation factors calculated for vapor and ground water transport by the model equations are applied in the SSTL calculations to account for dispersion, adsorption, and natural attenuation. The procedures used to develop attenuation factors are described in Section 5.3.2.4.

### 5.3.2 Tier 2 Exposure Assessment

The Tier 2 exposure assessment reviews potentially exposed populations and potential exposure pathways both on and off site, as described in the Tier 1 exposure assessment.

#### 5.3.2.1 Potentially Exposed Populations

Potentially exposed on-site populations evaluated in this Tier 2 are the full-time indoor, on-site office worker and the construction worker, whose exposure would be temporary. As discussed in Section 5.2.2.1, customers are not considered in either a Tier 1 or Tier 2 evaluation because their potential for exposure is short-term and sporadic. Future on-site residential receptor populations are not evaluated in this Tier 2 analysis because the current commercial development of the site and its land use zoning make it unlikely that land use will revert to residential in the future.

As described in Section 5.2.2.1, the nearest, down-gradient, potentially exposed off-site receptors for impacted ground water are residents of a house located toward the southwest, approximately 120 feet from the on-site source of petroleum constituents. Ground water flows toward the south-

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 21

southwest beneath the site, but there is no known use of ground water on the adjacent properties and the nearest permitted water well is located 400 feet cross-gradient from the subject site. In addition, ground water samples collected from peripheral monitoring wells MW-4, MW-5, MW-6, MW-7, and MW-8 (located approximately 130, 120, 60, 45, and 180 feet from the on-site source of petroleum constituents, respectively) have never contained detectable concentrations of BETX. MTBE has been detected in ground water samples collected from monitoring wells MW-5, MW-6, and MW-7.

The predominant wind direction at the site is assumed to be from the west-northwest. Therefore the nearest potential receptors for airborne contaminants are located across Redwood Road, at least 300 feet from the source of petroleum constituents on-site. For the purposes of completing a conservative RBCA analysis, the nearest potential receptors for airborne contaminants were assumed to be full time residents. If this assessment demonstrates that there is no risk from airborne contaminants to the nearest potential receptors, then it is reasonable to assume that there would be no risk to occupants of more distant properties.

### 5.3.2.2 Potential Exposure Pathways

The potential exposure pathways for *on-site* indoor workers are the same as those described in Section 5.2.2.2 for the Tier 1 analysis, as follows: Since the site is paved and underlying ground water is not consumed on- or adjacent to the site, there are only two realistic exposure pathways - vapor transport from hydrocarbon-impacted soil and ground water through the soil into indoor air and inhalation by on-site workers and direct exposure by ingestion, inhalation, and dermal contact as a result of future on-site excavation into hydrocarbon-impacted soil or ground water (construction exposure).

Potentially completed exposure pathways for the nearest *off-site* commercial receptor populations include the following:

- Vapor migration from hydrocarbon-impacted soil at the site to outdoor air and subsequent inhalation by off-site commercial workers and/or residents.
- As noted, a permitted water well is located approximately 400 feet cross gradient from the subject site, with a permitted use as an "irrigation" well. Based on the availability, convenience, and cost of potable water supplied by EBMUD in the area, it is thought generally unlikely that homeowners or commercial property owners would install additional private water wells for potable water use in the future. However, to conservatively evaluate risks of exposure, this exposure pathway was considered complete for a commercial water well located 400 feet from the site.

### 5.3.2.3 Exposure Equations and Assumptions

Equations used to develop Tier 2 SSTLs for those pathways identified as potentially complete are contained in Appendix H. The first step in the Tier 2 evaluation is to calculate target values of COCs in air by using risk equations that include exposure variables, toxicity values, and target risk goals. Air target values are then divided by soil and ground water attenuation factors to determine target levels in soil and ground water. Definitions of the terms used in equations are also contained in Appendix H.

Full time indoor workers are assumed to breath 20 cubic meters of air per day ( $m^3/day$ ) (USEPA, 1990) and weigh an average of 70 kilograms (Kg) (OSWER, 1991). Workers at the site are assumed to work 8 hours each day for 250 days each year (OSWER, 1991). Based on information provided in Conner, et al (1995), a mean exposure duration of 4 years is the Most Likely Exposure (MLE) for commercial workers.

Averaging time (AT) is the time period over which the dose is averaged. For carcinogens, the biological response is described in terms of lifetime probabilities, and the averaging time is a 70-year lifetime (LT) (OSWER, 1991). For chronic exposure to non-carcinogens, the AT is the time period over which the exposure occurs (equal to the exposure duration).

Chemical-specific information for BETX and MTBE, such as toxicity values, site-specific concentrations, and accepted risk levels, are presented in Appendix I. Since it is not practical to evaluate every compound present in a petroleum product to assess risk from a release, indicator chemicals are usually selected to characterize risk. Selection is dependent on consideration of exposure routes, concentrations, mobilities, and toxicological properties. BETX constituents and MTBE were selected for the Tier 2 analysis based on their mobility, volatility, and toxicity characteristics.

### 5.3.2.4 Calculation of Natural Attenuation Factors

Equations and assumptions used to calculate natural attenuation factors are documented in Appendix H. These formulas and associated assumptions are from Conner, et al, 1995. The effect of each assumption on the numerical clean up standard is also documented in Appendix H.

### 5.3.2.5 Tier 2 Assessment Assumptions

For the purposes of vapor transport modeling, the soil vapor concentration at the source is assumed to be in equilibrium with the impacted soil. Values used for total organic carbon and chemical-specific properties are default values provided by Conner, et al, 1995. These data are documented in a summary of Tier 2 inputs contained in Appendix I.

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 23

Vapor transport into buildings is dependent upon the chemical flow into the building, the volume of the building, and the number of building air exchanges per day. Building volume to area ratios assumed for model input are those default values provided by Conner, et al, 1995.

Ground water transport of COCs is determined by such factors as the conductivity (K) of the soil and rock media, the natural geochemistry of the ground water and aquifer, the physical/chemical properties of the COCs, the length of ground water pathways through saturated and unsaturated zones, the rate of ground water flow, and aquifer heterogeneity. The model used for ground water transport is described in Appendix H. Assumptions used to model ground water transport include:

- Dispersion is three-dimensional.
- The source concentration is constant over time (an infinite mass or continual leak). Since the leaking USTs have been removed from this site and replaced by dual-wall USTs and the mass of impacted soil is finite, this assumption results in a conservatively low target COC level.
- Default estimates of the organic carbon coefficient and the ground water mixing, as provided in Conner, et al, were used.
- Bio-attenuation is assumed to operate along the ground water transport path based on the general availability of dissolved oxygen in natural aquifers.

### 5.3.2.6 Site Specific Input Parameters

All parameters regarding RBCA chemical exposure (i.e., averaging times, body weight, exposure duration, ingestion rates, etc.) were default values as provided by Connor, et al., 1995. A site specific value for the contaminated soil area was calculated by measuring the inferred extent of soil containing detectable concentrations of petroleum constituents as depicted on soil cross sections contained in Appendix D; the area used was 9,600 square feet.

To calculate the length of affected soil parallel to the prevailing wind direction, it was assumed that the prevailing wind was westerly-northwesterly. The distance across all soil areas containing detectable petroleum hydrocarbons was then measured; the distance used was 120 feet.

The depth of the ground water source zone was assumed to be the full thickness of the unsaturated zone, or 19.63 feet.

To calculate the length of affected soil parallel to the direction of ground water flow, a southwest flow direction was assumed. The distance across all soil areas containing detectable petroleum



## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 24

hydrocarbons was then measured; the distance used was 120 feet.

The thickness of affected surface soil was assumed to be 5 feet; any soil sample collected within 5 feet of the surface was assumed to represent "surface soil."

The ground water infiltration rate was calculated by multiplying the average rainfall for Castro Valley (approximately 25 inches annually) by 10%. Since the site is almost fully capped by either asphalt or concrete, it is likely that at least 90% of all precipitation runs over the surface and off the site.

The value used for saturated hydraulic conductivity was taken from an aquifer pumping test conducted on an adjacent site (see Section 3.3). This value was 7.2 feet per day. The ground water gradient (0.01 foot per foot) was calculated using measurements made on August 31, 1998.

The effective porosity of the water-bearing unit was approximated by noting the soil types encountered in soil borings for monitoring wells MW-1 through MW-8 (sand, silty sand, silty clay, clayey sand, sandy silt, and clayey silt) at the water table, then consulting a textbook for correlative porosity values. The value used (20%) appeared in Blatt, Middleton, and Murray (1980).

Because no site-specific data regarding the total organic carbon content of soils was available, the default value of 0.001 (unit-less) as provided by Connor, et. al., 1995, was used.

The depth to ground water was calculated for the site by averaging the depth to ground water in all four wells over the last 4 quarters of ground water monitoring. The depth used for this parameter was 19.63 feet. Based on information contained in Connor, et. al., 1995, the zone of capillary action was considered to be 1.6% of the depth to ground water (at this site, approximately 0.31 feet).

Although the pH of soil beneath the site has not been measured, the pH of ground water samples recovered during quarterly monitoring events has averaged 6.00. This value was used for soil and ground water pH after assuming that soil and ground water would be in equilibrium with regards to pH.

Volumetric water content within the saturated zone was calculated as  $\frac{9}{10}$  of total porosity using information contained in Connor, et. al., 1995. In the vadose zone, a volumetric water content value of approximately  $\frac{1}{3}$  was used in accordance with values from Connor, et. al., 1995. The balance of the pore space in both cases was assumed to be filled with air.

The distance to the nearest ground water receptor (assumed to be an irrigation well) is 400 feet. The distance to the nearest residential air receptor is conservatively assumed to be at least 300 feet (it appears likely that the nearest residence is even farther from the site).

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 25

Representative chemical concentrations in hydrocarbon-impacted ground water samples were determined by selecting the mean concentration values for benzene, ethylbenzene, toluene, total xylenes, and MTBE detected in ground water samples collected from monitoring wells MW-1 through MW-7 between December 1997 and August 1998 (the last 4 quarterly monitoring events). Representative concentrations of BETX in surficial soils (less than 5 feet below grade) were determined by calculating the 95% upper confidence limit concentration values in soil samples collected from within 5 feet of the surface in soil borings for monitoring wells MW-4 through MW-8 (no shallow soil samples were collected from soil borings MW-1 through MW-3).

Representative concentrations of BETX in subsurface soil were determined by calculating the 95% upper confidence limit concentration values in soil samples collected from around the UST basin in May 1987 and from soil borings for monitoring wells MW-1, MW-2, and MW-3 (these are the only soil borings in which BETX constituents were detected in soil samples). The benzene concentration in UST basin soil samples was calculated (as suggested in the Alameda County letter dated May 28, 1997) by multiplying the TPHg values by 3.2%.

### 5.4 Tier 2 SSTLs and Screening Results

The calculated Tier 2 SSTLs for air, soil, and ground water are compiled in Appendix I. As indicated on the summary sheets in Appendix I, most of the SSTL values calculated exceed chemical saturation limits in soil or are greater than the water solubility of the pure substance in ground water. This indicates that the COCs would not pose risk at any plausible concentration under these exposure conditions.

The two completed, *on-site* exposure pathways for this site are volatilization to indoor air and inhalation by on-site commercial workers and direct exposure to surface soils by temporary on-site construction workers. Of these two completed pathways, the Tier 2 analysis indicates that potential exposure to on-site full-time employees is the most critical path (i.e., the path with the lowest SSTLs). The Tier 2 analysis calculated an SSTL for benzene in sub-surface soil at the site of 0.035 mg/Kg. When corrected for California's more restrictive MCL by multiplying by 0.29, this value for the allowable concentration of benzene in sub-surface soil becomes 0.010 mg/Kg. This value was exceeded by the UCL sub-surface soil benzene concentration of 8.6 mg/Kg. The Tier 2 risk assessment indicates that SSTLs for ethylbenzene and total xylenes in sub-surface soils would not be exceeded even with concentrations of these constituents equal to residual saturation values. The calculated SSTL value for toluene was 42 mg/Kg. This SSTL value was not exceeded by the UCL value for toluene at this site of 1.2 mg/Kg.

The calculated RBSL for benzene in surface soil (which may volatilize to indoor air) beneath the site was 71 mg/Kg. When corrected for California's more restrictive MCL by multiplying by 0.29, this value for the allowable concentration of benzene in sub-surface soil becomes 20.59 mg/Kg. This

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 26

value was not exceeded by the UCL surface soil benzene concentration of 0.0025 mg/Kg (none of the surface soil samples collected were reported to contain detectable concentrations of benzene). The Tier 2 risk assessment indicates that SSTLs for toluene, ethylbenzene, and total xylenes in surface soils would not be exceeded even with concentrations of these constituents equal to residual saturation values. The SSTL calculated for MTBE was 240 mg/Kg; none of the surface soil samples collected at the site were analyzed for MTBE.

Volatilization from ground water to soil vapor and then entry into the on-site office building also poses a potential risk to on-site office workers. The SSTL for this pathway was calculated at 0.022 mg/L, which is corrected to 0.006 mg/L for California's more restrictive benzene standard. This corrected SSTL is exceeded by the mean concentration of benzene in ground water beneath the site of 0.011 mg/L. The mean concentration of other petroleum constituents in ground water did not exceed calculated SSTLs.

The potential routes of *off-site* exposure evaluated as part of the Tier 2 assessment include volatilization from sub-surface soils containing residual petroleum hydrocarbons to outdoor air and inhalation by off-site residents, assumed to be located at least 300 feet from the on-site source of the petroleum constituents. The calculated SSTL for benzene in sub-surface soil beneath the site (which may volatilize to outdoor air and be inhaled by off-site residents) was 20 mg/Kg. When corrected for California's more restrictive MCL by multiplying by 0.29, the value for the allowable concentration of benzene in sub-surface soil becomes 5.80 mg/Kg. This value was exceeded by the UCL sub-surface soil benzene concentration of 8.6 mg/Kg. The Tier 2 risk assessment indicates that SSTLs for ethylbenzene and total xylenes in sub-surface soils would not be exceeded even with concentrations of these constituents equal to residual saturation values. Calculated SSTLs for MTBE and toluene were 310 and 42 mg/Kg, respectively; these values were not exceeded by the UCL sub-surface soil MTBE and toluene.

The other completed exposure pathway for off-site receptors was ingestion of ground water containing petroleum constituents. The calculated SSTL for benzene in ground water used for irrigation purposes at a distance of 400 feet from the site is 1,100 mg/L. Corrected for California, this is a concentration of 319 mg/L, which is not exceeded by the mean reported concentration of benzene in ground water samples collected from existing monitoring wells of 0.011 mg/L. Table 4 summarizes the results of the Tier 2 evaluation.

**TABLE 4**  
**SUMMARY OF TIER 2 EVALUATION RESULTS**  
**FORMER BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**

Completed Exposure Pathway		SSTL Benzene (California) (mg/Kg or mg/L)	Site Benzene Value (mg/Kg or mg/L)	SSTL Exceeded?	
On-Site Pathways	Volatilization to Indoor Air and Inhalation by On-Site Commercial Workers	from Subsurface Soils	0.010	8.6 <sup>1</sup>	Yes
		from Surface Soils	20.59	0.0025 <sup>1</sup>	No
		from Ground Water	0.064	0.011 <sup>2</sup>	No
	Ingestion, Inhalation, and Dermal Contact by Temporary Construction Workers		20.59	0.0025 <sup>1</sup>	No
Off-Site Pathways	Volatilization from soil to outdoor air and inhalation by off-site commercial workers		5.80	8.6 <sup>1</sup>	Yes
	Ingestion of ground water containing hydrocarbons from commercial water well located off-site 400 feet cross-gradient		319	0.011 <sup>2</sup>	No

Notes: 1 = UCL Concentration Values  
 2 = Mean Concentration Values

The SSTL for benzene calculated for the pathway consisting of volatilization from soil to outdoor air and inhalation by off-site commercial workers (5.80 mg/Kg) is very near to the UCL value for benzene (8.6 mg/Kg), which is based on soil sample analytical data which was collected in 1991 and 1993. Based on typical reductions in petroleum hydrocarbon constituent concentrations accomplished via biodegradation, it is likely that benzene concentrations in soil are now substantially less than those used to calculate the UCL for benzene in the Tier 2 analysis.

## SUPPLEMENTAL RISK-BASED CORRECTIVE ACTION TIER 1 AND TIER 2 ANALYSES

Former Beacon Station #574

22315 Redwood Road, Castro Valley, California

Page 28

The Tier 2 evaluation indicates that potential health risks from benzene exceeds the 1 in 1,000,000 level (residential exposure) and the 1 in 100,000 level (commercial exposure) for on-site workers and the nearest potential residents.

### 6.0 CALCULATION OF LIMIT OF TOXICITY ASSOCIATED WITH MTBE

The RBCA evaluation software (Conner, et al., 1995) was used to model the limit of ground water potentially containing MTBE at concentrations which would exceed a 1 in 1,000,000 cancer risk. The same input parameters as were used to run the Tier 2 evaluation were used to iteratively calculate the distance at which conditions corresponding to a 1 in 1,000,000 cancer risk attributable to MTBE were met. A distance was guessed, the model run, and if the calculated allowable SSTL concentration exceeded the average of all concentrations of MTBE reported from samples collected in monitoring well MW-6 (the well located furthest down-gradient which contains MTBE), the point was assumed to be too close to MW-6. The distance was adjusted and the SSTL re-calculated. When the calculated SSTL equaled the average MTBE concentration in MW-6 (284  $\mu\text{g/L}$ ), the guessed distance represented the furthest point down-gradient where exposure would constitute an unacceptable risk. This distance was found to be approximately 71 feet down-gradient (south-southwest) of monitoring well MW-6, or about 114 feet down-gradient of the southern property boundary. The nearest known location of a potential ground water receptor is an "irrigation" well at a distance of 400 feet south-southeast (cross-gradient) of the site, well beyond the limit of ground water potentially containing MTBE at concentrations that would exceed a 1 in 1,000,000 cancer risk. A summary calculation sheet is contained in Appendix J.


### 7.0 CONCLUSIONS AND RECOMMENDATIONS

Based on the results of the Tier 1 and 2 evaluations, concentrations of petroleum constituents in soil and ground water beneath the site do not meet the RBCA Tier 1 or Tier 2 criteria for closure. The potential exposure pathways identified by modeling described in this report that do not meet RBCA criteria are volatilization from soil to indoor and outdoor air and potential inhalation by on-site indoor workers and off-site outdoor workers. It is significant to note that there are no known reports of hydrocarbon vapors observed at locations either on- or off-site. Also, Ultramar is not aware of any complaints from owners or occupants of nearby properties regarding hydrocarbon odors in interior or exterior air. Monitoring of interior and exterior air with a photoionization detector, Dräger® tubes, or other applicable devices would allow verification that these vapors are not reaching potential receptors. The existing ground water monitoring results (Tables 1 and 2) dating back to May of 1993 indicate that the extent of the dissolved BETX plume in ground water is constrained and apparently not expanding.

## 8.0 REFERENCES

- Berry, D.F., A.J. Francis, and J.-M. Bollag, 1987. Microbial metabolism of homocyclic and heterocyclic aromatic compounds under anaerobic conditions. *Microbiological Review*, vol. 51, p. 43-59.
- Blatt, Harvey, Middleton, Gerard, and Murray, Raymond, 1980. *Origin of Sedimentary Rocks*. Prentice Hall, Englewood Cliffs, New Jersey.
- Borden, R.C., C.A. Gomez, and M.T. Becker, 1995. Geochemical indicators of intrinsic bioremediation. *Ground Water*, vol. 33, no. 2, p. 180-189.
- Chiang, C.Y., J.P. Salanitro, E.Y. Chai, J.D. Colthart, and C.L. Klein, 1989. Aerobic biodegradation of benzene, toluene, and xylene in a sandy aquifer: Data analysis and computer modeling. *Ground Water*, vol. 27., no. 6, p. 823-834.
- Conner, J.A., Nevin, J.P., Malander, M., Stanley, C., and DeVauil, G., Tier 2 Guidance Manual for Risk-Based Corrective Action, Groundwater Services, Inc. 1995.
- Davis, J.W., N.J. Klier, and C.L. Carpenter, 1994. Natural biological attenuation of benzene in ground water beneath a manufacturing facility. *Ground Water*, vol. 32, no. 2, p. 215-226.
- Grbić-Galić, D. and T.M. Vogel, 1987. Transformation of toluene and benzene by mixed methanogenic cultures. *Applied Environmental Microbiology*, vol. 53, p. 254-260.
- Hutchins, S.R., W.C. Downs, J.T. Wilson, G.B. Smith, and D.K. Kovacs, 1991. Effect of nitrate addition on bioremediation of fuel-contaminated aquifer-field demonstration. *Ground Water*, vol. 29, p. 571.
- Johnson, P.C., and Ettinger, R.A., "Heuristic Model for Predicting the Intrusion Rate of Contaminant Vapors into Buildings," *Environmental Science and Technology*, Vol 25, No. 8, 1991, pp. 1445-1452.
- Kemblowski, M.W., J.P. Salanitro, G.M. Deeley, and C.C. Stanley, 1987. Fate and transport of dissolved hydrocarbons in groundwater-A case study. In *Proceedings of petroleum hydrocarbons and organic chemicals in ground water: Prevention, detection, and restoration conference*, Houston, Texas, 4-6 November. Dublin, Ohio: NGWA, p. 207-231.
- Kuhn, E.P., J. Zeyer, P. Eicher, and R.P. Schwarzenbach, 1988. Anaerobic degradation of alkylated benzene in denitrifying laboratory aquifer columns. *Applied Environmental Microbiology*, vol. 54, p. 490-496.
- Litchfield, J.H. and L.C. Clark, 1973. Bacterial activity in ground waters containing petroleum products. Committee on Environmental Affairs, American Petroleum Institute, Washington D.C., API. Publication No. 4211.

- Lovley, D.R., 1991. Dissimilatory Fe(III) and Mn(IV) reduction. *Microbiological Review*, vol. 55, p. 259-287.
- Maquire, S.R., June 1993, "Employer and Occupational Tenure: 1991 Update," *Monthly Labor Review*, 45-56.
- McAllister, P.M. and Chiang, C.Y., 1994. A practical approach to evaluating natural attenuation of contaminants in ground water. *Ground Water Monitoring Review*, Spring 1994, p. 161-173.
- McKee, J.E., F.B. Laverty, and R.M. Hertel, 1972. Gasoline in ground water. *Journal of Water Pollution, Conf. Fed.* vol. 44, p. 293.
- Mihelcic, J.R. and R.G. Luthy, 1991. Sorption and microbial degradation of naphthalene in soil-water suspensions under denitrification conditions. *Environ. Sci. Tech.*, vol. 25, p. 169-177.
- Office of Solid Waste and Emergency Response (OSWER), 1991, Human Health Evaluation Manual, Supplemental Guidance: "Standard Default Exposure Factors," Directive 9285.6-03.
- Salanitro, J.P., 1992. Criteria for evaluating the bioremediation of aromatic hydrocarbons in aquifers. Presented at the National Research Council (Water Science and Technology Board) Committee on In site bioremediation: How do we know when it works? Washington D.C. 26-29 October.
- Schink, B., 1985. Degradation of unsaturated hydrocarbons by methanogenic enrichment cultures. *FEMS Microbiol. Ecol.*, vol. 31, p. 69-77.
- Siegel, D.I., W.E. McFarland, and T.R. Byrnes, 1992. Geochemical implications of mineral scaling in remediation equipment. In *Proceedings of the 1992 petroleum hydrocarbons and organic chemicals in ground water: Prevention, detection, and restoration conference*, Houston, Texas, 4-6 November. Dublin, Ohio: NGWA.
- Smolenski, W.J. and J.M. Suflita, 1987. Biodegradation of creosol isomers in anoxic aquifers. *Applied Environmental Microbiology*, vol. 53, p. 710-716.
- USEPA, December 1989, Risk Assessment Guidance for Superfund (Vol. 1) Human Health Evaluation Manual (Part A), EPA/540/1-89/002.
- USEPA, March 1990, Exposure Factors Handbook, EPA/600/8-89/043.

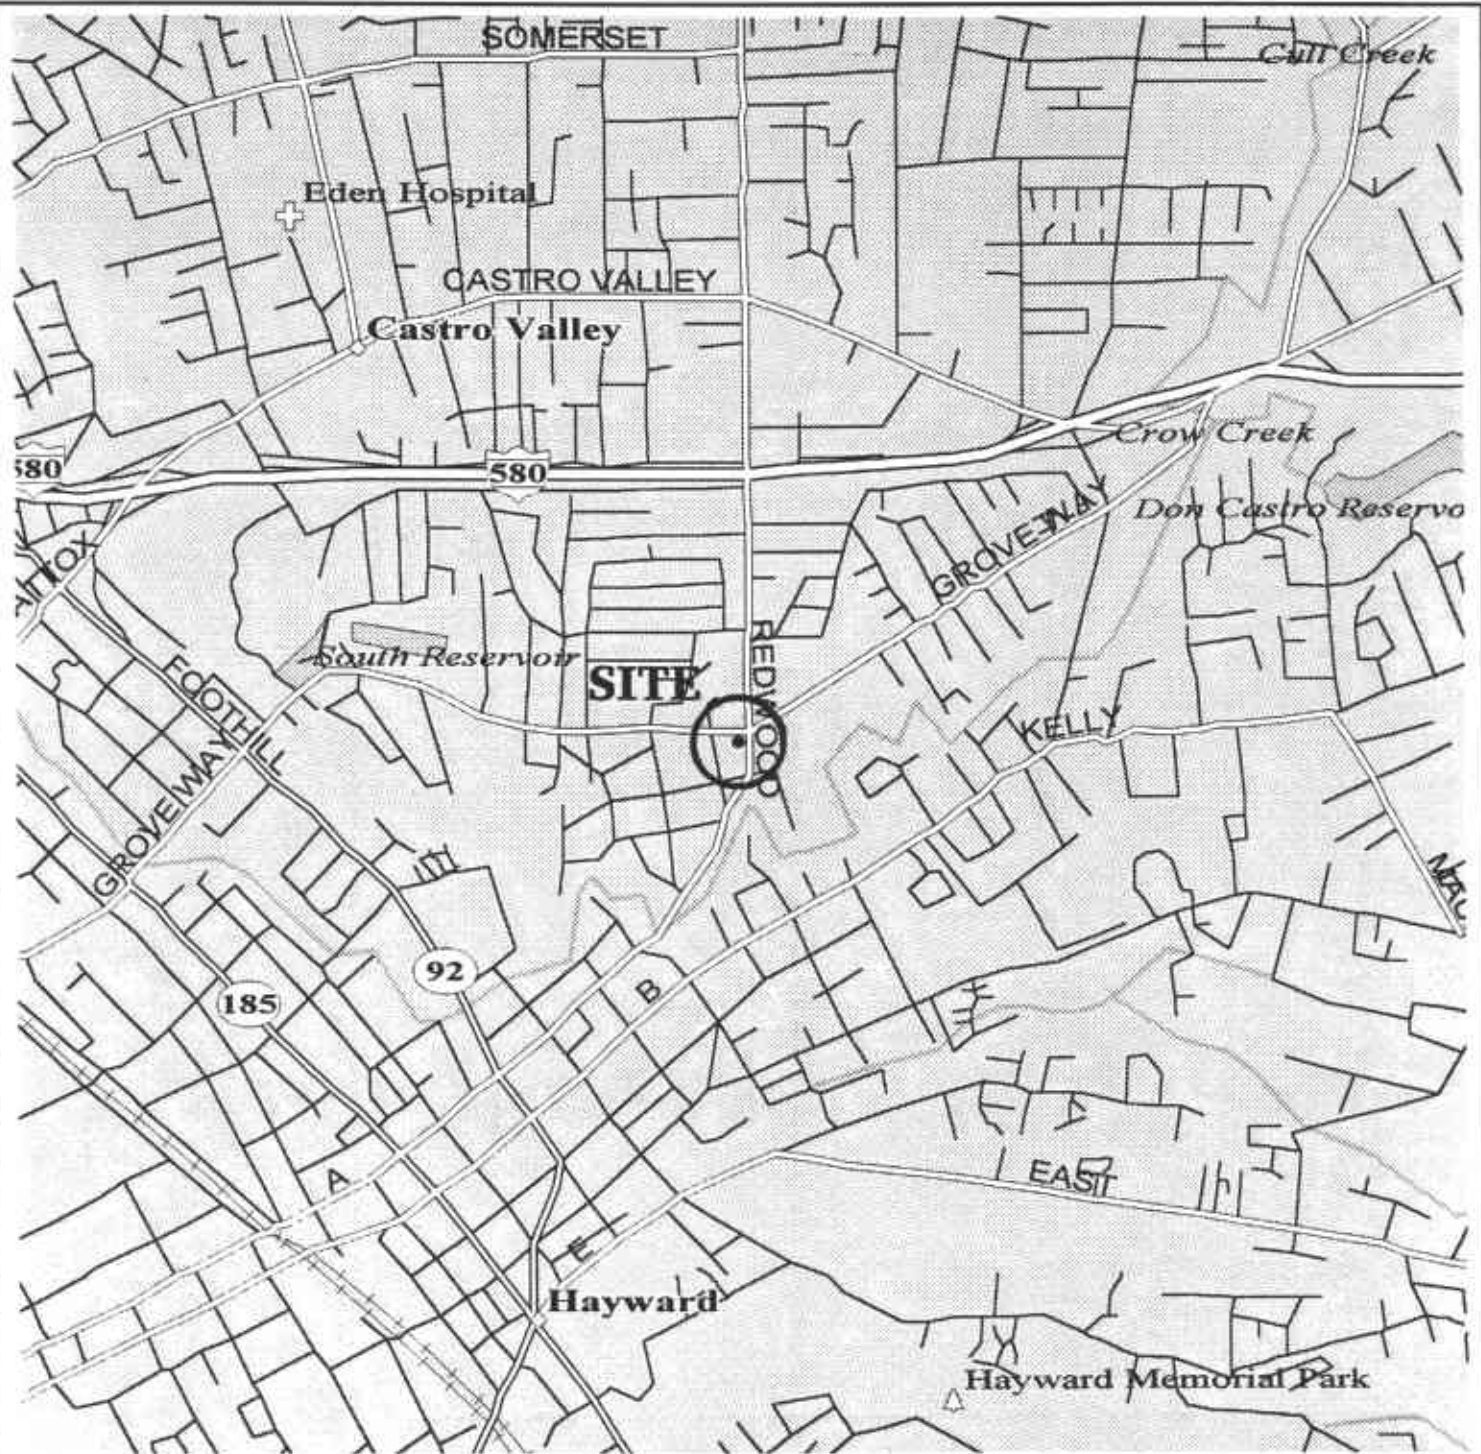


<b>SITE LOCATION MAP</b>		<b>FIGURE 1</b>
BEACON STATION #574 22315 REDWOOD ROAD CASTRO VALLEY, CALIFORNIA		PROJECT NUMBER: U065.01
EL DORADO ENVIRONMENTAL, INC.		DRAWN BY: D.A.V.D.
		CHECKED BY: D.P.

SOURCE: STREET ATLAS U.S.A., DELORME MAPPING, 1994



GROVE WAY

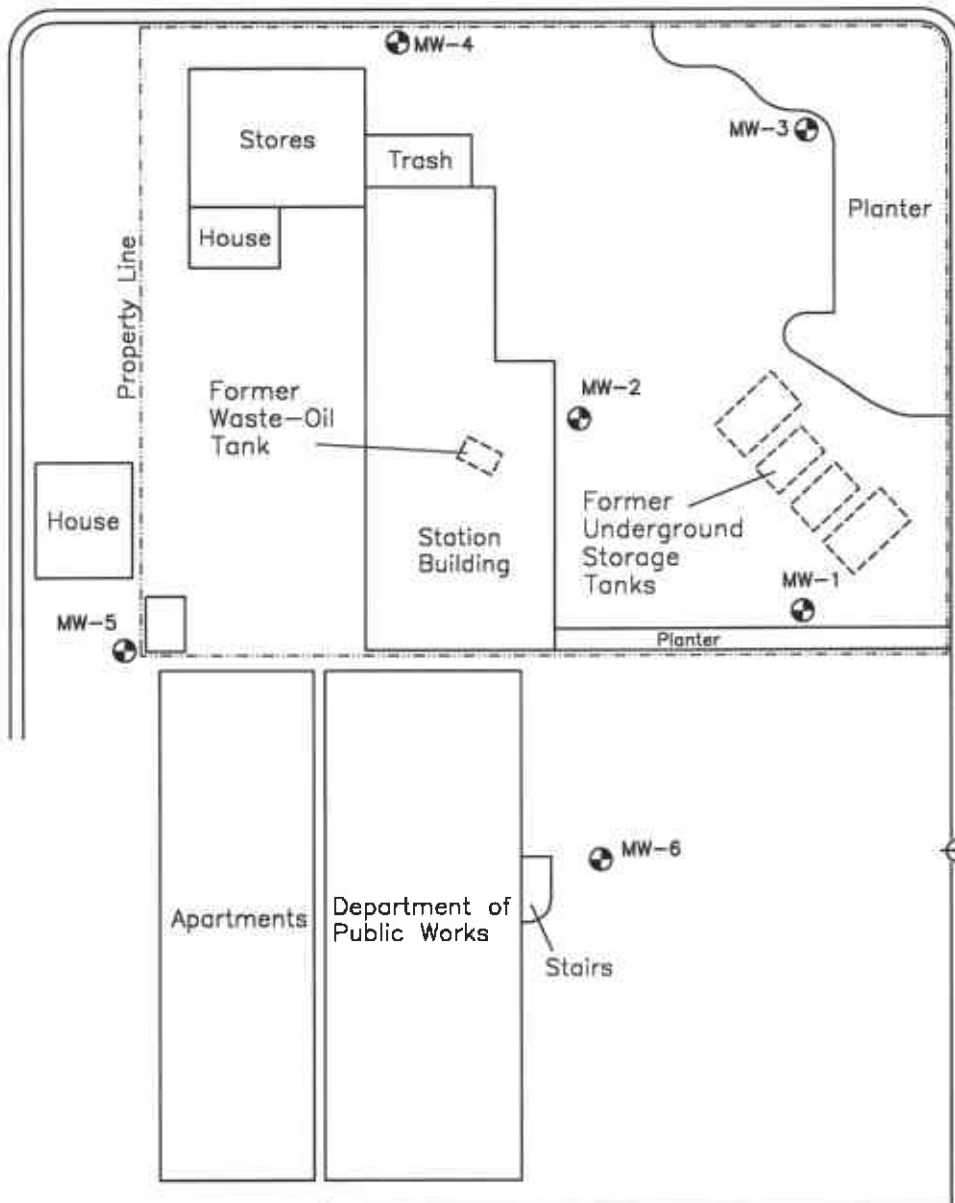

REDWOOD ROAD


EXPLANATION

- MW-1 ⊕ Monitoring Well Location
- MW-7 ⊕ Abandoned Monitoring Well



<b>SITE MAP</b>		<b>FIGURE 2</b>
BEACON STATION #574		PROJECT NUMBER: U065.01
22315 REDWOOD ROAD		DRAWN BY: D.A.
CASTRO VALLEY, CALIFORNIA		CHECKED BY: Dvd
EL DORADO ENVIRONMENTAL, INC.		

SOURCE: FIGURE MODIFIED FROM DRAWING PROVIDED BY FUGRO WEST, INC.

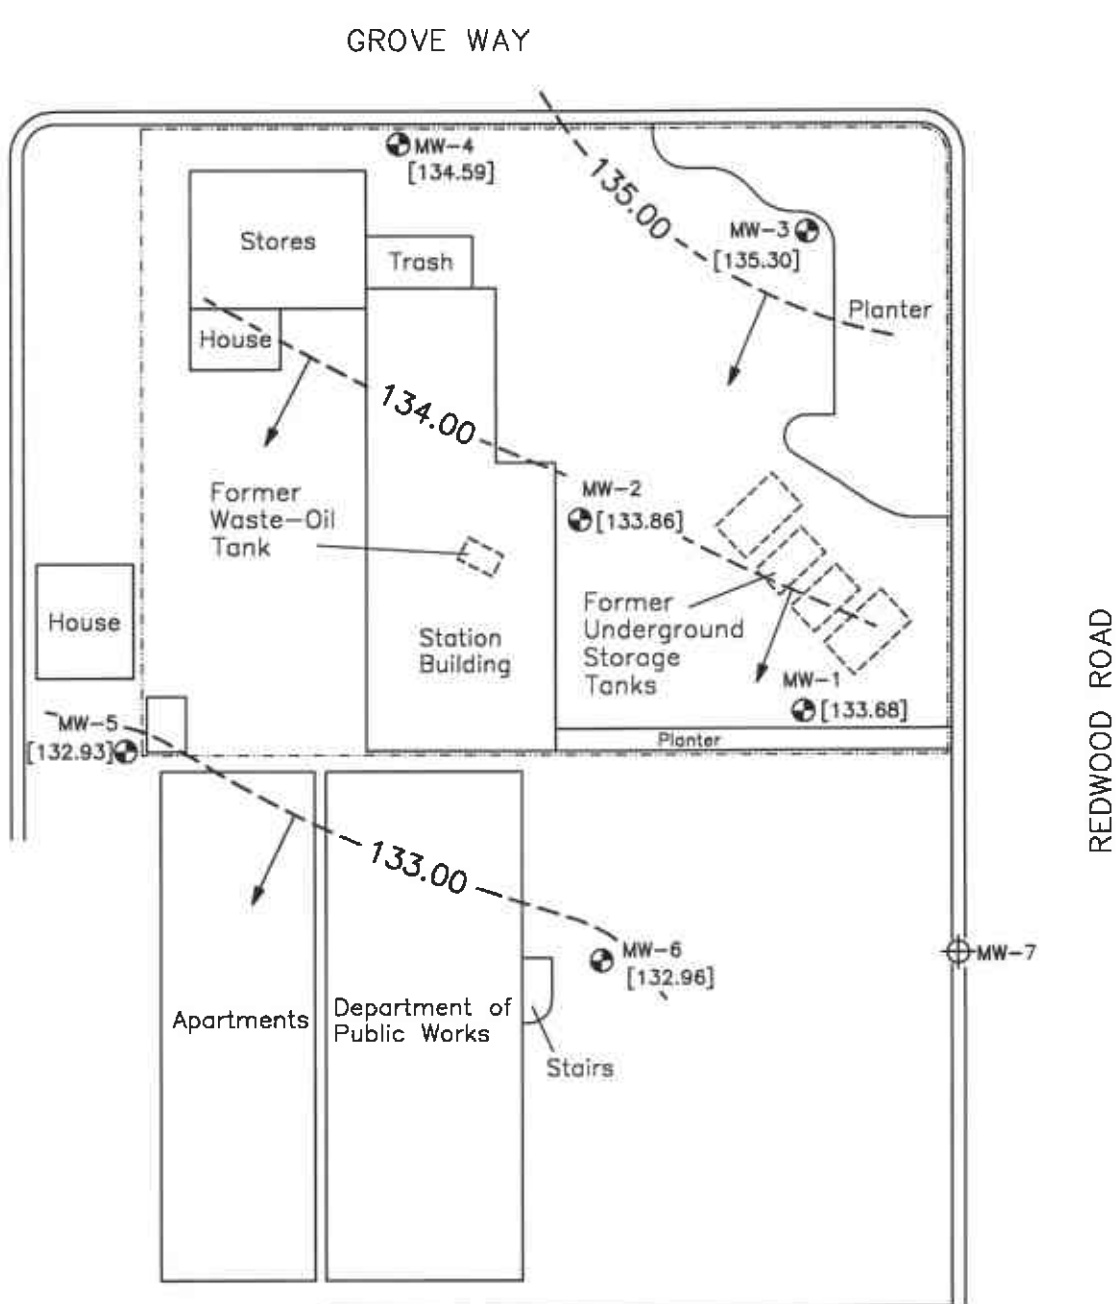

**EXPLANATION**


- MW-1 ⊕ Monitoring Well Location
- MW-7 ⊕ Abandoned Monitoring Well
- [133.68] Elevation of Ground Water Measured in Feet; Datum is Mean Sea Level
- [NM] Well Not Measured
- 134.00 --- Line of Equal Elevation of Ground Water Measured in Feet; Datum is Mean Sea Level
- ↘ Inferred Direction of Ground Water Flow



SOURCE: FIGURE MODIFIED FROM DRAWING PROVIDED BY FUGRO WEST, INC.

GROUND WATER CONTOUR MAP, DECEMBER 12, 1998		FIGURE 3
BEACON STATION #574		PROJECT NUMBER:
22315 REDWOOD ROAD		U065.01
CASTRO VALLEY, CALIFORNIA		DRAWN BY:
EL DORADO ENVIRONMENTAL, INC.		D.A.
		CHECKED BY:
		D.D.

GROVE WAY

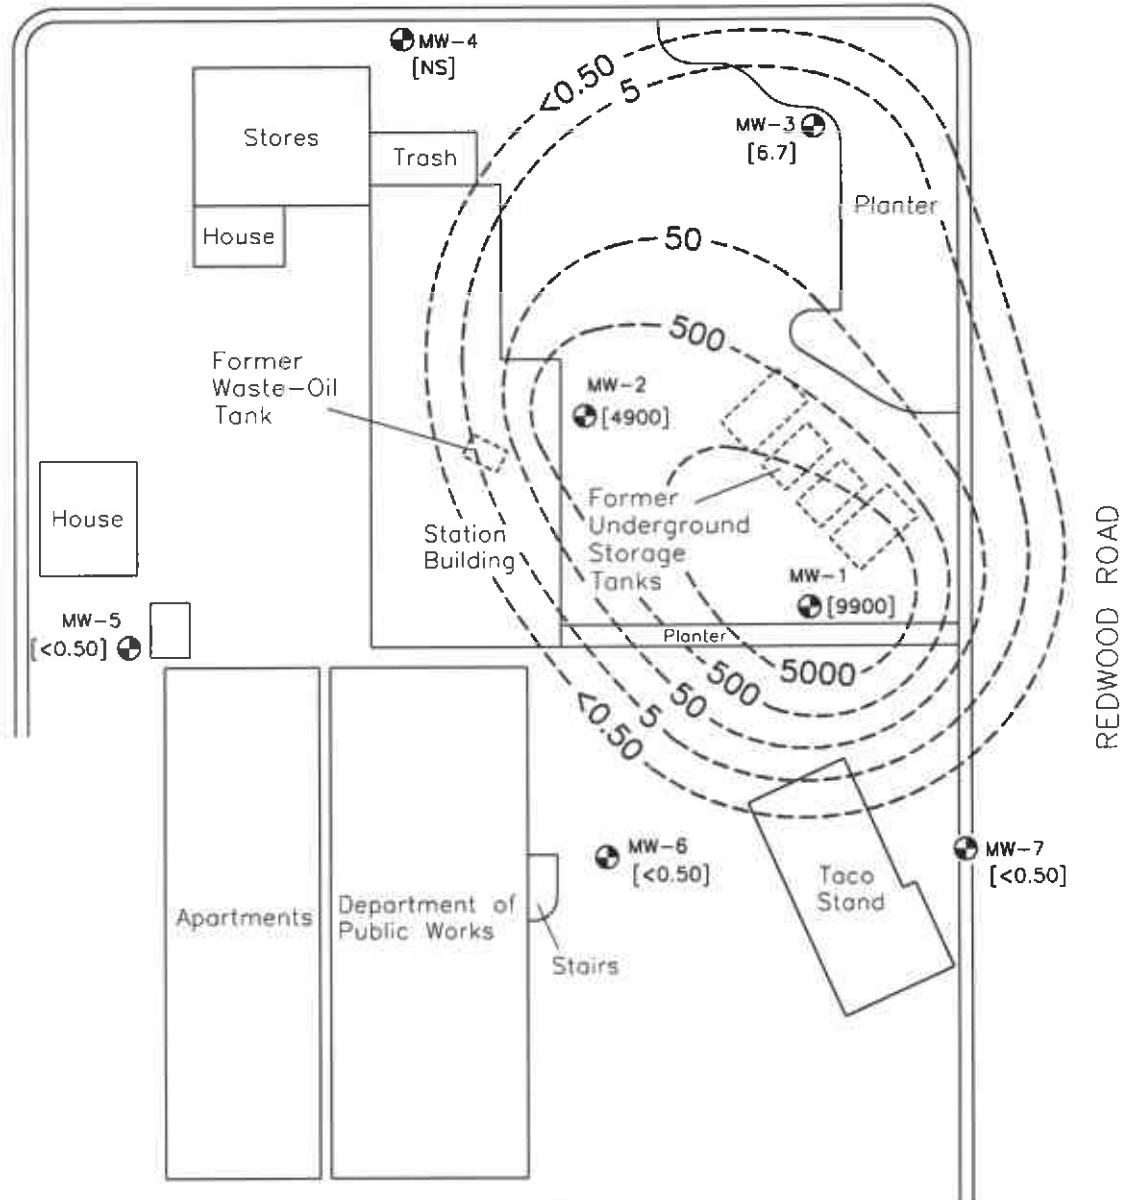

EXPLANATION

- MW-2 Monitoring Well Location
- [14000] Concentration of Benzene in Ground Water; Concentration in Micrograms per Liter
- [NS] Well Not Sampled
- 50 Line of Equal Concentration of Benzene in Ground Water; Concentration in Micrograms per Liter



SOURCE: FIGURE MODIFIED FROM DRAWING PROVIDED BY FUGRO WEST, INC.

DISSOLVED BENZENE DISTRIBUTION MAP, AUGUST 31, 1998	FIGURE 4
BEACON STATION #574 22315 REDWOOD ROAD CASTRO VALLEY, CALIFORNIA	PROJECT NUMBER: U065.01
	DRAWN BY: D.A.
EL DORADO ENVIRONMENTAL, INC.	CHECKED BY: <i>[Signature]</i>

**TABLE 1**  
**GROUND WATER ELEVATION DATA**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(Measurements in feet)**

Monitoring Well	Date	Reference Elevation (top of casing) <sup>1</sup>	Depth to Ground Water <sup>1</sup>	Ground Water Elevation <sup>2</sup>	Well Depth	Comments
MW-1	03/27/92	156.55	22.43	134.12	---	
	06/04/92		23.40	133.15	---	
	09/23/92		24.07	132.48	---	
	11/12/92		24.16	132.39	29.33	
	02/02/93		21.87	134.68	29.80	
	05/07/93		22.58	133.97	29.84	
	05/18/93		22.66	133.89	---	
	08/11/93		23.41	133.14	29.81	
	11/05/93		24.09	132.46	29.81	
	03/01/94		22.76	133.79	29.85	
	06/02/94		23.24	133.31	29.85	
	09/09/94		23.93	132.62	29.86	
	12/20/94		22.94	133.61	29.85	
	03/08/95		22.20	134.35	29.71	
	06/14/95		22.65	133.90	29.70	
	09/26/95		23.44	133.11	29.71	
	12/27/95		23.04	133.51	29.72	
	03/26/96		21.39	135.16	29.71	
	06/05/96		22.43	134.12	29.73	
	09/16/96		24.42	132.13	29.74	
	12/02/96		23.14	133.41	29.75	
	03/10/97		22.30	134.25	29.76	
	06/12/97		22.97	133.58	29.76	
09/29/97	23.35	133.20	29.78			
12/01/97	22.73	133.82	29.79			
03/19/98	20.56	135.99	29.78			
05/28/98	21.78	134.77	29.76			
08/31/98	22.64	133.91	29.78			
12/08/98	22.87	133.68	29.76			

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing.  
2 = Elevation referenced to mean sea level.  
Well Depth = Measurement from top of casing to bottom of well.  
3 = Well abandoned.

**TABLE 1**  
**GROUND WATER ELEVATION DATA**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(Measurements in feet)**

Monitoring Well	Date	Reference Elevation (top of casing) <sup>1</sup>	Depth to Ground Water <sup>1</sup>	Ground Water Elevation <sup>2</sup>	Well Depth	Comments
MW-2	03/27/92	155.17	20.82	134.35	---	
	06/04/92		21.81	133.36	---	
	09/23/92		22.45	132.72	---	
	11/12/92		22.60	132.57	29.71	
	02/02/93		20.28	134.89	29.73	
	05/07/93		20.97	134.20	29.73	
	05/18/93		21.06	134.11	---	
	08/11/93		21.85	133.32	29.70	
	11/05/93		22.32	132.85	29.70	
	03/01/94		21.19	133.98	29.68	
	06/02/94		21.59	133.58	29.69	
	09/09/94		22.33	132.84	29.66	
	12/20/94		21.37	133.80	29.65	
	03/08/95		20.60	134.57	29.52	
	06/14/95		21.04	134.13	29.54	
	09/26/95		21.84	133.33	29.53	
	12/27/95		21.44	133.73	29.56	
	03/26/96		19.81	135.36	29.56	
	06/05/96		20.83	134.34	29.59	
	09/16/96		21.93	133.24	29.58	
	12/02/96		21.54	133.63	29.58	
	03/10/97		20.71	134.46	29.58	
	06/12/97		21.41	133.76	29.52	
09/29/97	21.26	133.91	29.51			
12/01/97	20.97	134.20	29.50			
03/19/98	18.98	136.19	29.51			
05/28/98	20.22	134.95	29.50			
08/31/98	21.09	134.08	29.51			
12/08/98	21.31	133.86	29.50			

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing.  
2 = Elevation referenced to mean sea level.  
Well Depth = Measurement from top of casing to bottom of well.  
3 = Well abandoned.

**TABLE 1**  
**GROUND WATER ELEVATION DATA**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(Measurements in feet)**

Monitoring Well	Date	Reference Elevation (top of casing) <sup>1</sup>	Depth to Ground Water <sup>1</sup>	Ground Water Elevation <sup>2</sup>	Well Depth	Comments
MW-3	03/27/92	157.13	21.46	135.67	---	
	06/04/92		22.34	134.79	---	
	09/23/92		22.84	134.29	---	
	11/12/92		23.04	134.09	29.55	
	02/02/93		21.03	136.10	29.45	
	05/07/93		21.59	135.54	29.53	
	05/18/93		21.73	135.40	---	
	08/11/93		22.31	134.82	29.41	
	11/05/93		22.85	134.28	29.41	
	03/01/94		21.97	135.16	29.55	
	06/02/94		22.29	134.84	29.56	
	09/09/94		22.91	134.22	29.56	
	12/20/94		22.11	135.02	29.54	
	03/08/95		21.40	135.73	29.38	
	06/14/95		21.80	135.33	29.36	
	09/26/95		22.38	134.75	29.37	
	12/27/95		22.07	135.06	29.37	
	03/26/96		20.73	136.40	29.38	
	06/05/96		21.54	135.59	29.40	
	09/16/96		22.37	134.76	29.43	
	12/02/96		22.35	134.78	29.45	
	03/10/97		21.44	135.69	29.47	
	06/12/97		21.97	135.16	29.45	
	09/29/97		22.30	134.83	29.45	
	12/01/97		21.78	135.35	29.46	
	03/19/98		19.88	137.25	29.46	
05/28/98	20.91	136.22	29.47			
08/31/98	21.61	135.52	29.47			
12/08/98	21.83	135.30	29.47			
MW-4	05/18/93	151.96	17.55	134.41	---	
	08/11/93		17.50	134.46	28.43	
	11/05/93		15.84	136.12	28.43	
	03/01/94		17.35	134.61	28.11	
	06/02/94		17.68	134.28	28.12	
	09/09/94		18.19	133.77	28.13	
	12/20/94		17.52	134.44	28.10	
	03/08/95		16.82	135.14	27.97	
	06/14/95		17.22	134.74	27.97	
	09/26/95		17.79	134.17	27.91	
	12/27/95		17.47	134.49	27.89	
	03/26/96		16.32	135.64	27.89	
	06/05/96		17.10	134.86	27.88	
	09/16/96		17.85	134.11	27.89	
	12/02/96		17.59	134.37	27.88	
	03/10/97		16.79	135.17	27.89	
	06/12/97		17.49	134.47	27.90	
	09/29/97		18.33	133.63	27.91	
	12/01/97		17.36	134.60	27.90	
	03/19/98		15.90	136.06	27.91	
05/28/98	16.34	135.62	27.90			
08/31/98	16.83	135.13	27.90			
12/08/98	17.37	134.59	27.91			

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing  
2 = Elevation referenced to mean sea level.  
Well Depth = Measurement from top of casing to bottom of well.  
3 = Well abandoned.

**TABLE 1**  
**GROUND WATER ELEVATION DATA**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(Measurements in feet)**

Monitoring Well	Date	Reference Elevation (top of casing) <sup>1</sup>	Depth to Ground Water <sup>1</sup>	Ground Water Elevation <sup>2</sup>	Well Depth	Comments
MW-5	05/18/93	148.68	15.72	132.96	---	
	08/11/93		16.42	132.26	25.43	
	11/05/93		16.92	131.76	25.43	
	03/01/94		15.54	133.14	25.00	
	06/02/94		16.19	132.49	25.00	
	09/09/94		16.87	131.81	25.00	
	12/20/94		15.84	132.84	25.01	
	03/08/95		15.11	133.57	24.85	
	06/14/95		15.69	132.99	24.86	
	09/26/95		16.46	132.22	24.81	
	12/27/95		15.91	132.77	24.80	
	03/26/96		14.31	134.37	24.81	
	06/05/96		15.43	133.25	24.75	
	09/16/96		16.52	132.16	24.74	
	12/02/96		16.05	132.63	24.76	
	03/10/97		14.80	133.88	24.74	
	06/12/97		15.95	132.78	24.75	
	09/29/97		16.33	132.35	24.76	
	12/01/97		15.48	133.20	24.78	
	03/19/98		13.16	135.52	24.77	
05/28/98	14.04	134.64	24.78			
08/31/98	14.81	133.87	24.79			
12/08/98	15.75	132.93	24.76			
MW-6	05/18/93	153.96	20.80	133.16	---	
	08/11/93		21.64	132.32	31.15	
	11/05/93		22.11	131.85	31.15	
	03/01/94		20.80	133.16	29.96	
	06/02/94		21.37	132.59	29.98	
	09/09/94		22.05	131.91	29.96	
	12/20/94		21.06	132.90	29.89	
	03/08/95		20.29	133.67	29.67	
	06/14/95		20.81	133.15	29.65	
	09/26/95		21.62	132.34	29.66	
	12/27/95		21.12	132.84	29.63	
	03/26/96		19.50	134.46	29.60	
	06/05/96		20.56	133.40	29.63	
	09/16/96		21.70	132.26	29.65	
	12/02/96		21.25	132.71	29.66	
	03/10/97		20.16	133.80	29.64	
	06/12/97		21.16	132.80	29.62	
	09/29/97		21.51	132.45	29.62	
	12/01/97		20.89	133.07	29.61	
	03/19/98		18.71	135.25	29.60	
05/28/98	19.99	133.97	29.62			
08/31/98	20.81	133.15	29.63			
12/08/98	21.00	132.96	29.64			

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing.  
2 = Elevation referenced to mean sea level.  
Well Depth = Measurement from top of casing to bottom of well.  
3 = Well abandoned.

**TABLE 1**  
**GROUND WATER ELEVATION DATA**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(Measurements in feet)**

Monitoring Well	Date	Reference Elevation (top of casing) <sup>1</sup>	Depth to Ground Water <sup>1</sup>	Ground Water Elevation <sup>2</sup>	Well Depth	Comments
MW-7	05/18/93	156.09	22.64	133.45	---	
	08/11/93		23.25	132.84	30.75	
	11/05/93		23.93	132.16	30.75	
	03/01/94		22.72	133.37	30.11	
	06/02/94		23.22	132.87	30.12	
	09/09/94		23.90	132.19	30.12	
	12/20/94		22.98	133.11	30.10	
	03/08/95		22.14	133.95	29.91	
	06/14/95		22.61	133.48	29.91	
	09/26/95		23.43	132.66	29.90	
	12/27/95		23.01	133.08	29.90	
	03/26/96		21.32	134.77	29.87	
	06/05/96		22.37	133.72	29.91	
	09/16/96		23.51	132.58	29.90	
	12/02/96		23.08	133.01	29.91	
	03/10/97		21.94	134.15	29.90	
	06/12/97		22.96	133.13	29.88	
	09/29/97		23.35	132.74	29.87	
	12/01/97		22.68	133.41	29.88	
	03/19/98		20.52	135.57	29.88	
05/28/98	21.76	134.33	29.88			
08/31/98	22.66	133.43	29.86			
12/08/98 <sup>3</sup>						
MW-8	05/18/93	158.04	21.55	136.49	---	
	08/11/93		22.43	135.61	34.82	
	11/05/93		23.00	135.04	34.82	
	03/01/94		22.05	135.99	34.04	
	06/02/94		22.29	135.75	34.04	
	09/09/94		22.99	135.05	34.04	
	12/20/94		22.14	135.90	33.98	
	03/08/95		21.25	136.79	34.48	
	06/14/95		21.70	136.34	34.49	
	09/26/95		22.29	135.75	34.40	
	12/27/95		21.96	136.08	34.43	
	03/26/96		20.48	137.56	34.42	
	06/05/96		21.50	136.54	34.41	
	09/16/96		22.38	135.66	34.43	
	12/02/96		22.39	135.65	34.42	
	03/10/97		20.89	137.16	34.43	
	06/12/97		21.80	136.24	34.42	
	09/29/97		22.81	135.23	34.40	
	12/01/97		21.70	136.34	34.41	
	03/19/98		19.35	138.69	34.42	
05/28/98	20.52	137.52	34.41			
08/31/98	21.40	136.64	34.40			
12/08/98 <sup>3</sup>						

NOTES: 1 = Measurement and reference elevation taken from notch/mark on top north side of well casing.  
2 = Elevation referenced to mean sea level.  
Well Depth = Measurement from top of casing to bottom of well.  
3 = Well abandoned.



**TABLE 2**  
**GROUND WATER ANALYTICAL RESULTS**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(All results in micrograms per Liter)**

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics				
		Gasoline	Diesel	Motor Oil	MTBE <sup>1</sup>	Benzene	Toluene	Ethylbenzene	Total Xylenes
MW-1	03/27/92	5,600	<50	<50		760	900	250	1,100
	06/04/92	2,600	<800	NA		270	57	250	440
	09/23/92	3,400	NA	NA		480	430	110	550
	11/12/92	2,700	NA	NA		5.8	<5.0	140	340
	02/02/93	8,500	NA	NA		760	770	250	1,200
	05/07/93	7,700	NA	NA		970	630	280	1,500
	08/11/93	11,000	NA	NA		1,400	1,000	260	1,600
	11/05/93	36,000	NA	NA		6,200	4,700	1,400	7,100
	03/01/94	3,800	NA	NA		580	490	110	620
	06/02/94	8,900	NA	NA		1,900	1,200	420	2,100
	09/09/94	4,300	NA	NA		740	290	200	630
	12/20/94	3,900	NA	NA		550	260	150	510
	03/08/95	8,100	NA	NA		1,100	540	250	1,100
	06/14/95	NS	NS	NS		NS	NS	NS	NS
	09/26/95	8,600	NA	NA		2,100	550	420	1,300
	12/27/95	NS	NS	NS		NS	NS	NS	NS
	03/26/96	21,000	NA	NA		7,000	2,700	500	7,000
	06/05/96	NS	NS	NS		NS	NS	NS	NS
	09/16/96	13,000	NA	NA	1,400	3,200	770	470	2,900
	12/02/96	NS	NS	NS	NS	NS	NS	NS	NS
	03/10/97	30,000	NA	NA	1,100	7,300	1,900	850	7,100
	06/12/97	NS	NS	NS	NS	NS	NS	NS	NS
	09/29/97	25,000	NA	NA	840	5,500	920	920	4,000
	12/01/97	NS	NS	NS	NS	NS	NS	NS	NS
	03/19/98	90,000	NA	NA	<1,500	15,000	7,000	3,500	20,000
	05/28/98	NS	NS	NS	NS	NS	NS	NS	NS
	08/31/98	50,000	NA	NA	890	9,900	1,500	2,100	9,400
	12/08/98	NS	NS	NS	NS	NS	NS	NS	NS

NOTES:  
< = Below indicated detection limit.  
NS = Not sampled.  
NA = Not analyzed.  
1 = Product is not typical gasoline.  
2 = Well abandoned.

**TABLE 2**  
**GROUND WATER ANALYTICAL RESULTS**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(All results in micrograms per Liter)**

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics				
		Gasoline	Diesel	Motor Oil	MTBE <sup>1</sup>	Benzene	Toluene	Ethylbenzene	Total Xylenes
MW-2	03/27/92	18,000	<50	<50		2,400	2,300	870	3,300
	06/04/92	14,000	<5,000	NA		1,900	1,700	580	2,300
	09/23/92	22,000	NA	NA		2,100	1,500	760	2,900
	11/12/92	29,000	NA	NA		2,400	860	540	3,500
	02/02/93	24,000	NA	NA		2,700	1,900	590	2,600
	05/07/93	19,000	NA	NA		1,800	1,300	460	2,600
	08/11/93	23,000	NA	NA		2,300	1,500	550	2,300
	11/05/93	30,000	NA	NA		3,100	2,900	860	3,700
	03/01/94	13,000	NA	NA		1,500	490	350	1,000
	06/02/94	12,000	NA	NA		2,000	790	460	1,300
	09/09/94	13,000	NA	NA		1,800	660	440	1,000
	12/20/94	16,000	NA	NA		2,300	1,000	650	1,900
	03/08/95	16,000	NA	NA		2,200	1,000	550	2,100
	06/14/95	NS	NS	NS		NS	NS	NS	NS
	09/26/95	18,000	NA	NA		2,500	1,000	770	2,700
	12/27/95	NS	NS	NS		NS	NS	NS	NS
	03/26/96	33,000	NA	NA		4,200	2,600	1,000	5,000
	06/05/96	NS	NS	NS		NS	NS	NS	NS
	09/16/96	19,000	NA	NA	940	2,600	490	560	2,000
	12/02/96	NS	NS	NS	NS	NS	NS	NS	NS
	03/10/97	23,000	NA	NA	1,400	3,700	870	650	3,000
	06/12/97	NS	NS	NS	NS	NS	NS	NS	NS
	09/29/97	30,000	NA	NA	1,400	4,900	880	990	3,800
12/01/97	NS	NS	NS	NS	NS	NS	NS	NS	
03/19/98	72,000	NA	NA	<1,500	14,000	9,500	2,300	11,000	
05/28/98	NS	NS	NS	NS	NS	NS	NS	NS	
08/31/98	29,000	NA	NA	890	4,900	1,600	960	3,900	
12/08/98	NS	NS	NS	NS	NS	NS	NS	NS	
MW-3	03/27/92	160	<50	<50		9.2	4.8	10	23
	06/04/92	120	<50	NA		7.5	2.7	0.5	15
	09/23/92	220	NA	NA		8.3	4.3	6.2	19
	11/12/92	230	NA	NA		12	5.5	7.7	19
	02/02/93	86	NA	NA		2.4	0.71	2.7	6.2
	05/07/93	140	NA	NA		2.6	1.2	3.9	8.4
	08/11/93	490	NA	NA		15	8.1	14	37
	11/05/93	820	NA	NA		45	24	34	93
	03/01/94	410	NA	NA		7.4	2.7	5.6	10
	06/02/94	440	NA	NA		13	4.9	14	31
	09/09/94	620	NA	NA		12	4.8	9.7	20
	12/20/94	770	NA	NA		24	11	16	36
	03/08/95	300	NA	NA		6.1	0.97	4.8	7.5
	06/14/95	NS	NS	NS		NS	NS	NS	NS
	09/26/95	130	NA	NA		4.8	1.6	4.8	9.4
	12/27/95	NS	NS	NS		NS	NS	NS	NS
	03/26/96	<50	NA	NA		<0.50	<0.50	<0.50	<0.50
	06/05/96	NS	NS	NS		NS	NS	NS	NS
	09/16/96	170	NA	NA	<5.0	10	2.9	4.4	15
	12/02/96	NS	NS	NS	NS	NS	NS	NS	NS
	03/10/97	84	NA	NA	<5.0	2.3	<0.50	1.4	2.6
	06/12/97	NS	NS	NS	NS	NS	NS	NS	NS
	09/29/97	740	NA	NA	<5.0	61	9.8	42	61
12/01/97	NS	NS	NS	NS	NS	NS	NS	NS	
03/19/98	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50	
05/28/98	NS	NS	NS	NS	NS	NS	NS	NS	
08/31/98	320	NA	NA	3.4	6.7	1.0	10	9.3	
12/08/98	NS	NS	NS	NS	NS	NS	NS	NS	

NOTES: < = Below indicated detection limit.  
NS = Not sampled.  
NA = Not analyzed.  
1 = Product is not typical gasoline.  
2 = Well abandoned.

**TABLE 2**  
**GROUND WATER ANALYTICAL RESULTS**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(All results in micrograms per Liter)**

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics				
		Gasoline	Diesel	Motor Oil	MTBE <sup>1</sup>	Benzene	Toluene	Ethyl-benzene	Total Xylenes
MW-4	05/18/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/01/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/08/95	NS	NS	NS		NS	NS	NS	NS
	06/14/95	NS	NS	NS		NS	NS	NS	NS
	09/26/95	NS	NS	NS		NS	NS	NS	NS
	12/27/95	NS	NS	NS		NS	NS	NS	NS
	03/26/96	NS	NS	NS		NS	NS	NS	NS
	06/05/96	NS	NS	NS		NS	NS	NS	NS
	09/16/96	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50
	12/02/96	NS	NS	NS	NS	NS	NS	NS	NS
	03/10/97	NS	NS	NS	NS	NS	NS	NS	NS
	06/12/97	NS	NS	NS	NS	NS	NS	NS	NS
	09/29/97	NS	NS	NS	NS	NS	NS	NS	NS
	12/01/97	NS	NS	NS	NS	NS	NS	NS	NS
	03/19/98	NS	NS	NS	NS	NS	NS	NS	NS
05/28/98	NS	NS	NS	NS	NS	NS	NS	NS	
08/31/98	NS	NS	NS	NS	NS	NS	NS	NS	
12/08/98	NS	NS	NS	NS	NS	NS	NS	NS	
MW-5	05/18/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/01/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/08/95	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/14/95	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/26/95	<50	NA	NA		<0.50	<0.50	<0.50	<0.50
	12/27/95	<50	NA	NA		<0.50	<0.50	<0.50	<0.50
	03/26/96	<50	NA	NA		<0.50	<0.50	<0.50	<0.50
	06/05/96	<50	NA	NA	15	<0.50	<0.50	<0.50	<0.50
	09/16/96	<50	NA	NA	20	<0.50	<0.50	<0.50	<0.50
	12/02/96	<50	NA	NA	12	<0.50	<0.50	<0.50	<0.50
	03/10/97	<50	NA	NA	7.0	<0.50	<0.50	<0.50	<0.50
	06/12/97	<50	NA	NA	7.2	<0.50	<0.50	<0.50	<0.50
	09/29/97	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50
	12/01/97	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50
	03/19/98	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50
05/28/98	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50	
08/31/98	<50	NA	NA	<0.50	<0.50	<0.50	<0.50	<0.50	
12/08/98	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50	

NOTES: < = Below indicated detection limit.  
NS = Not sampled.  
NA = Not analyzed.  
1 = Product is not typical gasoline.  
2 = Well abandoned.

**TABLE 2**  
**GROUND WATER ANALYTICAL RESULTS**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(All results in micrograms per Liter)**

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics				
		Gasoline	Diesel	Motor Oil	MTBE <sup>1</sup>	Benzene	Toluene	Ethylbenzene	Total Xylenes
MW-6	05/18/93	170	NA	NA		<0.5	<0.5	<0.5	<0.5
	08/11/93	78	NA	NA		<0.5	<0.5	<0.5	<0.5
	11/05/93	170	NA	NA		<0.5	<0.5	<0.5	0.65
	03/01/94	210	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/02/94	190	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/09/94	140	NA	NA		<0.5	<0.5	<0.5	<0.5
	12/20/94	210	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/08/95	180*	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/14/95	220*	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/26/95	110*	NA	NA		<0.50	<0.50	<0.50	<0.50
	12/27/95	130*	NA	NA		<0.50	<0.50	<0.50	<0.50
	03/26/96	100*	NA	NA		<0.50	<0.50	<0.50	<0.50
	06/05/96	100*	NA	NA	430	<0.50	<0.50	<0.50	<0.50
	09/16/96	170	NA	NA	430	<0.50	<0.50	<0.50	<0.50
	12/02/96	160	NA	NA	160	<0.50	<0.50	<0.50	<0.50
	03/10/97	140	NA	NA	390	<0.50	<0.50	<0.50	<0.50
	06/12/97	<50	NA	NA	330	<0.50	<0.50	<0.50	<0.50
	09/29/97	<50	NA	NA	130	<0.50	<0.50	<0.50	<0.50
	12/01/97	<50	NA	NA	200	<0.50	<0.50	<0.50	<0.50
	03/19/98	<50	NA	NA	240	<0.50	<0.50	<0.50	<0.50
05/28/98	<50	NA	NA	290	<0.50	<0.50	<0.50	<0.50	
08/31/98	<50	NA	NA	290	<0.50	<0.50	<0.50	<0.50	
12/08/98	<50	NA	NA	230	<0.50	<0.50	<0.50	<0.50	
MW-7	05/18/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/01/94	60	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/08/95	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/14/95	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/26/95	<50	NA	NA		<0.50	<0.50	<0.50	<0.50
	12/27/95	<50	NA	NA		<0.50	<0.50	<0.50	<0.50
	03/26/96	<50	NA	NA		<0.50	<0.50	<0.50	<0.50
	06/05/96	<50	NA	NA	20	<0.50	<0.50	<0.50	<0.50
	09/16/96	<50	NA	NA	26	<0.50	<0.50	<0.50	<0.50
	12/02/96	140	NA	NA	140	<0.50	<0.50	<0.50	<0.50
	03/10/97	<50	NA	NA	29	<0.50	<0.50	<0.50	<0.50
	06/12/97	<50	NA	NA	28	<0.50	<0.50	<0.50	<0.50
	09/29/97	<50	NA	NA	27	<0.50	<0.50	<0.50	<0.50
	12/01/97	<50	NA	NA	29	<0.50	<0.50	<0.50	<0.50
	03/19/98	<50	NA	NA	6.0	<0.50	<0.50	<0.50	<0.50
05/28/98	<50	NA	NA	25	<0.50	<0.50	<0.50	<0.50	
08/31/98	<50	NA	NA	20	<0.50	<0.50	<0.50	<0.50	
12/08/98 <sup>2</sup>									

NOTES: < = Below indicated detection limit.  
 NS = Not sampled.  
 NA = Not analyzed.  
 1 = Product is not typical gasoline.  
 2 = Well abandoned.

**TABLE 2**  
**GROUND WATER ANALYTICAL RESULTS**  
**BEACON STATION #574**  
**22315 REDWOOD ROAD, CASTRO VALLEY, CALIFORNIA**  
**(All results in micrograms per Liter)**

Monitoring Well	Date Collected	Total Petroleum Hydrocarbons			Aromatic Volatile Organics				
		Gasoline	Diesel	Motor Oil	MTBE <sup>1</sup>	Benzene	Toluene	Ethyl-benzene	Total Xylenes
MW-8	05/18/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	08/11/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	11/05/93	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/01/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	06/02/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	09/09/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	12/20/94	<50	NA	NA		<0.5	<0.5	<0.5	<0.5
	03/08/95	NS	NS	NS		NS	NS	NS	NS
	06/14/95	NS	NS	NS		NS	NS	NS	NS
	09/26/95	NS	NS	NS		NS	NS	NS	NS
	12/27/95	NS	NS	NS		NS	NS	NS	NS
	03/26/96	NS	NS	NS		NS	NS	NS	NS
	06/05/96	NS	NS	NS		NS	NS	NS	NS
	09/16/96	<50	NA	NA	<5.0	<0.50	<0.50	<0.50	<0.50
	12/02/96	NS	NS	NS	NS	NS	NS	NS	NS
	03/10/97	NS	NS	NS	NS	NS	NS	NS	NS
	06/12/97	NS	NS	NS	NS	NS	NS	NS	NS
	09/29/97	NS	NS	NS	NS	NS	NS	NS	NS
	12/01/97	NS	NS	NS	NS	NS	NS	NS	NS
	03/19/98	NS	NS	NS	NS	NS	NS	NS	NS
05/28/98	NS	NS	NS	NS	NS	NS	NS	NS	
08/31/98	NS	NS	NS	NS	NS	NS	NS	NS	
12/08/98 <sup>2</sup>									

NOTES  
 < = Below indicated detection limit.  
 NS = Not sampled.  
 NA = Not analyzed.  
 1 = Product is not typical gasoline.  
 2 = Well abandoned.

**APPENDIX A**  
**SOIL BORING LOGS**  
**(SSB ENVIRONMENTAL CONSULTANTS, INC.)**

PROJECT NAME / LOCATION Former Beacon Station #574 22315 Redwood Road Castro Valley, CA	PROJECT NUMBER: 40-90-818	BORING NUMBER: MW-1	SHEET 1 OF 2
	CONTRACTOR: West Hazmat Drilling		DRILLING METHOD: H.S.A.
	DRILLER: Gene Reinhart		DRILLING RIG: Acker
	START: 8:15/03-26-91		COMPLETED: 9:30/03-26-91

LAND OWNER: Paul Wilson	SURFACE ELEVATION: 156.55	LOGGED BY: Hal Hansen
-------------------------	---------------------------	-----------------------

S T A Y M P L E	S N A U M P L E	B C L O U M B O U N T S	S I A N M T P L E (ft)	S R A E M C P O L V E (in)	DEPTH SCALE 1"= 4'	DESCRIPTIONS OF MATERIALS AND CONDITIONS	CONTAMINANT OBSERVATION	GENERAL OBSERVATION NOTES
							INSTRUMENT: hNu UNITS: ppm	
CA	MW-1-1	15/30/50 for 5"	5.0-6.5	18"	1 2 3 4 5 6 7	ASPHALT AND ROADBASE  GRAVELLY SAND; olive, fine to coarse-grained, common plastic fines, moist (SP)	0	
CA	MW-1-2	24/37/20	10.0-11.5	18"	8 9 10 11 12 13 14	SANDY CLAY; olive, moderately plastic, fine to coarse sand, some gravel, moist (CL)	0	
CA	MW-1-3	50 for 6"	15.0-16.5	7"	15 16 17 18 19	CLAYEY SAND; olive-brown, fine to coarse sand, moist (SC)	60	
CA	MW-1-4	30/50 for 5"	20.0-21.5	8"	20 21 22 23	SAND; olive-brown, fine-grained, saturated (SP)	180	

WATER LEVEL DATA				GEOLOGIST	
DATE	03-26			<i>Hal Hansen</i> SIGNATURE Hal Hansen TYPED NAME	
TIME	6:29				
GWL	22.43				
CASING DEPTH	30'				

PROJECT NAME / LOCATION Former Beacon Station #574 22315 Redwood Road Castro Valley, CA	PROJECT NUMBER: 40-90-818	BORING NUMBER: MW-1	SHEET 2 OF 2
	CONTRACTOR: West Hazmat Drilling		DRILLING METHOD: H.S.A.
	DRILLER: Gene Reinhart		DRILLING RIG: Acker
	START: 8:15/03-26-91		COMPLETED: 9:30/03-26-91

LAND OWNER: Paul Wilson	SURFACE ELEVATION: 156.55	LOGGED BY: Hal Hansen
-------------------------	---------------------------	-----------------------

S A M P L E	T Y P E	S A U M P L E R	N U M B E R	B C L O U B W N T S	S I A N T P L E(ft)	S R A E M C P O L V E(in)	DEPTH SCALE 1"= 4'	DESCRIPTIONS OF MATERIALS AND CONDITIONS	CONTAMINANT OBSERVATION	GENERAL OBSERVATION NOTES
									INSTRUMENT: hNu UNITS: ppm	
CA	MW	1-5	8/23/25		25.0-26.5	8"	25 26 27 28 29	SILTY SAND; olive-brown, fine grained sand, saturated (SM)	8	
CA	MW	1-6	12/14/50 for 5"		30.0-31.5	7"	30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47	Total Depth 31.5 feet	3	

WATER LEVEL DATA				GEOLOGIST	
DATE	03-26			<i>Hal Hansen</i> SIGNATURE Hal Hansen TYPED NAME	
TIME	6:29				
GWL	22.43				
CASING DEPTH	30'				



PROJECT NAME / LOCATION

Former Beacon Station #574  
22315 Redwood Road  
Castro Valley, CA

PROJECT NUMBER: 40-90-818

BORING NUMBER: MW-2

SHEET 1 OF 2

CONTRACTOR:  
West Hazmat Drilling

DRILLING METHOD: H.S.A.

DRILLER:  
Gene Reinhart

DRILLING RIG: Acker

START: 10:30/03-26-91

COMPLETED: 11:45/03-26-91

LAND OWNER: Paul Wilson

SURFACE ELEVATION: 155.17

LOGGED BY: Hal Hansen

T S P E R	S A U M P P E R	N O M B E R	B O R E H O L E D I A M E T E R	C O U N T S	S I A N T P L E (ft)	S R A E M C P O L V E (in)	DEPTH SCALE 1"= 4'	DESCRIPTIONS OF MATERIALS AND CONDITIONS	CONTAMINANT OBSERVATION	GENERAL OBSERVATION NOTES
									INSTRUMENT: hNu UNITS: ppm	
								ASPHALT AND ROADBASE		
CA	MW-2-1		20/30/50 for 5"		5.0-6.5	7"	1-5	GRAVELLY SAND; olive, fine to coarse-grained, common plastic fines, moist (SP)	15	
CA	MW-2-2		10/50 for 6"		10.0-11.5	12"	6-10	SANDY CLAY; olive, moderately plastic, fine to coarse sand some gravel, moist (CL)	30	
CA	MW-2-3		30/50 for 5"		15.0-16.5	7"	11-15		90	
CA	MW-2-4		7/14/15		20.0-21.5	15"	16-20		90	
							21-23	SAND; olive-brown, fine-grained, saturated (SP)		

WATER LEVEL DATA

GEOLOGIST

DATE 03-26

TIME 6:22

GWL 20.91

CASING DEPTH 30'

*Hal Hansen*

SIGNATURE

Hal Hansen

TYPED NAME

PROJECT NAME / LOCATION Former Beacon Station #574 22315 Redwood Road Castro Valley, CA	PROJECT NUMBER: 40-90-818	BORING NUMBER: MW-2	SHEET 2 OF 2
	CONTRACTOR: West Hazmat Drilling		DRILLING METHOD: H.S.A.
	DRILLER: Gene Reinhart		DRILLING RIG: Acker
	START: 10:30/03-26-91		COMPLETED: 11:45/03-26-91

LAND OWNER: Paul Wilson	SURFACE ELEVATION: 155.17	LOGGED BY: Hal Hansen
-------------------------	---------------------------	-----------------------

S T A Y M P L E	S N A U M P L E	B C L O U N T S	S I A N P L E (ft)	S R A E M C P O L V E (in)	DEPTH SCALE 1"= 4'	DESCRIPTIONS OF MATERIALS AND CONDITIONS	CONTAMINANT OBSERVATION	GENERAL OBSERVATION NOTES
							INSTRUMENT: hNu UNITS: ppm	
CA	MW-2-5	15/16/18	25.0-26.5	16"	25 26 27 28 29	SILTY SAND; olive-brown, fine-grained sand, saturated (SM)	3	
CA	MW-2-6	14/22/43	30.0-31.5	14"	30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47	Total Depth 31.5 feet	0	

WATER LEVEL DATA				GEOLOGIST	
DATE	03-26			<i>Hal Hansen</i>	
TIME	6:22				
GWL	20.91			SIGNATURE	
CASING DEPTH	30'			Hal Hansen	
				TYPED NAME	

PROJECT NAME / LOCATION Former Beacon Station #574 22315 Redwood Road Castro Valley, CA	PROJECT NUMBER: 40-90-818	BORING NUMBER: MW-3	SHEET 1 OF 2
	CONTRACTOR: West Hazmat Drilling		DRILLING METHOD: H.S.A.
	DRILLER: Gene Reinhart		DRILLING RIG: Acker
	START: 1:40/03-26-91		COMPLETED: 3:00/03-26-91

LAND OWNER: Paul Wilson	SURFACE ELEVATION: 157.13	LOGGED BY: Hal Hansen
-------------------------	---------------------------	-----------------------

S A M P L E	T Y P E	S A M P L E R	N U M B E R	B O U N D A R Y	S I M P L E (ft)	S R A E C P O L V E (in)	DEPTH SCALE 1"= 4'	DESCRIPTIONS OF MATERIALS AND CONDITIONS	CONTAMINANT OBSERVATION	GENERAL OBSERVATION NOTES
									INSTRUMENT: hNu UNITS: ppm	
							1	ASPHALT AND ROADBASE		
CA	MW	3-1	15/26/37		5.0-6.5	18"	2	SAND; brown, fine-grained, well sorted moist (SP)	0	
CA	MW	3-2	16/18/32		10.0-11.5	7"	8	CLAY; dark gray, lightly plastic, moist (CL)	0	
CA	MW	3-3	23/50 for 5"		15.0-16.5	8"	13	SANDY CLAY; olive-brown, moderately plastic, moist (CL)	1	
CA	MW	3-4	50 for 6"		20.0-21.5	7"	20	SILTY CLAY; olive, moderately plastic, very moist (CL)	8	

WATER LEVEL DATA				GEOLOGIST	
DATE	03-26			<i>Hal Hansen</i> SIGNATURE Hal Hansen TYPED NAME	
TIME	6:14				
GWL	21.62				
CASING DEPTH	30'				

PROJECT NAME / LOCATION Former Beacon Station #574 22315 Redwood Road Castro Valley, CA	PROJECT NUMBER: 40-90-818	BORING NUMBER: MW-3	SHEET 2 OF 2
	CONTRACTOR: West Hazmat Drilling		DRILLING METHOD: H.S.A.
	DRILLER: Gene Reinhart		DRILLING RIG: Acker
	START: 1:40/03-26-91		COMPLETED: 3:00/03-26-91

LAND OWNER: Paul Wilson	SURFACE ELEVATION: 157.13	LOGGED BY: Hal Hansen
-------------------------	---------------------------	-----------------------

S A M P L E	T Y P E	S M P L E R	N U M B E R	B C L O U M N T S	S I A N M P L E (ft)	S R A E M C P O L V E (in)	D E P T H S C A L E 1"= 4'	D E S C R I P T I O N S O F M A T E R I A L S A N D C O N D I T I O N S	CONTAMINANT OBSERVATION	G E N E R A L O B S E R V A T I O N N O T E S
									INSTRUMENT: hNu UNITS: ppm	
CA	MW-3-5	13/50 for 6"	25.0-26.5	8"	25	CLAYEY SAND; olive-brown, medium-grained sand, saturated (SC)	60			
CA	MW-3-6	14/50 for 6"	30.0-31.5	8"	30	Total Depth 31.5 feet	0			
					31					
					32					
					33					
					34					
					35					
					36					
					37					
					38					
					39					
					40					
					41					
					42					
					43					
					44					
					45					
					46					
					47					

WATER LEVEL DATA				GEOLOGIST	
DATE	03-26			<i>Hal Hansen</i>	
TIME	6:14				
GWL	21.62			SIGNATURE	
CASING DEPTH	30'			Hal Hansen	
				TYPED NAME	

Log of Soil Boring MW-4

Casing Elevation: 151.96 ft

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 B-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Completion Depth: 28 feet

Drilling	Date	Time
Start	05-13-93	11:40
Finish	05-13-93	12:00

Depth (feet)	Sample Int.	Logged by: Hal E. Hansen	OVM/OVA <small>HNu PID with</small> 10.2 eV Probe			Water Depth 17.55 ft		Sample #	Field OVM/OVA Reading (ppm)
		Checked by:	Graphic Log	Boring/Well Detail	Blows/6 in	Inches Driven	Inches Resov'd		
DESCRIPTION									
0									
1		SILTY CLAY, olive brown, moderately plastic, moist (CL)							
2			CL						
3									
4		GRAVELLY SAND, brown, fine- to coarse-grained, moist (SW)				8			
5					9				
6					10	18	18		MW4-1
7									
8									
9									
10			SW		50				MW4-2
11					6	6	3		
12									
13									
14					10				
15		SILTY CLAY, brown, moderately plastic, very moist (CL)			15				
16					20	18	18		MW4-3
17			CL						
18									
19		SILTY SAND, brown, fine-grained, saturated (SM)			27				
20					37				
21			SM		40	18	18		MW4-4
22									
23									
24		SAND, greenish gray, fine-grained saturated (SP)			8				
25			SP		12				MW4-5
					14	18	6		

**Acton • Mickelson • van Dam, Inc.**  
 Consulting Scientists, Engineers, and Geologists

**Log of Soil Boring MW-4**

Casing Elevation: 151.96 ft

Completion Depth: 28 feet

Project No.

19021.01

Location:

Farmer Beacon #574  
 22315 Redwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 B-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Drilling	Date	Time
Start	05-13-93	11:40
Finish	05-13-93	12:00

Logged by: Hal E. Hansen  
 Checked by:  
**DESCRIPTION**

OVM/OVA hNu PID with 10.2 eV Probe Water Depth 17.55 ft

Depth (feet)	Sample Int.	Graphic Log	Boring/Well Detail	Blows/6 in	Inches Driven	Inches Recover'd	Comments	Sample #	Field OVM/OVA Reading (ppm)
25		SP		8			continued from above SAND, greenish gray, fine-grained, saturated (SP)	MW4-5	0
26	12								
27	14			18	6				
28							Terminated drilling at 28 feet.		
29									
30									
31									
32									
33									
34									
35									
36									
37									
38									
39									
40									
41									
42									
43									
44									
45									
46									
47									
48									
49									
50									

Log of Soil Boring MW-5

Casing Elevation: 148.68 ft

Completion Depth: 25 feet

Project No.  
19021.01

Location:  
Former Beacon #574  
22315 Redwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 B-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Drilling	Date	Time
Start	05-13-93	1:30
Finish	05-13-93	2:10

Logged by: Hal E. Hansen  
 Checked by:

CVM/OVA Hz PID with 10.2 uV Probe Water Depth 15.72 ft

Depth (feet)	Sample Int.	DESCRIPTION	Graphic Log	Boring/Well Detail	Blows/6 In	Inches Driven	Inches Retov'd	Comments	Sample #	Field CVM/OVA Reading (ppm)
0		asphalt								
1		CLAYEY SAND, brown, fine- to coarse-grained, moist (SC)								
2										
3			SC							
4										
5					11					
6		SILTY SAND, brown, fine-grained, moist (SM)			13				MW5-1	0
7					18	18	15			
8										
9			SM							
10					11					
11		GRAVELLY SAND, brown, fine- to coarse-grained, common plastic fines, saturated (SW)			12				MW5-2	0
12					20	18	16			
13										
14			SW		14					
15					22					
16					50				MW5-3	0
17					3	15	15			
18		SILTY SAND, greenish gray, fine-grained, saturated (SM)								
19					6					
20					10				MW5-4	0
21			SM		14	18	18			
22										
23					6					
24					12				MW5-5	0
25		Terminated drilling at 25 feet.			14	18	5			

Log of Soil Boring MW-6

Casing Elevation: 153.96 ft

Completion Depth: 30 feet

Project No.  
19021.01

Location:  
Former Beacon #574  
22315 Redwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 8-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Drilling	Date	Time
Start	05-13-93	8:40
Finish	05-13-93	9:05

Logged by: Hal E. Hansen

OVM/OVA HNU PID with 10.2 kV Probe Water Depth 20.80 ft

Checked by:

DESCRIPTION

Graphic Log Boring/Well Detail Blows/6 In Inches Driven Inches Record'd Comments Sample # Field OVA/OVA Reading (ppm)

Depth (feet)	Sample Int.	Description	Graphic Log	Boring/Well Detail	Blows/6 In	Inches Driven	Inches Record'd	Comments	Sample #	Field OVA/OVA Reading (ppm)
0		asphalt / roadbase								
1		SILTY CLAY, dark gray, moderately plastic, slightly moist (CL)								
2										
3										
4										
5		color change to olive			5					
6					8	15	18		MW6-1	0
7					18					
8										
9		SILTY SAND, yellowish brown, fine-grained, moist (SM)								
10					9					
11					12	15	18		MW6-2	0
12					17					
13										
14		SILTY CLAY, olive, moderately plastic, very moist (CL)								
15					5					
16					10	18	18		MW6-3	0
17					21					
18										
19										
20		SANDY SILT, brown, non-plastic, fine-grained sand, saturated (ML)			7					
21					14	18	18		MW6-4	0
22					16					
23										
24					5					
25					12	18	15		MW6-5	1



Acton • Mickelson • van Dam, Inc.  
 Consulting Scientists, Engineers, and Geologists

Log of Soil Boring MW-6

Casing Elevation: 153.96 ft

Completion Depth: 30 feet

Project No.  
19021.01

Location:  
Former Beacon #574  
22315 Redwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 B-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Drilling	Date	Time
Start	05-13-93	8:40
Finish	05-13-93	9:05

Logged by: Hal E. Hansen

OVM/OVA hnu PID with 10.2 kv Probe Water Depth 20.80 ft

Checked by:

DESCRIPTION

25 continued from above  
 SANDY SILT, brown, non-plastic,  
 fine-grained sand, saturated (ML)

26

27 GRAVELLY SAND, olive, fine- to coarse-  
 grained, saturated (SW)

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

Graphic Log	Boring/Well Detail	Blows/6 In	Inches Driven	Inches Recover'd	Comments	Sample #	Field OVM/OVA Reading (ppm)
		5					
		12					
ML		19	18	15		MW6-5	1
		5					
SW		14					
		23	16	17		MW6-6	1

Acton • Mickelson • van Dam, Inc.  
 Consulting Scientists, Engineers, and Geologists

Log of Soil Boring MW-7

Casing Elevation: 156.09 ft

Completion Depth: 30 feet

Project No.  
19021.01

Location:  
Former Beacon #574  
22315 Radwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 B-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Drilling	Date	Time
Start	05-13-93	9:50
Finish	05-13-93	10:40

Logged by: Hal E. Hansen

DVM/OVA HNU PID with  
10.2 eV Probe Water Depth 22.64 ft

Checked by:

DESCRIPTION

Depth (feet) 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25

Sample Int.

asphalt  
 SILTY CLAY, dark gray, moderately plastic, slightly moist (CL)

GRAVELLY SAND, brown, fine- to coarse-grained, moist (SM)

CLAYEY SILT, brown, non-plastic, saturated (ML)

Graphic Log

Boring/Well Detail

Blows/6 in

Inches Driven

Inches Recover'd

Comments

Sample #

Field DVM/OVA Reading (ppm)

CL

SW

SW

ML

ML

19  
21  
23 18 18

17  
25  
40 18 18

25  
50  
6 12 12

7  
11  
23 18 18

8  
15  
16 18 18

MW7-1

MW7-2

MW7-3

MW7-4

MW7-5

0

0

0

0

2

Acton • Mickelson • van Dam, Inc.  
 Consulting Scientists, Engineers, and Geologists

Log of Soil Boring MW-7

Casing Elevation: 156.09 ft

Completion Depth: 30 feet

Project No.  
19021.01

Location:  
Former Beacon #574  
22315 Redwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 B-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Drilling	Date	Time
Start	05-13-93	9:50
Finish	05-13-93	10:40

Logged by: Hal E. Hansen

DVM/OVA hNu PID with  
10.2 eV Probe Water Depth 22.64 ft

Checked by:

Depth (feet)	Sample Int.	DESCRIPTION
--------------	-------------	-------------

Graphic Log	Boring/Well Detail	Blows/6 In	Inches Driven	Inches Recov'd	Comments	Sample #	Field ova/OVA Reading (ppm)
-------------	--------------------	------------	---------------	----------------	----------	----------	-----------------------------

25 continued from above  
CLAYEY SILT, brown, non-plastic saturated (ML)

[ML]	[Hatched]	8 15 16	18	18		MW7-5	2
------	-----------	---------------	----	----	--	-------	---

26  
27  
28 SILTY SAND, greenish blue, fine- to coarse-grained, saturated, common plastic fines (SM)

[SM]	[Hatched]	9 22 23	18	12		MW7-6	0
------	-----------	---------------	----	----	--	-------	---

29  
30 Terminated drilling at 30 feet.

31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50

**Acton • Mickelson • van Dam, Inc.**  
 Consulting Scientists, Engineers, and Geologists

**Log of Soil Boring MW-8**

Casing Elevation: 158.04 ft

Completion Depth: 35 feet

Project No.  
19021.01

Location:  
Former Beacon #574  
22315 Redwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling  
 Driller: Eric Forestrom  
 Drilling and Sampling Methods:  
 B-57 Mobile Drill Rig with Hollow Stem Auger  
 California modified split-spoon sampler  
 fitted with 6" brass sample sleeves

Drilling	Date	Time
Start	05-13-93	3:00
Finish	05-13-93	3:40

Depth (feet)	Sample Int.	Logged by: Hal E. Hansen	OVM/OVA			Blows/6 In	Inches Driven	Inches Reeve'd	Comments	Sample #	Field OVM/OVA Reading (ppm)
		Checked by:	MNU	PID	with Probe						
DESCRIPTION											
0		concrete									
1		SILTY CLAY, brown, moderately plastic, moist (CL)									
2			CL								
3											
4		GRAVELLY SAND, brown, fine- to coarse-grained, moist (SW)				5					
5						8	18	18		MWB-1	0
6			SW			13					
7											
8											
9		SAND, yellowish brown, fine-grained, moist (SP)				7					
10						15	18	18		MWB-2	0
11						19					
12											
13											
14											
15			SP			11					
16						17	18	18		MWB-3	0
17						20					
18											
19											
20						12					
21						50	12	12		MWB-4	0
22						6					
23		SILTY CLAY, brown, moderately plastic, saturated (CL)									
24			CL			9					
25						17	18	18		MWB-5	0
						22					

Acton • Mickelson • van Dam, Inc.  
 Consulting Scientists, Engineers, and Geologists

Log of Soil Boring MW-8

Casing Elevation: 158.04 ft

Completion Depth: 35 feet

Project No.

19021.01

Location:

Former Beacon #574

22315 Redwood Rd, Castro Valley, CA

Drilling Company: Woodward Drilling

Driller: Eric Forestrom

Drilling and Sampling Methods:

B-57 Mobile Drill Rig with Hollow Stem Auger

California modified split-spoon sampler

fitted with 6" brass sample sleeves

Drilling

Date

Time

Start

05-13-93

3:00

Finish

05-13-93

3:40

Logged by: Hal E. Hansen

OVM/OVA HNU PID with  
 10.2 eV Probe

Water Depth 21.55 ft

Checked by:

DESCRIPTION

Graphic Log

Boring/Well Detail

Blows/6 In

Inches Driven

Inches Recover'd

Comments

Sample #

Field OVM/OVA Reading (ppm)

Depth (feet) Sample Int.

25 continued from above  
 SILTY CLAY, brown, moderately plastic,  
 saturated (CL)



9  
17  
22 18 18

MWB-5  
0

27 SILTY SAND, greenish gray, fine-  
 grained, saturated (SM)



8  
13  
14 18 18

MWB-6  
0

32 SAND, greenish gray, medium-grained,  
 saturated (SP)



50  
5 5 5

MWB-7  
0

35 Terminated drilling at 35 feet.

**APPENDIX B**

**SOIL SAMPLE ANALYTICAL RESULTS  
LOCATIONS AND ANALYTICAL RESULTS (SSB)**

TABLE 1

SOIL SAMPLE ANALYTICAL RESULTS  
Former Beacon Station #574  
22315 Redwood Road, Castro Valley, California  
(concentrations in milligrams per kilogram)

Monitoring Well	Date Sampled	Depth Sampled (feet)	Benzene	Toluene	Ethylbenzene	Xylenes	TPHg <sup>a</sup>	TPHd <sup>b</sup>
MW-1	03-26-91	15	0.16	0.10	0.010	0.050	< 1.0	< 10
	03-26-91	20	13	110	33	300	3,200	< 10
MW-2	03-26-91	10	0.013	0.26	0.11	0.68	8.1	< 10
	03-26-91	15	19	120	42	240	3,200	< 10
	03-26-91	20	0.39	0.22	0.11	0.41	14,000	< 10
MW-3	03-26-91	15	< 0.005	< 0.005	< 0.005	< 0.005	< 1.0	< 10
	03-26-91	20	< 0.005	0.18	0.44	5.9	230	< 10
MW-4	05/14/93	5	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	15	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	20	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
MW-5	05/14/93	5	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	10	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	15	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	20	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
MW-6	05/14/93	5	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	10	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	15	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	20	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
MW-7	05/14/93	5	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	10	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	15	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	20	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
MW-8	05/14/93	5	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	10	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	15	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA
	05/14/93	20	< 0.0050	< 0.0050	< 0.0050	< 0.0050	< 0.50	NA

<sup>a</sup>TPHg = Total petroleum hydrocarbons as gasoline.

<sup>b</sup>TPHd = Total petroleum hydrocarbons as diesel.

**APPENDIX C**


**MONITORING WELL CONSTRUCTION DIAGRAMS  
COLLECTED FROM SOIL STOCKPILE (SSB)**



# INSTALLATION OF FLUSH GRADE MONITORING WELL

PROJECT Former Beacon Station #574  
22315 Redwood Road, Castro Valley,  
 DELTA NO. 40-90-818 CA

MONITORING WELL NO. MW-1  
 ELEVATIONS: TOP OF RISER 156.55  
 GROUND LEVEL \_\_\_\_\_

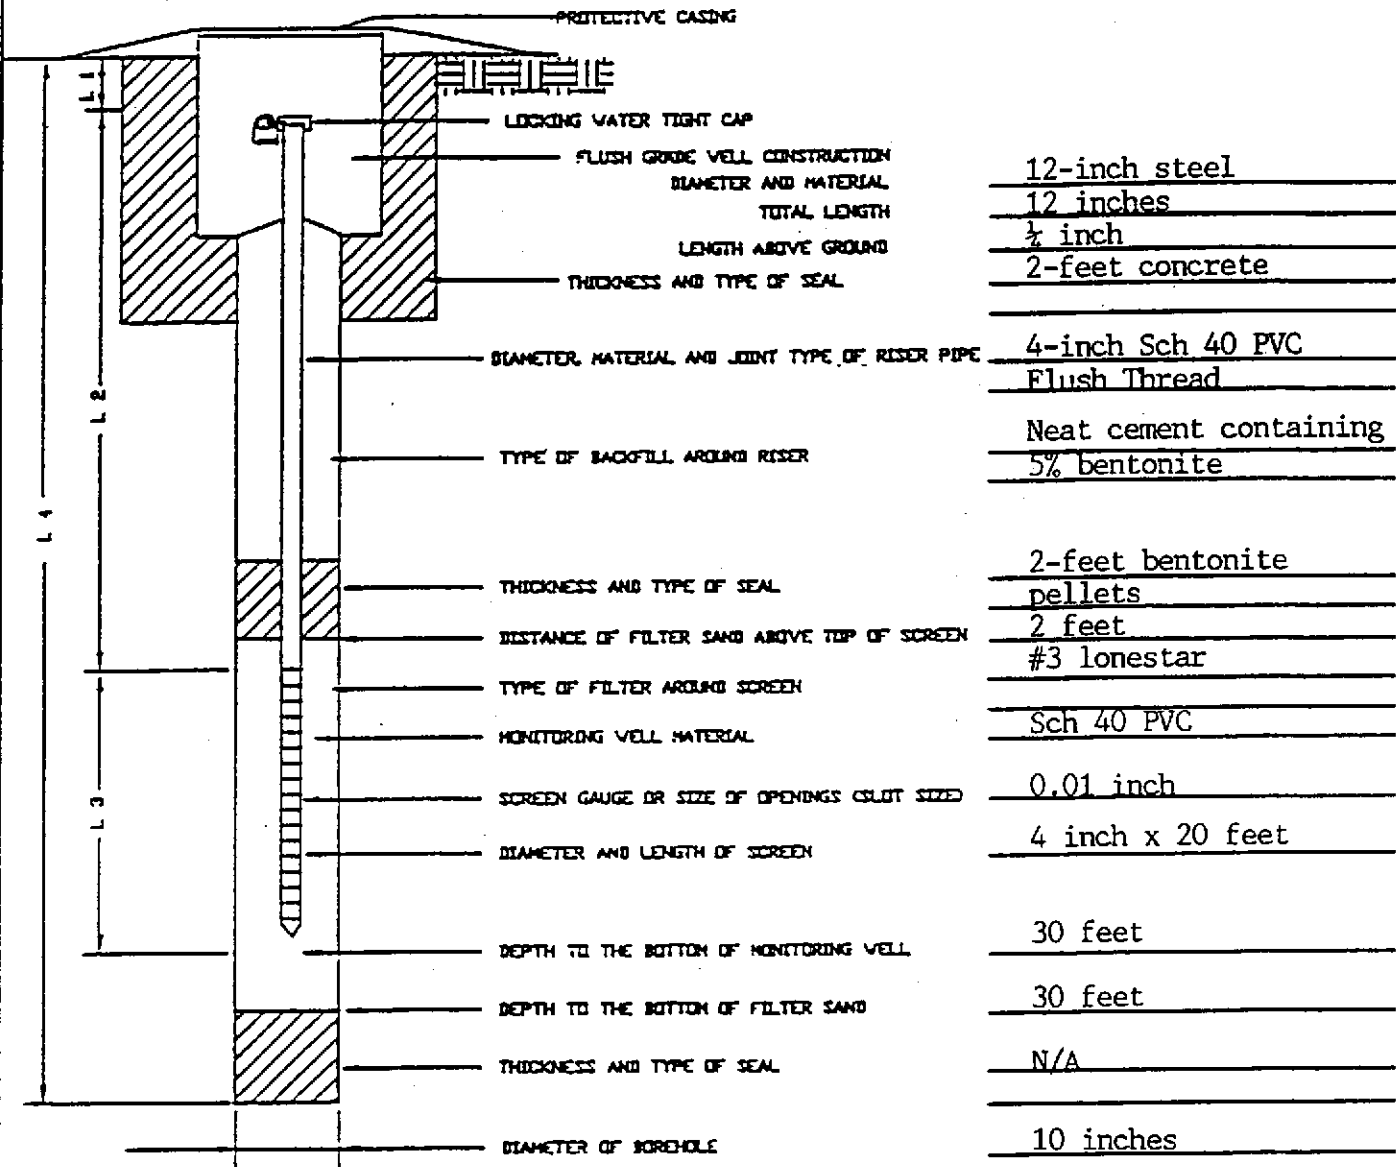

- L 1 = 0.25 FT.
- L 2 = 9.75 FT.
- L 3 = 20 FT.
- L 4 = 30 FT.

INSTALLATION COMPLETED  
 DATE: 3/26/91  
 TIME: 10:30

MONITORING WELL WATER LEVEL MEASUREMENTS		
DATE	TIME	WATER LEVEL =
3-26-91	6:29	22.43


= MEASURE POINT: Top of casing



# INSTALLATION OF FLUSH GRADE MONITORING WELL

PROJECT Former Beacon Station #574  
22315 Redwood Road, Castro Valley,  
CA  
 DELTA NO. 40-90-818

MONITORING WELL NO. MW-2  
 ELEVATIONS: TOP OF RISER 155.17  
 GROUND LEVEL \_\_\_\_\_

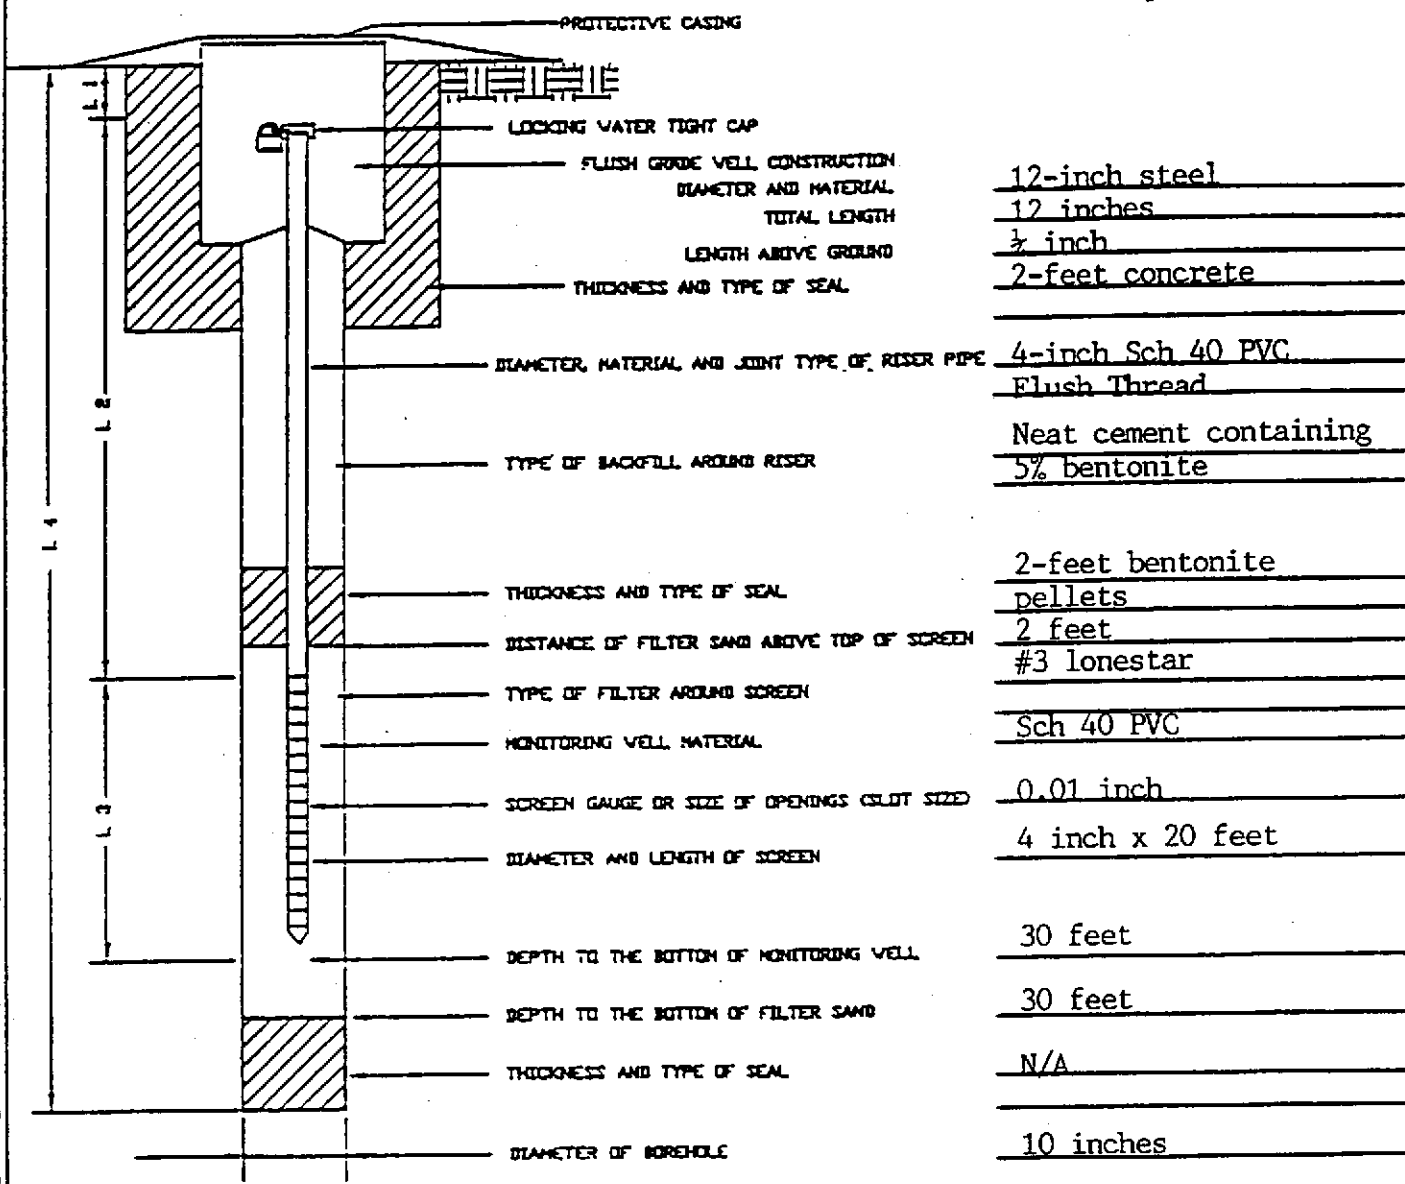

- 12-inch steel
- 12 inches
- 1/2 inch
- 2-foot concrete
- 4-inch Sch 40 PVC
- Flush Thread
- Neat cement containing
- 5% bentonite
- 2-foot bentonite
- pellets
- 2 feet
- #3 lonestar
- Sch 40 PVC
- 0.01 inch
- 4 inch x 20 feet
- 30 feet
- 30 feet
- N/A
- 10 inches

L 1 = 0.25 FT.  
 L 2 = 9.75 FT.  
 L 3 = 20 FT.  
 L 4 = 30 FT.

INSTALLATION COMPLETED  
 DATE 3/26/91  
 TIME 12:45

MONITORING WELL WATER LEVEL MEASUREMENTS		
DATE	TIME	WATER LEVEL *
3-26-91	6:22	20.91


\* MEASURE POINT: Top of casing



# INSTALLATION OF FLUSH GRADE MONITORING WELL

PROJECT Former Beacon Station #574  
22315 Redwood Road, Castro Valley,  
 DELTA NO. 40-90-818 CA

MONITORING WELL NO. MW-3  
 ELEVATIONS: TOP OF RISER 157.13  
 GROUND LEVEL \_\_\_\_\_

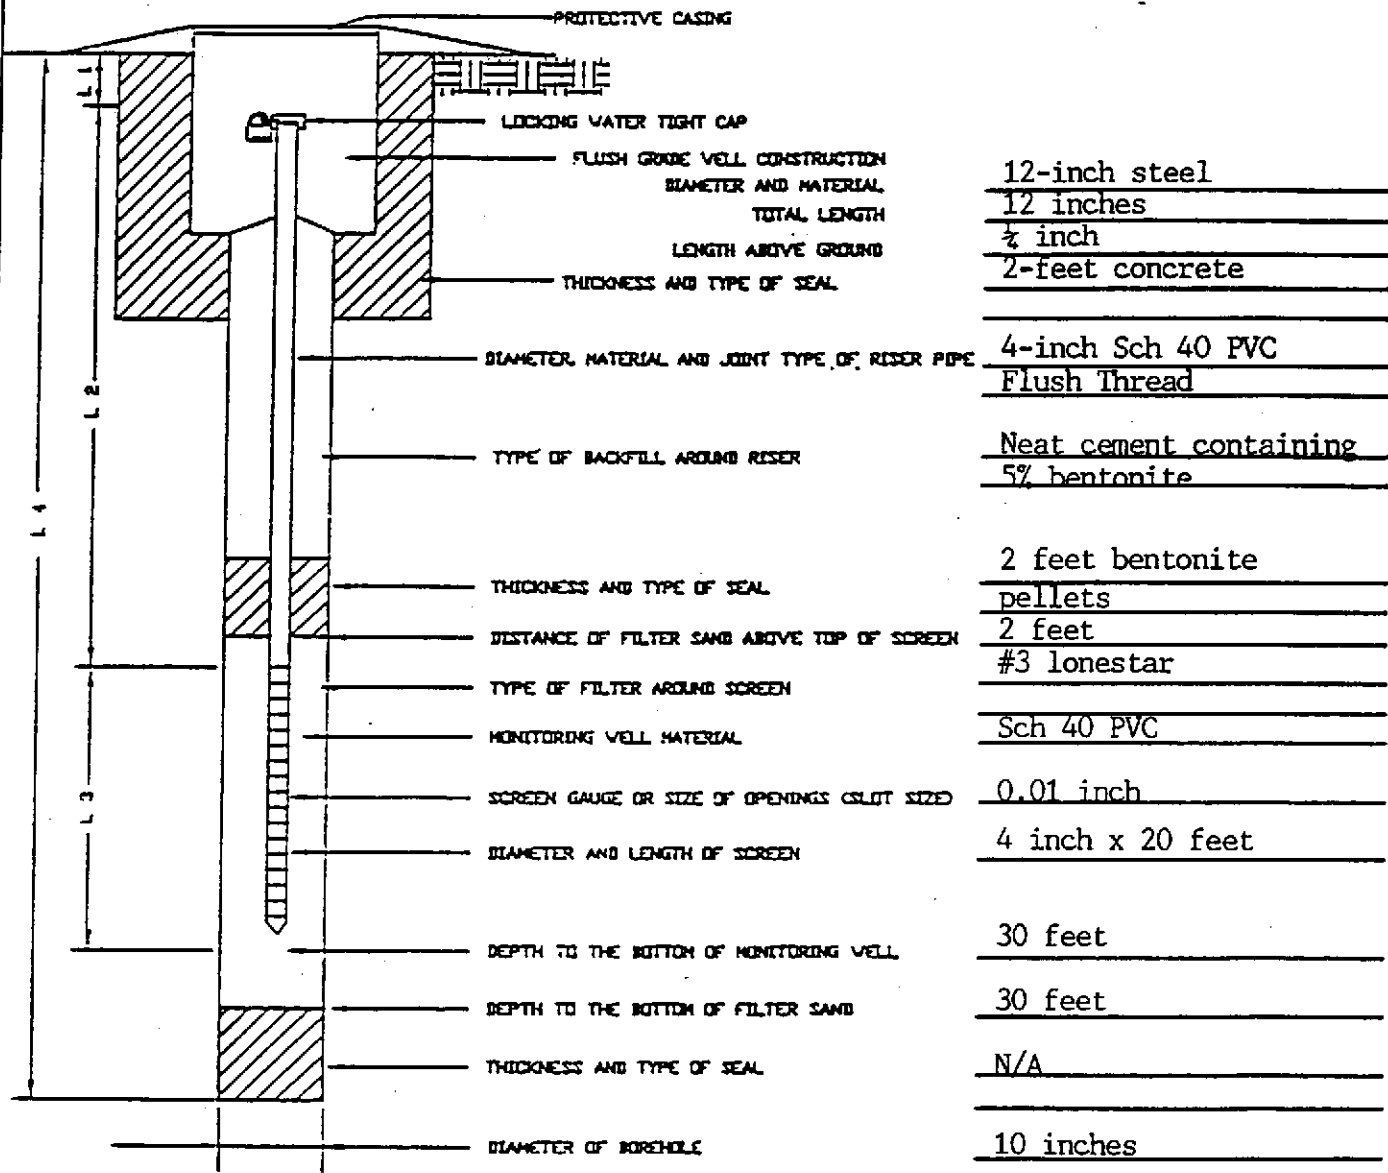

- 12-inch steel
- 12 inches
- 1/2 inch
- 2-feet concrete
- 4-inch Sch 40 PVC
- Flush Thread
- Neat cement containing
- 5% bentonite
- 2 feet bentonite
- pellets
- 2 feet
- #3 lonestar
- Sch 40 PVC
- 0.01 inch
- 4 inch x 20 feet
- 30 feet
- 30 feet
- N/A
- 10 inches

- L 1 = 0.25 FT.
- L 2 = 9.75 FT.
- L 3 = 20 FT.
- L 4 = 30 FT.

INSTALLATION COMPLETED  
 DATE: 3/26/91  
 TIME: 4:30

MONITORING WELL WATER LEVEL MEASUREMENTS		
DATE	TIME	WATER LEVEL
3-26-91	6:14	21.62


MEASURE POINT: Top of casing



# MONITORING WELL CONSTRUCTION DETAILS

**PROJECT:** Former Beacon #574  
22315 Redwood Rd  
Castro Valley, CA

**MONITORING WELL NO.:** MW-4  
**ELEVATION:** 151.96 ft

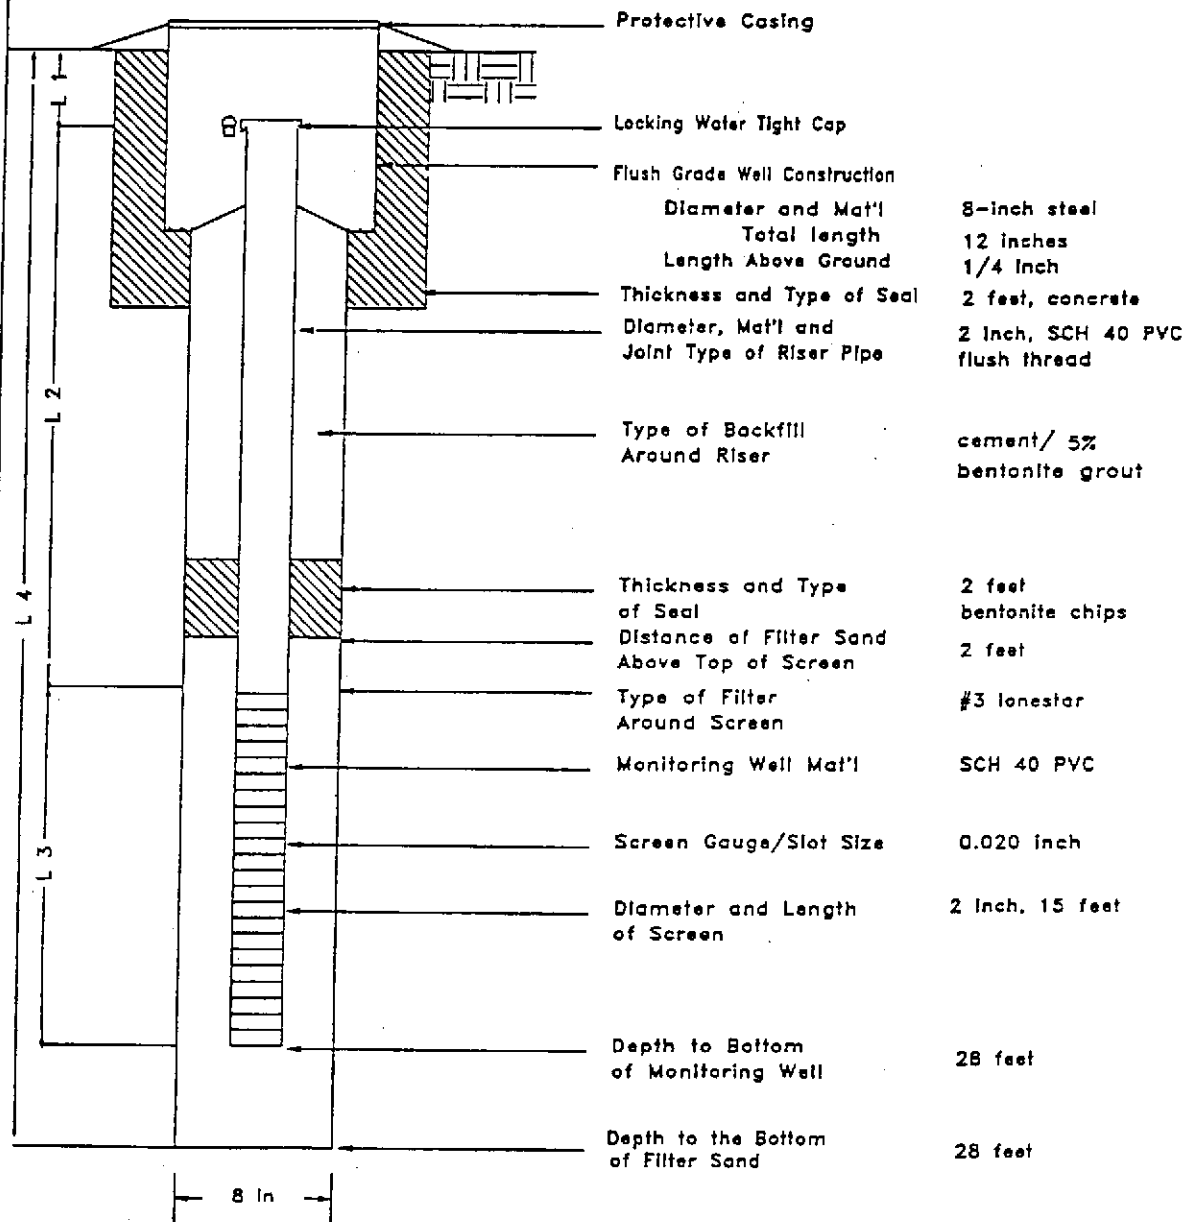

L1 = 0.25 ft  
L2 = 12.75 ft  
L3 = 15 ft  
L4 = 28 ft

### MONITORING WELL WATER LEVEL MEASUREMENTS

DATE	TIME	WATER LEVEL*
05-18-93	8:22	17.55 ft

Completion Date and Time  
05-13-93 12:25


\*Measuring Point Top of casing

ACTON • MICKELSON • VAN DAM, INC.

# MONITORING WELL CONSTRUCTION DETAILS

**PROJECT:** Former Beacon #574  
22315 Redwood Rd  
Castro Valley, CA

**MONITORING WELL NO.:** MW-5  
**ELEVATION:** 148.68 ft

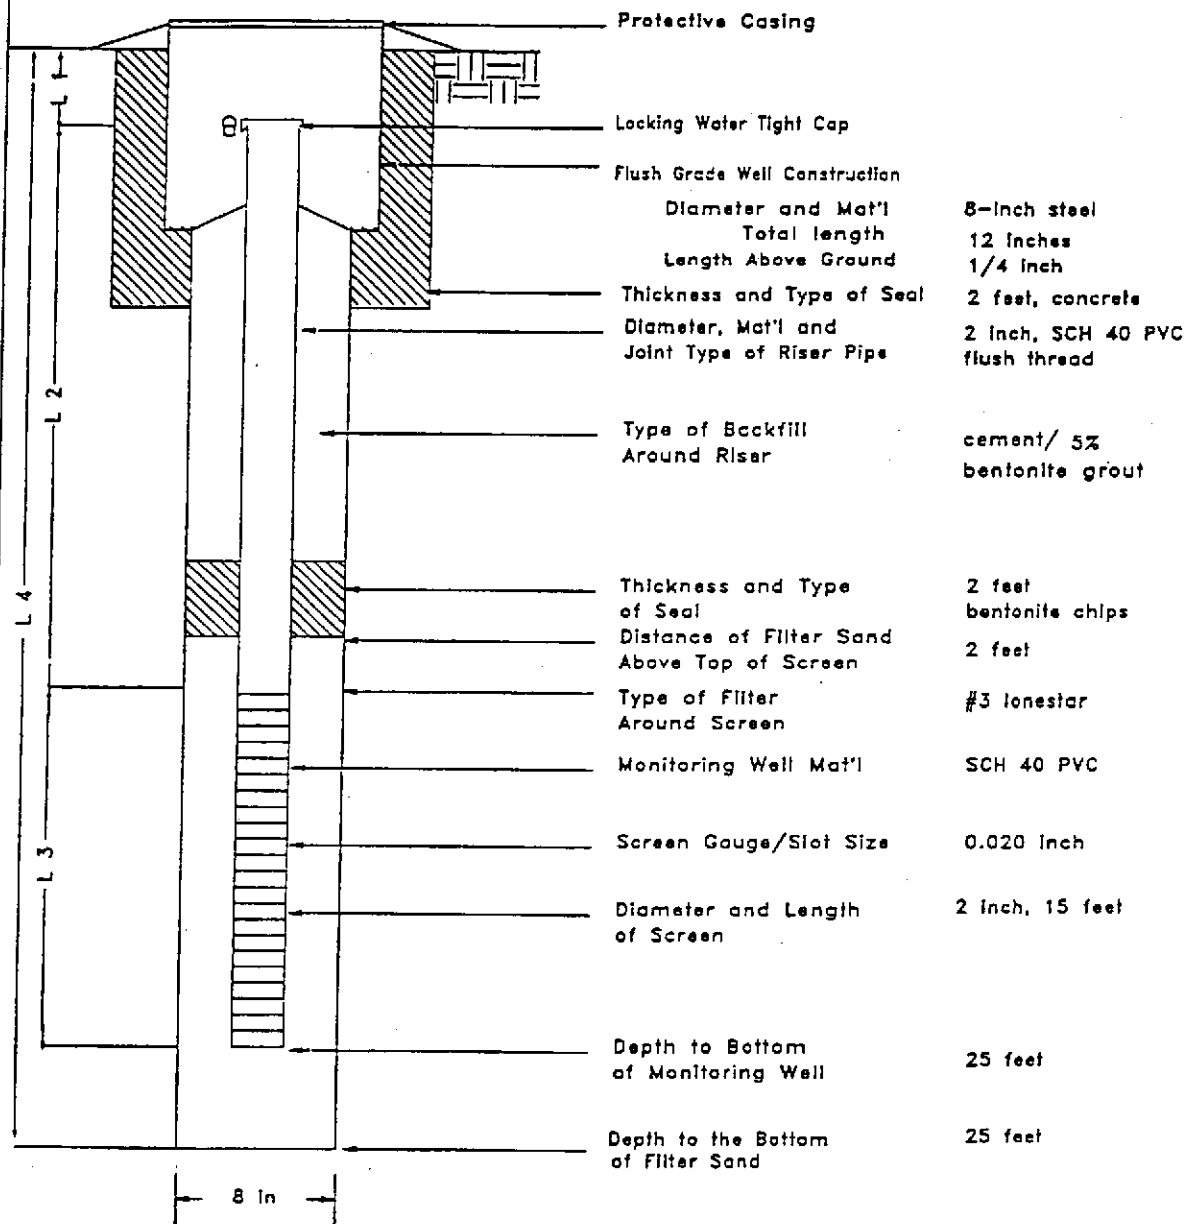

L1 = 0.25 ft  
L2 = 9.75 ft  
L3 = 15 ft  
L4 = 25 ft

### MONITORING WELL WATER LEVEL MEASUREMENTS

DATE	TIME	WATER LEVEL*
05-18-93	8:27	15.72 ft

**Completion Date and Time**  
05-13-93 2:30


\*Measuring Point Top of casing

ACTON • MICKELSON • VAN DAM, INC.

# MONITORING WELL CONSTRUCTION DETAILS

**PROJECT:** Farmer Beacon #574  
22315 Redwood Rd  
Castro Valley, CA

**MONITORING WELL NO.:** MW-5  
**ELEVATION:** 153.96 ft

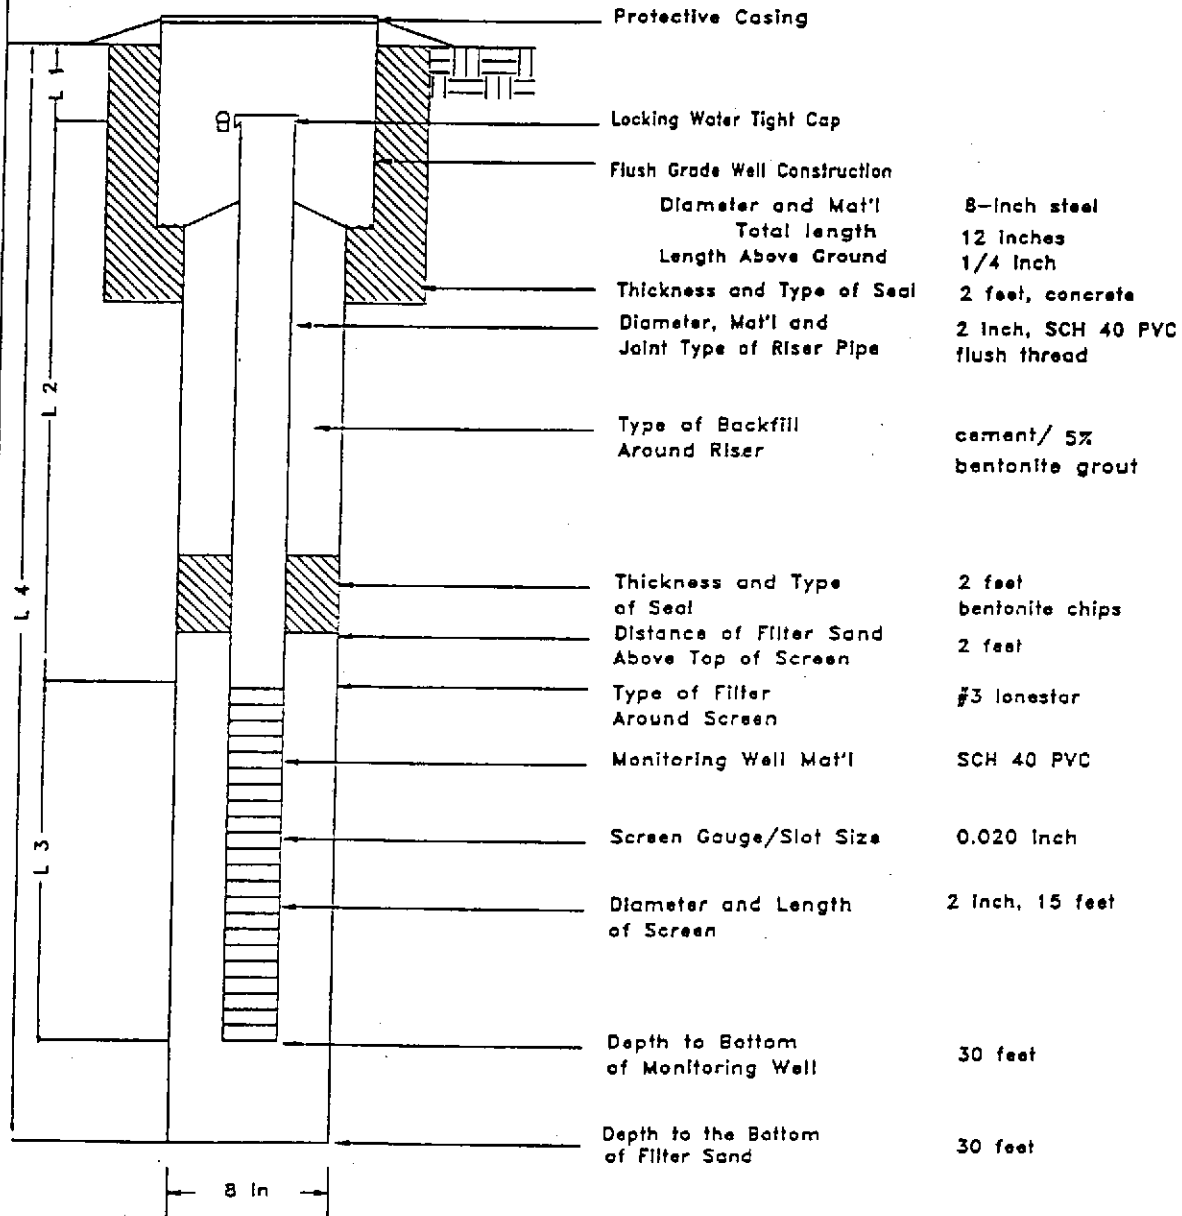

L1 = 0.25 ft  
L2 = 14.75 ft  
L3 = 15 ft  
L4 = 30 ft

Completion Date and Time  
05-13-93 9:30

Depth to Bottom of Monitoring Well 30 feet  
Depth to the Bottom of Filter Sand 30 feet

### MONITORING WELL WATER LEVEL MEASUREMENTS

DATE	TIME	WATER LEVEL*
05-18-93	8:07	20.80 ft


\*Measuring Point Top of casing

ACTON • MICKELSON • VAN DAM, INC.

# MONITORING WELL CONSTRUCTION DETAILS

PROJECT: Former Beacon #574  
22315 Redwood Rd  
Castro Valley, CA

MONITORING WELL NO.: MW-7  
ELEVATION: 156.09 ft

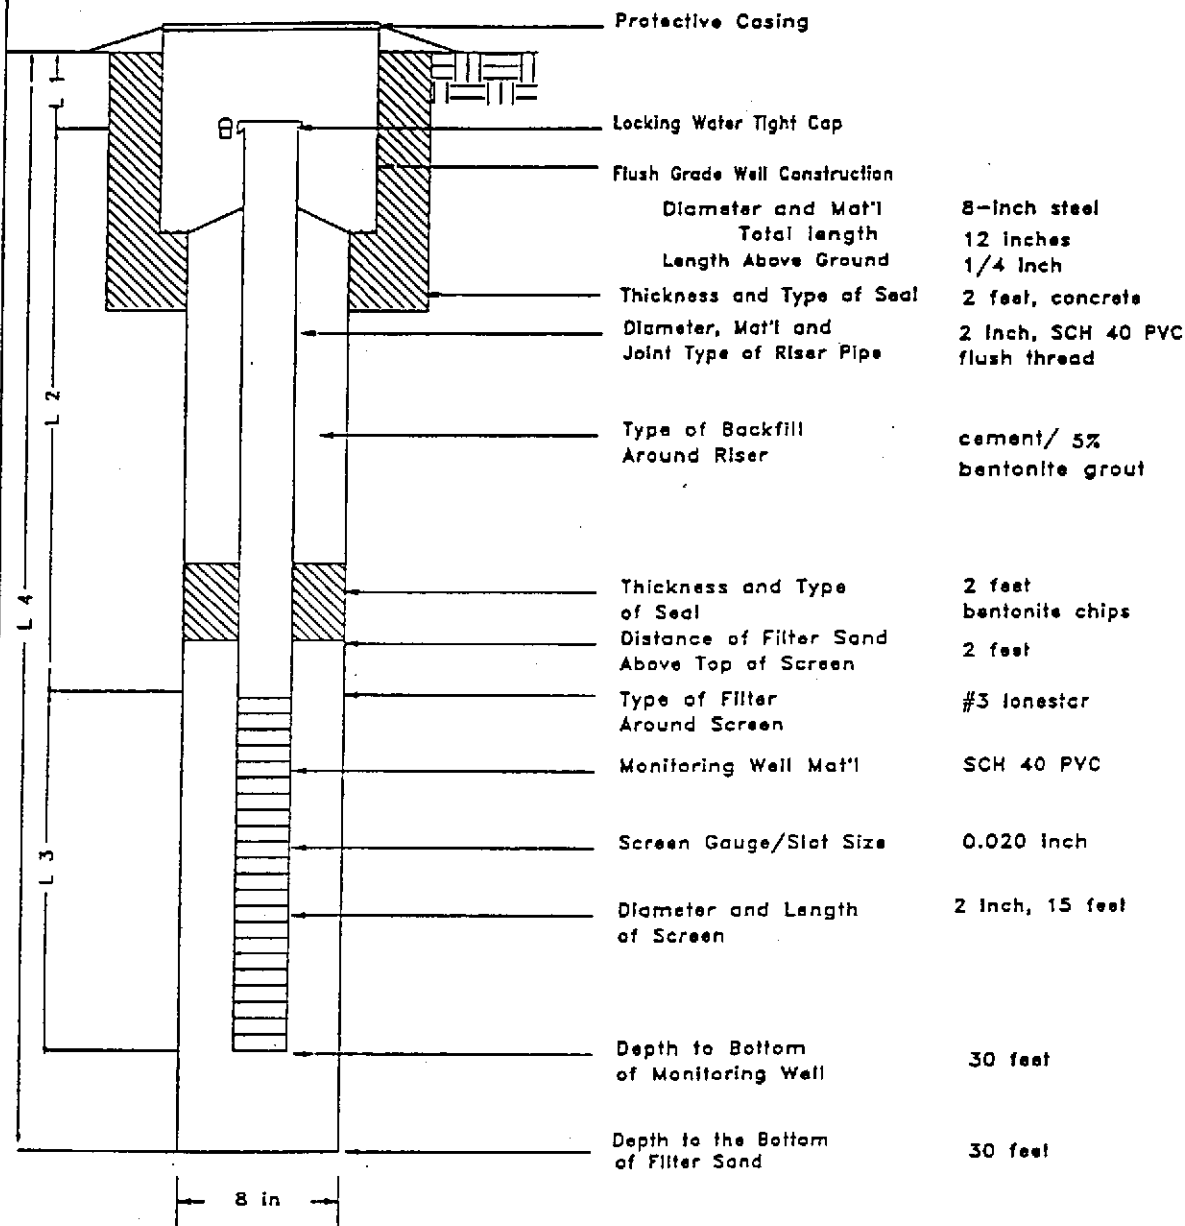

L1 = 0.25 ft  
L2 = 14.75 ft  
L3 = 15 ft  
L4 = 30 ft

- Protective Casing
- Locking Water Tight Cap
- Flush Grade Well Construction
  - Diameter and Mat'l 8-inch steel
  - Total length 12 inches
  - Length Above Ground 1/4 inch
- Thickness and Type of Seal 2 feet, concrete
- Diameter, Mat'l and Joint Type of Riser Pipe 2 Inch, SCH 40 PVC flush thread
- Type of Backfill Around Riser cement/ 5% bentonite grout
- Thickness and Type of Seal 2 feet bentonite chips
- Distance of Filter Sand Above Top of Screen 2 feet
- Type of Filter Around Screen #3 Ionestar
- Monitoring Well Mat'l SCH 40 PVC
- Screen Gauge/Slot Size 0.020 inch
- Diameter and Length of Screen 2 Inch, 15 feet
- Depth to Bottom of Monitoring Well 30 feet
- Depth to the Bottom of Filter Sand 30 feet

Completion Date and Time  
05-13-93 10:55

### MONITORING WELL WATER LEVEL MEASUREMENTS

DATE	TIME	WATER LEVEL*
05-18-93	8:13	22.64 ft


\*Measuring Point Top of casing

ACTON • MICKELSON • VAN DAM, INC.

# MONITORING WELL CONSTRUCTION DETAILS

**PROJECT:** Former Beacon #574  
22315 Redwood Rd  
Castro Valley, CA

**MONITORING WELL NO.:** MW-8  
**ELEVATION:** 158.04 ft

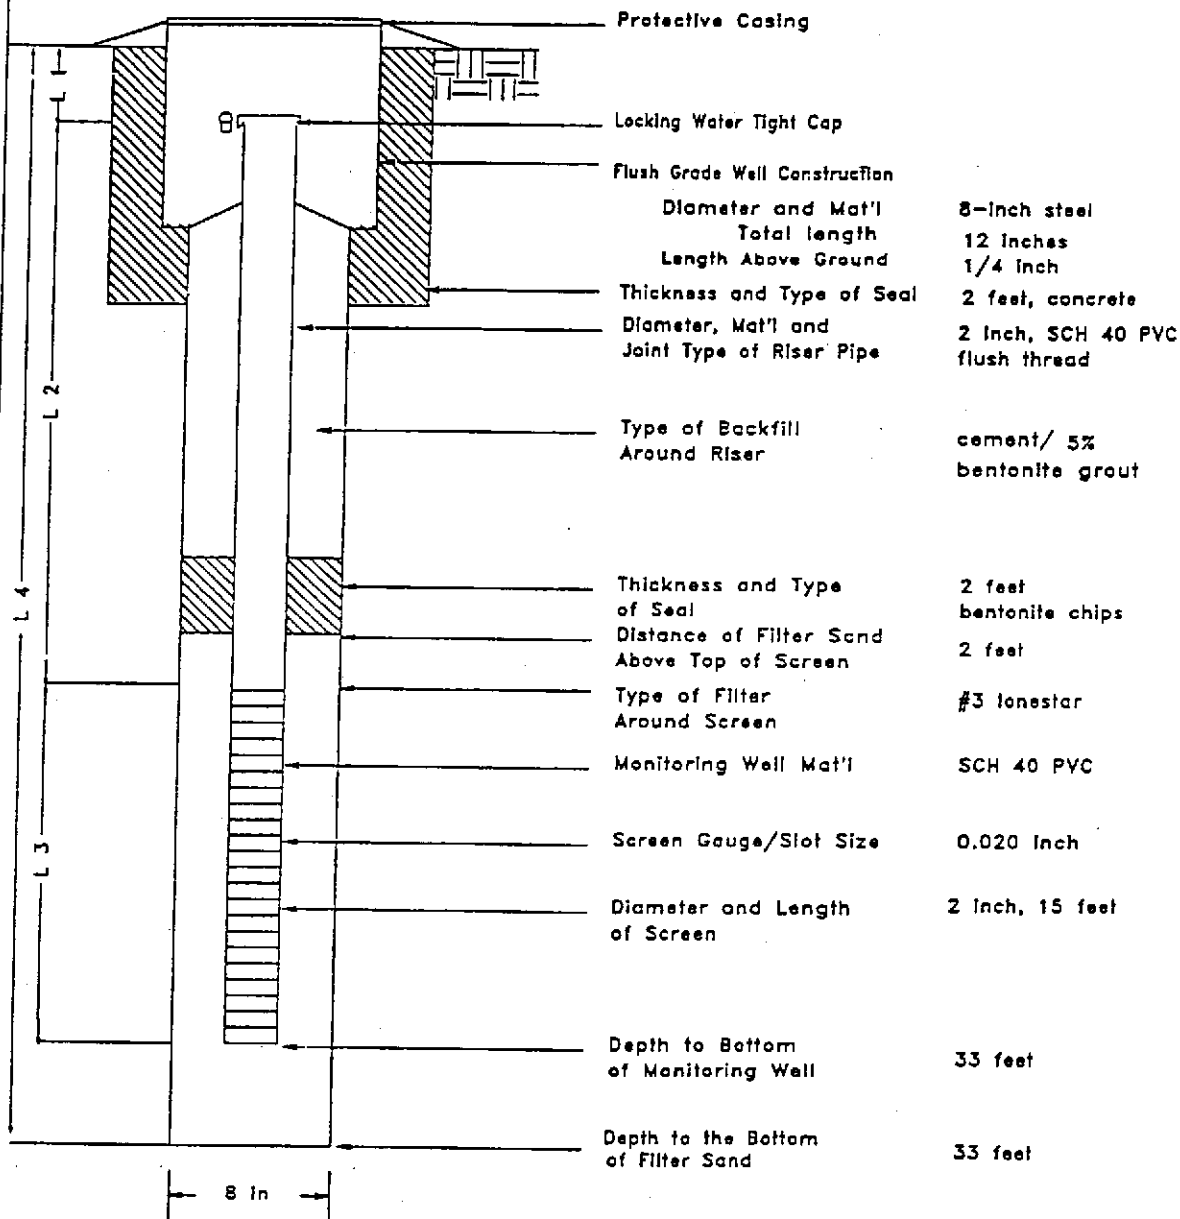

L1 = 0.25 ft  
L2 = 17.75 ft  
L3 = 15 ft  
L4 = 33 ft

Depth to the Bottom of Filter Sand 33 feet

### MONITORING WELL WATER LEVEL MEASUREMENTS

DATE	TIME	WATER LEVEL*
05-18-93	8:16	21.55 ft

Completion Date and Time  
05-13-93 5:00

\*Measuring Point Top of casing


ACTON • MICKELSON • VAN DAM, INC.





**APPENDIX D**  
**GEOLOGIC CROSS-SECTIONS**

GROVE WAY

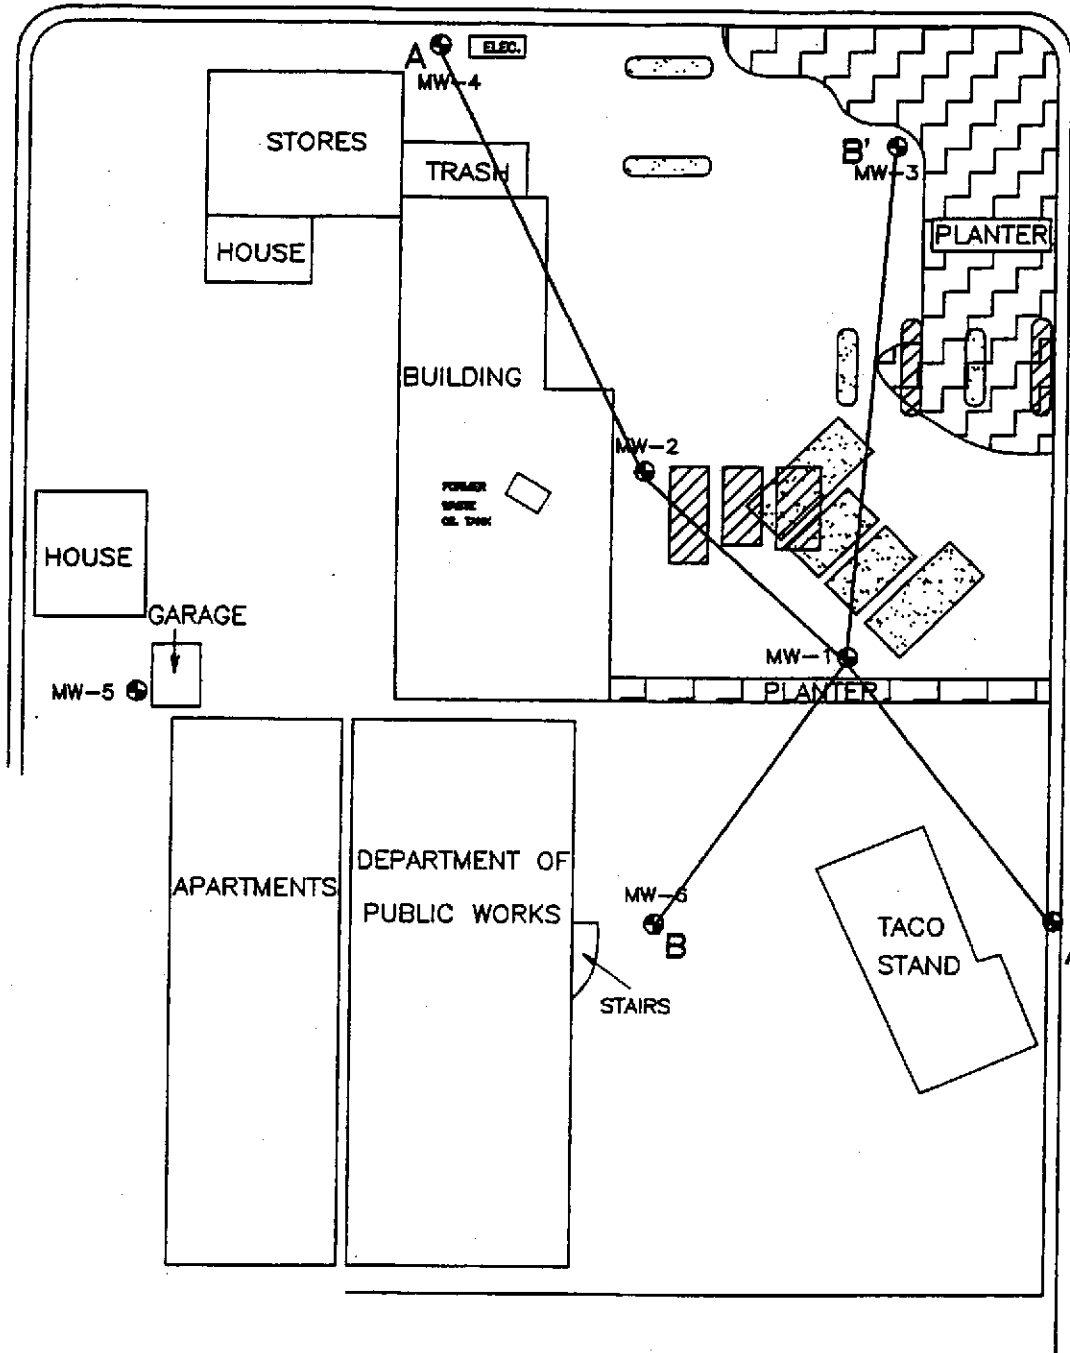MW-8




LEGEND

- MW-6  
● GROUND WATER MONITORING WELL AND NUMBER
-  FIRST LOCATION OF TANKS AND PUMP ISLANDS
-  SECOND LOCATION OF TANKS AND PUMP ISLANDS


**FIGURE 5**  
**GEOLOGIC CROSS-SECTION LOCATION MAP**  
 FORMER BEACON STATION #574  
 22315 REDWOOD ROAD  
 CASTRO VALLEY, CA

Project No. 19021.02	Drawn CCB	Acton • Mickelson • van Dam, Inc. Consulting Scientists, Engineers, and Geologists 4511 Golden Foothill Parkway, #1 El Dorado Hills, California 95762 (916) 939-7550
File No. PA05FD	Prepared DVD	
Revision	Reviewed	

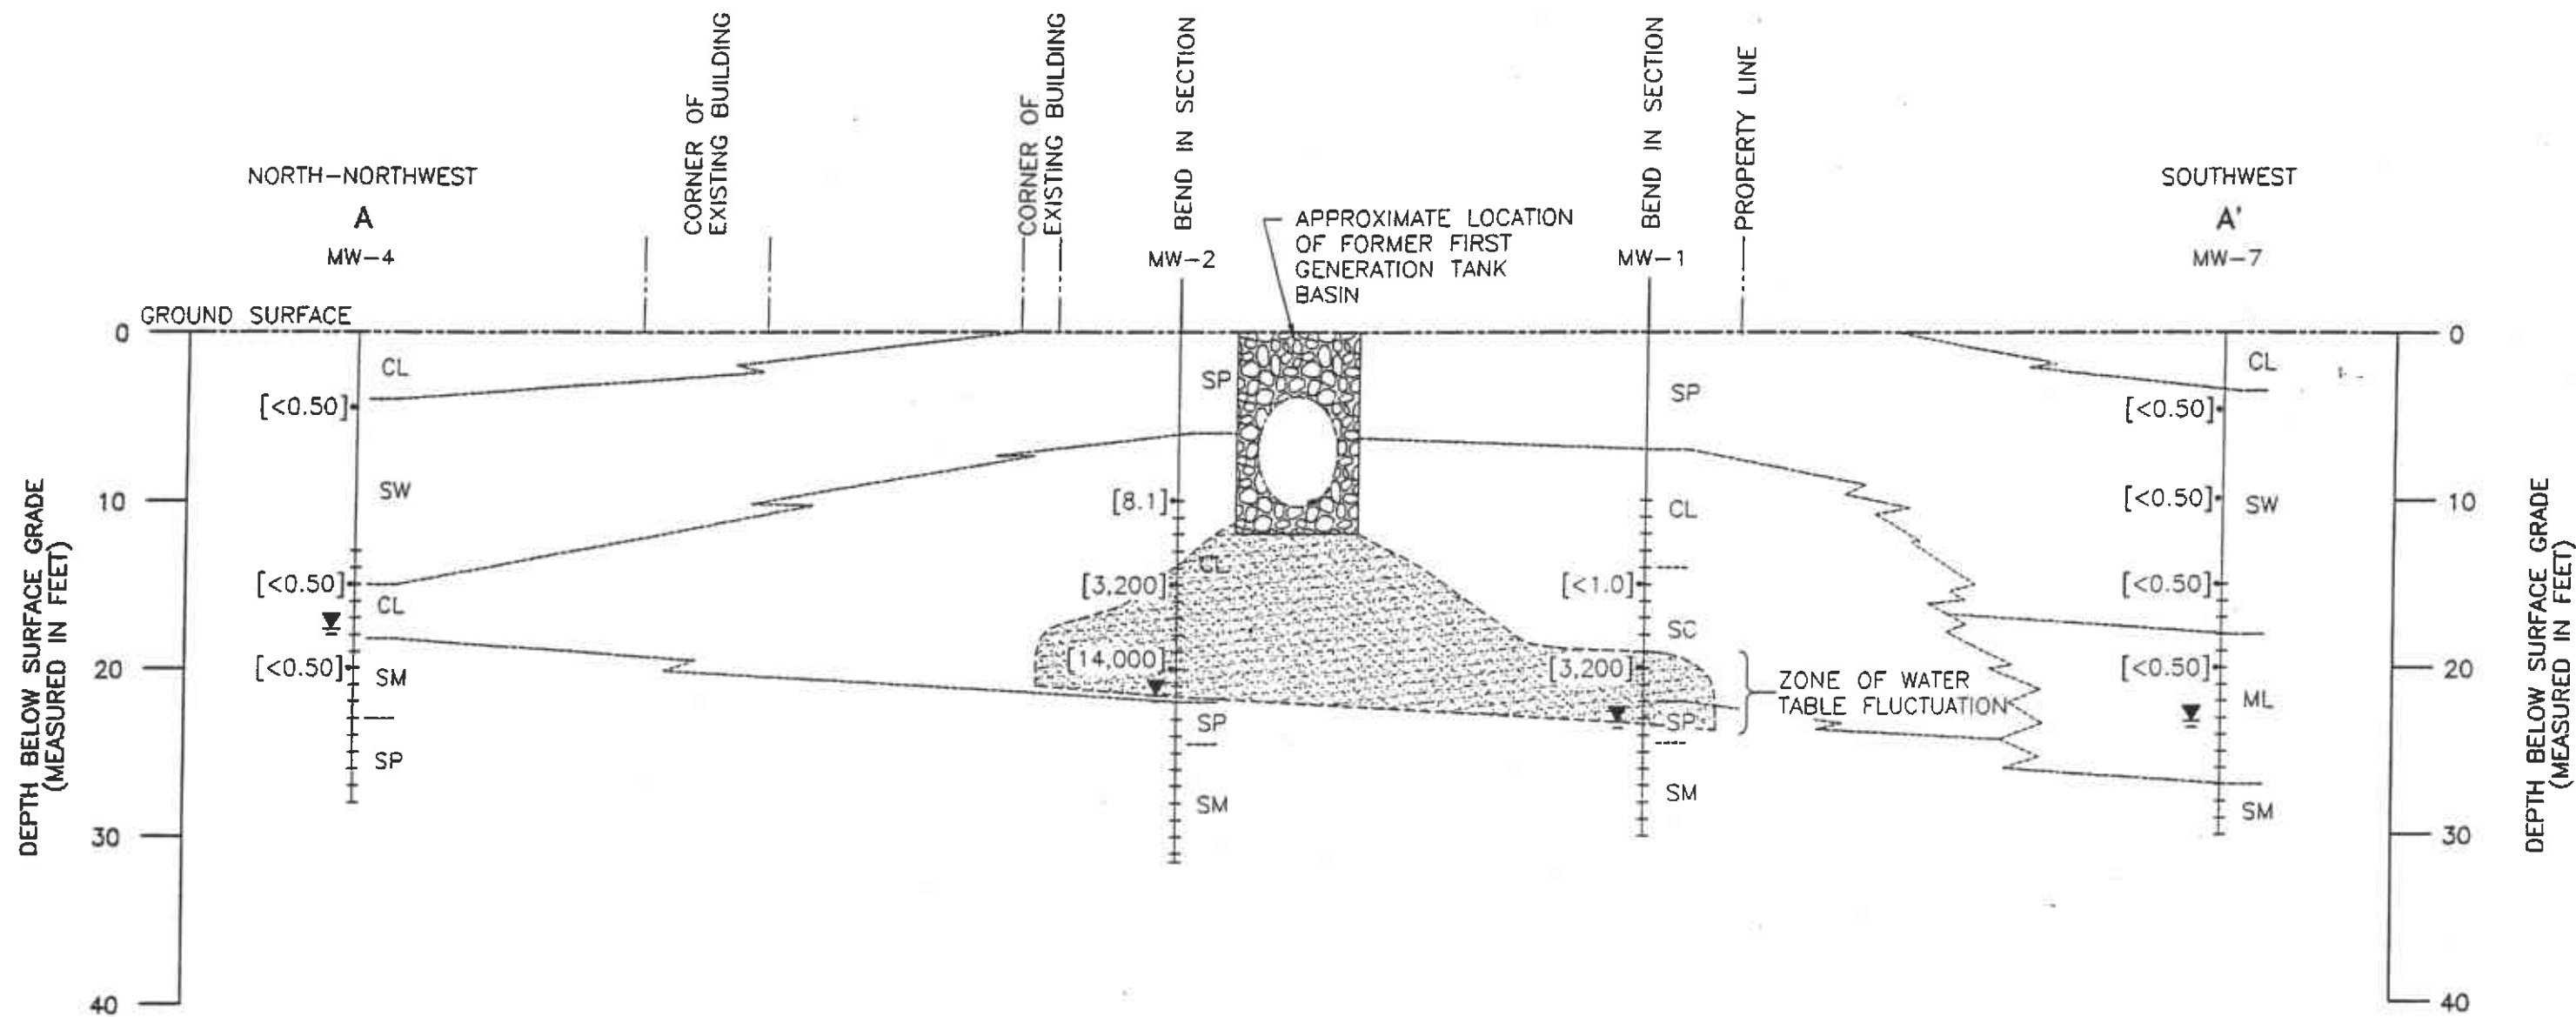

**EXPLANATION:**


- [3.200] Soil Sample Analytical Results (TPHg In Parts Per Million)
- ▼ Ground Water Elevation on June 2, 1994
- SP USCS Soil Classification Symbol
- - - - - Inferred Contact
- I Slotted Casing Interval
- ▨ Inferred Area of Soil Containing Petroleum Hydrocarbons >10 PPM



Approximate Scale  
Measured in Feet  
(Vertical Exaggeration: 2X)

**FIGURE 6**  
GEOLOGIC CROSS-SECTION A-A'  
BEACON STATION #574  
22315 REDWOOD ROAD  
CASTRO VALLEY, CALIFORNIA

Project No. 19021.03	Drawn CCG	Acton • Mickelson • van Dam, Inc. Consulting Scientists, Engineers, and Geologists 4511 Golden Foothill Parkway, #1 El Dorado Hills, California 95762 (916) 939-7550
File No. PA06XSEC	Prepared DVO	
Revision	Reviewed	

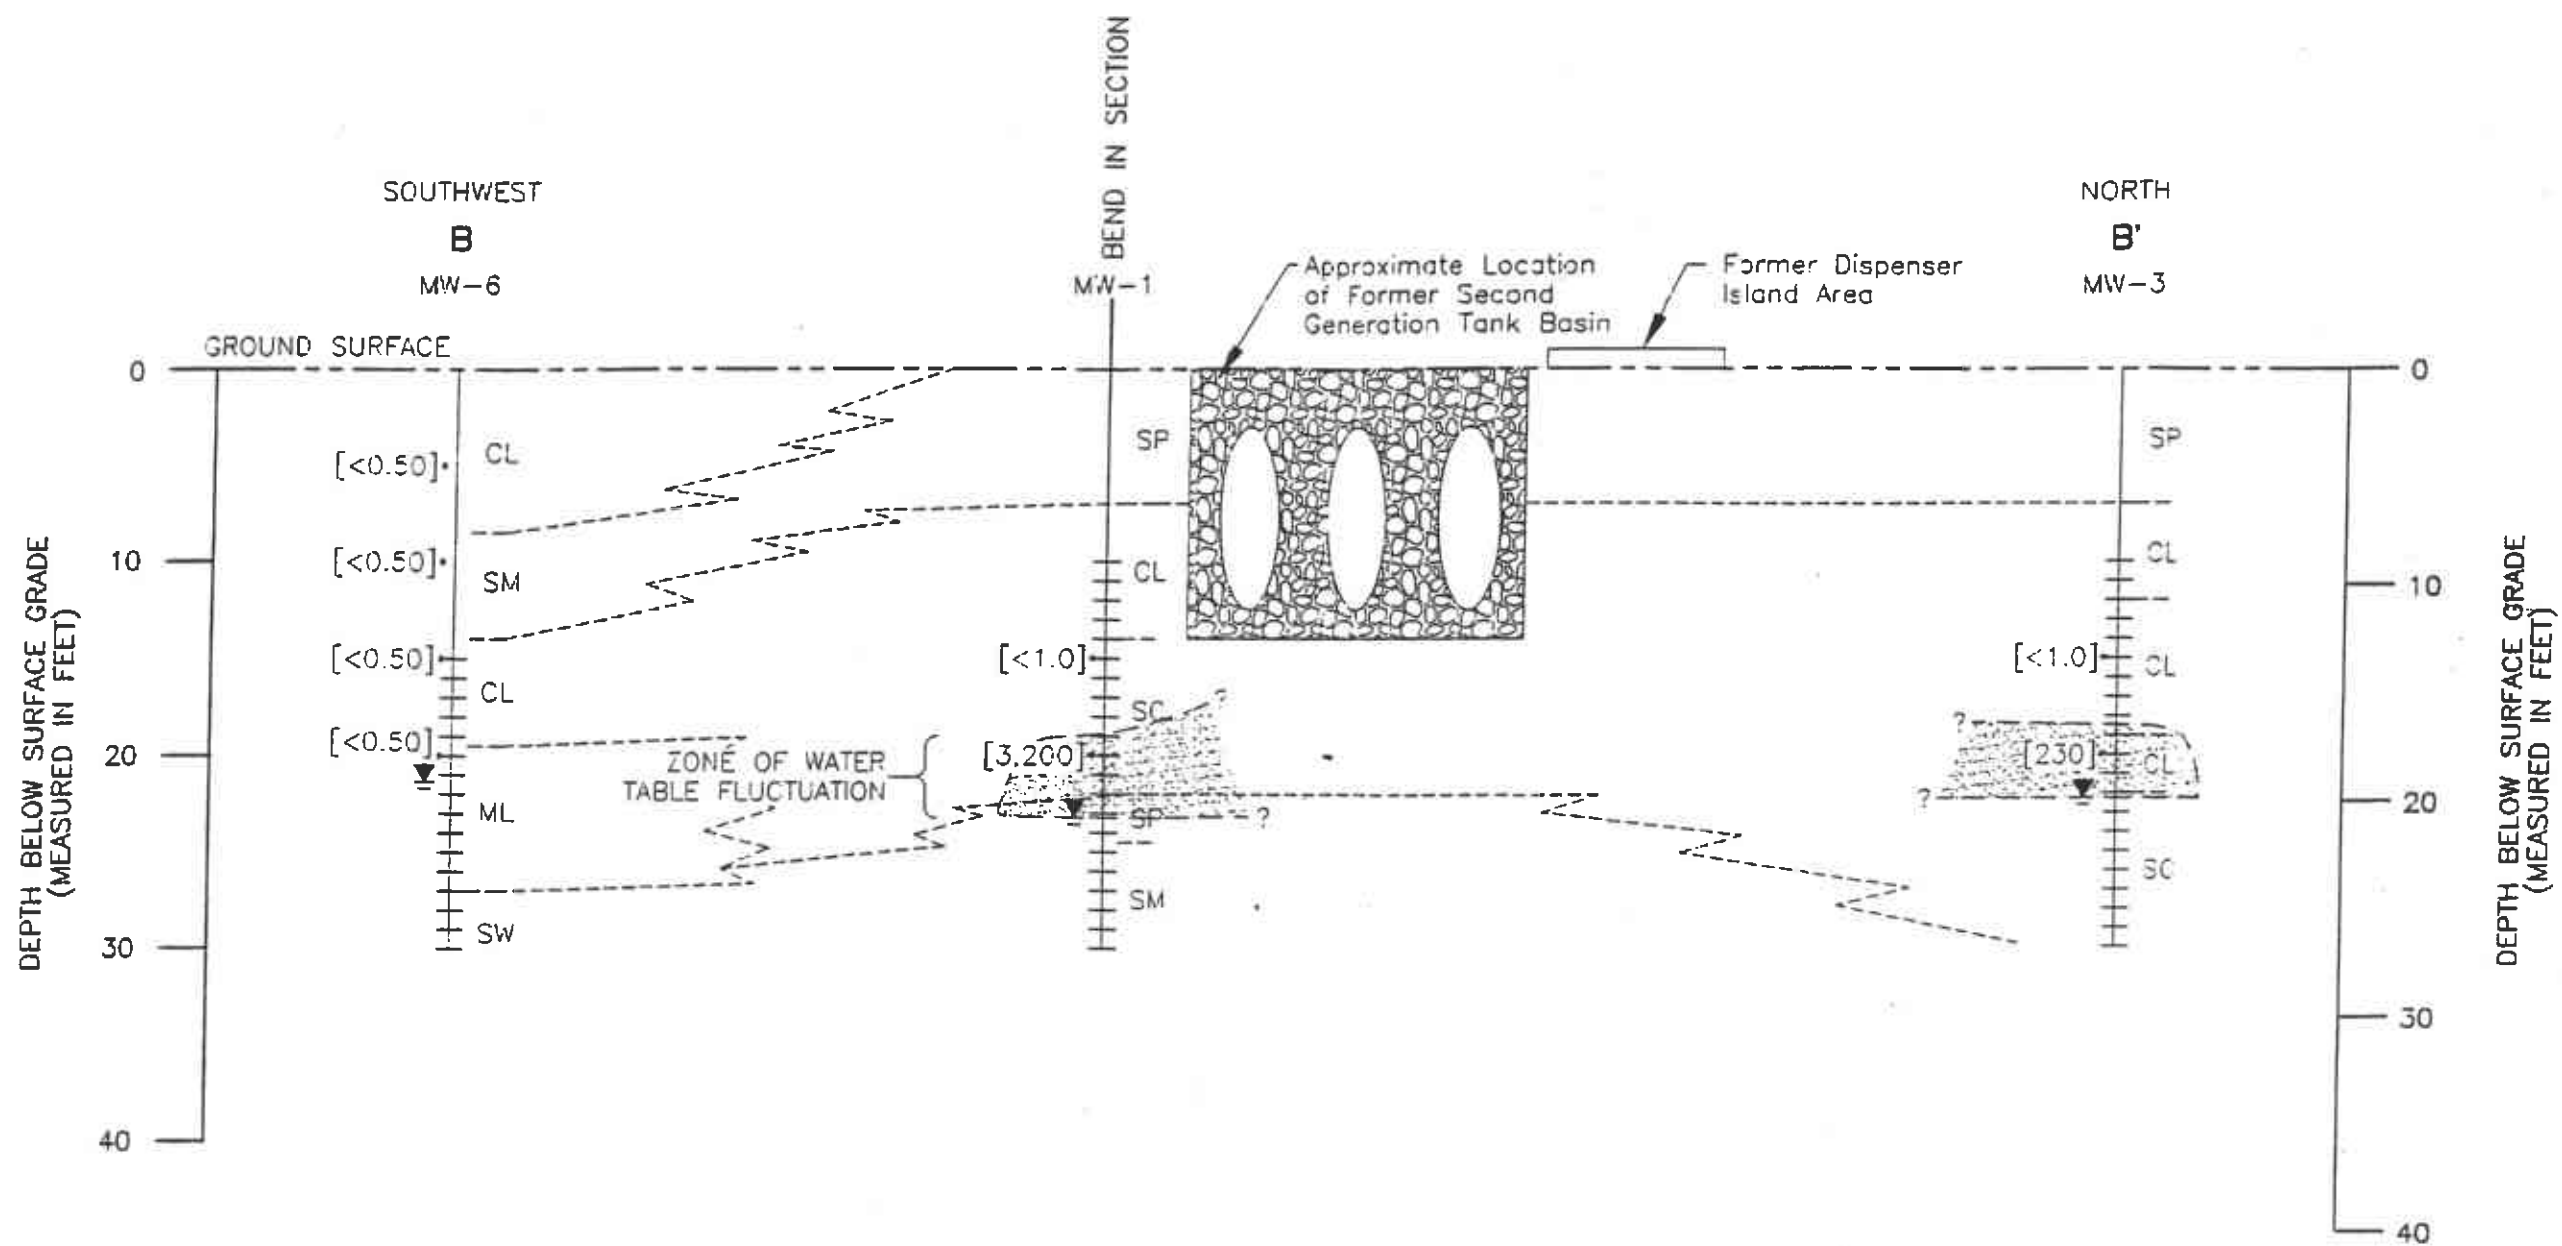

**EXPLANATION:**

- [3.200] Soil Sample Analytical Results (TPHg in Parts Per Million)
- ▼ Ground Water Elevation on June 2, 1994
- SP USCS Soil Classification Symbol
- - - - - Inferred Contact
- I Slottec Casing Interval
- Inferred Area of Soil Containing Petroleum Hydrocarbons >10 PPM

10  
0  
0 20

Approximate Scale Measured In Feet  
(Vertical Exaggeration: 2X)

FIGURE 7 GEOLOGIC CROSS SECTION B-E'		
BEACON STATION #574 22315 REDWOOD ROAD CASTRO VALLEY, CALIFORNIA		
Project No. 19021.03	Drawn CCB	Acton • Mickelson • van Dam, Inc. Consulting Scientists, Engineers, and Geologists 4511 Golden Foothill Parkway, #1 El Dorado Hills, California 95762 (916) 939-7550
File No. PA07XSEC	Prepared DVO	
Revision	Reviewed	

**APPENDIX E**

**ASTM LOOK-UP TABLES FOR SOIL AND GROUND WATER**

**Table 4**  
**Tier 1 Risk-Based Screening Level (RBSL)**  
**Look-up Table - Groundwater**

Exposure Pathway	Receptor Scenario	Target Level	Benzene	Ethylbenzene	Toluene	Xylene (Mixed)	Naphthalene	Benzo(a)pyrene
Groundwater Volatilization to Outdoor Air (mg/L)	Residential	Carcinogenic Risk = $1 \times 10^{-6}$	1.10					> S
		Chronic HQ = 1		> S	> S	> S	> S	
	Commercial	Carcinogenic Risk = $1 \times 10^{-5}$	1.84					> S
		Chronic HQ = 1		> S	> S	> S	> S	
Groundwater Ingestion (mg/L)	MCLs		$5.00 \times 10^{-3}$	$7.00 \times 10^{-1}$	1.00	$1.00 \times 10^1$	NA	$2.00 \times 10^{-4}$
	Residential	Carcinogenic Risk = $1 \times 10^{-6}$	$2.94 \times 10^{-3}$					$1.17 \times 10^{-5}$
		Chronic HQ = 1		3.65	7.30	$7.30 \times 10^1$	$1.46 \times 10^{-1}$	
	Commercial/Industrial	Carcinogenic Risk = $1 \times 10^{-5}$	$9.87 \times 10^{-2}$					$3.92 \times 10^{-4}$
		Chronic HQ = 1		$1.02 \times 10^1$	$2.04 \times 10^1$	> S	$4.09 \times 10^{-1}$	
	Groundwater - Vapor Intrusion from Groundwater to Buildings (mg/L)	Residential	Carcinogenic Risk = $1 \times 10^{-6}$	$2.38 \times 10^{-2}$				
Chronic HQ = 1				$7.75 \times 10^1$	$3.28 \times 10^1$	> S	4.74	
Commercial/Industrial		Carcinogenic Risk = $1 \times 10^{-5}$	$7.39 \times 10^{-1}$					> S
		Chronic HQ = 1		> S	$8.50 \times 10^1$	> S	$1.23 \times 10^1$	

> S = Selected risk level is not exceeded for all possible dissolved levels (< = pure component solubility)

**Table 5**  
**Tier 1 Risk-Based Screening Level (RBSL)**  
**Look-up Table - Soil**

Exposure Pathway	Receptor Scenario	Target Level	Benzene	Ethylbenzene	Toluene	Xylene (Mixed)	Naphthalene	Benzo(a)pyrene
Soil Volatilization to Outdoor Air (mg/kg)	Residential	Carcinogenic Risk = $1 \times 10^{-6}$	$2.72 \times 10^{-1}$					RES
		Chronic HQ = 1		RES	RES	RES	RES	
	Commercial/Industrial	Carcinogenic Risk = $1 \times 10^{-6}$	4.57					RES
		Chronic HQ = 1		RES	RES	RES	RES	
Soil - Vapor Intrusion from Soil to Buildings (mg/kg)	Residential	Carcinogenic Risk = $1 \times 10^{-6}$	$5.37 \times 10^{-3}$					RES
		Chronic HQ = 1		$4.27 \times 10^2$	$2.06 \times 10^1$	RES	$4.07 \times 10^1$	
	Commercial/Industrial	Carcinogenic Risk = $1 \times 10^{-6}$	$1.09 \times 10^{-1}$					RES
		Chronic HQ = 1		$1.10 \times 10^3$	$5.45 \times 10^1$	RES	$1.07 \times 10^2$	
Surficial Soil (0 to 3 feet) Ingestion/Dermal/Inhalation (mg/kg)	Residential	Carcinogenic Risk = $1 \times 10^{-6}$	5.82					$1.30 \times 10^{-1}$
		Chronic HQ = 1		$7.83 \times 10^3$	$1.33 \times 10^4$	$1.45 \times 10^5$	$9.77 \times 10^2$	
	Commercial/Industrial	Carcinogenic Risk = $1 \times 10^{-6}$	$1.00 \times 10^2$					$3.04 \times 10^{-1}$
		Chronic HQ = 1		$1.15 \times 10^4$	$1.87 \times 10^4$	$2.08 \times 10^5$	$1.90 \times 10^3$	
Soil - Leachate to Protect Groundwater Ingestion Target Level (mg/kg)	MCLs		$2.93 \times 10^{-2}$	$1.10 \times 10^2$	1.77	$3.05 \times 10^2$	NA	9.42
	Residential	Carcinogenic Risk = $1 \times 10^{-6}$	$1.72 \times 10^{-2}$					$5.90 \times 10^{-1}$
		Chronic HQ = 1		$5.75 \times 10^2$	$1.29 \times 10^2$	RES	$2.29 \times 10^1$	
	Commercial/Industrial	Carcinogenic Risk = $1 \times 10^{-6}$	$5.78 \times 10^{-1}$					1.85
Chronic HQ = 1			$1.61 \times 10^3$	$3.61 \times 10^2$	RES	$6.42 \times 10^1$		

RES = Selected risk level is not exceeded for pure compound present at any concentration

**APPENDIX F**

**PHYSICAL, CHEMICAL, CONCENTRATION, AND  
TOXICITY INFORMATION FOR BETX COMPOUNDS**



RBCA CHEMICAL DATABASE

Physical Property Data

CAS Number	Constituent	type	Molecular Weight		Diffusion Coefficients				log (Koc) or log(Kd)		Henry's Law Constant			Vapor Pressure		Solubility		acid pKa	base pKb	ref
			(g/mole)	ref	in air (cm2/s)	ref	in water (cm2/s)	ref	(@ 20 - 25 C) log(l/kg)	ref	(@ 20 - 25 C) (atm-m3)	mol	(unitless)	ref	(@ 20 - 25 C) (mm Hg)	ref	(@ 20 - 25 C) (mg/L)			
71-43-2	Benzene	A	78.1	5	9.30E-02	A	1.10E-05	A	1.58	A	5.29E-03	2.20E-01	A	9.52E+01	4	1.75E+03	A			
100-41-4	Ethylbenzene	A	106.2	5	7.60E-02	A	8.50E-06	A	1.98	A	7.69E-03	3.20E-01	A	1.00E+01	4	1.52E+02	5			
1634-04-4	Methyl t-Butyl Ether	O	88.146	5	7.92E-02	6	9.41E-05	7	1.08	A	5.77E-04	2.40E-02		2.49E+02		4.80E+04	A			
108-88-3	Toluene	A	92.4	5	8.50E-02	A	9.40E-06	A	2.13	A	6.25E-03	2.60E-01	A	3.00E+01	4	5.15E+02	29			
1330-20-7	Xylene (mixed isomers)	A	106.2	5	7.20E-02	A	8.50E-06	A	2.38	A	6.97E-03	2.90E-01	A	7.00E+00	4	1.98E+02	5			

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Completed By: Dale A. van Dam

Date Completed: 11/3/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

**RBCA CHEMICAL DATABASE**

**Toxicity Data**

CAS Number	Constituent	Reference Dose (mg/kg/day)			Slope Factors 1/(mg/kg/day)			EPA Weight of Evidence	Is Constituent Carcinogenic ?		
		Oral RfD_oral	ref	Inhalation RfD_inhal	ref	Oral SF_oral	ref			Inhalation SF_inhal	ref
71-43-2	Benzene	-		1.70E-03	R	2.90E-02	A	2.90E-02	A	A	TRUE
100-41-4	Ethylbenzene	1.00E-01	A	2.86E-01	A	-		-		D	FALSE
1634-04-4	Methyl t-Butyl Ether	5.00E-03	R	8.57E-01	R	-		-		D	FALSE
108-88-3	Toluene	2.00E-01	A,R	1.14E-01	A,R	-		-		D	FALSE
1330-20-7	Xylene (mixed isomers)	2.00E+00	A,R	2.00E+00	A	-		-		D	FALSE

Site Name: Former Beacon #574      Site Location: 22315 Redwood Roa      Completed By: Dale A. van Dam      Date Completed: 11/3/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

**RBCA CHEMICAL DATABASE**

Miscellaneous Chemical Data

CAS Number	Constituent	Maximum Contaminant Level		Permissible Exposure Limit PEL/TLV		Relative Absorption Factors		Detection Limits			Half Life (First-Order Decay) (days)			
		MCL (mg/L)	reference	(mg/m3)	ref	Oral	Dermal	Groundwater (mg/L)	Soil (mg/kg)	ref	Saturated	Unsaturated	ref	
71-43-2	Benzene	5.00E-03	52 FR 25690	3.20E+00	OSHA	1	0.5	0.002	C	0.005	S	720	720	H
100-41-4	Ethylbenzene	7.00E-01	56 FR 3526 (30 Jan 91)	4.34E+02	ACGIH	1	0.5	0.002	C	0.005	S	228	228	H
1634-04-4	Methyl t-Butyl Ether			1.44E+02	ACGIH	1	0.5					360	180	H
108-88-3	Toluene	1.00E+00	56 FR 3526 (30 Jan 91)	1.47E+02	ACGIH	1	0.5	0.002	C	0.005	S	28	28	H
1330-20-7	Xylene (mixed isomers)	1.00E+01	56 FR 3526 (30 Jan 91)	4.34E+02	ACGIH	1	0.5	0.005	C	0.005	S	360	360	H

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam Date Completed: 11/3/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

**APPENDIX G**

**TIER 1 EVALUATION INPUTS SUMMARY AND RESULTS TABLES**

# RBCA TIER 1/TIER 2 EVALUATION

# Output Table 1

Site Name: Former Beacon #574 Job Identification: U065.02 Software: GSI RBCA Spreadsheet  
 Site Location: 22315 Redwood Road, Castroville Date Completed: 11/3/98 Version: 1.0.1  
 Completed By: Dale A. van Dam

NOTE: values which differ from Tier 1 default values are shown in bold italics and underlined.

Exposure Parameter	Definition (Units)	Residential			Commercial/Industrial		Surface Parameters		Residential	Commercial
		Adult	(1-6yrs)	(1-16 yrs)	Chronic	Constructn	Definition (Units)	Value		
ATc	Averaging time for carcinogens (yr)	70					A	Contaminated soil area (cm <sup>2</sup> )	<u>8.9E+06</u>	1.0E+06
ATn	Averaging time for non-carcinogens (yr)	30	6	16	25	1	W	Length of affect. soil parallel to wind (cm)	<u>2.4E+03</u>	1.0E+03
BW	Body Weight (kg)	70	15	35	70		W.gw	Length of affect. soil parallel to groundwater (cm)	<u>3.7E+03</u>	
ED	Exposure Duration (yr)	30	6	16	25	1	Uair	Ambient air velocity in mixing zone (cm/s)	2.3E+02	
t	Averaging time for vapor flux (yr)	30			25	1	delta	Air mixing zone height (cm)	<u>2.0E+02</u>	
EF	Exposure Frequency (days/yr)	350			250	180	Lss	Thickness of affected surface soils (cm)	<u>1.5E+02</u>	
EF.Derm	Exposure Frequency for dermal exposure	350			250		Pe	Particulate areal emission rate (g/cm <sup>2</sup> /s)	6.9E-14	
IRgw	Ingestion Rate of Water (L/day)	2			1		<b>Groundwater Definition (Units)</b>			
IRs	Ingestion Rate of Soil (mg/day)	100	200		50	100	delta.gw	Groundwater mixing zone depth (cm)	2.0E+02	
IRadj	Adjusted soil ing. rate (mg-yr/kg-d)	1.1E+02			9.4E+01		l	Groundwater infiltration rate (cm/yr)	<u>7.6E+01</u>	
IRa.in	Inhalation rate indoor (m <sup>3</sup> /day)	15			20		Ugw	Groundwater Darcy velocity (cm/yr)	<u>8.0E+02</u>	
IRa.out	Inhalation rate outdoor (m <sup>3</sup> /day)	20			20	10	Ugw.tr	Groundwater seepage velocity (cm/yr)	<u>4.0E+03</u>	
SA	Skin surface area (dermal) (cm <sup>2</sup> )	5.8E+03		2.0E+03	5.8E+03	5.8E+03	Ks	Saturated hydraulic conductivity(cm/s)	<u>2.0E-03</u>	
SAadj	Adjusted dermal area (cm <sup>2</sup> -yr/kg)	2.1E+03			1.7E+03		grad	Groundwater gradient (cm/cm)	1.0E-02	
M	Soil to Skin adherence factor	1					Sw	Width of groundwater source zone (cm)		
AAF.s	Age adjustment on soil ingestion	FALSE			FALSE		Sd	Depth of groundwater source zone (cm)		
AAF.d	Age adjustment on skin surface area	FALSE			FALSE		phi.eff	Effective porosity in water-bearing unit	2.0E-01	
tox	Use EPA tox data for air (or PEL based)?	TRUE					foc.sat	Fraction organic carbon in water-bearing unit	1.0E-03	
gwMCL?	Use MCL as exposure limit in groundwater?	FALSE					BIO?	Is bioattenuation considered?	FALSE	
							BC	Biodegradation Capacity (mg/L)		
<b>Matrix of Exposed Persons to Complete Exposure Pathways</b>		<b>Residential</b>			<b>Commercial/Industrial</b>		<b>Soil</b>		<b>Value</b>	
<b>Outdoor Air Pathways:</b>					<b>Chronic</b>	<b>Constructn</b>	hc	Capillary zone thickness (cm)	<u>9.4E+00</u>	
SS.v	Volatiles and Particulates from Surface Soils	FALSE			FALSE	TRUE	hv	Vadose zone thickness (cm)	<u>5.9E+02</u>	
S.v	Volatilization from Subsurface Soils	FALSE			FALSE		rho	Soil density (g/cm <sup>3</sup> )	1.7	
GW.v	Volatilization from Groundwater	FALSE			FALSE		foc	Fraction of organic carbon in vadose zone	<u>0.001</u>	
<b>Indoor Air Pathways:</b>							phi	Soil porosity in vadose zone	<u>0.2</u>	
S.b	Vapors from Subsurface Soils	FALSE			TRUE		Lgw	Depth to groundwater (cm)	<u>6.0E+02</u>	
GW.b	Vapors from Groundwater	FALSE			TRUE		Ls	Depth to top of affected subsurface soil (cm)	<u>1.5E+02</u>	
<b>Soil Pathways:</b>							l.subs	Thickness of affected subsurface soils (cm)	<u>4.5E+02</u>	
SS.d	Direct Ingestion and Dermal Contact	FALSE			FALSE	TRUE	pH	Soil/groundwater pH	<u>6</u>	
<b>Groundwater Pathways:</b>								capillary		
GW.i	Groundwater Ingestion	FALSE			FALSE		phi.w	Volumetric water content	<u>0.18</u>	0.07
S.l	Leaching to Groundwater from all Soils	FALSE			FALSE		phi.a	Volumetric air content	<u>0.02</u>	<u>0.13</u>
								foundation		0.26
<b>Matrix of Receptor Distance and Location On- or Off-Site</b>		<b>Residential</b>			<b>Commercial/Industrial</b>		<b>Building</b>		<b>Residential</b>	<b>Commercial</b>
		<b>Distance</b>	<b>On-Site</b>		<b>Distance</b>	<b>On-Site</b>	Lb	Building volume/area ratio (cm)	2.0E+02	3.0E+02
GW	Groundwater receptor (cm)		TRUE			TRUE	ER	Building air exchange rate (s <sup>-1</sup> )	1.4E-04	2.3E-04
S	Inhalation receptor (cm)		TRUE			TRUE	Lcrk	Foundation crack thickness (cm)	1.5E+01	
							eta	Foundation crack fraction	0.01	
<b>Matrix of Target Risks</b>		<b>Individual</b>	<b>Cumulative</b>	<b>Transport Parameters</b>						
TRab	Target Risk (class A&B carcinogens)	1.0E-06		<b>Groundwater</b>						
TRc	Target Risk (class C carcinogens)	1.0E-05		ax	Longitudinal dispersivity (cm)					
THQ	Target Hazard Quotient	1.0E+00		ay	Transverse dispersivity (cm)					
Opt	Calculation Option (1, 2, or 3)	1		az	Vertical dispersivity (cm)					
Tier	RBCA Tier	1		<b>Vapor</b>						
				dcy	Transverse dispersion coefficient (cm)					
				dcz	Vertical dispersion coefficient (cm)					

RBCA CHEMICAL DATABASE

Physical Property Data

CAS Number	Constituent	type	Molecular Weight		Diffusion Coefficients				log (Koc) or log(Kd)		Henry's Law Constant			Vapor Pressure		Solubility		acid pKa	base pKb	ref
			(g/mole)	ref	in air (cm2/s)	ref	in water (cm2/s)	ref	log(l/kg)	ref	(atm-m3)	(unitless)	ref	(mm Hg)	ref	(mg/L)	ref			
71-43-2	Benzene	A	78.1	5	9.30E-02	A	1.10E-05	A	1.58	A	5.29E-03	2.20E-01	A	9.52E+01	4	1.75E+03	A			
100-41-4	Ethylbenzene	A	106.2	5	7.60E-02	A	8.50E-06	A	1.98	A	7.69E-03	3.20E-01	A	1.00E+01	4	1.52E+02	5			
108-88-3	Toluene	A	92.4	5	8.50E-02	A	9.40E-06	A	2.13	A	6.25E-03	2.60E-01	A	3.00E+01	4	5.15E+02	29			
1330-20-7	Xylene (mixed isomers)	A	106.2	5	7.20E-02	A	8.50E-06	A	2.38	A	6.97E-03	2.90E-01	A	7.00E+00	4	1.98E+02	5			

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Completed By: Dale A. van Dam

Date Completed: 10/26/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

RBCA CHEMICAL DATABASE

Toxicity Data

CAS Number	Constituent	Reference Dose (mg/kg/day)				Slope Factors 1/(mg/kg/day)				EPA Weight of Evidence	Is Constituent Carcinogenic ?
		Oral RfD_oral	ref	Inhalation RfD_inhal	ref	Oral SF_oral	ref	Inhalation SF_inhal	ref		
71-43-2	Benzene	-		1.70E-03	R	2.90E-02	A	2.90E-02	A	A	TRUE
100-41-4	Ethylbenzene	1.00E-01	A	2.86E-01	A	-		-		D	FALSE
108-88-3	Toluene	2.00E-01	A,R	1.14E-01	A,R	-		-		D	FALSE
1330-20-7	Xylene (mixed isomers)	2.00E+00	A,R	2.00E+00	A	-		-		D	FALSE

Site Name: Former Beacon #574      Site Location: 22315 Redwood Roa      Completed By: Dale A. van Dam      Date Completed: 10/26/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

**RBCA CHEMICAL DATABASE**

Miscellaneous Chemical Data

CAS Number	Constituent	Maximum Contaminant Level		Permissible Exposure Limit PEL/TLV (mg/m3)	ref	Relative Absorption Factors		Detection Limits			Half Life (First-Order Decay) (days)			
		MCL (mg/L)	reference			Oral	Dermal	Groundwater (mg/L)	Soil (mg/kg)	ref	Saturated	Unsaturated	ref	
71-43-2	Benzene	5.00E-03	52 FR 25690	3.20E+00	OSHA	1	0.5	0.002	C	0.005	S	720	720	H
100-41-4	Ethylbenzene	7.00E-01	56 FR 3526 (30 Jan 91)	4.34E+02	ACGIH	1	0.5	0.002	C	0.005	S	228	228	H
108-88-3	Toluene	1.00E+00	56 FR 3526 (30 Jan 91)	1.47E+02	ACGIH	1	0.5	0.002	C	0.005	S	28	28	H
1330-20-7	Xylene (mixed isomers)	1.00E+01	56 FR 3526 (30 Jan 91)	4.34E+02	ACGIH	1	0.5	0.005	C	0.005	S	360	360	H

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 10/26/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.



**REPRESENTATIVE COC CONCENTRATIONS IN SOURCE MEDIA**

(Complete the following table)

CONSTITUENT	Representative COC Concentration					
	in Groundwater		in Surface Soil		in Subsurface Soil	
	value (mg/L)	note	value (mg/kg)	note	value (mg/kg)	note
Benzene	1.1E-2	mean	2.5E-3	UCL	8.6E+0	UCL
Ethylbenzene	5.8E-3	mean	2.5E-3	UCL	4.3E-1	UCL
Methyl t-Butyl Ether	5.9E-2	mean				
Toluene	5.8E-3	mean	2.5E-3	UCL	1.2E+0	UCL
Xylene (mixed isomers)	1.1E-2	mean	2.5E-3	UCL	2.0E+0	UCL

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

**CONSTITUENT MOLE FRACTIONS**

(Complete the following table)

CONSTITUENT	Mole Fraction of Constituent in Source Material
Benzene	
Ethylbenzene	
Methyl t-Butyl Ether	
Toluene	
Xylene (mixed isomers)	

Site Name: Former Beacon #574      Completed By: Dale A. van Dam  
Site Location: 22315 Redwood Road, C      Date Completed: 11/3/1998

**GROUNDWATER DAF VALUES**

(Enter DAF values in the grey area of the following table)  
 Dilution Attenuation Factor  
 (DAF) in Groundwater

CONSTITUENT	Residential	Comm./Ind.
	Receptor	Receptor
Benzene	1.0E+0	1.0E+0
Ethylbenzene	1.0E+0	1.0E+0
Methyl t-Butyl Ether	1.0E+0	1.0E+0
Toluene	1.0E+0	1.0E+0
Xylene (mixed isomers)	1.0E+0	1.0E+0

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, C. Date Completed: 11/3/1998

**CONSTITUENT HALF-LIFE VALUES**

(Complete the following table)

CONSTITUENT	Half-Life of Constituent (day)
Benzene	720
Ethylbenzene	228
Methyl t-Butyl Ether	
Toluene	28
Xylene (mixed isomers)	360

Site Name: Former Beacon #574      Completed By: Dale A. van Dam  
Site Location: 22315 Redwood Road, Ca      Date Completed: 11/3/1998

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

**EXPOSURE LIMITS IN GROUNDWATER AND AIR**

CONSTITUENT	Exposure Limits Applied to Receptors	
	Groundwater	Air (Comm. only)
	(MCL) (mg/L)	(PEL/TLV) (mg/m <sup>3</sup> )
Benzene		
Ethylbenzene		
Methyl t-Butyl Ether		
Toluene		
Xylene (mixed isomers)		

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

**RBCA SITE ASSESSMENT**

**Tier 1 Worksheet 8.1**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Vall Completed By: Dale A. van Dam Date Completed: 11/3/1998

1 OF 9

**TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

**OUTDOOR AIR EXPOSURE PATHWAYS:**  (CHECKED IF PATHWAY IS ACTIVE)

SURFACE SOILS: VAPOR AND DUST INHALATION	Exposure Concentration				
	1) Source Medium	2) NAF Value (m <sup>3</sup> /kg) Receptor	3) Exposure Medium Outdoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)	4) Exposure Multiplier (IR×EF×ED)/(BW×AT) (m <sup>3</sup> /kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) × (4)
Constituents of Concern	Surface Soil Conc. (mg/kg)				
Benzene	2.5E-3				
Ethylbenzene	2.5E-3				
Methyl t-Butyl Ether	0.0E+0				
Toluene	2.5E-3				
Xylene (mixed isomers)	2.5E-3				

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Inhalation rate (m<sup>3</sup>/day)

**RBCA SITE ASSESSMENT**

Tier 1 Worksheet 8.1

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valli Completed By: Dale A. van Dam Date Completed: 11/3/1998

2 OF 9

**TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

OUTDOOR AIR EXPOSURE PATHWAYS		<input checked="" type="checkbox"/> (CHECKED IF PATHWAY IS ACTIVE)				
SUBSURFACE SOILS: VAPOR		Exposure Concentration				
INHALATION	1) Source Medium	2) NAF Value (m <sup>3</sup> /kg) Receptor	3) Exposure Medium Outdoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)	4) Exposure Multiplier (IRxEFxED)/(BWxAT) (m <sup>3</sup> /kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) X (4)	
Constituents of Concern	Subsurface Soil Conc. (mg/kg)					
Benzene	8.6E+0					
Ethylbenzene	4.3E-1					
Methyl t-Butyl Ether	0.0E+0					
Toluene	1.2E+0					
Xylene (mixed isomers)	2.0E+0					

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Inhalation rate (m<sup>3</sup>/day)

**RBCA SITE ASSESSMENT**

Tier 1 Worksheet 8.1

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Caslr Completed By: Dale A. van Dam

Date Completed: 11/3/1998

3 OF 9

**TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

**OUTDOOR AIR EXPOSURE PATHWAYS**  (CHECKED IF PATHWAY IS ACTIVE)

GROUNDWATER: VAPOR INHALATION	Exposure Concentration					TOTAL PATHWAY INTAKE (mg/kg-day)	
	1) Source Medium	2) NAF Value (m <sup>3</sup> /L) Receptor	3) Exposure Medium Outdoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)	4) Exposure Multiplier (IRxEFxED)/(BWxAT) (m <sup>3</sup> /kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) X (4)	(Sum intake values from surface, subsurface & groundwater routes.)	
Constituents of Concern	Groundwater Conc. (mg/L)						
Benzene	1.1E-2						
Ethylbenzene	5.8E-3						
Methyl t-Butyl Ether	5.9E-2						
Toluene	5.8E-3						
Xylene (mixed isomers)	1.1E-2						

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Inhalation rate (m<sup>3</sup>/day)



**RBCA SITE ASSESSMENT**

Tier 1 Worksheet 8.2

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

1 OF 4

**TIER 1 PATHWAY RISK CALCULATION**

**OUTDOOR AIR EXPOSURE PATHWAYS**

(CHECKED IF PATHWAYS ARE ACTIVE)

Constituents of Concern	CARCINOGENIC RISK				TOXIC EFFECTS		
	(1) EPA Carcinogenic Classification	(2) Total Carcinogenic Intake Rate (mg/kg/day)	(3) Inhalation Slope Factor (mg/kg-day) <sup>-1</sup>	(4) Individual COC Risk (2) x (3)	(5) Total Toxicant Intake Rate (mg/kg/day)	(6) Inhalation Reference Dose (mg/kg-day)	(7) Individual COC Hazard Quotient (5) / (6)
Benzene	A		2.9E-2			1.7E-3	
Ethylbenzene	D					2.9E-1	
Methyl t-Butyl Ether						8.6E-1	
Toluene	D					1.1E-1	
Xylene (mixed isomers)	D					2.0E+0	

Total Pathway Carcinogenic Risk = 0.0E+0 0.0E+0

Total Pathway Hazard Index = 0.0E+0 0.0E+0

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Vall Completed By: Dale A. van Dam Date Completed: 11/3/1998

4 OF 9

TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

INDOOR AIR EXPOSURE PATHWAYS  (CHECKED IF PATHWAY IS ACTIVE)

SUBSURFACE SOILS: VAPOR INTRUSION TO BUILDINGS	Exposure Concentration				
	1) Source Medium	2) NAF Value (m <sup>3</sup> /kg) Receptor	3) Exposure Medium Indoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)	4) Exposure Multiplier (IR×EF×ED)/(BW×AT) (m <sup>3</sup> /kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) X (4)
	Subsurface Soil Conc. (mg/kg)	On-Site Commercial	On-Site Commercial	On-Site Commercial	On-Site Commercial
Constituents of Concern					
Benzene	8.6E+0	7.2E+1	1.2E-1	7.0E-2	8.4E-3
Ethylbenzene	4.3E-1	7.2E+1	6.0E-3	2.0E-1	1.2E-3
Methyl t-Butyl Ether	0.0E+0	7.2E+1	0.0E+0	2.0E-1	0.0E+0
Toluene	1.2E+0	7.2E+1	1.6E-2	2.0E-1	3.2E-3
Xylene (mixed isomers)	2.0E+0	7.2E+1	2.7E-2	2.0E-1	5.3E-3

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Inhalation rate (m<sup>3</sup>/day)

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castr Completed By: Dale A. van Dam

Date Completed: 11/3/1998

5 OF 9

TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

INDOOR AIR EXPOSURE PATHWAYS <input checked="" type="checkbox"/> (CHECKED IF PATHWAY IS ACTIVE)										
GROUNDWATER: VAPOR INTRUSION TO BUILDINGS	Exposure Concentration					TOTAL PATHWAY INTAKE (mg/kg-day)				
	1) Source Medium	2) NAF Value (m <sup>3</sup> /L) Receptor		3) Exposure Medium Indoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)		4) Exposure Multiplier (IRxEFxED)/(BWxAT) (m <sup>3</sup> /kg-day)		5) Average Daily Intake Rate (mg/kg-day) (3) X (4)		(Sum intake values from subsurface & groundwater routes.)
Constituents of Concern	Groundwater Conc. (mg/L)	On-Site Commercial		On-Site Commercial		On-Site Commercial		On-Site Commercial		On-Site Commercial
Benzene	1.1E-2	4.6E+2		2.4E-5		7.0E-2		1.7E-6		8.4E-3
Ethylbenzene	5.8E-3	4.3E+2		1.3E-5		2.0E-1		2.6E-6		1.2E-3
Methyl t-Butyl Ether	5.9E-2	1.5E+3		3.8E-5		2.0E-1		7.5E-6		7.5E-6
Toluene	5.8E-3	4.5E+2		1.3E-5		2.0E-1		2.5E-6		3.2E-3
Xylene (mixed isomers)	1.1E-2	4.8E+2		2.2E-5		2.0E-1		4.3E-6		5.3E-3

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Inhalation rate (m<sup>3</sup>/day)

**RBCA SITE ASSESSMENT**

**Tier 1 Worksheet 8.2**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

2 OF 4

**TIER 1 PATHWAY RISK CALCULATION**

INDOOR AIR EXPOSURE PATHWAYS

(CHECKED IF PATHWAYS ARE ACTIVE)

Constituents of Concern	CARCINOGENIC RISK				TOXIC EFFECTS			
	(1) EPA	(2) Total Carcinogenic Intake Rate (mg/kg/day)	(3) Inhalation Slope Factor	(4) Individual COC Risk (2) x (3)	(5) Total Toxicant Intake Rate (mg/kg/day)	(6) Inhalation Reference Dose	(7) Individual COC Hazard Quotient (5) / (6)	
	Carcinogenic Classification	On-Site Commercial	(mg/kg-day) <sup>-1</sup>	On-Site Commercial	On-Site Commercial	(mg/kg-day)	On-Site Commercial	
Benzene	A	8.4E-3	2.9E-2	2.4E-4	2.4E-2	1.7E-3	1.4E+1	
Ethylbenzene	D				1.2E-3	2.9E-1	4.1E-3	
Methyl t-Butyl Ether					7.5E-6	8.6E-1	8.7E-6	
Toluene	D				3.2E-3	1.1E-1	2.8E-2	
Xylene (mixed isomers)	D				5.3E-3	2.0E+0	2.7E-3	

Total Pathway Carcinogenic Risk = **0.0E+0**    **2.4E-4**

Total Pathway Hazard Index = **0.0E+0**    **1.4E+1**

Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castro Valley, CA Completed By: Dale A. va Date Completed: 11/3/1998

6 OF 9

**TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

**SOIL EXPOSURE PATHWAYS**  (CHECKED IF PATHWAY IS ACTIVE)

SURFACE SOILS OR SEDIMENTS: DERMAL CONTACT	Exposure Concentration			
	1) Source Medium	2) Exposure Multiplier <small>(SAxAFxABSxCFxEFxED)/(BWxAT) (kg/kg-day)</small>		3) Average Daily Intake Rate <small>(mg/kg-day) (1) x (2)</small>
	Surface Soil Conc. (mg/kg)	On-Site Residential	On-Site Commercial	On-Site Residential      On-Site Commercial
Constituents of Concern				
Benzene	2.5E-3			
Ethylbenzene	2.5E-3			
Methyl t-Butyl Ether	0.0E+0			
Toluene	2.5E-3			
Xylene (mixed isomers)	2.5E-3			

NOTE: ABS = Dermal absorption factor (dim)    BW = Body weight (kg)    EF = Exposure frequency (days/yr)    POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)    CF = Units conversion factor    ET = Exposure time (hrs/day)    SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)    ED = Exposure duration (yrs)    IR = Intake rate (mg/day)

Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castr Completed By: Dale A. van Dam Date Completed: 11/3/1998 7 OF 9

TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

SOIL EXPOSURE PATHWAYS <input checked="" type="checkbox"/> (CHECKED IF PATHWAY IS ACTIVE)							
SURFACE SOILS OR SEDIMENTS: INGESTION	Exposure Concentration				TOTAL PATHWAY INTAKE (mg/kg-day)		
	1) Source Medium	2) Exposure Multiplier (IRxCFxEFxED)/(BWxAT) (kg/kg-day)		3) Average Daily Intake Rate (mg/kg-day) (1) x (2)		(Sum intake values from dermal & ingestion routes.)	
Constituents of Concern	Surface Soil Conc. (mg/kg)	On-Site Residential	On-Site Commercial	On-Site Residential	On-Site Commercial	On-Site Residential	On-Site Commercial
Benzene	2.5E-3						
Ethylbenzene	2.5E-3						
Methyl t-Butyl Ether	0.0E+0						
Toluene	2.5E-3						
Xylene (mixed isomers)	2.5E-3						

NOTE: ABS = Dermal absorption factor (dim) BW = Body weight (kg) EF = Exposure frequency (days/yr) POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>) CF = Units conversion factor ET = Exposure time (hrs/day) SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days) ED = Exposure duration (yrs) IR = Intake rate (mg/day)

**RBCA SITE ASSESSMENT**

**Tier 1 Worksheet 8.2**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

3 OF 4

**TIER 1 PATHWAY RISK CALCULATION**

**SOIL EXPOSURE PATHWAYS**

(CHECKED IF PATHWAYS ARE ACTIVE)

**CARCINOGENIC RISK**

**TOXIC EFFECTS**

Constituents of Concern	(1) EPA Carcinogenic Classification	(2) Total Carcinogenic Intake Rate (mg/kg/day)				(3) Oral Slope Factor (mg/kg-day) <sup>-1</sup>	(4) Individual COC Risk (2) x (3)		(5) Total Toxicant Intake Rate (mg/kg/day)		(6) Oral Reference Dose (mg/kg-day)	(7) Individual COC Hazard Quotient (5) / (6)	
		On-Site Residential		On-Site Commercial			On-Site Residential	On-Site Commercial	On-Site Residential	On-Site Commercial		On-Site Residential	On-Site Commercial
Benzene	A				2.9E-2								
Ethylbenzene	D									1.0E-1			
Methyl t-Butyl Ether										5.0E-3			
Toluene	D									2.0E-1			
Xylene (mixed isomers)	D									2.0E+0			

**Total Pathway Carcinogenic Risk =** 0.0E+0 0.0E+0

**Total Pathway Hazard Index =** 0.0E+0 0.0E+0

Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castro Valley, Completed By: Dale A. van Dam Date Completed: 11/3/1998

8 OF 9

TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

GROUNDWATER EXPOSURE PATHWAYS  (CHECKED IF PATHWAY IS ACTIVE)

SOIL: LEACHING TO GROUNDWATER/ GROUNDWATER INGESTION	Exposure Concentration				
	1) Source Medium	2) NAF Value (L/kg) Receptor	3) Exposure Medium Groundwater: POE Conc. (mg/L) (1)/(2)	4) Exposure Multiplier (IRxEFxED)/(BWxAT) (L/kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) x (4)
Constituents of Concern	Soil Concentration (mg/kg)				
Benzene	8.6E+0				
Ethylbenzene	4.3E-1				
Methyl t-Butyl Ether	0.0E+0				
Toluene	1.2E+0				
Xylene (mixed isomers)	2.0E+0				

NOTE: ABS = Dermal absorption factor (dim)      BW = Body Weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Intake rate (L/day)



**RBCA SITE ASSESSMENT**

Tier 1 Worksheet 8.1

Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castro Valley, CA Completed By: Dale A. van Dam Date Completed: 11/3/1998 9 OF 9

**TIER 1 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

**GROUNDWATER EXPOSURE PATHWAYS**  (CHECKED IF PATHWAY IS ACTIVE)

GROUNDWATER: INGESTION	Exposure Concentration					MAX. PATHWAY INTAKE (mg/kg-day) <i>(Maximum intake of active pathways soil leaching &amp; groundwater routes.)</i>
	1) Source Medium Groundwater Conc. (mg/L)	2) NAF Value (dim) Receptor	3) Exposure Medium Groundwater: POE Conc. (mg/L) (1)/(2)	4) Exposure Multiplier (IR*EF*ED)/(BW*AT) (L/kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) x (4)	
Constituents of Concern						
Benzene	1.1E-2					
Ethylbenzene	5.8E-3					
Methyl t-Butyl Ether	5.9E-2					
Toluene	5.8E-3					
Xylene (mixed isomers)	1.1E-2					

NOTE: ABS = Dermal absorption factor (dim) BW = Body weight (kg) EF = Exposure frequency (days/yr) POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>) CF = Units conversion factor ET = Exposure time (hrs/day) SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days) ED = Exposure duration (yrs) IR = Intake rate (L/day)

**RBCA SITE ASSESSMENT**

**Tier 1 Worksheet 8.2**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

4 OF 4

**TIER 1 PATHWAY RISK CALCULATION**

**GROUNDWATER EXPOSURE PATHWAYS**  (CHECKED IF PATHWAYS ARE ACTIVE)

Constituents of Concern	CARCINOGENIC RISK				TOXIC EFFECTS		
	(1) EPA Carcinogenic Classification	(2) Total Carcinogenic Intake Rate (mg/kg/day)	(3) Oral Slope Factor (mg/kg-day) <sup>-1</sup>	(4) Individual COC Risk (2) x (3)	(5) Total Toxicant Intake Rate (mg/kg/day)	(6) Oral Reference Dose (mg/kg-day)	(7) Individual COC Hazard Quotient (5) / (6)
Benzene	A		2.9E-2				
Ethylbenzene	D					1.0E-1	
Methyl t-Butyl Ether						5.0E-3	
Toluene	D					2.0E-1	
Xylene (mixed isomers)	D					2.0E+0	

**Total Pathway Carcinogenic Risk =** 0.0E+0 0.0E+0

**Total Pathway Hazard Index =** 0.0E+0 0.0E+0

**RBCA SITE ASSESSMENT**

**Tier 1 Worksheet 8.3**

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

1 of 1

**TIER 1 BASELINE RISK SUMMARY TABLE**

EXPOSURE PATHWAY	BASELINE CARCINOGENIC RISK					BASELINE TOXIC EFFECTS				
	Individual COC Risk		Cumulative COC Risk		Risk Limit(s) Exceeded?	Hazard Quotient		Hazard Index		Toxicity Limit(s) Exceeded?
	Maximum Value	Target Risk	Total Value	Target Risk		Maximum Value	Applicable Limit	Total Value	Applicable Limit	
<b>OUTDOOR AIR EXPOSURE PATHWAYS</b>										
Complete:	NC	1.0E-6	NC	N/A	■	NC	1.0E+0	NC	N/A	■
<b>INDOOR AIR EXPOSURE PATHWAYS</b>										
Complete:	2.4E-4	1.0E-6	2.4E-4	N/A	■	1.4E+1	1.0E+0	1.4E+1	N/A	■
<b>SOIL EXPOSURE PATHWAYS</b>										
Complete:	NC	1.0E-6	NC	N/A	■	NC	1.0E+0	NC	N/A	■
<b>GROUNDWATER EXPOSURE PATHWAYS</b>										
Complete:	NC	1.0E-6	NC	N/A	■	NC	1.0E+0	NC	N/A	■
<b>CRITICAL EXPOSURE PATHWAY (Select Maximum Values From Complete Pathways)</b>										
	2.4E-4	1.0E-6	2.4E-4	N/A	■	1.4E+1	1.0E+0	1.4E+1	N/A	■

**RBCA SITE ASSESSMENT**

Tier 1 Worksheet 6.1

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

1 OF 1

**SURFACE SOIL RBSL VALUES  
( < 5 FT BGS)**

Target Risk (Class A & B) 1.0E-6

MCL exposure limit?

Calculation Option: 1

Target Risk (Class C) 1.0E-5

PEL exposure limit?

Target Hazard Quotient 1.0E+0

**RBSL Results For Complete Exposure Pathways ("x" if Complete)**

CONSTITUENTS OF CONCERN		Representative Concentration	Soil Leaching to Groundwater			Ingestion, Inhalation and Dermal Contact		<input checked="" type="checkbox"/> Construction Worker	Applicable RBSL	RBSL Exceeded ?	Required CRF
CAS No.	Name	(mg/kg)	Residential: (on-site)	Commercial: (on-site)	Regulatory(MCL): (on-site)	Residential: (on-site)	Commercial: (on-site)	Commercial: (on-site)	(mg/kg)	"■" If yes	Only if "yes" left
71-43-2	Benzene	2.5E-3	NA	NA	NA	NA	NA	7.1E+1	7.1E+1	<input type="checkbox"/>	<1
100-41-4	Ethylbenzene	2.5E-3	NA	NA	NA	NA	NA	>Res	>Res	<input type="checkbox"/>	<1
1634-04-4	Methyl t-Butyl Ether	0.0E+0	NA	NA	NA	NA	NA	2.4E+2	2.4E+2	<input type="checkbox"/>	<1
108-88-3	Toluene	2.5E-3	NA	NA	NA	NA	NA	>Res	>Res	<input type="checkbox"/>	<1
1330-20-7	Xylene (mixed isomers)	2.5E-3	NA	NA	NA	NA	NA	>Res	>Res	<input type="checkbox"/>	<1

>Res indicates risk-based target concentration greater than constituent residual saturation value

**RBCA SITE ASSESSMENT**

Tier 1 Worksheet 6.2

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

1 OF 1

**SUBSURFACE SOIL RBSL VALUES  
(> 5 FT BGS)**

Target Risk (Class A & B) 1.0E-6

MCL exposure limit?

Calculation Option: 1

Target Risk (Class C) 1.0E-5

PEL exposure limit?

Target Hazard Quotient 1.0E+0

**RBSL Results For Complete Exposure Pathways ("X" if Complete)**

CONSTITUENTS OF CONCERN		Representative Concentration (mg/kg)	Soil Leaching to Groundwater			Soil Volatilization to Indoor Air		Soil Volatilization to Outdoor Air		Applicable RBSL (mg/kg)	RBSL Exceeded ? "■" If yes	Required CRF Only if "yes" left
			Residential: (on-site)	Commercial: (on-site)	Regulatory(MCL): (on-site)	Residential: (on-site)	Commercial: (on-site)	Residential: (on-site)	Commercial: (on-site)			
71-43-2	Benzene	8.6E+0	NA	NA	NA	NA	3.5E-2	NA	NA	3.5E-2	■	2.4E+02
100-41-4	Ethylbenzene	4.3E-1	NA	NA	NA	NA	>Res	NA	NA	>Res	<input type="checkbox"/>	<1
1634-04-4	Methyl t-Butyl Ether	0.0E+0	NA	NA	NA	NA	3.1E+2	NA	NA	3.1E+2	<input type="checkbox"/>	<1
108-88-3	Toluene	1.2E+0	NA	NA	NA	NA	4.2E+1	NA	NA	4.2E+1	<input type="checkbox"/>	<1
1330-20-7	Xylene (mixed isomers)	2.0E+0	NA	NA	NA	NA	>Res	NA	NA	>Res	<input type="checkbox"/>	<1

>Res indicates risk-based target concentration greater than constituent residual saturation value

**RBCA SITE ASSESSMENT**

Tier 1 Worksheet 6.3

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

1 OF 1

**GROUNDWATER RBSL VALUES**

Target Risk (Class A & B) 1.0E-6

MCL exposure limit?

Calculation Option: 1

Target Risk (Class C) 1.0E-5

PEL exposure limit?

Target Hazard Quotient 1.0E+0

**RBSL Results For Complete Exposure Pathways ("x" if Complete)**

CONSTITUENTS OF CONCERN		Representative Concentration (mg/L)	Groundwater Ingestion			Groundwater Volatilization to Indoor Air		Groundwater Volatilization to Outdoor Air		Applicable RBSL (mg/L)	RBSL Exceeded ? "■" if yes	Required CRF Only if "yes" left
CAS No.	Name		Residential: (on-site)	Commercial: (on-site)	Regulatory(MCL): (on-site)	Residential: (on-site)	Commercial: (on-site)	Residential (on-site)	Commercial: (on-site)			
71-43-2	Benzene	1.1E-2	NA	NA	NA	NA	2.2E-1	NA	NA	2.2E-1	<input type="checkbox"/>	<1
100-41-4	Ethylbenzene	5.8E-3	NA	NA	NA	NA	>Sol	NA	NA	>Sol	<input type="checkbox"/>	<1
1634-04-4	Methyl t-Butyl Ether	5.9E-2	NA	NA	NA	NA	6.7E+3	NA	NA	6.7E+3	<input type="checkbox"/>	<1
108-88-3	Toluene	5.8E-3	NA	NA	NA	NA	2.6E+2	NA	NA	2.6E+2	<input type="checkbox"/>	<1
1330-20-7	Xylene (mixed isomers)	1.1E-2	NA	NA	NA	NA	>Sol	NA	NA	>Sol	<input type="checkbox"/>	<1

>Sol indicates risk-based target concentration greater than constituent solubility

**APPENDIX H**

**EQUATIONS AND ASSUMPTIONS USED TO DESCRIBE TRANSPORT AND  
ATTENUATION OF CONSTITUENTS OF CONCERN**

- **Baseline Risk Results:** For each complete exposure pathway, baseline intake rates and risk levels associated with current site conditions are tabulated for both individual and cumulative constituent exposure. To identify critical exposure pathways, a graphical plot is provided comparing cumulative risks for air, water, and soil exposure pathways.
- **Media Cleanup Values:** Site-Specific Target Levels (SSTLs) for each complete exposure pathway are provided both for individual constituent and cumulative constituent risk limits (if applicable). The software automatically identifies the critical SSTL value for each constituent and calculates the constituent reduction factor (CRF) required to meet the cleanup goal.

#### EXIT TO EXCEL WORKBOOK

If desired, the user can bypass the software interface and directly access the Excel workbook structure. This feature allows the user to inspect the detailed calculation steps conducted in the various worksheets or review the modeling equations. This option is recommended only for users experienced with direct operation of Excel. Further discussion of the worksheet environment is provided in Section A.4 of this Appendix.

**Tier 2**  
**RBCA**

A-6

### A.3 Fate and Transport Modeling Methods

The RBCA Spreadsheet System contains a series of fate and transport models for predicting COC concentrations at the point of exposure (POE) for indirect exposure pathways, such as air and groundwater. Under Tier 2, relatively simple analytical models are to be employed for this calculation, representing a minor incremental effort relative to Tier 1. The spreadsheet modeling system is consistent with Appendix X.2 of ASTM E-1739, although selected algorithms and default parameters have been updated to reflect advances in evaluation methods.


The idealized schematic shown on Figure A.2 illustrates the steps included in the RBCA software for predicting transport of contaminants from the source zone to the POE for air and groundwater exposure pathways. (Please note that POE attenuation factors and surface water exposure pathways are not included in the software at this time. See Volume 1, Figure 10.) Each element in Figure A.2 represents a step-specific attenuation factor, corresponding to either a cross-media transfer factor (CM) or a lateral transport factor (LT). The effective NAF value for each COC on each pathway is then calculated as the arithmetic product of the various attenuation factors occurring along the flow path from source to receptor. These steady-state NAF values are then used for calculation of baseline risks and back-calculation of Site-Specific Target Levels (SSTLs), as discussed in Section A.2 above. Please note that fate and transport modeling is *not* required for direct exposure pathways, such as soil ingestion or dermal contact, where the source and exposure concentrations are equal (i.e., NAF = 1). Analytical models used for conservative estimation of each transport factor are described below.

#### CROSS-MEDIA TRANSFER FACTORS

Exposure pathways involving transport of COCs from one medium to another (e.g., soil-to-air, soil-to-groundwater) require estimation of the corresponding cross-media transfer factor. Various analytical expressions are available for estimating soil-to-air *volatilization factors* as a function of site soil characteristics and the physical/chemical properties of volatile organic COCs. *Leaching factors* for organic and inorganic constituent releases from soil to groundwater can similarly be estimated as a function of COC characteristics, soil conditions, and annual rainfall infiltration. Cross-media transfer equations incorporated in the RBCA Spreadsheet System are presented in Figure A.3 beginning on Page A-11. Detailed discussion of each of these cross-media factors is provided below.



APPENDIX A: RBCA SPREADSHEET SYSTEM AND MODELING GUIDELINES

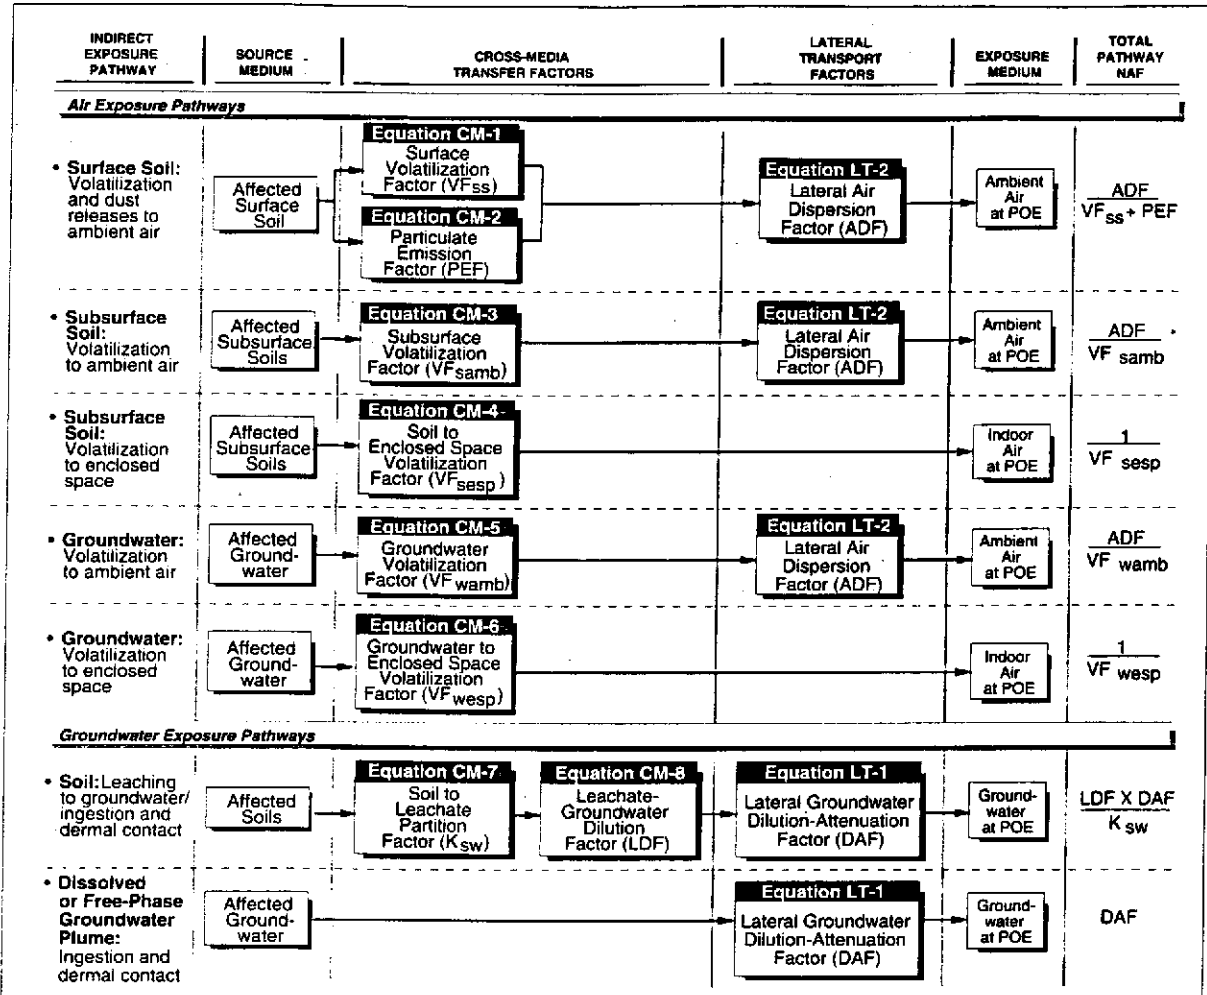

Tier 2  
RBCA

A-7

FIGURE A.2. NAF CALCULATION SCHEMATIC FOR INDIRECT EXPOSURE PATHWAYS IN RBCA SPREADSHEET SYSTEM

• **VF<sub>ss</sub>: Surface Soil Volatilization Factor (Equation CM-1)**

The surface volatilization factor is the steady-state ratio of the concentration of an organic constituent in the ambient air breathing zone to the source concentration in the surface soil. The surface volatilization factor incorporates two cross-media transfer elements: i) organic vapor flux from the surface soil mass to ground surface and ii) mixing of soil vapors in the ambient air breathing zone directly over the affected surface soil. For each site, the applicable VF<sub>ss</sub> value corresponds to the lesser result of two calculation methods (termed CM-1a and CM-1b on Figure A.3, page A-11). Equation CM-1a typically controls for low-volatility organics, as it assumes there is an infinite source of organics in the surface soils and uses a volatilization rate based primarily on chemical properties. Equation CM-1b, which typically controls for volatile organics, is based on a mass balance approach. In this equation, a finite amount of organics is assumed to be present in the surface soil (based on the representative COC concentration), volatilizing at a constant rate over the duration of the exposure period (e.g., 25-30 years). Both expressions account for the dilution of organics in ambient air above the source zone due to mixing with ambient air moving across the site. A simple box model is used for this dilution calculation, based on the following adjustable default assumptions: 2-meter mixing zone height and 225 cm/sec (5 mph) lateral wind speed. The length of the mixing zone is set equal to the lateral dimension of the exposed affected surface soil area parallel to the assumed wind direction.

Key assumptions used in this model and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: $VF_{ss}$	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li>• <b>Uniform COC Concentrations:</b> Constituent levels uniformly distributed in soil and constant over exposure period.</li> </ul>	-----
<ul style="list-style-type: none"> <li>• <b>No COC Decay:</b> No biodegradation or other loss mechanism in soil or vapor phase.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Finite Source Term:</b> Source term mass adjusted for constant volatilization over exposure period.</li> </ul>	-----

• **PEF: Soil Particulate Emission Factor (Equation CM-2)**

The Particulate Emission Factor (PEF) is the steady-state ratio of the concentration of organics in particulates in the ambient air breathing zone to the source concentration of organics in the surface soil. The factor incorporates two cross-media transfer elements: i) the release rate of soil particulates (dust) from ground surface and ii) mixing of these particulates in the ambient air breathing zone directly over the affected surface soil. The particulate release rate is commonly matched to a conservative default value of  $6.9 \times 10^{-14}$  g/cm<sup>2</sup>-sec (approximately 0.2 lbs/acre-year), unless a more appropriate site-specific estimate is available. (If the site is paved, the particulate release rate and resultant PEF value for the covered soil area will be zero.) Particulates are assumed to be diluted by lateral air flow directly over the source zone. For this purpose, a simple box model is employed, based on the following adjustable default assumptions: 2-meter mixing zone height and 225 cm/sec (5 mph) lateral wind speed. The length of the mixing zone is matched to the lateral dimension of the exposed affected surface soil area parallel to the assumed wind direction.

Key assumptions incorporated in this model and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: PEF	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li>• <b>Uniform COC Concentrations:</b> Constituent levels uniformly distributed in soil and constant over exposure period.</li> </ul>	-----
<ul style="list-style-type: none"> <li>• <b>No COC Decay:</b> No biodegradation or other loss mechanism in soil or vapor phase.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Default Emission Rate:</b> Conservative particulate emission rate.</li> </ul>	↓

•  **$VF_{samb}$ : Subsurface Soil Volatilization Factor (Equation CM-3)**

The subsurface soil volatilization factor is comparable to the surface volatilization equation, except that the algorithm has been adjusted to account for vapor flux from greater soil depths. The volatilization factor accounts for two cross-media transfer elements: i) organic vapor flux from the subsurface affected soil mass to ground surface and ii) mixing of soil vapors in the ambient air breathing zone directly over the affected soil zone. As with the surface soil volatilization factor,  $VF_{ss}$ , the applicable subsurface soil volatilization factor,  $VF_{samb}$ , corresponds to the lesser result of two calculation methods (termed CM-3a and CM-3b on Figure A.3, page A-12). Equation CM-3a, which corresponds to the expression given in Appendix X.2 of ASTM E-1739, assumes a constant source mass in the subsurface and can severely overpredict the soil vapor flux rate. To correct for this problem, Equation CM-3b, which accounts for a mass balance of the volatilized source mass over the exposure period (similar to Equation CM-1b) has been incorporated in the RBCA Spreadsheet. With either equation (CM-3a or CM 3-b), dilution of soil vapors in the ambient air breathing zone is estimated using the same box model described for Equation CM-1.

Key assumptions incorporated in this model and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: $VF_{samb}$	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li><b>Uniform COC Concentrations:</b> Constituent levels uniformly distributed in soil and constant over exposure period.</li> <li><b>No COC Decay:</b> No biodegradation or other loss mechanism in soil or vapor phase.</li> <li><b>Finite Source Term:</b> Source term mass adjusted for constant volatilization over exposure period.</li> </ul>	<p>-----</p> <p>↓</p> <p>-----</p>

•  $VF_{seps}$ : **Subsurface Soil-to-Enclosed-Space Volatilization Factor (Equation CM-4)**

This factor is the steady-state ratio of the source concentration of an organic constituent in indoor air due to the concentration in underlying subsurface soils. Again, two expressions are evaluated: i) Equation CM-4a, which assumes an infinite source mass and is of the same form as Equation CM-3a with a term added to represent diffusion through cracks in the foundation of the building, and ii) Equation CM-4b which accounts for a finite source mass volatilizing at a constant rate over the exposure period. The applicable  $VF_{seps}$  value corresponds to the lesser of these two expressions. The soil-to-enclosed-space volatilization factor incorporates two cross-media transfer elements: i) organic vapor flux from the underlying soil mass through the building floor and ii) mixing of soil vapors with indoor air. Tier 1 default assumptions in the software include: i) a 1% open crack space in the foundation allowing vapors to diffuse into the building and ii) a building air exchange rate of one exchange every 20 days. When used with these default values, the expression yields very conservative results and can represent the controlling pathway for SSTL calculations for many sites. In such case, users are advised to conduct direct air or soil vapor measurements prior to proceeding with remedial measures for this pathway.

**Tier 2**  
RBCA

A-9

Key assumptions used in this model and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: $VF_{seps}$	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li><b>Uniform COC Concentrations:</b> Constituent levels uniformly distributed in soil and constant over exposure period.</li> <li><b>No COC Decay:</b> No biodegradation or other loss mechanism in soil or vapor phase.</li> <li><b>Finite Source Term:</b> Source term mass adjusted for constant volatilization over exposure period.</li> <li><b>Default Building Parameters:</b> Conservative default values for foundation crack area and air exchange rate.</li> </ul>	<p>-----</p> <p>↓</p> <p>-----</p> <p>↓</p>

•  $VF_{wamb}$ : **Groundwater Volatilization Factor (Equation CM-5)**

The groundwater volatilization factor is the steady-state ratio of the concentration of an organic constituent in ambient air to the source concentration in underlying affected groundwater. Vapor flux rates from groundwater to soil vapor and thence from soil vapor to ground surface are generally lower than those associated with direct volatilization from affected soils. Consequently, this groundwater-to-ambient-air volatilization factor is typically not significant in comparison to soil volatilization factors (i.e., Equations CM-1 or CM-3). This factor accounts for i) steady-state partitioning of dissolved organic constituents from groundwater to the soil vapor phase, ii) soil vapor flux rates to ground surface, and iii) mixing of soil vapors in the ambient air breathing zone directly over the plume. Dilution of organic vapors in the breathing zone is estimated using a box model, as described for Equation CM-1 above.

Key assumptions incorporated in this model and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: $VF_{wamb}$	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li>• <b>Vapor Equilibrium:</b> Soil vapor concentrations reach immediate equilibrium with groundwater source.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>No COC Decay:</b> No biodegradation or other loss mechanism in groundwater or vapor phase.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Infinite Source:</b> COC mass in source term constant over time.</li> </ul>	↓

•  $VF_{wesp}$ : **Groundwater to Enclosed Space Volatilization Factor (Equation CM-6)**

This factor is the steady-state ratio of the concentration of an organic constituent in indoor air to the source concentration in the underlying affected groundwater. The algorithm is equivalent to Equation CM-5, modified to address vapor diffusion through a building floor and enclosed space accumulation. Tier 1 default values are the same as those specified for Equation CM-4 and, as noted previously, can provide a relatively conservative (upper-range) estimate of indoor vapor concentrations. If this pathway produces the controlling (minimum) RBSL or SSTL value for a given site, the user is advised to conduct direct air or soil vapor measurements to evaluate the actual need for remedial measures.

Key assumptions used in this model and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: $VF_{wesp}$	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li>• <b>Vapor Equilibrium:</b> Soil vapor concentrations reach immediate equilibrium with groundwater source.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>No COC Decay:</b> No biodegradation or other loss mechanism in groundwater or vapor phase.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Infinite Source:</b> COC mass in source term constant over time.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Default Building Factors:</b> Conservative default values for foundation crack area and air exchange rate.</li> </ul>	↓

•  $K_{sw}$ : **Soil Leachate Partition Factor (Equation CM-7)**

The soil leachate partition factor is the steady-state ratio between the concentration of an organic constituent in soil pore water and the source concentration on the affected soil mass. This factor is used to represent the release of soil constituents to leachate percolating through the affected soil zone.

Key assumptions used in this equation and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: $K_{sw}$	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li>• <b>Leachate Equilibrium:</b> Leachate concentrations reach immediate equilibrium with affected soil source.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>No COC Decay:</b> No biodegradation or other loss mechanism in soil or leachate.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Infinite Source:</b> COC mass in soil constant over time.</li> </ul>	↓

Tier2  
RBCA

A-10

**LDF: Leachate-Groundwater Dilution Factor (Equation CM-8)**

The LDF factor accounts for dilution of organics as leachate from the overlying affected soil zone mixes with groundwater in the underlying water-bearing unit. As indicated on Figure A.2, the leachate dilution factor (LDF) divided by the soil-leachate partition factor ( $K_{sw}$ ) represents the steady-state ratio between the concentration of an organic constituent in the groundwater zone and the source concentration on the overlying affected soil. To estimate the leachate dilution factor, a simple box model is used to estimate mass dilution within a mixing zone in the water-bearing unit directly beneath the affected soil mass (see Equation CM-8, Figure A.3 on page A-13). The leachate volume entering the water-bearing unit is represented by the deep infiltration term,  $I$ , which typically falls in the range of 0.5% - 5% of annual site precipitation. For the Tier 1 RBSL calculation, a conservative default infiltration value of 30 cm/year is used, consistent with the example provided in ASTM E-1739, Appendix X.2. For many sites, this default value (equivalent to an annual rainfall rate of over 200 in/year) may significantly overestimate actual leachate rates.

Key assumptions used in this equation and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: LDF	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li><b>Rainfall Infiltration:</b> Deep percolation through affected soil assumed to reach water-bearing unit regardless of soil thickness or permeability.</li> </ul>	↓
<ul style="list-style-type: none"> <li><b>No COC Decay:</b> No biodegradation or other loss in mechanism groundwater zone.</li> </ul>	↓
<ul style="list-style-type: none"> <li><b>Default Dilution Parameters:</b> Conservative default value for infiltration rate.</li> </ul>	↓

**Tier 2**  
**RBCA**

A-11


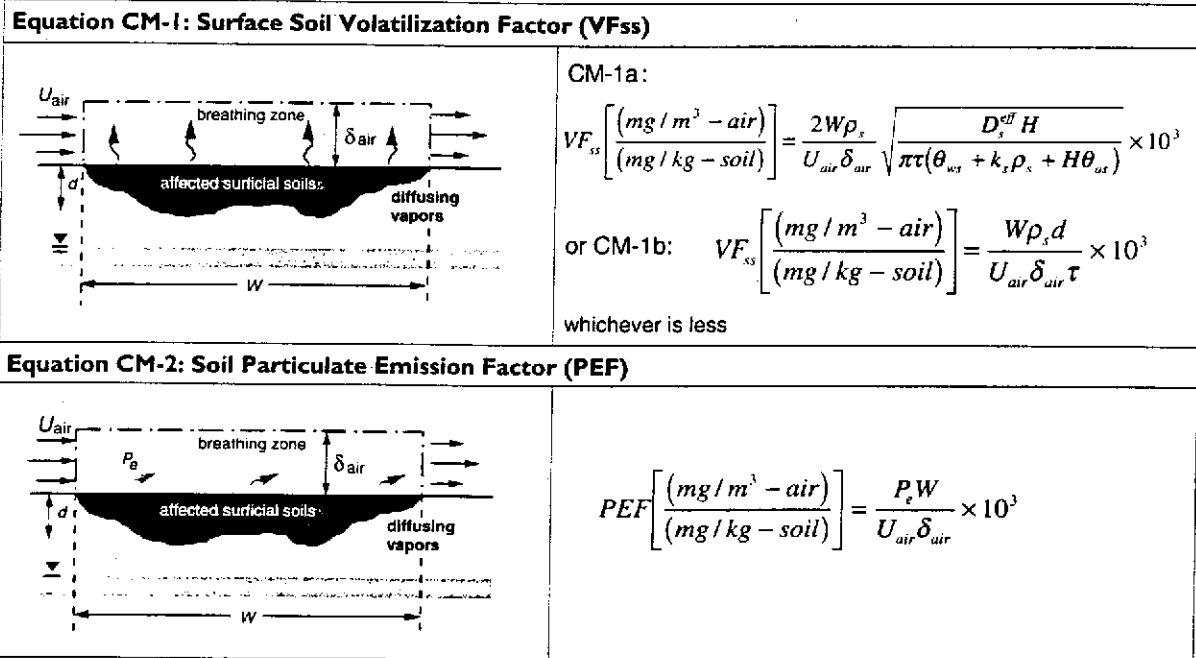


FIGURE A.3 CROSS-MEDIA PARTITIONING EQUATIONS IN THE RBCA SPREADSHEET SYSTEM

Continued

Continued

**Equation CM-3: Subsurface Soil Volatilization Factor (VF<sub>samb</sub>)**

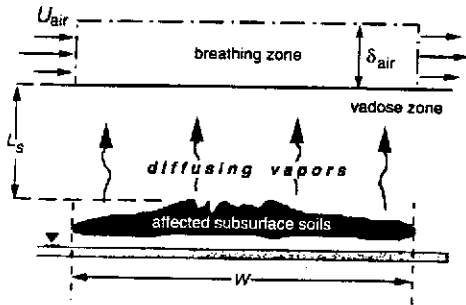

CM-3a:


$$VF_{samb} \left[ \frac{(mg/m^3 - air)}{(mg/kg - soil)} \right] = \frac{H\rho_s}{[\theta_{ws} + k_s\rho_s + H\theta_{as}] \left[ 1 + \frac{U_{air}\delta_{air}L_s}{D_s^{eff}W} \right]} \times 10^3$$

or CM-3b:

$$VF_{samb} \left[ \frac{(mg/m^3 - air)}{(mg/kg - soil)} \right] = \frac{W\rho_s d_s}{U_{air}\delta_{air}\tau} \times 10^3$$

whichever is less

**Equation CM-4: Subsurface Soil to Enclosed Space Volatilization Factor (VF<sub>seesp</sub>)**

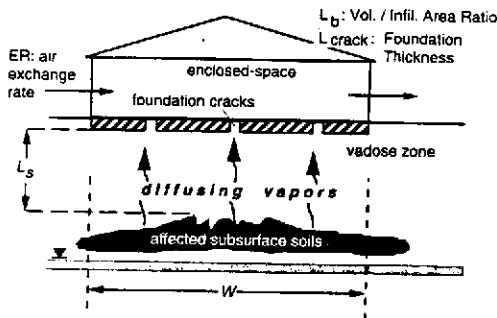

CM-4a:


$$VF_{seesp} \left[ \frac{(mg/m^3 - air)}{(mg/kg - soil)} \right] = \frac{H\rho_s \left[ \frac{D_s^{eff}}{ER L_B} \right]}{1 + \left[ \frac{D_s^{eff}}{ER L_B} \right] + \left[ \frac{D_s^{eff}}{(D_{crack}^{eff}/L_{crack})\eta} \right]} \times 10^3$$

or CM-4b:

$$VF_{seesp} \left[ \frac{(mg/m^3 - air)}{(mg/kg - soil)} \right] = \frac{\rho_s d_s}{L_B ER \tau} \times 10^3$$


whichever is less

**Equation CM-5: Groundwater Volatilization Factor (VF<sub>wamb</sub>)**

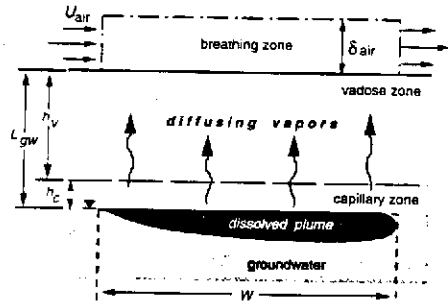

$$VF_{wamb} \left[ \frac{(mg/m^3 - air)}{(mg/L - H_2O)} \right] = \frac{H}{1 + \left[ \frac{U_{air}\delta_{air}L_{GW}}{WD_{ws}^{eff}} \right]} \times 10^3$$

**Equation CM-6: Groundwater to Enclosed Space Volatilization Factor (VF<sub>wesp</sub>)**

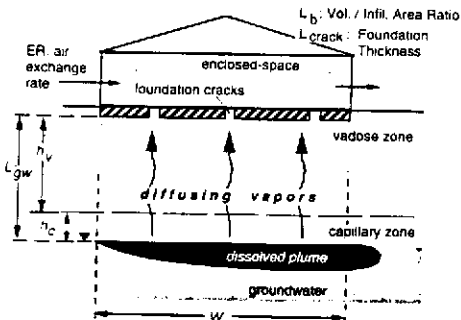

$$VF_{wesp} \left[ \frac{(mg/m^3 - air)}{(mg/L - H_2O)} \right] = \frac{H \left[ \frac{D_{ws}^{eff}}{ER L_B} \right]}{1 + \left[ \frac{D_{ws}^{eff}}{ER L_B} \right] + \left[ \frac{D_{ws}^{eff}}{(D_{crack}^{eff}/L_{crack})\eta} \right]} \times 10^3$$

FIGURE A.3 CROSS-MEDIA PARTITIONING EQUATIONS IN THE RBCA SPREADSHEET SYSTEM

Continued


Tier 2  
RBCA

A-12

Continued

Equation CM-7: Soil Leachate Partition Factor(K<sub>sw</sub>)

Equation CM-8: Leachate-Groundwater Dilution Factor (LDF)

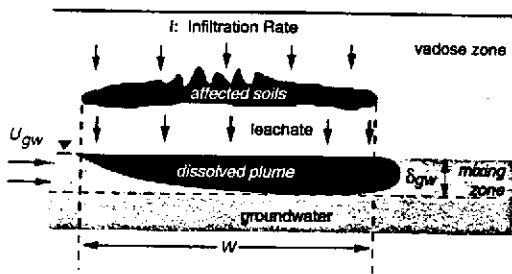

$$K_{sw} \left[ \frac{(mg/L - H_2O)}{(mg/kg - soil)} \right] = \frac{\rho_s}{\theta_{ws} + k_s \rho_s + H \theta_{as}}$$

$$LDF [dimensionless] = 1 + \frac{V_{gw} \delta_{gw}}{IW}$$

Definitions for Cross-Media Transfer Equations

$D_s^{eff}$  Effective diffusivity in vadose zone soils:

$$D_s^{eff} \left[ \frac{cm^2}{s} \right] = D^{air} \frac{\theta_{as}^{3.33}}{\theta_T^2} + \left[ \frac{D^{wat}}{H} \right] \left[ \frac{\theta_{ws}^{3.33}}{\theta_T^2} \right]$$

$D_{ws}^{eff}$  Effective diffusivity above the water table:

$$D_{ws}^{eff} \left[ \frac{cm^2}{s} \right] = \left( h_{cap} + h_v \right) \left[ \frac{h_{cap}}{D_{cap}^{eff}} + \frac{h_v}{D_s^{eff}} \right]^{-1}$$

- d Lower depth of surficial soil zone (cm)
- d<sub>s</sub> Thickness of affected subsurface soils
- D<sup>air</sup> Diffusion coefficient in air (cm<sup>2</sup>/s)
- D<sup>wat</sup> Diffusion coefficient in water (cm<sup>2</sup>/s)
- ER Enclosed-space air exchange rate (L/s)
- f<sub>oc</sub> Fraction of organic carbon in soil (g-C/g-soil)
- H Henry's law constant (cm<sup>3</sup>-H<sub>2</sub>O)/(cm<sup>3</sup>-air)
- h<sub>cap</sub> Thickness of capillary fringe (cm)
- h<sub>v</sub> Thickness of vadose zone (cm)
- I Infiltration rate of water through soil (cm/year)
- k<sub>oc</sub> Carbon-water sorption coefficient (g-H<sub>2</sub>O/g-C)
- k<sub>s</sub> Soil-water sorption coefficient (g-H<sub>2</sub>O/g-soil)
- I<sub>B</sub> Enclosed space volume/infiltration area ratio (cm)
- L<sub>crack</sub> Enclosed space foundation or wall thickness (cm)
- L<sub>GW</sub> Depth to groundwater = h<sub>cap</sub> + h<sub>v</sub> (cm)
- L<sub>s</sub> Depth to subsurface soil sources (cm)
- P<sub>e</sub> Particulate emission rate (g/cm<sup>2</sup>-s)
- U<sub>air</sub> Wind speed above ground surface in ambient mixing zone (cm/s)
- V<sub>gw</sub> Groundwater Darcy velocity (cm/s)

$D_{crack}^{eff}$  Effective diffusivity through foundation cracks:

$$D_{crack}^{eff} \left[ \frac{cm^2}{s} \right] = D^{air} \frac{\theta_{acrack}^{3.33}}{\theta_T^2} + \left[ \frac{D^{wat}}{H} \right] \left[ \frac{\theta_{wcrack}^{3.33}}{\theta_T^2} \right]$$

$D_{cap}^{eff}$  Effective diffusivity in the capillary zone:

$$D_{cap}^{eff} \left[ \frac{cm^2}{s} \right] = D^{air} \frac{\theta_{acap}^{3.33}}{\theta_T^2} + \left[ \frac{D^{wat}}{H} \right] \left[ \frac{\theta_{wcap}^{3.33}}{\theta_T^2} \right]$$

- W Width of source area parallel to wind, or groundwater flow direction (cm)
- δ<sub>air</sub> Ambient air mixing zone height (cm)
- δ<sub>gw</sub> Groundwater mixing zone thickness (cm)
- η Areal fraction of cracks in foundations/walls (cm<sup>2</sup>-cracks/cm<sup>2</sup>-total area)
- θ<sub>acap</sub> Volumetric air content in capillary fringe soils (cm<sup>3</sup>-air/cm<sup>3</sup>-soil)
- θ<sub>acrack</sub> Volumetric air content in foundation/wall cracks (cm<sup>3</sup>-air/cm<sup>3</sup>-total volume)
- θ<sub>as</sub> Volumetric air content in vadose zone soils (cm<sup>3</sup>-air/cm<sup>3</sup>-soil)
- θ<sub>T</sub> Total soil porosity (cm<sup>3</sup>-pore-space/cm<sup>3</sup>-soil)
- θ<sub>wcap</sub> Volumetric water content in capillary fringe soils (cm<sup>3</sup>-H<sub>2</sub>O/cm<sup>3</sup>-soil)
- θ<sub>wcrack</sub> Volumetric water content in foundation/wall cracks (cm<sup>3</sup>-H<sub>2</sub>O/cm<sup>3</sup>-total volume)
- θ<sub>ws</sub> Volumetric water content in vadose zone soils (cm<sup>3</sup>-H<sub>2</sub>O/cm<sup>3</sup>-soil)
- ρ<sub>s</sub> Soil bulk density (g-soil/cm<sup>3</sup>-soil)
- τ Averaging time for vapor flux (s)

FIGURE A.3 CROSS-MEDIA PARTITIONING EQUATIONS IN THE RBCA SPREADSHEET SYSTEM

LATERAL TRANSPORT FACTORS

During lateral transport within air or groundwater, COC concentrations in the flow stream will be diminished due to mixing and attenuation effects (see Figure A.2). Site-specific attenuation factors

**LATERAL TRANSPORT FACTORS**

During lateral transport within air or groundwater, COC concentrations in the flow stream will be diminished due to mixing and attenuation effects (see Figure A.2). Site-specific attenuation factors characterizing COC mass dilution or loss during lateral transport can be estimated using the air dispersion and groundwater transport models provided in the RBCA Spreadsheet System. Equations for the steady-state analytical transport models incorporated in the RBCA spreadsheet are shown on Figure A.4. The user must provide information regarding COC properties and transport parameters (flow velocities, dispersion coefficients, retardation factors, decay factors, etc.), as required for the selected contaminant transport model. Calculation procedures for lateral air dispersion and groundwater dilution-attenuation factors are described below.

- **DAF: Lateral Groundwater Dilution Attenuation Factor (Equation LT-1)**

To account for attenuation of affected groundwater concentrations between the source and POE, the Domenico analytical solute transport model has been incorporated into the RBCA software. This model uses a partially or completely penetrating vertical plane source, perpendicular to groundwater flow, to simulate the release of organics from the mixing zone to the moving groundwater (see Figure A.4). Within the groundwater flow regime, the model accounts for the effects of advection, dispersion, sorption, and biodegradation. Given a representative source zone concentration for each COC, the model can predict steady-state plume concentrations at any point (x, y, z) in the downgradient flow system. In the RBCA Spreadsheet System, the model is set to predict centerline plume concentrations at any downgradient distance x, based on 1-D advective flow and 3-D dispersion. The receptor well is assumed to be located on the plume centerline, directly downgradient of the source zone at a location specified by the user. Source concentrations and critical flow parameters must be provided by the user. Guidelines for selection of key input parameters are outlined below.


- i) **Groundwater Source Term.** The Domenico model represents the groundwater source term as a vertical plane source, perpendicular to groundwater flow, releasing dissolved constituents into groundwater passing through the plane. In the RBCA Spreadsheet System, the source plane dimensions are matched to the source width and thickness specified by the user. The user should provide source dimensions equivalent to the measured thickness and transverse width of the groundwater plume at the source point (area of maximum plume concentration). The source is assumed to be infinite and constant, with source zone concentrations set equal to the representative COC concentrations supplied by the user. Representative source concentrations must be provided for each COC. As indicated on Table 6 in Volume 1, Section 3.0, of this manual, these values should correspond to the maximum COC concentrations measured at the plume "hot spot" unless sufficient data are available to facilitate use of other statistical estimates. If non-aqueous phase liquids (NAPLs) are present, maximum COC solubility limits in groundwater can be corrected for mixture effects by using Raoult's Law (see References 18 and 24, Section 5.0, Volume 1). For this purpose, the user must provide data regarding the mole fractions of principal NAPL constituents.
- ii) **Flow and Mixing Parameters.** The degree of contaminant mixing predicted by the model will be a function of the dispersion coefficients, hydraulic conductivity, hydraulic flow gradient, and effective soil porosity specified by the user. Hydraulic conductivity and flow gradient should be matched directly to site measurements. In many cases, the effective soil porosity of the water-bearing unit can be reasonably estimated based on soil type using published references. Typical default values are provided in the software.

**Tier 2**  
RBCA

A-14



**Equation LT- 1: Lateral Groundwater Dilution Attenuation Factor**

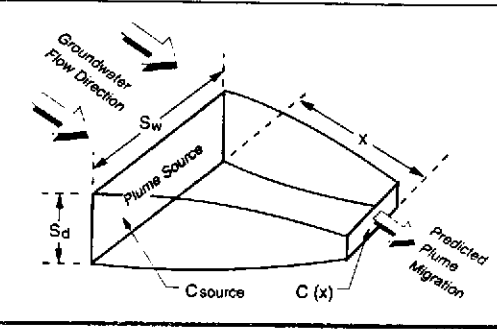

LT-1a: Solute Transport with First-Order Decay:


$$\frac{C(x)_i}{C_{si}} = \exp\left(\frac{x}{2\alpha_x} \left[1 - \sqrt{1 + \frac{4\lambda_i \alpha_x R_i}{v}}\right]\right) \operatorname{erf}\left(\frac{S_w}{4\sqrt{\alpha_y x}}\right) \operatorname{erf}\left(\frac{S_d}{4\sqrt{\alpha_z x}}\right)$$

where:  $v = \frac{K \cdot i}{\theta_e}$


LT-1b: Solute Transport with Biodegradation by Electron-Acceptor Superposition Method:

$$C(x)_i = \left[ (C_{si} + BC_i) \operatorname{erf}\left(\frac{S_w}{4\sqrt{\alpha_y x}}\right) \operatorname{erf}\left(\frac{S_d}{4\sqrt{\alpha_z x}}\right) \right] - BC_i$$

where:  $BC_i = BC_T \times \frac{C_{si}}{\sum C_{si}}$  and  $BC_T = \sum \frac{C(ea)_n}{UF_n}$



**Equation LT-2: Lateral Air Dispersion Factor**

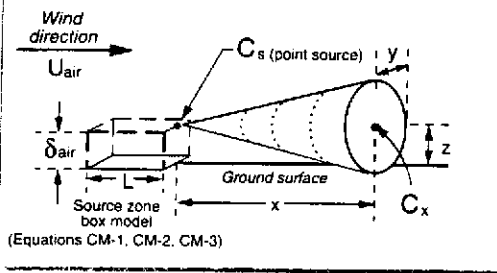

$$\frac{C(x)_i}{C_{si}} = \frac{Q}{2\pi U_{air} \sigma_y \sigma_z} \times \exp\left(-\frac{y^2}{2\sigma_y^2}\right) \left( \exp\left(-\frac{(z - \delta_{air})^2}{2\sigma_z^2}\right) + \exp\left(-\frac{(z + \delta_{air})^2}{2\sigma_z^2}\right) \right)$$

where:  $Q = \frac{U_{air}(\delta_{air})(A)}{L}$



**Definitions for Lateral Transport Equations**

$C(x)_i$	Concentration of constituent $i$ at distance $x$ downstream of source (mg/L) or (mg/m <sup>3</sup> )	$\lambda_i$	First-Order Degradation Rate (day <sup>-1</sup> ) for constituent $i$
$C_{si}$	Concentration of constituent $i$ in Source Zone (mg/L) or (mg/m <sup>3</sup> )	$v$	Groundwater Seepage Velocity (cm/day)
$BC_i$	Biodegradation capacity available for constituent $i$	$K$	Hydraulic Conductivity (cm/day)
$BC_T$	Total biodegradation capacity of all electron acceptors in groundwater	$R_i$	Constituent retardation factor
$C(ea)_n$	Concentration of electron acceptor $n$ in groundwater	$i$	Hydraulic Gradient (cm/cm)
$UF_n$	Utilization factor for electron acceptor $n$ (i.e., mass ratio of electron acceptor to hydrocarbon consumed in biodegradation reaction)	$S_w$	Source Width (cm)
$x$	Distance downgradient of source (cm)	$S_d$	Source Depth (cm)
$\alpha_x$	Longitudinal groundwater dispersivity (cm)	$\delta_{air}$	Ambient air mixing zone height (cm)
$\alpha_y$	Transverse groundwater dispersivity (cm)	$Q$	Air volumetric flow rate through mixing zone (cm <sup>3</sup> /s)
$\alpha_z$	Vertical groundwater dispersivity (cm)	$U_{air}$	Wind Speed (cm/sec)
$\theta_e$	Effective Soil Porosity	$\sigma_y$	Transverse air dispersion coefficient (cm)
		$\sigma_z$	Vertical air dispersion coefficient (cm)
		$y$	Lateral Distance From source zone (cm)
		$z$	Height of Breathing Zone (assumed equal to $\delta_{air}$ ) (cm)
		$A$	Cross Sectional Area of Air Emissions Source (cm <sup>2</sup> )
		$L$	Length of Air Emissions source (cm) parallel to wind direction

FIGURE A.4 LATERAL TRANSPORT EQUATIONS IN THE RBCA SPREADSHEET SYSTEM

Selection of dispersion coefficients can prove problematic, given the impracticability of direct site measurements. Conservative practice calls for setting the longitudinal dispersivity,  $\alpha_x$  (units of length), equal to 0.1 times the advective plume length from source to receptor; the transverse dispersivity,  $\alpha_y$  equal to 0.33 times  $\alpha_x$ ; and the vertical dispersivity,  $\alpha_z$ , equal to 0.05 times  $\alpha_x$  (see References 17 and 28, Section 5.0, Volume 1). This fixed relationship is incorporated in the RBCA spreadsheet, allowing the user to calculate dispersion coefficients based on the distance from the source to the receptor.

- iii) **Retardation Factors.** The rate of plume migration can be reduced due to constituent sorption to the solid matrix of the water-bearing unit. The user is referred to standard hydrogeologic texts regarding calculation of retardation factors for both inorganic and organic plume constituents (see Reference 18 and 24, Section 5.0, Volume 1). The RBCA software calculates a retardation factor for each COC using information on the organic-carbon partition coefficient ( $K_{OC}$ ) of the constituent and the fraction organic carbon (foc) of the soil matrix. Sorption can significantly affect the NAF calculation if first-order decay conditions are assumed to apply. However, the retardation factor will not affect model results under constant source, steady-state conditions in the absence of first-order decay.
- iv) **First-Order Decay Parameters.** Under steady-state conditions, hydrolysis and biodegradation represent the principal mechanisms of organic contaminant mass reduction during groundwater plume transport within the subsurface. Many groundwater transport models account for these attenuation phenomena by means of a first-order decay function within the advection-dispersion equation. In the RBCA Spreadsheet System, the user may elect to use a version of the Domenico solute transport model incorporating first-order decay (see Equation LT-1a on Figure A.4 and Screen 9 of software). Considerable care must be exercised in the selection of a first-order decay coefficient for each COC, however, in order to avoid significantly over-predicting or under-predicting actual decay rates. Optional methods for selection of appropriate decay coefficients are as follows:

**Literature Values:** Various published references are available regarding decay half-life values for hydrolysis and biodegradation (see References 36 and 37, Section 5.0, Volume 1). The chemical / toxicological database incorporated in the RBCA Spreadsheet System includes minimum published decay rate coefficients (representing maximum decay half-lives) for each chemical, and the user may select to load these or other input values on Screens 9 and 9.1 of the software. Use of these first-order decay coefficients will generally provide a conservative result (i.e., predict worst-case exposure concentrations and more stringent cleanup standards).

**Calibrate to Existing Plume Data with RBCA Software:** If the plume is in a steady-state or diminishing condition, the Domenico model can be used to determine first-order decay coefficients that best match the observed site concentrations. The user may adopt a trial-and-error procedure with the RBCA Spreadsheet using the *Alternate POC Action Level* worksheet (see Screen 11 of software) to derive a best-fit decay coefficient value for each COC. For this purpose, with all other input parameters fixed, the decay-rate value for each COC should be individually adjusted until the ratio of i) the calculated action level concentration to ii) the actual COC measurement at each alternate point of compliance (APOC) location is relatively uniform among all APOCs (i.e., same ratio at each APOC). SSTL values calculated for these plume-matched decay values can then be used in the Tier 2 evaluation. Please note that, for expanding plumes, this steady-state calibration method may over-estimate actual decay-rate coefficients and contribute to an under-estimation of predicted POE concentration levels and baseline risks. Further guidelines for model calibration to existing data are provided in Reference 28, Section 5.0, Volume 1.

**Calibrate to Existing Plume Data with Alternate Model:** If desired, a more complex groundwater model may be used to characterize decay-rate coefficients under either steady-state, diminishing, or expanding plume conditions, and the resultant decay-rate values used

Tier2  
RBCA

A-16

indicates an expanding plume condition (or is insufficient to confirm a steady-state or diminishing condition), a transient flow model accounting for the time since the release occurred can be employed to more accurately estimate first-order decay terms, based on a best-fit match to site data. These estimated decay-rate coefficients can then be entered in the steady-state RBCA Spreadsheet model (Equation LT-1a) to predict chronic exposure and risk levels at the POE.

At low constituent concentrations and in low flowrate groundwater systems, groundwater transport models are particularly sensitive to first-order decay parameters. Consequently, care should be taken in selection of these values to ensure reliable modeling results. Because many biodegradation processes within the subsurface groundwater system are rate-limited based on the availability of electron acceptors (e.g., dissolved oxygen), first-order decay rate factors should not be transferred from the laboratory to the field, or from one field site to another, without consideration of key site conditions (e.g., background electron acceptor concentration in groundwater, COC source concentration, groundwater seepage velocity, etc.). In addition, for some organics (primarily chlorinated solvents), the user must consider the breakdown products (or progeny) of the hydrolysis or biodegradation process and select a decay rate coefficient that is representative of the full decay chain (i.e., from COC to non-hazardous progeny).

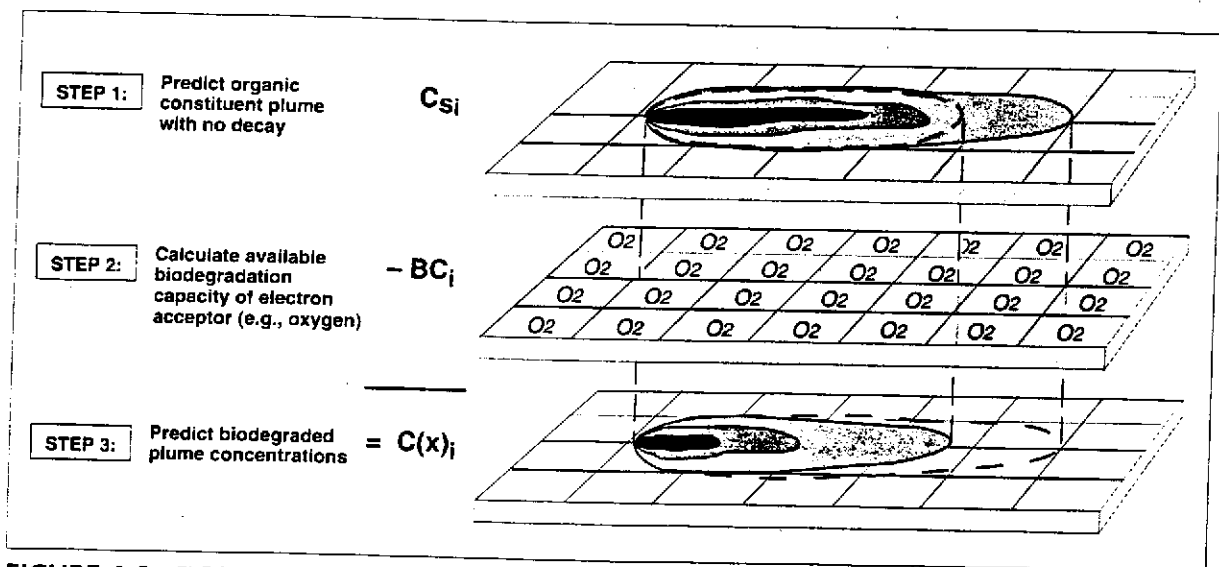


FIGURE A.5. ELECTRON ACCEPTOR SUPERPOSITION METHOD FOR SIMULATION OF GROUNDWATER CONTAMINANT BIODEGRADATION

- v) **Electron-Limited Biodegradation Rates.** As an alternative to a first-order decay function, the user may select a groundwater contaminant transport model incorporating a direct simulation of in-situ biodegradation processes. To account for stoichiometric constraints, such models commonly employ particle transport of both organic and electron acceptors with an instantaneous reaction assumption. Given proper characterization of background concentrations of key electron acceptors, source zone COC concentrations, and groundwater flow parameters, these models can generally be relied upon to provide a conservative estimate of biodegradation effects on organic plume concentrations at the POE, without the difficulty associated with selection of a site-specific, first-order decay rate.

For this purpose, the RBCA Spreadsheet System includes a version of the Domenico solute transport model incorporating an electron acceptor superposition algorithm (see Equation LT-1b on Figure A.4 and Screen 9 of the software). Based on the biodegradation capacity of electron acceptors present in the groundwater system, this algorithm will correct the non-decayed

groundwater plume concentrations predicted by the Domenico model for the effects of organic constituent biodegradation. This calculation procedure is illustrated on Figure A.5 and discussed in further detail below.

Based on the stoichiometric equation for the biodegradation reaction, a *utilization factor*, representing the ratio of electron acceptor mass to hydrocarbon mass consumed during biodegradation, can be defined for each electron acceptor. Utilization factors for the principal electron acceptors present in shallow groundwater systems, as reported in the research literature (see Reference 29b, Volume 1, Section 5.0), are summarized on Table A.1.

TABLE A.1 UTILIZATION FACTORS FOR SELECTED ELECTRON ACCEPTORS

ELECTRON ACCEPTOR	UTILIZATION FACTOR (gm/gm)
Oxygen	3.14
Nitrate	4.9
Ferrous Iron (for Ferric Iron)	21.8
Sulfate	4.6
Methane (for Carbon Dioxide)	0.78

Note: "Electron Acceptor" refers to actual electron acceptor or surrogate by-products. Utilization Factor represents the mass ratio of electron acceptor to hydrocarbon quantity consumed (gm/gm) in biodegradation reaction within groundwater.

Tier 2  
RBCA

A-18

Given these values, the potential contaminant mass removal or biodegradation capacity ( $BC_n$ ) of a given electron acceptor  $n$  can then be estimated as the concentration of that electron acceptor ( $C(ea)_n$ ) in the groundwater divided by its utilization factor ( $UF_n$ ). The total biodegradation capacity of the groundwater mass mixing with the contaminant plume is the sum of the individual capacities for each of the principal electron acceptors (i.e.,  $BC_T = \sum BC_n$  for  $n =$  oxygen, nitrate, iron, sulfate, etc.). Note that, in this process, *electron acceptors* are defined as three easily measured electron acceptors (dissolved oxygen, nitrate, and sulfate) and surrogate by-products for two other difficult-to-quantify electron acceptors (ferrous iron instead of ferric iron and methane instead of carbon dioxide). The concentrations of the actual electron acceptors are measured in background wells, while the concentration of the by-products are measured in the source zone. For this calculation, using the background concentration of each electron acceptor (oxygen, nitrate, sulfate) from outside the plume will provide an upperbound estimate of  $BC_T$ . For a lowerbound estimate, the calculation may be based upon the difference in the electron acceptor concentrations (oxygen, nitrate, sulfate) measured inside and outside the plume area (i.e.,  $C(ea)_{n-outside}$  minus  $C(ea)_{n-inside}$ ), thereby accounting for non-utilization of a portion of the electron acceptor mass.

The total biodegradation capacity of the groundwater mass must be distributed among the various organic constituents present in the dissolved contaminant plume. Compared to the rate of plume transport, biodegradation reactions occur relatively instantaneously upon mixing of a readily degradable organic plume (e.g., monoaromatic hydrocarbons) with the background electron acceptor mass. Given the relatively uniform rate of biodecay of the organic compounds typically present in petroleum hydrocarbon products, the portion of the total biodegradation capacity available for removal of each constituent  $i$  ( $BC_i$ ) can be estimated based on the mass percentage of each constituent in the plume (i.e.,  $BC_i = BC_T \cdot Cs_i / \sum Cs_i$ , where  $Cs_i =$  source concentration of constituent  $i$ ). This assumption will prove reasonable for mixtures of all-readily degradable compounds, due to the relatively uniform biokinetic rates within these groups. However, within mixed degradable and non-degradable constituent plumes (e.g., benzene with dichloroethane), the readily degradable compounds will actually consume a disproportionate share of the biodegradation capacity.

If the user elects to use the electron acceptor superposition option, the RBCA Spreadsheet System will i) estimate the total biodegradation capacity ( $BC_T$ ) of the groundwater mass based on the electron acceptor concentrations provided by the user (see Screen 9.1), ii) allocate an available biodegradation capacity ( $BC_i$ ) to each of the various dissolved organic constituents based on the concentration data provided by the user (see Screen 7), and iii) correct the steady-state plume concentrations predicted by the Domenico solute transport model for the effects of biodegradation using Equation LT-1b (see Figure A.4). Further information regarding the electron acceptor biodegradation algorithm is provided in References 19 and 29 (see Section 5.0, Volume 1).

Key assumptions used in the groundwater solute transport model and their effect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: LATERAL GROUNDWATER DAF	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li>• <b>Infinite Source:</b> Groundwater source term constant over time with no depletion.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Dispersion Coefficient:</b> Fixed proportions assumed among longitudinal, transverse, and vertical dispersion coefficients.</li> </ul>	---
<ul style="list-style-type: none"> <li>• <b>Receptor Location:</b> Downgradient receptor well assumed to be on plume centerline.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Biodegradation Rate:</b> High or low first-order of decay rate may be specified by user per site data.</li> </ul>	variable

Tier 2  
RBCA

A-19

• **ADF: Lateral Air Dispersion Factor (Equation LT-2)**

The RBCA software includes a 3-dimensional gaussian dispersion model to account for transport of air-borne contaminants from the source area to a downwind POE (see Equation LT-2 on Figure A.4). The model incorporates two conservative assumptions: i) a source zone height equivalent to the breathing zone and ii) a receptor located directly downwind of the source at all times. As indicated on Figure A.2, an effective pathway NAF value is calculated as the steady-state ratio between the ambient organic vapor or particulate concentration at the downwind POE and the source concentration in the on-site affected soil zone. The model requires input data for the affected soil zone dimensions and concentrations, wind speed, and horizontal and vertical air dispersion coefficients to compute the resulting COC concentrations in ambient air at the POE. Guidelines for estimating key input parameters are provided below:

- i) **Air Source Term:** In the RBCA Spreadsheet, the source term for the air dispersion model is matched to the ambient air vapor concentrations determined in accordance with the soil-to-air cross-media transfer equations CM-1, CM-2, and CM-3 shown on Figure A.3. Specifically, the source concentration for off-site vapor transport is equivalent to the vapor concentration exiting the box model for the surface soil and subsurface soil volatilization algorithms (see Figure A.3). The model assumes the source zone to be a point source (located in the center of the affected soil area) with the same mass flux as the entire affected soil zone. The off-site receptor is assumed to be located directly downwind of the source point for the full duration of the exposure period. To define the source term, the user must provide the same soil information as required for the volatilization factors (i.e., affected soil zone concentrations, dimensions, etc.).

Please note that for receptors located directly over or adjacent to the affected soil zone (i.e., inside the "mixing zone" for Equations CM-1, CM-2, or CM-3), the gaussian dispersion model is not needed and can be shut off by entering a value of zero for the distance from the source to the off-site receptor on Screen 3.2 of the RBCA Spreadsheet.

- ii) **Wind Speed:** Wind speed should be matched to the average annual wind speed through the mixing zone. The model assumes the wind direction to be in a straight line from the source to the specified POE at all times for the full duration of the exposure period. In the RBCA software, a default wind speed value of 225 cm/sec (~ 5 mph) is assumed unless the user enters a site-specific value.
- iii) **Air Dispersion Coefficients:** Estimating dispersion coefficients requires knowledge of the atmospheric stability class and the distance between the source and POE. Stability is an indicator of atmospheric turbulence and, at any one time, depends upon i) static stability (the change of temperature with height), ii) thermal turbulence (caused by ground heating), and iii) mechanical turbulence (a function of wind speed and roughness). The Pasquill-Gifford system for stability classification is summarized on Figure A.6. Corresponding horizontal and vertical dispersion coefficients for each class are provided on Figure A.7. Stability Class A, which represents extremely unstable air with a high potential for mixing, occurs under low wind conditions and high levels of incoming solar radiation. At the other extreme, Stability Classes E and F represent stable atmospheric conditions, with a lower potential for mixing, and occur with higher wind speeds and greater cloud cover (see Reference 21 in Volume 1, Section 5.0).

**Tier 2**  
**RBCA**

A-20

The stability class for a given site can vary with rapidly changing weather conditions. Long-term weather patterns can be characterized on the basis of STAR summaries, comprised of joint frequency distributions of stability class, wind direction, and wind speed, which are available from the National Climatic Data Center in Asheville, North Carolina. Comprehensive atmospheric dispersion models, such as the Industrial Source Complex Long-Term (ISCLT) model, can directly incorporate STAR data to predict constituent dispersion in any direction from the source area. However, due to the complexity and expense of this modeling effort, use of models such as the ISCLT would normally correspond to a Tier 3 evaluation under the RBCA process.

To facilitate a Tier 2 evaluation of downwind receptor impacts, the RBCA Spreadsheet employs a simple gaussian dispersion model to predict maximum exposure concentrations at the POE under steady-state conditions, incorporating the conservative receptor assumptions noted above. A reasonable estimate of downwind COC concentrations can be obtained by assuming a wind turbulence consistent with Stability Class C for the full exposure period. For most locations, Stability Class C (slightly unstable) is representative of average annual conditions over time and can be used to estimate typical dispersion coefficients. For convenience, the RBCA Spreadsheet will directly calculate dispersion coefficients corresponding to Stability Class C for use in the air transport model, based on data provided by the user (see Screen 8.3.1 of software). Note that, even when these average dispersion coefficients are employed, the exposure concentrations predicted by the RBCA Spreadsheet model are likely to be conservative, given that the POE is assumed to be located directly downwind of the source zone at all times during the exposure period.

Key assumptions incorporated in this model and their affect on the SSTL calculation are as follows:

KEY ASSUMPTIONS: LATERAL AIR DISPERSION FACTOR	EFFECT ON CLEANUP STANDARD
<ul style="list-style-type: none"> <li>• <b>Source Term:</b> Vapor source concentration based on steady-state, soil-to-air cross-media equations.</li> </ul>	↓
<ul style="list-style-type: none"> <li>• <b>Default Stability Class:</b> Default dispersion coefficients matched to Class C stability classification (slightly unstable).</li> </ul>	-----
<ul style="list-style-type: none"> <li>• <b>Receptor Location:</b> Receptor assumed to be located directly downwind of source zone at all times during exposure period.</li> </ul>	↓

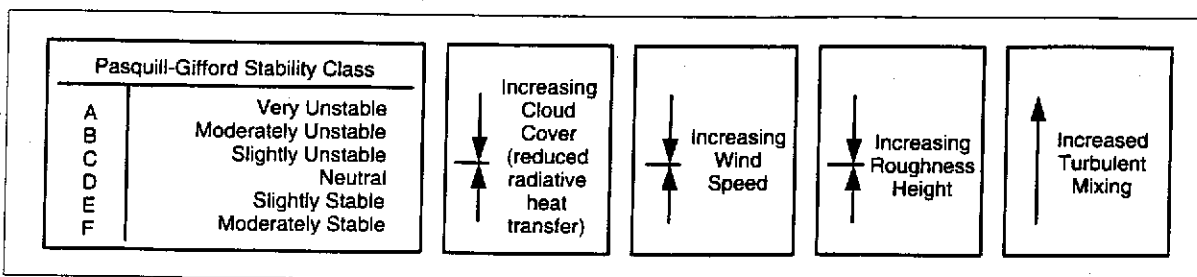


FIGURE A.6. STABILITY CLASSIFICATION FOR AIR TRANSPORT MODELING

SOURCE: DEVAULL ET AL, 1994

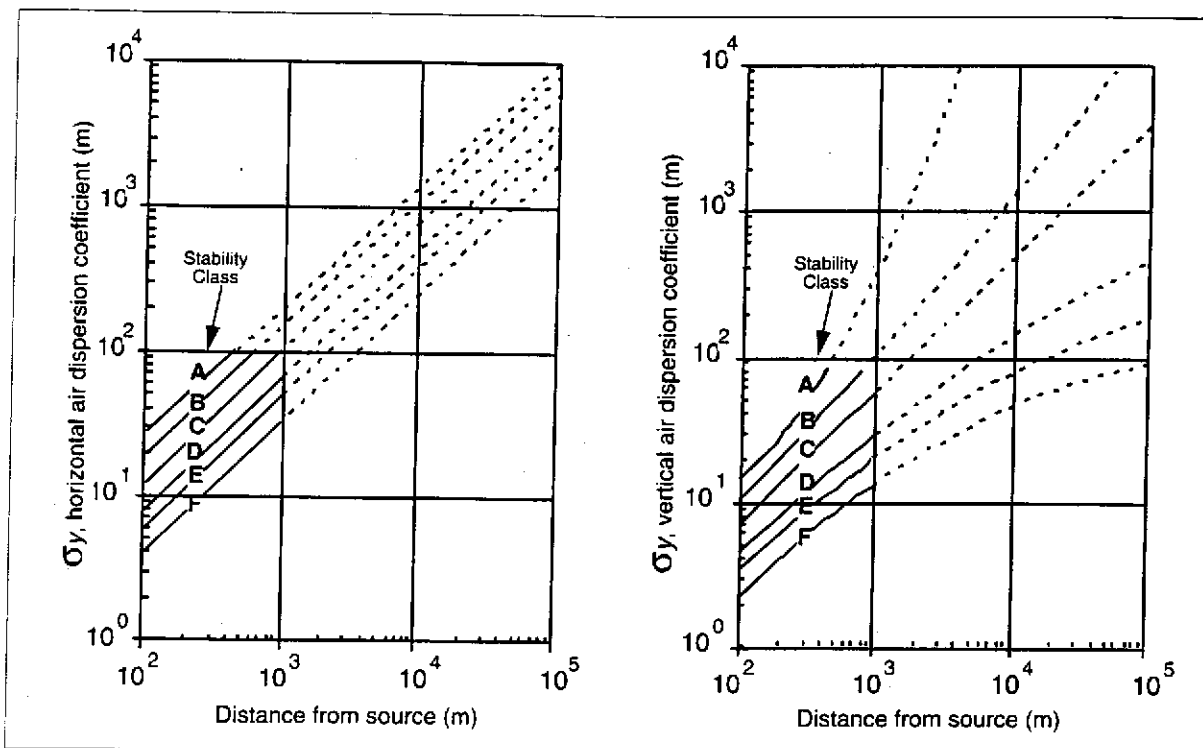


FIGURE A.7. DISPERSION COEFFICIENTS FOR AIR STABILITY CLASSIFICATIONS

SOURCE: EPA, 1988

Tier 2  
RBCA

A-21

## A.4 RBCA Spreadsheet System User's Guide

### GENERAL DESCRIPTION

The RBCA Spreadsheet System consists of a group of Microsoft® Excel worksheets integrated by an Excel macro interface. The worksheets and the macro are contained in a Microsoft Excel 5.0 workbook titled ASTMBCA.XLS. The software is designed to perform risk-based corrective action calculations for selected exposure pathways. Via the point-and-click interface, the user supplies critical information regarding source conditions, exposure pathways, transport mechanisms, and potential receptors. Based on this information, the Spreadsheet System calculates baseline risks and applicable soil and groundwater cleanup standards for each constituent of concern.

As a spreadsheet system, the program does not generate traditional input or output files. Rather all input parameters and calculation results are contained within integrated worksheets which can be saved, viewed on the screen, or selectively printed. Background information on parameter selection

**APPENDIX I**

**TIER 2 EVALUATION INPUTS SUMMARY AND RESULTS TABLES**



# RBCA TIER 1/TIER 2 EVALUATION

# Output Table 1

Site Name: Former Beacon #574 Job Identification: U065.02 Software: GSI RBCA Spreadsheet  
 Site Location: 22315 Redwood Road, Castroville Date Completed: 11/3/98 Version: 1.0.1  
 Completed By: Dale A. van Dam

NOTE: values which differ from Tier 1 default values are shown in bold italics and underlined.

Exposure Parameter	Definition (Units)	Residential			Commercial/Industrial		Surface Parameters		Residential	Constrctn	
		Adult	(1-5yrs)	(1-16 yrs)	Chronic	Constrctn	Definition (Units)	Value			
ATc	Averaging time for carcinogens (yr)	70					A	Contaminated soil area (cm <sup>2</sup> )	<u>8.9E+06</u>	1.0E+06	
ATn	Averaging time for non-carcinogens (yr)	30	6	16	25	1	W	Length of affect. soil parallel to wind (cm)	<u>2.4E+03</u>	1.0E+03	
BW	Body Weight (kg)	70	15	35	70		W.gw	Length of affect. soil parallel to groundwater (cm)	<u>3.7E+03</u>		
ED	Exposure Duration (yr)	30	6	16	25	1	Uair	Ambient air velocity in mixing zone (cm/s)	2.3E+02		
t	Averaging time for vapor flux (yr)	30			25	1	delta	Air mixing zone height (cm)	2.0E+02		
EF	Exposure Frequency (days/yr)	350			250	180	Lss	Thickness of affected surface soils (cm)	<u>1.5E+02</u>		
EF_Derm	Exposure Frequency for dermal exposure	350			250		Pe	Particulate areal emission rate (g/cm <sup>2</sup> /s)	6.9E-14		
IRgw	Ingestion Rate of Water (L/day)	2			1		<b>Groundwater Definition (Units)</b>				
IRs	Ingestion Rate of Soil (mg/day)	100	200		50	100	delta.gw	Groundwater mixing zone depth (cm)	2.0E+02		
IRadj	Adjusted soil ing. rate (mg-yr/kg-d)	1.1E+02			9.4E+01		I	Groundwater infiltration rate (cm/yr)	<u>7.6E+01</u>		
IRa.in	Inhalation rate indoor (m <sup>3</sup> /day)	15			20		Ugw	Groundwater Darcy velocity (cm/yr)	<u>8.0E+02</u>		
IRa.out	Inhalation rate outdoor (m <sup>3</sup> /day)	20			20	10	Ugw.tr	Groundwater seepage velocity (cm/yr)	<u>4.0E+03</u>		
SA	Skin surface area (dermal) (cm <sup>2</sup> )	5.8E+03		2.0E+03	5.8E+03	5.8E+03	Ks	Saturated hydraulic conductivity (cm/s)	2.5E-03		
SAadj	Adjusted dermal area (cm <sup>2</sup> -yr/kg)	2.1E+03			1.7E+03		grad	Groundwater gradient (cm/cm)	1.0E-02		
M	Soil to Skin adherence factor	1					Sw	Width of groundwater source zone (cm)	1.7E+03		
AAF.s	Age adjustment on soil ingestion	FALSE			FALSE		Sd	Depth of groundwater source zone (cm)	6.0E+02		
AAF.d	Age adjustment on skin surface area	FALSE			FALSE		phi.eff	Effective porosity in water-bearing unit	2.0E-01		
tox	Use EPA tox data for air (or PEL based)?	TRUE					foc.sat	Fraction organic carbon in water-bearing unit	1.0E-03		
gwMCL?	Use MCL as exposure limit in groundwater?	FALSE					BIO?	Is bioattenuation considered?	TRUE		
							BC	Biodegradation Capacity (mg/L)			
<b>Matrix of Exposed Persons to Complete Exposure Pathways</b>		<b>Residential</b>			<b>Commercial/Industrial</b>		<b>Soil</b>		<b>Value</b>		
<b>Outdoor Air Pathways:</b>					<b>Chronic</b>	<b>Constrctn</b>	hc	Capillary zone thickness (cm)	<u>9.4E+00</u>		
SS.v	Volatiles and Particulates from Surface Soils	TRUE			FALSE	TRUE	hv	Vadose zone thickness (cm)	<u>5.9E+02</u>		
S.v	Volatilization from Subsurface Soils	TRUE			FALSE		rho	Soil density (g/cm <sup>3</sup> )	1.7		
GW.v	Volatilization from Groundwater	FALSE			FALSE		foc	Fraction of organic carbon in vadose zone	<u>0.001</u>		
<b>Indoor Air Pathways:</b>							phi	Soil porosity in vadose zone	<u>0.2</u>		
S.b	Vapors from Subsurface Soils	FALSE			TRUE		Lgw	Depth to groundwater (cm)	<u>6.0E+02</u>		
GW.b	Vapors from Groundwater	FALSE			TRUE		Ls	Depth to top of affected subsurface soil (cm)	<u>1.5E+02</u>		
<b>Soil Pathways:</b>							Lsubs	Thickness of affected subsurface soils (cm)	<u>4.5E+02</u>		
SS.d	Direct Ingestion and Dermal Contact	FALSE			FALSE	TRUE	pH	Soil/groundwater pH	8		
<b>Groundwater Pathways:</b>								capillary			
GW.i	Groundwater Ingestion	FALSE			TRUE		phi.w	Volumetric water content	<u>0.18</u>	0.07	
S.i	Leaching to Groundwater from all Soils	FALSE			TRUE		phi.a	Volumetric air content	<u>0.02</u>	<u>0.13</u>	
								foundation		0.26	
<b>Matrix of Receptor Distance and Location On- or Off-Site</b>		<b>Residential</b>			<b>Commercial/Industrial</b>		<b>Building</b>		<b>Residential</b>	<b>Commercial</b>	
		<b>Distance</b>	<b>On-Site</b>		<b>Distance</b>	<b>On-Site</b>	Lb	Building volume/area ratio (cm)	2.0E+02	3.0E+02	
GW	Groundwater receptor (cm)	1.2E+04	FALSE		1.2E+04	FALSE	ER	Building air exchange rate (s <sup>-1</sup> )	1.4E-04	2.3E-04	
S	Inhalation receptor (cm)	9.1E+03	FALSE		9.1E+03	FALSE	Lcrk	Foundation crack thickness (cm)	1.5E+01		
							eta	Foundation crack fraction	0.01		
<b>Matrix of Target Risks</b>		<b>Individual</b>	<b>Cumulative</b>					<b>Transport Parameters</b>		<b>Residential</b>	<b>Commercial</b>
TRab	Target Risk (class A&B carcinogens)	1.0E-06						<b>Groundwater</b>			
TRc	Target Risk (class C carcinogens)	1.0E-05						ax	Longitudinal dispersivity (cm)		1.2E+03
THQ	Target Hazard Quotient	1.0E+00						ay	Transverse dispersivity (cm)		4.0E+02
Opt	Calculation Option (1, 2, or 3)	2						az	Vertical dispersivity (cm)		6.1E+01
Tier	RBCA Tier	2						<b>Vapor</b>			
								dcy	Transverse dispersion coefficient (cm)	9.7E+02	
								dcz	Vertical dispersion coefficient (cm)	6.4E+02	

RBCA CHEMICAL DATABASE

Physical Property Data

CAS Number	Constituent	type	Molecular Weight		Diffusion Coefficients			log (Koc) or log(Kd)		Henry's Law Constant			Vapor Pressure		Solubility		acid pKa	base pKb	ref
			(g/mole)	ref	in air (cm2/s)	ref	in water (cm2/s)	ref	(@ 20 - 25 C) log(l/kg)	ref	(atm-m3)	(unitless)	ref	(mm Hg)	ref	(mg/L)			
71-43-2	Benzene	A	78.1	5	9.30E-02	A	1.10E-05	A	1.58	A	5.29E-03	2.20E-01	A	9.52E+01	4	1.75E+03	A		
100-41-4	Ethylbenzene	A	106.2	5	7.60E-02	A	8.50E-06	A	1.98	A	7.69E-03	3.20E-01	A	1.00E+01	4	1.52E+02	5		
1634-04-4	Methyl t-Butyl Ether	O	88.146	5	7.92E-02	6	9.41E-05	7	1.08	A	5.77E-04	2.40E-02		2.49E+02		4.80E+04	A		
108-88-3	Toluene	A	92.4	5	8.50E-02	A	9.40E-06	A	2.13	A	6.25E-03	2.60E-01	A	3.00E+01	4	5.15E+02	29		
1330-20-7	Xylene (mixed isomers)	A	106.2	5	7.20E-02	A	8.50E-06	A	2.38	A	6.97E-03	2.90E-01	A	7.00E+00	4	1.98E+02	5		

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Completed By: Dale A. van Dam

Date Completed: 11/3/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

**RBCA CHEMICAL DATABASE**

**Toxicity Data**

CAS Number	Constituent	Reference Dose (mg/kg/day)			Slope Factors 1/(mg/kg/day)			EPA Weight of Evidence	Is Constituent Carcinogenic ?		
		Oral RfD_oral	ref	Inhalation RfD_inhal	ref	Oral SF_oral	ref			Inhalation SF_inhal	ref
71-43-2	Benzene	-		1.70E-03	R	2.90E-02	A	2.90E-02	A	A	TRUE
100-41-4	Ethylbenzene	1.00E-01	A	2.86E-01	A	-		-		D	FALSE
1634-04-4	Methyl t-Butyl Ether	5.00E-03	R	8.57E-01	R	-		-			FALSE
108-88-3	Toluene	2.00E-01	A,R	1.14E-01	A,R	-		-		D	FALSE
1330-20-7	Xylene (mixed isomers)	2.00E+00	A,R	2.00E+00	A	-		-		D	FALSE

Site Name: Former Beacon #574      Site Location: 22315 Redwood Roa      Completed By: Dale A. van Dam      Date Completed: 11/3/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

**RBCA CHEMICAL DATABASE**

Miscellaneous Chemical Data

CAS Number	Constituent	Maximum Contaminant Level		Permissible Exposure Limit PEL/TLV (mg/m3)	ref	Relative Absorption Factors		Detection Limits				Half Life (First-Order Decay) (days)		
		MCL (mg/L)	reference			Oral	Dermal	Groundwater (mg/L)	Soil (mg/kg)	ref	Saturated	Unsaturated	ref	
71-43-2	Benzene	5.00E-03	52 FR 25690	3.20E+00	OSHA	1	0.5	0.002	C	0.005	S	720	720	H
100-41-4	Ethylbenzene	7.00E-01	56 FR 3526 (30 Jan 91)	4.34E+02	ACGIH	1	0.5	0.002	C	0.005	S	228	228	H
1634-04-4	Methyl t-Butyl Ether			1.44E+02	ACGIH	1	0.5					360	180	H
108-88-3	Toluene	1.00E+00	56 FR 3526 (30 Jan 91)	1.47E+02	ACGIH	1	0.5	0.002	C	0.005	S	28	28	H
1330-20-7	Xylene (mixed isomers)	1.00E+01	56 FR 3526 (30 Jan 91)	4.34E+02	ACGIH	1	0.5	0.005	C	0.005	S	360	360	H

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam Date Completed: 11/3/1998

Software version: 1.0.1

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

## REPRESENTATIVE COC CONCENTRATIONS IN SOURCE MEDIA

(Complete the following table)

CONSTITUENT	Representative COC Concentration					
	in Groundwater		in Surface Soil		in Subsurface Soil	
	value (mg/L)	note	value (mg/kg)	note	value (mg/kg)	note
Benzene	1.1E-2	mean	2.5E-3	UCL	8.6E+0	UCL
Ethylbenzene	5.8E-3	mean	2.5E-3	UCL	4.3E-1	UCL
Methyl t-Butyl Ether	5.9E-2	mean				
Toluene	5.8E-3	mean	2.5E-3	UCL	1.2E+0	UCL
Xylene (mixed isomers)	1.1E-2	mean	2.5E-3	UCL	2.0E+0	UCL

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

**CONSTITUENT MOLE FRACTIONS**

(Complete the following table)

CONSTITUENT	Mole Fraction of Constituent in Source Material
Benzene	
Ethylbenzene	
Methyl t-Butyl Ether	
Toluene	
Xylene (mixed isomers)	

Site Name: Former Beacon #574      Completed By: Dale A. van Dam  
Site Location: 22315 Redwood Road, C      Date Completed: 11/3/1998

**GROUNDWATER DAF VALUES**

(Enter DAF values in the grey area of the following table)  
 Dilution Attenuation Factor  
 (DAF) in Groundwater

CONSTITUENT	Residential	Comm./Ind.
	Receptor	Receptor
Benzene	1.0E+0	2.5E+1
Ethylbenzene	1.0E+0	1.1E+3
Methyl t-Butyl Ether	1.0E+0	5.7E+1
Toluene	1.0E+0	8.5E+12
Xylene (mixed isomers)	1.0E+0	1.4E+3

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, C Date Completed: 11/3/1998

**CONSTITUENT HALF-LIFE VALUES**

(Complete the following table)

CONSTITUENT	Half-Life of Constituent (day)
Benzene	720
Ethylbenzene	228
Methyl t-Butyl Ether	360
Toluene	28
Xylene (mixed isomers)	360

Site Name: Former Beacon #574      Completed By: Dale A. van Dam  
Site Location: 22315 Redwood Road, Ca      Date Completed: 11/3/1998

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.



**RBCA SITE ASSESSMENT**

**EXPOSURE LIMITS IN GROUNDWATER AND AIR**

CONSTITUENT	Exposure Limits Applied to Receptors	
	Groundwater (MCL) (mg/L)	Air (Comm. only) (PEL/TLV) (mg/m <sup>3</sup> )
Benzene		
Ethylbenzene		
Methyl t-Butyl Ether		
Toluene		
Xylene (mixed isomers)		

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

© Groundwater Services, Inc. (GSI), 1995-1997. All Rights Reserved.

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Vall Completed By: Dale A. van Dam Date Completed: 11/3/1998

1 OF 9

TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

OUTDOOR AIR EXPOSURE PATHWAYS  (CHECKED IF PATHWAY IS ACTIVE)

SURFACE SOILS: VAPOR AND DUST INHALATION	Exposure Concentration				
	1) Source Medium	2) NAF Value (m <sup>3</sup> /kg) Receptor	3) Exposure Medium Outdoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)	4) Exposure Multiplier (IRxEFxED)/(BWxAT) (m <sup>3</sup> /kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) X (4)
	Surface Soil Conc. (mg/kg)	Off-Site Residential	Off-Site Residential	Off-Site Residential	Off-Site Residential
Constituents of Concern					
Benzene	2.5E-3	2.0E+5	1.3E-8	1.2E-1	1.5E-9
Ethylbenzene	2.5E-3	2.0E+5	1.3E-8	2.7E-1	3.5E-9
Methyl t-Butyl Ether	0.0E+0	2.0E+5	0.0E+0	2.7E-1	0.0E+0
Toluene	2.5E-3	2.0E+5	1.3E-8	2.7E-1	3.5E-9
Xylene (mixed isomers)	2.5E-3	2.0E+5	1.3E-8	2.7E-1	3.5E-9

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Inhalation rate (m<sup>3</sup>/day)

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Vail Completed By: Dale A. van Dam Date Completed: 11/3/1998

2 OF 9

TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

OUTDOOR AIR EXPOSURE PATHWAYS (CHECKED IF PATHWAY IS ACTIVE)

SUBSURFACE SOILS: VAPOR

Exposure Concentration

INHALATION

Constituents of Concern	1) Source Medium	2) NAF Value (m <sup>3</sup> /kg) Receptor		3) Exposure Medium Outdoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)		4) Exposure Multiplier (IRxEFxED)/(BWxAT) (m <sup>3</sup> /kg-day)		5) Average Daily Intake Rate (mg/kg-day) (3) X (4)	
	Subsurface Soil Conc. (mg/kg)	Off-Site Residential		Off-Site Residential		Off-Site Residential		Off-Site Residential	
Benzene	8.6E+0	6.7E+4		1.3E-4		1.2E-1		1.5E-5	
Ethylbenzene	4.3E-1	6.7E+4		6.4E-6		2.7E-1		1.8E-6	
Methyl t-Butyl Ether	0.0E+0	6.7E+4		0.0E+0		2.7E-1		0.0E+0	
Toluene	1.2E+0	6.7E+4		1.7E-5		2.7E-1		4.8E-6	
Xylene (mixed isomers)	2.0E+0	6.7E+4		2.9E-5		2.7E-1		8.0E-6	

NOTE: ABS = Dermal absorption factor (dim)    BW = Body weight (kg)    EF = Exposure frequency (days/yr)    POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)    CF = Units conversion factor    ET = Exposure time (hrs/day)    SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)    ED = Exposure duration (yrs)    IR = Inhalation rate (m<sup>3</sup>/day)

RBCA SITE ASSESSMENT

Tier 2 Worksheet 8.1

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castr Completed By: Dale A. van Dam

Date Completed: 11/3/1998

3 OF 9

TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

OUTDOOR AIR EXPOSURE PATHWAYS								<input checked="" type="checkbox"/> (CHECKED IF PATHWAY IS ACTIVE)	
GROUNDWATER: VAPOR INHALATION	Exposure Concentration					TOTAL PATHWAY INTAKE (mg/kg-day)			
	1) Source Medium Groundwater Conc. (mg/L)	2) NAF Value (m <sup>3</sup> /L) Receptor	3) Exposure Medium Outdoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)		4) Exposure Multiplier (IR×EF×ED)/(BW×AT) (m <sup>3</sup> /kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) X (4)			(Sum intake values from surface, subsurface & groundwater routes.)
Constituents of Concern									Off-Site Residential
Benzene	1.1E-2								1.5E-5
Ethylbenzene	5.8E-3								1.8E-6
Methyl t-Butyl Ether	5.9E-2								0.0E+0
Toluene	5.8E-3								4.8E-6
Xylene (mixed isomers)	1.1E-2								8.0E-6

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Inhalation rate (m<sup>3</sup>/day)

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.2**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

1 OF 4

**TIER 2 PATHWAY RISK CALCULATION**

**OUTDOOR AIR EXPOSURE PATHWAYS**

(CHECKED IF PATHWAYS ARE ACTIVE)

Constituents of Concern	CARCINOGENIC RISK				TOXIC EFFECTS			
	(1) EPA	(2) Total Carcinogenic Intake Rate (mg/kg/day)	(3) Inhalation Slope Factor	(4) Individual COC Risk (2) x (3)	(5) Total Toxicant Intake Rate (mg/kg/day)	(6) Inhalation Reference Dose	(7) Individual COC Hazard Quotient (5) / (6)	
	Carcinogenic Classification	Off-Site Residential	(mg/kg-day) <sup>-1</sup>	Off-Site Residential	Off-Site Residential	(mg/kg-day)	Off-Site Residential	
Benzene	A	1.5E-5	2.9E-2	4.4E-7	3.5E-5	1.7E-3	2.1E-2	
Ethylbenzene	D				1.8E-6	2.9E-1	6.2E-6	
Methyl t-Butyl Ether					0.0E+0	8.6E-1	0.0E+0	
Toluene	D				4.8E-6	1.1E-1	4.2E-5	
Xylene (mixed isomers)	D				8.0E-6	2.0E+0	4.0E-6	

**Total Pathway Carcinogenic Risk =** 0.0E+0 4.4E-7

**Total Pathway Hazard Index =** 0.0E+0 2.1E-2

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.1**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Vall. Completed By: Dale A. van Dam Date Completed: 11/3/1998

4 OF 9

**TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

**INDOOR AIR EXPOSURE PATHWAYS**

(CHECKED IF PATHWAY IS ACTIVE)

**SUBSURFACE SOILS:**

**Exposure Concentration**

VAPOR INTRUSION TO BUILDINGS

Constituents of Concern	1) Source Medium	2) NAF Value (m <sup>3</sup> /kg) Receptor	3) Exposure Medium Indoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)	4) Exposure Multiplier (IRxEFxED)/(BWxAT) (m <sup>3</sup> /kg-day)	5) Average Daily Intake Rate (mg/kg-day) (3) X (4)
	Subsurface Soil Conc. (mg/kg)	On-Site Commercial	On-Site Commercial	On-Site Commercial	On-Site Commercial
Benzene	8.6E+0	7.2E+1	1.2E-1	7.0E-2	8.4E-3
Ethylbenzene	4.3E-1	7.2E+1	6.0E-3	2.0E-1	1.2E-3
Methyl t-Butyl Ether	0.0E+0	7.2E+1	0.0E+0	2.0E-1	0.0E+0
Toluene	1.2E+0	7.2E+1	1.6E-2	2.0E-1	3.2E-3
Xylene (mixed isomers)	2.0E+0	7.2E+1	2.7E-2	2.0E-1	5.3E-3

NOTE: ABS = Dermal absorption factor (dim)    BW = Body weight (kg)    EF = Exposure frequency (days/yr)    POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)    CF = Units conversion factor    ET = Exposure time (hrs/day)    SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)    ED = Exposure duration (yrs)    IR = Inhalation rate (m<sup>3</sup>/day)

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.1**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castr Completed By: Dale A. van Dam

Date Completed: 11/3/1998

5 OF 9

**TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

**INDOOR AIR EXPOSURE PATHWAYS**

(CHECKED IF PATHWAY IS ACTIVE)

GROUNDWATER:

Exposure Concentration

VAPOR INTRUSION TO BUILDINGS

Constituents of Concern	1) Source Medium	2) NAF Value (m <sup>3</sup> /L) Receptor	3) Exposure Medium Indoor Air: POE Conc. (mg/m <sup>3</sup> ) (1) / (2)		4) Exposure Multiplier (IR×EF×ED)/(BW×AT) (m <sup>3</sup> /kg-day)		5) Average Daily Intake Rate (mg/kg-day) (3) X (4)		TOTAL PATHWAY INTAKE (mg/kg-day) (Sum intake values from subsurface & groundwater routes.)	
	Groundwater Conc. (mg/L)	On-Site Commercial	On-Site Commercial	On-Site Commercial	On-Site Commercial	On-Site Commercial	On-Site Commercial	On-Site Commercial	On-Site Commercial	
Benzene	1.1E-2	4.6E+2	2.4E-5	7.0E-2	1.7E-6	8.4E-3				
Ethylbenzene	5.8E-3	4.3E+2	1.3E-5	2.0E-1	2.6E-6	1.2E-3				
Methyl t-Butyl Ether	5.9E-2	1.5E+3	3.8E-5	2.0E-1	7.5E-6	7.5E-6				
Toluene	5.8E-3	4.5E+2	1.3E-5	2.0E-1	2.5E-6	3.2E-3				
Xylene (mixed isomers)	1.1E-2	4.8E+2	2.2E-5	2.0E-1	4.3E-6	5.3E-3				

NOTE: ABS = Dermal absorption factor (dim)  
AF = Adherence factor (mg/cm<sup>2</sup>)  
AT = Averaging time (days)

BW = Body weight (kg)  
CF = Units conversion factor  
ED = Exposure duration (yrs)

EF = Exposure frequency (days/yr)  
ET = Exposure time (hrs/day)  
IR = Inhalation rate (m<sup>3</sup>/day)

POE = Point of exposure  
SA = Skin exposure area (cm<sup>2</sup>/day)

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.2**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

2 OF 4

**TIER 2 PATHWAY RISK CALCULATION**

INDOOR AIR EXPOSURE PATHWAYS

(CHECKED IF PATHWAYS ARE ACTIVE)

Constituents of Concern	CARCINOGENIC RISK				TOXIC EFFECTS			
	(1) EPA	(2) Total Carcinogenic Intake Rate (mg/kg/day)	(3) Inhalation Slope Factor	(4) Individual COC Risk (2) x (3)	(5) Total Toxicant Intake Rate (mg/kg/day)	(6) Inhalation Reference Dose	(7) Individual COC Hazard Quotient (5) / (6)	
	Carcinogenic Classification	On-Site Commercial	(mg/kg-day) <sup>*1</sup>	On-Site Commercial	On-Site Commercial	(mg/kg-day)	On-Site Commercial	On-Site Commercial
Benzene	A	8.4E-3	2.9E-2	2.4E-4	2.4E-2	1.7E-3		1.4E+1
Ethylbenzene	D				1.2E-3	2.9E-1		4.1E-3
Methyl t-Butyl Ether					7.5E-6	8.6E-1		8.7E-6
Toluene	D				3.2E-3	1.1E-1		2.8E-2
Xylene (mixed isomers)	D				5.3E-3	2.0E+0		2.7E-3

**Total Pathway Carcinogenic Risk =** 0.0E+0 2.4E-4

**Total Pathway Hazard Index =** 0.0E+0 1.4E+1



Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castro Valley, CA Completed By: Dale A. va Date Completed: 11/3/1998

6 OF 9

TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

SOIL EXPOSURE PATHWAYS  (CHECKED IF PATHWAY IS ACTIVE)

SURFACE SOILS OR SEDIMENTS: DERMAL CONTACT	Exposure Concentration				
	1) Source Medium	2) Exposure Multiplier <small>(SAxAFxABSxCFxEFxED)/(BWxAT) (kg/kg-day)</small>		3) Average Daily Intake Rate <small>(mg/kg-day) (1) x (2)</small>	
	Constituents of Concern	Surface Soil Conc. (mg/kg)	On-Site Residential	On-Site Commercial	On-Site Residential
Benzene	2.5E-3				
Ethylbenzene	2.5E-3				
Methyl t-Butyl Ether	0.0E+0				
Toluene	2.5E-3				
Xylene (mixed isomers)	2.5E-3				

NOTE: ABS = Dermal absorption factor (dim) BW = Body weight (kg) EF = Exposure frequency (days/yr) POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>) CF = Units conversion factor ET = Exposure time (hrs/day) SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days) ED = Exposure duration (yrs) IR = Intake rate (mg/day)

Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castr Completed By: Dale A. van Dam Date Completed: 11/3/1998 7 OF 9

TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION

SOIL EXPOSURE PATHWAYS <input type="checkbox"/> (CHECKED IF PATHWAY IS ACTIVE)							
SURFACE SOILS OR SEDIMENTS: INGESTION	Exposure Concentration				TOTAL PATHWAY INTAKE (mg/kg-day)		
	1) Source Medium	2) Exposure Multiplier (IRxCFxEFxED)/(BWxAT) (kg/kg-day)		3) Average Daily Intake Rate (mg/kg-day) (1) x (2)		Sum intake values from dermal & ingestion routes.	
Constituents of Concern	Surface Soil Conc. (mg/kg)	On-Site Residential	On-Site Commercial	On-Site Residential	On-Site Commercial	On-Site Residential	On-Site Commercial
Benzene	2.5E-3						
Ethylbenzene	2.5E-3						
Methyl t-Butyl Ether	0.0E+0						
Toluene	2.5E-3						
Xylene (mixed isomers)	2.5E-3						

NOTE: ABS = Dermal absorption factor (dim) BW = Body weight (kg) EF = Exposure frequency (days/yr) POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>) CF = Units conversion factor ET = Exposure time (hrs/day) SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days) ED = Exposure duration (yrs) IR = Intake rate (mg/day)

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.2**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

3 OF 4

**TIER 2 PATHWAY RISK CALCULATION**

SOIL EXPOSURE PATHWAYS

(CHECKED IF PATHWAYS ARE ACTIVE)

Constituents of Concern	CARCINOGENIC RISK						TOXIC EFFECTS				
	(1) EPA	(2) Total Carcinogenic Intake Rate (mg/kg/day)		(3) Oral Slope Factor	(4) Individual COC Risk (2) x (3)		(5) Total Toxicant Intake Rate (mg/kg/day)		(6) Oral Reference Dose	(7) Individual COC Hazard Quotient (5) / (6)	
	Carcinogenic Classification	On-Site Residential	On-Site Commercial	(mg/kg-day) <sup>-1</sup>	On-Site Residential	On-Site Commercial	On-Site Residential	On-Site Commercial	(mg/kg-day)	On-Site Residential	On-Site Commercial
Benzene	A			2.9E-2							
Ethylbenzene	D								1.0E-1		
Methyl t-Butyl Ether									5.0E-3		
Toluene	D								2.0E-1		
Xylene (mixed isomers)	D								2.0E+0		

**Total Pathway Carcinogenic Risk =** 0.0E+0 0.0E+0

**Total Pathway Hazard Index =** 0.0E+0 0.0E+0

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.1**

Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castro Valley, Completed By: Dale A. van Dam Date Completed: 11/3/1998

8 OF 9

**TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

**GROUNDWATER EXPOSURE PATHWAYS**  (CHECKED IF PATHWAY IS ACTIVE)

SOIL: LEACHING TO GROUNDWATER/ GROUNDWATER INGESTION	Exposure Concentration							
	1) Source Medium	2) NAF Value (L/kg)		3) Exposure Medium		4) Exposure Multiplier		5) Average Daily Intake Rate
	Soil Concentration (mg/kg)	Receptor		Groundwater: POE Conc. (mg/L) (1)/(2)		(IRxEFxED)/(BWxAT) (L/kg-day)		(mg/kg-day) (3) x (4)
Constituents of Concern		Off-Site Commercial		Off-Site Commercial		Off-Site Commercial		Off-Site Commercial
Benzene	8.6E+0		1.7E+4		5.1E-4		3.5E-3	1.8E-6
Ethylbenzene	4.3E-1		4.1E+3		1.0E-4		9.8E-3	1.0E-6
Methyl t-Butyl Ether	0.0E+0		8.2E+2		0.0E+0		9.8E-3	0.0E+0
Toluene	1.2E+0		5.1E+3		2.3E-4		9.8E-3	2.2E-6
Xylene (mixed isomers)	2.0E+0		5.2E+4		3.8E-5		9.8E-3	3.7E-7

NOTE: ABS = Dermal absorption factor (dim)      BW = Body Weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Intake rate (L/day)

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.1**

Site Name: Former Beacon #574 Site Location: 22315 Redwood Road, Castro Valley, CA Completed By: Dale A. van Dam Date Completed: 11/3/1998 9 OF 9

**TIER 2 EXPOSURE CONCENTRATION AND INTAKE CALCULATION**

GROUNDWATER EXPOSURE PATHWAYS <input checked="" type="checkbox"/> (CHECKED IF PATHWAY IS ACTIVE)									
Constituents of Concern	Exposure Concentration					MAX. PATHWAY INTAKE (mg/kg-day) (Maximum Intake of active pathways soil leaching & groundwater routes.)			
	1) Source Medium	2) NAF Value (dim)		3) Exposure Medium		4) Exposure Multiplier		5) Average Daily Intake Rate	
	Groundwater Conc. (mg/L)	Receptor		Groundwater: POE Conc. (mg/L) (1)/(2)		(IR×EF×ED)/(BW×AT) (L/kg-day)		(mg/kg-day) (3) x (4)	
		Off-Site Commercial	Off-Site Commercial	Off-Site Commercial	Off-Site Commercial	Off-Site Commercial	Off-Site Commercial	Off-Site Commercial	Off-Site Commercial
Benzene	1.1E-2	1.1E+5	9.7E-8	3.5E-3	3.4E-10				1.8E-6
Ethylbenzene	5.8E-3	1.6E+4	3.6E-7	9.8E-3	3.5E-9				1.0E-6
Methyl t-Butyl Ether	5.9E-2	9.4E+3	6.2E-6	9.8E-3	6.1E-8				6.1E-8
Toluene	5.8E-3	1.7E+4	3.5E-7	9.8E-3	3.4E-9				2.2E-6
Xylene (mixed isomers)	1.1E-2	1.1E+5	9.9E-8	9.8E-3	9.7E-10				3.7E-7

NOTE: ABS = Dermal absorption factor (dim)      BW = Body weight (kg)      EF = Exposure frequency (days/yr)      POE = Point of exposure  
 AF = Adherence factor (mg/cm<sup>2</sup>)      CF = Units conversion factor      ET = Exposure time (hrs/day)      SA = Skin exposure area (cm<sup>2</sup>/day)  
 AT = Averaging time (days)      ED = Exposure duration (yrs)      IR = Intake rate (L/day)

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.2**

Site Name: Former Beacon #574

Site Location: 22315 Redwood Road, Castro Valley, CA

Completed By: Dale A. van Dam

Date Completed: 11/3/1998

4 OF 4

**TIER 2 PATHWAY RISK CALCULATION**

GROUNDWATER EXPOSURE PATHWAYS  (CHECKED IF PATHWAYS ARE ACTIVE)

Constituents of Concern	(1) EPA Carcinogenic Classification	CARCINOGENIC RISK			TOXIC EFFECTS		
		(2) Total Carcinogenic Intake Rate (mg/kg/day) Off-Site Commercial	(3) Oral Slope Factor (mg/kg-day) <sup>-1</sup>	(4) Individual COC Risk (2) x (3) Off-Site Commercial	(5) Total Toxicant Intake Rate (mg/kg/day) Off-Site Commercial	(6) Oral Reference Dose (mg/kg-day)	(7) Individual COC Hazard Quotient (5) / (6) Off-Site Commercial
Benzene	A	1.8E-6	2.9E-2	5.2E-8			
Ethylbenzene	D				1.0E-6	1.0E-1	1.0E-5
Methyl t-Butyl Ether					6.1E-8	5.0E-3	1.2E-5
Toluene	D				2.2E-6	2.0E-1	1.1E-5
Xylene (mixed isomers)	D				3.7E-7	2.0E+0	1.9E-7

**Total Pathway Carcinogenic Risk =** 0.0E+0 5.2E-8

**Total Pathway Hazard Index =** 0.0E+0 3.4E-5

**RBCA SITE ASSESSMENT**

**Tier 2 Worksheet 8.3**

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

1 of 1

**TIER 2 BASELINE RISK SUMMARY TABLE**

EXPOSURE PATHWAY	BASELINE CARCINOGENIC RISK					BASELINE TOXIC EFFECTS				
	Individual COC Risk		Cumulative COC Risk		Risk Limit(s) Exceeded?	Hazard Quotient		Hazard Index		Toxicity Limit(s) Exceeded?
	Maximum Value	Target Risk	Total Value	Target Risk		Maximum Value	Applicable Limit	Total Value	Applicable Limit	
<b>OUTDOOR AIR EXPOSURE PATHWAYS</b>										
Complete:	4.4E-7	1.0E-6	4.4E-7	N/A	<input type="checkbox"/>	2.1E-2	1.0E+0	2.1E-2	N/A	<input type="checkbox"/>
<b>INDOOR AIR EXPOSURE PATHWAYS</b>										
Complete:	2.4E-4	1.0E-6	2.4E-4	N/A	<input checked="" type="checkbox"/>	1.4E+1	1.0E+0	1.4E+1	N/A	<input checked="" type="checkbox"/>
<b>SOIL EXPOSURE PATHWAYS</b>										
Complete:	NC	1.0E-6	NC	N/A	<input checked="" type="checkbox"/>	NC	1.0E+0	NC	N/A	<input checked="" type="checkbox"/>
<b>GROUNDWATER EXPOSURE PATHWAYS</b>										
Complete:	5.2E-8	1.0E-6	5.2E-8	N/A	<input type="checkbox"/>	1.2E-5	1.0E+0	3.4E-5	N/A	<input type="checkbox"/>
<b>CRITICAL EXPOSURE PATHWAY (Select Maximum Values From Complete Pathways)</b>										
	2.4E-4	1.0E-6	2.4E-4	N/A	<input checked="" type="checkbox"/>	1.4E+1	1.0E+0	1.4E+1	N/A	<input checked="" type="checkbox"/>

**RBCA SITE ASSESSMENT**

Tier 2 Worksheet 9.1

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

1 OF 1

**SURFACE SOIL SSSL VALUES  
( < 5 FT BGS)**

Target Risk (Class A & B) 1.0E-6

MCL exposure limit?

Calculation Option: 2

Target Risk (Class C) 1.0E-5

PEL exposure limit?

Groundwater DAF Option: Empirical

Target Hazard Quotient 1.0E+0

**SSSL Results For Complete Exposure Pathways ("X" if Complete)**

CONSTITUENTS OF CONCERN		Representative Concentration	Soil Leaching to Groundwater			Inhalation of Volatiles and Particulates		Construction Worker	Applicable SSSL	SSSL Exceeded ?	Required CRF
CAS No.	Name	(mg/kg)	Residential: (on-site)	Commercial: 400 feet	Regulatory(MCL): 400 feet	Residential: 300 feet	Commercial: (on-site)	Commercial: (on-site)	(mg/kg)	<input type="checkbox"/> "If yes"	Only if "yes" left
71-43-2	Benzene	2.5E-3	NA	1.7E+2	NA	5.8E+1	NA	7.1E+1	5.8E+1	<input type="checkbox"/>	<1
100-41-4	Ethylbenzene	2.5E-3	NA	>Res	NA	>Res	NA	>Res	>Res	<input type="checkbox"/>	<1
1634-04-4	Methyl t-Butyl Ether	0.0E+0	NA	4.2E+2	NA	>Res	NA	2.4E+2	2.4E+2	<input type="checkbox"/>	<1
108-88-3	Toluene	2.5E-3	NA	>Res	NA	>Res	NA	>Res	>Res	<input type="checkbox"/>	<1
1330-20-7	Xylene (mixed isomers)	2.5E-3	NA	>Res	NA	>Res	NA	>Res	>Res	<input type="checkbox"/>	<1

>Res indicates risk-based target concentration greater than constituent residual saturation value



**RBCA SITE ASSESSMENT**

Tier 2 Worksheet 9.2

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1996

1 OF 1

**SUBSURFACE SOIL SSTL VALUES  
(> 5 FT BGS)**

Target Risk (Class A & B) 1.0E-6

MCL exposure limit?

Calculation Option: 2

Target Risk (Class C) 1.0E-5

PEL exposure limit?

Groundwater DAF Option: Empirical

Target Hazard Quotient 1.0E+0

**SSTL Results For Complete Exposure Pathways ("x" if Complete)**

CONSTITUENTS OF CONCERN		Representative Concentration (mg/kg)	Soil Leaching to Groundwater			Soil Volatilization to Indoor Air		Soil Volatilization to Outdoor Air		Applicable SSTL (mg/kg)	SSTL Exceeded ? "■" If yes	Required CRF Only if "yes" left
			Residential: (on-site)	Commercial: 400 feet	Regulatory(MCL): 400 feet	Residential: (on-site)	Commercial: (on-site)	Residential: 300 feet	Commercial: (on-site)			
71-43-2	Benzene	8.6E+0	NA	1.7E+2	NA	NA	3.5E-2	2.0E+1	NA	3.5E-2	■	2.4E+02
100-41-4	Ethylbenzene	4.3E-1	NA	>Res	NA	NA	>Res	>Res	NA	>Res	<input type="checkbox"/>	<1
1634-04-4	Methyl t-Butyl Ether	0.0E+0	NA	4.2E+2	NA	NA	3.1E+2	>Res	NA	3.1E+2	<input type="checkbox"/>	<1
108-88-3	Toluene	1.2E+0	NA	>Res	NA	NA	4.2E+1	>Res	NA	4.2E+1	<input type="checkbox"/>	<1
1330-20-7	Xylene (mixed isomers)	2.0E+0	NA	>Res	NA	NA	>Res	>Res	NA	>Res	<input type="checkbox"/>	<1

>Res indicates risk-based target concentration greater than constituent residual saturation value

**RBCA SITE ASSESSMENT**

Tier 2 Worksheet 9.3

Site Name: Former Beacon #574

Completed By: Dale A. van Dam

Site Location: 22315 Redwood Road, Castro Valley, CA

Date Completed: 11/3/1998

1 OF 1

**GROUNDWATER SSTL VALUES**

Target Risk (Class A & B) 1.0E-6

MCL exposure limit?

Calculation Option: 2

Target Risk (Class C) 1.0E-5

PEL exposure limit?

Groundwater DAF Option: Empirical

Target Hazard Quotient 1.0E+0

**SSTL Results For Complete Exposure Pathways ("x" if Complete)**

CONSTITUENTS OF CONCERN		Representative Concentration (mg/L)	Groundwater Ingestion			Groundwater Volatilization to Indoor Air		Groundwater Volatilization to Outdoor Air		Applicable SSTL (mg/L)	SSTL Exceeded ? "■" if yes	Required CRF
			Residential: (on-site)	Commercial: 400 feet	Regulatory(MCL): 400 feet	Residential: (on-site)	Commercial: (on-site)	Residential (on-site)	Commercial: (on-site)			
71-43-2	Benzene	1.1E-2	NA	1.1E+3	NA	NA	2.2E-1	NA	NA	2.2E-1	<input type="checkbox"/>	<1
100-41-4	Ethylbenzene	5.8E-3	NA	>Sol	NA	NA	>Sol	NA	NA	>Sol	<input type="checkbox"/>	<1
1634-04-4	Methyl t-Butyl Ether	5.9E-2	NA	4.8E+3	NA	NA	6.7E+3	NA	NA	4.8E+3	<input type="checkbox"/>	<1
108-88-3	Toluene	5.8E-3	NA	>Sol	NA	NA	2.6E+2	NA	NA	2.6E+2	<input type="checkbox"/>	<1
1330-20-7	Xylene (mixed isomers)	1.1E-2	NA	>Sol	NA	NA	>Sol	NA	NA	>Sol	<input type="checkbox"/>	<1

>Sol indicates risk-based target concentration greater than constituent solubility

**APPENDIX J**

**SUMMARY CALCULATION SHEET  
LIMIT OF TOXICITY ASSOCIATED WITH MTBE**

**RBCA ALTERNATE POINT OF COMPLIANCE**

**Groundwater Pathway**

CAS No.	Constituent	Source Zone	SSTLs at Alternate Points of Compliance			POE Exposure Limit
		Groundwater	Enter Distance From Source Below (feet)			Off-Site Receptor
		SSTL (mg/L)	20 (ft)	40 (ft)	60 (ft)	71 (ft)
71-43-2	Benzene	3.9E-3	3.6E-3	3.4E-3	3.1E-3	2.9E-3
100-41-4	Ethylbenzene	9.7E+0	7.2E+0	5.5E+0	4.2E+0	3.7E+0
1634-04-4	Methyl t-Butyl Ether	2.8E-1	2.5E-1	2.2E-1	2.0E-1	1.8E-1
108-88-3	Toluene	>Sol	2.3E+2	4.9E+1	1.4E+1	7.3E+0
1330-20-7	Xylene (mixed isomers)	>Sol	1.5E+2	1.1E+2	8.5E+1	7.3E+1