Shell Oil Products US

May 11, 2009

Re: **Quarterly Monitoring Report – First Quarter 2009**
Former Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, California

Dear Mr. Wickham:

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge.

Sincerely,
Shell Oil Products US

Denis L. Brown
Project Manager

20945 S. Wilmington Avenue, Carson, CA 90810 P: (559) 645-9306; F: (559) 645-5643

May 11, 2009
DELTA Project No. SCA6750S1A
SAP No. 135786

Mr. Jerry Wickham
Alameda County Health Care Services Agency
Environmental Health Services
1131 Harbor Bay Parkway, Suite 250
Alameda, CA 94502-6577

Re: **FIRST QUARTER 2009 GROUNDWATER MONITORING REPORT**
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, California
Case No. RO0002522

DELTA

Dear Mr. Wickham:

On behalf of Shell Oil Products US (SHELL), Delta Consultants (DELTA) has prepared this *First Quarter 2009 Groundwater Monitoring and Report* for the above referenced site. The sampling activities at the site were conducted by Blaine Tech Services, Inc. (Blaine Tech) under contract to SHELL and included the collection of groundwater samples and static water level measurements. Delta did not provide any oversight of Blaone Tech's work or protocol. A DELTA staff member, under the supervision of a California Registered Civil Engineer or a California Professional Geologist, performed evaluation of the data provided to us.

This report represents DELTA's professional opinions based upon the currently available information and are arrived at in accordance with currently acceptable professional standards. This report is based upon a specific scope of work requested by the client. The Contract between DELTA and its client outlines the scope of work, and only those tasks specifically authorized by that contract or outlined in this report were performed. This report is intended only for the use of DELTA's Client and anyone else specifically listed on this report. DELTA will not and cannot be liable for unauthorized reliance by any other third party. Other than as contained in this paragraph, DELTA makes no express or implied warranty as to the contents of this report.

312 Piercy Road San Jose, California 95138 USA
Phone +1 408.224.4724 / USA Toll Free 800.477.7411
Fax +1 408.225.8506 www.deltaenv.com

Should you have any questions or comments regarding this report, please contact Ms. Regina Bussard (DELTA Site Manager) at (408) 826-1876 or Denis Brown (SHELL Project Manager) at (707) 865-0251.

Sincerely,
Delta Consultants

Regina Bussard, P.G.
Project Manager

Richard A. Garlow, M.S., P.G.
Project Specialist



Attachment: First Quarter 2009 Groundwater Monitoring Report

cc: Denis Brown, Shell Oil Products US
Beverly Howell, GS Management (property owner rep), Pleasanton

May 11, 2009

SHELL QUARTERLY STATUS REPORT

Station Address:	6750 Santa Rita Road, Pleasanton, California
DELTA Project No.:	SCA6750S1A
SHELL Project Manager / Phone No.:	Denis Brown / (707) 865-0251
DELTA Site Manager / Phone No.:	Regina Bussard / (408) 826-1876
Primary Agency / Regulatory ID No.:	Alameda County Environmental Health (ACEH) / Mr. Jerry Wickham Case No. RO0002522
Other Agencies to Receive Copies:	Regional Water Quality Control Board – San Francisco Bay

WORK PERFORMED THIS QUARTER (FIRST–2009):

1. Quarterly groundwater monitoring and sampling. Submitted quarterly report.

WORK PROPOSED FOR NEXT QUARTER (SECOND–2009):

1. Quarterly groundwater monitoring and sampling. Submit quarterly report.

Current Phase of Project:	Groundwater Monitoring
Site Use:	Shell-branded Service Station
Frequency of Sampling:	Quarterly
Frequency of Monitoring:	Quarterly
Frequency of System Sampling:	N/A
Frequency of System Monitoring:	N/A
Is Separate Phase Hydrocarbon Present On-site (Well #'s):	☐ Yes ☒ No
Cumulative SPH Recovered to Date:	None
SPH Recovered This Quarter:	None
Groundwater Removed this Quarter:	46.29 gallons were recovered on January 8, 2009.
Receptors in Site Vicinity:	Drinking Water Well (3S/1E 5J3) is located 1,742 feet southwest of site location.
Site Lithology:	Approximately 40 feet of silty and clayey soils over lying approximately 15 feet of interbedded sands and silty sands, silty and clayey soils, and silty sands and sandy silts. This is underlain by up to 65 feet of silty and clayey soils. There may be a two to three foot thick sandy and silty sand bed at a depth of approximately 100 feet.
Current Remediation Techniques:	None
Permits for Discharge:	None
Approximate Depth to Groundwater:	22.12 to 24.98 feet below top of well casing.
Groundwater Gradient:	Southerly at approximately 0.02 ft/ft.
Current Agency Correspondence:	ACEH letter dated February 17, 2006 (Appendix A).

May 11, 2009

SHELL QUARTERLY STATUS REPORT (CONT.)

Site History:

Case Opening	October 2002, GRASP Well Installation
On-Site Assessment	October 2002, GRASP Well Installation
Off-Site Assessment	1/05, Install MW-5; 2004, CPT Investigation; 2005 Install MW-6 and MW-7
Passive Remediation	Monitor natural attenuation
Active Remediation	None
Closure	None
Summary of Unusual Activity:	None

Discussion: Plume appears stable; TBA was not detected above reporting limits in any wells. TPPH concentrations were detected in onsite wells MW-2, MW-3, and MW-4. MTBE concentrations were detected in onsite wells MW-1 through MW-4 and off-site well MW-5.

Delta recommends reduced monitoring requirements at this site, February 2009.

ATTACHMENTS:

Table:

Table 1 – Well Concentrations

Figures:

Figure 1 – Site Location Map

Figure 2 – Groundwater Elevation Contour Map

Figure 3 –Hydrocarbon Distribution in Groundwater Map

Appendices:

Appendix A – Blaine Tech Services, Inc. Field Data Sheets

Appendix B – Blaine Tech Services, Inc. Field Procedures

Appendix C – Laboratory Report and Chain-of-Custody Documentation

TABLE

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)
MW-1	12/4/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	31.75	NA
MW-1	12/22/2002	<50	81	<0.50	<0.50	<0.50	<0.50	62	<2.0	<2.0	<2.0	<50	NA	NA	NA	31.93	NA
MW-1	3/28/2003	<50	70	<0.50	<0.50	<0.50	<1.0	130	<2.0	<2.0	<2.0	43	NA	NA	343.48	31.59	311.89
MW-1	5/9/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	280	<10	<10	<10	200	NA	NA	343.48	31.10	312.38
MW-1	6/30/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	31.65	311.83
MW-1	7/8/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	160	<10	<10	<10	170	NA	NA	343.48	30.90	312.58
MW-1	7/17/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	31.53	311.95
MW-1	7/31/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	29.95	313.53
MW-1	8/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	29.99	313.49
MW-1	9/23/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	30.02	313.46
MW-1	10/3/2003	<500	NA	<5.0	<5.0	<5.0	<10	810	<20	<20	<20	540	NA	NA	343.48	29.89	313.59
MW-1	10/28/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	31.38	312.10
MW-1	11/24/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	29.71	313.77
MW-1	12/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.48	29.72	313.76
MW-1	1/6/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	400	<10	<10	<10	280	NA	NA	343.48	29.16	314.32
MW-1	4/6/2004	<1,300	NA	<13	<13	<13	<25	3,300	NA	NA	NA	3,500	NA	NA	343.48	31.38	312.10
MW-1	7/30/2004	<1,300	NA	<13	<13	<13	<25	1,000	NA	NA	NA	600	NA	NA	343.48	28.51	314.97
MW-1	10/7/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	530	NA	NA	NA	390	NA	NA	343.48	28.55	314.93
MW-1	1/26/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	320	<10	<10	<10	130	NA	NA	343.48	27.35	316.13
MW-1	4/14/2005	<150	NA	<1.5	<1.5	<1.5	<1.5	720	NA	NA	NA	260	NA	NA	343.48	26.70	316.78
MW-1	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	270	NA	NA	NA	150	NA	NA	343.48	26.33	317.15
MW-1	10/20/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	39	NA	NA	NA	<25	NA	NA	343.48	27.12	316.36
MW-1	1/27/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	30.1	NA	NA	NA	<10.0	NA	NA	343.48	25.25	318.23
MW-1	4/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	16.9	NA	NA	NA	12.4	NA	NA	343.48	21.37	322.11
MW-1	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	22.5	NA	NA	NA	<10.0	NA	NA	343.48	22.35	321.13
MW-1	10/20/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	1.7	NA	NA	NA	<5.0	NA	NA	343.48	22.67	320.81
MW-1	1/22/2007	<50 d,f	NA	<0.50 d,f	<0.50 d,f	<0.50 d,f	<0.50 d,f	17 d,f	<0.50 d,f	<0.50 d,f	<0.50 d,f	<20 d,f	NA	NA	343.48	21.76	321.72

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)
MW-1	4/11/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	1.5	NA	NA	NA	<10	NA	NA	343.48	21.20	322.28
MW-1	7/5/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	5.6	NA	NA	NA	<10	NA	NA	343.48	21.98	321.50
MW-1	10/26/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	19	NA	NA	NA	<10	NA	NA	343.48	21.61	321.87
MW-1	1/22/2008	<50 g	NA	<0.50	<1.0	<1.0	<1.0	3.9	<2.0	<2.0	<2.0	<10	NA	NA	343.48	23.38	320.10
MW-1	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	1.2	NA	NA	NA	<10	NA	NA	343.48	19.40	324.08
MW-1	7/2/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	2.0	NA	NA	NA	<10	NA	NA	343.48	20.00	323.48
MW-1	10/27/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	3.8	NA	NA	NA	<10	NA	NA	343.48	21.79	321.69
MW-1	**1/8/2009**	**<50**	**NA**	**<0.50**	**<1.0**	**<1.0**	**<1.0**	**2.7**	**<2.0**	**<2.0**	**<2.0**	**<10**	**NA**	**NA**	**343.48**	**22.58**	**320.90**
MW-2	12/4/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	31.25	NA
MW-2	12/22/2002	<200	120	<2.0	<2.0	<2.0	<2.0	660	<2.0	<2.0	<2.0	<50	NA	NA	NA	30.70	NA
MW-2	3/28/2003	<2,500	60	<25	<25	<25	<50	4,200	<100	<100	<100	2,500	NA	NA	342.86	30.30	312.56
MW-2	5/9/2003	<2,500	NA	<25	<25	<25	<50	4,000	<100	<100	<100	3,200	NA	NA	342.86	29.83	313.03
MW-2	6/30/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	30.45	312.41
MW-2	7/8/2003	<2,000	NA	<20	<20	<20	<40	2,800	<80	<80	<80	2,900	NA	NA	342.86	29.86	313.00
MW-2	7/17/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	30.33	312.53
MW-2	7/31/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	29.33	313.53
MW-2	8/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	29.98	312.88
MW-2	9/23/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	30.21	312.65
MW-2	10/3/2003	<2,000	NA	<20	<20	<20	<40	3,600	<80	<80	<80	3,000	NA	NA	342.86	30.43	312.43
MW-2	10/28/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	29.79	313.07
MW-2	11/24/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	30.00	312.86
MW-2	12/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.86	30.14	312.72
MW-2	1/6/2004	<5,000	NA	<50	<50	<50	<100	4,500	<200	<200	<200	1,900	NA	NA	342.86	30.05	312.81
MW-2	4/6/2004	<2,000	NA	<20	<20	<20	<40	4,600	NA	NA	NA	5,100	NA	NA	342.86	29.30	313.56
MW-2	7/30/2004	<500	NA	<5.0	<5.0	<5.0	<10	1,000	NA	NA	NA	950	NA	NA	342.86	28.80	314.06
MW-2	10/7/2004	<2,500	NA	<25	<25	<25	<50	6,300	NA	NA	NA	6,500	NA	NA	342.86	28.02	314.84
MW-2	1/26/2005	<1,300	NA	<13	<13	<13	<25	2,100	<50	<50	<50	2,300	NA	NA	342.86	33.12	309.74

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)
MW-2	4/14/2005	<500	NA	<5.0	<5.0	<5.0	<5.0	2,400	NA	NA	NA	1,100	NA	NA	342.86	25.55	317.31
MW-2	7/29/2005	<2,500	NA	<25	<25	<25	<50	3,900	NA	NA	NA	1,500	NA	NA	342.86	25.98	316.88
MW-2	10/20/2005	<2,500	NA	<25	<25	<25	<50	2,500	NA	NA	NA	480	NA	NA	342.86	25.91	316.95
MW-2	1/27/2006	2,410	NA	<0.500	<0.500	<0.500	<0.500	3,160	NA	NA	NA	97.0	NA	NA	342.86	24.40	318.46
MW-2	4/20/2006	<50.0	NA	<0.500	0.880	<0.500	1.16	278	NA	NA	NA	72.2	NA	NA	342.86	25.85	317.01
MW-2	7/12/2006	1,120	NA	<0.500	<0.500	<0.500	<0.500	1,100	NA	NA	NA	<10.0	NA	NA	342.86	21.72	321.14
MW-2	10/20/2006	690 c	NA	<0.50	<0.50	<0.50	<0.50	1,100	NA	NA	NA	<5.0	NA	NA	342.86	21.72	321.14
MW-2	1/22/2007	730	NA	<10	<10	<10	<10	990	<10	<10	<10	<400	NA	NA	342.86	21.13	321.73
MW-2	4/11/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	1,100	NA	NA	NA	40	NA	NA	342.86	20.35	322.51
MW-2	7/5/2007	360 g,h	NA	<5.0	<10	<10	<10	650	NA	NA	NA	<100	NA	NA	342.86	20.44	322.42
MW-2	10/26/2007	460 g,h	NA	<5.0	<10	<10	<10	690	NA	NA	NA	<100	NA	NA	342.86	19.94	322.92
MW-2	1/22/2008	250 g,h	NA	<5.0	<10	<10	<10	720	<20	<20	<20	<100	NA	NA	342.86	18.71	324.15
MW-2	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	15	NA	NA	NA	<10	NA	NA	342.86	18.50	324.36
MW-2	7/2/2008	620	NA	<2.5	<5.0	<5.0	<5.0	580	NA	NA	NA	<50	NA	NA	342.86	20.90	321.96
MW-2	10/27/2008	660	NA	<2.5	<5.0	<5.0	<5.0	440	NA	NA	NA	<50	NA	NA	342.86	21.41	321.45
MW-2	**1/8/2009**	**320**	**NA**	**<2.5**	**<5.0**	**<5.0**	**<5.0**	**300**	**<10**	**<10**	**<10**	**<50**	**NA**	**NA**	**342.86**	**22.12**	**320.74**
MW-3	12/4/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	31.65	NA
MW-3	12/22/2002	<2,000	72	<20	<20	<20	<20	8,000	<20	<20	<20	1,500	NA	NA	NA	31.10	NA
MW-3	3/28/2003	<5,000	89	<50	<50	<50	<100	10,000	<200	<200	<200	6,100	NA	NA	342.23	30.76	311.47
MW-3	5/9/2003	11,000	NA	<100	<100	<100	<200	15,000	<400	<400	<400	9,300	NA	NA	342.23	30.04	312.19
MW-3	6/30/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	30.23	312.00
MW-3	7/8/2003	<10,000	NA	<100	<100	<100	<200	9,500	<400	<400	<400	2,500	NA	NA	342.23	30.11	312.12
MW-3	7/17/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	29.80	312.43
MW-3	7/31/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	29.94	312.29
MW-3	8/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	30.05	312.18
MW-3	9/23/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	29.95	312.28
MW-3	10/3/2003	<10,000	NA	<100	<100	<100	<200	8,800	<400	<400	<400	6,600	NA	NA	342.23	29.97	312.26

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)
MW-3	10/28/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	29.97	312.26
MW-3	11/24/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	29.94	312.29
MW-3	12/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.23	29.43	312.80
MW-3	1/6/2004	<5,000	NA	<50	<50	<50	<100	9,800	<200	<200	<200	3,800	NA	NA	342.23	29.25	312.98
MW-3	4/6/2004	<5,000	NA	<50	<50	<50	<100	4,200	NA	NA	NA	2,100	NA	NA	342.23	28.82	313.41
MW-3	7/30/2004	<2,500	NA	<25	<25	<25	<50	3,000	NA	NA	NA	1,200	NA	NA	342.23	28.73	313.50
MW-3	10/7/2004	<1,000	NA	<10	<10	<10	<20	860	NA	NA	NA	320	NA	NA	342.23	28.72	313.51
MW-3	1/26/2005	<500	NA	<5.0	<5.0	<5.0	<10	820	<20	<20	<20	250	NA	NA	342.23	26.50	315.73
MW-3	4/14/2005	<400	NA	<4.0	<4.0	<4.0	<4.0	2,200	NA	NA	NA	590	NA	NA	342.23	26.15	316.08
MW-3	7/29/2005	<2,500	NA	<25	<25	<25	<50	3,100	NA	NA	NA	1,700	NA	NA	342.23	25.50	316.73
MW-3	10/20/2005	<2,000	NA	<20	<20	<20	<40	1,700	NA	NA	NA	220	NA	NA	342.23	26.85	315.38
MW-3	1/27/2006	808	NA	<0.500	<0.500	<0.500	<0.500	736	NA	NA	NA	39.4	NA	NA	342.23	24.95	317.28
MW-3	4/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	364	NA	NA	NA	<10.0	NA	NA	342.23	21.51	320.72
MW-3	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	120	NA	NA	NA	<10.0	NA	NA	342.23	22.52	319.71
MW-3	10/20/2006	220 c	NA	<0.50	<0.50	<0.50	<0.50	260	NA	NA	NA	<5.0	NA	NA	342.23	22.01	320.22
MW-3	1/22/2007	290 d,e,f	NA	<2.5 d,f	<2.5 d,f	<2.5 d,f	<2.5 d,f	450 d,f	<2.5 d,f	<2.5 d,f	<2.5 d,f	<100 d,f	NA	NA	342.23	21.95	320.28
MW-3	4/11/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	340	NA	NA	NA	<10	NA	NA	342.23	20.31	321.92
MW-3	7/5/2007	120 g,h	NA	<1.0	<2.0	<2.0	<2.0	190	NA	NA	NA	<20	NA	NA	342.23	20.82	321.41
MW-3	10/26/2007	190 g,h	NA	<1.0	<2.0	<2.0	<2.0	340	NA	NA	NA	<20	NA	NA	342.23	21.40	320.83
MW-3	1/22/2008	140 g,h	NA	<1.0	<2.0	<2.0	<2.0	250	<4.0	<4.0	<4.0	<20	NA	NA	342.23	19.42	322.81
MW-3	4/11/2008	120	NA	<1.0	<2.0	<2.0	<2.0	86	NA	NA	NA	<20	NA	NA	342.23	20.90	321.33
MW-3	7/2/2008	150	NA	<0.50	<1.0	<1.0	<1.0	150	NA	NA	NA	<10	NA	NA	342.23	20.10	322.13
MW-3	10/27/2008	240	NA	<0.50	<1.0	<1.0	<1.0	180	NA	NA	NA	<10	NA	NA	342.23	22.18	320.05
MW-3	**1/8/2009**	**160**	**NA**	**<1.0**	**<2.0**	**<2.0**	**<2.0**	**160**	**<4.0**	**<4.0**	**<4.0**	**<20**	**NA**	**NA**	**342.23**	**22.63**	**319.60**
MW-4	12/4/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	32.92	NA
MW-4	12/22/2002	<50	<50	<0.50	<0.50	<0.50	<0.50	93	<2.0	<2.0	<2.0	<50	NA	NA	NA	32.20	NA
MW-4	3/28/2003	<50	67	<0.50	<0.50	<0.50	<1.0	2.4	<2.0	<2.0	<2.0	<5.0	NA	NA	343.44	32.07	311.37

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)
MW-4	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	75	<2.0	<2.0	<2.0	<5.0	NA	NA	343.44	31.35	312.09
MW-4	6/30/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	31.42	312.02
MW-4	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	18	<2.0	<2.0	<2.0	<5.0	NA	NA	343.44	31.42	312.02
MW-4	7/17/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	31.20	312.24
MW-4	7/31/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	31.05	312.39
MW-4	8/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	31.20	312.24
MW-4	9/23/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	31.15	312.29
MW-4	10/3/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	23	<2.0	<2.0	<2.0	<5.0	NA	NA	343.44	31.10	312.34
MW-4	10/28/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	31.14	312.30
MW-4	11/24/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	30.92	312.52
MW-4	12/29/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	343.44	30.82	312.62
MW-4	1/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	40	<2.0	<2.0	<2.0	<5.0	NA	NA	343.44	30.24	313.20
MW-4	4/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	16	NA	NA	NA	<5.0	NA	NA	343.44	30.10	313.34
MW-4	7/30/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	25	NA	NA	NA	<5.0	NA	NA	343.44	29.75	313.69
MW-4	10/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	35	NA	NA	NA	<5.0	NA	NA	343.44	29.79	313.65
MW-4	1/26/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	450	<10	<10	<10	43	NA	NA	343.44	27.60	315.84
MW-4	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	210	NA	NA	NA	<5.0	NA	NA	343.44	27.40	316.04
MW-4	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	57	NA	NA	NA	11	NA	NA	343.44	26.68	316.76
MW-4	10/20/2005	<50 a	NA	<0.50	<0.50	<0.50	<1.0	44	NA	NA	NA	<5.0	NA	NA	343.44	27.72	315.72
MW-4	1/27/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	98.4	NA	NA	NA	<10.0	NA	NA	343.44	28.90	314.54
MW-4	4/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	254	NA	NA	NA	<10.0	NA	NA	343.44	22.30	321.14
MW-4	7/12/2006	313	NA	<0.500	<0.500	<0.500	<0.500	358	NA	NA	NA	<10.0	NA	NA	343.44	23.54	319.90
MW-4	10/20/2006	450 c	NA	<0.50	<0.50	<0.50	<0.50	590	NA	NA	NA	<5.0	NA	NA	343.44	22.04	321.40
MW-4	1/22/2007	310	NA	<5.0	<5.0	<5.0	<5.0	410	<5.0	<5.0	<5.0	<200	NA	NA	343.44	22.93	320.51
MW-4	4/11/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	350	NA	NA	NA	<10	NA	NA	343.44	21.30	322.14
MW-4	7/5/2007	160 g,h	NA	<1.0	<2.0	<2.0	<2.0	260	NA	NA	NA	<20	NA	NA	343.44	22.00	321.44
MW-4	10/26/2007	150 g,h	NA	<1.0	<2.0	<2.0	<2.0	230	NA	NA	NA	<20	NA	NA	343.44	22.03	321.41
MW-4	1/22/2008	110 g,h	NA	<1.0	<2.0	<2.0	<2.0	180	<4.0	<4.0	<4.0	<20	NA	NA	343.44	20.70	322.74

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)
MW-4	4/11/2008	150	NA	<0.50	<1.0	<1.0	<1.0	150	NA	NA	NA	<10	NA	NA	343.44	22.67	320.77
MW-4	7/2/2008	120	NA	<0.50	<1.0	<1.0	<1.0	120	NA	NA	NA	<10	NA	NA	343.44	20.76	322.68
MW-4	10/27/2008	140	NA	<0.50	<1.0	<1.0	<1.0	93	NA	NA	NA	<10	NA	NA	343.44	23.29	320.15
MW-4	**1/8/2009**	**56**	**NA**	**<0.50**	**<1.0**	**<1.0**	**<1.0**	**48**	**<2.0**	**<2.0**	**<2.0**	**<10**	**NA**	**NA**	**343.44**	**23.91**	**319.53**
MW-5	2/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	340.88	26.83	314.05
MW-5	2/10/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	5.1	<2.0	<2.0	<2.0	<5.0	NA	NA	340.88	27.13	313.75
MW-5	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	NA	NA	NA	<5.0	NA	NA	340.88	26.44	314.44
MW-5	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	<0.50	NA	NA	NA	<5.0	NA	NA	340.88	26.73	314.15
MW-5	10/20/2005	56	NA	<0.50	<0.50	<0.50	<1.0	<0.50	NA	NA	NA	<5.0	NA	NA	340.88	26.95	313.93
MW-5	1/27/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	340.88	26.15	314.73
MW-5	4/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	340.88	22.21	318.67
MW-5	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	340.88	23.72	317.16
MW-5	10/20/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	NA	NA	NA	<5.0	NA	NA	340.88	23.34	317.54
MW-5	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<20	NA	NA	340.88	22.65	318.23
MW-5	4/11/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	340.88	23.83	317.05
MW-5	7/5/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	340.88	21.19	319.69
MW-5	10/26/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	2.2	NA	NA	NA	<10	NA	NA	340.88	21.99	318.89
MW-5	1/22/2008	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	<2.0	<2.0	<2.0	<10	NA	NA	340.88	19.80	321.08
MW-5	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	340.88	22.38	318.50
MW-5	7/2/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	340.88	19.90	320.98
MW-5	10/27/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	340.88	22.50	318.38
MW-5	**1/8/2009**	**<50**	**NA**	**<0.50**	**<1.0**	**<1.0**	**<1.0**	**4.0**	**<2.0**	**<2.0**	**<2.0**	**<10**	**NA**	**NA**	**340.88**	**24.98**	**315.90**
MW-6	12/1/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	342.97	27.44	315.53
MW-6	12/7/2005	<50	130	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	<0.50	<0.020	342.97	26.15	316.82
MW-6	1/27/2006	<50.0	230	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	342.97	24.95	318.02
MW-6	4/20/2006	<50.0	<50.0 b	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	342.97	23.51	319.46

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)
MW-6	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	342.97	23.92	319.05
MW-6	10/20/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	NA	NA	NA	<5.0	NA	NA	342.97	24.02	318.95
MW-6	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<20	NA	NA	342.97	23.54	319.43
MW-6	4/11/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	342.97	23.06	319.91
MW-6	7/5/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	342.97	21.85	321.12
MW-6	10/26/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	342.97	22.45	320.52
MW-6	1/22/2008	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	<2.0	<2.0	<2.0	<10	NA	NA	342.97	21.72	321.25
MW-6	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	342.97	23.10	319.87
MW-6	7/2/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	342.97	21.62	321.35
MW-6	10/27/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	342.97	23.70	319.27
MW-6	**1/8/2009**	**<50**	**NA**	**<0.50**	**<1.0**	**<1.0**	**<1.0**	**<1.0**	**<2.0**	**<2.0**	**<2.0**	**<10**	**NA**	**NA**	**342.97**	**24.73**	**318.24**
MW-7	12/1/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	341.21	27.48	313.73
MW-7	12/7/2005	<50	190	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	<0.50	<0.020	341.21	27.29	313.92
MW-7	1/27/2006	<50.0	<100	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	341.21	25.10	316.11
MW-7	4/20/2006	<50.0	<48.7 b	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	341.21	22.71	318.50
MW-7	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	NA	NA	<10.0	NA	NA	341.21	23.40	317.81
MW-7	10/20/2006	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	NA	NA	NA	<5.0	NA	NA	341.21	23.63	317.58
MW-7	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<20	NA	NA	341.21	22.68	318.53
MW-7	4/11/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	341.21	24.51	316.70
MW-7	7/5/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	341.21	21.40	319.81
MW-7	10/26/2007	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	341.21	21.72	319.49
MW-7	1/22/2008	<50 g	NA	<0.50	<1.0	<1.0	<1.0	<1.0	<2.0	<2.0	<2.0	<10	NA	NA	341.21	20.36	320.85
MW-7	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	341.21	21.83	319.38
MW-7	7/2/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	341.21	19.94	321.27
MW-7	10/27/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	<1.0	NA	NA	NA	<10	NA	NA	341.21	22.90	318.31
MW-7	**1/8/2009**	**<50**	**NA**	**<0.50**	**<1.0**	**<1.0**	**<1.0**	**<1.0**	**<2.0**	**<2.0**	**<2.0**	**<10**	**NA**	**NA**	**341.21**	**23.59**	**317.62**

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)

Abbreviations:
TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B.
TEPH = Total petroleum hydrocarbons as diesel by modified EPA Method 8015.
BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B.
MTBE = Methyl tertiary butyl ether
DIPE = Di-isopropyl ether, analyzed by EPA Method 8260B
ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260B
TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260B
TBA = Tertiary butyl alcohol or Tertiary butanol, analyzed by EPA Method 8260B
1,2-DCA = 1,2-Dichloroethane, analyzed by EPA Method 8260B
EDB = 1,2-Dibromoethane or Ethylene dibromide, analyzed by EPA Method 504.1
TOC = Top of Casing Elevation
GW = Groundwater
ug/L = Parts per billion
MSL = Mean sea level
ft. = Feet
<n = Below detection limit
NA = Not applicable

TABLE 1
WELL CONCENTRATIONS
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)

Notes:

a = The concentration reported reflects individual or discrete unidentified peaks not matching a typical fuel pattern.

b = Diesel with Silica gel clean-up.

c = The result for this hydrocarbon is elevated due to the presence of single analyte peak(s) in the quantitation range.

d = The sample, as received, was not preserved in accordance to the referenced analytical method.

e = Hydrocarbon result partly due to individual peak(s) in quantitation range.

f = pH=5

g = Analyzed by EPA Method 8015B (M).

h = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Site surveyed November 22, 2002 by Mid Coast Engineers.

MW-5 surveyed January 31, 2005 by Mid Coast Engineers of Watsonville, CA.

Wells MW-6 and MW-7 surveyed December 19, 2005 by Mid Coast Engineers.

FIGURES

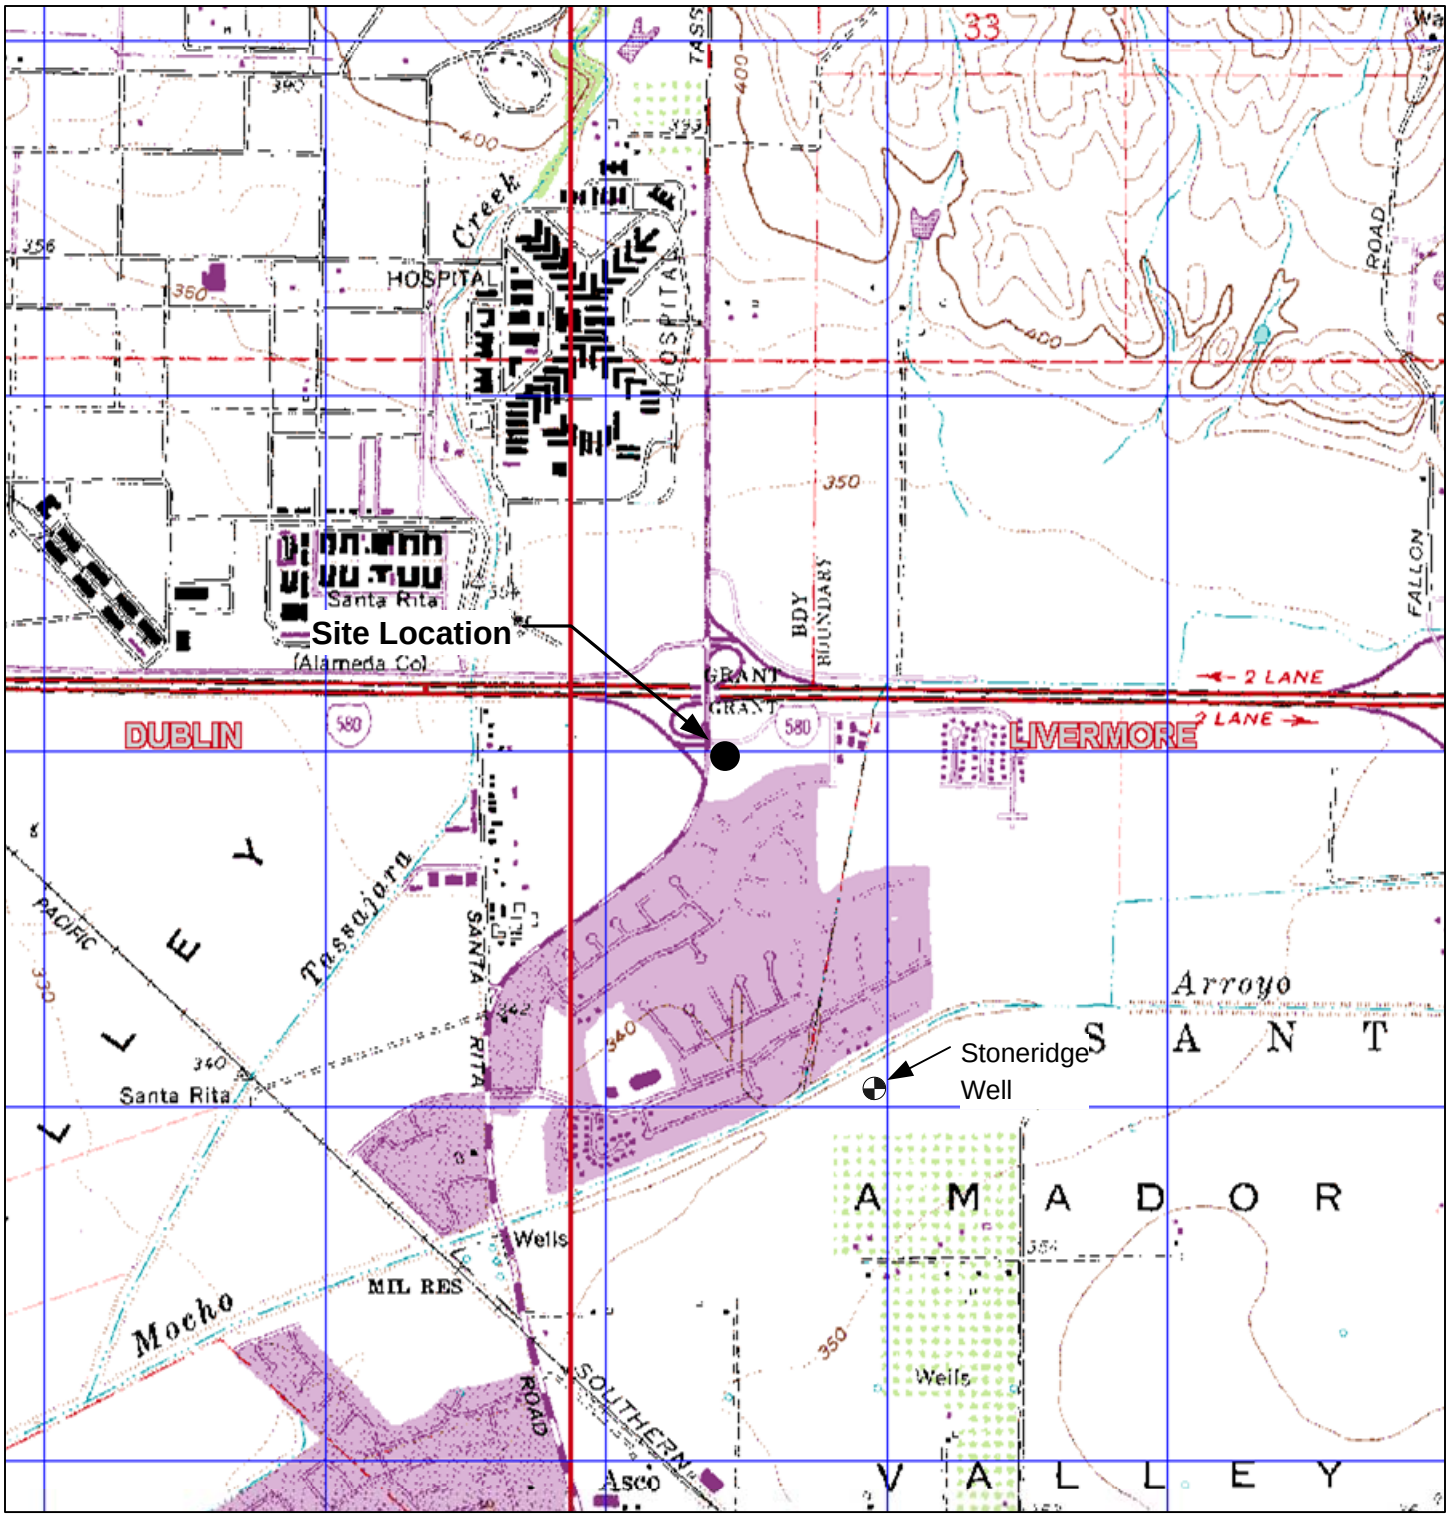

GENERAL NOTES:
Base Map from: DeLorme Yarmouth, ME 04096
Source Data: USGS

QUADRANGLE LOCATION

North

0 1,800 3,600

Scale, Feet

FIGURE 1

SITE LOCATION MAP

SHELL-BRANDED SERVICE STATION

6750 Santa Rita Road
Pleasanton, California

PROJECT NO. SCA6750S1A	DRAWN BY VF 12/04/03
FILE NO.	PREPARED BY VF
REVISION NO.	REVIEWED BY

DELTA CONSULTANTS

PROJECT NUMBER SCA6750S1A

APPROVED BY

CHECKED BY

DRAWN BY J.F.F. 2/13/2009

PIMLICO DRIVE

SANTA RITA ROAD

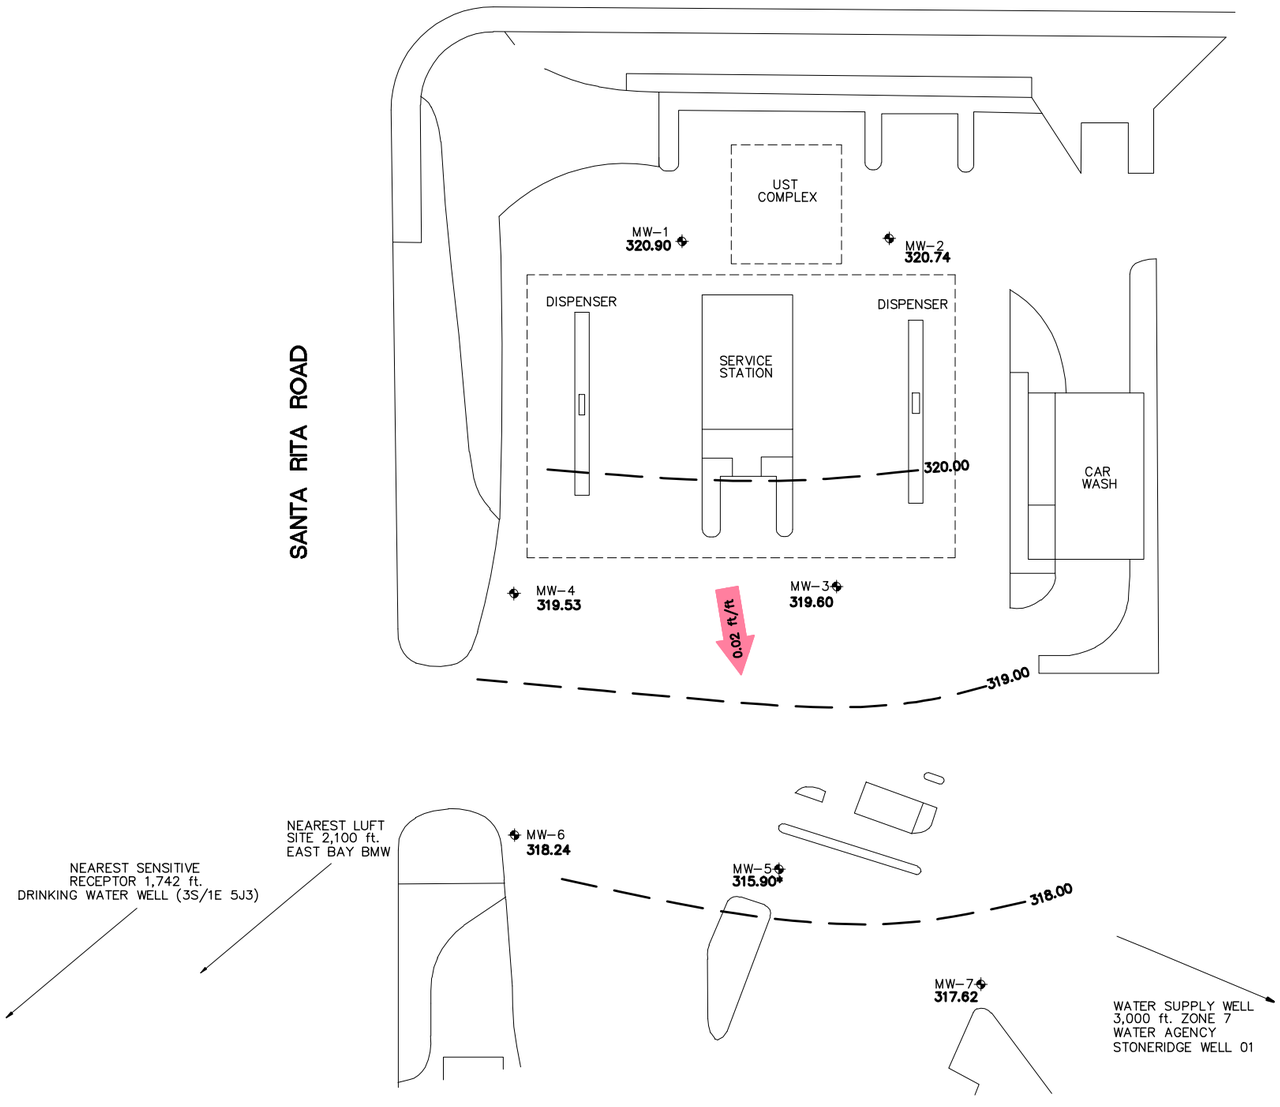

0 20 40 SCALE IN FEET

N W E S

LEGEND

MW-1	GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
324.08	GROUNDWATER ELEVATION IN FEET ABOVE MEAN SEA LEVEL (Ft/MSL)
322.00	GROUNDWATER CONTOUR IN FEET ABOVE MEAN SEA LEVEL (Ft/MSL) CONTOUR INTERVAL=1.00 FEET
0.02 ft/ft	APPROXIMATE GROUNDWATER GRADIENT DIRECTION (ft/ft)
*	ANOMALOUS DATA NOT USED IN CONTOURING

DELTA CONSULTANTS

SHELL OIL PRODUCTS US
SHELL-BRANDED SERVICE STATION
PLEASANTON, CALIFORNIA

FIGURE 2

GROUNDWATER ELEVATION CONTOUR MAP
1/8/2009
6750 SANTA RITA ROAD
PLEASANTON, CALIFORNIA

PROJECT NUMBER SCA6750S1A

APPROVED BY

CHECKED BY

DRAWN BY J.F.F. 2/13/2009

PIMLICO DRIVE

SANTA RITA ROAD

N

W E

S

MW–1				
DATE	TPH–g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
1/8/09	ND<50	ND<0.50	2.7	ND<10

MW–2				
DATE	TPH–g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
1/8/09	320	ND<2.5	300	ND<50

MW–4				
DATE	TPH–g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
1/8/09	56	ND<0.50	48	ND<10

MW–3				
DATE	TPH–g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
1/8/09	160	ND<1.0	160	ND<20

MW–5				
DATE	TPH–g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
1/8/09	ND<50	ND<0.50	4.0	ND<10

MW–6				
DATE	TPH–g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
1/8/09	ND<50	ND<0.50	ND<1.0	ND<10

MW–7				
DATE	TPH–g (µg/L)	BENZENE (µg/L)	MTBE (µg/L)	TBA (µg/L)
1/8/09	ND<50	ND<0.50	ND<1.0	ND<10

UST COMPLEX

DISPENSER

SERVICE STATION

DISPENSER

CAR WASH

MW–1

MW–2

MW–3

MW–4

MW–5

MW–6

MW–7

NEAREST LUFT SITE 2,100 ft. EAST BAY BMW

NEAREST SENSITIVE RECEPTOR 1,742 ft. DRINKING WATER WELL (3S/1E 5J3)

WATER SUPPLY WELL 3,000 ft. ZONE 7 WATER AGENCY STONERIDGE WELL 01

0 20 40 SCALE IN FEET

LEGEND

MW–1 ◆	GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
TPH–g	TOTAL PETROLEUM HYDROCARBONS AS GASOLINE
MTBE	METHYL TERT–BUTYL ETHER
TBA	TERT–BUTYL ALCOHOL
µg/L	MICROGRAMS PER LITER
ND<	NOT DETECTED ABOVE LIMIT NOTED

DELTA CONSULTANTS

SHELL OIL PRODUCTS US
SHELL–BRANDED SERVICE STATION
PLEASANTON, CALIFORNIA

FIGURE 3
HYDROCARBON DISTRIBUTION IN GROUNDWATER MAP
1/8/2009
6750 SANTA RITA ROAD
PLEASANTON, CALIFORNIA

APPENDIX A

BLAINE TECH SERVICES, INC.

FIELD DATA SHEETS

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 9746 4711 Date 1/08/09

Job Number 090108-RM1 Technician R. McCarthy Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
MW-1		X							2/2 tabs stripped
MW-2		X	X						2/2 tabs stripped
MW-3		X	X						1/2 tabs stripped
MW-4	X	X							
MW-5	X	X	X						
MW-6	X								NO TAG
MW-7	X								NO TAG

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12"or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12"or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes:

WELL GAUGING DATA

Project # 090108-RM1 Date 1/08/09 Client SHELL

Site 9746471, 6750 Santa Rita Rd, Pleasanton

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or (TOC)	Notes
MW-1	0818	2					22.58	41.49		
MW-2	0828	2					22.12	40.97		
MW-3	0825	2					22.63	44.01		
MW-4	0822	2					23.91	43.96		
MW-5	0815	2					24.98	32.93		
MW-6	0810	2					24.73	28.98		
MW-7	0807	2					23.59	28.83	↓	

SHELL WELL MONITORING DATA SHEET

BTS #: 090108-RM1	Site: 97464711
Sampler: R. M.	Date: 01/08/09
Well I.D.: MW-1	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth (TD): 41.49	Depth to Water (DTW): 22.58
Depth to Free Product: ~~41.49~~	Thickness of Free Product (feet): ~~22.58~~
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 26.36	

18.9

Purge Method: ~~Bailer~~ / Disposable Bailer / Positive Air Displacement / Electric Submersible / Waterra / Peristaltic / Extraction Pump / Other____

Sampling Method: ~~Bailer~~ / Disposable Bailer / Extraction Port / Dedicated Tubing / Other: ____

3 (Gals.) X	3	=	9 Gals.
1 Case Volume	Specified Volumes		Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius² * 0.163

Time	Temp (°F)	pH	Cond. (mS or (µS))	Turbidity (NTUs)	Gals. Removed	Observations
1016	64.1	7.51	2395	960	3	clear/cloudy
1020	65.5	7.41	2364	71000	6	cloudy
1026	65.5	7.42	2358	71000	9	" "

Did well dewater? Yes (No) Gallons actually evacuated: 9

Sampling Date: 01/08/09 Sampling Time: 1030 Depth to Water: 26.05

Sample I.D.: MW-1 Laboratory: STL Other Calscience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090108-RM1	Site: 97464711
Sampler: R. M	Date: 01/08/09
Well I.D.: MW-2	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth (TD): 40.97	Depth to Water (DTW): 22.17
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 25.89	

18.8

Purge Method: ~~Bailer~~ / Disposable Bailer / Positive Air Displacement / Electric Submersible / Waterra / Peristaltic / Extraction Pump / Other____

Sampling Method: ~~Bailer~~ / Disposable Bailer / Extraction Port / Dedicated Tubing / Other: ____

3 (Gals.) X	3	=	9 Gals.
1 Case Volume	Specified Volumes		Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius^2 * 0.163

Time	Temp (°F)	pH	Cond. (mS or (µS))	Turbidity (NTUs)	Gals. Removed	Observations
1142	63.9	7.76	1896	>1000	3	Yellowish brown
1146	64.8	7.50	2121	71000	6	" "
1151	65.6	7.47	2209	71000	9	" "

Did well dewater? Yes (No) Gallons actually evacuated: 9

Sampling Date: 01/08/09 Sampling Time: 1155 Depth to Water: 22.92

Sample I.D.: MW-2 Laboratory: STL Other Calscience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090108-RM1	Site: 97464711
Sampler: R. M.	Date: 01/08/09
Well I.D.: MW-3	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth (TD): 44.01	Depth to Water (DTW): 22.63
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 26.90	

21.3

Purge Method: ~~Bailer~~ / Disposable Bailer / Positive Air Displacement / Electric Submersible / Waterra Peristaltic / Extraction Pump / Other____

Sampling Method: ~~Bailer~~ / Disposable Bailer / Extraction Port / Dedicated Tubing / Other: ____

3.4 (Gals.) X	3	=	10.2 Gals.
1 Case Volume	Specified Volumes		Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius² * 0.163

Time	Temp (°F)	pH	Cond. (mS or (µS))	Turbidity (NTUs)	Gals. Removed	Observations
1115	63.7	7.44	3968	71000	3.4	
1120	65.1	7.37	3997	71000	6.8	
1124	65.0	7.40	3976	71000	10.2	

Did well dewater? Yes (No) Gallons actually evacuated: 10.2

Sampling Date: 01/08/09 Sampling Time: 1130 Depth to Water: 23.33

Sample I.D.: MW-3 Laboratory: STL Other Calscience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090108-RM1	Site: 97464711
Sampler: R. M.	Date: 01/08/09
Well I.D.: MW-4	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth (TD): 43.96	Depth to Water (DTW): 23.91
Depth to Free Product: ~	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 27.92	

2DC

Purge Method: ~~Bailer~~ / Disposable Bailer / Positive Air Displacement / Electric Submersible / Waterra / Peristaltic / Extraction Pump / Other_____

Sampling Method: ~~Bailer~~ / Disposable Bailer / Extraction Port / Dedicated Tubing / Other: _____

3.2 (Gals.) X	3	=	9.6 Gals.
1 Case Volume	Specified Volumes		Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius^2 * 0.163

Time	Temp (°F)	pH	Cond. (mS or ~~µS~~)	Turbidity (NTUs)	Gals. Removed	Observations
1048	63.9	7.46	1694	721	3.2	clear
1053	64.5	7.39	1774	71000	6.4	cloudy
1057	64.2	7.37	1835	71000	9.6	"

Did well dewater? Yes (No)		Gallons actually evacuated: 9.6	
Sampling Date: 01/08/09	Sampling Time: 1100	Depth to Water: 24.84	
Sample I.D.: MW-4		Laboratory: STL Other Calscience	
Analyzed for: TPH-G BTEX MTBE TPH-D		Other: SEE COC	
EB I.D. (if applicable):	@ Time	Duplicate I.D. (if applicable):	
Analyzed for: TPH-G BTEX MTBE TPH-D		Other:	
D.O. (if req'd): Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd): Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090108-RM1	Site: 97464711
Sampler: R. M	Date: 01/08/09
Well I.D.: MW-5	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth (TD): 32.93	Depth to Water (DTW): 24.98
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 26.57	

Purge Method: ~~Bailer~~ / Disposable Bailer / Positive Air Displacement / Electric Submersible / Waterra / Peristaltic / Extraction Pump / Other_____

Sampling Method: ~~Bailer~~ / Disposable Bailer / Extraction Port / Dedicated Tubing / Other: _____

1.3 (Gals.) X	3 =	3.9 Gals.
1 Case Volume	Specified Volumes	Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius^2 * 0.163

Time	Temp (°F)	pH	Cond. (mS or (uS))	Turbidity (NTUs)	Gals. Removed	Observations
0941	64.2	7.06	3826	286	1.3	clear
0944	65.1	6.99	3878	551	2.6	" clear "
0947	66.3	6.94	3868	997	3.9	

Did well dewater? Yes (No) Gallons actually evacuated: 3.9

Sampling Date: 01/08/09 Sampling Time: 0955 Depth to Water: 26.12

Sample I.D.: MW-5 Laboratory: STL Other Calscience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090108-RM1	Site: 97464711
Sampler: R. M.	Date: 01/08/09
Well I.D.: MW-6	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth (TD): 28.98	Depth to Water (DTW): 24.73 (25.42)
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 25.58	

Purge Method: ~~Bailer~~ / Disposable Bailer / Positive Air Displacement / Electric Submersible / Waterra / Peristaltic / Extraction Pump / Other_____

Sampling Method: ~~Bailer~~ / Disposable Bailer / Extraction Port / Dedicated Tubing / Other: _____

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius^2 * 0.163

.68 (Gals.) X 3 = 2.04 Gals.
1 Case Volume | Specified Volumes | Calculated Volume

Time	Temp (°F)	pH	Cond. (mS or (µS))	Turbidity (NTUs)	Gals. Removed	Observations
0917	63.4	6.91	2515	319	.68	clear
0919	64.9	6.86	2480	364	1.36	" "
0920	65.2	6.89	2489	403	2.04	" "
				DTW - 25.69		

Did well dewater? Yes (NO) Gallons actually evacuated: 2.04

Sampling Date: 01/08/09 Sampling Time: 0925 Depth to Water: 25.42

Sample I.D.: MW-6 Laboratory: STL Other Calscience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090108-RM1	Site: 97464711
Sampler: R. M.	Date: 01/08/09
Well I.D.: MW-7	Well Diameter: (2) 3 4 6 8 ____
Total Well Depth (TD): 28.83	Depth to Water (DTW): 23.59 5.2-
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 24.64	

Purge Method: ~~Bailer~~ / Disposable Bailer / Positive Air Displacement / Electric Submersible / Waterra / Peristaltic / Extraction Pump / Other____

Sampling Method: ~~Bailer~~ / Disposable Bailer / Extraction Port / Dedicated Tubing / Other: ____

.85 (Gals.) X	3	= 2.55 Gals.
1 Case Volume	Specified Volumes	Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius² * 0.163

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
0853	63.6	6.91	2441	127	.85	clear
0856	64.8	6.97	2443	220	1.70	" "
0858	65.4	6.99	2433	556	2.55	" "
				DTW-25.13		

Did well dewater? Yes (No) Gallons actually evacuated: 2.55

Sampling Date: 01/08/09 Sampling Time: 0905 Depth to Water: 24.60

Sample I.D.: MW-7 Laboratory: STL Other Calscience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

APPENDIX B

BLAINE TECH SERVICES, INC.

FIELD PROCEDURES

BLAINE
TECH SERVICES INC.

GROUNDWATER SAMPLING SPECIALISTS
SINCE 1985

January 29, 2009

Denis Brown
Shell Oil Products US
20945 South Wilmington Avenue
Carson, CA 90810

First Quarter 2009 Groundwater Monitoring at
Shell-branded Service Station
6750 Santa Rita Road
Pleasanton, CA

Monitoring performed on January 8, 2009

Groundwater Monitoring Report **090108-RM-1**

This report covers the routine monitoring of groundwater wells at this Shell-branded facility. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purgewater (if applicable) is, likewise, collected and transported to the Martinez Refining Company.

Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight-hour refresher courses.

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. Our activities at this site consisted of objective data and sample collection only. No interpretation of analytical results, defining of hydrological conditions or formulation of recommendations was performed.

Please call if you have any questions.

Yours truly,

Mike Ninokata
Project Manager

MN/jb

attachments: Cumulative Table of WELL CONCENTRATIONS
Certified Analytical Report
Field Data Sheets

cc: Regina Bussard
Delta Environmental
175 Bernal Road, Suite 200
San Jose, CA 95119

BLAINE TECH SERVICES, INC.
METHODS AND PROCEDURES
FOR THE ROUTINE MONITORING OF
GROUNDWATER WELLS AT SHELL SITES

Blaine Tech Services, Inc. performs environmental sampling and documentation as an independent third party. We specialize in groundwater monitoring assignments and intentionally limit the scope of our services to those centered on the generation of objective information.

To avoid conflicts of interest, Blaine Tech Services, Inc. personnel do not evaluate or interpret the information we collect. As a state licensed contractor (C-57 well drilling –water – 746684) performing strictly technical services, we do not make any professional recommendations and perform no consulting of any kind.

SAMPLING PROCEDURES OVERVIEW

SAFETY

All groundwater monitoring assignments performed for Shell comply with Shell's safety guidelines, 29 CFR 1910.120 and SB-198 Injury and Illness Prevention Program (IIPP). All Field Technicians receive the full 40-hour 29CFR 1910.120 OSHA SARA HAZWOPER course, medical clearance and on-the-job training prior to commencing any work on any Shell site.

INSPECTION AND GAUGING

Wells are inspected prior to evacuation and sampling. The condition of the wellhead is checked and noted according to a wellhead inspection checklist.

Standard measurements include the depth to water (DTW) and the total well depth (TD) obtained with industry standard electronic water level indicators that are graduated in increments of hundredths of a foot.

The water in each well is inspected for the presence of immiscibles. When free product is suspected, its presence is confirmed using an electronic interface probe (e.g. MMC). No samples are collected from a well containing over two-hundredths of a foot (0.02') of product.

EVACUATION

Depth to water measurements are collected by our personnel prior to purging and minimum purge volumes are calculated anew for each well based on the height of the water column and the diameter of the well. Expected purge volumes are never less than three case volumes and are set at no less than four case volumes in some jurisdictions.

Well purging devices are selected on the basis of the well diameter and the total volume to be evacuated. In most cases the well will be purged using an electric submersible pump (i.e. Grundfos) suspended near (but not touching) the bottom of the well.

PARAMETER STABILIZATION

Well purging completion standards include minimum purge volumes, but additionally require stabilization of specific groundwater parameters prior to sample collection. Typical groundwater parameters used to measure stability are electrical conductivity, pH, and temperature. Instrument readings are obtained at regular intervals during the evacuation process (no less than once per case volume).

Stabilization standards for routine quarterly monitoring of fuel sites include the following: Temperature is considered to have stabilized when successive readings do not fluctuate more than +/- 1 degree Celsius. Electrical conductivity is considered stable when successive readings are within 10%. pH is considered to be stable when successive readings remain constant or vary no more than 0.2 of a pH unit.

DEWATERED WELLS

Normal evacuation removes no less than three case volumes of water from the well. However, less water may be removed in cases where the well dewaters and does not immediately recharge.

MEASURING RECHARGE

Upon completion of well purging, a depth to water measurement is collected and notated to ensure that the well has recharged to within 80% of its static, pre-purge level prior to sampling.

Wells that do not immediately show 80% recharge or dewatered wells will be allowed a minimum of 2 hours to recharge prior to sampling. The water level at time of sampling will be noted.

PURGEWATER CONTAINMENT

All non-hazardous purgewater evacuated from each groundwater monitoring well is captured and contained in on-board storage tanks on the Sampling Vehicle and/or special water hauling trailers. Effluent from the decontamination of reusable apparatus (sounders, electric pumps and hoses etc.), consisting of groundwater combined with deionized water and non-phosphate soap, is also captured and pumped into effluent tanks.

Non-hazardous purgewater is transported under standard Bill of Lading documentation to a Blaine Tech Services, Inc. facility before being transported to a Shell approved disposal facility.

SAMPLE COLLECTION DEVICES

All samples are collected using a stainless steel, Teflon or disposable bailers.

SAMPLE CONTAINERS

Sample material is decanted directly from the sampling bailer into sample containers provided by the laboratory that will analyze the samples. The transfer of sample material from the bailer to the sample container conforms to specifications contained in the USEPA T.E.G.D. The type of sample container, material of construction, method of closure and filling requirements are specific to the intended analysis. Chemicals needed to preserve the sample material are commonly placed inside the sample containers by the laboratory or glassware vendor prior to delivery of the bottle to our personnel. The laboratory sets the number of replicate containers.

TRIP BLANKS

Trip Blanks, if requested, are taken to the site and kept inside the sample cooler for the duration of the event. They are turned over to the laboratory for analysis with the samples from that site.

DUPLICATES

Duplicates, if requested, may be collected at a site. The Field Technician uses their discretion in choosing the well at which the Duplicate is collected, typically one suspected of containing measurable contaminants. The Duplicate sample is labeled "DUP" and the time of collection is omitted from the COC, thus rendering the sample blind.

SAMPLE STORAGE

All sample containers are promptly placed in food grade ice chests for storage in the field and transport (direct or via our facility) to the designated analytical laboratory. These ice chests contain quantities of restaurant grade ice as a refrigerant material. The samples are maintained in either an ice chest or a refrigerator until relinquished into the custody of the laboratory or laboratory courier.

DOCUMENTATION CONVENTIONS

A label must be affixed to all sample containers. In most cases these labels are generated by our office personnel and are partially preprinted. Labels can also be hand written by our field personnel. The site is identified with the store number and site address, as is the particular groundwater well from which the sample is drawn (e.g. MW-1, MW-2, S-1 etc.). The time and date of sample collection along with the initials of the person who collects the sample are handwritten onto the label.

Chain of Custody records are created using client specific preprinted forms following USEPA specifications.

Bill of Lading records are contemporaneous records created in the field at the site where the non-hazardous purgewater is generated. Field Technicians use preprinted Bill of Lading forms.

DECONTAMINATION

All equipment is brought to the site in clean and serviceable condition and is cleaned after use in each well and before subsequent use in any other well. Equipment is decontaminated before leaving the site.

The primary decontamination device is a commercial steam cleaner. The steam cleaner is de-tuned to function as a hot pressure washer that is then operated with high quality deionized water that is produced at our facility and stored onboard our sampling vehicle. Cleaning is facilitated by the use of proprietary fixtures and devices included in the patented workstation (U.S. Patent 5,535,775) that is incorporated in each sampling vehicle. The steam cleaner is used to decon reels, pumps and bailers.

Any sensitive equipment or parts (i.e. Dissolved Oxygen sensor membrane, water level indicator, etc.) that cannot be washed using the high pressure water, will be sprayed with a non-phosphate soap and deionized water solution and rinsed with deionized water.

DISSOLVED OXYGEN READINGS

Dissolved Oxygen readings are taken pre- and/or post-purge using YSI meters (e.g. YSI Model 54, 58 or 95) or HACH field test kits.

The YSI meters are equipped with a stirring device that enables them to collect accurate in-situ readings. The probe/stirring devices are modified to allow downhole measurements to be taken from wells with diameters as small as two inches. The probe and reel is decontaminated between wells as described above. The meter is calibrated between wells as per the instructions in the operating manual. The probe and stirrer is lowered into the water column. The reading is allowed to stabilize prior to collection.

OXYIDATON REDUCTION POTENTIAL READINGS

All readings are obtained with either Corning or Myron-L meters (e.g. Corning ORP-65 or a Myron-L Ultrameter GP). The meter is cleaned between wells as described above. The meter is calibrated at the start of each day according to the instruction manual.

FERROUS IRON MEASUREMENTS

All field measurements are collected at time of sampling with a HACH test kit.

APPENDIX C

LABORATORY REPORT AND CHAIN-OF-CUSTODY DOCUMENTATION

Calscience Environmental Laboratories, Inc.

January 22, 2009

Michael Ninokata
Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Subject: **Calscience Work Order No.: 09-01-0610**
Client Reference: 6750 Santa Rita Rd., Pleasanton, CA

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 1/9/2009 and analyzed in accordance with the attached chain-of-custody.

Unless otherwise noted, all analytical testing was accomplished in accordance with the guidelines established in our Quality Systems Manual, applicable standard operating procedures, and other related documentation. The original report of subcontracted analysis, if any, is provided herein, and follows the standard Calscience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.

If you have any questions regarding this report, please do not hesitate to contact the undersigned.

Sincerely,

Philip Hamelle for

Calscience Environmental
Laboratories, Inc.
Jessie Kim
Project Manager

Calscience Environmental Laboratories, Inc.

Analytical Report

Blaine Tech Services, Inc.		Date Received:	01/09/09
1680 Rogers Avenue		Work Order No:	09-01-0610
San Jose, CA 95112-1105		Preparation:	EPA 5030B
		Method:	LUFT GC/MS / EPA 8260B
		Units:	ug/L

Project: 6750 Santa Rita Rd., Pleasanton, CA

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
MW-1	**09-01-0610-1-A**	**01/08/09 10:30**	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09 15:12**	**090115L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	2.7	1.0	1		TPPH	ND	50	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	98	74-140			1,2-Dichloroethane-d4	104	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	100	74-110							

MW-2	**09-01-0610-2-A**	**01/08/09 11:55**	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09 17:37**	**090115L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	2.5	5		Tert-Butyl Alcohol (TBA)	ND	50	5	
Ethylbenzene	ND	5.0	5		Diisopropyl Ether (DIPE)	ND	10	5	
Toluene	ND	5.0	5		Ethyl-t-Butyl Ether (ETBE)	ND	10	5	
Xylenes (total)	ND	5.0	5		Tert-Amyl-Methyl Ether (TAME)	ND	10	5	
Methyl-t-Butyl Ether (MTBE)	300	5.0	5		TPPH	320	250	5	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	108	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	97	74-110							

MW-3	**09-01-0610-3-B**	**01/08/09 11:30**	**Aqueous**	**GC/MS RR**	**01/16/09**	**01/16/09 17:38**	**090116L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	1.0	2		Tert-Butyl Alcohol (TBA)	ND	20	2	
Ethylbenzene	ND	2.0	2		Diisopropyl Ether (DIPE)	ND	4.0	2	
Toluene	ND	2.0	2		Ethyl-t-Butyl Ether (ETBE)	ND	4.0	2	
Xylenes (total)	ND	2.0	2		Tert-Amyl-Methyl Ether (TAME)	ND	4.0	2	
Methyl-t-Butyl Ether (MTBE)	160	2.0	2		TPPH	160	100	2	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	112	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	94	88-112		
1,4-Bromofluorobenzene	96	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Calscience Environmental Laboratories, Inc.

Analytical Report

Blaine Tech Services, Inc.		Date Received:	01/09/09
1680 Rogers Avenue		Work Order No:	09-01-0610
San Jose, CA 95112-1105		Preparation:	EPA 5030B
		Method:	LUFT GC/MS / EPA 8260B
		Units:	ug/L

Project: 6750 Santa Rita Rd., Pleasanton, CA

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
MW-4	**09-01-0610-4-A**	**01/08/09 11:00**	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09 18:26**	**090115L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	48	1.0	1		TPPH	56	50	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	102	74-140			1,2-Dichloroethane-d4	107	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	96	74-110							

MW-5	**09-01-0610-5-A**	**01/08/09 09:55**	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09 18:50**	**090115L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	4.0	1.0	1		TPPH	ND	50	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	106	74-140			1,2-Dichloroethane-d4	115	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	97	74-110							

MW-6	**09-01-0610-6-A**	**01/08/09 09:25**	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09 19:14**	**090115L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	111	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	97	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Calscience Environmental Laboratories, Inc.

Analytical Report

Blaine Tech Services, Inc.		Date Received:	01/09/09
1680 Rogers Avenue		Work Order No:	09-01-0610
San Jose, CA 95112-1105		Preparation:	EPA 5030B
		Method:	LUFT GC/MS / EPA 8260B
		Units:	ug/L

Project: 6750 Santa Rita Rd., Pleasanton, CA

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
MW-7	**09-01-0610-7-A**	**01/08/09 09:05**	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09 19:38**	**090115L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	102	74-140			1,2-Dichloroethane-d4	112	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	96	74-110							

Method Blank	**099-12-767-862**	**N/A**	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09 14:47**	**090115L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	97	74-140			1,2-Dichloroethane-d4	99	74-146		
Toluene-d8	98	88-112			Toluene-d8-TPPH	93	88-112		
1,4-Bromofluorobenzene	97	74-110							

Method Blank	**099-12-767-872**	**N/A**	**Aqueous**	**GC/MS RR**	**01/16/09**	**01/16/09 15:13**	**090116L01**

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Toluene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Surrogates:	REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual
Dibromofluoromethane	101	74-140			1,2-Dichloroethane-d4	109	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	97	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Calscience Environmental Laboratories, Inc.

Quality Control - Spike/Spike Duplicate

Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 01/09/09
Work Order No: 09-01-0610
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project 6750 Santa Rita Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
MW-1	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09**	**090115S01**

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	89	86	88-118	3	0-7	3
Carbon Tetrachloride	95	97	67-145	2	0-11	
Chlorobenzene	91	90	88-118	1	0-7	
1,2-Dibromoethane	96	93	70-130	4	0-30	
1,2-Dichlorobenzene	91	91	86-116	0	0-8	
1,1-Dichloroethene	84	81	70-130	4	0-25	
Ethylbenzene	90	89	70-130	1	0-30	
Toluene	89	86	87-123	3	0-8	3
Trichloroethene	86	84	79-127	2	0-10	
Vinyl Chloride	83	81	69-129	2	0-13	
Methyl-t-Butyl Ether (MTBE)	94	92	71-131	2	0-13	
Tert-Butyl Alcohol (TBA)	93	91	36-168	2	0-45	
Diisopropyl Ether (DIPE)	87	99	81-123	13	0-9	4
Ethyl-t-Butyl Ether (ETBE)	99	96	72-126	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	94	91	72-126	4	0-12	
Ethanol	88	81	53-149	8	0-31	

RPD - Relative Percent Difference , CL - Control Limit

Calscience Environmental Laboratories, Inc.

Quality Control - Spike/Spike Duplicate

Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 01/09/09
Work Order No: 09-01-0610
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project 6750 Santa Rita Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
09-01-0872-1	**Aqueous**	**GC/MS RR**	**01/16/09**	**01/16/09**	**090116S01**

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	98	97	88-118	1	0-7	
Carbon Tetrachloride	113	111	67-145	2	0-11	
Chlorobenzene	101	100	88-118	1	0-7	
1,2-Dibromoethane	104	103	70-130	1	0-30	
1,2-Dichlorobenzene	98	99	86-116	1	0-8	
1,1-Dichloroethene	99	94	70-130	5	0-25	
Ethylbenzene	102	101	70-130	1	0-30	
Toluene	98	97	87-123	1	0-8	
Trichloroethene	98	96	79-127	2	0-10	
Vinyl Chloride	74	70	69-129	5	0-13	
Methyl-t-Butyl Ether (MTBE)	101	97	71-131	3	0-13	
Tert-Butyl Alcohol (TBA)	104	100	36-168	4	0-45	
Diisopropyl Ether (DIPE)	105	99	81-123	6	0-9	
Ethyl-t-Butyl Ether (ETBE)	106	103	72-126	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	102	99	72-126	3	0-12	
Ethanol	97	93	53-149	4	0-31	

RPD - Relative Percent Difference , CL - Control Limit

Calscience Environmental Laboratories, Inc.

Quality Control - LCS/LCS Duplicate

Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 09-01-0610
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project: 6750 Santa Rita Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-12-767-862	**Aqueous**	**GC/MS RR**	**01/15/09**	**01/15/09**	**090115L01**

Parameter	LCS %REC	LCSD %REC	%REC CL	ME_CL	RPD	RPD CL	Qualifiers
Benzene	97	98	84-120	78-126	1	0-8	
Carbon Tetrachloride	109	111	63-147	49-161	1	0-10	
Chlorobenzene	101	102	89-119	84-124	1	0-7	
1,2-Dibromoethane	103	105	80-120	73-127	1	0-20	
1,2-Dichlorobenzene	101	103	89-119	84-124	1	0-9	
1,1-Dichloroethene	94	95	77-125	69-133	1	0-16	
Ethylbenzene	102	104	80-120	73-127	2	0-20	
Toluene	98	99	83-125	76-132	1	0-9	
Trichloroethene	98	100	89-119	84-124	2	0-8	
Vinyl Chloride	72	71	63-135	51-147	1	0-13	
Methyl-t-Butyl Ether (MTBE)	99	99	82-118	76-124	1	0-13	
Tert-Butyl Alcohol (TBA)	93	92	46-154	28-172	0	0-32	
Diisopropyl Ether (DIPE)	107	105	81-123	74-130	1	0-11	
Ethyl-t-Butyl Ether (ETBE)	106	102	74-122	66-130	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	101	99	76-124	68-132	2	0-10	
Ethanol	86	86	60-138	47-151	0	0-32	
TPPH	85	86	65-135	53-147	1	0-30	

Total number of LCS compounds : 17
Total number of ME compounds : 0
Total number of ME compounds allowed : 1
LCS ME CL validation result : Pass

RPD - Relative Percent Difference , CL - Control Limit

Calscience Environmental Laboratories, Inc.

Quality Control - LCS/LCS Duplicate

Blaine Tech Services, Inc.	Date Received: N/A
1680 Rogers Avenue	Work Order No: 09-01-0610
San Jose, CA 95112-1105	Preparation: EPA 5030B
	Method: LUFT GC/MS / EPA 8260B

Project: 6750 Santa Rita Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-12-767-872	**Aqueous**	**GC/MS RR**	**01/16/09**	**01/16/09**	**090116L01**

Parameter	LCS %REC	LCSD %REC	%REC CL	ME_CL	RPD	RPD CL	Qualifiers
Benzene	97	99	84-120	78-126	2	0-8	
Carbon Tetrachloride	110	115	63-147	49-161	5	0-10	
Chlorobenzene	99	101	89-119	84-124	2	0-7	
1,2-Dibromoethane	102	104	80-120	73-127	2	0-20	
1,2-Dichlorobenzene	99	101	89-119	84-124	3	0-9	
1,1-Dichloroethene	92	98	77-125	69-133	6	0-16	
Ethylbenzene	100	102	80-120	73-127	2	0-20	
Toluene	97	99	83-125	76-132	2	0-9	
Trichloroethene	97	99	89-119	84-124	2	0-8	
Vinyl Chloride	69	69	63-135	51-147	1	0-13	
Methyl-t-Butyl Ether (MTBE)	98	99	82-118	76-124	1	0-13	
Tert-Butyl Alcohol (TBA)	95	94	46-154	28-172	1	0-32	
Diisopropyl Ether (DIPE)	108	105	81-123	74-130	3	0-11	
Ethyl-t-Butyl Ether (ETBE)	104	105	74-122	66-130	0	0-12	
Tert-Amyl-Methyl Ether (TAME)	100	100	76-124	68-132	0	0-10	
Ethanol	89	89	60-138	47-151	0	0-32	
TPPH	94	93	65-135	53-147	2	0-30	

Total number of LCS compounds : 17
Total number of ME compounds : 0
Total number of ME compounds allowed : 1
LCS ME CL validation result : Pass

RPD - Relative Percent Difference , CL - Control Limit

Calscience Environmental Laboratories, Inc.

Glossary of Terms and Qualifiers

Work Order Number: 09-01-0610

Qualifier	Definition
*	See applicable analysis comment.
1	Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification.
2	Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification.
3	Recovery of the Matrix Spike (MS) or Matrix Spike Duplicate (MSD) compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification.
4	The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification.
5	The PDS/PDSD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported with no further corrective action required.
A	Result is the average of all dilutions, as defined by the method.
B	Analyte was present in the associated method blank.
C	Analyte presence was not confirmed on primary column.
E	Concentration exceeds the calibration range.
H	Sample received and/or analyzed past the recommended holding time.
J	Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
ME	LCS Recovery Percentage is within LCS ME Control Limit range.
N	Nontarget Analyte.
ND	Parameter not detected at the indicated reporting limit.
Q	Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater.
U	Undetected at the laboratory method detection limit.
X	% Recovery and/or RPD out-of-range.
Z	Analyte presence was not confirmed by second column or GC/MS analysis.

Shell Oil Products Chain Of Custody Record

LAB (LOCATION)
- ☑ CALSCIENCE (_____)
- ☐ SPL (_____)
- ☐ XENCO (_____)
- ☐ TEST AMERICA (_____)
- ☐ OTHER (_____)

Please Check Appropriate Box:
☑ ENV. SERVICES | ☐ MOTIVA RETAIL | ☐ SHELL RETAIL
☐ MOTIVA SD&CM | ☐ CONSULTANT | ☐ LUBES
☐ SHELL PIPELINE | ☐ OTHER _____

Print Bill To Contact Name: Denis Brown
INCIDENT # (ENV SERVICES): 9 7 4 6 4 7 1 1 ☐ CHECK IF NO INCIDENT # APPLIES
PO #:
SAP #:
DATE: 01/08/09
PAGE: 1 of 1

SAMPLING COMPANY: Blaine Tech Services | LOG CODE: BTSS
ADDRESS: 1680 Rogers Ave, San Jose, CA 95112
PROJECT CONTACT (Hardcopy or PDF Report to): Michael Ninokata
TELEPHONE: (408)573-0555 | FAX: (408)573-7771 | E-MAIL: mninokata@blainetech.com

SITE ADDRESS: Street and City: 6750 Santa Rita Rd., Pleasanton | State: CA | GLOBAL ID NO: T0600102532
EDF DELIVERABLE TO (Name, Company, Office Location): Jon Suing, Delta, Monrovia Office | PHONE NO.: 626.256.6662 | E-MAIL: jsuing@deltaenv.com | CONSULTANT PROJECT NO: 090108-RM1 | BTS #:
SAMPLER NAME(S) (Print): R. McCarthy
LAB USE ONLY: 09-01-0610

TURNAROUND TIME (CALENDAR DAYS): ☑ STANDARD (14 DAY) ☐ 5 DAYS ☐ 3 DAYS ☐ 2 DAYS ☐ 24 HOURS ☐ RESULTS NEEDED ON WEEKEND
☐ LA - RWQCB REPORT FORMAT ☐ UST AGENCY:

SPECIAL INSTRUCTIONS OR NOTES :
CC Rich Garlow rgarlow@deltaenv.com with final report.
Run TPH-d w/Silica Gel Clean Up

☐ SHELL CONTRACT RATE APPLIES
☐ STATE REIMBURSEMENT RATE APPLIES
☐ EDD NOT NEEDED
☑ RECEIPT VERIFICATION REQUESTED

REQUESTED ANALYSIS

LAB USE ONLY	Field Sample Identification	SAMPLING DATE	SAMPLING TIME	MATRIX	PRESERVATIVE HCL	HNO3	H2SO4	NONE	OTHER	NO. OF CONT.	TPH - Purgeable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)	Methanol (8015M)	TEMPERATURE ON RECEIPT C° / Container PID Readings or Laboratory Notes
1	MW-1	01/08	1030	W	X					3	X		X	X	X	X								
2	MW-2		1155		X					3	X		X	X	X	X								
3	MW-3		1130		X					3	X		X	X	X	X								
4	MW-4		1100		X					3	X		X	X	X	X								
5	MW-5		0955		X					3	X		X	X	X	X								
6	MW-6		0925		X					3	X		X	X	X	X								
7	MW-7	↓	0905	↓	X					3	X		X	X	X	X								

Relinquished by: (Signature)	Received by: (Signature)	Date:	Time:
T. Wiley	T. Wiley (Sample Custodian)	01/08/09	1355
T. Wiley (Sample Custodian)	Tai O'Malley CEC	1/8/09	1355
Tai O'Malley 70650	Wbath CEC	1/9/09	1030

1730 1/8/09
GSO91050139

05/2/06 Revision

Calscience Environmental Laboratories, Inc.

WORK ORDER #: 09-01-0610

SAMPLE RECEIPT FORM

Cooler 1 of 1

CLIENT: BTS

DATE: 01/09/09

TEMPERATURE: (Criteria: 0.0 °C – 6.0 °C, not frozen)

Temperature 2.0 °C - 0.2 °C (CF) = 1.8 °C ☑ Blank ☐ Sample

☐ Sample(s) outside temperature criteria (PM/APM contacted by:_____).

☐ Sample(s) outside temperature criteria but received on ice/chilled on same day of sampling.

☐ **Received at ambient temperature, placed on ice for transport by Courier.**

Ambient Temperature: ☐ Air ☐ Filter ☐ Metals Only ☐ PCBs Only **Initial:** NC

CUSTODY SEALS INTACT:

☐ Cooler ☐_____ ☐ No (Not Intact) ☑ Not Present ☐ N/A **Initial:** NC

☐ Sample ☐_____ ☐ No (Not Intact) ☑ Not Present **Initial:** W.S.C

SAMPLE CONDITION:	Yes	No	N/A
Chain-Of-Custody (COC) document(s) received with samples	☑	☐	☐
COC document(s) received complete	☑	☐	☐
Sampler's name indicated on COC	☑	☐	☐
Sample container label(s) consistent with COC	☑	☐	☐
Sample container(s) intact and good condition	☑	☐	☐
Correct containers and volume for analyses requested	☑	☐	☐
Analyses received within holding time	☑	☐	☐
Proper preservation noted on COC or sample container	☑	☐	☐
Volatile analysis container(s) free of headspace	☑	☐	☐
Tedlar bag(s) free of condensation	☐	☐	☑

CONTAINER TYPE:

Solid: ☐4ozCGJ ☐8ozCGJ ☐16ozCGJ ☐Sleeve ☐EnCores® ☐TerraCores® ☐_____

Water: ☐VOA ☑VOAh (3) ☐VOAna_2 ☐125AGB ☐125AGBh ☐125AGBpo_4 ☐1AGB ☐1AGBna_2 ☐1AGBs ☐500AGB ☐500AGBs ☐250CGB ☐250CGBs ☐1PB ☐500PB ☐500PBna ☐250PB ☐250PBn ☐125PB ☐125PBznna ☐100PBsterile ☐100PBna_2 ☐_____ ☐_____ ☐_____

Air: ☐Tedlar® ☐Summa® ☐_____

Checked/Labeled by: W.S.C

Container: C:Clear A:Amber P:Poly/Plastic G:Glass J:Jar B:Bottle

Reviewed by: SF

Preservative: h:HCL n:HNO_3 na_2:$Na_2S_2O_3$ na:NaOH po_4:H_3PO_4 s:H_2SO_4 znna:$ZnAc_2$+NaOH

Scanned by: W.S.C