

RECEIVED

3:48 pm, Oct 10, 2007

Alameda County
Environmental Health



Shell Oil Products US

October 10, 2007

Re: **Third Quarter 2007 - Quarterly Monitoring and Remediation Status Report
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California**

Dear Mr. Jerry Wickham:

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge.

Sincerely,
Shell Oil Products US

A handwritten signature in black ink, appearing to read "Denis Brown".

Denis L. Brown
Project Manager

October 10, 2007
Project Number: SJ3790H1X
SAP No: 135784

Mr. Jerry Wickham, P.G., CHG
Alameda County Environmental Health
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

Re: **Third Quarter 2007**
Quarterly Monitoring and Remediation Status Report
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California



Dear Mr. Wickham:

On behalf of Shell Oil Products US (SHELL), Delta Consultants (DELTA) has prepared this *Third Quarter 2007 Groundwater Monitoring and Remediation Status Report* for the above referenced site. The sampling activities at the site were conducted by Blaine Tech Services, Inc. under contract to SHELL and included the collection of groundwater samples and static water level measurements. A DELTA staff member under the supervision of a California Registered Civil Engineer or a California Professional Geologist performed the data evaluation.

This quarterly report represents DELTA's professional opinions based upon the currently available information and are arrived at in accordance with currently acceptable professional standards. This report is based upon a specific scope of work requested by the client. The Contract between DELTA and its client outlines the scope of work, and only those tasks specifically authorized by that contract or outlined in this report were performed. This report is intended only for the use of DELTA's Client and anyone else specifically listed on this report. DELTA will not and cannot be liable for unauthorized reliance by any other third party. Other than as contained in this paragraph, DELTA makes no express or implied warranty as to the contents of this report.


Mr. Jerry Wickham
Alameda County Environmental Health
October 15, 2007
Page 2

If you have any questions regarding this site, please contact Mr. Richard Garlow (DELTA) at (408) 826-1880 or Mr. Denis Brown (SHELL) at (707) 865-0251.

Sincerely,
Delta Consultants



Richard A. Garlow, PG 7472
Project Manager



Attachment: Third Quarter 2007 Groundwater Monitoring and Remediation Status Report

cc: Denis Brown, Shell Oil Products US, Carson
Betty Graham, Regional Water Quality Control Board – San Francisco Bay
Danielle Stefani, Livermore-Pleasanton Fire Department
Matthew W. Katen, Zone 7 Water Agency, Pleasanton

SHELL QUARTERLY STATUS REPORT

Station Address:	3790 Hopyard Road, Pleasanton, CA
DELTA Project No.:	SJ3790HIX
SHELL Project Manager / Phone No.:	Denis Brown / (707) 865-0251
DELTA Site Manager / Phone No.:	Richard Garlow / (408) 826-1880
Primary Agency / Regulatory ID No.:	Alameda County Environmental Health / Mr. Jerry Wickham, P.G., CHG
Other Agencies to Receive Copies:	Regional Water Quality Control Board – San Francisco Bay Livermore-Pleasanton Fire Department Zone 7 Water Agency, Pleasanton

WORK PERFORMED THIS QUARTER (THIRD - 2007):

1. Quarterly groundwater monitoring and sampling. Submit quarterly report.
2. The GWE system remained shutdown during the third quarter 2007.

WORK PROPOSED FOR NEXT QUARTER (FOURTH - 2007):

1. Quarterly groundwater monitoring and sampling. Submit quarterly report.
2. Evaluate hydrocarbon levels in light of shut down of GWE system.

Current Phase of Project:	Groundwater Monitoring
Site Use:	Shell-branded Service Station
Frequency of Sampling:	Quarterly (Performed by Blaine Tech Services)
Frequency of Monitoring:	Quarterly
Frequency of System Sampling:	None (GWE system shut down)
Frequency of System Monitoring:	None (GWE system shut down)
Is Separate Phase Hydrocarbon Present On-site (Well #'s):	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Cumulative SPH Recovered to Date:	None
Groundwater removed this quarter:	434 gallons were recovered during sampling on July 9, 2007
Receptors in Site Vicinity:	The Arroyo Mocho Canal is located 365 ft south of site location. There are two municipal drinking wells (Hopyard Well 01 and Hopyard Well 06) located 1367 ft southeast of site.
Site Lithology:	Beneath two to three feet of surface material is a clay or silt to a depth of approximately 50 to 60 feet. This is overlying approximately 20 feet of a sand to an interbedded sand with silt or clay. Underlying this is a clay or silt to the bottom of the borings which may extend to a depth of 110 feet.
Approximate Depth to Groundwater:	11.87 to 18.37 feet below top of well casing (shallow wells) 30.15 to 33.28 feet below top of well casing (deep wells)
Groundwater Gradient:	Site groundwater flow direction is towards the South-southeast at a gradient of 0.05 ft/ft.
Current Remediation Techniques:	GWE system shut down on a temporary basis.

October 15, 2007

SHELL QUARTERLY STATUS REPORT (CONT.)

Permits for Discharge:	Dublin San Ramon Services District Wastewater Discharge Permit No. 05021
Current Agency Correspondence:	None
Site History:	
Case Opening	
On-Site Assessment	1986, Soil borings by Emcon prior to UST replacement
Off-Site Assessment	None
Passive Remediation	Monitor natural attenuation
Active Remediation	None
Closure	None
Summary of Unusual Activity:	None

Discussion:

Third Quarter Remediation:

No remediation was conducted during the quarter.

Comments:

MTBE and TBA plumes remain relatively stable. Small increases in TBA levels observed in wells S-2, S-4.

Recommendations:

Based on continued decline of TPH-G and fuel oxygenates, recommend continued shutdown of GWE system. Continue quarterly groundwater monitoring

ATTACHED:

- Table 1 – Third Quarter 2007 Summary of Well Concentrations
- Table 2 – Well Concentrations
- Figure 1 – Site Location Map
- Figure 2 – Groundwater Elevation Contour Map
- Figure 3 – Hydrocarbon Distribution in Groundwater Map
- Figure 4 – TPH-G Isoconcentration Map
- Figure 5 – Benzene Isoconcentration Map
- Figure 6 – MTBE Isoconcentration Map
- Figure 7 – TBA Isoconcentration Map
- Appendix A – Field Data Sheets
- Appendix B – Field Procedures
- Appendix C – Laboratory Results and Chain-of-Custody Document

TABLES

Table 1
THIRD QUARTER 2007 SUMMARY OF WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-2	7/9/2007	97 k,l	NA	4.6	<1.0	<1.0	<1.0	NA	23	<2.0	<2.0	<2.0	1,500	NA	<100	328.77	13.33	315.44	NA	NA
S-3	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.04	315.36	NA	NA
S-4	7/9/2007	240 k	NA	1.5	0.32 m	6.9	<1.0	NA	59	<2.0	<2.0	<2.0	1,900	NA	<100	328.11	12.78	315.33	NA	NA
S-5	7/9/2007	440 k	NA	3.0	0.29 m	13	19.7	NA	2.8	<2.0	<2.0	<2.0	<10	NA	<100	329.36	15.46	313.90	NA	NA
S-5B	7/9/2007	<50 k	NA	0.37 m	<1.0	<1.0	<1.0	NA	0.49 m	<2.0	<2.0	<2.0	<10	NA	<100	332.25	31.12	301.13	NA	NA
S-5C	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	5.5 m	NA	<100	332.33	31.22	301.11	NA	NA
S-6	7/9/2007	830 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	29	<2.0	<2.0	<2.0	2,300	NA	<100	327.26	14.22	313.04	NA	NA
S-7	7/9/2007	52 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	39	<2.0	<2.0	<2.0	<10	NA	<100	328.41	16.52	311.89	NA	NA
S-8	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	12	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.38	311.76	NA	NA
S-9	7/9/2007	70 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	120	<2.0	<2.0	1.2 m	<10	NA	<100	327.85	18.37	309.48	NA	NA
S-9B	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	3.0	<2.0	<2.0	<2.0	<10	NA	<100	330.47	30.15	300.32	NA	NA
S-9C	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.34 m	<2.0	<2.0	<2.0	<10	NA	<100	330.77	30.28	300.49	NA	NA
S-10	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.00	311.87	NA	NA
S-11	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	59	<2.0	<2.0	<2.0	<10	NA	<100	327.48	16.84	310.64	NA	NA
S-12	7/9/2007	51 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	0.59 m	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.85	305.91	NA	NA
SR-1	7/9/2007	<50 k	NA	0.44 m	<1.0	0.69 m	<1.0	NA	3.5	<2.0	<2.0	<2.0	19	NA	<100	328.33	14.44	313.89	NA	NA

Table 1
THIRD QUARTER 2007 SUMMARY OF WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
SR-2	7/9/2007	58 k,l	NA	0.14 m	<1.0	<1.0	<1.0	NA	21	<2.0	<2.0	<2.0	720	NA	<100	327.31	12.03	315.28	NA	NA
SR-3	7/9/2007	150 k,l	NA	0.97	<1.0	0.33 m	<1.0	NA	19	<2.0	<2.0	<2.0	1,300	NA	<100	327.50	11.87	315.63	NA	NA
C-1	7/9/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	33.38	297.95	NA	NA

Abbreviations:

TEPH = Total petroleum hydrocarbons as diesel.

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8015.

BTEX = benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260

1,2-DCA = 1,2-Dichloroethane, analyzed by EPA Method 8260

TOB = Top of Wellbox Elevation

TOC = Top of Casing Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ppm = Parts per million

ug/L = Parts per billion

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

Table 1
THIRD QUARTER 2007 SUMMARY OF WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-----------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

Notes:

- a = Compounds detected within the chromatographic range of gasoline but not characteristic of the standard gasoline pattern.
 - b = This sample was analyzed outside of the EPA recommended holding time.
 - c = Samples for wells S-6 and S-7 may have been switched.
 - d = Survey date only.
 - e = Hydrocarbon does not match pattern of laboratory's standard.
 - f = The concentration reported reflects individual or discrete unidentified peaks not matching a typical fuel pattern.
 - g = Quantity of unknown hydrocarbon(s) in sample based on gasoline.
 - h = Due to the low levels of analyte found in the sample, the analyte was qualitatively identified based on the compound's retention time and the presence of a single mass ion.
 - i = Estimated value. Analyte detected at a level less than the Reporting Limit (RL) and greater than or equal to the Method Detection Limit (MDL). The user of this data should be aware that this data is of limited reliability.
 - j = Hydrocarbon result partly due to individual peak(s) in quantitation range.
 - k = Analyzed by EPA Method 8015B (M).
 - l = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.
 - m = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
- Ethanol analyzed by EPA Method 8260.
- Corrected groundwater elevation when SPH is present = Top of Casing Elevation - Depth to Water + (0.8 x Hydrocarbon Thickness).
- Well T-2 is a backfill well.
- Beginning September 23, 2002 depth to water referenced to Top of Casing.
- All wells except S-11, S-12, and T-1 through T-4 surveyed March 11, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.
- Survey data for wells S-11 and S-12 provided by Cambria Environmental Technology, Inc.
- C-1 surveyed March 18, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.
- Wells SR-1, SR-2, and SR-3 surveyed September 22, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.
- 4Q05 survey data for wells S-5B, S-5C, S-9B, S-9C, and S-14 provided by Delta Environmental Consultants, Inc.

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-1	11/6/1987	920	NA	230	<5	150	150	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-1	2/14/1988	3,500	NA	1,300	<40	500	500	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	11/6/1987	16,000	NA	870	100	2,700	2,700	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	2/14/1988	1,800	NA	440	<10	140	140	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	10/13/1988	550	NA	110	1	45	15	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	1/31/1989	620	NA	170	2	62	14	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	3/7/1989	1,900	NA	260	270	130	260	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	6/26/1989	320	NA	88	1	32	10	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	9/8/1989	230	NA	80	1	30	15	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	12/14/1989	160	NA	56	0.5	21	3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	3/5/1990	710	NA	57	<0.5	<0.5	88	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	6/14/1990	110	NA	39	0.5	11	2	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	10/2/1990	290	NA	84	1.7	160	8.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	12/18/1990	61	NA	18	1.4	2.2	2.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-2	3/20/1991	110	NA	30	2.2	10	7	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	NA
S-2	6/26/1991	50a	NA	6.3	<0.5	3.3	1.3	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	NA
S-2	9/5/1991	90	NA	12	3.2	2.5	2.3	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	NA
S-2	12/13/1991	<50	NA	12	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.85	313.36	NA	NA
S-2	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.94	314.27	NA	NA
S-2	6/24/1992	<50	NA	0.9	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.78	313.43	NA	NA
S-2	9/17/1992	78	NA	2.6	1.3	1.3	0.9	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.03	314.18	NA	NA
S-2	12/11/1992	<50	NA	0.8	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.81	314.40	NA	NA
S-2	2/4/1993	55	NA	1.3	0.7	0.7	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	NA
S-2	6/3/1993	<50	NA	0.7	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	NA
S-2	9/15/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.63	314.58	NA	NA
S-2	12/9/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.70	314.51	NA	NA
S-2	6/16/1994	<50	NA	0.8	<0.5	0.7	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.94	314.27	NA	NA
S-2	9/13/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.17	314.04	NA	NA
S-2	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.25	314.96	NA	NA
S-2	6/12/1996	<50	NA	6.1	<0.5	<0.5	<0.5	48	NA	NA	NA	NA	NA	NA	NA	329.21	14.31	314.90	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-2	6/25/1997	120	NA	25	0.59	2.4	8.7	130	NA	NA	NA	NA	NA	NA	NA	329.21	14.40	314.81	NA	4.4
S-2	6/19/1998	450	NA	96	<2.5	4	19	180	NA	NA	NA	NA	NA	NA	NA	329.21	13.72	315.49	NA	2.8
S-2	6/17/1999	312	NA	74.4	2.04	1.02	<1.00	147	NA	NA	NA	NA	NA	NA	NA	329.21	13.97	315.24	NA	3.7
S-2	6/15/2000	1,050	NA	261	<5.00	7.54	11.4	13,500	9,850 b	NA	NA	NA	NA	NA	NA	329.21	14.25	314.96	NA	3.3
S-2	11/29/2000	<250	NA	3.75	<2.50	<2.50	<2.50	12,400	10,700 b	NA	NA	NA	NA	NA	NA	329.21	14.82	314.39	NA	2.2
S-2	3/7/2001	<500	NA	14.7	<5.00	<5.00	<5.00	8,610	NA	NA	NA	NA	NA	NA	NA	329.21	13.70	315.51	NA	2.3
S-2	6/18/2001	<2,000	NA	<20	<20	<20	<20	NA	7,100	NA	NA	NA	NA	NA	NA	329.21	14.56	314.65	NA	NA
S-2	9/17/2001	<2,000	NA	<10	<10	<10	<10	NA	7,500	<10	<10	<10	680	NA	<500	329.21	15.18	314.03	NA	NA
S-2	12/31/2001	<1,000	NA	<10	<10	<10	<10	NA	3,800	NA	NA	NA	NA	NA	NA	329.21	13.19	316.02	NA	NA
S-2	3/13/2002	<1,000	NA	65	<10	13	<10	NA	6,500	NA	NA	NA	NA	NA	NA	329.21	15.03	314.18	NA	NA
S-2	6/18/2002	520	NA	28	<5.0	<5.0	<5.0	NA	2,800	NA	NA	NA	NA	NA	NA	329.21	15.60	313.61	NA	NA
S-2	9/27/2002	<1,000	NA	<10	<10	<10	<10	NA	4,200	NA	NA	NA	NA	NA	NA	328.77	14.90	313.87	NA	NA
S-2	12/27/2002	<1,000	NA	<10	<10	<10	<10	NA	4,300	<10	<10	<10	5,600	<10	NA	328.77	14.40	314.37	NA	NA
S-2	3/24/2003	<2,500	NA	28	<25	<25	<50	NA	1,300	NA	NA	NA	NA	NA	NA	328.77	14.86	313.91	NA	NA
S-2	5/9/2003	<2,500	NA	36	<25	35	<50	NA	4,000	NA	NA	NA	6,200	NA	NA	328.77	13.45	315.32	NA	NA
S-2	7/8/2003	<2,000	NA	<20	<20	<20	<40	NA	3,200	NA	NA	NA	NA	NA	NA	328.77	20.10	308.67	NA	NA
S-2	10/15/2003	960 e	NA	6.9	<2.5	9.0	<5.0	NA	90	NA	NA	NA	2,400	NA	NA	328.77	16.67	312.10	NA	NA
S-2	1/6/2004	690	NA	8.3	<0.50	0.72	2.8	NA	82	NA	NA	NA	860	NA	NA	328.77	21.00	307.77	NA	NA
S-2	4/7/2004	980 e	NA	12	<2.5	<2.5	<5.0	NA	28	NA	NA	NA	2,500	NA	NA	328.77	16.62	312.15	NA	NA
S-2	7/27/2004	62	NA	1.5	<0.50	<0.50	<1.0	NA	16	<2.0	<2.0	<2.0	550	NA	<50	328.77	16.64	312.13	NA	NA
S-2	10/29/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	22	<10	<10	<10	1,800	NA	<250	328.77	16.43	312.34	NA	NA
S-2	1/6/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	21	<10	<10	<10	2,700	NA	NA	328.77	16.37	312.40	NA	NA
S-2	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	14	<0.50	<0.50	<0.50	290	NA	<5.0	328.77	18.54	310.23	NA	NA
S-2	7/29/2005	1,300 g	NA	<5.0	<5.0	<5.0	<10	NA	19	<20	<20	<20	1,000	NA	<500	328.77	21.37	307.40	NA	NA
S-2	10/20/2005	1,300	NA	13	<1.0	9.8	2.6	NA	26	<4.0	<4.0	<4.0	730	NA	<100	328.77	21.88	306.89	NA	NA
S-2	1/26/2006	3,820	NA	16.3	<0.500	5.78	<0.500	NA	25.8	<0.500	<0.500	<0.500	445	NA	<50.0	328.77	21.15	307.62	NA	NA
S-2	4/24/2006	4,720	NA	68.8	1.44	115	8.31	NA	1,600	<0.500	<0.500	<0.500	1,010	NA	<50.0	328.77	13.80	314.97	NA	NA
S-2	7/12/2006	<50.0	NA	14.4	<0.500	<0.500	<1.50	NA	70.9	<0.500	<0.500	<0.500	1,660	NA	<50.0	328.77	14.19	314.58	NA	NA
S-2	10/20/2006	108	NA	5.52	<0.500	0.690	<0.500	NA	17.9	<0.500	<0.500	<0.500	382	NA	<50.0	328.77	14.13	314.64	NA	NA
S-2	1/22/2007	<50	NA	0.40 i	<0.50	<0.50	<1.0	NA	16	<1.0	<1.0	<1.0	450	NA	<150	328.77	14.05	314.72	NA	NA
S-2	4/13/2007	52 k	NA	0.53	<1.0	0.22 m	<1.0	NA	14	<2.0	<2.0	<2.0	660	NA	<100	328.77	14.09	314.68	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-2	7/9/2007	97 k,l	NA	4.6	<1.0	<1.0	<1.0	NA	23	<2.0	<2.0	<2.0	1,500	NA	<100	328.77	13.33	315.44	NA	NA
S-3	2/14/1988	<50	NA	<0.5	<1	<4	<4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	10/13/1988	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	1/31/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	3/7/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	6/26/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	12/14/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	3/5/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	6/14/1990	<500	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	10/2/1990	<50	NA	<0.5	<0.5	<0.5	1.0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	12/18/1990	<50	NA	<0.5	1.6	<0.5	2.0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-3	3/20/1991	70	NA	2.3	8.9	4	23	NA	NA	NA	NA	NA	NA	NA	NA	327.67	NA	NA	NA	NA
S-3	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	NA	NA	NA	NA
S-3	9/5/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	NA	NA	NA	NA
S-3	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	13.87	313.80	NA	NA
S-3	3/11/1992	<30	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	13.05	314.62	NA	NA
S-3	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	13.86	313.81	NA	NA
S-3	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	13.01	314.66	NA	NA
S-3	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	13.00	314.67	NA	NA
S-3	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	NA	NA	NA	NA
S-3	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.67	NA	NA	NA	NA
S-3	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.67	13.02	314.65	NA	NA
S-3	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.67	NA	NA	NA	NA
S-3	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.67	15.17	312.50	NA	NA
S-3	6/21/1995	50	NA	4.1	<0.5	20	1.2	NA	NA	NA	NA	NA	NA	NA	NA	327.67	12.49	315.18	NA	NA
S-3	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	327.67	12.53	315.14	NA	NA
S-3	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	327.67	12.64	315.03	NA	1.8
S-3	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	327.67	11.74	315.93	NA	4.1
S-3	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	NA	327.67	12.35	315.32	NA	2.8

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-3	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	327.67	12.51	315.16	NA	3.2
S-3	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	327.67	12.84	314.83	NA	1.0
S-3	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	327.67	12.42	315.25	NA	2.8
S-3	6/18/2001	<50	NA	0.66	1.1	<0.50	0.51	NA	0.66	NA	NA	NA	NA	NA	NA	327.67	13.74	313.93	NA	NA
S-3	9/17/2001	<50	NA	0.73	0.96	<0.50	0.61	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	13.25	314.42	NA	NA
S-3	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	12.38	315.29	NA	NA
S-3	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	13.16	314.51	NA	NA
S-3	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	13.55	314.12	NA	NA
S-3	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.40	13.32	314.08	NA	NA
S-3	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<50	<2.0	NA	327.40	12.55	314.85	NA	NA
S-3	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	327.40	12.71	314.69	NA	NA
S-3	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	12.27	315.13	NA	NA
S-3	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.7	NA	NA	NA	<5.0	NA	NA	327.40	14.10	313.30	NA	NA
S-3	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	14.64	312.76	NA	NA
S-3	1/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	15.11	312.29	NA	NA
S-3	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	14.36	313.04	NA	NA
S-3	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	14.21	313.19	NA	NA
S-3	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	14.03	313.37	NA	NA
S-3	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	NA	327.40	14.08	313.32	NA	NA
S-3	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	NA	<5.0	327.40	12.16	315.24	NA	NA
S-3	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	15.29	312.11	NA	NA
S-3	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	15.90	311.50	NA	NA
S-3	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	59.5	NA	<50.0	327.40	15.00	312.40	NA	NA
S-3	4/24/2006	<50.0	NA	0.610	0.640	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	13.0	NA	<50.0	327.40	12.03	315.37	NA	NA
S-3	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.40	12.35	315.05	NA	NA
S-3	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.40	12.46	314.94	NA	NA
S-3	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<1.0	<1.0	<1.0	<1.0	<10	NA	<150	327.40	13.05	314.35	NA	NA
S-3	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.50	314.90	NA	NA
S-3	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.04	315.36	NA	NA
S-4	2/14/1988	5,100	NA	160	8	730	730	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-4	10/13/1988	530	NA	24	1	25	16	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	1/31/1989	1,100	NA	33	2	20	24	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	3/7/1989	650	NA	37	1	35	27	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	6/26/1989	670	NA	110	<1	85	71	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	9/8/1989	380	NA	32	<1	36	26	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	12/14/1989	210	NA	21	<0.5	30	23	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	3/5/1990	350	NA	43	<0.5	24	47	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	6/14/1990	430	NA	74	<0.5	71	46	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	10/2/1990	700	NA	74	2.2	100	55	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	12/18/1990	1,400	NA	180	2.9	280	230	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	3/20/1991	1,200	NA	100	<2.0	210	130	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	6/26/1991	220	NA	14	<0.5	34	17	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	9/5/1991	580	NA	31	0.8	53	26	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	12/13/1991	370	NA	24	0.9	1.3	46	NA	NA	NA	NA	NA	NA	NA	NA	328.53	15.20	313.33	NA	NA
S-4	3/11/1992	1,600	NA	23	1.2	12	20	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.37	314.16	NA	NA
S-4	6/24/1992	480	NA	48	<1.0	95	22	NA	NA	NA	NA	NA	NA	NA	NA	328.53	15.30	313.23	NA	NA
S-4	9/17/1992	260	NA	35	1.2	51	7.8	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.17	314.36	NA	NA
S-4	12/11/1992	270	NA	34	0.8	28	4.5	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.18	314.35	NA	NA
S-4	2/4/1993	1,100	NA	12	<5.0	89	100	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	6/3/1993	210	NA	48	1.1	42	4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	9/15/1993	700	NA	21	<1.0	110	91	NA	NA	NA	NA	NA	NA	NA	NA	328.53	13.86	314.67	NA	NA
S-4	12/9/1993	250	NA	39	<0.5	3.8	2.6	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.16	314.37	NA	NA
S-4	3/4/1994	150	NA	25	1.4	6.8	2.8	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.17	314.36	NA	NA
S-4 (D)	3/4/1994	140	NA	28	0.8	7.9	3.2	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.17	314.36	NA	NA
S-4	6/16/1994	90	NA	12	<0.5	1.8	2.4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.14	314.39	NA	NA
S-4 (D)	6/16/1994	80	NA	5.9	<0.5	1.5	0.9	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.14	314.39	NA	NA
S-4	9/13/1994	<50	NA	23	<0.5	4.9	2.4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.42	314.11	NA	NA
S-4 (D)	9/13/1994	<50	NA	23	<0.5	4	2.3	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.42	314.11	NA	NA
S-4	6/21/1995	270	NA	34	1.4	25	7.6	NA	NA	NA	NA	NA	NA	NA	NA	328.53	13.82	314.71	NA	NA
S-4 (D)	6/21/1995	280	NA	35	2.1	26	8.4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	13.82	314.71	NA	NA
S-4	6/12/1996	360	NA	52	<0.5	<0.5	<0.5	92	NA	NA	NA	NA	NA	NA	NA	328.53	13.64	314.89	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-4 (D)	6/12/1996	430	NA	54	<1.2	72	21	96	NA	NA	NA	NA	NA	NA	NA	328.53	13.64	314.89	NA	NA
S-4	6/25/1997	6,700	NA	93	1,200	240	1,300	6,900	6,800	NA	NA	NA	NA	NA	NA	328.53	13.74	314.79	NA	0.6
S-4	6/19/1998	3,500	NA	56	15	140	670	2,100	NA	NA	NA	NA	NA	NA	NA	328.53	12.55	315.98	NA	0.8
S-4 (D)	6/19/1998	3,000	NA	51	14	110	530	2,000	NA	NA	NA	NA	NA	NA	NA	328.53	12.55	315.98	NA	0.8
S-4	6/17/1999	1,510	NA	28.4	9.84	176	132	1,780	NA	NA	NA	NA	NA	NA	NA	328.53	13.24	315.29	NA	4.8
S-4	6/15/2000	<500	NA	12.0	<5.00	31.0	22.8	12,200	NA	NA	NA	NA	NA	NA	NA	328.53	13.65	314.88	NA	2.1
S-4	11/29/2000	<500	NA	<5.00	<5.00	<5.00	<5.00	12,100	NA	NA	NA	NA	NA	NA	NA	328.53	14.23	314.30	NA	1.8
S-4	3/7/2001	<500	NA	5.44	<5.00	6.49	<5.00	11,400	14,500	NA	NA	NA	NA	NA	NA	328.53	13.15	315.38	NA	2.4
S-4	6/18/2001	<1,000	NA	<10	<10	<10	<10	NA	3,500	NA	NA	NA	NA	NA	NA	328.53	13.81	314.72	NA	NA
S-4	9/17/2001	<500	NA	<5.0	<5.0	<5.0	<5.0	NA	7,700	NA	NA	NA	NA	NA	NA	328.53	14.29	314.24	NA	NA
S-4	12/31/2001	<1,000	NA	<10	<10	<10	<10	NA	3,800	NA	NA	NA	NA	NA	NA	328.53	13.44	315.09	NA	NA
S-4	3/13/2002	<2,500	NA	<25	<25	<25	<25	NA	18,000	NA	NA	NA	NA	NA	NA	328.53	14.42	314.11	NA	NA
S-4	6/18/2002	<100	NA	1.1	<1.0	<1.0	<1.0	NA	530	NA	NA	NA	NA	NA	NA	328.53	15.19	313.34	NA	NA
S-4	9/27/2002	<200	NA	<2.0	<2.0	<2.0	<2.0	NA	1,100	NA	NA	NA	NA	NA	NA	328.11	14.32	313.79	NA	NA
S-4	12/27/2002	280	NA	3.5	<2.5	17	4.7	NA	390	<2.5	<2.5	<5.0	9,000	<2.5	NA	328.11	13.50	314.61	NA	NA
S-4	3/24/2003	<2,500	NA	<25	<25	<25	<50	NA	780	NA	NA	NA	NA	NA	NA	328.11	14.56	313.55	NA	NA
S-4	5/9/2003	<2,500	NA	<25	<25	<25	<50	NA	1,200	NA	NA	NA	18,000	NA	NA	328.11	13.20	314.91	NA	NA
S-4	7/8/2003	<2,500	NA	<25	<25	<25	<50	NA	1,700	NA	NA	NA	8,700	NA	NA	328.11	20.87	307.24	NA	NA
S-4	10/15/2003	<2,500	NA	<25	<25	<25	<50	NA	280	NA	NA	NA	11,000	NA	NA	328.11	16.15	311.96	NA	NA
S-4	1/6/2004	3,500	NA	<5.0	19	190	570	NA	58	NA	NA	NA	9,600	NA	NA	328.11	21.64	306.47	NA	NA
S-4	4/7/2004	<1,000	NA	<10	<10	<10	<20	NA	110	NA	NA	NA	9,900	NA	NA	328.11	20.89	307.22	NA	NA
S-4	7/27/2004	<1,000	NA	<10	<10	<10	<20	NA	<10	<40	<40	<40	10,000	NA	<1,000	328.11	20.78	307.33	NA	NA
S-4	10/29/2004	<1,000	NA	<10	<10	<10	<20	NA	110	<40	<40	<40	5,600	NA	<1,000	328.11	20.53	307.58	NA	NA
S-4	1/6/2005	<1,000	NA	<10	<10	<10	<20	NA	<10	<40	<40	<40	6,500	NA	NA	328.11	20.44	307.67	NA	NA
S-4	4/14/2005	<250	NA	<2.5	<2.5	3.1	<2.5	NA	120	<2.5	<2.5	<2.5	6,000	NA	<25	328.11	18.60	309.51	NA	NA
S-4	7/29/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	4.4	<10	<10	<10	3,100	NA	<250	328.11	21.03	307.08	NA	NA
S-4	10/20/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	<2.5	<10	<10	<10	2,700	NA	<250	328.11	21.62	306.49	NA	NA
S-4	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	0.950	<0.500	<0.500	<0.500	723	NA	<50.0	328.11	21.10	307.01	NA	NA
S-4	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	79.4	<0.500	<0.500	<0.500	1,310	NA	<50.0	328.11	13.24	314.87	NA	NA
S-4	7/12/2006	<50.0	NA	4.42	<0.500	29.1	36.5	NA	230	<0.500	<0.500	0.930	1,530	NA	<50.0	328.11	13.45	314.66	NA	NA
S-4	10/20/2006	1,150	NA	5.30	0.990	41.5	2.79	NA	208	<0.500	<0.500	<0.500	2,160	NA	<50.0	328.11	13.63	314.48	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-4	1/22/2007	550	NA	4.8	<2.5	30	<5.0	NA	130	<5.0	<5.0	<5.0	3,000	NA	<750	328.11	14.32	313.79	NA	NA
S-4	4/13/2007	320 k,l	NA	0.48 m	<1.0	3.3	<1.0	NA	18	<2.0	<2.0	<2.0	390	NA	<100	328.11	13.68	314.43	NA	NA
S-4	7/9/2007	240 k	NA	1.5	0.32 m	6.9	<1.0	NA	59	<2.0	<2.0	<2.0	1,900	NA	<100	328.11	12.78	315.33	NA	NA
S-5	2/14/1988	1,000	NA	40	86	180	180	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	10/13/1988	560	NA	66	20	18	36	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	1/31/1989	180	NA	27	8	9	13	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	3/7/1989	3,800	NA	520	530	260	570	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	6/26/1989	<50	NA	3.8	<1	2	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	9/8/1989	110	NA	25	2	2	12	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	12/14/1989	1,700	NA	300	86	67	140	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	3/5/1990	1,100	NA	100	110	79	240	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	6/14/1990	600	NA	94	36	40	62	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	10/2/1990	4,500	NA	1,400	160	260	300	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	11/20/1990	16,000	NA	4,600	720	790	1,000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	12/18/1990	25,000	NA	7,600	1,100	1,300	2,300	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-5	3/20/1991	310	NA	39	12	18	30	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	NA
S-5	6/26/1991	1,300	NA	250	62	120	180	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	NA
S-5	9/5/1991	4,700	NA	660	150	170	280	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	NA
S-5	12/13/1991	1,400	NA	580	19	110	80	NA	NA	NA	NA	NA	NA	NA	NA	329.66	17.48	312.18	NA	NA
S-5	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.22	313.44	NA	NA
S-5	6/24/1992	1,800	NA	380	52	120	180	NA	NA	NA	NA	NA	NA	NA	NA	329.66	17.47	312.19	NA	NA
S-5	9/17/1992	2,200	NA	750	91	170	170	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.84	312.82	NA	NA
S-5	12/11/1992	8,700	NA	1,600	66	48	340	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.37	313.29	NA	NA
S-5	2/4/1993	150	NA	156	0.7	4.7	4	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	NA
S-5	6/3/1993	480	NA	140	3.4	17	14	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	NA
S-5	9/15/1993	80	NA	2.4	0.5	1.4	2.9	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.20	313.46	NA	NA
S-5	12/9/1993	120	NA	0.56	<0.5	2.2	1.2	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.26	313.40	NA	NA
S-5	3/4/1994	70	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.25	313.41	NA	NA
S-5	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.04	313.62	NA	NA
S-5	9/13/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	11.52	318.14	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-5	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	14.50	315.16	NA	NA
S-5	6/12/1996	<500	NA	6	<5.0	<5.0	<5.0	1,400	NA	NA	NA	NA	NA	NA	NA	329.66	12.53	317.13	NA	NA
S-5	6/25/1997	<250	NA	<2.5	<2.5	<2.5	<2.5	1,100	NA	NA	NA	NA	NA	NA	NA	329.66	15.34	314.32	NA	1.1
S-5	6/19/1998	<50	NA	1	<0.50	<0.50	<0.50	61	NA	NA	NA	NA	NA	NA	NA	329.66	13.71	315.95	NA	3.6
S-5	6/17/1999	<50.0	NA	1.44	<0.500	<0.500	<0.500	336	NA	NA	NA	NA	NA	NA	NA	329.66	13.56	316.10	NA	1.4
S-5	6/15/2000	<50.0	NA	0.820	<0.500	<0.500	<0.500	221	NA	NA	NA	NA	NA	NA	NA	329.66	15.00	314.66	NA	2.7
S-5	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	183	NA	NA	NA	NA	NA	NA	NA	329.66	16.29	313.37	NA	0.7
S-5	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	7.55	NA	NA	NA	NA	NA	NA	NA	329.66	15.49	314.17	NA	2.5
S-5	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	11	NA	NA	NA	NA	NA	NA	329.66	15.50	314.16	NA	NA
S-5	9/17/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	17	NA	NA	NA	NA	NA	NA	329.66	16.35	313.31	NA	NA
S-5	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	329.66	12.80	316.86	NA	NA
S-5	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	93	NA	NA	NA	NA	NA	NA	329.66	16.32	313.34	NA	NA
S-5	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	130	NA	NA	NA	NA	NA	NA	329.66	17.00	312.66	NA	NA
S-5	9/27/2002	<50	NA	0.88	<0.50	<0.50	<0.50	NA	280	NA	NA	NA	NA	NA	NA	329.36	16.34	313.02	NA	NA
S-5	12/27/2002	<50	NA	1.9	<0.50	<0.50	<0.50	NA	87	<2.0	<2.0	<2.0	<50	<2.0	NA	329.36	15.45	313.91	NA	NA
S-5	3/24/2003	<250	NA	2.5	<2.5	<2.5	<5.0	NA	220	NA	NA	NA	NA	NA	NA	329.36	16.70	312.66	NA	NA
S-5	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	110	NA	NA	NA	17	NA	NA	329.36	13.16	316.20	NA	NA
S-5	7/8/2003	<1,000	NA	<10	<10	<10	<20	NA	320	NA	NA	NA	<100	NA	NA	329.36	19.00	310.36	NA	NA
S-5	10/15/2003	1,400 e	NA	27	<2.5	<2.5	<5.0	NA	180	NA	NA	NA	51	NA	NA	329.36	19.08	310.28	NA	NA
S-5	1/6/2004	84,000	NA	1,400	1,200	<25	17,000	NA	140	NA	NA	NA	<250	NA	NA	329.36	20.97	308.39	NA	NA
S-5	4/7/2004	20,000	NA	70	<25	230	290	NA	66	NA	NA	NA	<250	NA	NA	329.36	20.81	308.55	NA	NA
S-5	7/27/2004	9,900	NA	46	<25	74	<50	NA	43	<100	<100	<100	<250	NA	<2,500	329.36	20.93	308.46	0.04	NA
S-5	8/4/2004	22,000	NA	48	<10	63	38	NA	NA	NA	NA	NA	NA	NA	NA	329.36	20.97	308.46	0.09	NA
S-5	10/29/2004	14,000	NA	93	<25	96	94	NA	<25	<100	<100	<100	<250	NA	<2,500	329.36	18.59	310.77	NA	NA
S-5	1/6/2005	4,500	NA	32	<10	47	86	NA	<10	<40	<40	<40	<100	NA	NA	329.36	18.83	310.53	NA	NA
S-5	4/14/2005	1,700	NA	1.0	<0.50	8.4	16	NA	5.6	<0.50	<0.50	<0.50	8.1	NA	<5.0	329.36	15.03	314.33	NA	NA
S-5	7/29/2005	3,900	NA	8.9	<2.5	9.8	13	NA	21	<10	<10	<40	<200	NA	<1,000	329.36	19.71	309.65	NA	NA
S-5	10/20/2005	3,300	NA	27	<2.5	9.1	14	NA	6.0	<10	<10	<10	32	NA	<250	329.36	21.90	307.46	NA	NA
S-5	11/11/2005	2,300	NA	54	0.69	15	19	NA	8.3	NA	NA	NA	<5.0	NA	NA	329.36	22.17	307.19	NA	NA
S-5	1/26/2006	6,680	NA	43.6	4.93	38.2	89.1	NA	8.38	<0.500	<0.500	<0.500	<10.0	NA	<50.0	329.36	20.85	308.51	NA	NA
S-5	4/24/2006	1,930	NA	1.43	<0.500	<0.500	12.1	NA	2.76	<0.500	<0.500	<0.500	<10.0	NA	<50.0	329.36	14.40	314.96	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-5	7/12/2006	<50.0	NA	4.24	<0.500	25.8	44.8	NA	6.43	<0.500	<0.500	<0.500	35.3	NA	<50.0	329.36	15.50	313.86	NA	NA
S-5	10/20/2006	2,890	NA	17.5	0.760	55.1	106	NA	3.78	<0.500	<0.500	<0.500	<10.0	NA	<50.0	329.36	15.55	313.81	NA	NA
S-5	1/22/2007	1,600	NA	7.3	0.54	35	60	NA	0.73 i	<1.0	<1.0	<1.0	<10	NA	<150	329.36	15.74	313.62	NA	NA
S-5	4/13/2007	1,100 k	NA	4.6	0.47 m	18	25.9	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	329.36	15.69	313.67	NA	NA
S-5	7/9/2007	440 k	NA	3.0	0.29 m	13	19.7	NA	2.8	<2.0	<2.0	<2.0	<10	NA	<100	329.36	15.46	313.90	NA	NA
S-5B	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	332.25	43.71	288.54	NA	NA
S-5B	11/11/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	2.5	NA	NA	NA	15	NA	NA	332.25	43.79	288.46	NA	NA
S-5B	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.63	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.25	38.21	294.04	NA	NA
S-5B	4/24/2006	<50.0	NA	0.540	1.18	<0.500	<0.500	NA	1.88	<0.500	<0.500	<0.500	12.2	NA	<50.0	332.25	30.68	301.57	NA	NA
S-5B	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.63	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.25	30.05	302.20	NA	NA
S-5B	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.04	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.25	31.60	300.65	NA	NA
S-5B	1/22/2007	<50	NA	0.33 i	0.36 i	0.27 i	<1.0	NA	0.90 i	<1.0	<1.0	<1.0	<10	NA	<150	332.25	27.79	304.46	NA	NA
S-5B	4/13/2007	<50 k	NA	0.30 m	0.28 m	<1.0	<1.0	NA	0.73 m	<2.0	<2.0	<2.0	<10	NA	79 m	332.25	24.78	307.47	NA	NA
S-5B	7/9/2007	<50 k	NA	0.37 m	<1.0	<1.0	<1.0	NA	0.49 m	<2.0	<2.0	<2.0	<10	NA	<100	332.25	31.12	301.13	NA	NA
S-5C	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	332.33	43.69	288.64	NA	NA
S-5C	11/11/2005	55	NA	<0.50	0.67	<0.50	<1.0	NA	0.87	NA	NA	NA	<5.0	NA	NA	332.33	43.65	288.68	NA	NA
S-5C	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.91	<0.500	<0.500	<0.500	41.2	NA	<50.0	332.33	38.11	294.22	NA	NA
S-5C	4/24/2006	<50.0	NA	0.740	<0.500	<0.500	<0.500	NA	1.93	<0.500	<0.500	<0.500	17.8	NA	<50.0	332.33	30.61	301.72	NA	NA
S-5C	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.42	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.33	30.07	302.26	NA	NA
S-5C	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.33	31.67	300.66	NA	NA
S-5C	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<1.0	<1.0	<1.0	<1.0	9.0 h,i	NA	<150	332.33	27.90	304.43	NA	NA
S-5C	4/13/2007	<50 k	NA	0.24 m	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	12	NA	<100	332.33	24.90	307.43	NA	NA
S-5C	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	5.5 m	NA	<100	332.33	31.22	301.11	NA	NA
S-6	10/13/1988	1100	NA	13.0	1	42	33	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	1/31/1989	340	NA	3.8	<1	8	3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	3/7/1989	190	NA	3.8	<1	7	3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	6/26/1989	480	NA	15	<1	6	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	9/8/1989	270	NA	1.3	1	7	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-6	12/15/1989	320	NA	1.0	<0.5	2.6	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	3/6/1990	420	NA	3.1	<0.5	14	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	6/14/1990	370	NA	3.7	0.9	4.8	3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	10/2/1990	190	NA	6.6	1.6	1.9	2.8	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	12/18/1990	430	NA	10	0.7	1.6	1.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-6	3/20/1991	130a	NA	606	0.6	0.7	3	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	NA
S-6	6/26/1991	120a	NA	3.8	0.8	<0.5	1.7	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	NA
S-6	9/5/1991	60	NA	<0.5	0.8	<0.5	0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	NA
S-6	12/13/1991	150	NA	2.3	<0.5	<0.5	150	NA	NA	NA	NA	NA	NA	NA	NA	327.62	15.11	312.51	NA	NA
S-6	3/11/1992	<30	NA	<0.3	<0.3	<0.5	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	327.62	16.35	311.27	NA	NA
S-6	6/24/1992	170	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	16.51	311.11	NA	NA
S-6	9/17/1992	190	NA	<0.5	1.6	<0.5	1.2	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.33	313.29	NA	NA
S-6	12/11/1992	180	NA	<0.5	0.8	<0.5	0.7	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.48	313.14	NA	NA
S-6	2/4/1993	290	NA	<0.5	<0.5	<0.5	0.7	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	NA
S-6	6/3/1993	100	NA	1.2	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	NA
S-6	9/15/1993	160	NA	1.4	<0.5	0.9	2	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.16	313.46	NA	NA
S-6	12/9/1993	130	NA	2.3	2.6	5.1	6.2	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.68	312.94	NA	NA
S-6	3/4/1994	220	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.42	313.20	NA	NA
S-6	6/16/1994	60	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.92	312.70	NA	NA
S-6	9/13/1994	<50	NA	<0.5	6	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.72	312.90	NA	NA
S-6	6/21/1995	270	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	13.86	313.76	NA	NA
S-6	6/12/1996	200	NA	2	<0.5	<0.5	<0.5	12	NA	NA	NA	NA	NA	NA	NA	327.62	13.90	313.72	NA	NA
S-6	6/25/1997	180	NA	<0.50	0.61	<0.50	0.77	28	NA	NA	NA	NA	NA	NA	NA	327.62	13.64	313.98	NA	1.8
S-6 (D)	6/25/1997	130	NA	<0.50	<0.50	<0.50	<0.50	21	NA	NA	NA	NA	NA	NA	NA	327.62	13.64	313.98	NA	1.8
S-6	6/19/1998	100	NA	7.6	<0.50	<0.50	<0.50	27	NA	NA	NA	NA	NA	NA	NA	327.62	13.81	313.81	NA	1.7
S-6	6/17/1999	114	NA	4.14	<0.500	<0.500	<0.500	19.9	NA	NA	NA	NA	NA	NA	NA	327.62	14.21	313.41	NA	1.6
S-6	6/15/2000	367	NA	17.5	<0.500	<0.500	<0.500	1,050	NA	NA	NA	NA	NA	NA	NA	327.62	14.51	313.11	NA	1.8
S-6	11/29/2000	154	NA	0.754	16.4	<0.500	1.05	5,470	NA	NA	NA	NA	NA	NA	NA	327.62	14.32	313.30	NA	2.1
S-6	3/7/2001	183	NA	0.971	25.1	0.636	0.996	6,830	NA	NA	NA	NA	NA	NA	NA	327.62	15.39	312.23	NA	1.7
S-6	6/18/2001	<2,000	NA	<20	<20	<20	<20	NA	8,200	NA	NA	NA	NA	NA	NA	327.62	14.72	312.90	NA	NA
S-6	09/17/2001 c	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	5.7	<2.0	<2.0	<2.0	<50	NA	<500	327.62	16.69	310.93	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-6	12/31/2001	260	NA	<0.50	<0.50	<0.50	<0.50	NA	11,000	NA	NA	NA	NA	NA	NA	327.62	13.99	313.63	NA	NA
S-6	3/13/2002	440	NA	<2.5	<2.5	<2.5	<2.5	NA	930	NA	NA	NA	NA	NA	NA	327.62	15.10	312.52	NA	NA
S-6	6/18/2002	340	NA	<1.0	<1.0	<1.0	<1.0	NA	560	NA	NA	NA	NA	NA	NA	327.62	15.24	312.38	NA	NA
S-6	9/27/2002	<250	NA	<2.5	<2.5	<2.5	<2.5	NA	580	NA	NA	NA	NA	NA	NA	327.26	14.34	312.92	NA	NA
S-6	12/27/2002	<500	NA	<5.0	<5.0	<5.0	<5.0	NA	230	<5.0	<5.0	<5.0	10,000	<5.0	NA	327.26	14.30	312.96	NA	NA
S-6	3/24/2003	<5,000	NA	<50	<50	<50	<100	NA	<500	NA	NA	NA	NA	NA	NA	327.26	14.37	312.89	NA	NA
S-6	5/9/2003	<2,500	NA	<25	<25	<25	<50	NA	140	NA	NA	NA	12,000	NA	NA	327.26	14.25	313.01	NA	NA
S-6	7/8/2003	<2,500	NA	<25	<25	<25	<50	NA	100	NA	NA	NA	8,400	NA	NA	327.26	15.37	311.89	NA	NA
S-6	10/15/2003	<1,000	NA	<10	<10	<10	<20	NA	63	NA	NA	NA	10,000	NA	NA	327.26	17.69	309.57	NA	NA
S-6	1/6/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	27	NA	NA	NA	7,600	NA	NA	327.26	17.19	310.07	NA	NA
S-6	4/7/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	15	NA	NA	NA	2,900	NA	NA	327.26	16.72	310.54	NA	NA
S-6	7/27/2004	860 e	NA	<5.0	<5.0	<5.0	<10	NA	30	<20	<20	<20	5,700	NA	<500	327.26	16.90	310.36	NA	NA
S-6	10/29/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	14	<20	<20	<20	2,500	NA	<500	327.26	16.68	310.58	NA	NA
S-6	1/6/2005	<200	NA	<2.0	<2.0	<2.0	<4.0	NA	8.7	<8.0	<8.0	<8.0	1,200	NA	NA	327.26	16.75	310.51	NA	NA
S-6	4/14/2005	180	NA	<0.90	<0.90	<0.90	<0.90	NA	11	<0.90	<0.90	<0.90	2,300	NA	<9.0	327.26	15.30	311.96	NA	NA
S-6	7/29/2005	270 g	NA	<2.5	<2.5	<2.5	<5.0	NA	17	<10	<10	<10	2,300	NA	<250	327.26	16.77	310.49	NA	NA
S-6	10/20/2005	570	NA	<2.5	<2.5	<2.5	<5.0	NA	7.1	<10	<10	<10	1,200	NA	<250	327.26	17.30	309.96	NA	NA
S-6	1/26/2006	808	NA	<0.500	<0.500	<0.500	<0.500	NA	5.07	<0.500	<0.500	<0.500	473	NA	<50.0	327.26	17.00	310.26	NA	NA
S-6	4/24/2006	303	NA	<0.500	<0.500	<0.500	<0.500	NA	4.03	<0.500	<0.500	<0.500	212	NA	<50.0	327.26	15.42	311.84	NA	NA
S-6	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	13.3	<0.500	<0.500	<0.500	609	NA	<50.0	327.26	15.15	312.11	NA	NA
S-6	10/20/2006	850	NA	<0.500	<0.500	<0.500	<0.500	NA	26.4	<0.500	<0.500	<0.500	1,050	NA	<50.0	327.26	13.98	313.28	NA	NA
S-6	1/22/2007	620	NA	<2.0	<2.0	<2.0	<4.0	NA	30	<4.0	<4.0	<4.0	2,000	NA	<600	327.26	14.14	313.12	NA	NA
S-6	4/13/2007	490 k,l	NA	<2.5	<5.0	<5.0	<5.0	NA	21	<10	<10	<10	1,700	NA	<500	327.26	14.35	312.91	NA	NA
S-6	7/9/2007	830 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	29	<2.0	<2.0	<2.0	2,300	NA	<100	327.26	14.22	313.04	NA	NA
S-7	10/13/1988	<50	NA	0.6	1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	1/31/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	3/7/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	6/26/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	12/15/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-7	3/6/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	10/2/1990	<50	NA	<0.5	0.6	<0.5	0.9	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	12/18/1990	<50	NA	0.5	<0.5	<0.5	0.86	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	3/20/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	9/5/1991	<50	NA	<0.5	0.6	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	12/13/1991	<50	NA	<0.6	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	17.70	310.97	NA	NA
S-7	3/11/1992	<50	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	328.67	17.06	311.61	NA	NA
S-7	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	17.80	310.87	NA	NA
S-7	9/17/1992	<50	NA	0.6	0.6	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	17.00	311.67	NA	NA
S-7	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	17.35	311.32	NA	NA
S-7	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.67	16.65	312.02	NA	NA
S-7	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.67	16.83	311.84	NA	NA
S-7	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.67	15.88	312.79	NA	NA
S-7	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	328.67	16.22	312.45	NA	NA
S-7	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	328.67	16.12	312.55	NA	3
S-7	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	328.67	14.81	313.86	NA	2.6
S-7	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	NA	328.67	15.91	312.76	NA	5.1
S-7	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	7.32	NA	NA	NA	NA	NA	NA	NA	328.67	16.14	312.53	NA	2.0
S-7	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	328.67	16.89	311.78	NA	3.6
S-7	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	328.67	16.55	312.12	NA	2.1
S-7	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	2.5	NA	NA	NA	NA	NA	NA	328.67	16.30	312.37	NA	NA
S-7	09/17/2001 c	150	NA	<0.50	55	<0.50	<0.50	NA	8,300	NA	NA	NA	NA	NA	NA	328.67	14.23	314.44	NA	NA
S-7	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	328.67	16.28	312.39	NA	NA
S-7	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	5.9	NA	NA	NA	NA	NA	NA	328.67	17.41	311.26	NA	NA
S-7	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	12	NA	NA	NA	NA	NA	NA	328.67	17.63	311.04	NA	NA
S-7	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	10	NA	NA	NA	NA	NA	NA	328.41	16.96	311.45	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-7	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	22	<2.0	<2.0	<2.0	<50	4.1	NA	328.41	16.00	312.41	NA	NA
S-7	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	21	NA	NA	NA	NA	NA	NA	328.41	17.12	311.29	NA	NA
S-7	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	31	NA	NA	NA	7.3	NA	NA	328.41	16.14	312.27	NA	NA
S-7	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	36	NA	NA	NA	6.5	NA	NA	328.41	17.42	310.99	NA	NA
S-7	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	100	NA	NA	NA	<5.0	NA	NA	328.41	15.49	312.92	NA	NA
S-7	1/6/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	200	NA	NA	NA	20	NA	NA	328.41	18.93	309.48	NA	NA
S-7	4/7/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	380	NA	NA	NA	130	NA	NA	328.41	18.93	309.48	NA	NA
S-7	7/27/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	240	<10	<10	<10	45	NA	<250	328.41	18.91	309.50	NA	NA
S-7	10/29/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	270	<10	<10	<10	52	NA	<250	328.41	18.65	309.76	NA	NA
S-7	1/6/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	160	<10	<10	<10	<25	NA	NA	328.41	18.52	309.89	NA	NA
S-7	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	230	<0.50	<0.50	<0.50	130	NA	<5.0	328.41	16.22	312.19	NA	NA
S-7	7/29/2005	<2,000	NA	<20	<20	<20	<40	NA	170	<80	<80	<80	<200	NA	<2,000	328.41	18.57	309.84	NA	NA
S-7	10/20/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	180	<4.0	<4.0	<4.0	32	NA	<100	328.41	19.25	309.16	NA	NA
S-7	1/26/2006	75.9	NA	<0.500	<0.500	<0.500	<0.500	NA	172	<0.500	<0.500	<0.500	65.1	NA	<50.0	328.41	19.05	309.36	NA	NA
S-7	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	199	<0.500	<0.500	<0.500	22.6	NA	<50.0	328.41	16.91	311.50	NA	NA
S-7	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	122	<0.500	<0.500	<0.500	<10.0	NA	<50.0	328.41	16.42	311.99	NA	NA
S-7	10/20/2006	176	NA	<0.500	<0.500	<0.500	0.720	NA	73.5	<0.500	<0.500	<0.500	<10.0	NA	<50.0	328.41	16.66	311.75	NA	NA
S-7	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	62	<1.0	<1.0	<1.0	6.2 h,i	NA	<150	328.41	17.24	311.17	NA	NA
S-7	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	6.5	<2.0	<2.0	<2.0	<10	NA	<100	328.41	17.05	311.36	NA	NA
S-7	7/9/2007	52 k,j	NA	<0.50	<1.0	<1.0	<1.0	NA	39	<2.0	<2.0	<2.0	<10	NA	<100	328.41	16.52	311.89	NA	NA
S-8	3/7/1989	<50	NA	1.2	1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	6/26/1989	<50	NA	0.8	1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	12/14/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	3/5/1990	<50	NA	<0.5	0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	10/2/1990	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	12/18/1990	<50	NA	2.9	7.0	1.0	6.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	3/20/1991	<50a	NA	0.8	1.8	2.6	5.2	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-8	9/5/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.73	311.27	NA	NA
S-8	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.64	312.36	NA	NA
S-8	6/24/1992	<50	NA	1.4	1.9	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.77	311.23	NA	NA
S-8	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.37	311.63	NA	NA
S-8	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.94	312.06	NA	NA
S-8	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.91	312.09	NA	NA
S-8	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.16	313.08	NA	NA
S-8	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.11	312.89	NA	NA
S-8	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	327.00	14.20	312.80	NA	NA
S-8	6/25/1997	170	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	327.00	14.42	312.58	NA	0.5
S-8	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	327.00	13.49	313.51	NA	2.2
S-8	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	NA	327.00	14.07	312.93	NA	0.9
S-8	6/15/2000	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	6/21/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	21.0	NA	NA	NA	NA	NA	NA	NA	327.00	14.43	312.57	NA	NA
S-8	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	9.46	NA	NA	NA	NA	NA	NA	NA	327.00	14.44	312.56	NA	2.2
S-8	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	4.21	NA	NA	NA	NA	NA	NA	NA	327.00	13.69	313.31	NA	2.1
S-8	6/18/2001	<50	NA	0.55	0.92	<0.50	0.51	NA	13	NA	NA	NA	NA	NA	NA	327.00	14.60	312.40	NA	NA
S-8	9/17/2001	Unable to sample		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.07	311.93	NA	NA
S-8	9/18/2001	Unable to sample		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	12/31/2001	<50	NA	1.1	1.4	<0.50	<0.50	NA	8.4	NA	NA	NA	NA	NA	NA	327.00	14.02	312.98	NA	NA
S-8	3/13/2002	Unable to sample		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.92	312.08	NA	NA
S-8	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	19	NA	NA	NA	NA	NA	NA	327.00	15.37	311.63	NA	NA
S-8	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	19	NA	NA	NA	NA	NA	NA	326.14	14.60	311.54	NA	NA
S-8	12/27/2002	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.14	NA	NA	NA	NA
S-8	1/7/2003	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.14	NA	NA	NA	NA
S-8	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	25	NA	NA	NA	NA	NA	NA	326.14	14.58	311.56	NA	NA
S-8	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	24	NA	NA	NA	<5.0	NA	NA	326.14	13.45	312.69	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)	
S-8	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	46	NA	NA	NA	<5.0	NA	NA	326.14	15.19	310.95	NA	NA	
S-8	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	42	NA	NA	NA	<5.0	NA	NA	326.14	16.58	309.56	NA	NA	
S-8	1/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	50	NA	NA	NA	<5.0	NA	NA	326.14	16.27	309.87	NA	NA	
S-8	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	33	NA	NA	NA	<5.0	NA	NA	326.14	16.12	310.02	NA	NA	
S-8	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	18	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	16.26	309.88	NA	NA	
S-8	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	25	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	15.93	310.21	NA	NA	
S-8	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	21	<2.0	<2.0	<2.0	<5.0	NA	NA	326.14	15.79	310.35	NA	NA	
S-8	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	11	<0.50	<0.50	<0.50	<5.0	NA	<5.0	326.14	14.78	311.36	NA	NA	
S-8	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	13	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	16.51	309.63	NA	NA	
S-8	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	11	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	17.38	308.76	NA	NA	
S-8	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	9.65	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	16.55	309.59	NA	NA	
S-8	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	5.94	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	14.18	311.96	NA	NA	
S-8	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	7.00	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	14.52	311.62	NA	NA	
S-8	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	8.54	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	14.30	311.84	NA	NA	
S-8	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	11	<1.0	<1.0	<1.0	<10	NA	<150	326.14	15.07	311.07	NA	NA	
S-8	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	9.0	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.31	311.83	NA	NA	
S-8	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	12	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.38	311.76	NA	NA	
S-9	3/7/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-9	6/26/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	9/8/1989	<50	NA	1.7	2	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/15/1989	<50	NA	0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/6/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	10/2/1990	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/18/1990	<50	NA	20	27	7.1	35	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/7/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	6/26/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	9/8/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/15/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/6/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-9	6/14/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/2/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/18/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/20/1991	70a	NA	0.7	0.7	<0.5	1	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	9/5/1991	<50	NA	<0.5	0.8	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	18.18	310.06	NA	NA
S-9	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.37	310.87	NA	NA
S-9	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	18.45	309.79	NA	NA
S-9	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.88	310.36	NA	NA
S-9	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.34	310.90	NA	NA
S-9	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.42	310.82	NA	NA
S-9	12/9/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	16.89	311.35	NA	NA
S-9	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.22	311.02	NA	NA
S-9	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.46	310.78	NA	NA
S-9	9/13/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.59	310.65	NA	NA
S-9	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.03	311.21	NA	NA
S-9	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	328.24	16.76	311.48	NA	NA
S-9	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	2.8	NA	NA	NA	NA	NA	NA	NA	328.24	16.89	311.35	NA	1
S-9	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	7.1	NA	NA	NA	NA	NA	NA	NA	328.24	15.59	312.65	NA	3.8
S-9	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	15.3	NA	NA	NA	NA	NA	NA	NA	328.24	16.47	311.77	NA	1.9
S-9	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	57.2	NA	NA	NA	NA	NA	NA	NA	328.24	16.11	312.13	NA	1.1
S-9	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	76.5	NA	NA	NA	NA	NA	NA	NA	328.24	17.30	310.94	NA	1.1
S-9	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	84.9	NA	NA	NA	NA	NA	NA	NA	328.24	19.42	308.82	NA	1.1
S-9	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	86	NA	NA	NA	NA	NA	NA	328.24	17.22	311.02	NA	NA
S-9	9/17/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	130	NA	NA	NA	NA	NA	NA	328.24	17.66	310.58	NA	NA
S-9	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	120	NA	NA	NA	NA	NA	NA	328.24	17.65	310.59	NA	NA
S-9	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	130	NA	NA	NA	NA	NA	NA	328.24	17.75	310.49	NA	NA
S-9	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	160	NA	NA	NA	NA	NA	NA	328.24	19.59	308.65	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-9	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	180	NA	NA	NA	NA	NA	NA	327.85	17.65	310.20	NA	NA
S-9	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	180	<2.0	<2.0	<2.0	<50	2.8	NA	327.85	18.45	309.40	NA	NA
S-9	3/24/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	230	NA	NA	NA	NA	NA	NA	327.85	17.97	309.88	NA	NA
S-9	5/9/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	240	NA	NA	NA	<25	NA	NA	327.85	17.68	310.17	NA	NA
S-9	7/8/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	250	NA	NA	NA	<25	NA	NA	327.85	17.65	310.20	NA	NA
S-9	10/15/2003	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	210	NA	NA	NA	<10	NA	NA	327.85	19.49	308.36	NA	NA
S-9	1/6/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	290	NA	NA	NA	<10	NA	NA	327.85	20.51	307.34	NA	NA
S-9	4/7/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	250	NA	NA	NA	<10	NA	NA	327.85	20.02	307.83	NA	NA
S-9	7/27/2004	<250	NA	<2.5	9.1	2.7	9.8	NA	270	<10	<10	<10	<25	NA	<250	327.85	19.89	307.96	NA	NA
S-9	10/29/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	240	<4.0	<4.0	<4.0	<10	NA	<100	327.85	19.17	308.68	NA	NA
S-9	1/6/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	340	<10	<10	<10	<25	NA	NA	327.85	19.65	308.20	NA	NA
S-9	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	250	<0.50	<0.50	1.4	<5.0	NA	<5.0	327.85	17.38	310.47	NA	NA
S-9	7/29/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	250	<4.0	<4.0	<4.0	<10	NA	<100	327.85	20.09	307.76	NA	NA
S-9	10/20/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	200	<4.0	<4.0	<4.0	<10	NA	<100	327.85	21.89	305.96	NA	NA
S-9	11/11/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	220	NA	NA	NA	25	NA	NA	327.85	20.41	307.44	NA	NA
S-9	1/26/2006	55.7	NA	<0.500	<0.500	<0.500	<0.500	NA	174	<0.500	<0.500	2.50	<10.0	NA	<50.0	327.85	20.56	307.29	NA	NA
S-9	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	202	<0.500	<0.500	2.29	<10.0	NA	<50.0	327.85	18.39	309.46	NA	NA
S-9	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	158.00	<0.500	<0.500	2.06	<10.0	NA	<50.0	327.85	18.60	309.25	NA	NA
S-9	10/20/2006	212	NA	<0.500	<0.500	<0.500	<0.500	NA	151	<0.500	<0.500	1.25	<10.0	NA	<50.0	327.85	18.75	309.10	NA	NA
S-9	1/22/2007	82 j	NA	<0.50	<0.50	<0.50	<1.0	NA	150	<1.0	<1.0	1.4	20 h	NA	<150	327.85	17.92	309.93	NA	NA
S-9	4/13/2007	70 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	140	<2.0	<2.0	1.0 m	26	NA	<100	327.85	18.14	309.71	NA	NA
S-9	7/9/2007	70 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	120	<2.0	<2.0	1.2 m	<10	NA	<100	327.85	18.37	309.48	NA	NA
S-9B	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	330.47	43.12	287.35	NA	NA
S-9B	11/11/2005	<50	NA	<0.50	2.0	<0.50	<1.0	NA	23	NA	NA	NA	<5.0	NA	NA	330.47	45.25	285.22	NA	NA
S-9B	1/26/2006	<50.0	NA	<0.500	1.68	<0.500	<0.500	NA	20.6	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	38.19	292.28	NA	NA
S-9B	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	10.5	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	30.31	300.16	NA	NA
S-9B	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	4.98	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	29.01	301.46	NA	NA
S-9B	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	5.89	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	31.25	299.22	NA	NA
S-9B	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	4.9	<1.0	<1.0	<1.0	<10	NA	<150	330.47	26.78	303.69	NA	NA
S-9B	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	3.5	<2.0	<2.0	<2.0	<10	NA	<100	330.47	23.51	306.96	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-9B	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	3.0	<2.0	<2.0	<2.0	<10	NA	<100	330.47	30.15	300.32	NA	NA
S-9C	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	330.77	40.80	289.97	NA	NA
S-9C	11/11/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	10	NA	NA	NA	<5.0	NA	NA	330.77	42.87	287.90	NA	NA
S-9C	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	7.05	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	37.40	293.37	NA	NA
S-9C	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	4.86	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	28.04	302.73	NA	NA
S-9C	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	1.94	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	28.96	301.81	NA	NA
S-9C	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.06	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	30.47	300.30	NA	NA
S-9C	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.64 i	<1.0	<1.0	<1.0	<10	NA	<150	330.77	26.52	304.25	NA	NA
S-9C	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.54 m	<2.0	<2.0	<2.0	<10	NA	<100	330.77	23.70	307.07	NA	NA
S-9C	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.34 m	<2.0	<2.0	<2.0	<10	NA	<100	330.77	30.28	300.49	NA	NA
S-10	8/11/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	12/15/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	3/6/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	10/2/1990	<50	NA	<0.5	<0.5	<0.5	1.0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	12/18/1990	<50	NA	<0.5	<0.5	<0.5	1.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	3/20/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	6/26/1991	50	NA	1.8	5.8	1.9	13	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	9/5/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	14.77	311.78	NA	NA
S-10	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	326.55	14.16	312.39	NA	NA
S-10	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	14.83	311.72	NA	NA
S-10	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.85	312.70	NA	NA
S-10	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.90	312.65	NA	NA
S-10	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.66	312.89	NA	NA
S-10	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-10	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.84	312.71	NA	NA
S-10	6/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.08	313.47	NA	NA
S-10	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	326.55	13.34	313.21	NA	NA
S-10	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	2.8	NA	NA	NA	NA	NA	NA	NA	326.55	13.28	313.27	NA	2.4
S-10	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	326.55	12.41	314.14	NA	1.8
S-10	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	NA	326.55	12.81	313.74	NA	2.0
S-10	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	326.55	13.27	313.28	NA	2.1
S-10	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	326.55	13.98	312.57	NA	2.4
S-10	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	326.55	13.40	313.15	NA	2.5
S-10	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	3.7	NA	NA	NA	NA	NA	NA	326.55	13.29	313.26	NA	NA
S-10	9/17/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	13.61	312.94	NA	NA
S-10	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	13.48	313.07	NA	NA
S-10	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	14.66	311.89	NA	NA
S-10	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	14.59	311.96	NA	NA
S-10	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	325.87	13.21	312.66	NA	NA
S-10	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<50	<2.0	NA	325.87	13.50	312.37	NA	NA
S-10	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	325.87	16.60	309.27	NA	NA
S-10	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.7	NA	NA	NA	<5.0	NA	NA	325.87	13.07	312.80	NA	NA
S-10	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.7	NA	NA	NA	<5.0	NA	NA	325.87	14.10	311.77	NA	NA
S-10	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.69	NA	NA	NA	<5.0	NA	NA	325.87	14.75	311.12	NA	NA
S-10	1/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.51	NA	NA	NA	<5.0	NA	NA	325.87	15.28	310.59	NA	NA
S-10	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	325.87	15.39	310.48	NA	NA
S-10	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.25	310.62	NA	NA
S-10	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.23	310.64	NA	NA
S-10	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	NA	325.87	15.47	310.40	NA	NA
S-10	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	NA	<5.0	325.87	13.24	312.63	NA	NA
S-10	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.08	310.79	NA	NA
S-10	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.45	310.42	NA	NA
S-10	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	14.85	311.02	NA	NA
S-10	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	13.90	311.97	NA	NA
S-10	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	13.00	312.87	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-10	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	13.15	312.72	NA	NA
S-10	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<1.0	<1.0	<1.0	<1.0	<10	NA	<150	325.87	14.45	311.42	NA	NA
S-10	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	15.49	310.38	NA	NA
S-10	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.00	311.87	NA	NA
S-11	9/23/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	16.93	NA	NA	NA
S-11	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	NA	16.95	NA	NA	NA
S-11	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<50	<2.0	NA	327.48	16.40	311.08	NA	NA
S-11	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	327.48	17.25	310.23	NA	NA
S-11	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.54	NA	NA	NA	<5.0	NA	NA	327.48	16.37	311.11	NA	NA
S-11	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.48	17.17	310.31	NA	NA
S-11	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.48	18.01	309.47	NA	NA
S-11	1/6/2004	<50	NA	<0.50	1.4	<0.50	<1.0	NA	1.1	NA	NA	NA	<5.0	NA	NA	327.48	18.25	309.23	NA	NA
S-11	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.4	NA	NA	NA	<5.0	NA	NA	327.48	18.48	309.00	NA	NA
S-11	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	2.3	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	18.49	308.99	NA	NA
S-11	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	9.7	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	18.22	309.26	NA	NA
S-11	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	15	<2.0	<2.0	<2.0	<5.0	NA	NA	327.48	18.07	309.41	NA	NA
S-11	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	10	<0.50	<0.50	<0.50	<5.0	NA	<5.0	327.48	16.28	311.20	NA	NA
S-11	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	19	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	17.98	309.50	NA	NA
S-11	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	24	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	18.45	309.03	NA	NA
S-11	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	27.7	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	18.50	308.98	NA	NA
S-11	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	41.0	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	16.61	310.87	NA	NA
S-11	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	33.3	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	16.44	311.04	NA	NA
S-11	10/20/2006	53.5	NA	<0.500	<0.500	<0.500	<0.500	NA	38.2	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	16.61	310.87	NA	NA
S-11	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	61	<1.0	<1.0	<1.0	6.1 h,i	NA	<150	327.48	17.27	310.21	NA	NA
S-11	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	60	<2.0	<2.0	<2.0	<10	NA	<100	327.48	6.88	320.60	NA	NA
S-11	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	59	<2.0	<2.0	<2.0	<10	NA	<100	327.48	16.84	310.64	NA	NA
S-12	9/23/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	14.74	NA	NA	NA
S-12	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	NA	17.95	NA	NA	NA
S-12	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<50	<2.0	NA	322.76	16.92	305.84	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-12	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	322.76	16.53	306.23	NA	NA
S-12	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.5	NA	NA	NA	<5.0	NA	NA	322.76	17.73	305.03	NA	NA
S-12	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.2	NA	NA	NA	<5.0	NA	NA	322.76	17.18	305.58	NA	NA
S-12	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.1	NA	NA	NA	<5.0	NA	NA	322.76	17.54	305.22	NA	NA
S-12	1/6/2004	<50	NA	<0.50	1.1	<0.50	<1.0	NA	1.1	NA	NA	NA	<5.0	NA	NA	322.76	17.45	305.31	NA	NA
S-12	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.76	NA	NA	NA	<5.0	NA	NA	322.76	16.85	305.91	NA	NA
S-12	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.65	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	17.89	304.87	NA	NA
S-12	10/29/2004	<50 f	NA	<0.50	<0.50	<0.50	<1.0	NA	1.3	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	17.84	304.92	NA	NA
S-12	1/6/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	322.76	NA	NA	NA	NA
S-12	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	0.79	<0.50	<0.50	<0.50	<5.0	NA	<5.0	322.76	15.98	306.78	NA	NA
S-12	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.69	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	17.32	305.44	NA	NA
S-12	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.66	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	16.58	306.18	NA	NA
S-12	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	15.94	306.82	NA	NA
S-12	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	0.740	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	17.31	305.45	NA	NA
S-12	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	16.70	306.06	NA	NA
S-12	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	0.520	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	17.63	305.13	NA	NA
S-12	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.70 i	<1.0	<1.0	<1.0	<10	NA	<150	322.76	17.05	305.71	NA	NA
S-12	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.70 m	<2.0	<2.0	<2.0	<10	NA	<100	322.76	17.12	305.64	NA	NA
S-12	7/9/2007	51 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	0.59 m	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.85	305.91	NA	NA
S-14	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	17.45	307.45	NA	NA
S-14	11/11/2005	<50 f	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	324.90	17.63	307.27	NA	NA
S-14	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	324.90	15.56	309.34	NA	NA
S-14	7/12/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	16.77	308.13	NA	NA
S-14	10/20/2006	<50.0	NA	0.560	1.08	<0.500	0.630	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	324.90	17.26	307.64	NA	NA
S-14	1/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	17.54	307.36	NA	NA
S-14	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	324.90	17.10	307.80	NA	NA
S-15	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	NA	24.00	NA	NA	NA
S-15	7/12/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	23.85	NA	NA	NA
S-15	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	NA	23.87	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-15	1/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	26.03	NA	NA	NA
S-15	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	NA	24.29	NA	NA	NA
SR-1	10/11/1989	200	NA	100	<1	<10	10	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	12/14/1989	500	NA	210	<0.5	16	16	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	3/5/1990	64	NA	20	<0.5	1.5	4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	6/14/1990	60	NA	17	<0.5	1.9	1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	10/2/1990	<50	NA	5.0	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	12/18/1990	<50	NA	28	5.5	4.5	4.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.78	16.34	313.44	NA	NA
SR-1	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.78	16.72	313.06	NA	NA
SR-1	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.78	15.31	314.47	NA	NA
SR-1	03/11/2002 d	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.13	NA	NA	NA	NA
SR-1	09/22/2003 d	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.33	NA	NA	NA	NA
SR-1	4/7/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.33	30.79	297.54	NA	NA
SR-1	7/27/2004	<500	NA	<5.0	<5.0	<5.0	11	NA	44	<20	<20	<20	3,000	NA	<500	328.33	30.72	297.61	NA	NA
SR-1	8/4/2004	62	NA	<0.50	<0.50	2.6	13	NA	NA	NA	NA	NA	NA	NA	NA	328.33	30.77	297.56	NA	NA
SR-1	10/29/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	11	<20	<20	<20	1,400	NA	<500	328.33	30.85	297.48	NA	NA
SR-1	1/6/2005	<250	NA	<2.5	<2.5	6.8	31	NA	20	<10	<10	<10	2,800	NA	NA	328.33	30.92	297.41	NA	NA
SR-1	4/14/2005	170	NA	12	<0.90	11	1.5	NA	190	<0.90	<0.90	<0.90	2,200	NA	<9.0	328.33	30.73	297.60	NA	NA
SR-1	7/29/2005	<100	NA	<1.0	<1.0	<1.0	3.7	NA	7.6	<4.0	<4.0	<4.0	1,500	NA	<100	328.33	24.53	303.80	NA	NA
SR-1	10/20/2005	190	NA	<1.0	<1.0	5.4	35	NA	4.3	<4.0	<4.0	<4.0	1,200	NA	<100	328.33	31.00	297.33	NA	NA
SR-1	1/26/2006	<50.0	NA	4.65	<0.500	1.79	18.8	NA	4.25	<0.500	<0.500	<0.500	556	NA	<50.0	328.33	30.89	297.44	NA	NA
SR-1	4/24/2006	<50.0	NA	2.76	<0.500	1.36	<0.500	NA	42.8	<0.500	<0.500	<0.500	180	NA	<50.0	328.33	14.94	313.39	NA	NA
SR-1	7/12/2006	<50.0	NA	0.950	<0.500	<0.500	<1.50	NA	3.24	<0.500	<0.500	<0.500	171	NA	<50.0	328.33	14.71	313.62	NA	NA
SR-1	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	328.33	15.84	312.49	NA	NA
SR-1	1/22/2007	<50	NA	0.48 i	<0.50	0.60	<1.0	NA	0.70 i	<1.0	<1.0	<1.0	46	NA	<150	328.33	15.25	313.08	NA	NA
SR-1	4/13/2007	61 k	NA	0.43 m	<1.0	0.26 m	<1.0	NA	9.4	<2.0	<2.0	<2.0	62	NA	<100	328.33	14.78	313.55	NA	NA
SR-1	7/9/2007	<50 k	NA	0.44 m	<1.0	0.69 m	<1.0	NA	3.5	<2.0	<2.0	<2.0	19	NA	<100	328.33	14.44	313.89	NA	NA
SR-2	10/11/1989	880	NA	<10	1.0	29	33	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
SR-2	12/14/1989	1100	NA	17	<0.5	100	67	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-2	3/5/1990	140	NA	3.0	<0.5	12	7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-2	6/14/1990	<50	NA	<0.5	<0.5	2.6	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-2	10/2/1990	<50	NA	<0.5	<0.5	0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-2	12/18/1990	<50	NA	1.6	1.4	1.6	2.7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-2	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.35	14.39	313.96	NA	NA
SR-2	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.35	14.48	313.87	NA	NA
SR-2	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.35	13.62	314.73	NA	NA
SR-2	9/27/2002	<1,000	NA	<10	<10	<10	<10	NA	5,000	NA	NA	NA	NA	NA	NA	327.91	14.20	313.71	NA	NA
SR-2	12/27/2002	<1,000	NA	<10	<10	<10	<10	NA	4,800	<10	<10	<10	1,600	<10	NA	327.91	13.33	314.58	<10	NA
SR-2	3/24/2003	<5,000	NA	<50	<50	<50	<100	NA	10,000	NA	NA	NA	NA	NA	NA	327.91	13.75	314.16	NA	NA
SR-2	5/9/2003	<5,000	NA	<50	<50	80	290	NA	13,000	NA	NA	NA	6,100	NA	NA	327.91	13.40	314.51	NA	NA
SR-2	7/8/2003	<5,000	NA	<50	<50	<50	<100	NA	12,000	NA	NA	NA	4,800	NA	NA	327.31	30.48	296.83	NA	NA
SR-2	10/15/2003	<500	NA	<5.0	<5.0	<5.0	20	NA	1,200	NA	NA	NA	9,800	NA	NA	327.31	15.38	311.93	NA	NA
SR-2	1/6/2004	<1,300	NA	<13	<13	<13	<25	NA	500	NA	NA	NA	17,000	NA	NA	327.31	31.47	295.84	NA	NA
SR-2	4/7/2004	<1,300	NA	<13	<13	<13	<25	NA	280	NA	NA	NA	10,000	NA	NA	327.31	31.54	295.77	NA	NA
SR-2	7/27/2004	<1,300	NA	<13	<13	<13	<25	NA	63	<50	<50	<50	9,500	NA	<1,300	327.31	31.35	295.96	NA	NA
SR-2	10/29/2004	<1,300	NA	<13	<13	<13	<25	NA	47	<50	<50	<50	7,600	NA	<1,300	327.31	30.50	296.81	NA	NA
SR-2	1/6/2005	<1,300	NA	<13	<13	<13	<25	NA	23	<50	<50	<50	6,000	NA	NA	327.31	31.38	295.93	NA	NA
SR-2	4/14/2005	<150	NA	<1.5	<1.5	<1.5	1.7	NA	27	<1.5	<1.5	<1.5	6,300	NA	<15	327.31	31.28	296.03	NA	NA
SR-2	7/29/2005	<500	NA	<5.0	<5.0	<5.0	<10	NA	14	<20	<20	<20	5,400	NA	<500	327.31	22.71	304.60	NA	NA
SR-2	10/20/2005	<500	NA	<5.0	<5.0	<5.0	<10	NA	<5.0	<20	<20	<20	3,600	NA	<500	327.31	31.31	296.00	NA	NA
SR-2	1/26/2006	<50.0	NA	<0.500	<0.500	1.56	7.72	NA	6.37	<0.500	<0.500	<0.500	1,620	NA	<50.0	327.31	31.60	295.71	NA	NA
SR-2	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	13.1	<0.500	<0.500	<0.500	544	NA	<50.0	327.31	12.86	314.45	NA	NA
SR-2	7/12/2006	<50.0	NA	0.950	<0.500	<0.500	<1.50	NA	3.00	<0.500	<0.500	<0.500	941	NA	<50.0	327.31	12.65	314.66	NA	NA
SR-2	10/20/2006	96.0	NA	<0.500	<0.500	<0.500	<0.500	NA	9.56	<0.500	<0.500	<0.500	881	NA	<50.0	327.31	14.10	313.21	NA	NA
SR-2	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	2.8	<1.0	<1.0	<1.0	1,100	NA	<150	327.31	13.47	313.84	NA	NA
SR-2	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	6.9	<2.0	<2.0	<2.0	520	NA	<100	327.31	12.89	314.42	NA	NA
SR-2	7/9/2007	58 k,l	NA	0.14 m	<1.0	<1.0	<1.0	NA	21	<2.0	<2.0	<2.0	720	NA	<100	327.31	12.03	315.28	NA	NA
SR-3	12/11/1989	500	NA	92	10	43	100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

**Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA**

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
SR-3	12/14/1989	2,400	NA	310	27	170	340	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	3/5/1990	70	NA	15	0.8	5.8	10	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	6/14/1990	470	NA	59	2.3	35	50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	10/2/1990	1,700	NA	91	6.2	7.0	100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	12/18/1990	140	NA	10	0.8	7.5	14	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.11	14.66	314.45	NA	NA
SR-3	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.11	14.96	314.15	NA	NA
SR-3	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.11	13.60	315.51	NA	NA
SR-3	9/27/2002	<2,500	NA	<25	<25	<25	<25	NA	11,000	NA	NA	NA	NA	NA	NA	328.65	14.75	313.90	NA	NA
SR-3	12/27/2002	<2,000	NA	<20	<20	<20	<20	NA	5,100	<20	<20	<20	4,600	<20	NA	328.65	13.65	315.00	NA	NA
SR-3	3/24/2003	<2,500	NA	<25	<25	<25	<50	NA	3,700	NA	NA	NA	NA	NA	NA	328.65	13.52	315.13	NA	NA
SR-3	5/9/2003	<1,000	NA	15	<10	19	48	NA	3,700	NA	NA	NA	8,400	NA	NA	328.65	12.15	316.50	NA	NA
SR-3	7/8/2003	<1,000	NA	<10	<10	<10	<20	NA	2,800	NA	NA	NA	8,300	NA	NA	327.50	30.00	297.50	NA	NA
SR-3	10/15/2003	310	NA	3.2	<2.5	9.1	30	NA	240	NA	NA	NA	3,600	NA	NA	327.50	15.39	312.11	NA	NA
SR-3	1/6/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	26	NA	NA	NA	3,300	NA	NA	327.50	30.29	297.21	NA	NA
SR-3	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	4.4	NA	NA	NA	370	NA	NA	327.50	15.49	312.01	NA	NA
SR-3	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	9.0	<2.0	<2.0	<2.0	390	NA	<50	327.50	15.34	312.16	NA	NA
SR-3	10/29/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	15	<4.0	<4.0	<4.0	780	NA	<100	327.50	15.22	312.28	NA	NA
SR-3	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	6.3	<2.0	<2.0	<2.0	250	NA	NA	327.50	15.08	312.42	NA	NA
SR-3	4/14/2005	58	NA	0.76	<0.50	1.5	<0.50	NA	46	<0.50	<0.50	<0.50	2,200	NA	<5.0	327.50	30.53	296.97	NA	NA
SR-3	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	6.7	<2.0	<2.0	<2.0	490	NA	<50	327.50	21.81	305.69	NA	NA
SR-3	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	3.3	<2.0	<2.0	<2.0	76	NA	<50	327.50	29.19	298.31	NA	NA
SR-3	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	3.34	<0.500	<0.500	<0.500	84.9	NA	<50.0	327.50	31.00	296.50	NA	NA
SR-3	4/24/2006	<50.0	NA	1.67	<0.500	0.640	<0.500	NA	36.4	<0.500	<0.500	<0.500	315	NA	<50.0	327.50	12.42	315.08	NA	NA
SR-3	7/12/2006	<50.0	NA	0.950	<0.500	<0.500	<1.50	NA	9.73	<0.500	<0.500	<0.500	724	NA	<50.0	327.50	12.75	314.75	NA	NA
SR-3	10/20/2006	73.3	NA	<0.500	<0.500	<0.500	<0.500	NA	5.64	<0.500	<0.500	<0.500	847	NA	<50.0	327.50	13.93	313.57	NA	NA
SR-3	1/22/2007	56	NA	<2.0	<2.0	<2.0	<4.0	NA	5.6	<4.0	<4.0	<4.0	1,300	NA	<600	327.50	13.31	314.19	NA	NA
SR-3	4/13/2007	66 k,l	NA	<5.0	<10	<10	<10	NA	16	<20	<20	<20	2,400	NA	<1,000	327.50	13.61	313.89	NA	NA
SR-3	7/9/2007	150 k,l	NA	0.97	<1.0	0.33 m	<1.0	NA	19	<2.0	<2.0	<2.0	1,300	NA	<100	327.50	11.87	315.63	NA	NA
T-1	6/18/2002	<5,000	NA	<50	<50	<50	<50	NA	20,000	NA	NA	NA	NA	NA	NA	NA	12.31	NA	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
T-2	9/17/2001	<5,000	NA	<25	<25	<25	<25	NA	29,000	NA	NA	NA	NA	NA	NA	NA	11.48	NA	NA	NA
T-2	12/31/2001	<5,000	NA	<50	<50	<50	<50	NA	31,000	NA	NA	NA	NA	NA	NA	NA	4.96	NA	NA	NA
T-2	3/13/2002	<5,000	NA	<50	<50	<50	<50	NA	48,000	NA	NA	NA	NA	NA	NA	NA	9.76	NA	NA	NA
T-2	6/18/2002	<20,000	NA	<200	<200	<200	<200	NA	100,000	NA	NA	NA	NA	NA	NA	NA	12.58	NA	NA	NA
T-2	9/27/2002	240	NA	0.55	2.8	1.8	2.6	NA	39	NA	NA	NA	NA	NA	NA	NA	8.15	NA	NA	NA
T-2	12/27/2002	2,100	NA	7.8	17	<0.50	11	NA	790	<2.0	<2.0	2.7	1,200	<2.0	NA	NA	6.75	NA	NA	NA
T-2	3/24/2003	550	NA	<2.5	<2.5	<2.5	<5.0	NA	310	NA	NA	NA	NA	NA	NA	NA	11.68	NA	NA	NA
T-2	5/9/2003	220	NA	0.66	0.55	<0.50	1.8	NA	100	NA	NA	NA	92	NA	NA	NA	6.40	NA	NA	NA
T-2	7/8/2003	<500	NA	13	7.4	<5.0	22	NA	990	NA	NA	NA	120	NA	NA	NA	8.16	NA	NA	NA
T-2	10/15/2003	220 e	NA	<0.50	<0.50	<0.50	<1.0	NA	13	NA	NA	NA	23	NA	NA	NA	11.15	NA	NA	NA
T-2	1/6/2004	710	NA	<0.50	<0.50	<0.50	1.2	NA	14	NA	NA	NA	9.2	NA	NA	NA	9.10	NA	NA	NA
T-2	4/7/2004	570 e	NA	5.4	<0.50	<0.50	1.2	NA	5.6	NA	NA	NA	11	NA	NA	NA	10.54	NA	NA	NA
T-2	7/27/2004	270	NA	17	1.2	<0.50	2.0	NA	2.9	<2.0	<2.0	<2.0	7.9	NA	<50	NA	9.89	NA	NA	NA
T-2	10/29/2004	180	NA	<0.50	<0.50	<0.50	<1.0	NA	4.2	<2.0	<2.0	<2.0	23	NA	<50	NA	9.42	NA	NA	NA
T-2	1/6/2005	1,100	NA	0.83	<0.50	<0.50	3.5	NA	3.0	<2.0	<2.0	<2.0	12	NA	NA	NA	7.98	NA	NA	NA
T-3	6/18/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	Dry	NA	NA	NA
T-4	6/18/2002	<10,000	NA	<100	<100	<100	<200	NA	97,000	NA	NA	NA	NA	NA	NA	NA	13.50	NA	NA	NA
T-4	12/27/2002	550	NA	5.3	16	0.60	39	NA	140	<2.0	<2.0	<2.0	120	<2.0	NA	NA	7.65	NA	NA	NA
T-4	3/24/2003	1,400	NA	<0.50	1.0	1.2	3.6	NA	15	NA	NA	NA	NA	NA	NA	NA	12.88	NA	NA	NA
T-4	5/9/2003	<50	NA	<0.50	<0.50	<0.50	1.6	NA	14	NA	NA	NA	5.2	NA	NA	NA	7.59	NA	NA	NA
T-4	7/8/2003	730	NA	26	8.9	10	19	NA	1,000	NA	NA	NA	150	NA	NA	NA	9.33	NA	NA	NA
T-4	10/15/2003	1,200	NA	15	6.1	2.8	11	NA	310	NA	NA	NA	980	NA	NA	NA	11.80	NA	NA	NA
T-4	1/6/2004	68	NA	1.1	<0.50	<0.50	<1.0	NA	12	NA	NA	NA	<5.0	NA	NA	NA	9.78	NA	NA	NA
T-4	4/7/2004	1,600	NA	5.1	0.57	<0.50	2.3	NA	6.1	NA	NA	NA	<5.0	NA	NA	NA	11.15	NA	NA	NA
T-4	7/27/2004	590	NA	5.3	0.83	0.52	2.2	NA	4.8	<2.0	<2.0	<2.0	7.5	NA	<50	NA	10.93	NA	NA	NA
T-4	10/29/2004	83	NA	<0.50	<0.50	<0.50	<1.0	NA	1.2	<2.0	<2.0	<2.0	<5.0	NA	<50	NA	10.06	NA	NA	NA
T-4	1/6/2005	430 g	NA	<0.50	<0.50	<0.50	<1.0	NA	9.6	<2.0	<2.0	<2.0	<5.0	NA	NA	NA	8.69	NA	NA	NA
C-1	5/9/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.50	302.83	NA	NA

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
C-1	7/8/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.50	302.83	NA	NA
C-1	10/15/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.52	302.81	NA	NA
C-1	1/6/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.21	303.12	NA	NA
C-1	4/7/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.54	302.79	NA	NA
C-1	7/27/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.58	302.75	NA	NA
C-1	10/29/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.58	302.75	NA	NA
C-1	1/6/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.55	302.78	NA	NA
C-1	4/14/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.55	302.78	NA	NA
C-1	7/29/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.54	302.79	NA	NA
C-1	10/20/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	31.11	300.22	NA	NA
C-1	1/26/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	31.15	300.18	NA	NA
C-1	4/24/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	32.07	299.26	NA	NA
C-1	7/12/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	29.30	302.03	NA	NA
C-1	10/20/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	31.64	299.69	NA	NA
C-1	1/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	30.03	301.30	NA	NA
C-1	4/13/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	30.21	301.12	NA	NA
C-1	7/9/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	33.38	297.95	NA	NA

Abbreviations:

TEPH = Total petroleum hydrocarbons as diesel.

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8015.

BTEX = benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260

Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-----------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260

1,2-DCA = 1,2-Dichloroethane, analyzed by EPA Method 8260

TOB = Top of Wellbox Elevation

TOC = Top of Casing Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ppm = Parts per million

ug/L = Parts per billion

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

Notes:

a = Compounds detected within the chromatographic range of gasoline but not characteristic of the standard gasoline pattern.

b = This sample was analyzed outside of the EPA recommended holding time.

c = Samples for wells S-6 and S-7 may have been switched.

d = Survey date only.

e = Hydrocarbon does not match pattern of laboratory's standard.

**Table 2
WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA**

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-----------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

f = The concentration reported reflects individual or discrete unidentified peaks not matching a typical fuel pattern.

g = Quantity of unknown hydrocarbon(s) in sample based on gasoline.

h = Due to the low levels of analyte found in the sample, the analyte was qualitatively identified based on the compound's retention time and the presence of a single mass ion.

i = Estimated value. Analyte detected at a level less than the Reporting Limit (RL) and greater than or equal to the Method Detection Limit (MDL). The user of this data should be aware that this data is of limited reliability.

j = Hydrocarbon result partly due to individual peak(s) in quantitation range.

k = Analyzed by EPA Method 8015B (M).

l = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

m = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.

Ethanol analyzed by EPA Method 8260.

Corrected groundwater elevation when SPH is present = Top of Casing Elevation - Depth to Water + (0.8 x Hydrocarbon Thickness).

Well T-2 is a backfill well.

Beginning September 23, 2002 depth to water referenced to Top of Casing.

All wells except S-11, S-12, and T-1 through T-4 surveyed March 11, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.


Survey data for wells S-11 and S-12 provided by Cambria Environmental Technology, Inc.

C-1 surveyed March 18, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.

Wells SR-1, SR-2, and SR-3 surveyed September 22, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.

4Q05 survey data for wells S-5B, S-5C, S-9B, S-9C, and S-14 provided by Delta Environmental Consultants, Inc.

FIGURES

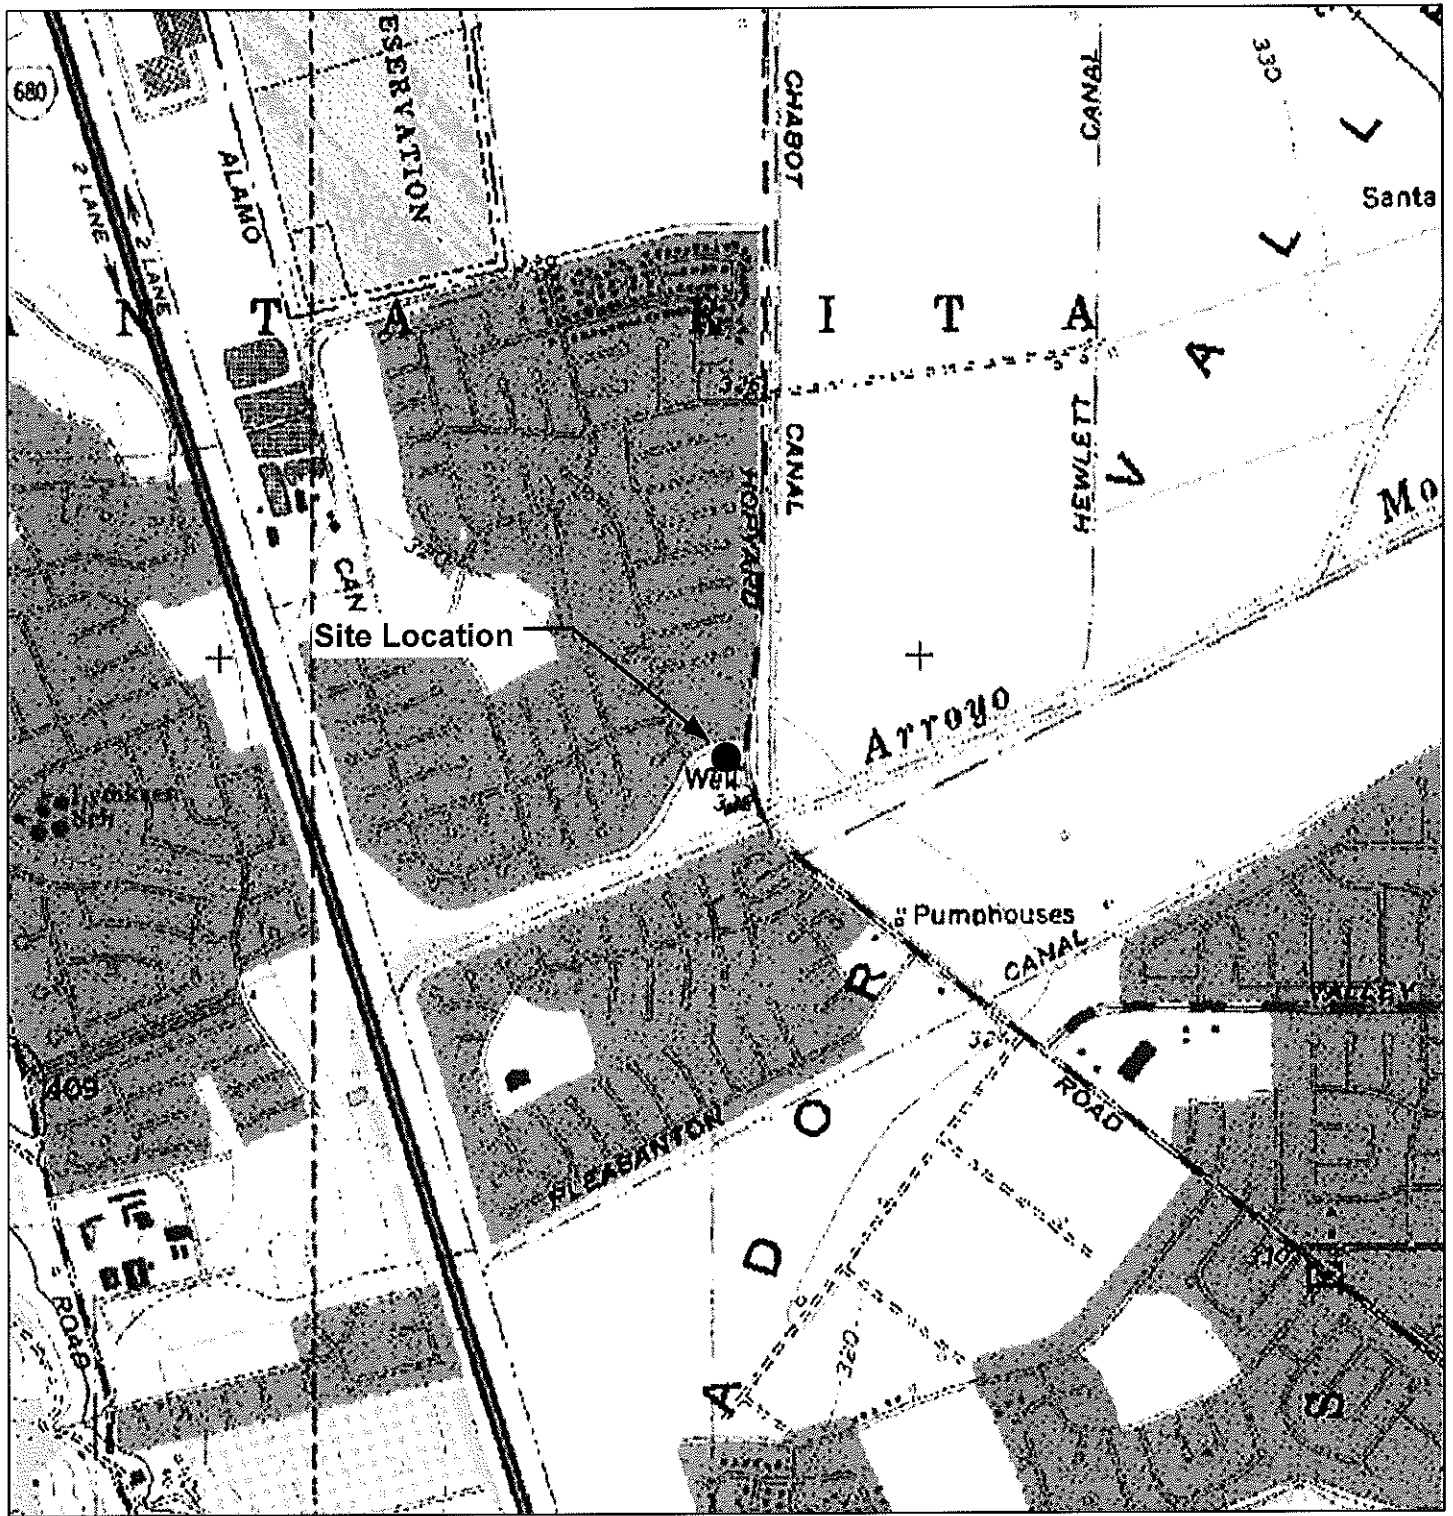

GENERAL NOTES:
 Base Map from: DeLorme Yarmouth, ME 04096
 Source Data: USGS



QUADRANGLE LOCATION




FIGURE 1
 SITE LOCATION AND WELL SURVEY MAP
 SHELL-BRANDED SERVICE STATION
 3790 Hopyard Road
 Pleasanton, California

PROJECT NO. SJ37-90H-1.2005	DRAWN BY VF 12/04/03
FILE NO. SJ37-90H-1.2005	PREPARED BY VF
REVISION NO.	REVIEWED BY



APPENDIX A

FIELD DATA SHEETS

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 3790 Hopyard Rd Pleasanton Date 7-9-07
 Job Number 070709-0W-1 Technician DW/SL Page 1 of 2

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
S-2	X	No					X		No tag
S-3	X	No					X		No tag
S-4	X	No					X		No tag
S-5	X	No					X		No tag
S-5B	X	No					X		" "
S-5C	X	No					X		" "
S-6		No	X				X		No tag
S-7	X	No					X		No tag
S-8	X	No					X		No tag
S-9	X	No					X		No tag
S-9B	X	No					X		no tag
S-9C	X	No					X		no tag
S-10	X	No					X		No tag
S-11		No		X			X		No tag
S-12		No			X		X		No tag
S-14									
S-15									

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: _____

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 3790 Hayward Rd Pleasanton Date 7-9-07

Job Number 070709-QW-1 Technician DW/SL Page 2 of 2

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
SR-1	X	No					X		No tag
SR-2	X	No					X		No tag
SR-3	X	No					X		No tag
C-1									

Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: _____

WELL GAUGING DATA

Project # 070709-DW-1 Date 7-9-07 Client Shell

Site 3790 Hopyard Rd Pleasanton

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	Notes
S-2	0901	3					13.33	34.60		
S-3	0848	3					12.04	35.30		
S-4	0912	3					12.78	35.69		
S-5	0839	3					15.46	35.55		
S-5B	0832	4					31.12	61.53		
S-5C	0835	4	odor				31.22	76.63		
S-6	0939	3					14.22	34.18		
S-7	0922	3					16.52	34.52		
S-8	0815	3					14.38	34.47		
S-9	0754	3					18.37	34.37		
S-9B	0805	4					30.15	59.30		
S-9C	0802	4					30.28	78.30		
S-10	1007	3					14.00	34.09		
S-11	1007	2					16.84	24.86		
S-12	0921	2					16.85	24.58		
S-14										
S-15										

WELL GAUGING DATA

Project # 070709.Dw-1 Date 7-9-07 Client Shell

Site 3790 Hopyard Rd Pleasanton

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	Notes
SR-1	0904	4					14.44	33.09	↓	
SR-2	0856	4				12.03	32.69			
SR-3	0909	4				11.87	33.37	↓		
C-1	0807	-					33.38	33.80		

SHELL WELL MONITORING DATA SHEET

BTS #: <u>070709-DW-1</u>	Site: <u>3790 Hopyard Rd</u>
Sampler: <u>DW/SL</u>	Date: <u>7-9-07</u>
Well I.D.: <u>S-3</u>	Well Diameter: 2 <u>(3)</u> 4 6 8 _____
Total Well Depth (TD): <u>35.30</u>	Depth to Water (DTW): <u>12.04</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>(PVC)</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>16.69</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

<u>8.6</u> (Gals.) X <u>3</u> = <u>25.8</u> Gals. 1 Case Volume Specified Volumes Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
1043	69.7	6.5	3578	40	8.6	clear
1045	69.6	6.5	3586	58	17.2	" "
1046	67.5	6.5	3921	226	25.8	" "

Did well dewater? Yes No Gallons actually evacuated: 25.8

Sampling Date: 7-9-07 Sampling Time: 1054 Depth to Water: 16.57

Sample I.D.: S-3 Laboratory: STL Other: Cal/Science

Analyzed for: TPH-G (BTEX) MTBE TPH-D Other: Oxy's, Ethanol

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>070709-DM1</u>	Site: <u>3790 Hopy Rd</u>
Sampler: <u>DW/SL</u>	Date: <u>7/9/07</u>
Well I.D.: <u>S-5</u>	Well Diameter: 2 3 4 6 8
Total Well Depth (TD): <u>35.55</u>	Depth to Water (DTW): <u>15.46</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>19.48</u>	

Purge Method: Bailer Waterra
 Disposable Bailer Peristaltic
 Positive Air Displacement Extraction Pump
 Electric Submersible Other: _____

Sampling Method: Bailer
 Disposable Bailer
 Extraction Port
 Dedicated Tubing
 Other: _____

7.4 (Gals.) X 3 = 22.2 Gals.
 1 Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
<u>1332</u>	<u>70.6</u>	<u>7.4</u>	<u>1102</u>	<u>75</u>	<u>7.4</u>	<u>odor, clear</u>
						<u>WELL DEWATERED @ 8 GALLONS</u>
<u>1410</u>	<u>70.5</u>	<u>7.05</u>	<u>1128</u>	<u>7</u>		<u>odor</u>

Did well dewater? Yes No Gallons actually evacuated: 8

Sampling Date: 7/9/07 Sampling Time: 1410 Depth to Water: 19.48

Sample I.D.: S-5 Laboratory: STL Other: Cal Science

Analyzed for: TPH-G BTEX MTBE TPH-D Other: Oxys Ethanol

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 070709-DW-1	Site: 3790 Hopyard Rd
Sampler: DW/SL	Date: 7-9-07
Well I.D.: 5-7	Well Diameter: 2 <u>3</u> 4 6 8
Total Well Depth (TD): 34.52	Depth to Water (DTW): 16.52
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 20.12	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

$6.7 \text{ (Gals.)} \times 3 = 20.1 \text{ Gals.}$ <p>1 Case Volume Specified Volumes Calculated Volume</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
0925	20.0	7.1	2496	115	6.7	cloudy
0926	69.2	6.8	2406	62	13.4	"
DEWATERED @ 14 GALLONS						
0930	68.7	6.71	2439	266		
rxn w/ HCl in VOCS						

Did well dewater? Yes No Gallons actually evacuated: 14

Sampling Date: 7-9-07 Sampling Time: 0930 Depth to Water: 26.67 (Hatch)

Sample I.D.: 5-7 Laboratory: STL Other: CalScience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: Oxy's, Ethanol

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 070709-DW-1	Site: 3790 Hopyard Rd
Sampler: DW/SL	Date: 7-9-07
Well I.D.: 5-8	Well Diameter: 2 (3) 4 6 8
Total Well Depth (TD): 34.77 34.47	Depth to Water (DTW): 14.38
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 18.40	

Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible

Waterra: Peristaltic Extraction Pump Other _____

Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing

Other: _____

<p>7.4 (Gals.) X 3 = 22.2 Gals.</p> <p>1 Case Volume Specified Volumes Calculated Volume</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
1031	68.8	6.8	3689	158	7.4	Clear
1032 1032						WELL DEWATERED @ 90 GALLONS
1035 1034						
1300	70.7	6.79	3885	26		Clear
						Rxn w/ HCl in VO4S

Did well dewater? Yes No Gallons actually evacuated: 9

Sampling Date: 7-9-07 Sampling Time: 1300 Depth to Water: 14.33

Sample I.D.: 5-8 Laboratory: STL Other: CalScience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: Oxy's, Ethanol

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 070709-DW-1	Site: 3790 Hayward Rd
Sampler: DW/SL	Date: 7-9-07
Well I.D.: S-10	Well Diameter: 2 <u>(3)</u> 4 6 8
Total Well Depth (TD): 34.09	Depth to Water (DTW): 14.00
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 18.02	

Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible

Water: Peristaltic Extraction Pump Other _____

Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing

Other: _____

$7.4 \text{ (Gals.)} \times 3 = 22.2 \text{ Gals.}$ 1 Case Volume Specified Volumes Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
1011	67.4	7.0	1505	742	7.4	odor, cloudy
1012	66.6	7.0	1606	786	14.8	" "
1013	66.5	6.7	2349	782	22.2	" "
rxn w/ HCl in Vials						

Did well dewater? Yes No Gallons actually evacuated: 22.2

Sampling Date: 7-9-07 Sampling Time: 1020 Depth to Water: 25.31 (practice)

Sample I.D.: S-10 Laboratory: STL Other: CalScience

Analyzed for: TPH-G BTEX MTBE TPH-D Other: Oxy's, Ethanol

EB I.D. (if applicable): @ _____ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>070709-DW-1</u>	Site: <u>3790 Hopyard Rd</u>
Sampler: <u>DW/SL</u>	Date: <u>7-9-07</u>
Well I.D.: <u>S-11</u>	Well Diameter: (2) <u>3</u> 4 6 8 _____
Total Well Depth (TD): <u>24.86</u>	Depth to Water (DTW): <u>16.84</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>18.44</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

Other: _____

<u>1.3</u> (Gals.) X	<u>3</u>	=	<u>3.9</u> Gals.	
1 Case Volume	Specified Volumes		Calculated Volume	

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
<u>1011</u>	<u>66.7</u>	<u>6.5</u>	<u>3191</u>	<u>124</u>	<u>1.3</u>	
<u>1013</u>	<u>66.7</u>	<u>6.4</u>	<u>3240</u>	<u>305</u>	<u>2.6</u>	
<u>1015</u>	<u>66.7</u>	<u>6.4</u>	<u>3248</u>	<u>71000</u>	<u>3.9</u>	

Did well dewater? Yes No Gallons actually evacuated: 3.9

Sampling Date: 7-9-07 Sampling Time: 1020 Depth to Water: 22.03 (street)

Sample I.D.: S-11 Laboratory: STL Other Cal/science

Analyzed for: TPH-G BTEX MTBE TPH-D Other: Oxy's, Ethanol

EB I.D. (if applicable): @ _____ Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>070709-DW-1</u>	Site: <u>3790 Hopyard Rd</u>
Sampler: <u>DW/SL</u>	Date: <u>7-9-07</u>
Well I.D.: <u>S-12</u>	Well Diameter: <u>(2)</u> 3 4 6 8
Total Well Depth (TD): <u>24.58</u>	Depth to Water (DTW): <u>16.85</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>(PVC)</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>18.39</u>	

Purge Method: Bailer Water: Peristaltic Sampling Method: Bailer
 Disposable Bailer Extraction Pump Disposable Bailer
 Positive Air Displacement Other _____ Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

$\underline{1.2} \text{ (Gals.)} \times \underline{3} = \underline{3.6} \text{ Gals.}$ <p>1 Case Volume Specified Volumes Calculated Volume</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
0936	68.3	6.5	2745	>1000	1.2	cloudy
0938	67.6	6.5	2699	>1000	2.4	" "
0940	68.9	6.5	2676	71000	3.6	" "

Did well dewater? Yes No Gallons actually evacuated: 3.6

Sampling Date: 7-9-07 Sampling Time: 0945 Depth to Water: 16.94

Sample I.D.: S-12 Laboratory: STL Other: CalScience

Analyzed for: (TPH-G) (BTEX) MTBE TPH-D Other: Oxy's, Ethanol

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>070709-DW-1</u>	Site: <u>3790 Hopyard Rd</u>
Sampler: <u>DW/SL</u>	Date: <u>7-9-07</u>
Well I.D.: <u>SR-3</u>	Well Diameter: 2 3 <u>4</u> 6 8
Total Well Depth (TD): <u>33.37</u>	Depth to Water (DTW): <u>11.87</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>16.17</u>	

Purge Method: Bailer Disposable Bailer Positive Air Displacement <input checked="" type="checkbox"/> Electric Submersible	Waterra Peristaltic Extraction Pump Other _____	Sampling Method: <input checked="" type="checkbox"/> Bailer Disposable Bailer Extraction Port Dedicated Tubing Other: _____
--	--	---

$\underline{14} \text{ (Gals.)} \times \underline{3} = \underline{42} \text{ Gals.}$ 1 Case Volume Specified Volumes Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
1313	73.4	6.8	2167	27	14	clear, odor
1316	72.4	6.7	2161	11	28	" "
1318	71.8	6.7	2127	20	42	" "

Did well dewater? Yes No Gallons actually evacuated: 42

Sampling Date: 7-9-07 Sampling Time: 1330 Depth to Water: 16.10

Sample I.D.: SR-3 Laboratory: STL Other Cal/Science

Analyzed for: ~~TPH-G~~ BTEX MTBE TPH-D Other: Oxy's, Ethanol

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

APPENDIX B

FIELD PROCEDURES

BLAINE TECH SERVICES, INC. METHODS AND PROCEDURES FOR THE ROUTINE MONITORING OF GROUNDWATER WELLS AT SHELL SITES

Blaine Tech Services, Inc. performs environmental sampling and documentation as an independent third party. We specialize in groundwater monitoring assignments and intentionally limit the scope of our services to those centered on the generation of objective information.

To avoid conflicts of interest, Blaine Tech Services, Inc. personnel do not evaluate or interpret the information we collect. As a state licensed contractor (C-57 well drilling - water - 746684) performing strictly technical services, we do not make any professional recommendations and perform no consulting of any kind.

SAMPLING PROCEDURES OVERVIEW

SAFETY

All groundwater monitoring assignments performed for Shell comply with Shell's safety guidelines, 29 CFR 1910.120 and SB-198 Injury and Illness Prevention Program (IIPP). All Field Technicians receive the full 40-hour 29CFR 1910.120 OSHA SARA HAZWOPER course, medical clearance and on-the-job training prior to commencing any work on any Shell site.

INSPECTION AND GAUGING

Wells are inspected prior to evacuation and sampling. The condition of the wellhead is checked and noted according to a wellhead inspection checklist.

Standard measurements include the depth to water (DTW) and the total well depth (TD) obtained with industry standard electronic water level indicators that are graduated in increments of hundredths of a foot.

The water in each well is inspected for the presence of immiscibles. When free product is suspected, its presence is confirmed using an electronic interface probe (e.g. MMC). No samples are collected from a well containing over two-hundredths of a foot (0.02') of product.

EVACUATION

Depth to water measurements are collected by our personnel prior to purging and minimum purge volumes are calculated anew for each well based on the height of the water column and the diameter of the well. Expected purge volumes are never less than three case volumes and are set at no less than four case volumes in some jurisdictions.

Well purging devices are selected on the basis of the well diameter and the total volume to be evacuated. In most cases the well will be purged using an electric submersible pump (i.e. Grundfos) suspended near (but not touching) the bottom of the well.

PARAMETER STABILIZATION

Well purging completion standards include minimum purge volumes, but additionally require stabilization of specific groundwater parameters prior to sample collection. Typical groundwater parameters used to measure stability are electrical conductivity, pH, and temperature. Instrument readings are obtained at regular intervals during the evacuation process (no less than once per case volume).

Stabilization standards for routine quarterly monitoring of fuel sites include the following: Temperature is considered to have stabilized when successive readings do not fluctuate more than +/- 1 degree Celsius. Electrical conductivity is considered stable when successive readings are within 10%. pH is considered to be stable when successive readings remain constant or vary no more than 0.2 of a pH unit.

DEWATERED WELLS

Normal evacuation removes no less than three case volumes of water from the well. However, less water may be removed in cases where the well dewateres and does not immediately recharge.

MEASURING RECHARGE

Upon completion of well purging, a depth to water measurement is collected and notated to ensure that the well has recharged to within 80% of its static, pre-purge level prior to sampling.

Wells that do not immediately show 80% recharge or dewatered wells will be allowed a minimum of 2 hours to recharge prior to sampling. The water level at time of sampling will be noted.

PURGEWATER CONTAINMENT

All non-hazardous purgewater evacuated from each groundwater monitoring well is captured and contained in on-board storage tanks on the Sampling Vehicle and/or special water hauling trailers. Effluent from the decontamination of reusable apparatus (sounders, electric pumps and hoses etc.), consisting of groundwater combined with deionized water and non-phosphate soap, is also captured and pumped into effluent tanks.

Non-hazardous purgewater is transported under standard Bill of Lading documentation to a Blaine Tech Services, Inc. facility before being transported to a Shell approved disposal facility.

SAMPLE COLLECTION DEVICES

All samples are collected using a stainless steel, Teflon or disposable bailers.

SAMPLE CONTAINERS

Sample material is decanted directly from the sampling bailer into sample containers provided by the laboratory that will analyze the samples. The transfer of sample material from the bailer to the sample container conforms to specifications contained in the USEPA T.E.G.D. The type of sample container; material of construction, method of closure and filling requirements are specific to the intended analysis. Chemicals needed to preserve the sample material are commonly placed inside the sample containers by the laboratory or glassware vendor prior to delivery of the bottle to our personnel. The laboratory sets the number of replicate containers.

TRIP BLANKS

Trip Blanks, if requested, are taken to the site and kept inside the sample cooler for the duration of the event. They are turned over to the laboratory for analysis with the samples from that site.

DUPLICATES

Duplicates, if requested, may be collected at a site. The Field Technician uses their discretion in choosing the well at which the Duplicate is collected, typically one suspected of containing measurable contaminants. The Duplicate sample is labeled "DUP" and the time of collection is omitted from the COC, thus rendering the sample blind.

SAMPLE STORAGE

All sample containers are promptly placed in food grade ice chests for storage in the field and transport (direct or via our facility) to the designated analytical laboratory. These ice chests contain quantities of restaurant grade ice as a refrigerant material. The samples are maintained in either an ice chest or a refrigerator until relinquished into the custody of the laboratory or laboratory courier.

DOCUMENTATION CONVENTIONS

A label must be affixed to all sample containers. In most cases these labels are generated by our office personnel and are partially preprinted. Labels can also be hand written by our field personnel. The site is identified with the store number and site address, as is the particular groundwater well from which the sample is drawn (e.g. MW-1, MW-2, S-1 etc.). The time and date of sample collection along with the initials of the person who collects the sample are handwritten onto the label.

Chain of Custody records are created using client specific preprinted forms following USEPA specifications.

Bill of Lading records are contemporaneous records created in the field at the site where the non-hazardous purgewater is generated. Field Technicians use preprinted Bill of Lading forms.

DECONTAMINATION

All equipment is brought to the site in clean and serviceable condition and is cleaned after use in each well and before subsequent use in any other well. Equipment is decontaminated before leaving the site.

The primary decontamination device is a commercial steam cleaner. The steam cleaner is de-tuned to function as a hot pressure washer that is then operated with high quality deionized water that is produced at our facility and stored onboard our sampling vehicle. Cleaning is facilitated by the use of proprietary fixtures and devices included in the patented workstation (U.S. Patent 5,535,775) that is incorporated in each sampling vehicle. The steam cleaner is used to decon reels, pumps and bailers.

Any sensitive equipment or parts (i.e. Dissolved Oxygen sensor membrane, water level indicator, etc.) that cannot be washed using the high pressure water, will be sprayed with a non-phosphate soap and deionized water solution and rinsed with deionized water.

DISSOLVED OXYGEN READINGS

Dissolved Oxygen readings are taken pre- and/or post-purge using YSI meters (e.g. YSI Model 54, 58 or 95) or HACH field test kits.

The YSI meters are equipped with a stirring device that enables them to collect accurate in-situ readings. The probe/stirring devices are modified to allow downhole measurements to be taken from wells with diameters as small as two inches. The probe and reel is decontaminated between wells as described above. The meter is calibrated between wells as per the instructions in the operating manual. The probe and stirrer is lowered into the water column. The reading is allowed to stabilize prior to collection.

OXYIDATON REDUCTION POTENTIAL READINGS



All readings are obtained with either Coming or Myron-L meters (e.g. Coming ORP-65 or a Myron-L Ultrameter GP). The meter is cleaned between wells as described above. The meter is calibrated at the start of each day according to the instruction manual.

FERROUS IRON MEASUREMENTS

All field measurements are collected at time of sampling with a HACH test kit.

APPENDIX C

LABORATORY REPORTS AND CHAIN-OF-CUSTODY DOCUMENT



July 20, 2007

Michael Ninokata
Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Subject: **Calscience Work Order No.: 07-07-0894**
Client Reference: **3790 Hopyard Rd., Pleasanton, CA**

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 7/13/2007 and analyzed in accordance with the attached chain-of-custody.


Unless otherwise noted, all analytical testing was accomplished in accordance with the guidelines established in our Quality Systems Manual, applicable standard operating procedures, and other related documentation. The original report of subcontracted analysis, if any, is provided herein, and follows the standard Calscience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.

If you have any questions regarding this report, please do not hesitate to contact the undersigned.


Sincerely,

A handwritten signature in black ink, appearing to read "Don Burley".

Calscience Environmental
Laboratories, Inc.
Don Burley
Project Manager



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 1 of 5

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-2	07-07-0894-1	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	97	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	75	38-134			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-3	07-07-0894-2	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	75	38-134			


Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-4	07-07-0894-3	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	240	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	79	38-134			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-5	07-07-0894-4	07/09/07	Aqueous	GC 22	07/16/07	07/17/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	440	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	87	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 2 of 5

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-5B	07-07-0894-5	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	64	38-134			

S-5C	07-07-0894-6	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01
------	--------------	----------	---------	-------	----------	----------	-----------

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	72	38-134			

S-6	07-07-0894-7	07/09/07	Aqueous	GC 22	07/16/07	07/17/07	070716B01
-----	--------------	----------	---------	-------	----------	----------	-----------

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.


Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	830	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	76	38-134			

S-7	07-07-0894-8	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01
-----	--------------	----------	---------	-------	----------	----------	-----------


Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	52	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	74	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 3 of 5

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-8	07-07-0894-9	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	69	38-134			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-9	07-07-0894-10	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	70	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	72	38-134			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-9B	07-07-0894-11	07/09/07	Aqueous	GC 22	07/16/07	07/17/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	76	38-134			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-9C	07-07-0894-12	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	71	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 07/13/07
 Work Order No: 07-07-0894
 Preparation: EPA 5030B
 Method: EPA 8015B (M)

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 4 of 5

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-10	07-07-0894-13	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	71	38-134			

S-11	07-07-0894-14	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01
------	---------------	----------	---------	-------	----------	----------	-----------

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	76	38-134			

S-12	07-07-0894-15	07/09/07	Aqueous	GC 22	07/16/07	07/16/07	070716B01
------	---------------	----------	---------	-------	----------	----------	-----------


Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	51	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	73	38-134			


SR-1	07-07-0894-16	07/09/07	Aqueous	GC 22	07/16/07	07/17/07	070716B01
------	---------------	----------	---------	-------	----------	----------	-----------

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
1,4-Bromofluorobenzene	70	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 5 of 5

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
SR-2	07-07-0894-17	07/09/07	Aqueous	GC 22	07/16/07	07/17/07	070716B01

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	58	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	81	38-134			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
SR-3	07-07-0894-18	07/09/07	Aqueous	GC 22	07/16/07	07/17/07	070716B01

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	150	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	79	38-134			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
Method Blank	099-12-436-670	N/A	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	Result	RL	DF	Qual	Units
TPH as Gasoline	ND	50	1		ug/L
Surrogates:	REC (%)	Control Limits		Qual	
1,4-Bromofluorobenzene	75	38-134			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report

 Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

 Date Received: 07/13/07
 Work Order No: 07-07-0894
 Preparation: EPA 5030B
 Method: EPA 8260B
 Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 1 of 7

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-2	07-07-0894-1	07/09/07	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	4.6	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	1500	100	54	10	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	23	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	98	74-140				1,2-Dichloroethane-d4	93	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	100	74-110			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-3	07-07-0894-2	07/09/07	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	95	74-140				1,2-Dichloroethane-d4	92	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	104	74-110			


Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-4	07-07-0894-3	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	1.5	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	1900	100	54	10	
Ethylbenzene	6.9	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	0.32	1.0	0.27	1	J	Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	59	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	113	74-140				1,2-Dichloroethane-d4	116	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	90	74-110			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 07/13/07
 Work Order No: 07-07-0894
 Preparation: EPA 5030B
 Method: EPA 8260B
 Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 2 of 7

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-5	07-07-0894-4	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations \geq to the MDL but $<$ RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	3.0	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	13	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	0.29	1.0	0.27	1	J	Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	16	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	3.7	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	2.8	1.0	0.26	1							
Surrogates:		REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual	
Dibromofluoromethane	116	74-140				1,2-Dichloroethane-d4	119	74-146			
Toluene-d8	97	88-112				1,4-Bromofluorobenzene	92	74-110			

S-5B	07-07-0894-5	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05
-------------	---------------------	-----------------	----------------	-----------------	-----------------	-----------------	------------------

Comment(s): -Results were evaluated to the MDL, concentrations \geq to the MDL but $<$ RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	0.37	0.50	0.14	1	J	Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	0.49	1.0	0.26	1	J						
Surrogates:		REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual	
Dibromofluoromethane	114	74-140				1,2-Dichloroethane-d4	117	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	90	74-110			


S-5C	07-07-0894-6	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05
-------------	---------------------	-----------------	----------------	-----------------	-----------------	-----------------	------------------

Comment(s): -Results were evaluated to the MDL, concentrations \geq to the MDL but $<$ RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	5.5	10	5.4	1	J
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	0.26	1							
Surrogates:		REC (%)	Control Limits		Qual	Surrogates:	REC (%)	Control Limits		Qual	
Dibromofluoromethane	117	74-140				1,2-Dichloroethane-d4	118	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	89	74-110			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 07/13/07
 Work Order No: 07-07-0894
 Preparation: EPA 5030B
 Method: EPA 8260B
 Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 3 of 7

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-6	07-07-0894-7	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	2300	100	54	10	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	29	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	113	74-140				1,2-Dichloroethane-d4	114	74-146			
Toluene-d8	101	88-112				1,4-Bromofluorobenzene	90	74-110			

S-7	07-07-0894-8	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05
-----	--------------	----------	---------	----------	----------	----------	-----------

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	39	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	118	74-140				1,2-Dichloroethane-d4	124	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	89	74-110			


S-8	07-07-0894-9	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05
-----	--------------	----------	---------	----------	----------	----------	-----------

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	12	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	125	74-140				1,2-Dichloroethane-d4	127	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	90	74-110			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 07/13/07
 Work Order No: 07-07-0894
 Preparation: EPA 5030B
 Method: EPA 8260B
 Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 4 of 7

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-9	07-07-0894-10	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	1.2	2.0	1.1	1	J
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	120	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	128	74-140				1,2-Dichloroethane-d4	130	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	88	74-110			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-9B	07-07-0894-11	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.


Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	3.0	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	128	74-140				1,2-Dichloroethane-d4	129	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	88	74-110			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-9C	07-07-0894-12	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	0.34	1.0	0.26	1	J						
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	130	74-140				1,2-Dichloroethane-d4	133	74-146			
Toluene-d8	100	88-112				1,4-Bromofluorobenzene	87	74-110			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 5 of 7

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-10	07-07-0894-13	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	0.26	1							
Surrogates:		REC (%)	Control Limits		Qual	Surrogates:		REC (%)	Control Limits		Qual
Dibromofluoromethane	131	74-140				1,2-Dichloroethane-d4	133	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	88	74-110			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-11	07-07-0894-14	07/09/07	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	59	1.0	0.26	1							
Surrogates:		REC (%)	Control Limits		Qual	Surrogates:		REC (%)	Control Limits		Qual
Dibromofluoromethane	128	74-140				1,2-Dichloroethane-d4	133	74-146			
Toluene-d8	101	88-112				1,4-Bromofluorobenzene	87	74-110			


Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
S-12	07-07-0894-15	07/09/07	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	0.59	1.0	0.26	1	J						
Surrogates:		REC (%)	Control Limits		Qual	Surrogates:		REC (%)	Control Limits		Qual
Dibromofluoromethane	97	74-140				1,2-Dichloroethane-d4	93	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	99	74-110			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 07/13/07
 Work Order No: 07-07-0894
 Preparation: EPA 5030B
 Method: EPA 8260B
 Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 6 of 7

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
SR-1	07-07-0894-16	07/09/07	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	0.44	0.50	0.14	1	J	Tert-Butyl Alcohol (TBA)	19	10	5.4	1	
Ethylbenzene	0.69	1.0	0.23	1	J	Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	3.5	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	101	74-140				1,2-Dichloroethane-d4	103	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	99	74-110			

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
SR-2	07-07-0894-17	07/09/07	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	0.14	0.50	0.14	1	J	Tert-Butyl Alcohol (TBA)	720	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	21	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	99	74-140				1,2-Dichloroethane-d4	101	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	100	74-110			


Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
SR-3	07-07-0894-18	07/09/07	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	0.97	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	1300	100	5.4	10	
Ethylbenzene	0.33	1.0	0.23	1	J	Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	19	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	101	74-140				1,2-Dichloroethane-d4	101	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	99	74-110			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 7 of 7

Client Sample Number	Lab Sample Number	Date Collected	Matrix	Instrument	Date Prepared	Date Analyzed	QC Batch ID
Method Blank	099-10-006-22,139	N/A	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	113	74-140				1,2-Dichloroethane-d4	115	74-146			
Toluene-d8	98	88-112				1,4-Bromofluorobenzene	88	74-110			

Method Blank	099-10-006-22,152	N/A	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01
--------------	-------------------	-----	---------	---------	----------	----------	-----------

Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.


Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	98	74-140				1,2-Dichloroethane-d4	94	74-146			
Toluene-d8	100	88-112				1,4-Bromofluorobenzene	99	74-110			

Method Blank	099-10-006-22,165	N/A	Aqueous	GC/MS BB	07/19/07	07/19/07	070719L01
--------------	-------------------	-----	---------	----------	----------	----------	-----------


Comment(s): -Results were evaluated to the MDL, concentrations >= to the MDL but < RL, if found, are qualified with a "J" flag.

Parameter	Result	RL	MDL	DF	Qual	Parameter	Result	RL	MDL	DF	Qual
Benzene	ND	0.50	0.14	1		Tert-Butyl Alcohol (TBA)	ND	10	5.4	1	
Ethylbenzene	ND	1.0	0.23	1		Diisopropyl Ether (DIPE)	ND	2.0	0.33	1	
Toluene	ND	1.0	0.27	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	0.18	1	
p/m-Xylene	ND	1.0	0.54	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1.1	1	
o-Xylene	ND	1.0	0.17	1		Ethanol	ND	100	86	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	0.26	1							
Surrogates:	REC (%)	Control Limits			Qual	Surrogates:	REC (%)	Control Limits			Qual
Dibromofluoromethane	110	74-140				1,2-Dichloroethane-d4	109	74-146			
Toluene-d8	99	88-112				1,4-Bromofluorobenzene	95	74-110			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

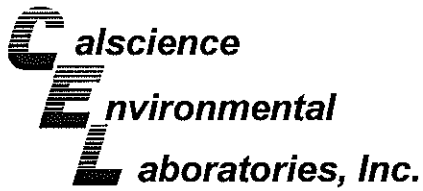

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project 3790 Hopyard Rd., Pleasanton, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-7	Aqueous	GC 22	07/16/07	07/16/07	070716S01

<u>Parameter</u>	<u>MS %REC</u>	<u>MSD %REC</u>	<u>%REC CL</u>	<u>RPD</u>	<u>RPD CL</u>	<u>Qualifiers</u>
TPH as Gasoline	87	92	68-122	6	0-18	

RPD - Relative Percent Difference , CL - Control Limit

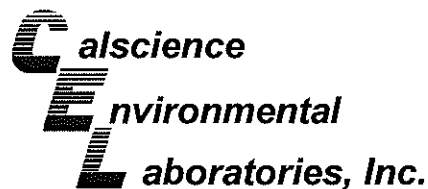

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B

Project 3790 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-4	Aqueous	GC/MS EE	07/14/07	07/15/07	070714S02

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	102	104	88-118	3	0-7	
Carbon Tetrachloride	84	87	67-145	4	0-11	
Chlorobenzene	109	109	88-118	0	0-7	
1,2-Dichlorobenzene	102	103	86-116	1	0-8	
1,1-Dichloroethene	98	106	70-130	8	0-25	
Toluene	102	102	87-123	0	0-8	
Trichloroethene	96	100	79-127	4	0-10	
Vinyl Chloride	100	104	69-129	4	0-13	
Methyl-t-Butyl Ether (MTBE)	92	96	71-131	2	0-13	
Tert-Butyl Alcohol (TBA)	23	63	36-168	8	0-45	3
Diisopropyl Ether (DIPE)	110	113	81-123	3	0-9	
Ethyl-t-Butyl Ether (ETBE)	102	106	72-126	4	0-12	
Tert-Amyl-Methyl Ether (TAME)	102	105	72-126	3	0-12	
Ethanol	87	100	53-149	14	0-31	

RPD - Relative Percent Difference, CL - Control Limit

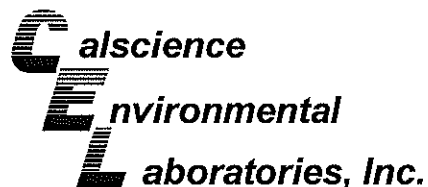

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B

Project 3790 Hopyard Rd., Pleasanton, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-3	Aqueous	GC/MS O	07/18/07	07/18/07	070718S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	101	100	88-118	1	0-7	
Carbon Tetrachloride	85	89	67-145	5	0-11	
Chlorobenzene	103	103	88-118	0	0-7	
1,2-Dichlorobenzene	105	107	86-116	1	0-8	
1,1-Dichloroethene	89	91	70-130	2	0-25	
Toluene	104	103	87-123	1	0-8	
Trichloroethene	100	100	79-127	0	0-10	
Vinyl Chloride	84	84	69-129	0	0-13	
Methyl-t-Butyl Ether (MTBE)	90	94	71-131	5	0-13	
Tert-Butyl Alcohol (TBA)	73	86	36-168	17	0-45	
Diisopropyl Ether (DIPE)	90	92	81-123	2	0-9	
Ethyl-t-Butyl Ether (ETBE)	90	92	72-126	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	92	93	72-126	2	0-12	
Ethanol	72	88	53-149	20	0-31	

RPD - Relative Percent Difference, CL - Control Limit



Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 07/13/07
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B

Project 3790 Hopyard Rd., Pleasanton, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
07-07-1036-1	Aqueous	GC/MS BB	07/19/07	07/19/07	070719S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	96	93	88-118	3	0-7	
Carbon Tetrachloride	111	109	67-145	2	0-11	
Chlorobenzene	95	93	88-118	2	0-7	
1,2-Dichlorobenzene	95	94	86-116	2	0-8	
1,1-Dichloroethene	96	95	70-130	1	0-25	
Toluene	97	94	87-123	4	0-8	
Trichloroethene	98	95	79-127	3	0-10	
Vinyl Chloride	83	85	69-129	2	0-13	
Methyl-t-Butyl Ether (MTBE)	101	100	71-131	1	0-13	
Tert-Butyl Alcohol (TBA)	83	82	36-168	1	0-45	
Diisopropyl Ether (DIPE)	95	94	81-123	1	0-9	
Ethyl-t-Butyl Ether (ETBE)	100	98	72-126	1	0-12	
Tert-Amyl-Methyl Ether (TAME)	103	100	72-126	3	0-12	
Ethanol	88	90	53-149	2	0-31	

RPD - Relative Percent Difference, CL - Control Limit



Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: N/A
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8015B (M)

Project: 3790 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-12-436-670	Aqueous	GC 22	07/16/07	07/16/07	070716B01

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
TPH as Gasoline	92	97	78-120	5	0-10	

RPD - Relative Percent Difference, CL - Control Limit



Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: N/A
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B

Project: 3790 Hopyard Rd., Pleasanton, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-10-006-22,152	Aqueous	GC/MS O	07/18/07	07/18/07	070718L01

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	97	99	84-120	3	0-8	
Carbon Tetrachloride	87	91	63-147	4	0-10	
Chlorobenzene	101	103	89-119	3	0-7	
1,2-Dichlorobenzene	103	105	89-119	2	0-9	
1,1-Dichloroethene	86	90	77-125	5	0-16	
Toluene	101	102	83-125	2	0-9	
Trichloroethene	95	100	89-119	5	0-8	
Vinyl Chloride	82	83	63-135	0	0-13	
Methyl-t-Butyl Ether (MTBE)	88	93	82-118	5	0-13	
Tert-Butyl Alcohol (TBA)	67	71	46-154	5	0-32	
Diisopropyl Ether (DIPE)	90	94	81-123	4	0-11	
Ethyl-t-Butyl Ether (ETBE)	89	93	74-122	4	0-12	
Tert-Amyl-Methyl Ether (TAME)	90	93	76-124	4	0-10	
Ethanol	73	82	60-138	11	0-32	

RPD - Relative Percent Difference , CL - Control Limit

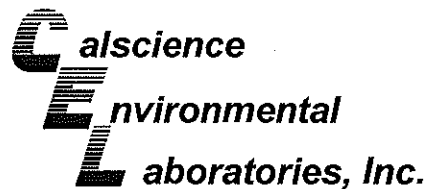

Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: N/A
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B

Project: 3790 Hopyard Rd., Pleasanton, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-10-006-22,139	Aqueous	GC/MS EE	07/14/07	07/15/07	070714L05

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	97	96	84-120	2	0-8	
Carbon Tetrachloride	81	82	63-147	1	0-10	
Chlorobenzene	104	104	89-119	0	0-7	
1,2-Dichlorobenzene	98	98	89-119	0	0-9	
1,1-Dichloroethene	103	94	77-125	8	0-16	
Toluene	96	96	83-125	1	0-9	
Trichloroethene	96	96	89-119	0	0-8	
Vinyl Chloride	98	99	63-135	0	0-13	
Methyl-t-Butyl Ether (MTBE)	95	92	82-118	3	0-13	
Tert-Butyl Alcohol (TBA)	58	57	46-154	3	0-32	
Diisopropyl Ether (DIPE)	104	102	81-123	2	0-11	
Ethyl-t-Butyl Ether (ETBE)	100	96	74-122	4	0-12	
Tert-Amyl-Methyl Ether (TAME)	98	95	76-124	3	0-10	
Ethanol	86	81	60-138	6	0-32	

RPD - Relative Percent Difference, CL - Control Limit



Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 07-07-0894
Preparation: EPA 5030B
Method: EPA 8260B

Project: 3790 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-10-006-22,165	Aqueous	GC/MS BB	07/19/07	07/19/07	070719L01

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	105	99	84-120	6	0-8	
Carbon Tetrachloride	134	120	63-147	10	0-10	
Chlorobenzene	104	97	89-119	7	0-7	
1,2-Dichlorobenzene	101	97	89-119	4	0-9	
1,1-Dichloroethene	111	103	77-125	8	0-16	
Toluene	106	99	83-125	6	0-9	
Trichloroethene	113	102	89-119	10	0-8	X
Vinyl Chloride	97	93	63-135	4	0-13	
Methyl-t-Butyl Ether (MTBE)	95	96	82-118	1	0-13	
Tert-Butyl Alcohol (TBA)	87	81	46-154	7	0-32	
Diisopropyl Ether (DIPE)	92	92	81-123	0	0-11	
Ethyl-t-Butyl Ether (ETBE)	95	95	74-122	0	0-12	
Tert-Amyl-Methyl Ether (TAME)	100	100	76-124	0	0-10	
Ethanol	90	82	60-138	9	0-32	

RPD - Relative Percent Difference, CL - Control Limit

Work Order Number: 07-07-0894

<u>Qualifier</u>	<u>Definition</u>
*	See applicable analysis comment.
1	Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification.
2	Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification.
3	Recovery of the Matrix Spike or Matrix Spike Duplicate compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification.
4	The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification.
5	The PDS/PDSD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported with no further corrective action required.
A	Result is the average of all dilutions, as defined by the method.
B	Analyte was present in the associated method blank.
C	Analyte presence was not confirmed on primary column.
E	Concentration exceeds the calibration range.
H	Sample received and/or analyzed past the recommended holding time.
J	Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
N	Nontarget Analyte.
ND	Parameter not detected at the indicated reporting limit.
Q	Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater.
U	Undetected at the laboratory method detection limit.
X	% Recovery and/or RPD out-of-range.
Z	Analyte presence was not confirmed by second column or GC/MS analysis.

- LAB: TA - Irvine, California
 TA - Morgan Hill, California
 TA - Sacramento, California
 TA - Nashville, Tennessee
 Calscience
 Other _____



SHELL Chain Of Custody Record

NAME OF PERSON TO BILL: Denis Brown

ENVIRONMENTAL SERVICES CHECK BOX TO VERIFY IF NO INCIDENT # APPLIES

INCIDENT # (ES ONLY): 9 8 9 9 5 8 4 2

DATE: 7-9-07

PAGE: 1 of 2

PO # _____ SAP or CRMT # _____

SAMPLING COMPANY: Blaine Tech Services

LOG CODE: BTSS

ADDRESS: 1680 Rogers Avenue, San Jose, CA 95112

PROJECT CONTACT (Hardcopy or PDF Report to): Michael Ninokata

TELEPHONE: 408-573-0555 FAX: 408-573-7771 E-MAIL: mninokata@blainetech.com

TAT (STD IS 10 BUSINESS DAYS / RUSH IS CALENDAR DAYS): STD 5 DAY 3 DAY 2 DAY 24 HOURS RESULTS NEEDED ON WEEKEND

LA - RWQCB REPORT FORMAT UST AGENCY: _____

SPECIAL INSTRUCTIONS OR NOTES: EDD NOT NEEDED SHELL CONTRACT RATE APPLIES STATE REIMB RATE APPLIES RECEIPT VERIFICATION REQUESTED

CC Joe Rounds rounds@deltaenv.com and Eric Frohnapple efrohnapple@deltaenv.com when sending final report.

SITE ADDRESS: Street and City: 3790 Hopyard Rd., Pleasanton State: CA GLOBAL ID NO.: T0600101257

EDF DELIVERABLE TO (Name, Company, Office Location): Jon Suing, Delta, Monrovia Office PHONE NO.: 626.256.6662 E-MAIL: jsuing@deltaenv.com CONSULTANT PROJECT NO.: 070709-06-1 BTS #

SAMPLER NAME(S) (Print): Dave Walter, Sharn Lane


LAB USE ONLY: 0707-0894

REQUESTED ANALYSIS

TPH - Gas, Purgeable (8260B)	TPH - Diesel, Extractable (9015M)	BTEX (8260B)	5 OXYGENATES (8260B) (MTBE, TBA, DIPE, TAME, ETBE)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)	Methanol (8015M)	TPH-motor oil (8015M)	TDS (160.1)	Total Iron (6010B)	Total Lead (6010B)	Total Oil and Grease (1664A)	FIELD NOTES: Container/Preservative or PID Readings or Laboratory Notes
X	X	X									X							TEMPERATURE ON RECEIPT C°
X	X	X									X							
X	X	X									X							
X	X	X									X							
X	X	X									X							
X	X	X									X							
X	X	X									X							
X	X	X									X							
X	X	X									X							

LAB USE ONLY	Field Sample Identification	SAMPLING DATE	SAMPLING TIME	MATRIX	NO. OF CONT.	TPH - Gas, Purgeable (8260B)	TPH - Diesel, Extractable (9015M)	BTEX (8260B)	5 OXYGENATES (8260B) (MTBE, TBA, DIPE, TAME, ETBE)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)	Methanol (8015M)	TPH-motor oil (8015M)	TDS (160.1)	Total Iron (6010B)	Total Lead (6010B)	Total Oil and Grease (1664A)	FIELD NOTES: Container/Preservative or PID Readings or Laboratory Notes	
	S-2	7-9	1325	W	5	X	X	X									X								
	S-3		1054			X	X	X									X								
	S-4		1554			X	X	X									X								
	S-5		1410			X	X	X									X								
	S-5B		1655			X	X	X									X								
	S-5C		1125			X	X	X									X								
	S-6		0950			X	X	X									X								
	S-7		0930			X	X	X									X								
	S-8		1300			X	X	X									X								
	S-9		0820			X	X	X									X								

Relinquished by: (Signature) <i>David C. Walt</i>	Received by: (Signature) <i>David C. Walt (Sample Custodian)</i>	Date: 7-9-07	Time: 1630
Relinquished by: (Signature) <i>[Signature]</i>	Received by: (Signature) <i>[Signature]</i>	Date: 7-12-07	Time: 1625
Relinquished by: (Signature) <i>[Signature]</i>	Received by: (Signature) <i>Sharn Lane (Co)</i>	Date: 07-13-07	Time: 1830

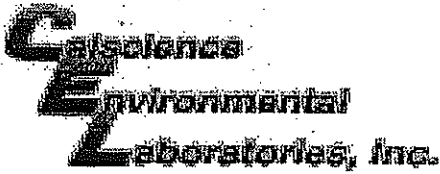

WORK ORDER #: 07 - 07 - 08 9 4

Cooler 1 of 1

SAMPLE RECEIPT FORM

CLIENT: Blaine Tech

DATE: 07/13/07

TEMPERATURE - SAMPLES RECEIVED BY:

CALSCIENCE COURIER:

- Chilled, cooler with temperature blank provided.
Chilled, cooler without temperature blank.
Chilled and placed in cooler with wet ice.
Ambient and placed in cooler with wet ice.
Ambient temperature.
C Temperature blank.

LABORATORY (Other than CalScience Courier):

- C Temperature blank.
1.3 C IR thermometer.
Ambient temperature.

Initial: [Signature]

CUSTODY SEAL INTACT:

Sample(s): Cooler: No (Not Intact):

Not Present: [Signature]

Initial: [Signature]

SAMPLE CONDITION:

Table with 3 columns: Yes, No, N/A. Rows include Chain-Of-Custody document(s) received with samples, Sampler's name indicated on COC, Sample container label(s) consistent with custody papers, Sample container(s) intact and good condition, Correct containers and volume for analyses requested, Proper preservation noted on sample label(s), VOA vial(s) free of headspace, Tedlar bag(s) free of condensation.

Initial: [Signature]

COMMENTS:

Blank lines for handwritten comments.