

RECEIVED

1:50 pm, Jul 16, 2009

Alameda County
Environmental Health



Shell Oil Products US

July 15, 2009

Re: **Quarterly Monitoring Report – Second Quarter 2009**
Former Shell-branded Service Station
3790 Hopyard, Pleasanton
Dublin, California

Dear Mr. Wickham:

I declare, under penalty of perjury, that the information and/or recommendations contained in the attached document or report is true and correct to the best of my knowledge.

Sincerely,
Shell Oil Products US

A handwritten signature in black ink that reads "Denis L. Brown".

Denis L. Brown
Project Manager

July 15, 2009
DELTA Project No. SCA3790H1A
SAP No. 135784

Mr. Jerry Wickham, P.G., CHG
Alameda County Health Care Services
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6540

**Re: SECOND QUARTER 2009 GROUNDWATER MONITORING
REPORT AND REQUEST FOR REDUCED MONITORING**
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California



Dear Mr. Wickham:

On behalf of Shell Oil Products US (Shell), Delta Consultants (Delta) has prepared this *Second Quarter 2009 Groundwater Monitoring Report and Request for Reduced Monitoring* for the above referenced site. The sampling activities at the site were conducted by Blaine Tech Services, Inc. (Blaine Tech) under contract to Shell and included the collection of groundwater samples and static water level measurements. Delta did not provide any oversight of Blaine Tech's work or protocol. A Delta staff member, under the supervision of a California Registered Civil Engineer or a California Professional Geologist, performed evaluation of the data provided to us.

Under the direction of State Water Resources Control Board (SWRCB) Resolution No. 2009-0042, Section 3, Delta is requesting modifications to the quarterly monitoring requirements for this site. A summary of the proposed revisions are presented below:

- Reduce monitoring and sampling of wells S-2, S-4, S-5, S-5B, S-5C, S-6, S-7, S-9, SR-1, and SR-3 from quarterly to semi-annually in the first and third quarters.
- Reduce monitoring and sampling of wells S-3, S-8, S-9B, S-9C, S-10, S-11, S-12, S-14, S-15 and SR-2 from quarterly to annually during the first quarter.
- Reduce the analyses for di-isopropyl ether (DIPE), ethyl tert-butyl ether (ETBE), tert-amyl methyl ether (TAME) and ethanol to annually during the first quarter in all site wells.

July 15, 2009

3790 Hopyard Road, Pleasanton, CA

Second Quarter 2009 Groundwater Monitoring Report And Request for Reduced Monitoring

Page 2

A more detailed discussion of the proposed monitoring and sampling schedule is included in the attached monitoring report.

This quarterly report represents Delta's professional opinions based upon the currently available information and are arrived at in accordance with currently acceptable professional standards. This report is based upon a specific scope of work requested by the client. The Contract between Delta and its client outlines the scope of work, and only those tasks specifically authorized by that contract or outlined in this report were performed. This report is intended only for the use of Delta's Client and anyone else specifically listed on this report. Delta will not and cannot be liable for unauthorized reliance by any other third party. Other than as contained in this paragraph, Delta makes no express or implied warranty as to the contents of this report.

If you have any questions regarding this site, please contact Ms. Regina Bussard (Delta Site Manager) at (408) 826-1876 or Mr. Denis Brown (Shell Project Manager) at (707) 865-0251.


Sincerely,
Delta Consultants



Regina Bussard , P.G.
Project Manager



Richard A. Garlow, M.S., P.G.
Project Specialist



Attachment: Second Quarter 2009 Groundwater Monitoring Report

cc: Denis Brown, Shell Oil Products US, Carson
Danielle Stefani, Livermore-Pleasanton Fire Department
Matthew W. Katen, Zone 7 Water Agency, Pleasanton

SHELL QUARTERLY STATUS REPORT

Station Address:	3790 Hopyard Road, Pleasanton, California
DELTA Project No.:	SCA3790H1A
SHELL Project Manager / Phone No.:	Denis Brown / (707) 865-0251
DELTA Site Manager / Phone No.:	Regina Bussard / (408) 826-1876
Primary Agency / Regulatory ID No.:	Alameda County Health Care Services (ACHCS) / Mr. Jerry Wickham, P.G., CHG
Other Agencies to Receive Copies:	Regional Water Quality Control Board – San Francisco Bay Livermore-Pleasanton Fire Department Zone 7 Water Agency, Pleasanton

WORK PERFORMED THIS QUARTER (SECOND - 2009):

1. Quarterly groundwater monitoring and sampling on **April 16, 2009**. Submitted quarterly report.

WORK PROPOSED FOR THE NEXT MONITORING EVENT (THIRD - 2009):

1. Semi-Annual groundwater monitoring and sampling. Submit semi-annual report.
2. Evaluate the use of sulfate as a remedial alternative.

Current Phase of Project:	Groundwater Monitoring
Site Use:	Shell-branded Service Station
Frequency of Sampling:	Quarterly (Performed by Blaine Tech Services)
Frequency of Monitoring:	Quarterly
Frequency of System Sampling:	None (GWE system shut down)
Frequency of System Monitoring:	None (GWE system shut down)
Is Separate Phase Hydrocarbon Present On-site (Well #'s):	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Cumulative SPH Recovered to Date:	None
Groundwater Removed this Quarter:	509 gallons were recovered during sampling on April 16, 2009.
Receptors in Site Vicinity:	The Arroyo Mocho Canal is located 365 ft south of the site location. There are two municipal drinking wells (Hopyard Well 01 and Hopyard Well 06) located 1,367 ft southeast of site.
Site Lithology:	Beneath two to three feet of surface material is a clay or silt to a depth of approximately 50 to 60 feet. This is overlying approximately 20 feet of a sand to an interbedded sand with silt or clay. Underlying this is a clay or silt to the bottom of the borings which may extend to a depth of 110 feet.
Approximate Depth to Groundwater:	12.20 to 24.42 feet below top of well casing (shallow wells) 28.10 to 29.30 feet below top of well casing (deep wells) 30.61 feet below bridge (C-1, canal)
Groundwater Gradient:	Site groundwater flow direction is towards the south-southeast at a gradient of 0.02 ft/ft.

SHELL QUARTERLY STATUS REPORT (CONT.)

Current Remediation Techniques:	GWE system shut down, natural attenuation.
Permits for Discharge:	Dublin San Ramon Services District Wastewater Discharge Permit No. 05021 – requested discontinuation
Current Agency Correspondence:	ACHCS letter dated October 25, 2007
Site History:	
Case Opening	1986, Soil borings by Emcon prior to UST replacement
On-Site Assessment	1986, Soil borings by Emcon prior to UST replacement
Off-Site Assessment	None
Passive Remediation	Monitor natural attenuation
Active Remediation	None
Closure	None
Summary of Unusual Activity:	None

Comments:

Total purgeable petroleum hydrocarbons (TPPH) were detected in groundwater samples collected from wells S-2, S-4, S-5, S-6, SR-1, and SR-3 with concentrations ranging from 62 micrograms per liter ($\mu\text{g/L}$) [SR-1] to 2,100 $\mu\text{g/L}$ (S-2).

Benzene was detected in groundwater samples collected from wells S-2, S-4, S-5, and SR-3 with concentrations ranging from 0.59 $\mu\text{g/L}$ (SR-3) to 54 $\mu\text{g/L}$ (S-2).

Methyl tert-butyl ether (MTBE) was detected in groundwater samples collected from wells S-2, S-4, S-5, S-6, S-7, S-8, S-9, S-9B, S-11, SR-1, SR-2, and SR-3 with concentrations ranging from 2.3 $\mu\text{g/L}$ (SR-2) to 88 $\mu\text{g/L}$ (S-2).

TBA was detected in groundwater samples collected from wells S-2, S-4, S-5, S-5B, S-6, SR-1, SR-2, and SR-3 with concentrations ranging from 14 $\mu\text{g/L}$ (S-5B) to 4,000 $\mu\text{g/L}$ (S-6).

Toluene was detected in a groundwater sample collected from well S-2 at a concentration of 1.2 $\mu\text{g/L}$.

Ethylbenzene was detected in groundwater samples collected from wells S-2, S-4, and S-5 at concentrations ranging from 2.7 $\mu\text{g/L}$ (S-5) to 21 $\mu\text{g/L}$ (S-4).

Xylenes were detected in groundwater samples collected from wells S-2 and S-5 at concentrations of 3.0 $\mu\text{g/L}$ and 1.4 $\mu\text{g/L}$, respectively.

DIPE, ETBE, TAME, and ethanol were not detected above laboratory reporting limits in any of the wells.

MONITORING FREQUENCY REDUCTION REQUEST

Currently, twenty wells (S-2 to S-5, S-5C, S-5B, S-6 to S-9, S-9B, S-9C, S-10 to S-12, S-14, S-15, SR-1 to SR-3) are monitored and sampled on a quarterly schedule. A location along Canal Arroyo Moho, located south-southeast of the site, is also gauged on a quarterly basis. The samples from each well are analyzed quarterly for the presence of TPPH, benzene, toluene, ethylbenzene, and xylenes (BTEX compounds), MTBE, TBA, DIPE, ETBE, TAME, and ethanol. The groundwater flow direction beneath the site has been primarily to the south-southeast at a gradient of 0.02 feet per foot (ft/ft).

In reference to applicable Environmental Screening Levels (ESLs) from the California Regional Water Quality Control Board (RWQCB), San Francisco Bay Region, the primary chemicals of concern (COC) at the site are TPPH, benzene, MTBE and TBA. Based on a review of the available historic data, Delta proposes the following modifications to the monitoring and sampling program for this site:

1. COC concentrations have been relatively stable or decreasing in monitoring wells S-2, S-4, S-5, S-5B, S-5C, S-6, S-7, S-9, SR-1, and SR-3. Delta recommends reducing the monitoring and sampling of these wells from quarterly to semi-annually in the first and third quarters.
2. Most, if not all COC concentrations in wells S-3, S-8, S-9B, S-9C, S-10, S-11, S-12, S-14, S-15 and SR-2, have been below the laboratory reporting limits or the ESLs for several quarters. Delta recommends reducing the monitoring and sampling of these wells from quarterly to annually during the first quarter.
3. Concentrations of DIPE, ETBE, TAME and ethanol have been below or close to the laboratory reporting limits in nearly all the samples analyzed. Delta recommends reducing these analyses to annually during the first quarter for all site wells.

ATTACHMENTS:

Tables:

Table 1 – Current Well Concentrations

Table 2 – Historic Well Concentrations

Figures:

Figure 1 – Site Location Map

Figure 2 – Groundwater Elevation Contour Map

Figure 3 – Hydrocarbon Distribution in Groundwater Map

Figure 4 – TPH-g Isoconcentration Map

Figure 5 – Benzene Isoconcentration Map

Figure 6 – MTBE Isoconcentration Map

Figure 7 – TBA Isoconcentration Map

Graphs:

Graph 1 – MTBE and TBA Concentrations (Well S-4)

Graph 2 – MTBE and TBA Concentrations (Well S-6)

Graph 3 – MTBE and TBA Concentrations (Well S-7)

Graph 4 – MTBE and TBA Concentrations (Well S-9)

Graph 5 – MTBE and TBA Concentrations (Well SR-2)

Appendices:

Appendix A – Blaine Tech Services, Inc. Field Data Sheets

Appendix B – Blaine Tech Services, Inc. Field Procedures

Appendix C – Laboratory Report and Chain-of-Custody Documentation

Appendix D – State Water Resources Control Board Resolution No. 2009-0042

TABLES

TABLE 1
CURRENT WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)	
S-2	4/16/2009	2,100	NA	54	1.2	21	3.0	NA	88	<2.0	<2.0	<2.0	930	NA	<100	328.77	13.75	315.02	NA	NA	
S-3	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.20	315.20	NA	NA	
S-4	4/16/2009	680	NA	3.4	<5.0	14	<5.0	NA	29	<10	<10	<10	2,200	NA	<500	328.11	13.43	314.68	NA	NA	
S-5	4/16/2009	280	NA	1.3	<1.0	2.7	1.4	NA	11	<2.0	<2.0	<2.0	35	NA	<100	329.36	15.95	313.41	NA	NA	
S-5B	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	14	NA	<100	332.25	29.30	302.95	NA	NA	
S-5C	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.33	29.29	303.04	NA	NA	
S-6	4/16/2009	840	NA	<2.5	<5.0	<5.0	<5.0	NA	13	<10	<10	<10	4,000	NA	<500	327.26	14.35	312.91	NA	NA	
S-7	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	19	<2.0	<2.0	<2.0	<10	NA	<100	328.41	16.72	311.69	NA	NA	
S-8	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	8.1	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.95	311.19	NA	NA	
S-9	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	27	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	327.85	17.48	310.37	NA	NA
S-9B	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	3.1	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	330.47	28.10	302.37	NA	NA
S-9C	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	330.77	28.29	302.48	NA	NA
S-10	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	13.92	311.95	NA	NA
S-11	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	20	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	327.48	16.93	310.55	NA	NA
S-12	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.74	306.02	NA	NA
S-14	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	324.90	17.40	307.50	NA	NA

TABLE 1
CURRENT WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-15	4/16/2009	Insufficient water	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	24.42	NA	NA	NA
SR-1	4/16/2009	62	NA	<0.50	<1.0	<1.0	<1.0	NA	8.0	<2.0	<2.0	<2.0	38	NA	<100	328.33	14.69	313.64	NA	NA
SR-2	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	2.3	<2.0	<2.0	<2.0	73	NA	<100	327.31	12.64	314.67	NA	NA
SR-3	4/16/2009	80	NA	0.59	<1.0	<1.0	<1.0	NA	5.8	<2.0	<2.0	<2.0	320	NA	<100	327.50	12.49	315.01	NA	NA
C-1	4/16/2009	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	30.61	300.72	NA	NA

Abbreviations:

TEPH = Total petroleum hydrocarbons as diesel.

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8015.

BTEX = benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260

1,2-DCA = 1,2-Dichloroethane, analyzed by EPA Method 8260

TOB = Top of Wellbox Elevation

TOC = Top of Casing Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ppm = Parts per million

ug/L = Parts per billion

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

TABLE 1
CURRENT WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

Notes:

a = Compounds detected within the chromatographic range of gasoline but not characteristic of the standard gasoline pattern.

b = This sample was analyzed outside of the EPA recommended holding time.

c = Samples for wells S-6 and S-7 may have been switched.

d = Survey date only.

e = Hydrocarbon does not match pattern of laboratory's standard.

f = The concentration reported reflects individual or discrete unidentified peaks not matching a typical fuel pattern.

g = Quantity of unknown hydrocarbon(s) in sample based on gasoline.

h = Due to the low levels of analyte found in the sample, the analyte was qualitatively identified based on the compound's retention time and the presence of a single mass ion.

i = Estimated value. Analyte detected at a level less than the Reporting Limit (RL) and greater than or equal to the Method Detection Limit (MDL). The user of this data should be aware that this data is of limited reliability.

j = Hydrocarbon result partly due to individual peak(s) in quantitation range.

k = Analyzed by EPA Method 8015B (M).

l = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

m = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.

Ethanol analyzed by EPA Method 8260.

Corrected groundwater elevation when SPH is present = Top of Casing Elevation - Depth to Water + (0.8 x Hydrocarbon Thickness).

Well T-2 is a backfill well.

Beginning September 23, 2002 depth to water referenced to Top of Casing.

All wells except S-11, S-12, and T-1 through T-4 surveyed March 11, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.

Survey data for wells S-11 and S-12 provided by Cambria Environmental Technology, Inc.

C-1 surveyed March 18, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.

Wells SR-1, SR-2, and SR-3 surveyed September 22, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.

4Q05 survey data for wells S-5B, S-5C, S-9B, S-9C, and S-14 provided by Delta Environmental Consultants, Inc.

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-1	11/6/1987	920	NA	230	<5	150	150	NA											
S-1	2/14/1988	3,500	NA	1,300	<40	500	500	NA											

S-2	11/6/1987	16,000	NA	870	100	2,700	2,700	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	2/14/1988	1,800	NA	440	<10	140	140	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	10/13/1988	550	NA	110	1	45	15	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	1/31/1989	620	NA	170	2	62	14	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	3/7/1989	1,900	NA	260	270	130	260	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	6/26/1989	320	NA	88	1	32	10	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	9/8/1989	230	NA	80	1	30	15	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	12/14/1989	160	NA	56	0.5	21	3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	3/5/1990	710	NA	57	<0.5	<0.5	88	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	6/14/1990	110	NA	39	0.5	11	2	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	10/2/1990	290	NA	84	1.7	160	8.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	12/18/1990	61	NA	18	1.4	2.2	2.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-2	3/20/1991	110	NA	30	2.2	10	7	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	
S-2	6/26/1991	50a	NA	6.3	<0.5	3.3	1.3	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	
S-2	9/5/1991	90	NA	12	3.2	2.5	2.3	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	
S-2	12/13/1991	<50	NA	12	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.85	313.36	NA	NA
S-2	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.94	314.27	NA	NA
S-2	6/24/1992	<50	NA	0.9	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.78	313.43	NA	NA
S-2	9/17/1992	78	NA	2.6	1.3	1.3	0.9	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.03	314.18	NA	NA
S-2	12/11/1992	<50	NA	0.8	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.81	314.40	NA	NA
S-2	2/4/1993	55	NA	1.3	0.7	0.7	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	NA
S-2	6/3/1993	<50	NA	0.7	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	NA	NA	NA	NA
S-2	9/15/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.63	314.58	NA	NA
S-2	12/9/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.70	314.51	NA	NA
S-2	6/16/1994	<50	NA	0.8	<0.5	0.7	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.94	314.27	NA	NA
S-2	9/13/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	15.17	314.04	NA	NA
S-2	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.21	14.25	314.96	NA	NA
S-2	6/12/1996	<50	NA	6.1	<0.5	<0.5	<0.5	<0.5	48	NA	NA	NA	NA	NA	NA	329.21	14.31	314.90	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-2	6/25/1997	120	NA	25	0.59	2.4	8.7	130	NA	NA	NA	NA	NA	NA	NA	329.21	14.40	314.81	NA	4.4
S-2	6/19/1998	450	NA	96	<2.5	4	19	180	NA	NA	NA	NA	NA	NA	NA	329.21	13.72	315.49	NA	2.8
S-2	6/17/1999	312	NA	74.4	2.04	1.02	<1.00	147	NA	NA	NA	NA	NA	NA	NA	329.21	13.97	315.24	NA	3.7
S-2	6/15/2000	1,050	NA	261	<5.00	7.54	11.4	13,500	9,850 b	NA	NA	NA	NA	NA	NA	329.21	14.25	314.96	NA	3.3
S-2	11/29/2000	<250	NA	3.75	<2.50	<2.50	<2.50	12,400	10,700 b	NA	NA	NA	NA	NA	NA	329.21	14.82	314.39	NA	2.2
S-2	3/7/2001	<500	NA	14.7	<5.00	<5.00	<5.00	8,610	NA	NA	NA	NA	NA	NA	NA	329.21	13.70	315.51	NA	2.3
S-2	6/18/2001	<2,000	NA	<20	<20	<20	<20	NA	7,100	NA	NA	NA	NA	NA	NA	329.21	14.56	314.65	NA	NA
S-2	9/17/2001	<2,000	NA	<10	<10	<10	<10	NA	7,500	<10	<10	<10	680	NA	<500	329.21	15.18	314.03	NA	NA
S-2	12/31/2001	<1,000	NA	<10	<10	<10	<10	NA	3,800	NA	NA	NA	NA	NA	NA	329.21	13.19	316.02	NA	NA
S-2	3/13/2002	<1,000	NA	65	<10	13	<10	NA	6,500	NA	NA	NA	NA	NA	NA	329.21	15.03	314.18	NA	NA
S-2	6/18/2002	520	NA	28	<5.0	<5.0	<5.0	NA	2,800	NA	NA	NA	NA	NA	NA	329.21	15.60	313.61	NA	NA
S-2	9/27/2002	<1,000	NA	<10	<10	<10	<10	NA	4,200	NA	NA	NA	NA	NA	NA	328.77	14.90	313.87	NA	NA
S-2	12/27/2002	<1,000	NA	<10	<10	<10	<10	NA	4,300	<10	<10	<10	5,600	<10	NA	328.77	14.40	314.37	NA	NA
S-2	3/24/2003	<2,500	NA	28	<25	<25	<50	NA	1,300	NA	NA	NA	NA	NA	NA	328.77	14.86	313.91	NA	NA
S-2	5/9/2003	<2,500	NA	36	<25	35	<50	NA	4,000	NA	NA	NA	6,200	NA	NA	328.77	13.45	315.32	NA	NA
S-2	7/8/2003	<2,000	NA	<20	<20	<20	<40	NA	3,200	NA	NA	NA	NA	NA	NA	328.77	20.10	308.67	NA	NA
S-2	10/15/2003	960 e	NA	6.9	<2.5	9.0	<5.0	NA	90	NA	NA	NA	2,400	NA	NA	328.77	16.67	312.10	NA	NA
S-2	1/6/2004	690	NA	8.3	<0.50	0.72	2.8	NA	82	NA	NA	NA	860	NA	NA	328.77	21.00	307.77	NA	NA
S-2	4/7/2004	980 e	NA	12	<2.5	<2.5	<5.0	NA	28	NA	NA	NA	2,500	NA	NA	328.77	16.62	312.15	NA	NA
S-2	7/27/2004	62	NA	1.5	<0.50	<0.50	<1.0	NA	16	<2.0	<2.0	<2.0	550	NA	<50	328.77	16.64	312.13	NA	NA
S-2	10/29/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	22	<10	<10	<10	1,800	NA	<250	328.77	16.43	312.34	NA	NA
S-2	1/6/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	21	<10	<10	<10	2,700	NA	NA	328.77	16.37	312.40	NA	NA
S-2	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	14	<0.50	<0.50	<0.50	290	NA	<5.0	328.77	18.54	310.23	NA	NA
S-2	7/29/2005	1,300 g	NA	<5.0	<5.0	<5.0	<10	NA	19	<20	<20	<20	1,000	NA	<500	328.77	21.37	307.40	NA	NA
S-2	10/20/2005	1,300	NA	13	<1.0	9.8	2.6	NA	26	<4.0	<4.0	<4.0	730	NA	<100	328.77	21.88	306.89	NA	NA
S-2	1/26/2006	3,820	NA	16.3	<0.500	5.78	<0.500	NA	25.8	<0.500	<0.500	<0.500	445	NA	<50.0	328.77	21.15	307.62	NA	NA
S-2	4/24/2006	4,720	NA	68.8	1.44	115	8.31	NA	1,600	<0.500	<0.500	<0.500	1,010	NA	<50.0	328.77	13.80	314.97	NA	NA
S-2	7/12/2006	<50.0	NA	14.4	<0.500	<0.500	<1.50	NA	70.9	<0.500	<0.500	<0.500	1,660	NA	<50.0	328.77	14.19	314.58	NA	NA
S-2	10/20/2006	108	NA	5.52	<0.500	0.690	<0.500	NA	17.9	<0.500	<0.500	<0.500	382	NA	<50.0	328.77	14.13	314.64	NA	NA
S-2	1/22/2007	<50	NA	0.40 i	<0.50	<0.50	<1.0	NA	16	<1.0	<1.0	<1.0	450	NA	<150	328.77	14.05	314.72	NA	NA
S-2	4/13/2007	52 k	NA	0.53	<1.0	0.22 m	<1.0	NA	14	<2.0	<2.0	<2.0	660	NA	<100	328.77	14.09	314.68	NA	NA
S-2	7/9/2007	97 k,l	NA	4.6	<1.0	<1.0	<1.0	NA	23	<2.0	<2.0	<2.0	1,500	NA	<100	328.77	13.33	315.44	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-2	10/22/2007	120 k	NA	0.23 m	<1.0	<1.0	<1.0	NA	13	<2.0	<2.0	<2.0	2,400	NA	<100	328.77	14.70	314.07	NA	NA
S-2	1/9/2008	66 k	NA	1.5 m	<5.0	<5.0	<5.0	NA	12	<10	<10	<10	1,500	NA	<500	328.77	13.65	315.12	NA	NA
S-2	4/11/2008	450	NA	3.8	<5.0	<5.0	<5.0	NA	37	<10	<10	<10	4,300	NA	<500	328.77	14.47	314.30	NA	NA
S-2	7/29/2008	370	NA	5.3	<5.0	<5.0	<5.0	NA	18	<10	<10	<10	2,300	NA	<500	328.77	15.00	313.77	NA	NA
S-2	10/29/2008	100	NA	2.3	<1.0	<1.0	<1.0	NA	11	<2.0	<2.0	<2.0	710	NA	<100	328.77	15.10	313.67	NA	NA
S-2	1/21/2009	990	NA	37	<1.0	8.8	1.4	NA	83	<2.0	<2.0	<2.0	1,200	NA	<100	328.77	13.89	314.88	NA	NA
S-2	4/16/2009	2,100	NA	54	1.2	21	3.0	NA	88	<2.0	<2.0	<2.0	930	NA	<100	328.77	13.75	315.02	NA	NA

S-3	2/14/1988	<50	NA	<0.5	<1	<4	<4	NA	NA	NA	NA	NA								
S-3	10/13/1988	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA								
S-3	1/31/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA								
S-3	3/7/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA								
S-3	6/26/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA								
S-3	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA								
S-3	12/14/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA								
S-3	3/5/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA								
S-3	6/14/1990	<500	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA								
S-3	10/2/1990	<50	NA	<0.5	<0.5	<0.5	1.0	NA	NA	NA	NA	NA								
S-3	12/18/1990	<50	NA	<0.5	1.6	<0.5	2.0	NA	NA	NA	NA	NA								
S-3	3/20/1991	70	NA	2.3	8.9	4	23	NA	327.67	NA	NA	NA	NA							
S-3	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	NA	NA	NA	NA							
S-3	9/5/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	NA	NA	NA	NA							
S-3	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	13.87	313.80	NA	NA							
S-3	3/11/1992	<30	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	13.05	314.62	NA	NA							
S-3	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	13.86	313.81	NA	NA							
S-3	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	13.01	314.66	NA	NA							
S-3	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	13.00	314.67	NA	NA							
S-3	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	NA	NA	NA	NA							
S-3	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	327.67	NA	NA	NA	NA							
S-3	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.67	13.02	314.65	NA	NA
S-3	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.67	NA	NA	NA	NA
S-3	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.67	15.17	312.50	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-3	6/21/1995	50	NA	4.1	<0.5	20	1.2	NA	NA	NA	NA	NA	NA	NA	NA	327.67	12.49	315.18	NA	NA
S-3	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	327.67	12.53	315.14	NA	NA
S-3	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	327.67	12.64	315.03	NA	1.8
S-3	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	327.67	11.74	315.93	NA	4.1
S-3	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	NA	327.67	12.35	315.32	NA	2.8
S-3	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	327.67	12.51	315.16	NA	3.2
S-3	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	327.67	12.84	314.83	NA	1.0
S-3	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	327.67	12.42	315.25	NA	2.8
S-3	6/18/2001	<50	NA	0.66	1.1	<0.50	0.51	NA	0.66	NA	NA	NA	NA	NA	NA	327.67	13.74	313.93	NA	NA
S-3	9/17/2001	<50	NA	0.73	0.96	<0.50	0.61	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	13.25	314.42	NA	NA
S-3	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	12.38	315.29	NA	NA
S-3	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	13.16	314.51	NA	NA
S-3	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.67	13.55	314.12	NA	NA
S-3	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	327.40	13.32	314.08	NA	NA
S-3	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<50	<2.0	NA	327.40	12.55	314.85	NA	NA
S-3	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	327.40	12.71	314.69	NA	NA
S-3	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	12.27	315.13	NA	NA
S-3	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.7	NA	NA	NA	<5.0	NA	NA	327.40	14.10	313.30	NA	NA
S-3	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	14.64	312.76	NA	NA
S-3	1/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	15.11	312.29	NA	NA
S-3	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.40	14.36	313.04	NA	NA
S-3	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	14.21	313.19	NA	NA
S-3	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	14.03	313.37	NA	NA
S-3	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	14.08	313.32	NA	NA
S-3	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	NA	<5.0	327.40	12.16	315.24	NA	NA
S-3	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	15.29	312.11	NA	NA
S-3	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	327.40	15.90	311.50	NA	NA
S-3	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	59.5	NA	<50.0	327.40	15.00	312.40	NA	NA
S-3	4/24/2006	<50.0	NA	0.610	0.640	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	13.0	NA	<50.0	327.40	12.03	315.37	NA	NA
S-3	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.40	12.35	315.05	NA	NA
S-3	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.40	12.46	314.94	NA	NA
S-3	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<1.0	<1.0	<1.0	<1.0	<10	NA	<150	327.40	13.05	314.35	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-3	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.50	314.90	NA	NA
S-3	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.04	315.36	NA	NA
S-3	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	13.02	314.38	NA	NA
S-3	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.21	315.19	NA	NA
S-3	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.80	314.60	NA	NA
S-3	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	13	NA	170	327.40	13.25	314.15	NA	NA
S-3	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	13.40	314.00	NA	NA
S-3	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.41	314.99	NA	NA
S-3	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	327.40	12.20	315.20	NA	NA
S-4	2/14/1988	5,100	NA	160	8	730	730	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	10/13/1988	530	NA	24	1	25	16	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	1/31/1989	1,100	NA	33	2	20	24	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	3/7/1989	650	NA	37	1	35	27	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	6/26/1989	670	NA	110	<1	85	71	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	9/8/1989	380	NA	32	<1	36	26	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	12/14/1989	210	NA	21	<0.5	30	23	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	3/5/1990	350	NA	43	<0.5	24	47	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	6/14/1990	430	NA	74	<0.5	71	46	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	10/2/1990	700	NA	74	2.2	100	55	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	12/18/1990	1,400	NA	180	2.9	280	230	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-4	3/20/1991	1,200	NA	100	<2.0	210	130	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	6/26/1991	220	NA	14	<0.5	34	17	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	9/5/1991	580	NA	31	0.8	53	26	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	12/13/1991	370	NA	24	0.9	1.3	46	NA	NA	NA	NA	NA	NA	NA	NA	328.53	15.20	313.33	NA	NA
S-4	3/11/1992	1,600	NA	23	1.2	12	20	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.37	314.16	NA	NA
S-4	6/24/1992	480	NA	48	<1.0	95	22	NA	NA	NA	NA	NA	NA	NA	NA	328.53	15.30	313.23	NA	NA
S-4	9/17/1992	260	NA	35	1.2	51	7.8	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.17	314.36	NA	NA
S-4	12/11/1992	270	NA	34	0.8	28	4.5	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.18	314.35	NA	NA
S-4	2/4/1993	1,100	NA	12	<5.0	89	100	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	6/3/1993	210	NA	48	1.1	42	4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	NA	NA	NA	NA
S-4	9/15/1993	700	NA	21	<1.0	110	91	NA	NA	NA	NA	NA	NA	NA	NA	328.53	13.86	314.67	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-4	12/9/1993	250	NA	39	<0.5	3.8	2.6	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.16	314.37	NA	NA
S-4	3/4/1994	150	NA	25	1.4	6.8	2.8	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.17	314.36	NA	NA
S-4 (D)	3/4/1994	140	NA	28	0.8	7.9	3.2	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.17	314.36	NA	NA
S-4	6/16/1994	90	NA	12	<0.5	1.8	2.4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.14	314.39	NA	NA
S-4 (D)	6/16/1994	80	NA	5.9	<0.5	1.5	0.9	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.14	314.39	NA	NA
S-4	9/13/1994	<50	NA	23	<0.5	4.9	2.4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.42	314.11	NA	NA
S-4 (D)	9/13/1994	<50	NA	23	<0.5	4	2.3	NA	NA	NA	NA	NA	NA	NA	NA	328.53	14.42	314.11	NA	NA
S-4	6/21/1995	270	NA	34	1.4	25	7.6	NA	NA	NA	NA	NA	NA	NA	NA	328.53	13.82	314.71	NA	NA
S-4 (D)	6/21/1995	280	NA	35	2.1	26	8.4	NA	NA	NA	NA	NA	NA	NA	NA	328.53	13.82	314.71	NA	NA
S-4	6/12/1996	360	NA	52	<0.5	<0.5	<0.5	92	NA	NA	NA	NA	NA	NA	NA	328.53	13.64	314.89	NA	NA
S-4 (D)	6/12/1996	430	NA	54	<1.2	72	21	96	NA	NA	NA	NA	NA	NA	NA	328.53	13.64	314.89	NA	NA
S-4	6/25/1997	6,700	NA	93	1,200	240	1,300	6,900	6,800	NA	NA	NA	NA	NA	NA	328.53	13.74	314.79	NA	0.6
S-4	6/19/1998	3,500	NA	56	15	140	670	2,100	NA	NA	NA	NA	NA	NA	NA	328.53	12.55	315.98	NA	0.8
S-4 (D)	6/19/1998	3,000	NA	51	14	110	530	2,000	NA	NA	NA	NA	NA	NA	NA	328.53	12.55	315.98	NA	0.8
S-4	6/17/1999	1,510	NA	28.4	9.84	176	132	1,780	NA	NA	NA	NA	NA	NA	NA	328.53	13.24	315.29	NA	4.8
S-4	6/15/2000	<500	NA	12.0	<5.00	31.0	22.8	12,200	NA	NA	NA	NA	NA	NA	NA	328.53	13.65	314.88	NA	2.1
S-4	11/29/2000	<500	NA	<5.00	<5.00	<5.00	<5.00	12,100	NA	NA	NA	NA	NA	NA	NA	328.53	14.23	314.30	NA	1.8
S-4	3/7/2001	<500	NA	5.44	<5.00	6.49	<5.00	11,400	14,500	NA	NA	NA	NA	NA	NA	328.53	13.15	315.38	NA	2.4
S-4	6/18/2001	<1,000	NA	<10	<10	<10	<10	NA	3,500	NA	NA	NA	NA	NA	NA	328.53	13.81	314.72	NA	NA
S-4	9/17/2001	<500	NA	<5.0	<5.0	<5.0	<5.0	NA	7,700	NA	NA	NA	NA	NA	NA	328.53	14.29	314.24	NA	NA
S-4	12/31/2001	<1,000	NA	<10	<10	<10	<10	NA	3,800	NA	NA	NA	NA	NA	NA	328.53	13.44	315.09	NA	NA
S-4	3/13/2002	<2,500	NA	<25	<25	<25	<25	NA	18,000	NA	NA	NA	NA	NA	NA	328.53	14.42	314.11	NA	NA
S-4	6/18/2002	<100	NA	1.1	<1.0	<1.0	<1.0	NA	530	NA	NA	NA	NA	NA	NA	328.53	15.19	313.34	NA	NA
S-4	9/27/2002	<200	NA	<2.0	<2.0	<2.0	<2.0	NA	1,100	NA	NA	NA	NA	NA	NA	328.11	14.32	313.79	NA	NA
S-4	12/27/2002	280	NA	3.5	<2.5	17	4.7	NA	390	<2.5	<2.5	<5.0	9,000	<2.5	NA	328.11	13.50	314.61	NA	NA
S-4	3/24/2003	<2,500	NA	<25	<25	<25	<50	NA	780	NA	NA	NA	NA	NA	NA	328.11	14.56	313.55	NA	NA
S-4	5/9/2003	<2,500	NA	<25	<25	<25	<50	NA	1,200	NA	NA	NA	18,000	NA	NA	328.11	13.20	314.91	NA	NA
S-4	7/8/2003	<2,500	NA	<25	<25	<25	<50	NA	1,700	NA	NA	NA	8,700	NA	NA	328.11	20.87	307.24	NA	NA
S-4	10/15/2003	<2,500	NA	<25	<25	<25	<50	NA	280	NA	NA	NA	11,000	NA	NA	328.11	16.15	311.96	NA	NA
S-4	1/6/2004	3,500	NA	<5.0	19	190	570	NA	58	NA	NA	NA	9,600	NA	NA	328.11	21.64	306.47	NA	NA
S-4	4/7/2004	<1,000	NA	<10	<10	<10	<20	NA	110	NA	NA	NA	9,900	NA	NA	328.11	20.89	307.22	NA	NA
S-4	7/27/2004	<1,000	NA	<10	<10	<10	<20	NA	<10	<40	<40	<40	10,000	NA	<1,000	328.11	20.78	307.33	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-4	10/29/2004	<1,000	NA	<10	<10	<10	<20	NA	110	<40	<40	<40	5,600	NA	<1,000	328.11	20.53	307.58	NA	NA
S-4	1/6/2005	<1,000	NA	<10	<10	<10	<20	NA	<10	<40	<40	<40	6,500	NA	NA	328.11	20.44	307.67	NA	NA
S-4	4/14/2005	<250	NA	<2.5	<2.5	3.1	<2.5	NA	120	<2.5	<2.5	<2.5	6,000	NA	<25	328.11	18.60	309.51	NA	NA
S-4	7/29/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	4.4	<10	<10	<10	3,100	NA	<250	328.11	21.03	307.08	NA	NA
S-4	10/20/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	<2.5	<10	<10	<10	2,700	NA	<250	328.11	21.62	306.49	NA	NA
S-4	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	0.950	<0.500	<0.500	<0.500	723	NA	<50.0	328.11	21.10	307.01	NA	NA
S-4	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	79.4	<0.500	<0.500	<0.500	1,310	NA	<50.0	328.11	13.24	314.87	NA	NA
S-4	7/12/2006	<50.0	NA	4.42	<0.500	29.1	36.5	NA	230	<0.500	<0.500	0.930	1,530	NA	<50.0	328.11	13.45	314.66	NA	NA
S-4	10/20/2006	1,150	NA	5.30	0.990	41.5	2.79	NA	208	<0.500	<0.500	<0.500	2,160	NA	<50.0	328.11	13.63	314.48	NA	NA
S-4	1/22/2007	550	NA	4.8	<2.5	30	<5.0	NA	130	<5.0	<5.0	<5.0	3,000	NA	<750	328.11	14.32	313.79	NA	NA
S-4	4/13/2007	320 k,l	NA	0.48 m	<1.0	3.3	<1.0	NA	18	<2.0	<2.0	<2.0	390	NA	<100	328.11	13.68	314.43	NA	NA
S-4	7/9/2007	240 k	NA	1.5	0.32 m	6.9	<1.0	NA	59	<2.0	<2.0	<2.0	1,900	NA	<100	328.11	12.78	315.33	NA	NA
S-4	10/22/2007	170 k	NA	1.3 m	<5.0	3.8 m	<5.0	NA	36	<10	<10	<10	1,600	NA	<500	328.11	14.26	313.85	NA	NA
S-4	1/9/2008	85 k	NA	<2.5	<5.0	1.3 m	<5.0	NA	26	<10	<10	<10	1,700	NA	<500	328.11	13.40	314.71	NA	NA
S-4	4/11/2008	430	NA	<2.5	<5.0	<5.0	<5.0	NA	49	<10	<10	<10	3,100	NA	<500	328.11	14.00	314.11	NA	NA
S-4	7/29/2008	190	NA	1.1	<1.0	1.3	<1.0	NA	24	<2.0	<2.0	<2.0	1,500	NA	<100	328.11	14.64	313.47	NA	NA
S-4	10/29/2008	180	NA	1.3	<1.0	5.7	<1.0	NA	21	<2.0	<2.0	<2.0	1,700	NA	<100	328.11	14.73	313.38	NA	NA
S-4	1/21/2009	940	NA	4.6	<2.0	31	<2.0	NA	38	<4.0	<4.0	<4.0	2,400	NA	<200	328.11	13.66	314.45	NA	NA
S-4	4/16/2009	680	NA	3.4	<5.0	14	<5.0	NA	29	<10	<10	<10	2,200	NA	<500	328.11	13.43	314.68	NA	NA

S-5	2/14/1988	1,000	NA	40	86	180	180	NA											
S-5	10/13/1988	560	NA	66	20	18	36	NA											
S-5	1/31/1989	180	NA	27	8	9	13	NA											
S-5	3/7/1989	3,800	NA	520	530	260	570	NA											
S-5	6/26/1989	<50	NA	3.8	<1	2	<3	NA											
S-5	9/8/1989	110	NA	25	2	2	12	NA											
S-5	12/14/1989	1,700	NA	300	86	67	140	NA											
S-5	3/5/1990	1,100	NA	100	110	79	240	NA											
S-5	6/14/1990	600	NA	94	36	40	62	NA											
S-5	10/2/1990	4,500	NA	1,400	160	260	300	NA											
S-5	11/20/1990	16,000	NA	4,600	720	790	1,000	NA											
S-5	12/18/1990	25,000	NA	7,600	1,100	1,300	2,300	NA											

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-5	3/20/1991	310	NA	39	12	18	30	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	
S-5	6/26/1991	1,300	NA	250	62	120	180	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	
S-5	9/5/1991	4,700	NA	660	150	170	280	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	
S-5	12/13/1991	1,400	NA	580	19	110	80	NA	NA	NA	NA	NA	NA	NA	NA	329.66	17.48	312.18	NA	
S-5	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.22	313.44	NA	
S-5	6/24/1992	1,800	NA	380	52	120	180	NA	NA	NA	NA	NA	NA	NA	NA	329.66	17.47	312.19	NA	
S-5	9/17/1992	2,200	NA	750	91	170	170	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.84	312.82	NA	
S-5	12/11/1992	8,700	NA	1,600	66	48	340	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.37	313.29	NA	
S-5	2/4/1993	150	NA	156	0.7	4.7	4	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	
S-5	6/3/1993	480	NA	140	3.4	17	14	NA	NA	NA	NA	NA	NA	NA	NA	329.66	NA	NA	NA	
S-5	9/15/1993	80	NA	2.4	0.5	1.4	2.9	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.20	313.46	NA	
S-5	12/9/1993	120	NA	0.56	<0.5	2.2	1.2	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.26	313.40	NA	
S-5	3/4/1994	70	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.25	313.41	NA	
S-5	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	16.04	313.62	NA	
S-5	9/13/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	11.52	318.14	NA	
S-5	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	329.66	14.50	315.16	NA	
S-5	6/12/1996	<500	NA	6	<5.0	<5.0	<5.0	1,400	NA	NA	NA	NA	NA	NA	NA	329.66	12.53	317.13	NA	
S-5	6/25/1997	<250	NA	<2.5	<2.5	<2.5	<2.5	1,100	NA	NA	NA	NA	NA	NA	NA	329.66	15.34	314.32	NA	
S-5	6/19/1998	<50	NA	1	<0.50	<0.50	<0.50	61	NA	NA	NA	NA	NA	NA	NA	329.66	13.71	315.95	NA	
S-5	6/17/1999	<50.0	NA	1.44	<0.500	<0.500	<0.500	336	NA	NA	NA	NA	NA	NA	NA	329.66	13.56	316.10	NA	
S-5	6/15/2000	<50.0	NA	0.820	<0.500	<0.500	<0.500	221	NA	NA	NA	NA	NA	NA	NA	329.66	15.00	314.66	NA	
S-5	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	183	NA	NA	NA	NA	NA	NA	NA	329.66	16.29	313.37	NA	
S-5	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	7.55	NA	NA	NA	NA	NA	NA	NA	329.66	15.49	314.17	NA	
S-5	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	11	NA	NA	NA	NA	NA	NA	329.66	15.50	314.16	NA	
S-5	9/17/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	17	NA	NA	NA	NA	NA	NA	329.66	16.35	313.31	NA	
S-5	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	329.66	12.80	316.86	NA	
S-5	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	93	NA	NA	NA	NA	NA	NA	329.66	16.32	313.34	NA	
S-5	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	130	NA	NA	NA	NA	NA	NA	329.66	17.00	312.66	NA	
S-5	9/27/2002	<50	NA	0.88	<0.50	<0.50	<0.50	NA	280	NA	NA	NA	NA	NA	NA	329.36	16.34	313.02	NA	
S-5	12/27/2002	<50	NA	1.9	<0.50	<0.50	<0.50	NA	87	<2.0	<2.0	<2.0	<2.0	<2.0	NA	329.36	15.45	313.91	NA	
S-5	3/24/2003	<250	NA	2.5	<2.5	<2.5	<2.5	<5.0	NA	220	NA	NA	NA	NA	NA	329.36	16.70	312.66	NA	
S-5	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	110	NA	NA	NA	NA	NA	NA	329.36	13.16	316.20	NA	

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-5	7/8/2003	<1,000	NA	<10	<10	<10	<20	NA	320	NA	NA	NA	<100	NA	NA	329.36	19.00	310.36	NA	NA
S-5	10/15/2003	1,400 e	NA	27	<2.5	<2.5	<5.0	NA	180	NA	NA	NA	51	NA	NA	329.36	19.08	310.28	NA	NA
S-5	1/6/2004	84,000	NA	1,400	1,200	<25	17,000	NA	140	NA	NA	NA	<250	NA	NA	329.36	20.97	308.39	NA	NA
S-5	4/7/2004	20,000	NA	70	<25	230	290	NA	66	NA	NA	NA	<250	NA	NA	329.36	20.81	308.55	NA	NA
S-5	7/27/2004	9,900	NA	46	<25	74	<50	NA	43	<100	<100	<100	<250	NA	<2,500	329.36	20.93	308.46	0.04	NA
S-5	8/4/2004	22,000	NA	48	<10	63	38	NA	NA	NA	NA	NA	NA	NA	329.36	20.97	308.46	0.09	NA	
S-5	10/29/2004	14,000	NA	93	<25	96	94	NA	<25	<100	<100	<100	<250	NA	<2,500	329.36	18.59	310.77	NA	NA
S-5	1/6/2005	4,500	NA	32	<10	47	86	NA	<10	<40	<40	<40	<100	NA	NA	329.36	18.83	310.53	NA	NA
S-5	4/14/2005	1,700	NA	1.0	<0.50	8.4	16	NA	5.6	<0.50	<0.50	<0.50	8.1	NA	<5.0	329.36	15.03	314.33	NA	NA
S-5	7/29/2005	3,900	NA	8.9	<2.5	9.8	13	NA	21	<10	<10	<40	<200	NA	<1,000	329.36	19.71	309.65	NA	NA
S-5	10/20/2005	3,300	NA	27	<2.5	9.1	14	NA	6.0	<10	<10	<10	32	NA	<250	329.36	21.90	307.46	NA	NA
S-5	11/11/2005	2,300	NA	54	0.69	15	19	NA	8.3	NA	NA	NA	<5.0	NA	NA	329.36	22.17	307.19	NA	NA
S-5	1/26/2006	6,680	NA	43.6	4.93	38.2	89.1	NA	8.38	<0.500	<0.500	<0.500	<10.0	NA	<50.0	329.36	20.85	308.51	NA	NA
S-5	4/24/2006	1,930	NA	1.43	<0.500	<0.500	12.1	NA	2.76	<0.500	<0.500	<0.500	<10.0	NA	<50.0	329.36	14.40	314.96	NA	NA
S-5	7/12/2006	<50.0	NA	4.24	<0.500	25.8	44.8	NA	6.43	<0.500	<0.500	<0.500	35.3	NA	<50.0	329.36	15.50	313.86	NA	NA
S-5	10/20/2006	2,890	NA	17.5	0.760	55.1	106	NA	3.78	<0.500	<0.500	<0.500	<10.0	NA	<50.0	329.36	15.55	313.81	NA	NA
S-5	1/22/2007	1,600	NA	7.3	0.54	35	60	NA	0.73 i	<1.0	<1.0	<1.0	<10	NA	<150	329.36	15.74	313.62	NA	NA
S-5	4/13/2007	1,100 k	NA	4.6	0.47 m	18	25.9	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	329.36	15.69	313.67	NA	NA
S-5	7/9/2007	440 k	NA	3.0	0.29 m	13	19.7	NA	2.8	<2.0	<2.0	<2.0	<10	NA	<100	329.36	15.46	313.90	NA	NA
S-5	10/22/2007	6,300 k	NA	3.1	0.41 m	21	28.3	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	329.36	15.87	313.49	NA	NA
S-5	1/9/2008	590 k	NA	0.69	0.28 m	10	11.3	NA	0.71 m	<2.0	<2.0	<2.0	<10	NA	100	329.36	14.97	314.39	NA	NA
S-5	4/11/2008	470	NA	0.76	<1.0	5.4	4.7	NA	4.9	<2.0	<2.0	<2.0	18	NA	<100	329.36	16.38	312.98	NA	NA
S-5	7/29/2008	350	NA	1.1	<1.0	3.9	2.3	NA	4.4	<2.0	<2.0	<2.0	18	NA	<100	329.36	16.22	313.14	NA	NA
S-5	10/29/2008	630	NA	5.7	<1.0	4.5	2.9	NA	9.5	<2.0	<2.0	<2.0	23	NA	<100	329.36	17.50	311.86	NA	NA
S-5	1/21/2009	1,200	NA	14	<1.0	7.0	4.1	NA	22	<2.0	<2.0	<2.0	46	NA	<100	329.36	16.52	312.84	NA	NA
S-5	4/16/2009	280	NA	1.3	<1.0	2.7	1.4	NA	11	<2.0	<2.0	<2.0	35	NA	<100	329.36	15.95	313.41	NA	NA

S-5B	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	332.25	43.71	288.54	NA	NA
S-5B	11/11/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	2.5	NA	NA	NA	15	NA	NA	332.25	43.79	288.46	NA	NA
S-5B	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.63	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.25	38.21	294.04	NA	NA
S-5B	4/24/2006	<50.0	NA	0.540	1.18	<0.500	<0.500	NA	1.88	<0.500	<0.500	<0.500	12.2	NA	<50.0	332.25	30.68	301.57	NA	NA
S-5B	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.63	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.25	30.05	302.20	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-5B	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.04	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.25	31.60	300.65	NA	NA
S-5B	1/22/2007	<50	NA	0.33 i	0.36 i	0.27 i	<1.0	NA	0.90 i	<1.0	<1.0	<1.0	<10	NA	<150	332.25	27.79	304.46	NA	NA
S-5B	4/13/2007	<50 k	NA	0.30 m	0.28 m	<1.0	<1.0	NA	0.73 m	<2.0	<2.0	<2.0	<10	NA	79 m	332.25	24.78	307.47	NA	NA
S-5B	7/9/2007	<50 k	NA	0.37 m	<1.0	<1.0	<1.0	NA	0.49 m	<2.0	<2.0	<2.0	<10	NA	<100	332.25	31.12	301.13	NA	NA
S-5B	10/22/2007	66 k	NA	0.33 m	<1.0	<1.0	<1.0	NA	0.64 m	<2.0	<2.0	<2.0	5.7 m	NA	<100	332.25	29.64	302.61	NA	NA
S-5B	1/9/2008	<50 k	NA	0.29 m	<1.0	<1.0	<1.0	NA	0.46 m	<2.0	<2.0	<2.0	<10	NA	220	332.25	25.52	306.73	NA	NA
S-5B	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.25	25.32	306.93	NA	NA
S-5B	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	100	332.25	32.33	299.92	NA	NA
S-5B	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.25	34.51	297.74	NA	NA
S-5B	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	10	NA	<100	332.25	32.27	299.98	NA	NA
S-5B	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	14	NA	<100	332.25	29.30	302.95	NA	NA

S-5C	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	332.33	43.69	288.64	NA	NA
S-5C	11/11/2005	55	NA	<0.50	0.67	<0.50	<1.0	NA	0.87	NA	NA	NA	<5.0	NA	NA	332.33	43.65	288.68	NA	NA
S-5C	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.91	<0.500	<0.500	<0.500	41.2	NA	<50.0	332.33	38.11	294.22	NA	NA
S-5C	4/24/2006	<50.0	NA	0.740	<0.500	<0.500	<0.500	NA	1.93	<0.500	<0.500	<0.500	17.8	NA	<50.0	332.33	30.61	301.72	NA	NA
S-5C	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.42	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.33	30.07	302.26	NA	NA
S-5C	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	332.33	31.67	300.66	NA	NA
S-5C	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<1.0	<1.0	<1.0	<1.0	9.0 h,i	NA	<150	332.33	27.90	304.43	NA	NA
S-5C	4/13/2007	<50 k	NA	0.24 m	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	12	NA	<100	332.33	24.90	307.43	NA	NA
S-5C	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	5.5 m	NA	<100	332.33	31.22	301.11	NA	NA
S-5C	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	10	NA	<100	332.33	29.59	302.74	NA	NA
S-5C	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	8.8 m	NA	<100	332.33	25.51	306.82	NA	NA
S-5C	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.33	25.51	306.82	NA	NA
S-5C	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.33	32.48	299.85	NA	NA
S-5C	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.33	36.39	295.94	NA	NA
S-5C	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.33	32.20	300.13	NA	NA
S-5C	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	332.33	29.29	303.04	NA	NA

S-6	10/13/1988	1100	NA	13.0	1	42	33	NA											
S-6	1/31/1989	340	NA	3.8	<1	8	3	NA											
S-6	3/7/1989	190	NA	3.8	<1	7	3	NA											

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-6	6/26/1989	480	NA	15	<1	6	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-6	9/8/1989	270	NA	1.3	1	7	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-6	12/15/1989	320	NA	1.0	<0.5	2.6	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-6	3/6/1990	420	NA	3.1	<0.5	14	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-6	6/14/1990	370	NA	3.7	0.9	4.8	3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-6	10/2/1990	190	NA	6.6	1.6	1.9	2.8	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-6	12/18/1990	430	NA	10	0.7	1.6	1.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
S-6	3/20/1991	130a	NA	606	0.6	0.7	3	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	
S-6	6/26/1991	120a	NA	3.8	0.8	<0.5	1.7	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	
S-6	9/5/1991	60	NA	<0.5	0.8	<0.5	0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	
S-6	12/13/1991	150	NA	2.3	<0.5	<0.5	150	NA	NA	NA	NA	NA	NA	NA	NA	327.62	15.11	312.51	NA	
S-6	3/11/1992	<30	NA	<0.3	<0.3	<0.5	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	327.62	16.35	311.27	NA	
S-6	6/24/1992	170	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	16.51	311.11	NA	
S-6	9/17/1992	190	NA	<0.5	1.6	<0.5	1.2	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.33	313.29	NA	
S-6	12/11/1992	180	NA	<0.5	0.8	<0.5	0.7	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.48	313.14	NA	
S-6	2/4/1993	290	NA	<0.5	<0.5	<0.5	0.7	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	
S-6	6/3/1993	100	NA	1.2	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	NA	NA	NA	
S-6	9/15/1993	160	NA	1.4	<0.5	0.9	2	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.16	313.46	NA	
S-6	12/9/1993	130	NA	2.3	2.6	5.1	6.2	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.68	312.94	NA	
S-6	3/4/1994	220	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.42	313.20	NA	
S-6	6/16/1994	60	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.92	312.70	NA	
S-6	9/13/1994	<50	NA	<0.5	6	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	14.72	312.90	NA	
S-6	6/21/1995	270	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.62	13.86	313.76	NA	
S-6	6/12/1996	200	NA	2	<0.5	<0.5	<0.5	12	NA	NA	NA	NA	NA	NA	NA	327.62	13.90	313.72	NA	
S-6	6/25/1997	180	NA	<0.50	0.61	<0.50	0.77	28	NA	NA	NA	NA	NA	NA	NA	327.62	13.64	313.98	NA	
S-6 (D)	6/25/1997	130	NA	<0.50	<0.50	<0.50	<0.50	21	NA	NA	NA	NA	NA	NA	NA	327.62	13.64	313.98	NA	
S-6	6/19/1998	100	NA	7.6	<0.50	<0.50	<0.50	27	NA	NA	NA	NA	NA	NA	NA	327.62	13.81	313.81	NA	
S-6	6/17/1999	114	NA	4.14	<0.500	<0.500	<0.500	<0.500	19.9	NA	NA	NA	NA	NA	NA	327.62	14.21	313.41	NA	
S-6	6/15/2000	367	NA	17.5	<0.500	<0.500	<0.500	<0.500	1,050	NA	NA	NA	NA	NA	NA	327.62	14.51	313.11	NA	
S-6	11/29/2000	154	NA	0.754	16.4	<0.500	1.05	5,470	NA	NA	NA	NA	NA	NA	NA	327.62	14.32	313.30	NA	
S-6	3/7/2001	183	NA	0.971	25.1	0.636	0.996	6,830	NA	NA	NA	NA	NA	NA	NA	327.62	15.39	312.23	NA	
S-6	6/18/2001	<2,000	NA	<20	<20	<20	<20	NA	8,200	NA	NA	NA	NA	NA	NA	327.62	14.72	312.90	NA	

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-6	09/17/2001 c	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	5.7	<2.0	<2.0	<2.0	<50	NA	<500	327.62	16.69	310.93	NA	NA
S-6	12/31/2001	260	NA	<0.50	<0.50	<0.50	<0.50	NA	11,000	NA	NA	NA	NA	NA	NA	327.62	13.99	313.63	NA	NA
S-6	3/13/2002	440	NA	<2.5	<2.5	<2.5	<2.5	NA	930	NA	NA	NA	NA	NA	NA	327.62	15.10	312.52	NA	NA
S-6	6/18/2002	340	NA	<1.0	<1.0	<1.0	<1.0	NA	560	NA	NA	NA	NA	NA	NA	327.62	15.24	312.38	NA	NA
S-6	9/27/2002	<250	NA	<2.5	<2.5	<2.5	<2.5	NA	580	NA	NA	NA	NA	NA	NA	327.26	14.34	312.92	NA	NA
S-6	12/27/2002	<500	NA	<5.0	<5.0	<5.0	<5.0	NA	230	<5.0	<5.0	<5.0	10,000	<5.0	NA	327.26	14.30	312.96	NA	NA
S-6	3/24/2003	<5,000	NA	<50	<50	<50	<100	NA	<500	NA	NA	NA	NA	NA	NA	327.26	14.37	312.89	NA	NA
S-6	5/9/2003	<2,500	NA	<25	<25	<25	<50	NA	140	NA	NA	NA	12,000	NA	NA	327.26	14.25	313.01	NA	NA
S-6	7/8/2003	<2,500	NA	<25	<25	<25	<50	NA	100	NA	NA	NA	8,400	NA	NA	327.26	15.37	311.89	NA	NA
S-6	10/15/2003	<1,000	NA	<10	<10	<10	<20	NA	63	NA	NA	NA	10,000	NA	NA	327.26	17.69	309.57	NA	NA
S-6	1/6/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	27	NA	NA	NA	7,600	NA	NA	327.26	17.19	310.07	NA	NA
S-6	4/7/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	15	NA	NA	NA	2,900	NA	NA	327.26	16.72	310.54	NA	NA
S-6	7/27/2004	860 e	NA	<5.0	<5.0	<5.0	<10	NA	30	<20	<20	<20	5,700	NA	<500	327.26	16.90	310.36	NA	NA
S-6	10/29/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	14	<20	<20	<20	2,500	NA	<500	327.26	16.68	310.58	NA	NA
S-6	1/6/2005	<200	NA	<2.0	<2.0	<2.0	<4.0	NA	8.7	<8.0	<8.0	<8.0	1,200	NA	NA	327.26	16.75	310.51	NA	NA
S-6	4/14/2005	180	NA	<0.90	<0.90	<0.90	<0.90	NA	11	<0.90	<0.90	<0.90	2,300	NA	<9.0	327.26	15.30	311.96	NA	NA
S-6	7/29/2005	270 g	NA	<2.5	<2.5	<2.5	<5.0	NA	17	<10	<10	<10	2,300	NA	<250	327.26	16.77	310.49	NA	NA
S-6	10/20/2005	570	NA	<2.5	<2.5	<2.5	<5.0	NA	7.1	<10	<10	<10	1,200	NA	<250	327.26	17.30	309.96	NA	NA
S-6	1/26/2006	808	NA	<0.500	<0.500	<0.500	<0.500	NA	5.07	<0.500	<0.500	<0.500	473	NA	<50.0	327.26	17.00	310.26	NA	NA
S-6	4/24/2006	303	NA	<0.500	<0.500	<0.500	<0.500	NA	4.03	<0.500	<0.500	<0.500	212	NA	<50.0	327.26	15.42	311.84	NA	NA
S-6	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	13.3	<0.500	<0.500	<0.500	609	NA	<50.0	327.26	15.15	312.11	NA	NA
S-6	10/20/2006	850	NA	<0.500	<0.500	<0.500	<0.500	NA	26.4	<0.500	<0.500	<0.500	1,050	NA	<50.0	327.26	13.98	313.28	NA	NA
S-6	1/22/2007	620	NA	<2.0	<2.0	<2.0	<4.0	NA	30	<4.0	<4.0	<4.0	2,000	NA	<600	327.26	14.14	313.12	NA	NA
S-6	4/13/2007	490 k,l	NA	<2.5	<5.0	<5.0	<5.0	NA	21	<10	<10	<10	1,700	NA	<500	327.26	14.35	312.91	NA	NA
S-6	7/9/2007	830 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	29	<2.0	<2.0	<2.0	2,300	NA	<100	327.26	14.22	313.04	NA	NA
S-6	10/22/2007	810 k	NA	<2.5	<5.0	<5.0	<5.0	NA	26	<10	<10	<10	2,300	NA	<500	327.26	14.72	312.54	NA	NA
S-6	1/9/2008	220 k	NA	<2.5	<5.0	<5.0	<5.0	NA	15	<10	<10	<10	1,100	NA	<500	327.26	14.97	312.29	NA	NA
S-6	4/11/2008	590	NA	<0.50	<1.0	<1.0	<1.0	NA	13	<2.0	<2.0	<2.0	2,000	NA	<100	327.26	14.70	312.56	NA	NA
S-6	7/29/2008	1,100	NA	<2.5	<5.0	<5.0	<5.0	NA	15	<10	<10	<10	1,700	NA	<500	327.26	15.84	311.42	NA	NA
S-6	10/29/2008	1,000	NA	<2.5	<5.0	<5.0	<5.0	NA	14	<10	<10	<10	3,200	NA	<500	327.26	16.29	310.97	NA	NA
S-6	1/21/2009	600	NA	<2.5	<5.0	<5.0	<5.0	NA	8.1	<10	<10	<10	1,900	NA	<500	327.26	15.80	311.46	NA	NA
S-6	4/16/2009	840	NA	<2.5	<5.0	<5.0	<5.0	NA	13	<10	<10	<10	4,000	NA	<500	327.26	14.35	312.91	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-7	10/13/1988	<50	NA	0.6	1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	1/31/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	3/7/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	6/26/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	12/15/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	3/6/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	10/2/1990	<50	NA	<0.5	0.6	<0.5	0.9	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	12/18/1990	<50	NA	0.5	<0.5	<0.5	0.86	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	3/20/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	9/5/1991	<50	NA	<0.5	0.6	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	12/13/1991	<50	NA	<0.6	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	17.70	310.97	NA	NA
S-7	3/11/1992	<50	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	328.67	17.06	311.61	NA	NA
S-7	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	17.80	310.87	NA	NA
S-7	9/17/1992	<50	NA	0.6	0.6	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	17.00	311.67	NA	NA
S-7	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	17.35	311.32	NA	NA
S-7	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.67	16.65	312.02	NA	NA
S-7	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.67	NA	NA	NA	NA
S-7	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.67	16.83	311.84	NA	NA
S-7	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	328.67	15.88	312.79	NA	NA
S-7	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	328.67	16.22	312.45	NA	NA
S-7	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	328.67	16.12	312.55	NA	3
S-7	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	328.67	14.81	313.86	NA	2.6
S-7	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	328.67	15.91	312.76	NA	5.1
S-7	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	7.32	NA	NA	NA	NA	NA	NA	328.67	16.14	312.53	NA	2.0
S-7	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	328.67	16.89	311.78	NA	3.6
S-7	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	328.67	16.55	312.12	NA	2.1

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-7	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	2.5	NA	NA	NA	NA	NA	NA	328.67	16.30	312.37	NA	NA
S-7	09/17/2001 c	150	NA	<0.50	55	<0.50	<0.50	NA	8,300	NA	NA	NA	NA	NA	NA	328.67	14.23	314.44	NA	NA
S-7	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	328.67	16.28	312.39	NA	NA
S-7	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	5.9	NA	NA	NA	NA	NA	NA	328.67	17.41	311.26	NA	NA
S-7	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	12	NA	NA	NA	NA	NA	NA	328.67	17.63	311.04	NA	NA
S-7	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	10	NA	NA	NA	NA	NA	NA	328.41	16.96	311.45	NA	NA
S-7	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	22	<2.0	<2.0	<2.0	<50	4.1	NA	328.41	16.00	312.41	NA	NA
S-7	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	21	NA	NA	NA	NA	NA	NA	328.41	17.12	311.29	NA	NA
S-7	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	31	NA	NA	NA	7.3	NA	NA	328.41	16.14	312.27	NA	NA
S-7	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	36	NA	NA	NA	6.5	NA	NA	328.41	17.42	310.99	NA	NA
S-7	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	100	NA	NA	NA	<5.0	NA	NA	328.41	15.49	312.92	NA	NA
S-7	1/6/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	200	NA	NA	NA	20	NA	NA	328.41	18.93	309.48	NA	NA
S-7	4/7/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	380	NA	NA	NA	130	NA	NA	328.41	18.93	309.48	NA	NA
S-7	7/27/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	240	<10	<10	<10	45	NA	<250	328.41	18.91	309.50	NA	NA
S-7	10/29/2004	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	270	<10	<10	<10	52	NA	<250	328.41	18.65	309.76	NA	NA
S-7	1/6/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	160	<10	<10	<10	<25	NA	NA	328.41	18.52	309.89	NA	NA
S-7	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	230	<0.50	<0.50	<0.50	130	NA	<5.0	328.41	16.22	312.19	NA	NA
S-7	7/29/2005	<2,000	NA	<20	<20	<20	<40	NA	170	<80	<80	<80	<200	NA	<2,000	328.41	18.57	309.84	NA	NA
S-7	10/20/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	180	<4.0	<4.0	<4.0	32	NA	<100	328.41	19.25	309.16	NA	NA
S-7	1/26/2006	75.9	NA	<0.500	<0.500	<0.500	<0.500	NA	172	<0.500	<0.500	<0.500	65.1	NA	<50.0	328.41	19.05	309.36	NA	NA
S-7	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	199	<0.500	<0.500	<0.500	22.6	NA	<50.0	328.41	16.91	311.50	NA	NA
S-7	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	122	<0.500	<0.500	<0.500	<10.0	NA	<50.0	328.41	16.42	311.99	NA	NA
S-7	10/20/2006	176	NA	<0.500	<0.500	<0.500	0.720	NA	73.5	<0.500	<0.500	<0.500	<10.0	NA	<50.0	328.41	16.66	311.75	NA	NA
S-7	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	62	<1.0	<1.0	<1.0	6.2 h,i	NA	<150	328.41	17.24	311.17	NA	NA
S-7	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	6.5	<2.0	<2.0	<2.0	<10	NA	<100	328.41	17.05	311.36	NA	NA
S-7	7/9/2007	52 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	39	<2.0	<2.0	<2.0	<10	NA	<100	328.41	16.52	311.89	NA	NA
S-7	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	33	<2.0	<2.0	<2.0	<10	NA	<100	328.41	17.03	311.38	NA	NA
S-7	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	28	<2.0	<2.0	<2.0	<10	NA	<100	328.41	17.00	311.41	NA	NA
S-7	4/11/2008	370	NA	<0.50	<1.0	1.2	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	328.41	16.71	311.70	NA	NA
S-7	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	21	<2.0	<2.0	<2.0	<10	NA	<100	328.41	17.35	311.06	NA	NA
S-7	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	18	<2.0	<2.0	<2.0	<10	NA	<100	328.41	17.85	310.56	NA	NA
S-7	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	17	<2.0	<2.0	<2.0	<10	NA	<100	328.41	17.41	311.00	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-7	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	19	<2.0	<2.0	<2.0	<10	NA	<100	328.41	16.72	311.69	NA	NA
-----	-----------	-----	----	-------	------	------	------	----	----	------	------	------	-----	----	------	--------	-------	--------	----	----

S-8	3/7/1989	<50	NA	1.2	1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	6/26/1989	<50	NA	0.8	1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	12/14/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	3/5/1990	<50	NA	<0.5	0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	10/2/1990	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	12/18/1990	<50	NA	2.9	7.0	1.0	6.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-8	3/20/1991	<50a	NA	0.8	1.8	2.6	5.2	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	9/5/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.73	311.27	NA	NA
S-8	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.64	312.36	NA	NA
S-8	6/24/1992	<50	NA	1.4	1.9	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.77	311.23	NA	NA
S-8	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.37	311.63	NA	NA
S-8	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.94	312.06	NA	NA
S-8	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.91	312.09	NA	NA
S-8	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.16	313.08	NA	NA
S-8	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.11	312.89	NA	NA
S-8	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	327.00	14.20	312.80	NA	NA
S-8	6/25/1997	170	NA	<0.50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	327.00	14.42	312.58	NA	0.5
S-8	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	327.00	13.49	313.51	NA	2.2
S-8	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	327.00	14.07	312.93	NA	0.9
S-8	6/15/2000	Well inaccessible	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	6/21/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	21.0	NA	NA	NA	NA	NA	NA	327.00	14.43	312.57	NA	NA
S-8	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	9.46	NA	NA	NA	NA	NA	NA	327.00	14.44	312.56	NA	2.2
S-8	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	<0.500	4.21	NA	NA	NA	NA	NA	327.00	13.69	313.31	NA	2.1

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-8	6/18/2001	<50	NA	0.55	0.92	<0.50	0.51	NA	13	NA	NA	NA	NA	NA	NA	327.00	14.60	312.40	NA	NA
S-8	9/17/2001	Unable to sample	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	15.07	311.93	NA	NA
S-8	9/18/2001	Unable to sample	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	NA	NA	NA	NA
S-8	12/31/2001	<50	NA	1.1	1.4	<0.50	<0.50	NA	8.4	NA	NA	NA	NA	NA	NA	327.00	14.02	312.98	NA	NA
S-8	3/13/2002	Unable to sample	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	327.00	14.92	312.08	NA	NA
S-8	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	19	NA	NA	NA	NA	NA	NA	327.00	15.37	311.63	NA	NA
S-8	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	19	NA	NA	NA	NA	NA	NA	326.14	14.60	311.54	NA	NA
S-8	12/27/2002	Well inaccessible	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.14	NA	NA	NA	NA
S-8	1/7/2003	Well inaccessible	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.14	NA	NA	NA	NA
S-8	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	25	NA	NA	NA	NA	NA	NA	326.14	14.58	311.56	NA	NA
S-8	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	24	NA	NA	NA	<5.0	NA	NA	326.14	13.45	312.69	NA	NA
S-8	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	46	NA	NA	NA	<5.0	NA	NA	326.14	15.19	310.95	NA	NA
S-8	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	42	NA	NA	NA	<5.0	NA	NA	326.14	16.58	309.56	NA	NA
S-8	1/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	50	NA	NA	NA	<5.0	NA	NA	326.14	16.27	309.87	NA	NA
S-8	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	33	NA	NA	NA	<5.0	NA	NA	326.14	16.12	310.02	NA	NA
S-8	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	18	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	16.26	309.88	NA	NA
S-8	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	25	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	15.93	310.21	NA	NA
S-8	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	21	<2.0	<2.0	<2.0	<5.0	NA	NA	326.14	15.79	310.35	NA	NA
S-8	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	11	<0.50	<0.50	<0.50	<5.0	NA	<5.0	326.14	14.78	311.36	NA	NA
S-8	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	13	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	16.51	309.63	NA	NA
S-8	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	11	<2.0	<2.0	<2.0	<5.0	NA	<50	326.14	17.38	308.76	NA	NA
S-8	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	9.65	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	16.55	309.59	NA	NA
S-8	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	5.94	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	14.18	311.96	NA	NA
S-8	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	7.00	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	14.52	311.62	NA	NA
S-8	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	8.54	<0.500	<0.500	<0.500	<10.0	NA	<50.0	326.14	14.30	311.84	NA	NA
S-8	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	11	<1.0	<1.0	<1.0	<10	NA	<150	326.14	15.07	311.07	NA	NA
S-8	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	9.0	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.31	311.83	NA	NA
S-8	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	12	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.38	311.76	NA	NA
S-8	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	22	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.50	311.64	NA	NA
S-8	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	14	<2.0	<2.0	<2.0	<10	NA	180	326.14	13.88	312.26	NA	NA
S-8	4/11/2008	51	NA	<0.50	<1.0	<1.0	<1.0	NA	25	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.46	311.68	NA	NA
S-8	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	14	<2.0	<2.0	<2.0	<10	NA	<100	326.14	15.45	310.69	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-8	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	12	<2.0	<2.0	<2.0	<10	NA	<100	326.14	15.69	310.45	NA	NA
S-8	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	8.7	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.91	311.23	NA	NA
S-8	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	8.1	<2.0	<2.0	<2.0	<10	NA	<100	326.14	14.95	311.19	NA	NA
S-9	3/7/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	6/26/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	9/8/1989	<50	NA	1.7	2	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/15/1989	<50	NA	0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/6/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	10/2/1990	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/18/1990	<50	NA	20	27	7.1	35	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/7/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	6/26/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	9/8/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/15/1989	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/6/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	6/14/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/2/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	12/18/1990	<50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-9	3/20/1991	70a	NA	0.7	0.7	<0.5	1	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	6/26/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	9/5/1991	<50	NA	<0.5	0.8	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	18.18	310.06	NA	NA
S-9	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.37	310.87	NA	NA
S-9	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	18.45	309.79	NA	NA
S-9	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.88	310.36	NA	NA
S-9	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.34	310.90	NA	NA
S-9	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	NA	NA	NA	NA
S-9	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.42	310.82	NA	NA
S-9	12/9/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	16.89	311.35	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-9	3/4/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.22	311.02	NA	NA
S-9	6/16/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.46	310.78	NA	NA
S-9	9/13/1994	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.59	310.65	NA	NA
S-9	6/21/1995	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	328.24	17.03	311.21	NA	NA
S-9	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	328.24	16.76	311.48	NA	NA
S-9	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	2.8	NA	NA	NA	NA	NA	NA	NA	328.24	16.89	311.35	NA	1
S-9	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	7.1	NA	NA	NA	NA	NA	NA	NA	328.24	15.59	312.65	NA	3.8
S-9	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	15.3	NA	NA	NA	NA	NA	NA	NA	328.24	16.47	311.77	NA	1.9
S-9	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	57.2	NA	NA	NA	NA	NA	NA	NA	328.24	16.11	312.13	NA	1.1
S-9	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	76.5	NA	NA	NA	NA	NA	NA	NA	328.24	17.30	310.94	NA	1.1
S-9	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	84.9	NA	NA	NA	NA	NA	NA	NA	328.24	19.42	308.82	NA	1.1
S-9	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	86	NA	NA	NA	NA	NA	NA	328.24	17.22	311.02	NA	NA
S-9	9/17/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	130	NA	NA	NA	NA	NA	NA	328.24	17.66	310.58	NA	NA
S-9	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	120	NA	NA	NA	NA	NA	NA	328.24	17.65	310.59	NA	NA
S-9	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	130	NA	NA	NA	NA	NA	NA	328.24	17.75	310.49	NA	NA
S-9	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	160	NA	NA	NA	NA	NA	NA	328.24	19.59	308.65	NA	NA
S-9	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	180	NA	NA	NA	NA	NA	NA	327.85	17.65	310.20	NA	NA
S-9	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	180	<2.0	<2.0	<2.0	<50	2.8	NA	327.85	18.45	309.40	NA	NA
S-9	3/24/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	230	NA	NA	NA	NA	NA	NA	327.85	17.97	309.88	NA	NA
S-9	5/9/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	240	NA	NA	NA	<25	NA	NA	327.85	17.68	310.17	NA	NA
S-9	7/8/2003	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	250	NA	NA	NA	<25	NA	NA	327.85	17.65	310.20	NA	NA
S-9	10/15/2003	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	210	NA	NA	NA	<10	NA	NA	327.85	19.49	308.36	NA	NA
S-9	1/6/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	290	NA	NA	NA	<10	NA	NA	327.85	20.51	307.34	NA	NA
S-9	4/7/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	250	NA	NA	NA	<10	NA	NA	327.85	20.02	307.83	NA	NA
S-9	7/27/2004	<250	NA	<2.5	9.1	2.7	9.8	NA	270	<10	<10	<10	<25	NA	<250	327.85	19.89	307.96	NA	NA
S-9	10/29/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	240	<4.0	<4.0	<4.0	<10	NA	<100	327.85	19.17	308.68	NA	NA
S-9	1/6/2005	<250	NA	<2.5	<2.5	<2.5	<5.0	NA	340	<10	<10	<10	<25	NA	NA	327.85	19.65	308.20	NA	NA
S-9	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	250	<0.50	<0.50	<4.0	<5.0	NA	<5.0	327.85	17.38	310.47	NA	NA
S-9	7/29/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	250	<4.0	<4.0	<4.0	<10	NA	<100	327.85	20.09	307.76	NA	NA
S-9	10/20/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	200	<4.0	<4.0	<4.0	<10	NA	<100	327.85	21.89	305.96	NA	NA
S-9	11/11/2005	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	220	NA	NA	NA	25	NA	NA	327.85	20.41	307.44	NA	NA
S-9	1/26/2006	55.7	NA	<0.500	<0.500	<0.500	<0.500	NA	174	<0.500	<0.500	2.50	<10.0	NA	<50.0	327.85	20.56	307.29	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-9	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	202	<0.500	<0.500	2.29	<10.0	NA	<50.0	327.85	18.39	309.46	NA	NA
S-9	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	158.00	<0.500	<0.500	2.06	<10.0	NA	<50.0	327.85	18.60	309.25	NA	NA
S-9	10/20/2006	212	NA	<0.500	<0.500	<0.500	<0.500	NA	151	<0.500	<0.500	1.25	<10.0	NA	<50.0	327.85	18.75	309.10	NA	NA
S-9	1/22/2007	82 j	NA	<0.50	<0.50	<0.50	<1.0	NA	150	<1.0	<1.0	1.4	20 h	NA	<150	327.85	17.92	309.93	NA	NA
S-9	4/13/2007	70 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	140	<2.0	<2.0	1.0 m	26	NA	<100	327.85	18.14	309.71	NA	NA
S-9	7/9/2007	70 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	120	<2.0	<2.0	1.2 m	<10	NA	<100	327.85	18.37	309.48	NA	NA
S-9	10/22/2007	59 k,l	NA	<0.50	<1.0	<1.0	<1.0	NA	110	<2.0	<2.0	<2.0	8.2 m	NA	<100	327.85	18.08	309.77	NA	NA
S-9	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	73	<2.0	<2.0	<2.0	<10	NA	130	327.85	17.20	310.65	NA	NA
S-9	4/11/2008	73	NA	<0.50	<1.0	<1.0	<1.0	NA	55	<2.0	<2.0	<2.0	<10	NA	<100	327.85	17.74	310.11	NA	NA
S-9	7/29/2008	85	NA	<0.50	<1.0	<1.0	<1.0	NA	45	<2.0	<2.0	<2.0	<10	NA	230	327.85	18.33	309.52	NA	NA
S-9	10/29/2008	58	NA	<0.50	<1.0	<1.0	<1.0	NA	40	<2.0	<2.0	<2.0	<10	NA	<100	327.85	18.89	308.96	NA	NA
S-9	1/21/2009	51	NA	<0.50	<1.0	<1.0	<1.0	NA	35	<2.0	<2.0	<2.0	<10	NA	<100	327.85	18.21	309.64	NA	NA
S-9	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	27	<2.0	<2.0	<2.0	<10	NA	<100	327.85	17.48	310.37	NA	NA

S-9B	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	330.47	43.12	287.35	NA	NA
S-9B	11/11/2005	<50	NA	<0.50	2.0	<0.50	<1.0	NA	23	NA	NA	NA	<5.0	NA	NA	330.47	45.25	285.22	NA	NA
S-9B	1/26/2006	<50.0	NA	<0.500	1.68	<0.500	<0.500	NA	20.6	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	38.19	292.28	NA	NA
S-9B	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	10.5	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	30.31	300.16	NA	NA
S-9B	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	4.98	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	29.01	301.46	NA	NA
S-9B	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	5.89	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.47	31.25	299.22	NA	NA
S-9B	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	4.9	<1.0	<1.0	<1.0	<10	NA	<150	330.47	26.78	303.69	NA	NA
S-9B	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	3.5	<2.0	<2.0	<2.0	<10	NA	<100	330.47	23.51	306.96	NA	NA
S-9B	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	3.0	<2.0	<2.0	<2.0	<10	NA	<100	330.47	30.15	300.32	NA	NA
S-9B	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	5.8	<2.0	<2.0	<2.0	<10	NA	<100	330.47	28.44	302.03	NA	NA
S-9B	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	2.9	<2.0	<2.0	<2.0	<10	NA	190	330.47	24.22	306.25	NA	NA
S-9B	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	3.1	<2.0	<2.0	<2.0	<10	NA	<100	330.47	24.20	306.27	NA	NA
S-9B	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	4.1	<2.0	<2.0	<2.0	<10	NA	<100	330.47	31.69	298.78	NA	NA
S-9B	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	4.1	<2.0	<2.0	<2.0	<10	NA	<100	330.47	35.86	294.61	NA	NA
S-9B	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	3.7	<2.0	<2.0	<2.0	<10	NA	<100	330.47	31.31	299.16	NA	NA
S-9B	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	3.1	<2.0	<2.0	<2.0	<10	NA	<100	330.47	28.10	302.37	NA	NA

S-9C	11/8/2005	NA	330.77	40.80	289.97	NA	NA													
------	-----------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	--------	-------	--------	----	----

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-9C	11/11/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	10	NA	NA	NA	<5.0	NA	NA	330.77	42.87	287.90	NA	NA
S-9C	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	7.05	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	37.40	293.37	NA	NA
S-9C	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	4.86	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	28.04	302.73	NA	NA
S-9C	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	1.94	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	28.96	301.81	NA	NA
S-9C	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	1.06	<0.500	<0.500	<0.500	<10.0	NA	<50.0	330.77	30.47	300.30	NA	NA
S-9C	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.64 i	<1.0	<1.0	<1.0	<10	NA	<150	330.77	26.52	304.25	NA	NA
S-9C	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.54 m	<2.0	<2.0	<2.0	<10	NA	<100	330.77	23.70	307.07	NA	NA
S-9C	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.34 m	<2.0	<2.0	<2.0	<10	NA	<100	330.77	30.28	300.49	NA	NA
S-9C	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.33 m	<2.0	<2.0	<2.0	<10	NA	<100	330.77	17.03	313.74	NA	NA
S-9C	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	150	330.77	24.20	306.57	NA	NA
S-9C	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	330.77	24.25	306.52	NA	NA
S-9C	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	330.77	31.55	299.22	NA	NA
S-9C	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	330.77	35.54	295.23	NA	NA
S-9C	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	330.77	31.11	299.66	NA	NA
S-9C	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	330.77	28.29	302.48	NA	NA

S-10	8/11/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	9/8/1989	<50	NA	<0.5	<1	<1	<3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	12/15/1989	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	3/6/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	6/14/1990	<50	NA	<0.5	<0.5	<0.5	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	10/2/1990	<50	NA	<0.5	<0.5	<0.5	1.0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	12/18/1990	<50	NA	<0.5	<0.5	<0.5	1.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-10	3/20/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	6/26/1991	50	NA	1.8	5.8	1.9	13	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	9/5/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	NA
S-10	12/13/1991	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	14.77	311.78	NA	NA
S-10	3/11/1992	<30	NA	<0.3	<0.3	<0.3	<0.3	NA	NA	NA	NA	NA	NA	NA	NA	326.55	14.16	312.39	NA	NA
S-10	6/24/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	14.83	311.72	NA	NA
S-10	9/17/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.85	312.70	NA	NA
S-10	12/11/1992	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.90	312.65	NA	NA
S-10	2/4/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	<0.5	NA	326.55	NA	NA	NA	NA						

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-10	6/3/1993	<50	NA	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	
S-10	9/15/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.66	312.89	NA	
S-10	12/9/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	NA	NA	NA	
S-10	9/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.84	312.71	NA	
S-10	6/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	326.55	13.08	313.47	NA	
S-10	6/12/1996	<50	NA	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	NA	NA	326.55	13.34	313.21	NA	
S-10	6/25/1997	<50	NA	<0.50	<0.50	<0.50	<0.50	2.8	NA	NA	NA	NA	NA	NA	NA	326.55	13.28	313.27	NA	
S-10	6/19/1998	<50	NA	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	NA	NA	326.55	12.41	314.14	NA	
S-10	6/17/1999	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	NA	NA	326.55	12.81	313.74	NA	
S-10	6/15/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	326.55	13.27	313.28	NA	
S-10	11/29/2000	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	326.55	13.98	312.57	NA	
S-10	3/7/2001	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	NA	NA	326.55	13.40	313.15	NA	
S-10	6/18/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	3.7	NA	NA	NA	NA	NA	NA	326.55	13.29	313.26	NA	
S-10	9/17/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	13.61	312.94	NA	
S-10	12/31/2001	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	13.48	313.07	NA	
S-10	3/13/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	14.66	311.89	NA	
S-10	6/18/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	326.55	14.59	311.96	NA	
S-10	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	325.87	13.21	312.66	NA	
S-10	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<50	<2.0	NA	325.87	13.50	312.37	NA	
S-10	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	325.87	16.60	309.27	NA	
S-10	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.7	NA	NA	NA	<5.0	NA	NA	325.87	13.07	312.80	NA	
S-10	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.7	NA	NA	NA	<5.0	NA	NA	325.87	14.10	311.77	NA	
S-10	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.69	NA	NA	NA	<5.0	NA	NA	325.87	14.75	311.12	NA	
S-10	1/6/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.51	NA	NA	NA	<5.0	NA	NA	325.87	15.28	310.59	NA	
S-10	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	325.87	15.39	310.48	NA	
S-10	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.25	310.62	NA	
S-10	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.23	310.64	NA	
S-10	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	NA	325.87	15.47	310.40	NA	
S-10	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<0.50	<0.50	<0.50	<0.50	<5.0	NA	<5.0	325.87	13.24	312.63	NA	
S-10	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.08	310.79	NA	
S-10	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	<2.0	<2.0	<2.0	<5.0	NA	<50	325.87	15.45	310.42	NA	
S-10	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	14.85	311.02	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-10	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	13.90	311.97	NA	NA
S-10	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<1.50	NA	<0.500	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	13.00	312.87	NA	NA
S-10	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	325.87	13.15	312.72	NA	NA
S-10	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<1.0	<1.0	<1.0	<1.0	<1.0	<10	NA	<150	325.87	14.45	311.42	NA	NA
S-10	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	15.49	310.38	NA	NA
S-10	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.00	311.87	NA	NA
S-10	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.11	311.76	NA	NA
S-10	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.08	311.79	NA	NA
S-10	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.38	311.49	NA	NA
S-10	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	320	325.87	14.50	311.37	NA	NA
S-10	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.80	311.07	NA	NA
S-10	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	14.53	311.34	NA	NA
S-10	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<2.0	<10	NA	<100	325.87	13.92	311.95	NA	NA

S-11	9/23/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	16.93	NA	NA	NA		
S-11	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	NA	16.95	NA	NA	NA		
S-11	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<2.0	<50	<2.0	NA	327.48	16.40	311.08	NA	NA	
S-11	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	327.48	17.25	310.23	NA	NA	
S-11	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	0.54	NA	NA	NA	<5.0	NA	NA	327.48	16.37	311.11	NA	NA	
S-11	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.48	17.17	310.31	NA	NA	
S-11	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	327.48	18.01	309.47	NA	NA	
S-11	1/6/2004	<50	NA	<0.50	1.4	<0.50	<1.0	NA	1.1	NA	NA	NA	<5.0	NA	NA	NA	327.48	18.25	309.23	NA	NA	
S-11	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	1.4	NA	NA	NA	<5.0	NA	NA	327.48	18.48	309.00	NA	NA	
S-11	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	2.3	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	18.49	308.99	NA	NA	
S-11	10/29/2004	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	9.7	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	18.22	309.26	NA	NA	
S-11	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	15	<2.0	<2.0	<2.0	<5.0	NA	NA	327.48	18.07	309.41	NA	NA	
S-11	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	<0.50	NA	10	<0.50	<0.50	<0.50	<5.0	NA	<5.0	327.48	16.28	311.20	NA	NA	
S-11	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	19	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	17.98	309.50	NA	NA	
S-11	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	<1.0	NA	24	<2.0	<2.0	<2.0	<5.0	NA	<50	327.48	18.45	309.03	NA	NA	
S-11	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	27.7	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	18.50	308.98	NA	NA	
S-11	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	41.0	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	16.61	310.87	NA	NA	
S-11	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	<1.50	NA	33.3	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	16.44	311.04	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-11	10/20/2006	53.5	NA	<0.500	<0.500	<0.500	<0.500	NA	38.2	<0.500	<0.500	<0.500	<10.0	NA	<50.0	327.48	16.61	310.87	NA	NA
S-11	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	61	<1.0	<1.0	<1.0	6.1 h,i	NA	<150	327.48	17.27	310.21	NA	NA
S-11	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	60	<2.0	<2.0	<2.0	<10	NA	<100	327.48	6.88	320.60	NA	NA
S-11	7/9/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	59	<2.0	<2.0	<2.0	<10	NA	<100	327.48	16.84	310.64	NA	NA
S-11	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	60	<2.0	<2.0	<2.0	6.2 m	NA	<100	327.48	17.11	310.37	NA	NA
S-11	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	52	<2.0	<2.0	<2.0	<10	NA	<100	327.48	16.85	310.63	NA	NA
S-11	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	36	<2.0	<2.0	<2.0	<10	NA	<100	327.48	16.78	310.70	NA	NA
S-11	7/29/2008	58	NA	<0.50	<1.0	<1.0	<1.0	NA	31	<2.0	<2.0	<2.0	<10	NA	<100	327.48	17.31	310.17	NA	NA
S-11	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	22	<2.0	<2.0	<2.0	<10	NA	<100	327.48	17.85	309.63	NA	NA
S-11	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	20	<2.0	<2.0	<2.0	<10	NA	<100	327.48	17.66	309.82	NA	NA
S-11	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	20	<2.0	<2.0	<2.0	<10	NA	<100	327.48	16.93	310.55	NA	NA

S-12	9/23/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	14.74	NA	NA	NA	
S-12	9/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	NA	NA	NA	17.95	NA	NA	NA	
S-12	12/27/2002	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	<5.0	<2.0	<2.0	<2.0	<50	<2.0	NA	322.76	16.92	305.84	NA	NA	
S-12	3/24/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	<5.0	NA	NA	NA	NA	NA	NA	322.76	16.53	306.23	NA	NA	
S-12	5/9/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.5	NA	NA	NA	<5.0	NA	NA	322.76	17.73	305.03	NA	NA	
S-12	7/8/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.2	NA	NA	NA	<5.0	NA	NA	322.76	17.18	305.58	NA	NA	
S-12	10/15/2003	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	1.1	NA	NA	NA	<5.0	NA	NA	322.76	17.54	305.22	NA	NA	
S-12	1/6/2004	<50	NA	<0.50	1.1	<0.50	<1.0	NA	1.1	NA	NA	NA	<5.0	NA	NA	322.76	17.45	305.31	NA	NA	
S-12	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.76	NA	NA	NA	<5.0	NA	NA	322.76	16.85	305.91	NA	NA	
S-12	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.65	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	17.89	304.87	NA	NA	
S-12	10/29/2004	<50 f	NA	<0.50	<0.50	<0.50	<1.0	NA	1.3	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	17.84	304.92	NA	NA	
S-12	1/6/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	322.76	NA	NA	NA	NA	
S-12	4/14/2005	<50	NA	<0.50	<0.50	<0.50	<0.50	NA	0.79	<0.50	<0.50	<0.50	<5.0	NA	<5.0	322.76	15.98	306.78	NA	NA	
S-12	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.69	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	17.32	305.44	NA	NA	
S-12	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.66	<2.0	<2.0	<2.0	<5.0	NA	<50	322.76	16.58	306.18	NA	NA	
S-12	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	15.94	306.82	NA	NA	
S-12	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	0.740	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	17.31	305.45	NA	NA	
S-12	7/12/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<1.50	NA	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	16.70	306.06	NA	NA	
S-12	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	<0.500	NA	0.520	<0.500	<0.500	<0.500	<10.0	NA	<50.0	322.76	17.63	305.13	NA	NA
S-12	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	0.70 i	<1.0	<1.0	<1.0	<10	NA	<150	322.76	17.05	305.71	NA	NA	

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-12	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.70 m	<2.0	<2.0	<2.0	<10	NA	<100	322.76	17.12	305.64	NA	NA
S-12	7/9/2007	51 k,I	NA	<0.50	<1.0	<1.0	<1.0	NA	0.59 m	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.85	305.91	NA	NA
S-12	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.92	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.40	306.36	NA	NA
S-12	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	0.67 m	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.50	306.26	NA	NA
S-12	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.30	306.46	NA	NA
S-12	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	140	322.76	17.00	305.76	NA	NA
S-12	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	322.76	17.61	305.15	NA	NA
S-12	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	322.76	17.59	305.17	NA	NA
S-12	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	322.76	16.74	306.02	NA	NA
S-14	11/8/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	17.45	307.45	NA	NA
S-14	11/11/2005	<50 f	NA	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	<5.0	NA	NA	324.90	17.63	307.27	NA	NA
S-14	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	324.90	15.56	309.34	NA	NA
S-14	7/12/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	16.77	308.13	NA	NA
S-14	10/20/2006	<50.0	NA	0.560	1.08	<0.500	0.630	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	324.90	17.26	307.64	NA	NA
S-14	1/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	17.54	307.36	NA	NA
S-14	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	324.90	17.10	307.80	NA	NA
S-14	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	324.90	17.56	307.34	NA	NA
S-14	1/9/2008	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	NA	NA	NA	NA
S-14	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	324.90	17.23	307.67	NA	NA
S-14	7/29/2008	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	324.90	18.30	306.60	NA	NA
S-14	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	324.90	18.62	306.28	NA	NA
S-14	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	324.90	17.40	307.50	NA	NA
S-15	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	NA	24.00	NA	NA	NA
S-15	7/12/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	23.85	NA	NA	NA
S-15	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	NA	23.87	NA	NA	NA
S-15	1/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	26.03	NA	NA	NA
S-15	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	NA	24.29	NA	NA	NA
S-15	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	NA	24.34	NA	NA	NA
S-15	1/9/2008	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-15	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	NA	<100	NA	23.90	NA	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-15	7/29/2008	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	23.91	NA	NA	NA
S-15	10/29/2008	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	24.02	NA	NA	NA
S-15	4/16/2009	Insufficient water	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	24.42	NA	NA	NA
SR-1	10/11/1989	200	NA	100	<1	<10	10	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	12/14/1989	500	NA	210	<0.5	16	16	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	3/5/1990	64	NA	20	<0.5	1.5	4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	6/14/1990	60	NA	17	<0.5	1.9	1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	10/2/1990	<50	NA	5.0	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	12/18/1990	<50	NA	28	5.5	4.5	4.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-1	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.78	16.34	313.44	NA	NA
SR-1	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.78	16.72	313.06	NA	NA
SR-1	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.78	15.31	314.47	NA	NA
SR-1	03/11/2002 d	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.13	NA	NA	NA	NA
SR-1	09/22/2003 d	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.33	NA	NA	NA	NA
SR-1	4/7/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.33	30.79	297.54	NA	NA
SR-1	7/27/2004	<500	NA	<5.0	<5.0	<5.0	11	NA	44	<20	<20	<20	3,000	NA	<500	328.33	30.72	297.61	NA	NA
SR-1	8/4/2004	62	NA	<0.50	<0.50	2.6	13	NA	NA	NA	NA	NA	NA	NA	NA	328.33	30.77	297.56	NA	NA
SR-1	10/29/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	11	<20	<20	<20	1,400	NA	<500	328.33	30.85	297.48	NA	NA
SR-1	1/6/2005	<250	NA	<2.5	<2.5	6.8	31	NA	20	<10	<10	<10	2,800	NA	NA	328.33	30.92	297.41	NA	NA
SR-1	4/14/2005	170	NA	12	<0.90	11	1.5	NA	190	<0.90	<0.90	<0.90	2,200	NA	<9.0	328.33	30.73	297.60	NA	NA
SR-1	7/29/2005	<100	NA	<1.0	<1.0	<1.0	3.7	NA	7.6	<4.0	<4.0	<4.0	1,500	NA	<100	328.33	24.53	303.80	NA	NA
SR-1	10/20/2005	190	NA	<1.0	<1.0	5.4	35	NA	4.3	<4.0	<4.0	<4.0	1,200	NA	<100	328.33	31.00	297.33	NA	NA
SR-1	1/26/2006	<50.0	NA	4.65	<0.500	1.79	18.8	NA	4.25	<0.500	<0.500	<0.500	556	NA	<50.0	328.33	30.89	297.44	NA	NA
SR-1	4/24/2006	<50.0	NA	2.76	<0.500	1.36	<0.500	NA	42.8	<0.500	<0.500	<0.500	180	NA	<50.0	328.33	14.94	313.39	NA	NA
SR-1	7/12/2006	<50.0	NA	0.950	<0.500	<0.500	<1.50	NA	3.24	<0.500	<0.500	<0.500	171	NA	<50.0	328.33	14.71	313.62	NA	NA
SR-1	10/20/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	<0.500	<0.500	<0.500	<0.500	<10.0	NA	<50.0	328.33	15.84	312.49	NA	NA
SR-1	1/22/2007	<50	NA	0.48 i	<0.50	0.60	<1.0	NA	0.70 i	<1.0	<1.0	<1.0	46	NA	<150	328.33	15.25	313.08	NA	NA
SR-1	4/13/2007	61 k	NA	0.43 m	<1.0	0.26 m	<1.0	NA	9.4	<2.0	<2.0	<2.0	62	NA	<100	328.33	14.78	313.55	NA	NA
SR-1	7/9/2007	<50 k	NA	0.44 m	<1.0	0.69 m	<1.0	NA	3.5	<2.0	<2.0	<2.0	19	NA	<100	328.33	14.44	313.89	NA	NA
SR-1	10/22/2007	<50 k	NA	<0.50	<1.0	0.56 m	<1.0	NA	9.6	<2.0	<2.0	<2.0	31	NA	<100	328.33	15.31	313.02	NA	NA
SR-1	1/9/2008	53 k	NA	<0.50	<1.0	3.5	2.6	NA	5.6	<2.0	<2.0	<2.0	12	NA	<100	328.33	14.39	313.94	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)	
SR-1	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	4.7	<2.0	<2.0	<2.0	16	NA	<100	328.33	15.00	313.33	NA	NA	
SR-1	7/29/2008	100	NA	<0.50	<1.0	1.7	<1.0	NA	4.4	<2.0	<2.0	<2.0	23	NA	<100	328.33	15.70	312.63	NA	NA	
SR-1	10/29/2008	54	NA	<0.50	<1.0	<1.0	<1.0	NA	8.3	<2.0	<2.0	<2.0	61	NA	<100	328.33	16.05	312.28	NA	NA	
SR-1	1/21/2009	68	NA	<0.50	<1.0	<1.0	<1.0	NA	26	<2.0	<2.0	<2.0	310	NA	<100	328.33	15.02	313.31	NA	NA	
SR-1	4/16/2009	62	NA	<0.50	<1.0	<1.0	<1.0	NA	8.0	<2.0	<2.0	<2.0	38	NA	<100	328.33	14.69	313.64	NA	NA	
SR-2	10/11/1989	880	NA	<10	1.0	29	33	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
SR-2	12/14/1989	1100	NA	17	<0.5	100	67	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
SR-2	3/5/1990	140	NA	3.0	<0.5	12	7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
SR-2	6/14/1990	<50	NA	<0.5	<0.5	2.6	<1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
SR-2	10/2/1990	<50	NA	<0.5	<0.5	0.5	<0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
SR-2	12/18/1990	<50	NA	1.6	1.4	1.6	2.7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
SR-2	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.35	14.39	313.96	NA	NA	
SR-2	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.35	14.48	313.87	NA	NA	
SR-2	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	328.35	13.62	314.73	NA	NA	
SR-2	9/27/2002	<1,000	NA	<10	<10	<10	<10	NA	5,000	NA	NA	NA	NA	NA	NA	327.91	14.20	313.71	NA	NA	
SR-2	12/27/2002	<1,000	NA	<10	<10	<10	<10	NA	4,800	<10	<10	<10	1,600	<10	NA	327.91	13.33	314.58	<10	NA	
SR-2	3/24/2003	<5,000	NA	<50	<50	<50	<100	NA	10,000	NA	NA	NA	NA	NA	NA	327.91	13.75	314.16	NA	NA	
SR-2	5/9/2003	<5,000	NA	<50	<50	80	290	NA	13,000	NA	NA	NA	6,100	NA	NA	327.91	13.40	314.51	NA	NA	
SR-2	7/8/2003	<5,000	NA	<50	<50	<50	<100	NA	12,000	NA	NA	NA	4,800	NA	NA	327.31	30.48	296.83	NA	NA	
SR-2	10/15/2003	<500	NA	<5.0	<5.0	<5.0	20	NA	1,200	NA	NA	NA	9,800	NA	NA	327.31	15.38	311.93	NA	NA	
SR-2	1/6/2004	<1,300	NA	<13	<13	<13	<25	NA	500	NA	NA	NA	17,000	NA	NA	327.31	31.47	295.84	NA	NA	
SR-2	4/7/2004	<1,300	NA	<13	<13	<13	<25	NA	280	NA	NA	NA	10,000	NA	NA	327.31	31.54	295.77	NA	NA	
SR-2	7/27/2004	<1,300	NA	<13	<13	<13	<25	NA	63	<50	<50	<50	9,500	NA	<1,300	327.31	31.35	295.96	NA	NA	
SR-2	10/29/2004	<1,300	NA	<13	<13	<13	<25	NA	47	<50	<50	<50	7,600	NA	<1,300	327.31	30.50	296.81	NA	NA	
SR-2	1/6/2005	<1,300	NA	<13	<13	<13	<25	NA	23	<50	<50	<50	6,000	NA	NA	327.31	31.38	295.93	NA	NA	
SR-2	4/14/2005	<150	NA	<1.5	<1.5	<1.5	1.7	NA	27	<1.5	<1.5	<1.5	6,300	NA	<15	327.31	31.28	296.03	NA	NA	
SR-2	7/29/2005	<500	NA	<5.0	<5.0	<5.0	<10	NA	14	<20	<20	<20	5,400	NA	<500	327.31	22.71	304.60	NA	NA	
SR-2	10/20/2005	<500	NA	<5.0	<5.0	<5.0	<10	NA	<5.0	<20	<20	<20	3,600	NA	<500	327.31	31.31	296.00	NA	NA	
SR-2	1/26/2006	<50.0	NA	<0.500	<0.500	1.56	7.72	NA	6.37	<0.500	<0.500	<0.500	1,620	NA	<50.0	327.31	31.60	295.71	NA	NA	
SR-2	4/24/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	13.1	<0.500	<0.500	<0.500	544	NA	<50.0	327.31	12.86	314.45	NA	NA	
SR-2	7/12/2006	<50.0	NA	0.950	<0.500	<0.500	<0.500	<1.50	NA	3.00	<0.500	<0.500	<0.500	941	NA	<50.0	327.31	12.65	314.66	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

SR-2	10/20/2006	96.0	NA	<0.500	<0.500	<0.500	<0.500	NA	9.56	<0.500	<0.500	<0.500	881	NA	<50.0	327.31	14.10	313.21	NA	NA
SR-2	1/22/2007	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	2.8	<1.0	<1.0	<1.0	1,100	NA	<150	327.31	13.47	313.84	NA	NA
SR-2	4/13/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	6.9	<2.0	<2.0	<2.0	520	NA	<100	327.31	12.89	314.42	NA	NA
SR-2	7/9/2007	58 k,l	NA	0.14 m	<1.0	<1.0	<1.0	NA	21	<2.0	<2.0	<2.0	720	NA	<100	327.31	12.03	315.28	NA	NA
SR-2	10/22/2007	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	2.0	<2.0	<2.0	<2.0	69	NA	<100	327.31	13.51	313.80	NA	NA
SR-2	1/9/2008	<50 k	NA	0.17 M	<1.0	<1.0	<1.0	NA	8.7	<2.0	<2.0	<2.0	100	NA	<100	327.31	13.63	313.68	NA	NA
SR-2	4/11/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	8.3	<2.0	<2.0	<2.0	280	NA	<100	327.31	13.21	314.10	NA	NA
SR-2	7/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	1.2	<2.0	<2.0	<2.0	22	NA	<100	327.31	14.81	312.50	NA	NA
SR-2	10/29/2008	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	1.6	<2.0	<2.0	<2.0	21	NA	<100	327.31	15.10	312.21	NA	NA
SR-2	1/21/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	1.6	<2.0	<2.0	<2.0	70	NA	<100	327.31	12.79	314.52	NA	NA
SR-2	4/16/2009	<50	NA	<0.50	<1.0	<1.0	<1.0	NA	2.3	<2.0	<2.0	<2.0	73	NA	<100	327.31	12.64	314.67	NA	NA

SR-3	12/11/1989	500	NA	92	10	43	100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	12/14/1989	2,400	NA	310	27	170	340	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	3/5/1990	70	NA	15	0.8	5.8	10	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	6/14/1990	470	NA	59	2.3	35	50	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	10/2/1990	1,700	NA	91	6.2	7.0	100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	12/18/1990	140	NA	10	0.8	7.5	14	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
SR-3	3/4/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.11	14.66	314.45	NA	NA
SR-3	6/16/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.11	14.96	314.15	NA	NA
SR-3	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	329.11	13.60	315.51	NA	NA
SR-3	9/27/2002	<2,500	NA	<25	<25	<25	<25	NA	11,000	NA	NA	NA	NA	NA	NA	328.65	14.75	313.90	NA	NA
SR-3	12/27/2002	<2,000	NA	<20	<20	<20	<20	NA	5,100	<20	<20	<20	4,600	<20	NA	328.65	13.65	315.00	NA	NA
SR-3	3/24/2003	<2,500	NA	<25	<25	<25	<50	NA	3,700	NA	NA	NA	NA	NA	NA	328.65	13.52	315.13	NA	NA
SR-3	5/9/2003	<1,000	NA	15	<10	19	48	NA	3,700	NA	NA	NA	8,400	NA	NA	328.65	12.15	316.50	NA	NA
SR-3	7/8/2003	<1,000	NA	<10	<10	<10	<20	NA	2,800	NA	NA	NA	8,300	NA	NA	327.50	30.00	297.50	NA	NA
SR-3	10/15/2003	310	NA	3.2	<2.5	9.1	30	NA	240	NA	NA	NA	3,600	NA	NA	327.50	15.39	312.11	NA	NA
SR-3	1/6/2004	<500	NA	<5.0	<5.0	<5.0	<10	NA	26	NA	NA	NA	3,300	NA	NA	327.50	30.29	297.21	NA	NA
SR-3	4/7/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	4.4	NA	NA	NA	370	NA	NA	327.50	15.49	312.01	NA	NA
SR-3	7/27/2004	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	9.0	<2.0	<2.0	<2.0	390	NA	<50	327.50	15.34	312.16	NA	NA
SR-3	10/29/2004	<100	NA	<1.0	<1.0	<1.0	<2.0	NA	15	<4.0	<4.0	<4.0	780	NA	<100	327.50	15.22	312.28	NA	NA
SR-3	1/6/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	6.3	<2.0	<2.0	<2.0	250	NA	NA	327.50	15.08	312.42	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

SR-3	4/14/2005	58	NA	0.76	<0.50	1.5	<0.50	NA	46	<0.50	<0.50	<0.50	2,200	NA	<5.0	327.50	30.53	296.97	NA	NA
SR-3	7/29/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	6.7	<2.0	<2.0	<2.0	490	NA	<50	327.50	21.81	305.69	NA	NA
SR-3	10/20/2005	<50	NA	<0.50	<0.50	<0.50	<1.0	NA	3.3	<2.0	<2.0	<2.0	76	NA	<50	327.50	29.19	298.31	NA	NA
SR-3	1/26/2006	<50.0	NA	<0.500	<0.500	<0.500	<0.500	NA	3.34	<0.500	<0.500	<0.500	84.9	NA	<50.0	327.50	31.00	296.50	NA	NA
SR-3	4/24/2006	<50.0	NA	1.67	<0.500	0.640	<0.500	NA	36.4	<0.500	<0.500	<0.500	315	NA	<50.0	327.50	12.42	315.08	NA	NA
SR-3	7/12/2006	<50.0	NA	0.950	<0.500	<0.500	<1.50	NA	9.73	<0.500	<0.500	<0.500	724	NA	<50.0	327.50	12.75	314.75	NA	NA
SR-3	10/20/2006	73.3	NA	<0.500	<0.500	<0.500	<0.500	NA	5.64	<0.500	<0.500	<0.500	847	NA	<50.0	327.50	13.93	313.57	NA	NA
SR-3	1/22/2007	56	NA	<2.0	<2.0	<2.0	<4.0	NA	5.6	<4.0	<4.0	<4.0	1,300	NA	<600	327.50	13.31	314.19	NA	NA
SR-3	4/13/2007	66 k,l	NA	<5.0	<10	<10	<10	NA	16	<20	<20	<20	2,400	NA	<1,000	327.50	13.61	313.89	NA	NA
SR-3	7/9/2007	150 k,l	NA	0.97	<1.0	0.33 m	<1.0	NA	19	<2.0	<2.0	<2.0	1,300	NA	<100	327.50	11.87	315.63	NA	NA
SR-3	10/22/2007	51 k	NA	<0.50	<1.0	<1.0	<1.0	NA	8.3	<2.0	<2.0	<2.0	950	NA	<100	327.50	13.40	314.10	NA	NA
SR-3	1/9/2008	<50 k	NA	<0.50	<1.0	<1.0	<1.0	NA	5.2	<2.0	<2.0	<2.0	610	NA	<100	327.50	13.61	313.89	NA	NA
SR-3	4/11/2008	66	NA	<0.50	<1.0	<1.0	<1.0	NA	9.3	<2.0	<2.0	<2.0	830	NA	<100	327.50	14.11	313.39	NA	NA
SR-3	7/29/2008	60	NA	<0.50	<1.0	<1.0	<1.0	NA	7.1	<2.0	<2.0	<2.0	570	NA	<100	327.50	14.85	312.65	NA	NA
SR-3	10/29/2008	52	NA	<0.50	<1.0	<1.0	<1.0	NA	4.6	<2.0	<2.0	<2.0	390	NA	<100	327.50	14.94	312.56	NA	NA
SR-3	1/21/2009	320	NA	4.0	<1.0	1.8	<1.0	NA	11	<2.0	<2.0	<2.0	760	NA	<100	327.50	12.47	315.03	NA	NA
SR-3	4/16/2009	80	NA	0.59	<1.0	<1.0	<1.0	NA	5.8	<2.0	<2.0	<2.0	320	NA	<100	327.50	12.49	315.01	NA	NA

T-1	6/18/2002	<5,000	NA	<50	<50	<50	<50	NA	20,000	NA	NA	NA	NA	NA	NA	12.31	NA	NA	NA	
T-2	9/17/2001	<5,000	NA	<25	<25	<25	<25	NA	29,000	NA	NA	NA	NA	NA	NA	11.48	NA	NA	NA	
T-2	12/31/2001	<5,000	NA	<50	<50	<50	<50	NA	31,000	NA	NA	NA	NA	NA	NA	4.96	NA	NA	NA	
T-2	3/13/2002	<5,000	NA	<50	<50	<50	<50	NA	48,000	NA	NA	NA	NA	NA	NA	9.76	NA	NA	NA	
T-2	6/18/2002	<20,000	NA	<200	<200	<200	<200	NA	100,000	NA	NA	NA	NA	NA	NA	12.58	NA	NA	NA	
T-2	9/27/2002	240	NA	0.55	2.8	1.8	2.6	NA	39	NA	NA	NA	NA	NA	NA	8.15	NA	NA	NA	
T-2	12/27/2002	2,100	NA	7.8	17	<0.50	11	NA	790	<2.0	<2.0	2.7	1,200	<2.0	NA	NA	6.75	NA	NA	NA
T-2	3/24/2003	550	NA	<2.5	<2.5	<2.5	<5.0	NA	310	NA	NA	NA	NA	NA	NA	11.68	NA	NA	NA	
T-2	5/9/2003	220	NA	0.66	0.55	<0.50	1.8	NA	100	NA	NA	NA	92	NA	NA	NA	6.40	NA	NA	NA
T-2	7/8/2003	<500	NA	13	7.4	<5.0	22	NA	990	NA	NA	NA	120	NA	NA	NA	8.16	NA	NA	NA
T-2	10/15/2003	220 e	NA	<0.50	<0.50	<0.50	<1.0	NA	13	NA	NA	NA	23	NA	NA	NA	11.15	NA	NA	NA
T-2	1/6/2004	710	NA	<0.50	<0.50	<0.50	1.2	NA	14	NA	NA	NA	9.2	NA	NA	NA	9.10	NA	NA	NA
T-2	4/7/2004	570 e	NA	5.4	<0.50	<0.50	1.2	NA	5.6	NA	NA	NA	11	NA	NA	NA	10.54	NA	NA	NA
T-2	7/27/2004	270	NA	17	1.2	<0.50	2.0	NA	2.9	<2.0	<2.0	<2.0	7.9	NA	<50	NA	9.89	NA	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
T-2	10/29/2004	180	NA	<0.50	<0.50	<0.50	<1.0	NA	4.2	<2.0	<2.0	<2.0	23	NA	<50	NA	9.42	NA	NA	NA
T-2	1/6/2005	1,100	NA	0.83	<0.50	<0.50	3.5	NA	3.0	<2.0	<2.0	<2.0	12	NA	NA	NA	7.98	NA	NA	NA
T-3	6/18/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	Dry	NA	NA	NA
T-4	6/18/2002	<10,000	NA	<100	<100	<100	<200	NA	97,000	NA	NA	NA	NA	NA	NA	NA	13.50	NA	NA	NA
T-4	12/27/2002	550	NA	5.3	16	0.60	39	NA	140	<2.0	<2.0	<2.0	120	<2.0	NA	NA	7.65	NA	NA	NA
T-4	3/24/2003	1,400	NA	<0.50	1.0	1.2	3.6	NA	15	NA	NA	NA	NA	NA	NA	NA	12.88	NA	NA	NA
T-4	5/9/2003	<50	NA	<0.50	<0.50	<0.50	1.6	NA	14	NA	NA	NA	5.2	NA	NA	NA	7.59	NA	NA	NA
T-4	7/8/2003	730	NA	26	8.9	10	19	NA	1,000	NA	NA	NA	150	NA	NA	NA	9.33	NA	NA	NA
T-4	10/15/2003	1,200	NA	15	6.1	2.8	11	NA	310	NA	NA	NA	980	NA	NA	NA	11.80	NA	NA	NA
T-4	1/6/2004	68	NA	1.1	<0.50	<0.50	<1.0	NA	12	NA	NA	NA	<5.0	NA	NA	NA	9.78	NA	NA	NA
T-4	4/7/2004	1,600	NA	5.1	0.57	<0.50	2.3	NA	6.1	NA	NA	NA	<5.0	NA	NA	NA	11.15	NA	NA	NA
T-4	7/27/2004	590	NA	5.3	0.83	0.52	2.2	NA	4.8	<2.0	<2.0	<2.0	7.5	NA	<50	NA	10.93	NA	NA	NA
T-4	10/29/2004	83	NA	<0.50	<0.50	<0.50	<1.0	NA	1.2	<2.0	<2.0	<2.0	<5.0	NA	<50	NA	10.06	NA	NA	NA
T-4	1/6/2005	430 g	NA	<0.50	<0.50	<0.50	<1.0	NA	9.6	<2.0	<2.0	<2.0	<5.0	NA	NA	NA	8.69	NA	NA	NA
C-1	5/9/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.50	302.83	NA	NA
C-1	7/8/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.50	302.83	NA	NA
C-1	10/15/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.52	302.81	NA	NA
C-1	1/6/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.21	303.12	NA	NA
C-1	4/7/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.54	302.79	NA	NA
C-1	7/27/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.58	302.75	NA	NA
C-1	10/29/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.58	302.75	NA	NA
C-1	1/6/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.55	302.78	NA	NA
C-1	4/14/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.55	302.78	NA	NA
C-1	7/29/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	28.54	302.79	NA	NA
C-1	10/20/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	31.11	300.22	NA	NA
C-1	1/26/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	31.15	300.18	NA	NA
C-1	4/24/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	32.07	299.26	NA	NA
C-1	7/12/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	29.30	302.03	NA	NA
C-1	10/20/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	331.33	31.64	299.69	NA	NA

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

C-1	1/22/2007	NA	331.33	30.03	301.30	NA	NA													
C-1	4/13/2007	NA	331.33	30.21	301.12	NA	NA													
C-1	7/9/2007	NA	331.33	33.38	297.95	NA	NA													
C-1	10/22/2007	NA	331.33	33.18	298.15	NA	NA													
C-1	1/9/2008	NA	331.33	28.21	303.12	NA	NA													
C-1	4/11/2008	NA	331.33	33.52	297.81	NA	NA													
C-1	7/29/2008	NA	331.33	30.91	300.42	NA	NA													
C-1	10/29/2008	NA	331.33	31.02	300.31	NA	NA													
C-1	1/21/2009	NA	331.33	30.54	300.79	NA	NA													
C-1	4/16/2009	NA	331.33	30.61	300.72	NA	NA													

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

Abbreviations:

TEPH = Total petroleum hydrocarbons as diesel.

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8015.

BTEX = benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to June 18, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260

1,2-DCA = 1,2-Dichloroethane, analyzed by EPA Method 8260

TOB = Top of Wellbox Elevation

TOC = Top of Casing Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ppm = Parts per million

ug/L = Parts per billion

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

TABLE 2
HISTORIC WELL CONCENTRATIONS
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2-DCA (ug/L)	Ethanol (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-------------------	-------------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

Notes:

a = Compounds detected within the chromatographic range of gasoline but not characteristic of the standard gasoline pattern.

b = This sample was analyzed outside of the EPA recommended holding time.

c = Samples for wells S-6 and S-7 may have been switched.

d = Survey date only.

e = Hydrocarbon does not match pattern of laboratory's standard.

f = The concentration reported reflects individual or discrete unidentified peaks not matching a typical fuel pattern.

g = Quantity of unknown hydrocarbon(s) in sample based on gasoline.

h = Due to the low levels of analyte found in the sample, the analyte was qualitatively identified based on the compound's retention time and the presence of a single mass ion.

i = Estimated value. Analyte detected at a level less than the Reporting Limit (RL) and greater than or equal to the Method Detection Limit (MDL). The user of this data should be aware that this data is of limited reliability.

j = Hydrocarbon result partly due to individual peak(s) in quantitation range.

k = Analyzed by EPA Method 8015B (M).

l = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

m = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.

Ethanol analyzed by EPA Method 8260.

Corrected groundwater elevation when SPH is present = Top of Casing Elevation - Depth to Water + (0.8 x Hydrocarbon Thickness).

Well T-2 is a backfill well.

Beginning September 23, 2002 depth to water referenced to Top of Casing.

All wells except S-11, S-12, and T-1 through T-4 surveyed March 11, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.


Survey data for wells S-11 and S-12 provided by Cambria Environmental Technology, Inc.

C-1 surveyed March 18, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.

Wells SR-1, SR-2, and SR-3 surveyed September 22, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.

4Q05 survey data for wells S-5B, S-5C, S-9B, S-9C, and S-14 provided by Delta Environmental Consultants, Inc.

FIGURES / GRAPHS

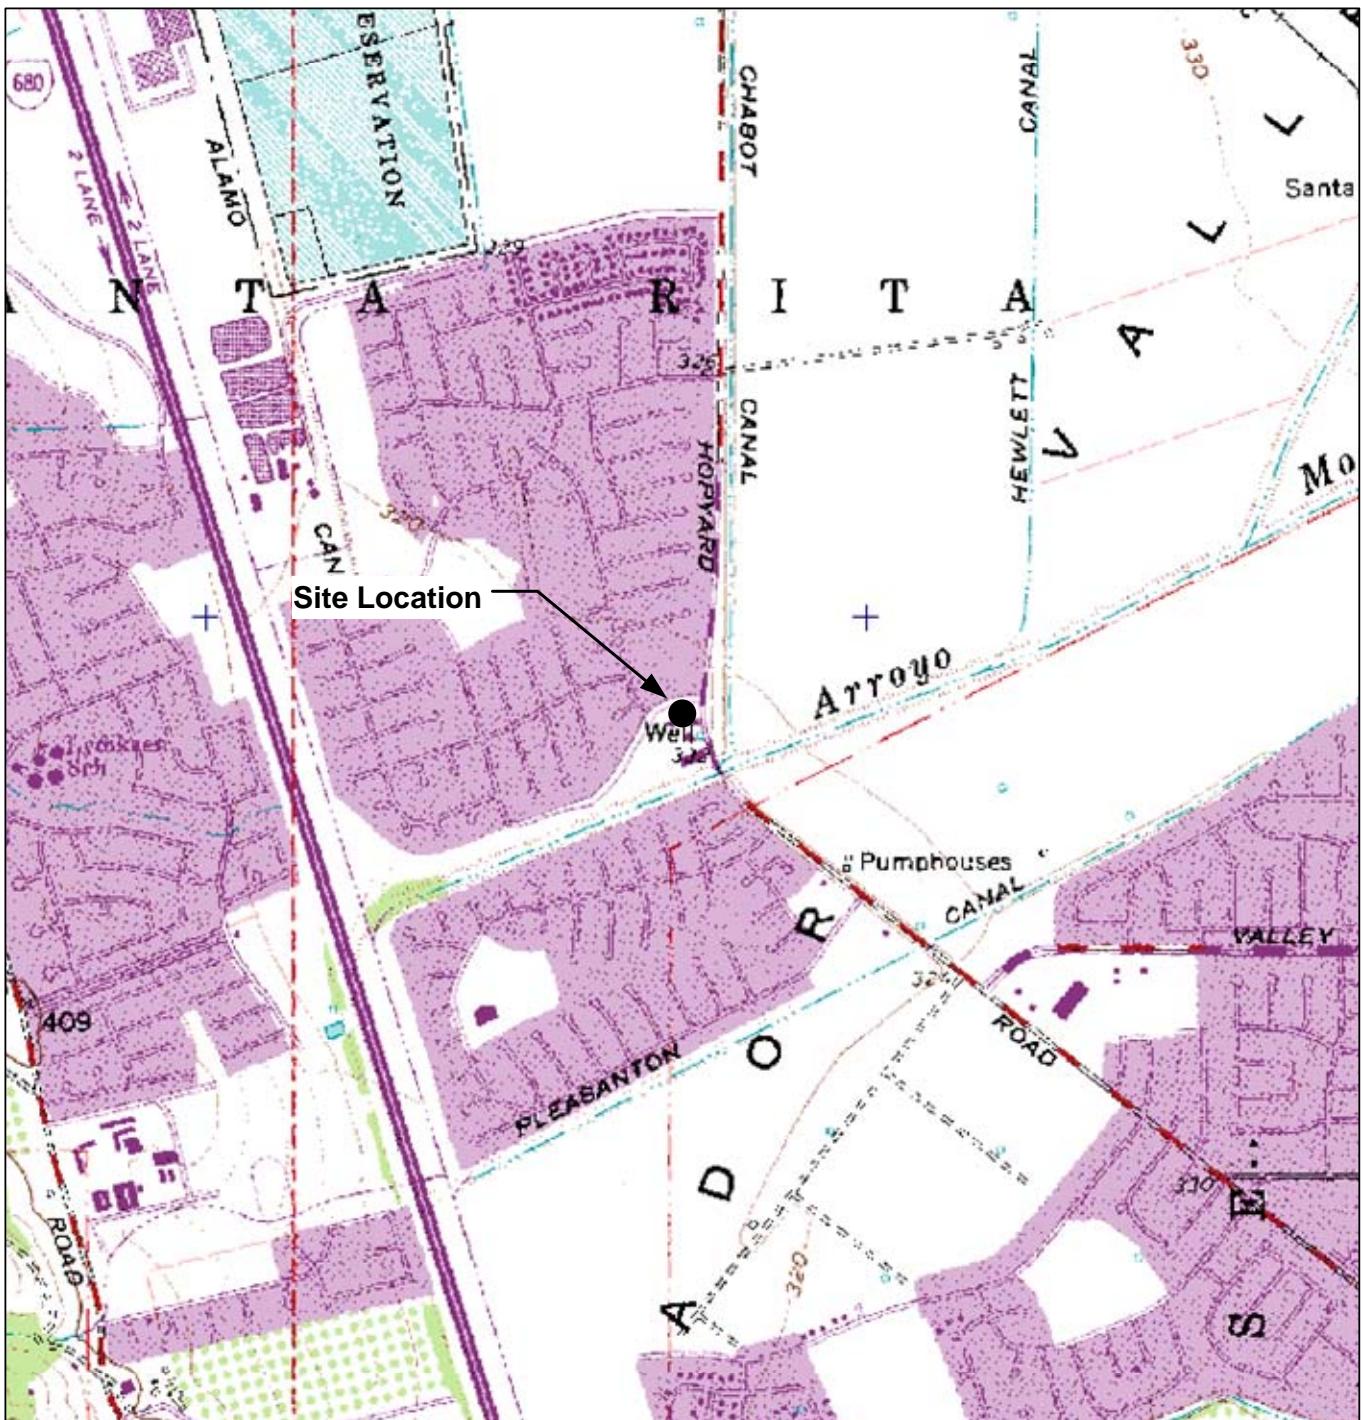

GENERAL NOTES:
 Base Map from: DeLorme Yarmouth, ME 04096
 Source Data: USGS




0 1,300 2,600
 Scale, Feet




FIGURE 1
SITE LOCATION AND WELL SURVEY MAP
SHELL-BRANDED SERVICE STATION
 3790 Hopyard Road
 Pleasanton, California

PROJECT NO. SCA3790H1A	DRAWN BY VF 12/04/03
FILE NO.	PREPARED BY VF
REVISION NO.	REVIEWED BY




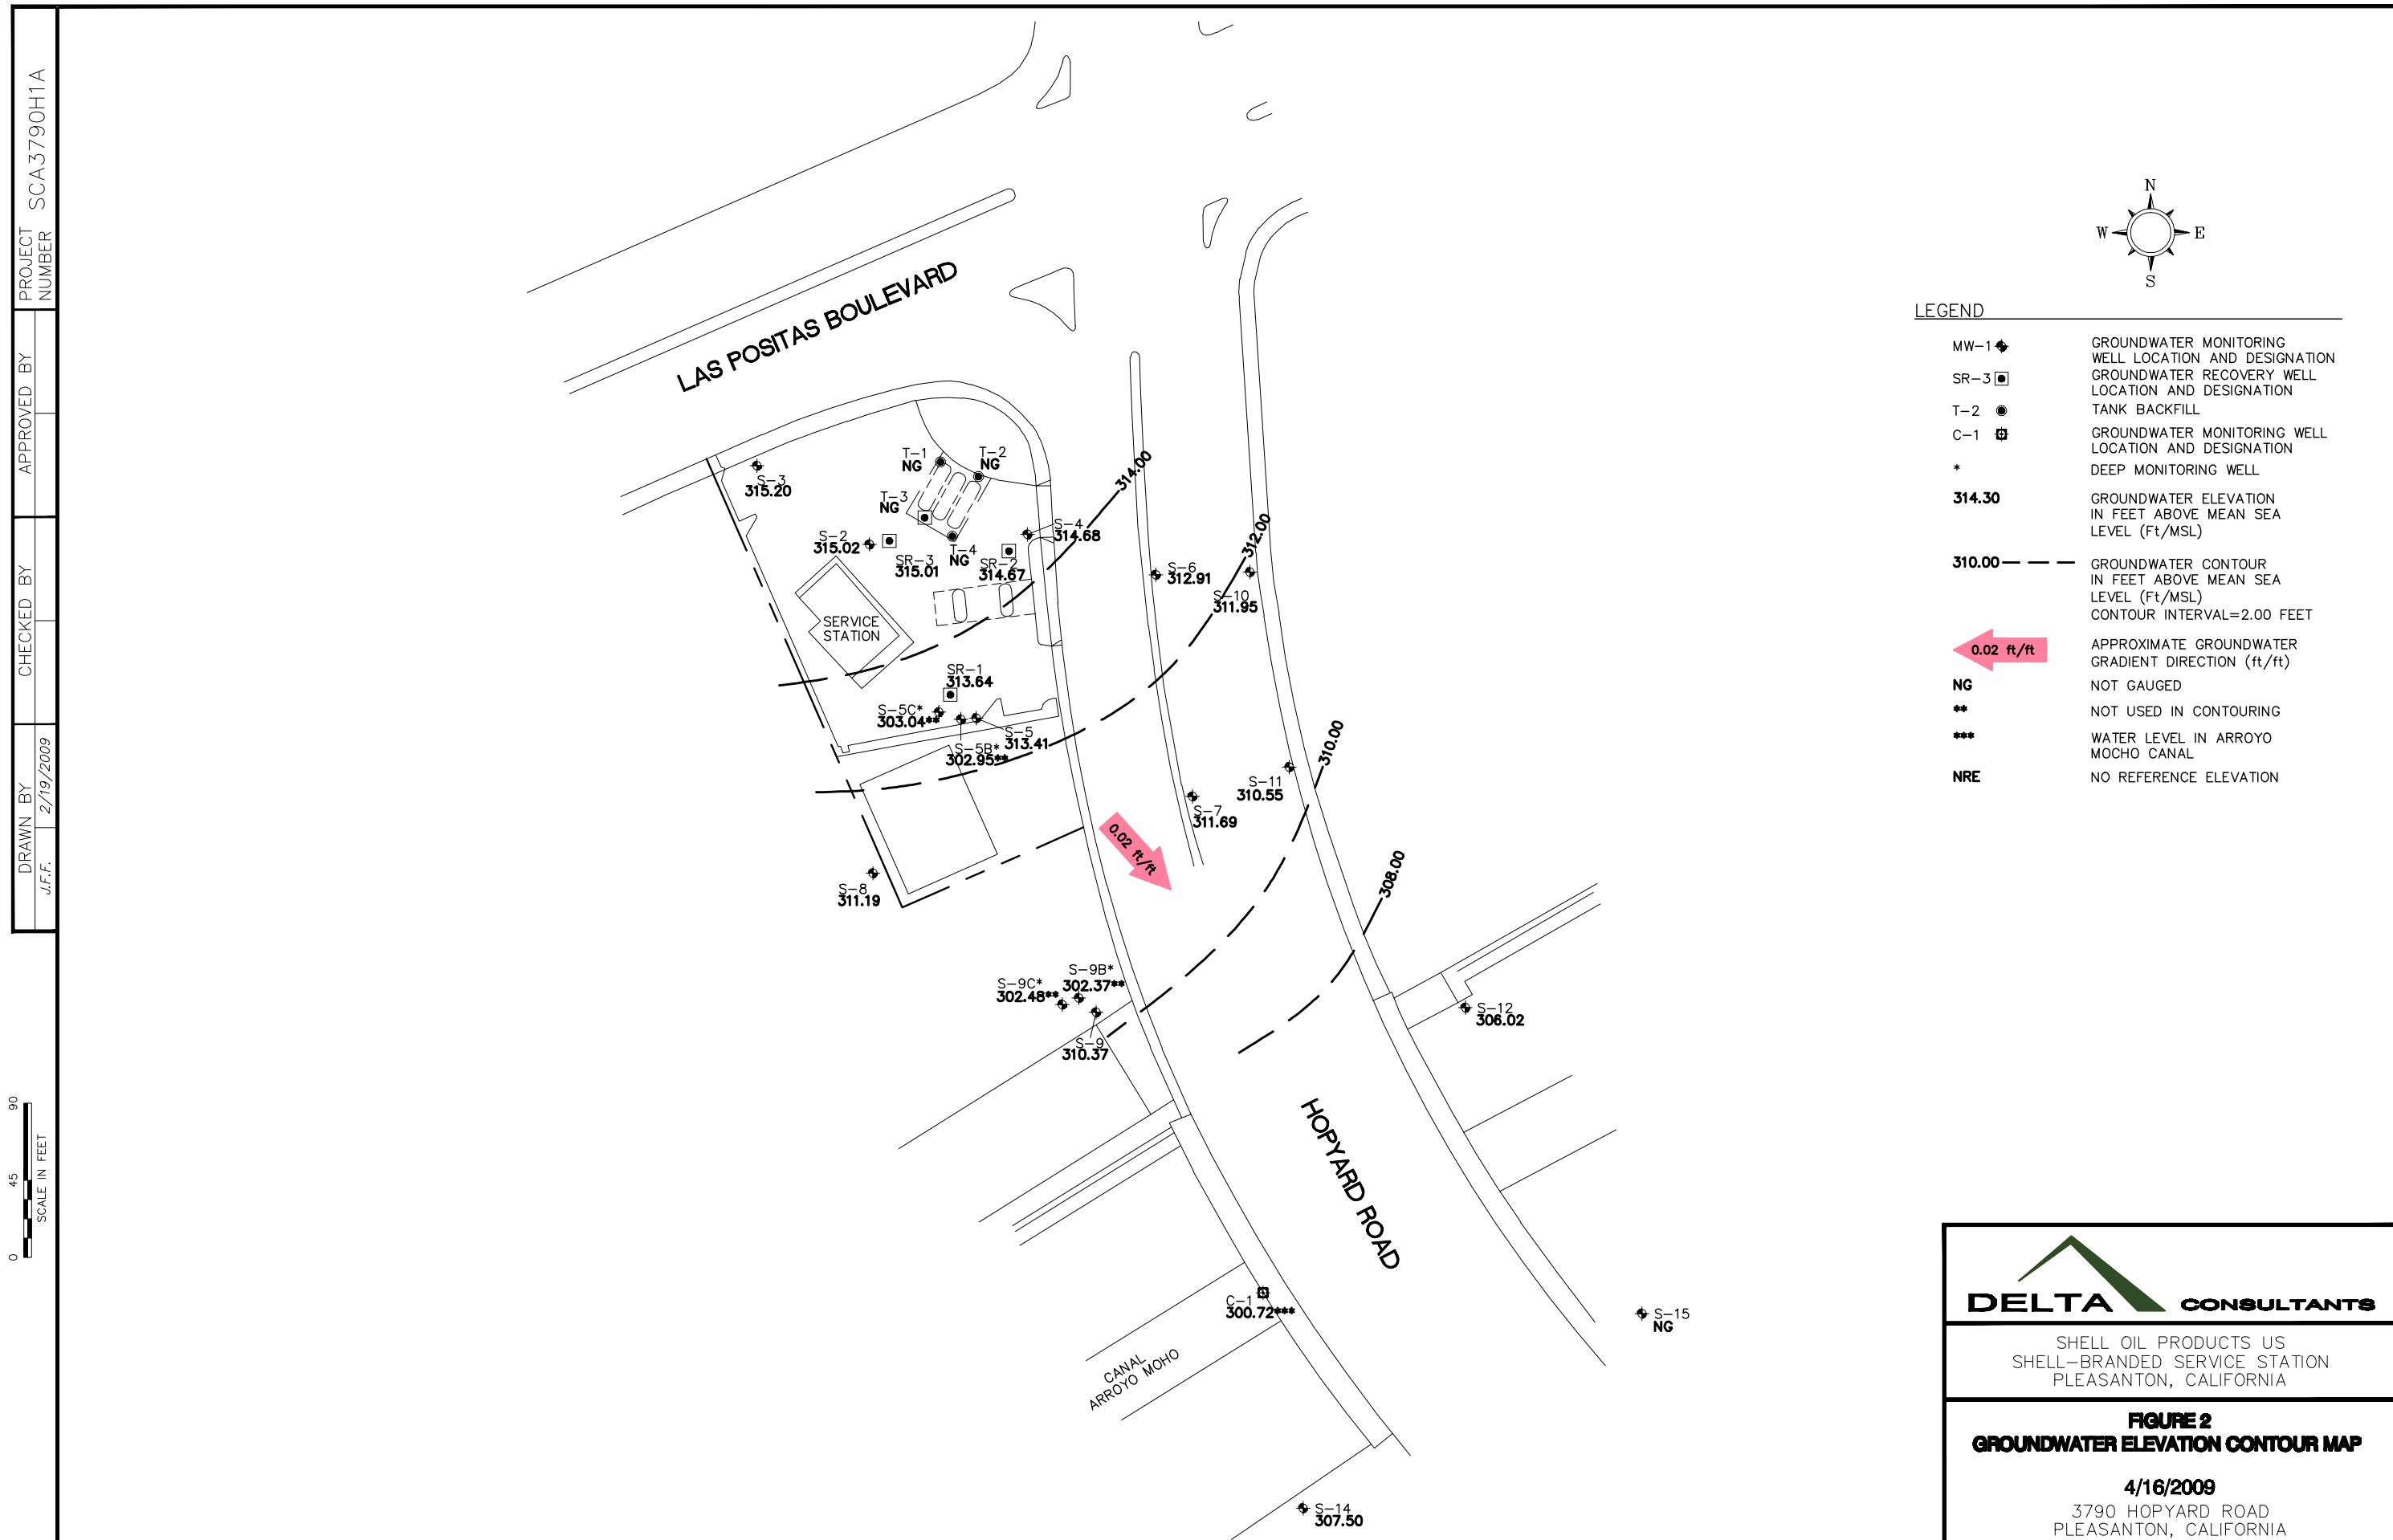


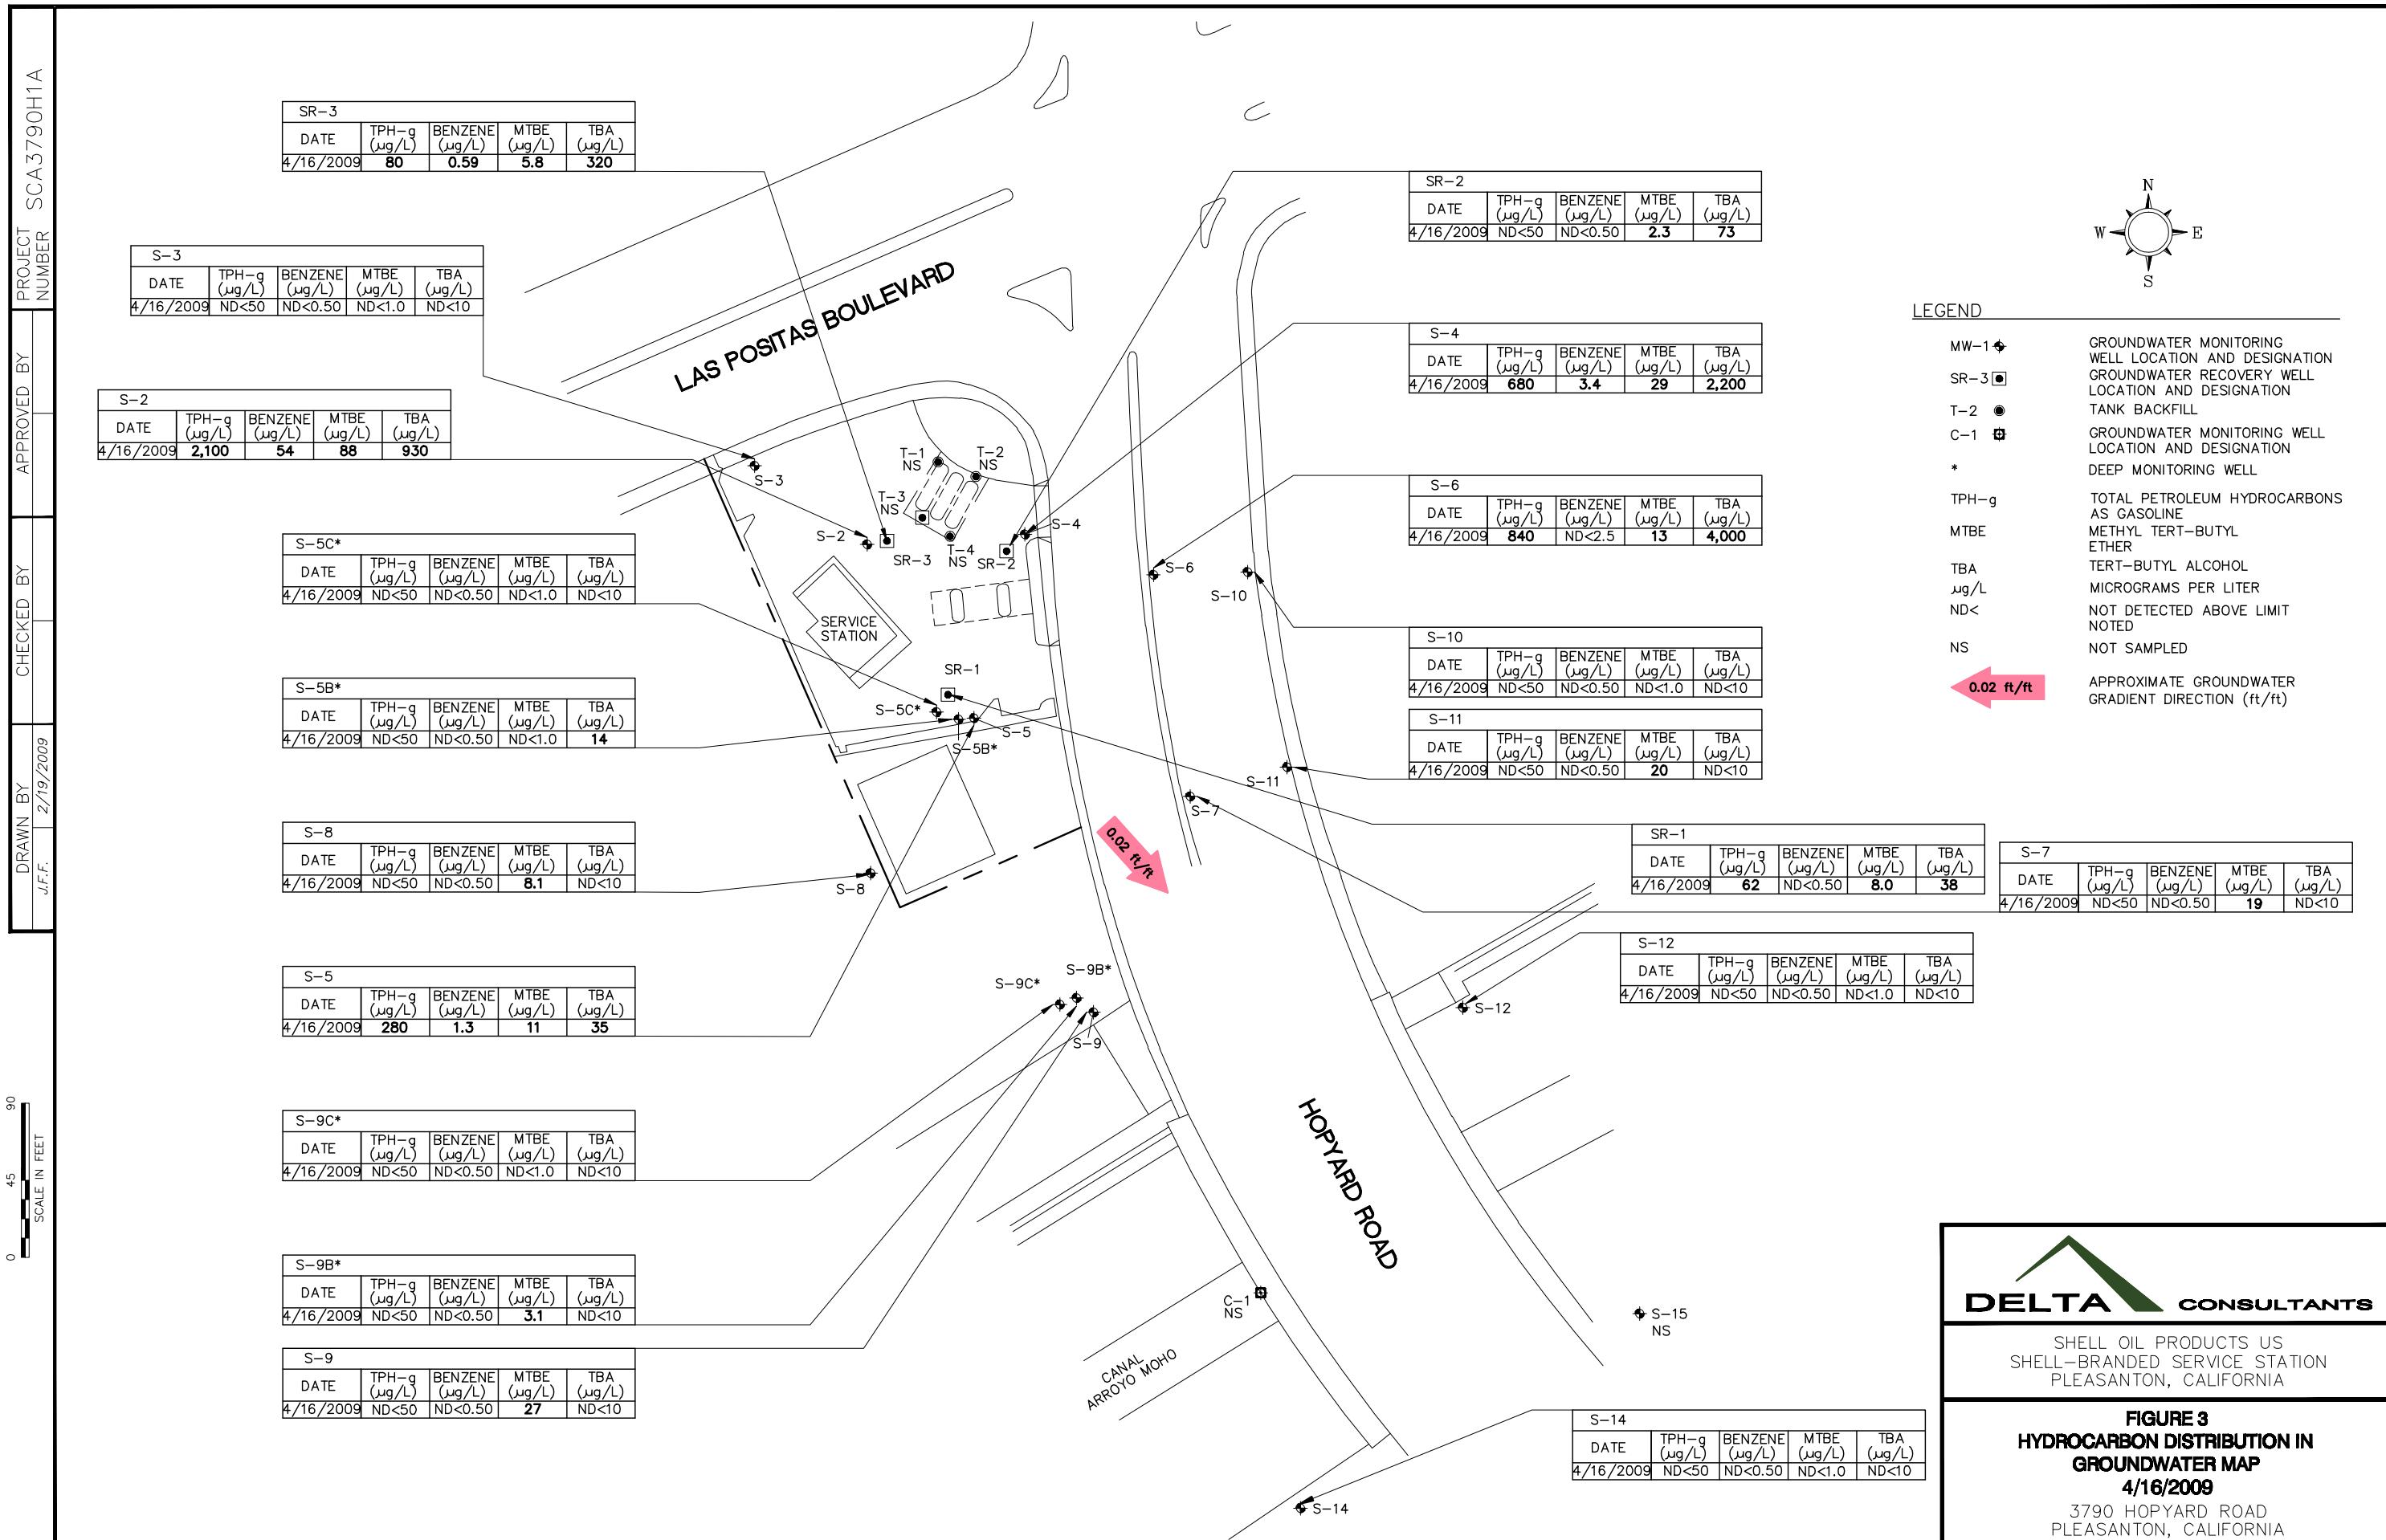



DELTA CONSULTANTS
SHELL OIL PRODUCTS US
SHELL-BRANDED SERVICE STATION
PLEASANTON, CALIFORNIA

FIGURE 3
HYDROCARBON DISTRIBUTION IN GROUNDWATER MAP
4/16/2009
3790 HOPYARD ROAD
PLEASANTON, CALIFORNIA

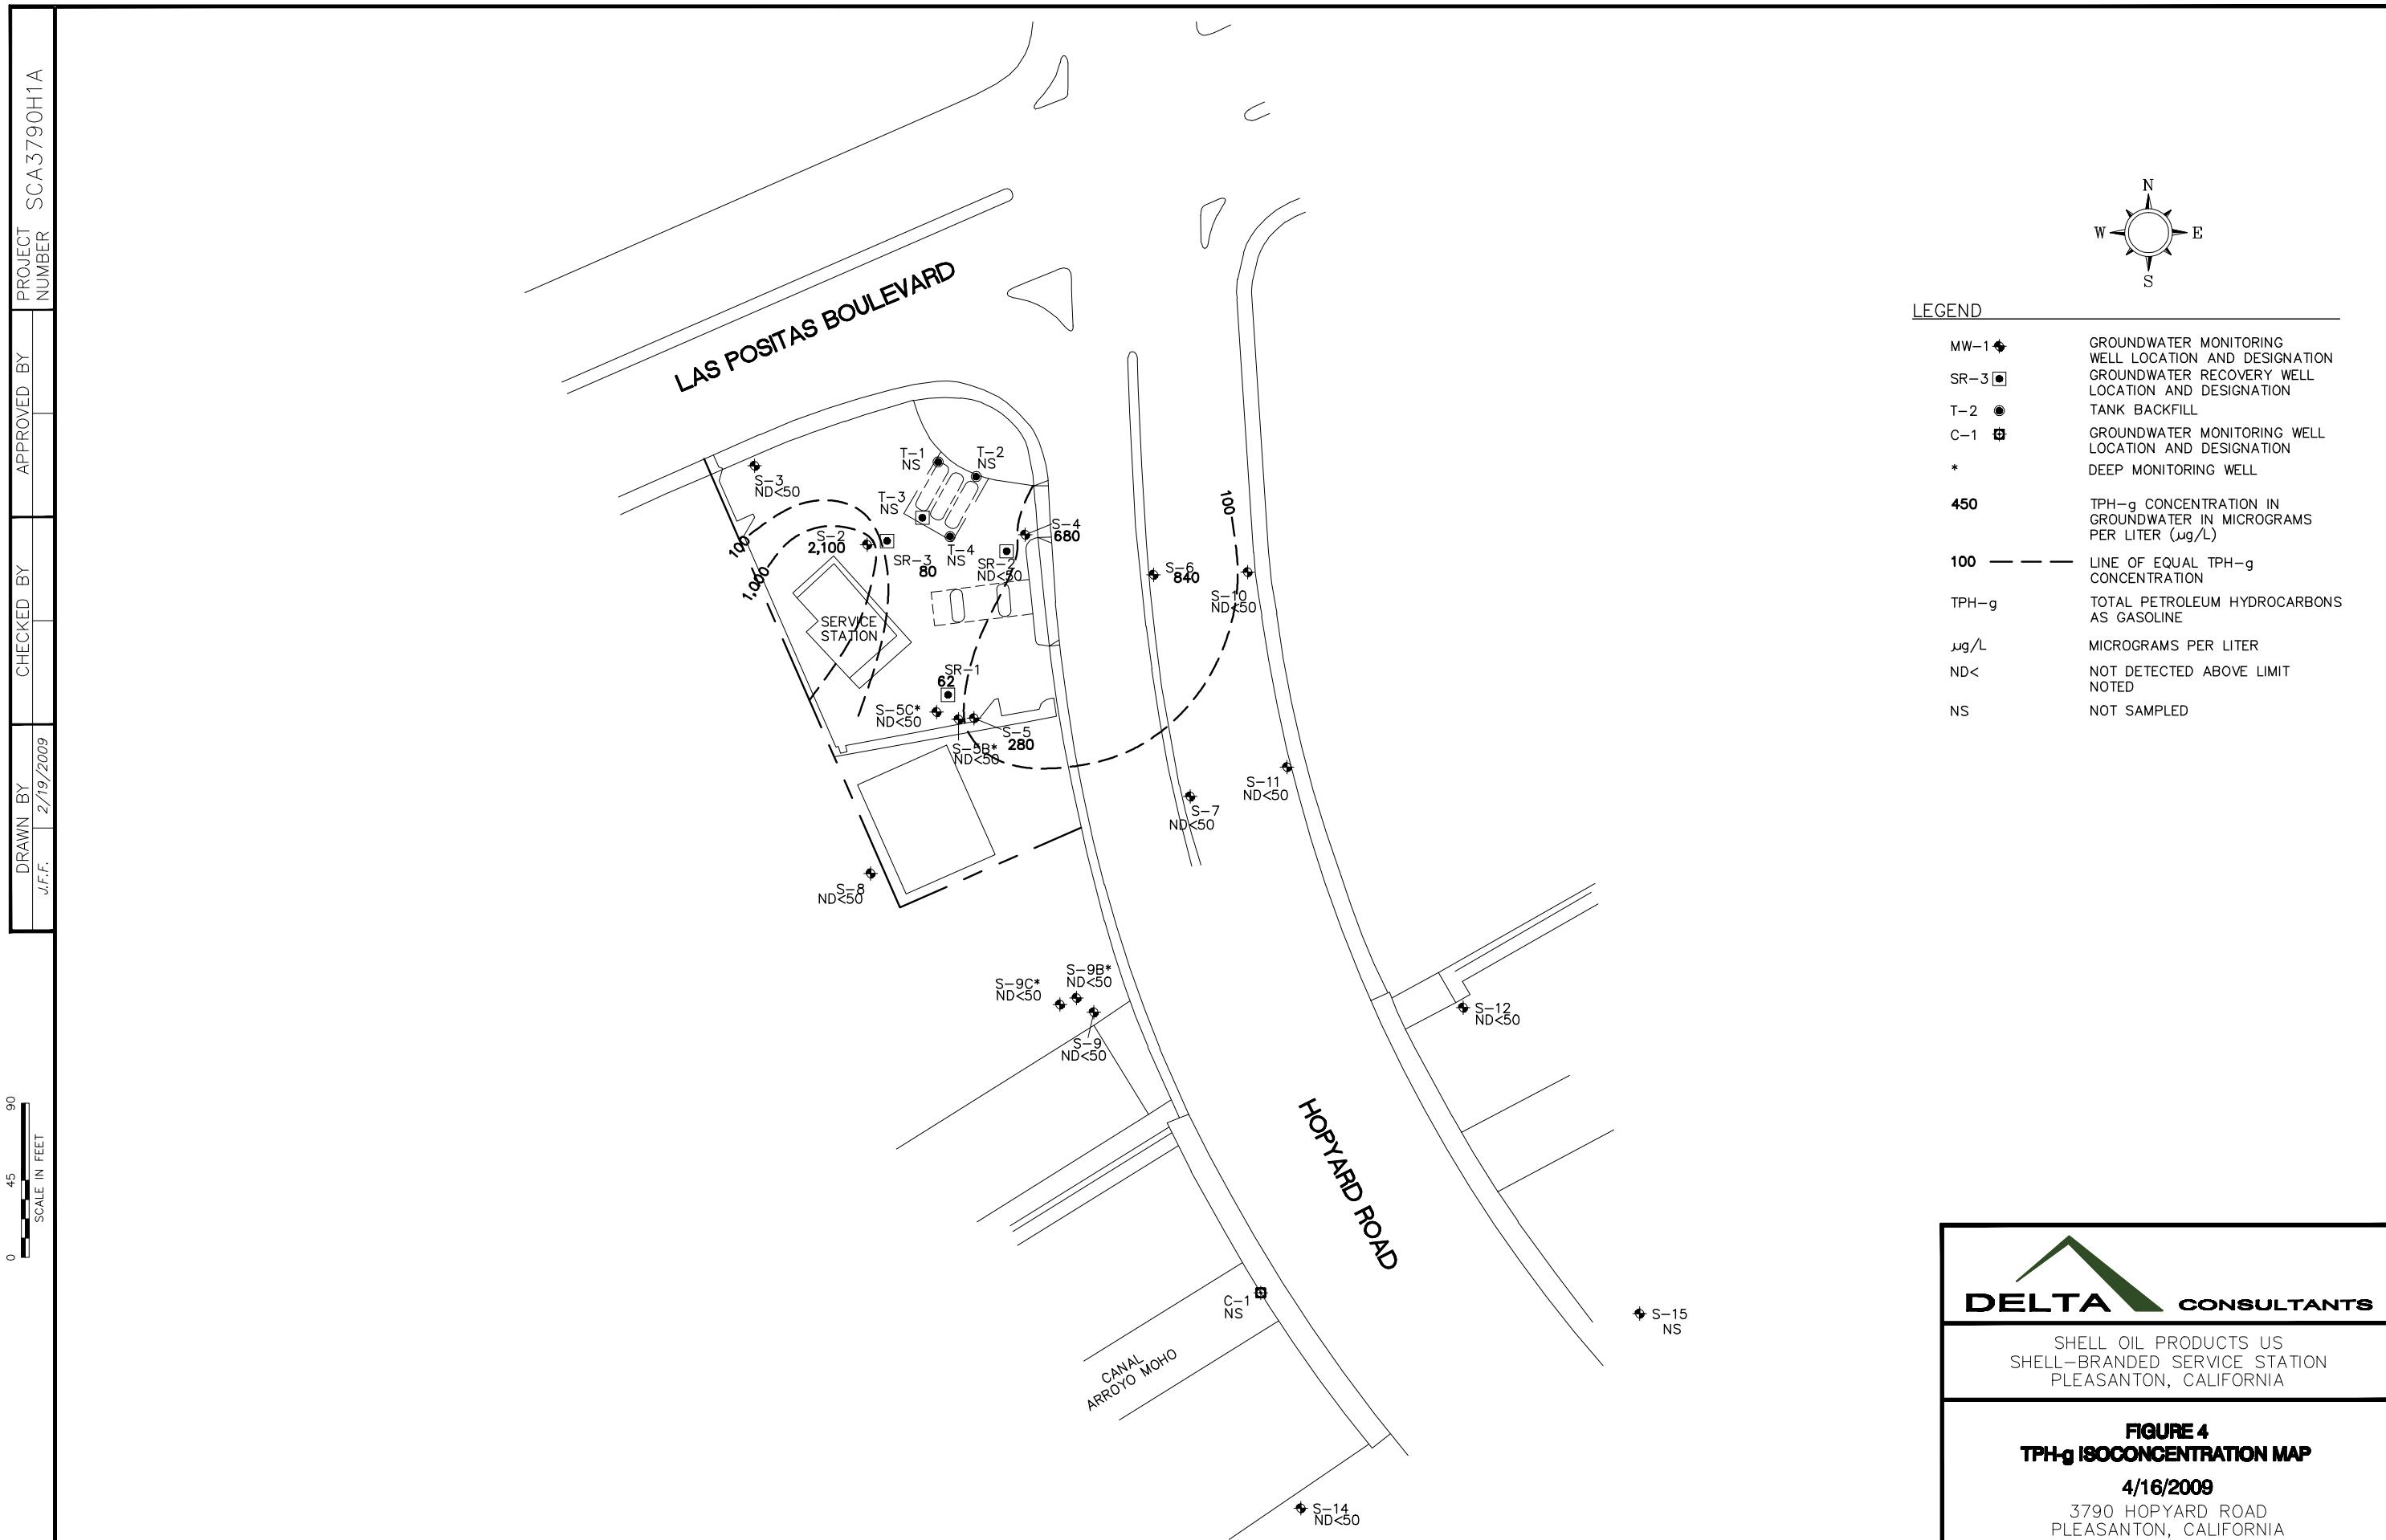


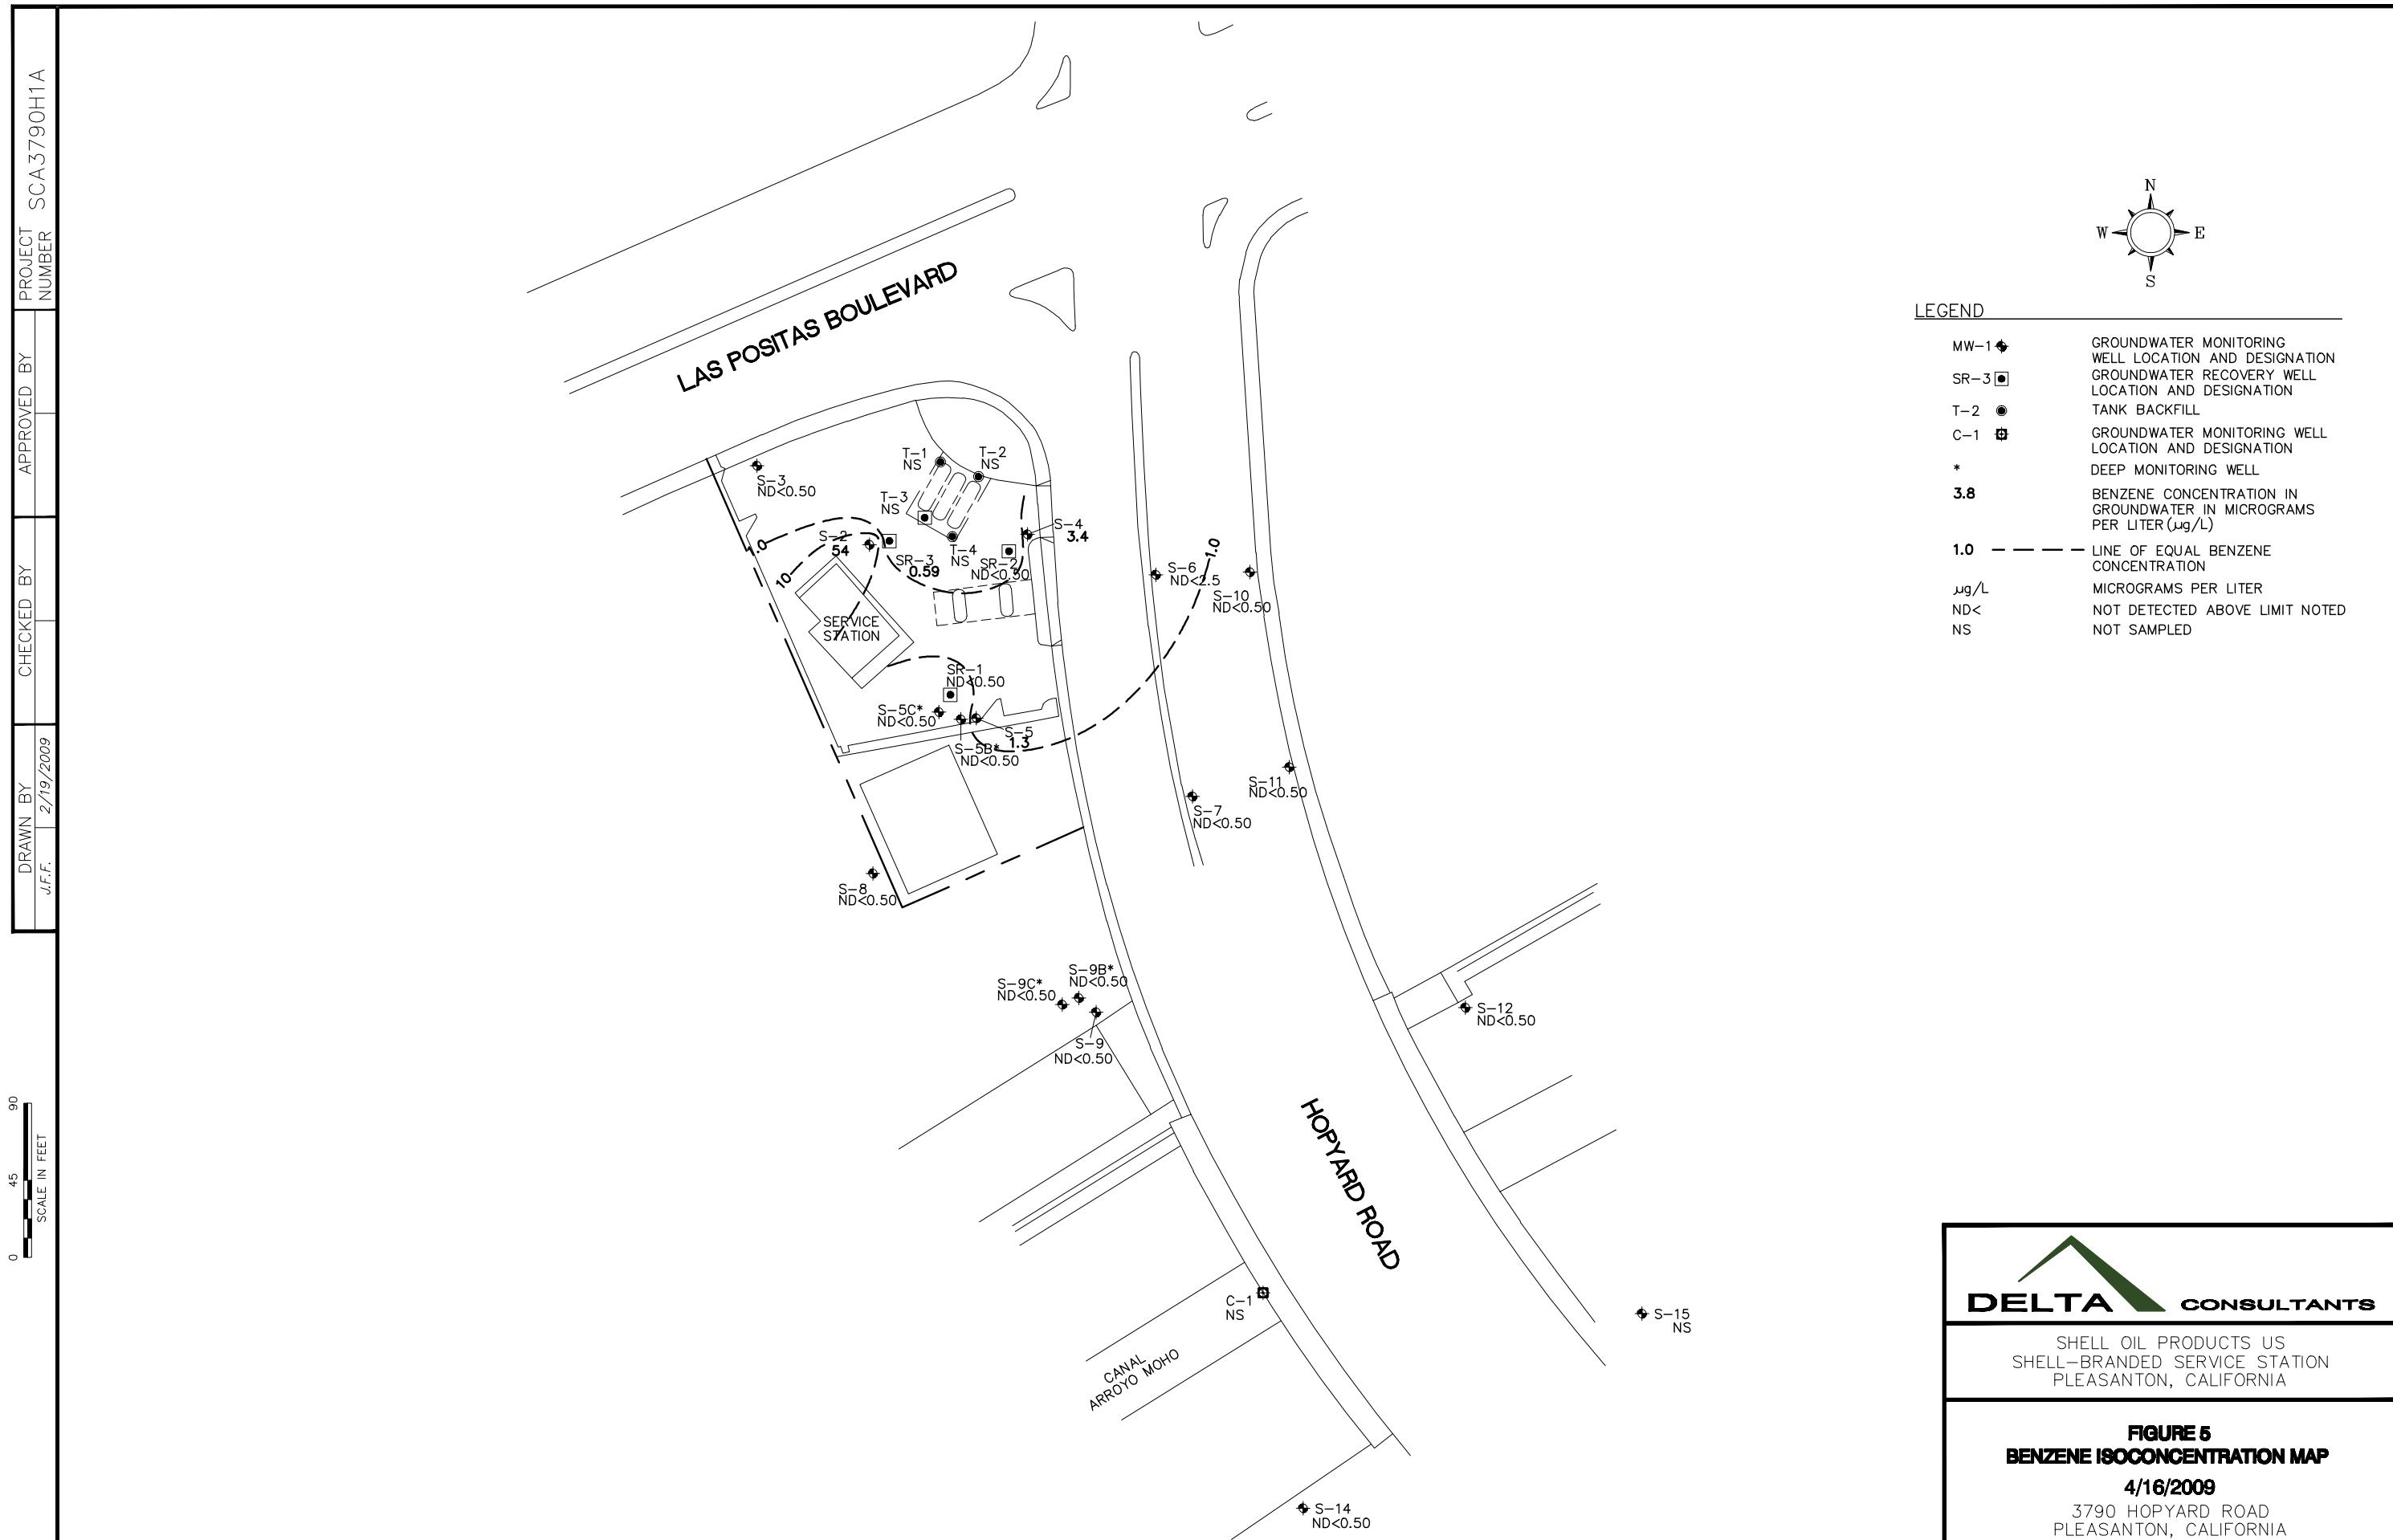

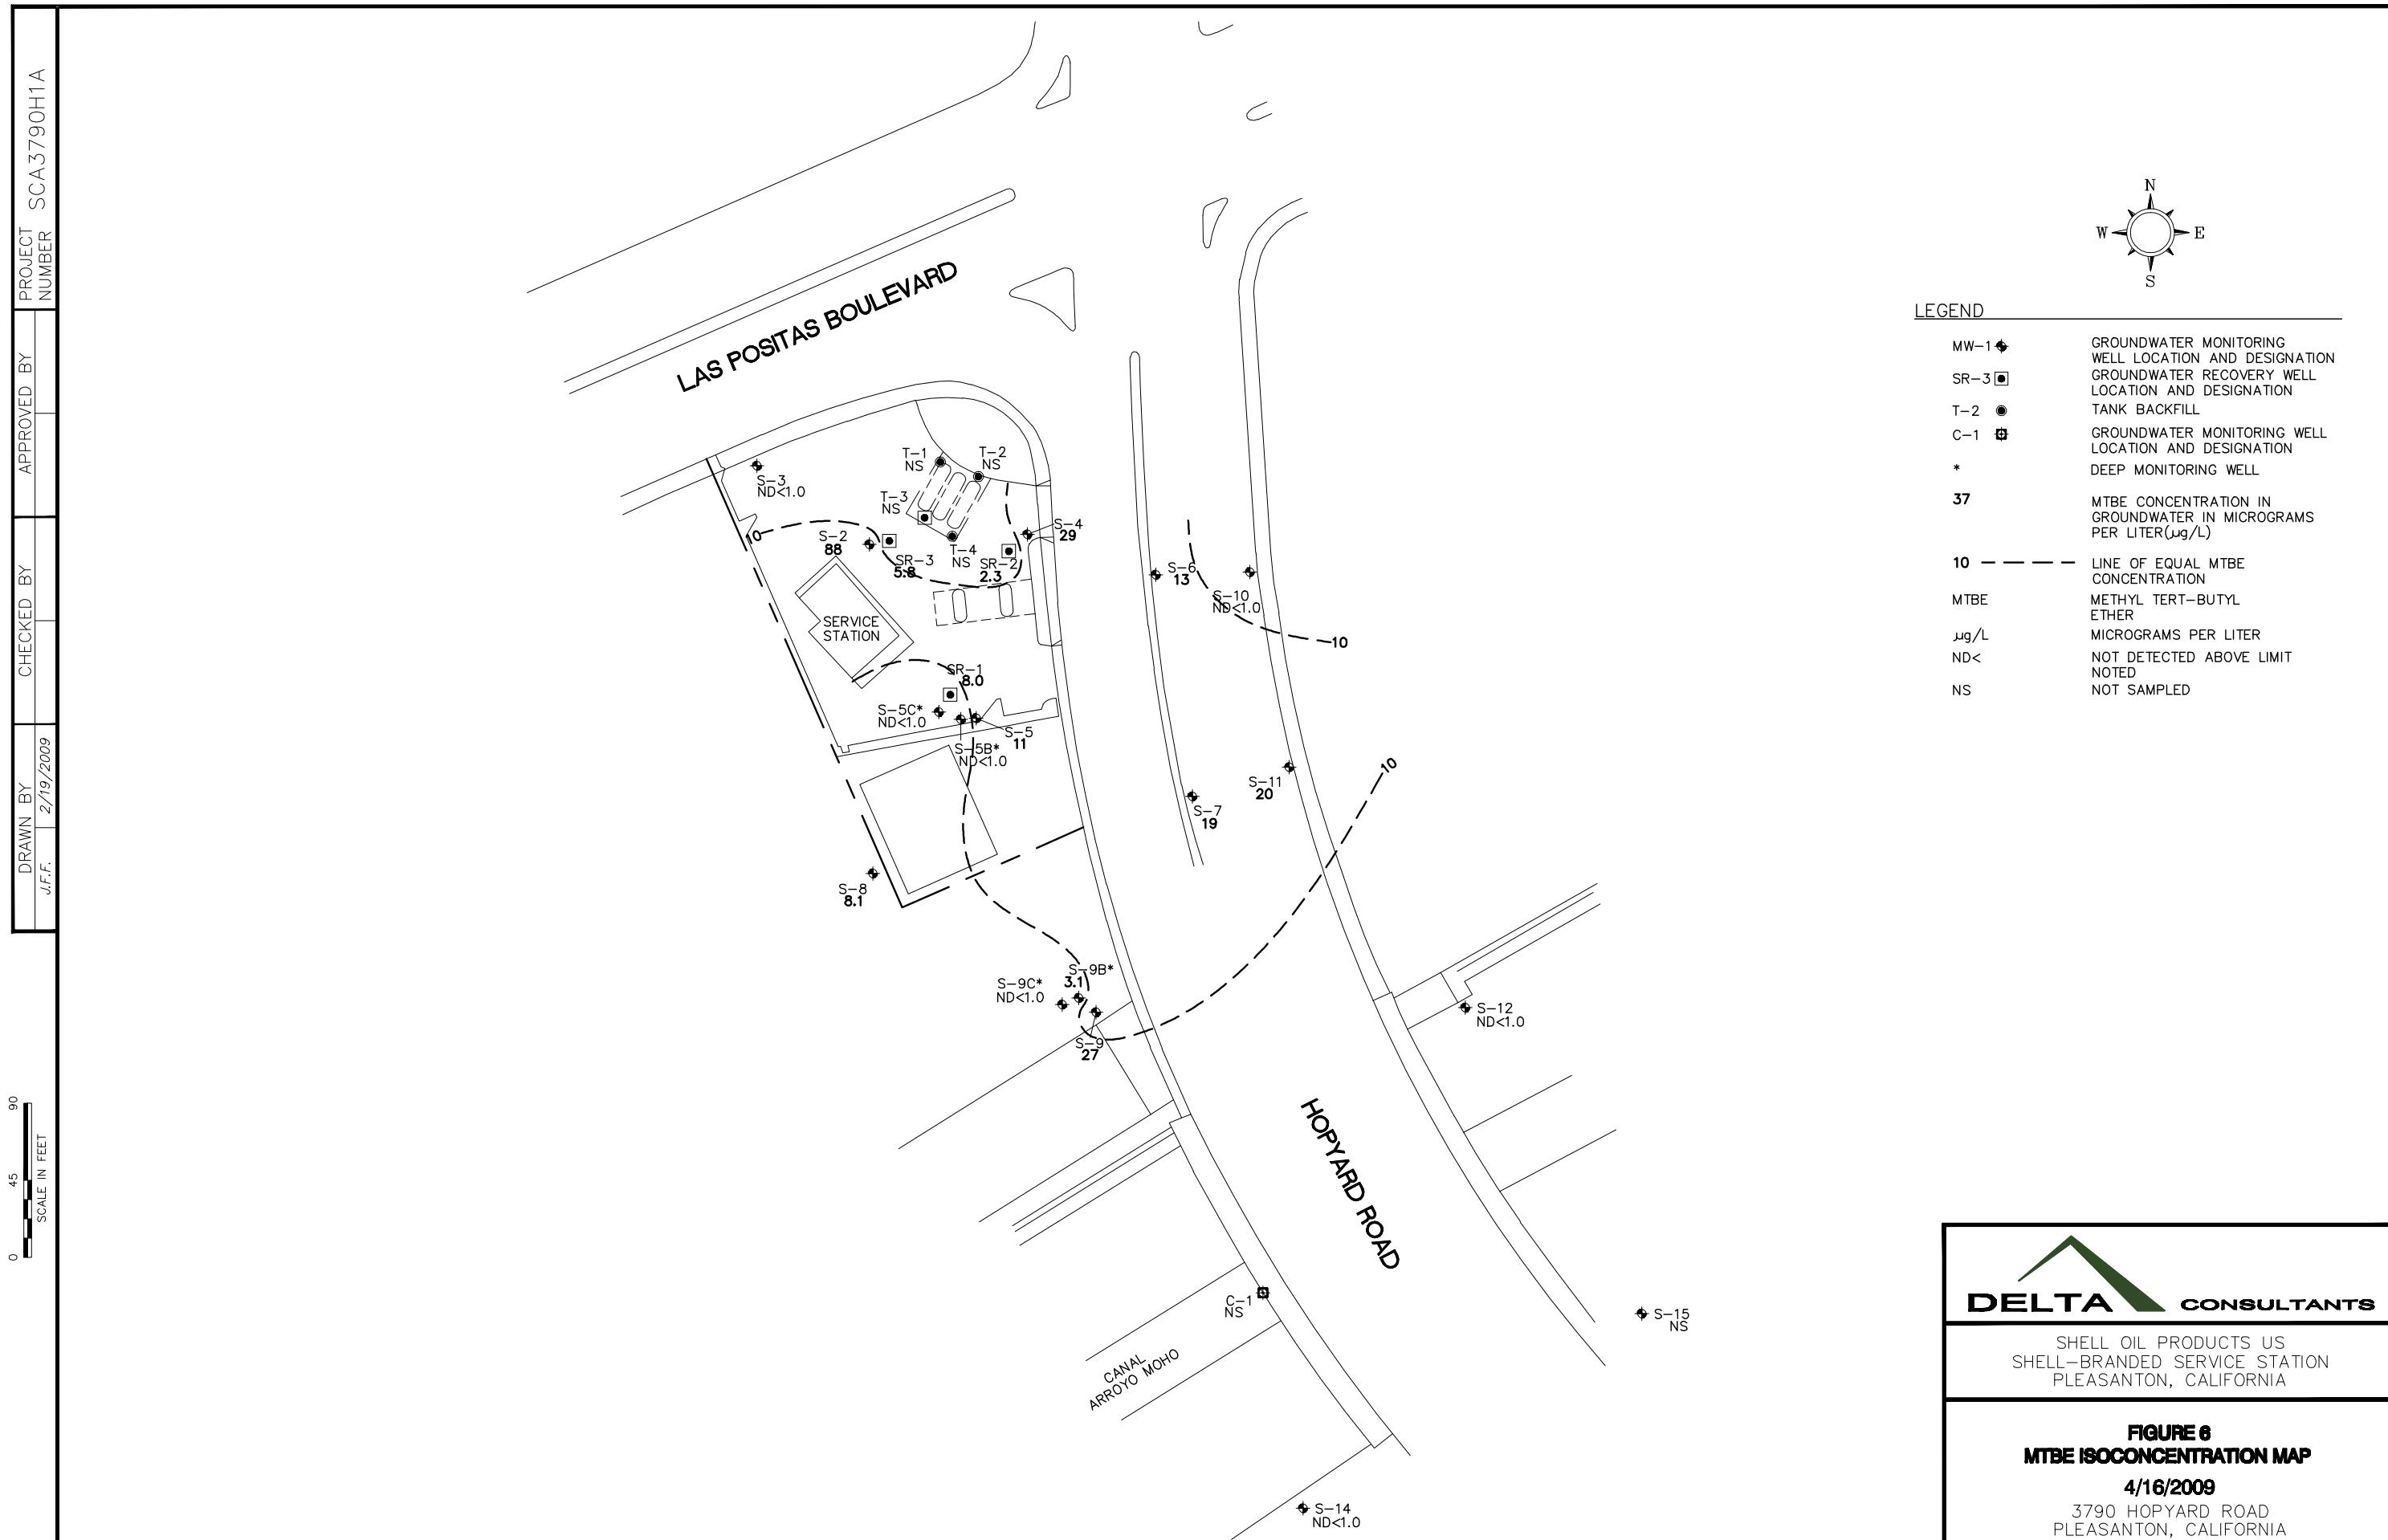


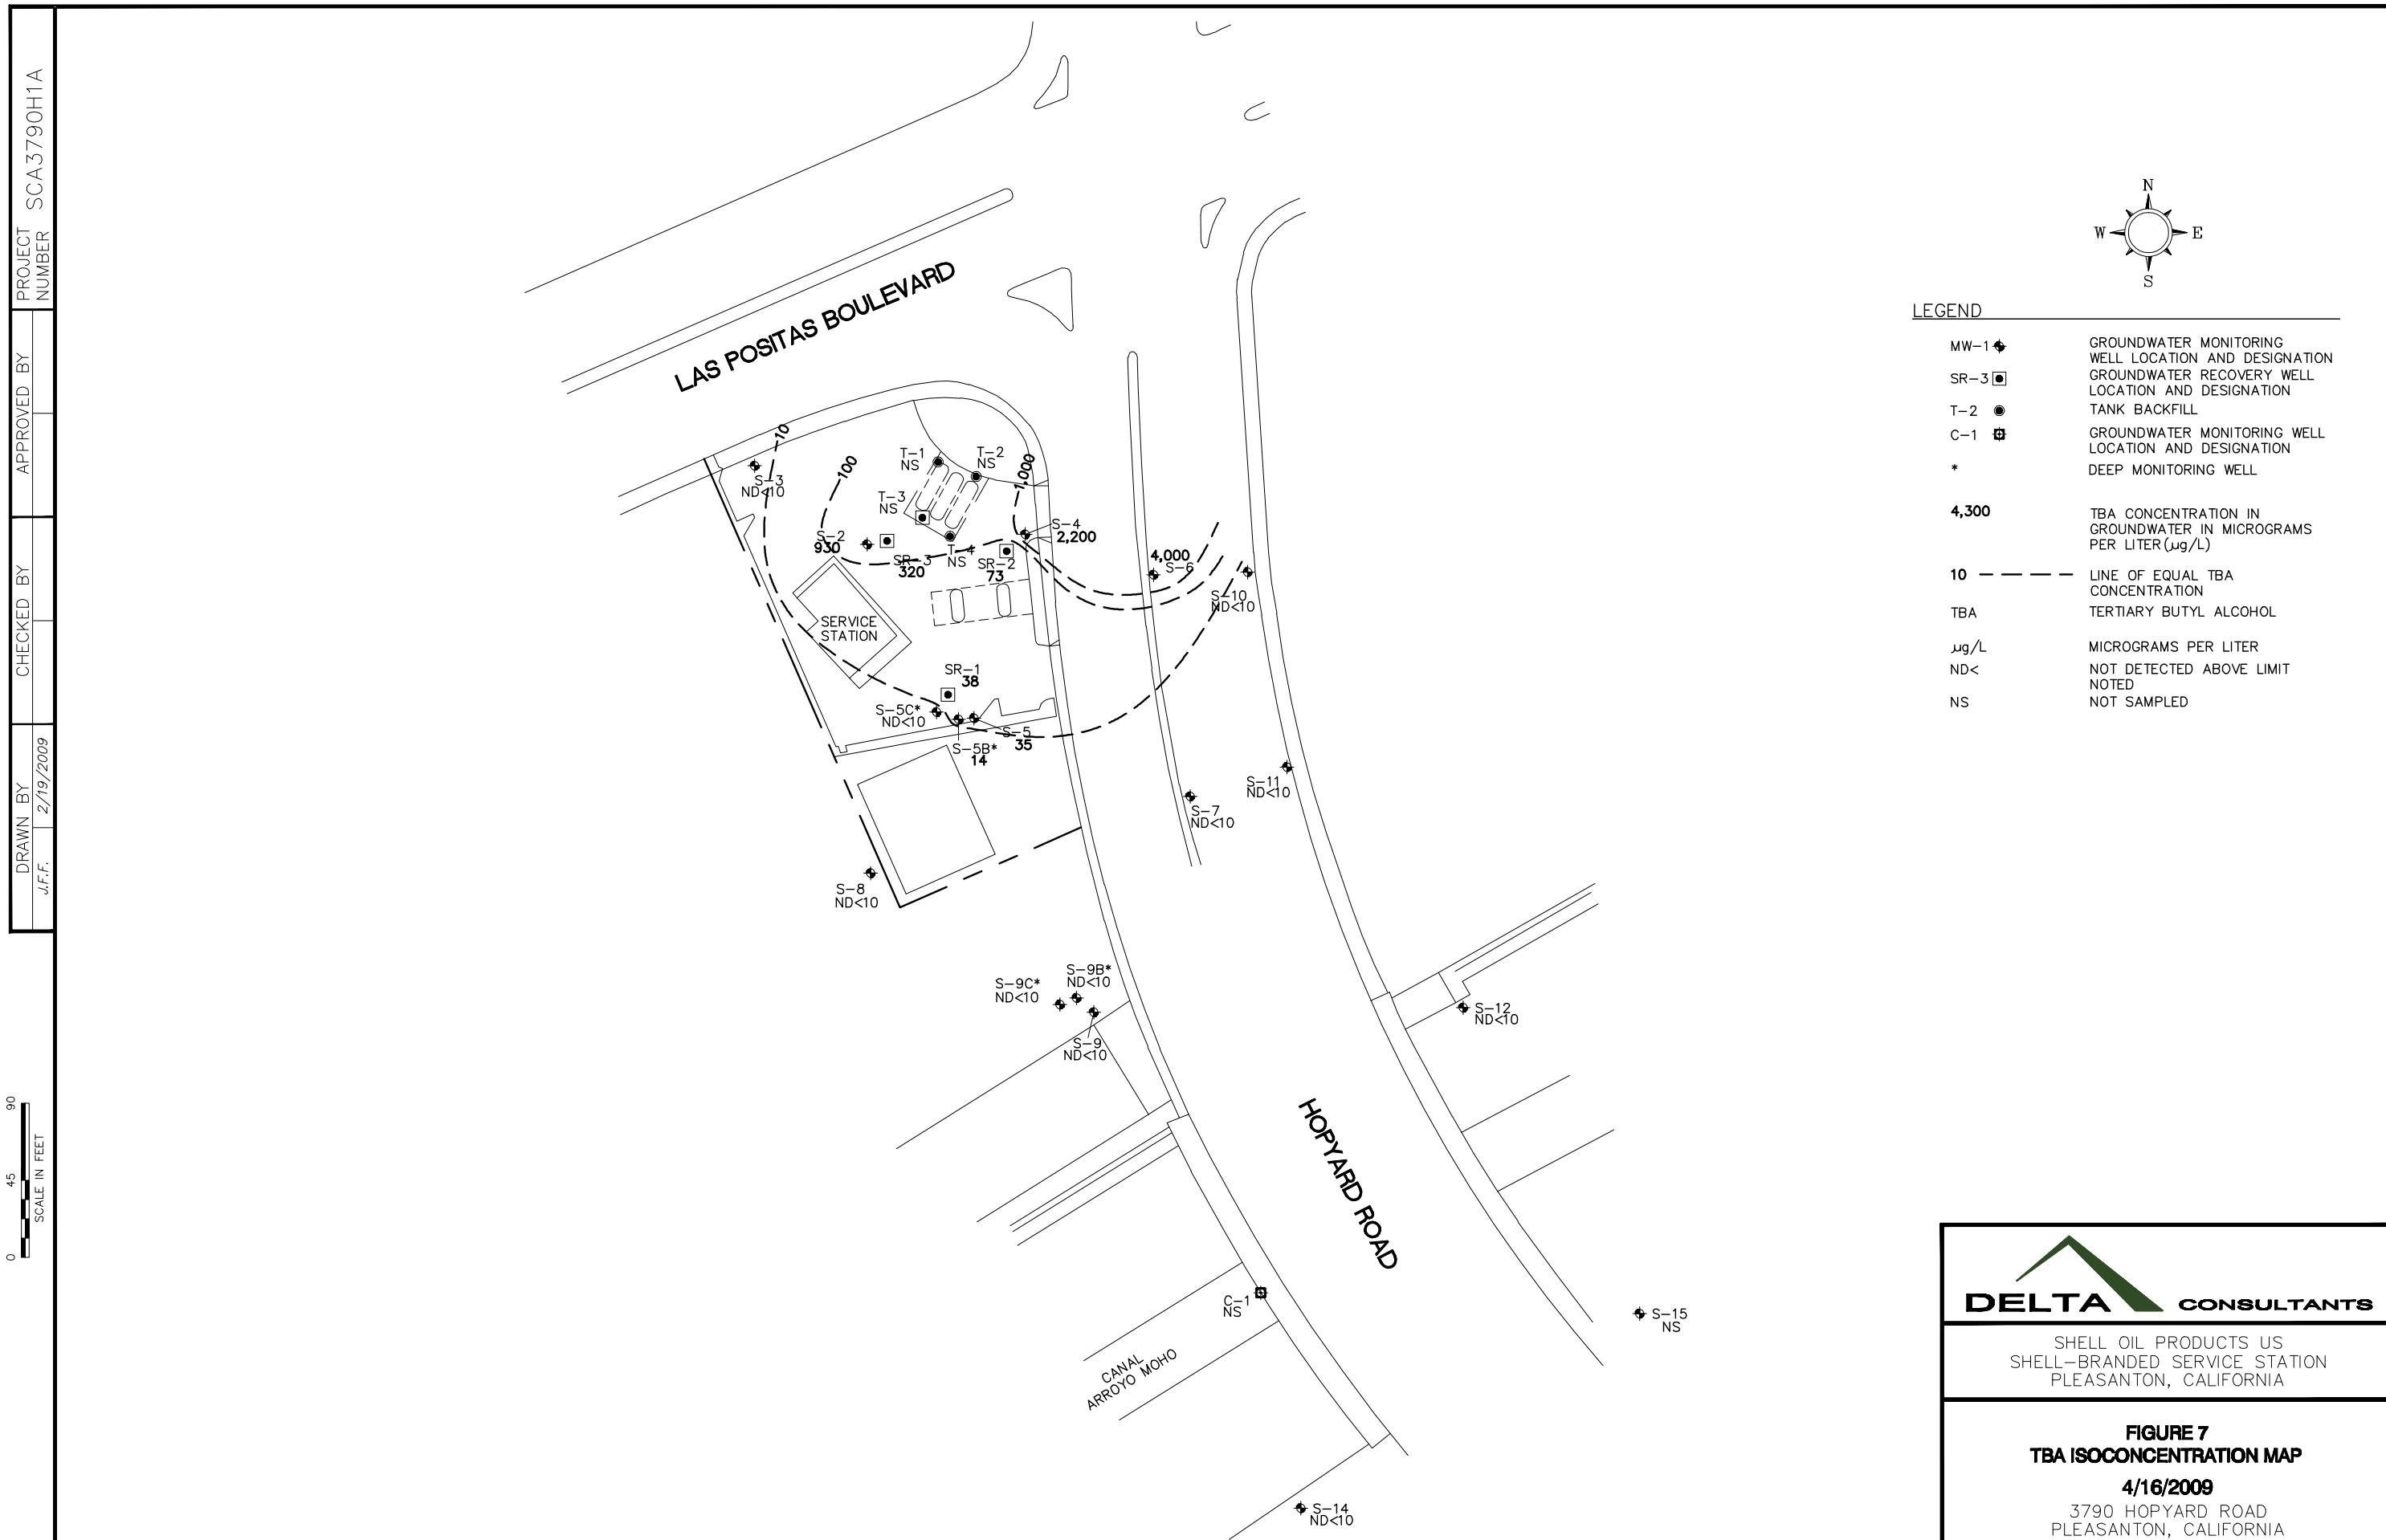


Graph 1
MTBE and TBA Concentrations
Well S-4
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California

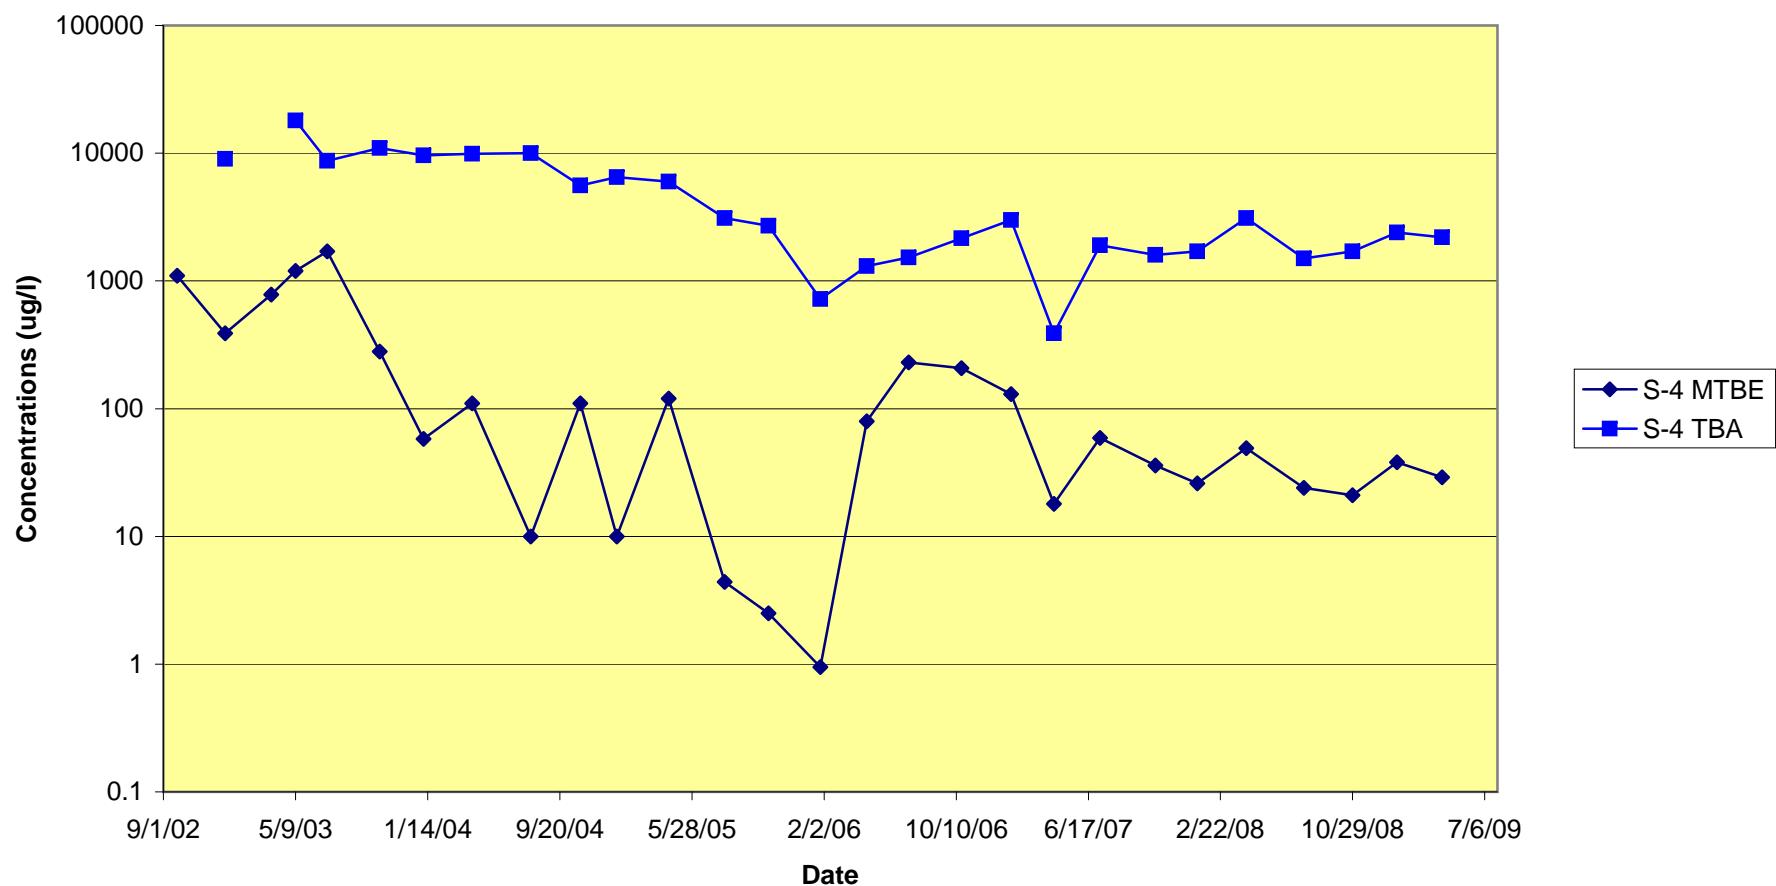


Graph 2
MTBE and TBA Concentrations
Well S-6
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California

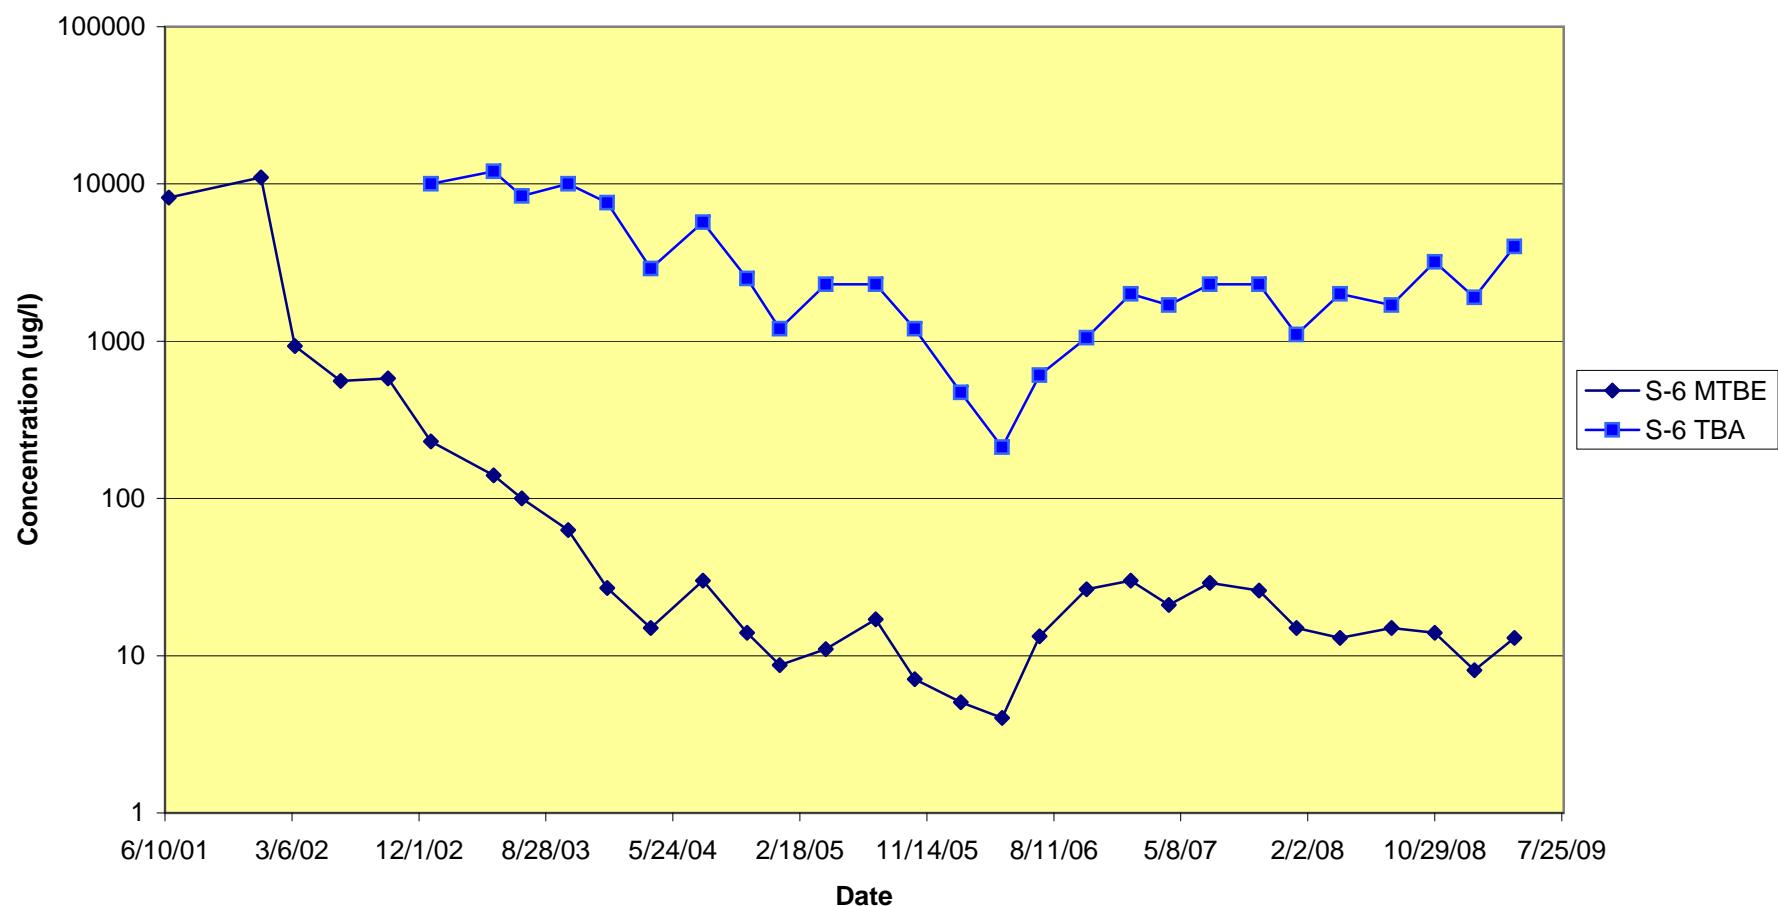


Graph 3
MTBE and TBA Concentrations
Well S-7
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California

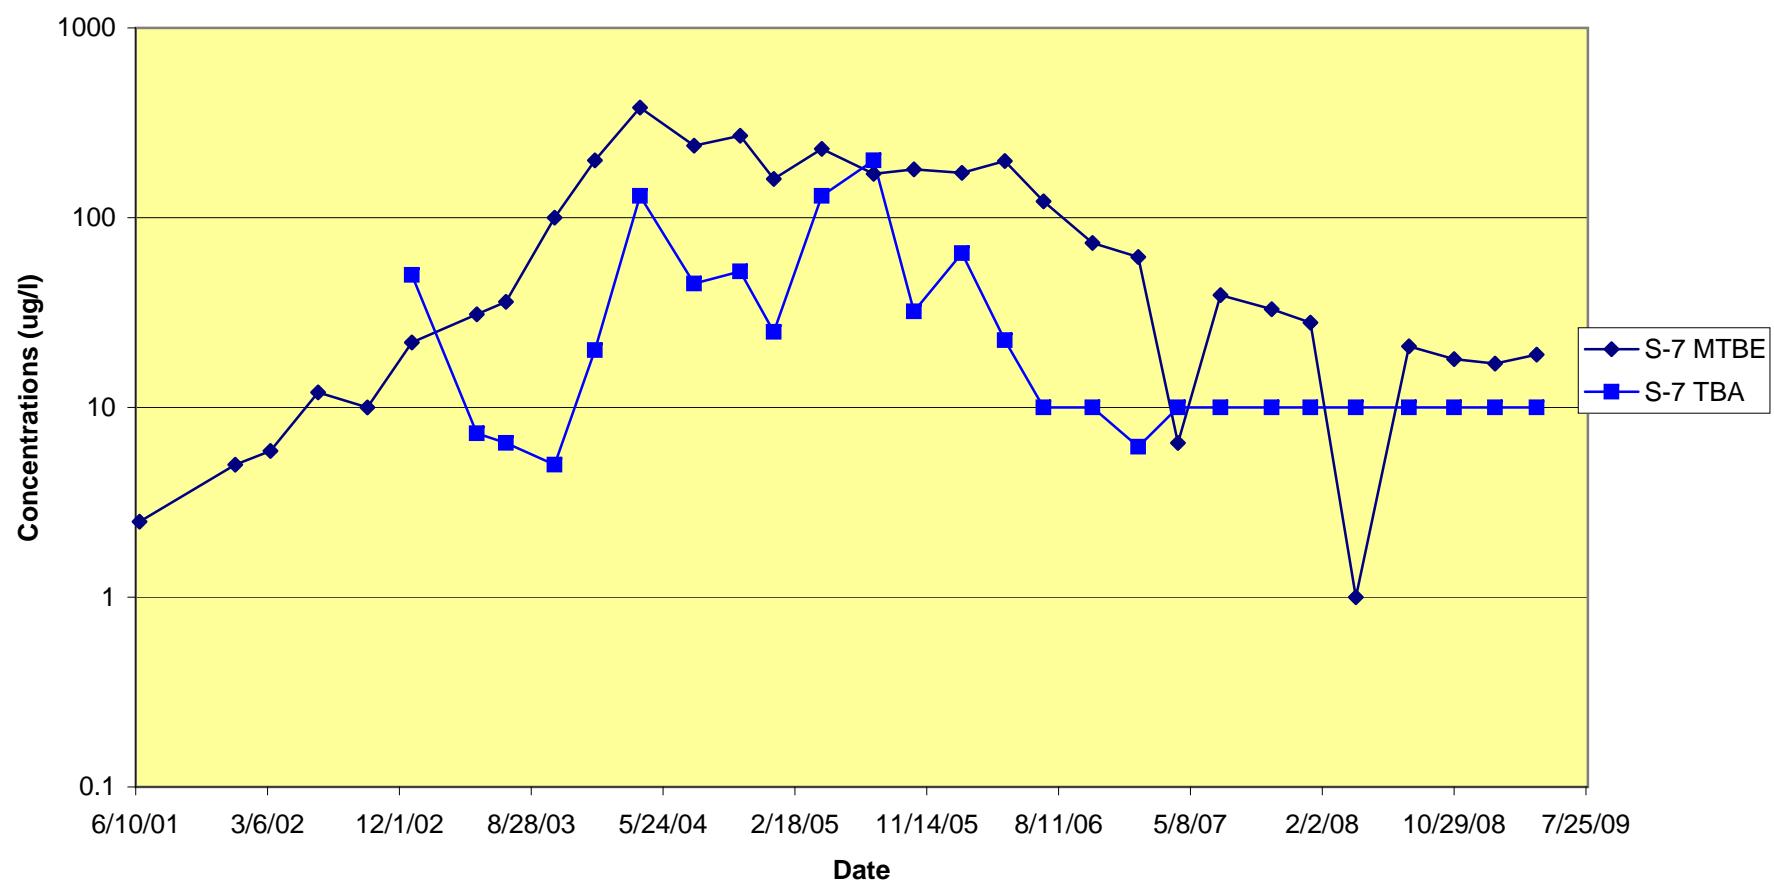

Graph 4
MTBE and TBA Concentrations
Well S-9
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California

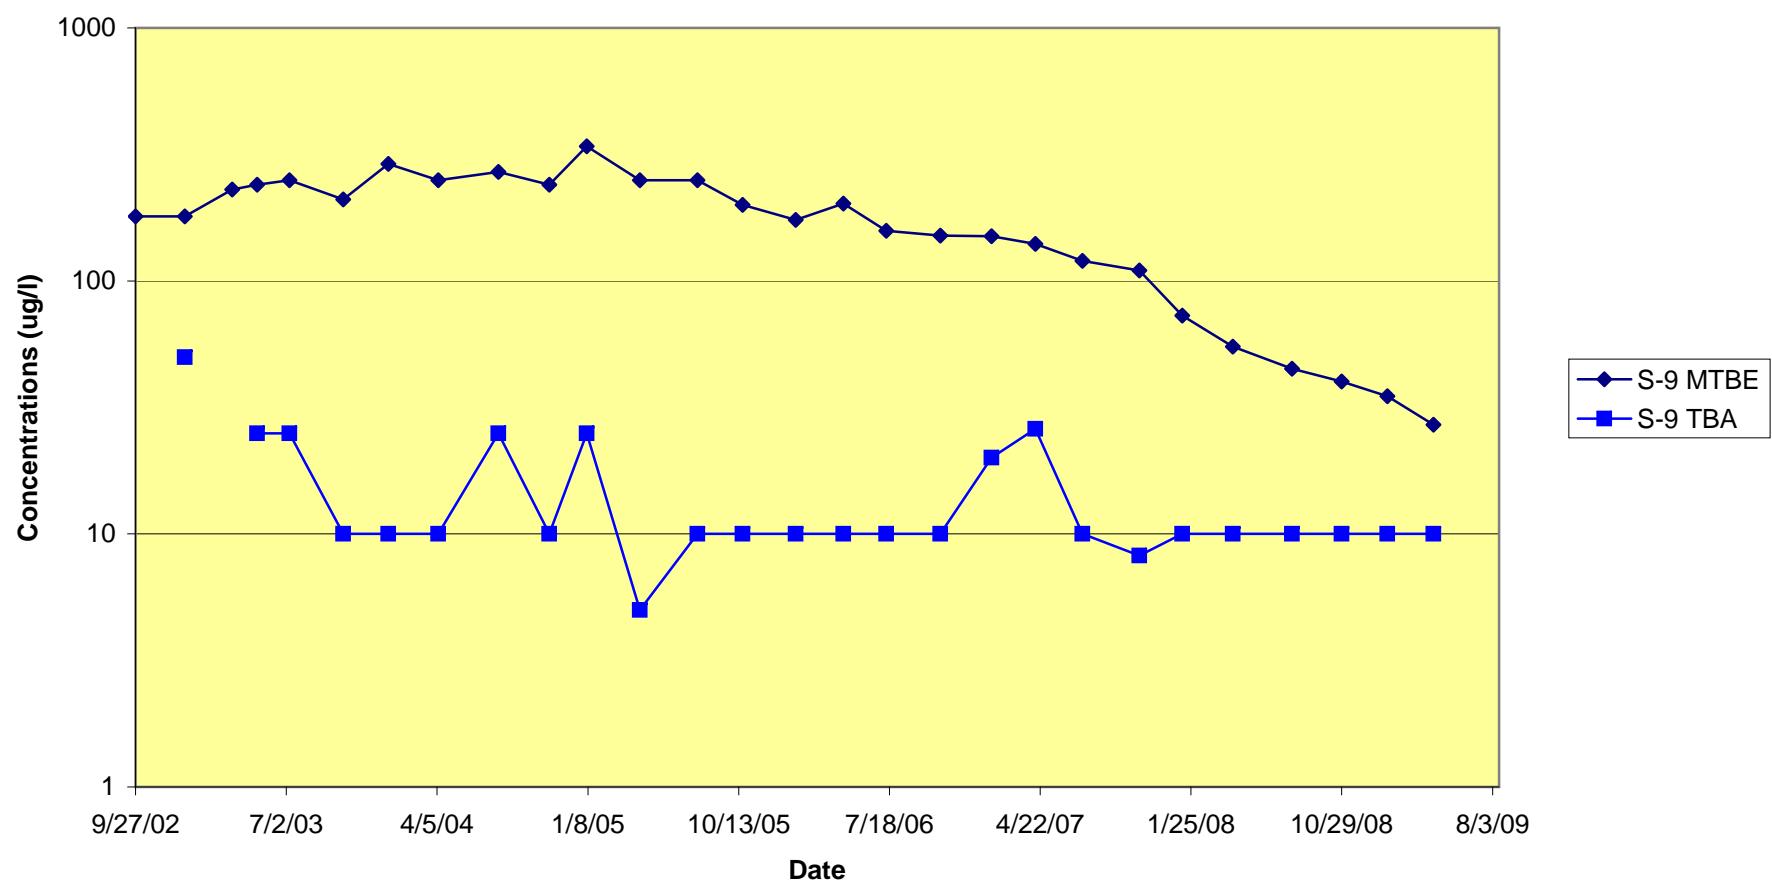

Graph 5
MTBE and TBA Concentrations
Well SR-2
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, California

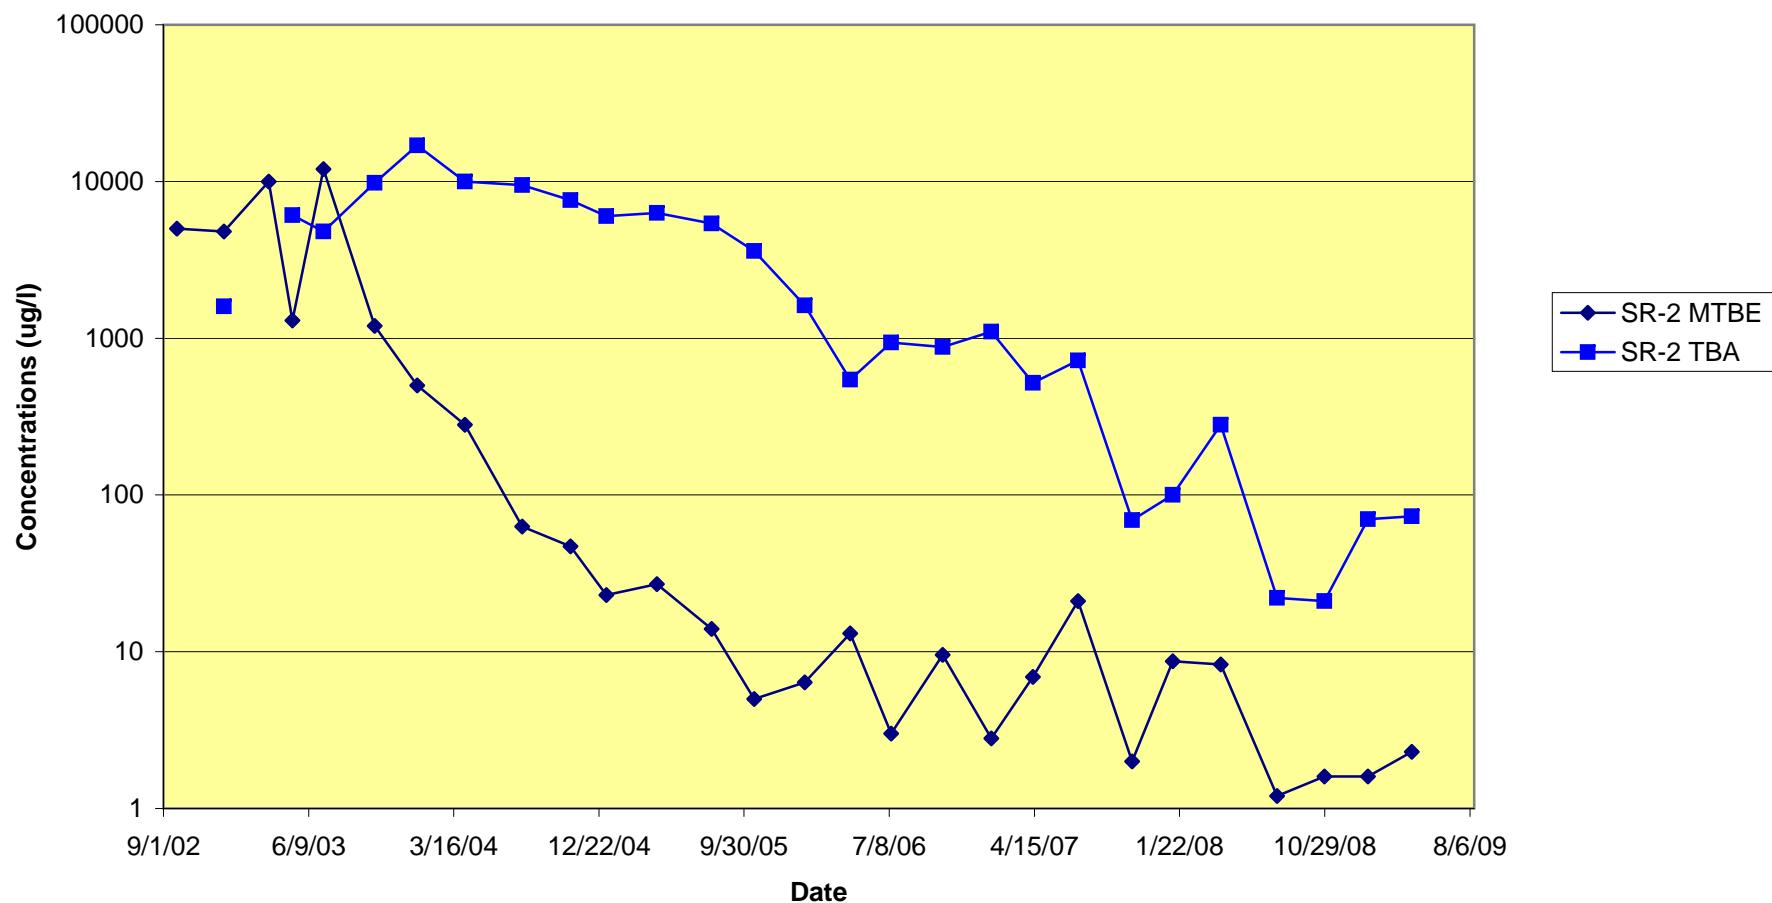

APPENDIX A

BLAINE TECH SERVICES, INC.

FIELD DATA SHEETS

ST S-5C, S-8,

5C, SR-2, 8, SCA, S8

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 3790 Hopyard Rd, Pleasanton, CA Date 4/16/09Job Number 090416-AC1 Technician ACPage 1 of 2

Well ID	Well Inspected / No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes	
									Y	N
S-2	✓								No Tag	
S-3	✓								No Tag	
S-4	✓	✓							No Tag	
S-5	✓								NO TAG	
S-5B	✓								No Tag	
S-5C	✓								NO TAG	
S-6	✓								NO TAG	
S-7	✓								NO TAG	
S-8	✓								NO TAG	
S-9	✓								NO TAG	
S-9B	✓									
S-9C	✓									
S-10	✓									
S-11	✓									
S-12	✓									
S-14	✓									
S-15	✓								Left uncapped and 2 1/2 screws not in place NO TAG	

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes:

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 3790 Hopyard Rd, Pleasanton, CA Date 4/16/09

Job Number 090416-AC1 Technician Ac Page of

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes:

WELL GAUGING DATA

Project # 090416-AC1

Date 4/16/09

Client Shell

Site 3790 Hopyard Rd, Pleasanton, CA

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or <u>FOC</u>	Notes
S-2	0900	3					13.75	34.55		
S-3	0905	3					12.20	35.34		
S-4	0842	3					13.43	35.65		
S-5	0923	3					15.95	36.69		
S-5B	0915	4					29.30	61.45		
S-5C	0920	4					29.29	76.60		
S-6	1105	3	0006				14.35	34.40		
S-7	1100	3					16.72	34.50		
S-8	0930	3					14.95	34.43		
S-9	840	3					17.48	34.52		
S-9B	0845	4					26.10	59.44		
S-9C	0843	4					28.29	78.67		
S-10	1131	3					13.92	34.33		
S-11	1125	2					16.93	24.94		
S-12	0945	2					16.74	24.71		
S-14	0945	4					17.40	24.61		
S-15	1000	4			DRY		24.85	24.46		
							24.42			

WELL GAUGING DATA

Project # 090416-AC Date 4/16/09 Client Shell

Site 3790 Hopyard Rd, Pleasanton, CT

SHELL WELL MONITORING DATA SHEET

BTS #: 090416 - ACR	Site: 98995842
Sampler: KD	Date: 4/16/09
Well I.D.: S-2	Well Diameter: 2 3 4 6 8
Total Well Depth (TD): 34.55	Depth to Water (DTW): 13.75
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PYC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 17.91	

Purge Method: Bailer
 Disposable Bailer
 Positive Air Displacement
 Electric Submersible

Waterra
 Peristaltic
 Extraction Pump
 Other _____

Sampling Method: ✓ Bailer
 Disposable Bailer
 Extraction Port
 Dedicated Tubing

Other: _____

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

7.70 (Gals.) X 3 = 23.09 Gals.
 1 Case Volume Specified Volumes Calculated Volume

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1249	69.1	7.4	1874	46.1	8.0	
	well dewatered at			14.5 gal		DTW 31.81
1350	69.3	7.4	2140	24.6	-	

Did well dewater? Yes No Gallons actually evacuated: 14.5

Sampling Date: 4/16 Sampling Time: 1350 Depth to Water: 14.95

Sample I.D.: S-2 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: see 50w

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-AU	Site: 98995842
Sampler: KO	Date: 4/16/09
Well I.D.: S-3	Well Diameter: 2 3 4 6 8
Total Well Depth (TD): 35.34	Depth to Water (DTW): 12.20
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 16.83	

Purge Method: Bailer
 23.14 Disposable Bailer
 Positive Air Displacement
 Electric Submersible

Waterra Peristaltic Extraction Pump Other _____

Sampling Method: Bailer
 Disposable Bailer Extraction Port Dedicated Tubing

Other: _____

$$\frac{8.56 \text{ (Gals.)} \times 3}{1 \text{ Case Volume}} = \frac{25.69 \text{ Gals.}}{\text{Specified Volumes}} \text{ Calculated Volume}$$

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1008	66.6	7.5	2951	24.7	9.0	
1009 1010	66.9	7.0	3389	11.0	13.0	
	well	dewatered	at 13.0	gal		DTW 32.91
1300	66.5	7.3	3379	17.9	-	

Did well dewater? Yes No Gallons actually evacuated: 18.0

Sampling Date: 4/16 Sampling Time: 1300 Depth to Water: 12.30

Sample I.D.: S-3 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See Sow

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416 - AC1	Site: 909915842
Sampler: BD	Date: 4/16/09
Well I.D.: S.4	Well Diameter: 2 3 4 6 8
Total Well Depth (TD): 35.65	Depth to Water (DTW): 13.43
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 17.87	

Purge Method: Bailer
 22.22 Disposable Bailer
 Positive Air Displacement
 Electric Submersible

Waterra Sampling Method:
 Peristaltic
 Extraction Pump
 Other _____

Bailer
 Disposable Bailer
 Extraction Port
 Dedicated Tubing

Other: _____

			Well Diameter	Multiplier	Well Diameter	Multiplier
8.22	(Gals.) X 3	= 24.66 Gals.	1"	0.04	4"	0.65
1 Case Volume	Specified Volumes	Calculated Volume	2"	0.16	6"	1.47
			3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1241	68.1	7.7	1496	166	8.5	
	well	dewatered at		13 gal		DTW 32.87
1355						
1415	66.9	7.3	1573	46.9	—	

Did well dewater? Yes No Gallons actually evacuated: 13

Sampling Date: 4/16 Sampling Time: 14:15 Depth to Water: 17.87 17.31

Sample I.D.: S.4 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: see SOW

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-Ac,	Site: 98995842	
Sampler: KD	Date: 4/16/09	
Well I.D.: S-5	Well Diameter: 2 ③ 4 6 8	
Total Well Depth (TD): 36.69	Depth to Water (DTW): 15.95	
Depth to Free Product:	Thickness of Free Product (feet):	
Referenced to: PVC	Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 20.10		

Purge Method: Bailer
 20.74 Disposable Bailer
 Positive Air Displacement
 Electric Submersible

Waterra Sampling Method:
 Peristaltic Bailer
 Extraction Pump
 Other _____
 Extraction Port
 Dedicated Tubing

			Well Diameter	Multiplier	Well Diameter	Multiplier
7.67	(Gals.) X	3	1"	0.04	4"	0.65
1 Case Volume	Specified Volumes	= 23.02 Gals.	2"	0.16	6"	1.47
			3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1301	67.3	7.5	1759	67.2	8.0	
	well	dewatered		a 8.0	10.5 gal	DTW 34.03
1355	67.2	7.2	2863	23.0	—	

Did well dewater? Yes No Gallons actually evacuated: 10.5

Sampling Date: 4/16 Sampling Time: 1355 Depth to Water: 17.82

Sample I.D.: S-5 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: see saw

EB I.D. (if applicable): @ time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416	Site: 93995842		
Sampler: KD	Date: 4/16/09		
Well I.D.: S-5B	Well Diameter: 2 3 (4) 6 8		
Total Well Depth (TD): 61.45	Depth to Water (DTW): 29.30		
Depth to Free Product:	Thickness of Free Product (feet):		
Referenced to: PVC	Grade	D.O. Meter (if req'd): YSI	HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 35.73			

Purge Method: Bailer
 32.15 Disposable Bailer
Positive Air Displacement
✓ Electric Submersible

Waterra Sampling Method:
Peristaltic
Extraction Pump
Other _____

✓ Bailer
Disposable Bailer
Extraction Port
Dedicated Tubing

Other: _____

			Well Diameter	Multiplier	Well Diameter	Multiplier
20.90	(Gals.) X	3	1"	0.04	4"	0.65
1 Case Volume	Specified Volumes	= 62.69 Gals.	2"	0.16	6"	1.47
			3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1020	64.6	7.6	4247	33.4	21.0	
1024	65.4	7.5	4241	16.2	42.0	
1027	65.4	7.4	4252	8.1	63.0	

Did well dewater? Yes Gallons actually evacuated: 63.0

Sampling Date: 4/16 Sampling Time: 1030 Depth to Water: 30.24

Sample I.D.: S-5B Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See cow

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
------------------	------------	------	-------------	------

O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV
--------------------	------------	----	-------------	----

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-AC1	Site: 3790 Hopyard Rd, Pleasanton, CA				
Sampler: AC	Date: 4/16/09				
Well I.D.: S-5C	Well Diameter: 2 3 (4) 6 8				
Total Well Depth (TD): 76.60	Depth to Water (DTW): 29.29				
Depth to Free Product:	Thickness of Free Product (feet):				
Referenced to: PVC	Grade	D.O. Meter (if req'd):	YSI	HACH	
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 38.75					

Purge Method:	Bailer	Waterra	Sampling Method:	<input checked="" type="checkbox"/> Bailer
Disposable Bailer		Peristaltic		Disposable Bailer
Positive Air Displacement		Extraction Pump		Extraction Port
<input checked="" type="checkbox"/> Electric Submersible	Other _____			Dedicated Tubing
			Other: _____	

30.8 (Gals.) X	3	=	92.4 Gals.	
1 Case Volume	Specified Volumes	Calculated Volume		

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1235	65.1	8.2	4706	119	30.8	clear
1241	65.0	7.6	4718	37	61.6	"
1247	65.0	7.5	4727	16	92.4	"

Did well dewater? Yes No Gallons actually evacuated: 92.4

Sampling Date: 4/16/09 Sampling Time: 1253 Depth to Water: 29.31

Sample I.D.: S-5C Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
------------------	------------	------	-------------	------

O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV
--------------------	------------	----	-------------	----

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-AC1	Site: 3790 Hopyard Rd, Pleasanton, CA		
Sampler: AC	Date: 4/16/09		
Well I.D.: S-6	Well Diameter: 2 (3) (4) 6 8		
Total Well Depth (TD): 34.40	Depth to Water (DTW): 14.35		
Depth to Free Product:	Thickness of Free Product (feet):		
Referenced to: PVC	Grade	D.O. Meter (if req'd): YSI	HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:			

Purge Method:	Bailer	Waterra	Sampling Method:	<input checked="" type="checkbox"/> Bailer
Disposable Bailer		Peristaltic		Disposable Bailer
Positive Air Displacement		Extraction Pump		Extraction Port
<input checked="" type="checkbox"/> Electric Submersible	Other _____			Dedicated Tubing
			Other: _____	

7.4 (Gals.) X	3	= 22.2 Gals.	Well Diameter	Multiplier	Well Diameter	Multiplier
1 Case Volume	Specified Volumes	Calculated Volume	1"	0.04	4"	0.65
			2"	0.16	6"	1.47
			3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1112	69.8	6.7	2418	472	7.4	slightly cloudy /oder
1113	69.7	6.7	2393	351	14.8	"
1114	69.4	6.7	Dewatered	0	15.2 gals	
1115	69.3	6.8	2304	751	—	cloudy

Did well dewater?	<input checked="" type="checkbox"/> Yes	No	Gallons actually evacuated:	15.2
Sampling Date:	4/16/09	Sampling Time:	1115	Depth to Water: 23.31

Sample I.D.:	S-6	Laboratory:	<input checked="" type="checkbox"/> CalScience	Columbia	Other _____
--------------	-----	-------------	--	----------	-------------

Analyzed for:	TPH-G	BTEX	MTBE	TPH-D	Oxygenates (5)	Other:	See COC
---------------	-------	------	------	-------	----------------	--------	---------

EB I.D. (if applicable):	@	Time	Duplicate I.D. (if applicable):
--------------------------	---	------	---------------------------------

Analyzed for:	TPH-G	BTEX	MTBE	TPH-D	Oxygenates (5)	Other:
---------------	-------	------	------	-------	----------------	--------

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
------------------	------------	------	-------------	------

O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV
--------------------	------------	----	-------------	----

SHELL WELL MONITORING DATA SHEET

BTS #:	090416 - ACI	Site:	98995342
Sampler:	KD	Date:	4/16/09
Well I.D.:	S-7	Well Diameter:	2 <input checked="" type="radio"/> 3 4 6 8
Total Well Depth (TD):	34.50	Depth to Water (DTW):	16.72
Depth to Free Product:		Thickness of Free Product (feet):	
Referenced to:	PVC	Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 20.29			

$$6.61 \text{ (Gals.)} \times 3 = 19.82 \text{ Gals.}$$

1 Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	$\text{radius}^2 * 0.163$

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1105	66.9	7.3	2593	61.3	7.0	
1107	67.3	7.1	2654	347	14.0	
		well decarbonated	at 5 gal			DTW 31.45
1110	67.2	7.0	2650	213	-	

Did well dewater? Yes No Gallons actually evacuated: 15

Sampling Date: 4/16 Sampling Time: 11:16 Depth to Water: 31.45

Sample I.D.: 8-7 Laboratory: CalScience Columbia Other

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: *see sow*

EB LD (if applicable): @ Time Duplicate LD (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-AC1	Site: 3790 Hopyard Rd, Pleasanton, CA		
Sampler: AC	Date: 4/16/09		
Well I.D.: S-8	Well Diameter: 2 3 4 6 8		
Total Well Depth (TD): 34.43	Depth to Water (DTW): 14.95		
Depth to Free Product:	Thickness of Free Product (feet):		
Referenced to: PVC	Grade	D.O. Meter (if req'd): YSI	HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 18.84			

Purge Method:	Bailer	Waterra	Sampling Method:	Bailer
Disposable Bailer		Peristaltic		Disposable Bailer
Positive Air Displacement		Extraction Pump		Extraction Port
Electric Submersible		Other _____		Dedicated Tubing
			Other: _____	

7.2 (Gals.) X	3	=	21.6 Gals.	Well Diameter Multiplier Well Diameter Multiplier
1 Case Volume	Specified Volumes	Calculated Volume	1" 0.04 4" 0.65	
			2" 0.16 6" 1.47	
			3" 0.37 Other radius ² * 0.163	

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1332	67.7	6.9	3459	96	7.2	clear
1333	67.1	6.6	3440	94	14.4	clear
1334	Dewatered	@		15 gals		DTW - 33.51
1341	68.0	7.6	3469	85	2-	clear

Did well dewater? Yes No Gallons actually evacuated: 15

Sampling Date: 4/16/09 Sampling Time: 1341 Depth to Water: 18.79

Sample I.D.: S-8 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See COC

EB I.D. (if applicable): @ Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL WELL MONITORING DATA SHEET

BTS #:	090416-AC1		Site:	98995842	
Sampler:	KD		Date:	4/16/09	
Well I.D.:	S-A		Well Diameter:	2	(3) 4 6 8
Total Well Depth (TD):	34.52		Depth to Water (DTW):	17.40	
Depth to Free Product:			Thickness of Free Product (feet):		
Referenced to:	PVD	Grade	D.O. Meter (if req'd):	YSI	HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 20.89					

Purge Method: Bailer
 Disposable Bailer
 Positive Air Displacement
 Electric Submersible

Waterra
 Peristaltic
 Extraction Pump
 Other _____

Sampling Method:
 Bailer
 Disposable Bailer
 Extraction Port
 Dedicated Tubing

Other: _____

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

6.30 (Gals.) X **3** = **18.91** Gals.
 1 Case Volume Specified Volumes Calculated Volume

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
0853	62.8	7.3	2745	62.1	6.5	
0854	66.5	7.1	2768	27.2	13.0	
0855	67.0	7.1	2781	19.1	19.5	
	* brettin	wanted	for 80%			
	* out of	order,	access issues			

Did well dewater? Yes No Gallons actually evacuated: 19.5

Sampling Date: 4/16 Sampling Time: 0905 Depth to Water: 20.31

Sample I.D.: S-A Laboratory: CatScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: see SOW

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL CELL MONITORING DATA SHEET

BTS #:	090416 - AC1	Site:	98995842
Sampler:	KD	Date:	4/16/09
Well I.D.:	S-9B	Well Diameter:	2 3 <u>4</u> 6 8
Total Well Depth (TD):	59.44	Depth to Water (DTW):	28.10
Depth to Free Product:		Thickness of Free Product (feet):	
Referenced to:	PVC	Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 34.37			

Purge Method: Bailer
 31-34 Disposable Bailer
Positive Air Displacement
 Electric Submersible Waterra
Peristaltic
Extraction Pump
Other _____

Sampling Method: Bailer
Disposable Bailer
Extraction Port
Dedicated Tubing

$$\frac{20.37}{1 \text{ Case Volume}} (\text{Gals.}) X \frac{3}{\text{Specified Volumes}} = \frac{61.11}{\text{Calculated Volume}}$$

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	$\text{radius}^2 * 0.163$

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
0922	66.6	7.8	3044	73.1	20.5	odor
		well	dewatered	at 30 gal		DW 56.88
1325	66.3	7.9	3013	36.1	—	
	* out of order, access issues					

Did well dewater? Yes No Gallons actually evacuated: 30

Sampling Date: 4/16 Sampling Time: 1325 Depth to Water: 52.00 (2 hrs)

Sample I.D.: 89B Laboratory: CalScience Columbia Other

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: sep Sow

EB I.D. (if applicable): @_{Time} Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/l Post-purge: mg/l

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

Blaine Tech Services, Inc. 1680 Rogers Ave., San Jose, CA 95112 (800) 545-7558

SHELL ELL MONITORING DATA SHEET

BTS #: 090416-ACI	Site: 98995942
Sampler: KD	Date: 4/16/09
Well I.D.: S-9C	Well Diameter: 2 3 <input checked="" type="radio"/> 4 6 8
Total Well Depth (TD): 78.67	Depth to Water (DTW): 28.29
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <input checked="" type="radio"/> PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:	39.37

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Did well dewater? Yes No Gallons actually evacuated: 45

Sampling Date: 4/16 Sampling Time: 1315 Depth to Water: 30.68

Sample I.D.: S-9C Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See So w

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-AC1	Site: 3790 Hopyard Rd, Pleasanton, CA		
Sampler: AC	Date: 4/16/09		
Well I.D.: S-10	Well Diameter: 2 (3) 4 6 8		
Total Well Depth (TD): 34.33	Depth to Water (DTW): 13.92		
Depth to Free Product:	Thickness of Free Product (feet):		
Referenced to: PVC	Grade	D.O. Meter (if req'd): YSI	HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 18.60			

Purge Method: Bailer	Waterra	Sampling Method: <input checked="" type="checkbox"/> Bailer																
Disposable Bailer	Peristaltic	Disposable Bailer																
Positive Air Displacement	Extraction Pump	Extraction Port																
<input checked="" type="checkbox"/> Electric Submersible	Other _____	Dedicated Tubing																
Other: _____																		
$\frac{7.6 \text{ (Gals.)} \times 3}{\text{1 Case Volume}} = \frac{22.8 \text{ Gals.}}{\text{Specified Volumes}}$		<table border="1"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier															
1"	0.04	4"	0.65															
2"	0.16	6"	1.47															
3"	0.37	Other	radius ² * 0.163															

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1137	66.9	7.5	1663	240	7.6	slightly cloudy
1138	66.4	6.9	1673	143	15.2	clear
1139	66.9	6.8	1871	457	22.8	slightly cloudy

Did well dewater?	Yes	No	Gallons actually evacuated: 22.8	
Sampling Date:	4/16/09	Sampling Time: 1145	Depth to Water: 24.27	
Sample I.D.:	S-10	Laboratory: CalScience	Columbia Other: _____	
Analyzed for:	TPH-G BTEX MTBE TPH-D	Oxygenates (5)	Other: See COC	
EB I.D. (if applicable):	@ Time	Duplicate I.D. (if applicable):		
Analyzed for:	TPH-G BTEX MTBE TPH-D	Oxygenates (5)	Other:	
D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416 - AC1	Site: 93995842
Sampler: KD	Date: 4/16/09
Well I.D.: S-11	Well Diameter: ② 3 4 6 8 _____
Total Well Depth (TD): 24.94	Depth to Water (DTW): 16.93
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:	18.53

Purge Method: Bailer
 9.0c Disposable Bailer
Positive Air Displacement
Electric Submersible

Waterra
Peristaltic
Extraction Pump
Other _____

Sampling Method: Bailer
Disposable Bailer
Extraction Port
Dedicated Tubing

Other: _____

<u>1.20</u>	(Gals.) X	<u>3</u>	=	<u>3.84</u>	Gals.
1 Case Volume	Specified Volumes		Calculated Volume		

Did well dewater? Yes No Gallons actually evacuated: 4.5

Sampling Date: 4/16 Sampling Time: 1145 Depth to Water: 24.07 (traffic well)

Sample I.D.: 5-1) Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: 50% 50%

EB LD (if applicable): @_{Time} Duplicate LD (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

Blaine Tech Services, Inc. 1680 Rogers Ave., San Jose, CA 95112 (800) 545-7558

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-AC	Site: 3190 Hopyard Rd, Pleasanton, CA		
Sampler: AC	Date: 4/16/09		
Well I.D.: S-12	Well Diameter: (2) 3 4 6 8		
Total Well Depth (TD): 24.71	Depth to Water (DTW): 16.74		
Depth to Free Product:	Thickness of Free Product (feet):		
Referenced to: PVC	Grade	D.O. Meter (if req'd): YSI	HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 18.33			

Purge Method:	Waterra	Sampling Method:	Bailer
Disposable Bailer	Peristaltic	Disposable Bailer	
Positive Air Displacement	Extraction Pump	Extraction Port	
Electric Submersible	Other _____	Dedicated Tubing	
		Other: _____	

1.3 (Gals.) X 3 = 3.9 Gals.	Well Diameter	Multiplier	Well Diameter	Multiplier
1 Case Volume	1"	0.04	4"	0.65
	2"	0.16	6"	1.47
	3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1015	66.3	6.9	2730	313	1.3	slightly cloudy
1017	67.3	6.7	2720	502	3.6	"
1019	67.7	6.6	2716	718	3.9	cloudy

Did well dewater? Yes No Gallons actually evacuated: 3.9

Sampling Date: 4/16/09 Sampling Time: 1025 Depth to Water: 17.98

Sample I.D.: S-12 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See COC

EB I.D. (if applicable): [@] Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL WELL MONITORING DATA SHEET

BTS #: 090416-AC1	Site: 98995842		
Sampler: KD	Date: 4/16/09		
Well I.D.: S-14	Well Diameter: 2 3 (4) 6 8		
Total Well Depth (TD): 24.61	Depth to Water (DTW): 17.40		
Depth to Free Product:	Thickness of Free Product (feet):		
Referenced to: (PVC)	Grade	D.O. Meter (if req'd):	YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 19.84			

Purge Method:	Bailer	Waterra	Sampling Method:	✓ Bailer
7.21	Disposable Bailer	Peristaltic		Disposable Bailer
	Positive Air Displacement	Extraction Pump		Extraction Port
	✓ Electric Submersible	Other _____		Dedicated Tubing
			Other: _____	
4.69	(Gals.) X 3 = 14.06 Gals.		Well Diameter Multiplier Well Diameter Multiplier	
1 Case Volume	Specified Volumes	Calculated Volume	1" 0.04 4" 0.65	
			2" 0.16 6" 1.47	
			3" 0.37 Other radius ² * 0.163	

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1224	63.9	7.6	4237	86.4	5.0	
	well	dewatered at		8.5 gal		DTW 22.10
1335	63.0	7.7	4080	24.6	—	

Did well dewater? Yes No Gallons actually evacuated: 8.5

Sampling Date: 4/16 Sampling Time: 1335 Depth to Water: 18.68

Sample I.D.: S-14 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See Gow

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHELL ELL MONITORING DATA SHEET

BTS #: 090416-AC1	Site: 3790 Hopyard Rd, Pleasanton, CA			
Sampler: AC	Date: 4/16/09			
Well I.D.: S-15	Well Diameter: 2 3 4 6 8			
Total Well Depth (TD): 24.46	Depth to Water (DTW): 24.42			
Depth to Free Product:	Thickness of Free Product (feet):			
Referenced to: PVC	Grade	D.O. Meter (if req'd):	YSI	HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:				

Purge Method:	Bailer	Waterra	Sampling Method:	<input checked="" type="checkbox"/> Bailer																
	Disposable Bailer	Peristaltic		<input type="checkbox"/> Disposable Bailer																
	Positive Air Displacement	Extraction Pump		<input type="checkbox"/> Extraction Port																
	Electric Submersible	Other		<input type="checkbox"/> Dedicated Tubing																
			Other:																	
<input checked="" type="checkbox"/> (Gals.) X <u>3</u> = <u>1</u> Gals. 1 Case Volume Specified Volumes Calculated Volume		<table border="1"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>			Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier																	
1"	0.04	4"	0.65																	
2"	0.16	6"	1.47																	
3"	0.37	Other	radius ² * 0.163																	

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
<i>In sufficient water to sample</i>						

Did well dewater? Yes No Gallons actually evacuated:

Sampling Date: 4/16/09 Sampling Time: Depth to Water:

Sample I.D.: S-15 Laboratory: CalScience Columbia Other

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See COC

EB I.D. (if applicable): @ Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHEI ELL MONITORING DATA SHEET

Purge Method: Bailer
Disposable Bailer
Positive Air Displacement
 Electric Submersible Waterra
Peristaltic
Extraction Pump
Other _____

Sampling Method: Bailer
Disposable Bailer
Extraction Port
Dedicated Tubing
Other: _____

<u>12.2</u> (Gals.) X <u>3</u> = <u>36.6</u> Gals.	Well Diameter	Multiplier	Well Diameter	Multiplier
1 Case Volume	1"	0.04	4"	0.65
Specified Volumes	2"	0.16	6"	1.47
Calculated Volume	3"	0.37	Other	$\text{radius}^2 * 0.163$

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1355	70.9	7.3	3416	58	12.2	clear
1357	71.3	6.7	3449	60	24.4	"
1359	70.9	6.7	3431	95	36.6	"

Did well dewater? Yes No Gallons actually evacuated: 36.6

Sampling Date: 4/16/09 Sampling Time: 1425 Depth to Water: 16.75

Sample I.D.: SR-1 Laboratory: CalScience Columbia Other

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: Gas Oil

EB I.D. (if applicable): @ Time _____ Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/l Post-purge:

O.R.P. (if req'd): Pre-purge: mV Post-purge:

Post-purge.

SHELL MONITORING DATA SHEET

BTS #:	090416-AC1		Site:	3790 Hopyard Rd, Pleasanton, CA				
Sampler:	AC1		Date:	4/16/09				
Well I.D.:	SR-2		Well Diameter:	2	3	(4)	6	8
Total Well Depth (TD):	33.77		Depth to Water (DTW):	12.64				
Depth to Free Product:			Thickness of Free Product (feet):					
Referenced to:	(PVC)	Grade	D.O. Meter (if req'd):	YSI	HACH			
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:					16.86			

Purge Method:	Bailer	Waterra	Sampling Method:	<input checked="" type="checkbox"/> Bailer
Disposable Bailer		Peristaltic		Disposable Bailer
Positive Air Displacement		Extraction Pump		Extraction Port
<input checked="" type="checkbox"/> Electric Submersible		Other _____		Dedicated Tubing
			Other: _____	

1 Case Volume	13.7 (Gals.) X 3 Specified Volumes	= 41.1 Calculated Volume	Well Diameter	Multiplier	Well Diameter	Multiplier
			1"	0.04	4"	0.65
			2"	0.16	6"	1.47
			3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or μS)	Turbidity (NTUs)	Gals. Removed	Observations
1306	66.7	7.2	1863	455	41.1	slightly cloudy
1308	68.1	7.0	1648	67	27.4	clear
1310	68.9	7.0	1721	108	108 41.1	DTW - 19.93

Did well dewater? Yes No Gallons actually evacuated: 41.1

Sampling Date: 4/16/09 Sampling Time: 1320 Depth to Water: 16.81

Sample I.D.: SR-2 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See COC

EB I.D. (if applicable): @ Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd): Pre-purge: mg/L Post-purge: mg/L

O.R.P. (if req'd): Pre-purge: mV Post-purge: mV

SHEI ELL MONITORING DATA SHEET

BTS #:	090416-AC1	Site:	3790 Hopyard Rd, Pleasanton, CA				
Sampler:	AC1	Date:	4/16/09				
Well I.D.:	SR-3	Well Diameter:	2	3	(4)	6	8
Total Well Depth (TD):	33.27	Depth to Water (DTW):	12.49				
Depth to Free Product:		Thickness of Free Product (feet):					
Referenced to:	PVC	Grade	D.O. Meter (if req'd):	YSI	HACH		
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:			16.64				

Purge Method: Bailer
Disposable Bailer
Positive Air Displacement
 Electric Submersible Waterra
Peristaltic
Extraction Pump
Other _____

Sampling Method: Bailer
Disposable Bailer
Extraction Port
Dedicated Tubing
Other: _____

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	$\text{radius}^2 * 0.163$

Time	Temp (°F)	pH	Cond. (mS or μ S)	Turbidity (NTUs)	Gals. Removed	Observations
1415	70.1	7.3	1631	72	13.5	clear / odor
1417	70.3	6.9	1558	50	27	"
1419	70.4	6.9	1599	40	40.5	"

Did well dewater? Yes No Gallons actually evacuated: 40,5

Sampling Date: 4/16/09 Sampling Time: 13:14:40 Depth to Water: 15.91

Sample I.D.: SR-3 Laboratory: CalScience Columbia Other

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: See COS

EB I.D. (if applicable): @
Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:		^{mg} /L	Post-purge:		^{mg} /L
O.R.P. (if req'd):	Pre-purge:		mV	Post-purge:		mV

APPENDIX B

BLAINE TECH SERVICES, INC.

FIELD PROCEDURES

BLAINE
TECH SERVICES INC.

GROUNDWATER SAMPLING SPECIALISTS
SINCE 1985

May 5, 2009

Denis Brown
Shell Oil Products US
20945 South Wilmington Avenue
Carson, CA 90810

Second Quarter 2009 Groundwater Monitoring at
Shell-branded Service Station
3790 Hopyard Road
Pleasanton, CA

Monitoring performed on April 16, 2009

Groundwater Monitoring Report **090416-AC-1**

This report covers the routine monitoring of groundwater wells at this Shell-branded facility. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purgewater (if applicable) is, likewise, collected and transported to the Martinez Refining Company.

Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight-hour refresher courses.

SAN JOSE

SACRAMENTO

LOS ANGELES

SAN DIEGO

SEATTLE

1680 ROGERS AVENUE SAN JOSE, CA (408) 573-0555 FAX (408) 573-7771 LIC. 746684 www.blainetech.com

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. Our activities at this site consisted of objective data and sample collection only. No interpretation of analytical results, defining of hydrological conditions or formulation of recommendations was performed.

Please call if you have any questions.

Yours truly,



Mike Ninokata
Project Manager

MN/tm

attachments: Cumulative Table of WELL CONCENTRATIONS
Certified Analytical Report
Field Data Sheets

cc: Regina Bussard
Delta Environmental
911 S. Primrose Ave., Suite K
Monrovia, CA 91016

SAN JOSE

SACRAMENTO

LOS ANGELES

SAN DIEGO

SEATTLE

1680 ROGERS AVENUE SAN JOSE, CA (408) 573-0555 FAX (408) 573-7771 LIC. 746684 www.blainetech.com

**BLAINE TECH SERVICES, INC.
METHODS AND PROCEDURES
FOR THE ROUTINE MONITORING OF
GROUNDWATER WELLS AT SHELL SITES**

Blaine Tech Services, Inc. performs environmental sampling and documentation as an independent third party. We specialize in groundwater monitoring assignments and intentionally limit the scope of our services to those centered on the generation of objective information.

To avoid conflicts of interest, Blaine Tech Services, Inc. personnel do not evaluate or interpret the information we collect. As a state licensed contractor (C-57 well drilling –water – 746684) performing strictly technical services, we do not make any professional recommendations and perform no consulting of any kind.

SAMPLING PROCEDURES OVERVIEW

SAFETY

All groundwater monitoring assignments performed for Shell comply with Shell's safety guidelines, 29 CFR 1910.120 and SB-198 Injury and Illness Prevention Program (IIPP). All Field Technicians receive the full 40-hour 29CFR 1910.120 OSHA SARA HAZWOPER course, medical clearance and on-the-job training prior to commencing any work on any Shell site.

INSPECTION AND GAUGING

Wells are inspected prior to evacuation and sampling. The condition of the wellhead is checked and noted according to a wellhead inspection checklist.

Standard measurements include the depth to water (DTW) and the total well depth (TD) obtained with industry standard electronic water level indicators that are graduated in increments of hundredths of a foot.

The water in each well is inspected for the presence of immiscibles. When free product is suspected, its presence is confirmed using an electronic interface probe (e.g. MMC). No samples are collected from a well containing over two-hundredths of a foot (0.02') of product.

EVACUATION

Depth to water measurements are collected by our personnel prior to purging and minimum purge volumes are calculated anew for each well based on the height of the water column and the diameter of the well. Expected purge volumes are never less than three case volumes and are set at no less than four case volumes in some jurisdictions.

Well purging devices are selected on the basis of the well diameter and the total volume to be evacuated. In most cases the well will be purged using an electric submersible pump (i.e. Grundfos) suspended near (but not touching) the bottom of the well.

PARAMETER STABILIZATION

Well purging completion standards include minimum purge volumes, but additionally require stabilization of specific groundwater parameters prior to sample collection. Typical groundwater parameters used to measure stability are electrical conductivity, pH, and temperature. Instrument readings are obtained at regular intervals during the evacuation process (no less than once per case volume).

Stabilization standards for routine quarterly monitoring of fuel sites include the following: Temperature is considered to have stabilized when successive readings do not fluctuate more than +/- 1 degree Celsius. Electrical conductivity is considered stable when successive readings are within 10%. pH is considered to be stable when successive readings remain constant or vary no more than 0.2 of a pH unit.

DEWATERED WELLS

Normal evacuation removes no less than three case volumes of water from the well. However, less water may be removed in cases where the well dewatered and does not immediately recharge.

MEASURING RECHARGE

Upon completion of well purging, a depth to water measurement is collected and notated to ensure that the well has recharged to within 80% of its static, pre-purge level prior to sampling.

Wells that do not immediately show 80% recharge or dewatered wells will be allowed a minimum of 2 hours to recharge prior to sampling. The water level at time of sampling will be noted.

PURGEWATER CONTAINMENT

All non-hazardous purgewater evacuated from each groundwater monitoring well is captured and contained in on-board storage tanks on the Sampling Vehicle and/or special water hauling trailers. Effluent from the decontamination of reusable apparatus (sounders, electric pumps and hoses etc.), consisting of groundwater combined with deionized water and non-phosphate soap, is also captured and pumped into effluent tanks.

Non-hazardous purgewater is transported under standard Bill of Lading documentation to a Blaine Tech Services, Inc. facility before being transported to a Shell approved disposal facility.

SAMPLE COLLECTION DEVICES

All samples are collected using a stainless steel, Teflon or disposable bailers.

SAMPLE CONTAINERS

Sample material is decanted directly from the sampling bailer into sample containers provided by the laboratory that will analyze the samples. The transfer of sample material from the bailer to the sample container conforms to specifications contained in the USEPA T.E.G.D. The type of sample container, material of construction, method of closure and filling requirements are specific to the intended analysis. Chemicals needed to preserve the sample material are commonly placed inside the sample containers by the laboratory or glassware vendor prior to delivery of the bottle to our personnel. The laboratory sets the number of replicate containers.

TRIP BLANKS

Trip Blanks, if requested, are taken to the site and kept inside the sample cooler for the duration of the event. They are turned over to the laboratory for analysis with the samples from that site.

DUPликATES

Duplicates, if requested, may be collected at a site. The Field Technician uses their discretion in choosing the well at which the Duplicate is collected, typically one suspected of containing measurable contaminants. The Duplicate sample is labeled "DUP" and the time of collection is omitted from the COC, thus rendering the sample blind.

SAMPLE STORAGE

All sample containers are promptly placed in food grade ice chests for storage in the field and transport (direct or via our facility) to the designated analytical laboratory. These ice chests contain quantities of restaurant grade ice as a refrigerant material. The samples are maintained in either an ice chest or a refrigerator until relinquished into the custody of the laboratory or laboratory courier.

DOCUMENTATION CONVENTIONS

A label must be affixed to all sample containers. In most cases these labels are generated by our office personnel and are partially preprinted. Labels can also be hand written by our field personnel. The site is identified with the store number and site address, as is the particular groundwater well from which the sample is drawn (e.g. MW-1, MW-2, S-1 etc.). The time and date of sample collection along with the initials of the person who collects the sample are handwritten onto the label.

Chain of Custody records are created using client specific preprinted forms following USEPA specifications.

Bill of Lading records are contemporaneous records created in the field at the site where the non-hazardous purgewater is generated. Field Technicians use preprinted Bill of Lading forms.

DECONTAMINATION

All equipment is brought to the site in clean and serviceable condition and is cleaned after use in each well and before subsequent use in any other well. Equipment is decontaminated before leaving the site.

The primary decontamination device is a commercial steam cleaner. The steam cleaner is detuned to function as a hot pressure washer that is then operated with high quality deionized water that is produced at our facility and stored onboard our sampling vehicle. Cleaning is facilitated by the use of proprietary fixtures and devices included in the patented workstation (U.S. Patent 5,535,775) that is incorporated in each sampling vehicle. The steam cleaner is used to decon reels, pumps and bailers.

Any sensitive equipment or parts (i.e. Dissolved Oxygen sensor membrane, water level indicator, etc.) that cannot be washed using the high pressure water, will be sprayed with a non-phosphate soap and deionized water solution and rinsed with deionized water.

DISSOLVED OXYGEN READINGS

Dissolved Oxygen readings are taken pre- and/or post-purge using YSI meters (e.g. YSI Model 54, 58 or 95) or HACH field test kits.

The YSI meters are equipped with a stirring device that enables them to collect accurate in-situ readings. The probe/stirring devices are modified to allow downhole measurements to be taken from wells with diameters as small as two inches. The probe and reel is decontaminated between wells as described above. The meter is calibrated between wells as per the instructions in the operating manual. The probe and stirrer is lowered into the water column. The reading is allowed to stabilize prior to collection.

OXYIDATON REDUCTION POTENTIAL READINGS


All readings are obtained with either Corning or Myron-L meters (e.g. Corning ORP-65 or a Myron-L Ultrameter GP). The meter is cleaned between wells as described above. The meter is calibrated at the start of each day according to the instruction manual.

FERROUS IRON MEASUREMENTS

All field measurements are collected at time of sampling with a HACH test kit.

APPENDIX C

LABORATORY REPORT AND CHAIN-OF-CUSTODY DOCUMENTATION

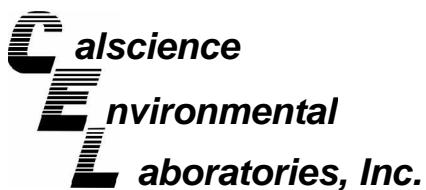

May 01, 2009

Michael Ninokata
Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Subject: **Calscience Work Order No.: 09-04-1668**
Client Reference: 3790 Hopyard Rd., Pleasanton, CA

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 4/18/2009 and analyzed in accordance with the attached chain-of-custody.


Unless otherwise noted, all analytical testing was accomplished in accordance with the guidelines established in our Quality Systems Manual, applicable standard operating procedures, and other related documentation. The original report of subcontracted analysis, if any, is provided herein, and follows the standard Calscience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.

If you have any questions regarding this report, please do not hesitate to contact the undersigned.

Sincerely,


A handwritten signature in black ink that reads "Philip Lamelle for Jessie Lee".

Calscience Environmental
Laboratories, Inc.
Jessie Lee
Project Manager



CA-ELAP ID: 1230 · NELAP ID: 03220CA · CSDLAC ID: 10109 · SCAQMD ID: 93LA0830

7440 Lincoln Way, Garden Grove, CA 92841-1427 · TEL:(714) 895-5494 · FAX: (714) 894-7501

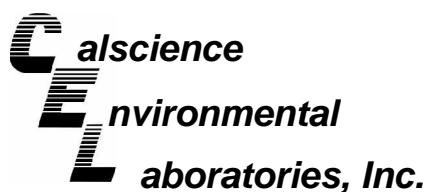

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 1 of 7

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-2	09-04-1668-1-A	04/16/09 13:50	Aqueous	GC/MS RR	04/29/09	04/29/09 18:47	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	54	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	21	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	1.2	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	3.0	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	88	1.0	1		TPPH	2100	50	1	
Tert-Butyl Alcohol (TBA)	930	20	2						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	100	74-140			1,2-Dichloroethane-d4	104	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	102	74-110							

S-3	09-04-1668-2-A	04/16/09 13:00	Aqueous	GC/MS RR	04/29/09	04/29/09 17:31	090429L01
-----	----------------	----------------	---------	----------	----------	----------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	100	74-140			1,2-Dichloroethane-d4	104	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	98	74-110							

S-4	09-04-1668-3-A	04/16/09 14:15	Aqueous	GC/MS RR	04/29/09	04/29/09 19:12	090429L01
-----	----------------	----------------	---------	----------	----------	----------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	3.4	2.5	5		Diisopropyl Ether (DIPE)	ND	10	5	
Ethylbenzene	14	5.0	5		Ethyl-t-Butyl Ether (ETBE)	ND	10	5	
Toluene	ND	5.0	5		Tert-Amyl-Methyl Ether (TAME)	ND	10	5	
Xylenes (total)	ND	5.0	5		Ethanol	ND	500	5	
Methyl-t-Butyl Ether (MTBE)	29	5.0	5		TPPH	680	250	5	
Tert-Butyl Alcohol (TBA)	2200	50	5						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	101	74-140			1,2-Dichloroethane-d4	107	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	99	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 2 of 7

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-5	09-04-1668-4-A	04/16/09 13:55	Aqueous	GC/MS RR	04/29/09	04/29/09 19:38	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	1.3	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	2.7	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	1.4	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	11	1.0	1		TPPH	280	50	1	
Tert-Butyl Alcohol (TBA)	35	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	101	74-140			1,2-Dichloroethane-d4	107	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	101	74-110							


S-5B	09-04-1668-5-A	04/16/09 10:30	Aqueous	GC/MS RR	04/29/09	04/29/09 20:03	090429L01
------	----------------	----------------	---------	----------	----------	----------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	14	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	102	74-140			1,2-Dichloroethane-d4	107	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	94	88-112		
1,4-Bromofluorobenzene	98	74-110							

S-5C	09-04-1668-6-A	04/16/09 12:53	Aqueous	GC/MS RR	04/29/09	04/29/09 20:28	090429L01
------	----------------	----------------	---------	----------	----------	----------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	102	74-140			1,2-Dichloroethane-d4	106	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	99	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

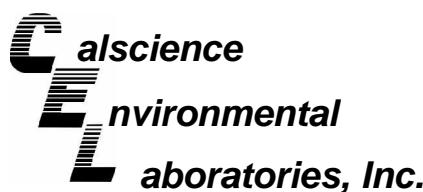

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 3 of 7

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-6	09-04-1668-7-A	04/16/09 11:15	Aqueous	GC/MS RR	04/29/09	04/29/09 20:53	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	2.5	5		Diisopropyl Ether (DIPE)	ND	10	5	
Ethylbenzene	ND	5.0	5		Ethyl-t-Butyl Ether (ETBE)	ND	10	5	
Toluene	ND	5.0	5		Tert-Amyl-Methyl Ether (TAME)	ND	10	5	
Xylenes (total)	ND	5.0	5		Ethanol	ND	500	5	
Methyl-t-Butyl Ether (MTBE)	13	5.0	5		TPPH	840	250	5	
Tert-Butyl Alcohol (TBA)	4000	50	5						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	102	74-140			1,2-Dichloroethane-d4	111	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	98	74-110							


S-7	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
	09-04-1668-8-A	04/16/09 11:10	Aqueous	GC/MS RR	04/29/09	04/29/09 21:18	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	19	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	104	74-140			1,2-Dichloroethane-d4	109	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	98	74-110							

S-8	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
	09-04-1668-9-A	04/16/09 13:41	Aqueous	GC/MS RR	04/29/09	04/29/09 21:43	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	8.1	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	110	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	94	88-112		
1,4-Bromofluorobenzene	97	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

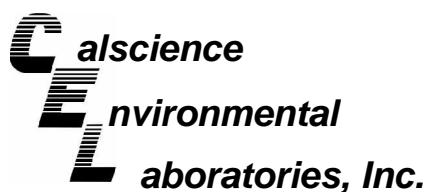

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 4 of 7

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-9	09-04-1668-10-A	04/16/09 09:05	Aqueous	GC/MS RR	04/29/09	04/29/09 22:08	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	27	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	110	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	99	74-110							

S-9B	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
	09-04-1668-11-A	04/16/09 13:25	Aqueous	GC/MS RR	04/29/09	04/29/09 22:33	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	3.1	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	104	74-140			1,2-Dichloroethane-d4	113	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	99	74-110							

S-9C	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
	09-04-1668-12-A	04/16/09 13:15	Aqueous	GC/MS RR	04/29/09	04/29/09 22:59	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	104	74-140			1,2-Dichloroethane-d4	113	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	99	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 5 of 7

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-10	09-04-1668-13-A	04/16/09 11:45	Aqueous	GC/MS RR	04/29/09	04/29/09 23:24	090429L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	104	74-140			1,2-Dichloroethane-d4	113	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	98	74-110							


S-11	09-04-1668-14-A	04/16/09 11:45	Aqueous	GC/MS RR	04/29/09	04/30/09 05:41	090429L02
------	-----------------	-------------------	---------	----------	----------	-------------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	20	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	105	74-140			1,2-Dichloroethane-d4	114	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	98	74-110							

S-12	09-04-1668-15-C	04/16/09 10:25	Aqueous	GC/MS RR	04/29/09	04/30/09 06:06	090429L02
------	-----------------	-------------------	---------	----------	----------	-------------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	107	74-140			1,2-Dichloroethane-d4	116	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	98	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

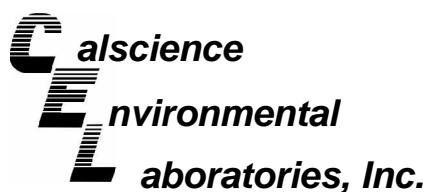

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 6 of 7

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-14	09-04-1668-16-A	04/16/09 13:35	Aqueous	GC/MS RR	04/29/09	04/30/09 04:25	090429L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	105	74-140			1,2-Dichloroethane-d4	115	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	97	74-110							

SR-1	09-04-1668-17-A	04/16/09 14:25	Aqueous	GC/MS RR	04/29/09	04/30/09 06:31	090429L02
------	-----------------	----------------	---------	----------	----------	----------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	8.0	1.0	1		TPPH	62	50	1	
Tert-Butyl Alcohol (TBA)	38	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	107	74-140			1,2-Dichloroethane-d4	116	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	99	74-110							

SR-2	09-04-1668-18-A	04/16/09 13:20	Aqueous	GC/MS RR	04/29/09	04/30/09 06:56	090429L02
------	-----------------	----------------	---------	----------	----------	----------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	2.3	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	73	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	107	74-140			1,2-Dichloroethane-d4	119	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	96	88-112		
1,4-Bromofluorobenzene	98	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B
Units: ug/L

Project: 3790 Hopyard Rd., Pleasanton, CA

Page 7 of 7

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
SR-3	09-04-1668-19-A	04/16/09 14:40	Aqueous	GC/MS RR	04/29/09	04/30/09 07:21	090429L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	0.59	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	5.8	1.0	1		TPPH	80	50	1	
Tert-Butyl Alcohol (TBA)	320	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	106	74-140			1,2-Dichloroethane-d4	116	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	97	88-112		
1,4-Bromofluorobenzene	98	74-110							


Method Blank	099-12-767-1,667	N/A	Aqueous	GC/MS RR	04/29/09	04/29/09 17:06	090429L01
--------------	------------------	-----	---------	----------	----------	-------------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	98	74-140			1,2-Dichloroethane-d4	102	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	98	74-110							

Method Blank	099-12-767-1,670	N/A	Aqueous	GC/MS RR	04/29/09	04/30/09 04:01	090429L02
--------------	------------------	-----	---------	----------	----------	-------------------	-----------

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Diisopropyl Ether (DIPE)	ND	2.0	1	
Ethylbenzene	ND	1.0	1		Ethyl-t-Butyl Ether (ETBE)	ND	2.0	1	
Toluene	ND	1.0	1		Tert-Amyl-Methyl Ether (TAME)	ND	2.0	1	
Xylenes (total)	ND	1.0	1		Ethanol	ND	100	1	
Methyl-t-Butyl Ether (MTBE)	ND	1.0	1		TPPH	ND	50	1	
Tert-Butyl Alcohol (TBA)	ND	10	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	103	74-140			1,2-Dichloroethane-d4	112	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	95	88-112		
1,4-Bromofluorobenzene	97	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

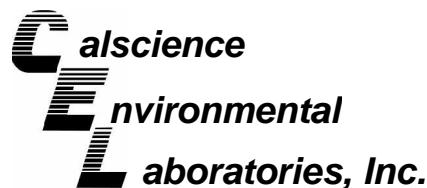

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project 3790 Hopyard Rd., Pleasanton, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-3	Aqueous	GC/MS RR	04/29/09	04/29/09	090429S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	96	98	88-118	2	0-7	
Carbon Tetrachloride	98	102	67-145	3	0-11	
Chlorobenzene	96	96	88-118	0	0-7	
1,2-Dibromoethane	94	100	70-130	6	0-30	
1,2-Dichlorobenzene	95	95	86-116	0	0-8	
1,1-Dichloroethene	102	105	70-130	3	0-25	
Ethylbenzene	98	97	70-130	1	0-30	
Toluene	98	97	87-123	1	0-8	
Trichloroethene	96	95	79-127	1	0-10	
Vinyl Chloride	101	98	69-129	3	0-13	
Methyl-t-Butyl Ether (MTBE)	95	101	71-131	6	0-13	
Tert-Butyl Alcohol (TBA)	102	95	36-168	7	0-45	
Diisopropyl Ether (DIPE)	97	100	81-123	3	0-9	
Ethyl-t-Butyl Ether (ETBE)	95	100	72-126	5	0-12	
Tert-Amyl-Methyl Ether (TAME)	95	101	72-126	5	0-12	
Ethanol	112	107	53-149	4	0-31	

RPD - Relative Percent Difference , CL - Control Limit



7440 Lincoln Way, Garden Grove, CA 92841-1427 . TEL:(714) 895-5494 . FAX: (714) 894-7501

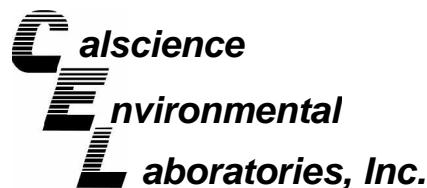

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 04/18/09
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project 3790 Hopyard Rd., Pleasanton, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-14	Aqueous	GC/MS RR	04/29/09	04/30/09	090429S02

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	97	99	88-118	1	0-7	
Carbon Tetrachloride	102	107	67-145	5	0-11	
Chlorobenzene	93	95	88-118	2	0-7	
1,2-Dibromoethane	100	101	70-130	1	0-30	
1,2-Dichlorobenzene	90	93	86-116	2	0-8	
1,1-Dichloroethene	118	120	70-130	2	0-25	
Ethylbenzene	95	97	70-130	2	0-30	
Toluene	95	97	87-123	1	0-8	
Trichloroethene	95	95	79-127	0	0-10	
Vinyl Chloride	113	93	69-129	19	0-13	4
Methyl-t-Butyl Ether (MTBE)	101	103	71-131	2	0-13	
Tert-Butyl Alcohol (TBA)	95	98	36-168	4	0-45	
Diisopropyl Ether (DIPE)	101	102	81-123	1	0-9	
Ethyl-t-Butyl Ether (ETBE)	97	100	72-126	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	98	100	72-126	2	0-12	
Ethanol	122	138	53-149	13	0-31	

RPD - Relative Percent Difference , CL - Control Limit



7440 Lincoln Way, Garden Grove, CA 92841-1427 . TEL:(714) 895-5494 . FAX: (714) 894-7501

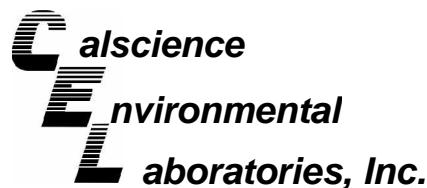

Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project: 3790 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed		LCS/LCSD Batch Number	
099-12-767-1,667	Aqueous	GC/MS RR	04/29/09	04/29/09		090429L01	
Parameter	LCS %REC	LCSD %REC	%REC CL	ME CL	RPD	RPD CL	Qualifiers
Benzene	99	98	84-120	78-126	1	0-8	
Carbon Tetrachloride	105	103	63-147	49-161	2	0-10	
Chlorobenzene	98	97	89-119	84-124	1	0-7	
1,2-Dibromoethane	104	102	80-120	73-127	3	0-20	
1,2-Dichlorobenzene	96	96	89-119	84-124	0	0-9	
1,1-Dichloroethene	106	104	77-125	69-133	1	0-16	
Ethylbenzene	100	99	80-120	73-127	1	0-20	
Toluene	98	97	83-125	76-132	1	0-9	
Trichloroethene	99	97	89-119	84-124	2	0-8	
Vinyl Chloride	91	96	63-135	51-147	5	0-13	
Methyl-t-Butyl Ether (MTBE)	103	101	82-118	76-124	2	0-13	
Tert-Butyl Alcohol (TBA)	95	95	46-154	28-172	0	0-32	
Diisopropyl Ether (DIPE)	100	99	81-123	74-130	1	0-11	
Ethyl-t-Butyl Ether (ETBE)	100	99	74-122	66-130	1	0-12	
Tert-Amyl-Methyl Ether (TAME)	100	99	76-124	68-132	1	0-10	
Ethanol	99	97	60-138	47-151	2	0-32	
TPPH	78	82	65-135	53-147	4	0-30	

Total number of LCS compounds : 17


Total number of ME compounds : 0

Total number of ME compounds allowed : 1

LCS ME CL validation result : Pass

RPD - Relative Percent Difference , CL - Control Limit



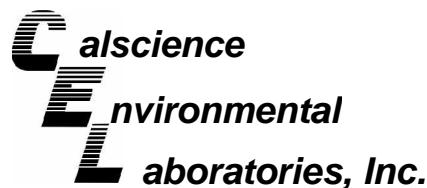

Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 09-04-1668
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project: 3790 Hopyard Rd., Pleasanton, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed		LCS/LCSD Batch Number	
099-12-767-1,670	Aqueous	GC/MS RR	04/29/09	04/30/09		090429L02	
Parameter	LCS %REC	LCSD %REC	%REC CL	ME CL	RPD	RPD CL	Qualifiers
Benzene	97	98	84-120	78-126	1	0-8	
Carbon Tetrachloride	102	104	63-147	49-161	1	0-10	
Chlorobenzene	94	94	89-119	84-124	0	0-7	
1,2-Dibromoethane	100	100	80-120	73-127	1	0-20	
1,2-Dichlorobenzene	92	91	89-119	84-124	1	0-9	
1,1-Dichloroethene	115	115	77-125	69-133	0	0-16	
Ethylbenzene	96	96	80-120	73-127	1	0-20	
Toluene	95	96	83-125	76-132	0	0-9	
Trichloroethene	98	98	89-119	84-124	1	0-8	
Vinyl Chloride	116	113	63-135	51-147	3	0-13	
Methyl-t-Butyl Ether (MTBE)	99	100	82-118	76-124	1	0-13	
Tert-Butyl Alcohol (TBA)	91	95	46-154	28-172	5	0-32	
Diisopropyl Ether (DIPE)	98	99	81-123	74-130	2	0-11	
Ethyl-t-Butyl Ether (ETBE)	95	98	74-122	66-130	3	0-12	
Tert-Amyl-Methyl Ether (TAME)	96	98	76-124	68-132	2	0-10	
Ethanol	113	121	60-138	47-151	7	0-32	
TPPH	75	76	65-135	53-147	2	0-30	

Total number of LCS compounds : 17


Total number of ME compounds : 0

Total number of ME compounds allowed : 1

LCS ME CL validation result : Pass

RPD - Relative Percent Difference , CL - Control Limit



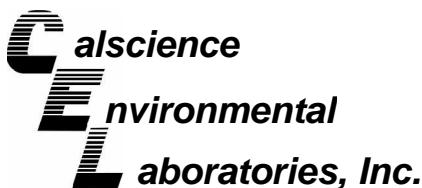

Glossary of Terms and Qualifiers



Work Order Number: 09-04-1668

<u>Qualifier</u>	<u>Definition</u>
*	See applicable analysis comment.
1	Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification.
2	Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification.
3	Recovery of the Matrix Spike (MS) or Matrix Spike Duplicate (MSD) compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification.
4	The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification.
5	The PDS/PDSD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported with no further corrective action required.
A	Result is the average of all dilutions, as defined by the method.
B	Analyte was present in the associated method blank.
C	Analyte presence was not confirmed on primary column.
E	Concentration exceeds the calibration range.
H	Sample received and/or analyzed past the recommended holding time.
J	Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
ME	LCS Recovery Percentage is within LCS ME Control Limit range.
N	Nontarget Analyte.
ND	Parameter not detected at the indicated reporting limit.
Q	Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater.
U	Undetected at the laboratory method detection limit.
X	% Recovery and/or RPD out-of-range.
Z	Analyte presence was not confirmed by second column or GC/MS analysis.





Shell Oil Products Chain Of Custody Record

LAB (LOCATION)

- CALSCIENCE _____
 SPL _____
 XENCO _____
 TEST AMERICA _____
 OTHER _____

Please Check Appropriate Box:

<input checked="" type="checkbox"/> ENV. SERVICES	<input type="checkbox"/> MOTIVA RETAIL	<input type="checkbox"/> SHELL RETAIL
<input type="checkbox"/> MOTIVA SD&CM	<input type="checkbox"/> CONSULTANT	<input type="checkbox"/> LUBES
<input type="checkbox"/> SHELL PIPELINE	<input type="checkbox"/> OTHER	

Print Bill To Contact Name:

Denis Brown

INCIDENT # (ENV-SERVICES)

9 8 9 9 5 8 4 2

 CHECK IF NO INCIDENT # APPLIES

DATE: 4/16/09

PAGE: 1 of 2

SAMPLING COMPANY

Blaine Tech Services

ADDRESS
1680 Rogers Ave, San Jose, CA 95112

PROJECT CONTACT (Hardcopy or PDF Report to)

Michael Ninokata

TELEPHONE
(408)573-0555FAX
(408)573-7771E-MAIL
mninokata@blainetech.com

TURNAROUND TIME (CALENDAR DAYS):

- STANDARD (14 DAY) 5 DAYS 3 DAYS 2 DAYS 24 HOURS RESULTS NEEDED
ON WEEKEND

- LA - RWQCB REPORT FORMAT UST AGENCY:

SPECIAL INSTRUCTIONS OR NOTES :

- SHELL CONTRACT RATE APPLIES
 STATE REIMBURSEMENT RATE APPLIES
 EDD NOT NEEDED
 RECEIPT VERIFICATION REQUESTED

Run TPH-d w/Silica Gel Clean Up

LAB USE ONLY	Field Sample Identification	SAMPLING		MATRIX	PRESERVATIVE				NO. OF CONT.	REQUESTED ANALYSIS												TEMPERATURE ON RECEIPT C°		
		DATE	TIME		HCL	HNO3	H2SO4	NONE		TPH - Purgeable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2-DCA (8260B)	EDB (8260B)	Ethanol (8260B)	Methanol (8015M)		
1	S-2	4/16/09	1350	W	3				3	X	X	X	X											
2	S-3		1300						1	X	X	X	X											
3	S-4		1415						1	X	X	X	X											
4	S-5		1355						1	X	X	X	X											
5	S-5B		1030						1	X	X	X	X											
6	S-5C		1253						1	X	X	X	X											
7	S-6		1115						1	X	X	X	X											
8	S-7		1110						1	X	X	X	X											
9	S-8		1341						1	X	X	X	X											
10	S-9		0905		P				1	X	X	X	X											

Relinquished by: (Signature)

Aragon Carters

(Sample Custodian)

Relinquished by: (Signature)

C EL

Received by: (Signature)

CEL

TK #511686621

Received by: (Signature)

Aragon Carters (sample custodian)

Received by: (Signature)

Aragon Carters

Received by: (Signature)

CEL

Date:

4/16/09

Time:

1640

Date:

4-17-09

Time:

1025

Date:

4-18-09

Time:

8:30

05/2/06 Revision



Shell Oil Products Chain Of Custody Record

LAB (LOCATION)

- CALSCIENCE _____
 SPL _____
 XENCO _____
 TEST AMERICA _____
 OTHER _____

Please Check Appropriate Box:		
<input checked="" type="checkbox"/> ENV. SERVICES	<input type="checkbox"/> MOTIVA RETAIL	<input type="checkbox"/> SHELL RETAIL
<input type="checkbox"/> MOTIVA SD&CM	<input type="checkbox"/> CONSULTANT	<input type="checkbox"/> LUBES
<input type="checkbox"/> SHELL PIPELINE	<input type="checkbox"/> OTHER _____	

Print Bill To Contact Name:

Denis Brown

PO #

INCIDENT # (ENV. SERVICES):

9 8 9 9 5 8 4 2

 CHECK IF NO INCIDENT # APPLIES

DATE: 7/16/09

PAGE: 2 of 2

SAMPLING COMPANY

Blaine Tech Services

ADDRESS
1680 Rogers Ave, San Jose, CA 95112

PROJECT CONTACT (Hardcopy or PDF Report to)

Michael Ninokata

TELEPHONE
(408)573-0555FAX
(408)573-7771E-MAIL:
mninokata@blainetech.comTURNAROUND TIME (CALENDAR DAYS):
 STANDARD (14 DAY) 5 DAYS 3 DAYS 2 DAYS 24 HOURS RESULTS NEEDED
ON WEEKEND LA - RWQCB REPORT FORMAT UST AGENCY:**SPECIAL INSTRUCTIONS OR NOTES :**

CC Regina Bussard w/final report rbussard@deltaenv.com

Run TPH-d w/Silica Gel Clean Up

LAB USE ONLY	Field Sample Identification	SAMPLING		MATRIX	PRESERVATIVE				NO. OF CONT.	REQUESTED ANALYSIS												TEMPERATURE ON RECEIPT C°		
		DATE	TIME		HCL	HNO3	H2SO4	NONE		TPH - Purgable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)	Methanol (8015M)		
11	S-9B	4/16/09	1325	W	3				3	X	X X										X			
12	S-9C		1315	1		1			1	X	X X										X			
13	S-10		1145							X	X X										X			
14	S-11		1145							X	X X										X			
15	S-12		1025							X	X X										X			
16	S-14		1335							X	X X										X			
17	SR-1		1425							X	X X										X			
18	SR-2		1320							X	X X										X			
19	SR-3		1440	↓					0	X	X X										X			

Relinquished by: (Signature)

Aaron Carothers

Received by: (Signature)

Aaron Carothers (sample custodian)

Date:

4/16/09 1640

Time:

Relinquished by: (Signature)

Jeff (Sample Custodian)

Received by: (Signature)

CER

Date:

4-17-09 1025

Time:

Relinquished by: (Signature)

CD 4-17-09
OSD 6SD 1730

Received by: (Signature)

OEL

Date:

4/18/09 8:30

Time:

05/2/06 Revision

TK#511686621

SAMPLE RECEIPT FORMCooler 1 of 1CLIENT: BTSDATE: 4/18/09**TEMPERATURE:** (Criteria: 0.0 °C – 6.0 °C, not frozen)Temperature 3.0 °C - 0.2 °C (CF) = 2.8 °C Blank Sample

- Sample(s) outside temperature criteria (PM/APM contacted by: _____).
- Sample(s) outside temperature criteria but received on ice/chilled on same day of sampling.
- Received at ambient temperature, placed on ice for transport by Courier.

Ambient Temperature: Air Filter Metals Only PCBs OnlyInitial: AB**CUSTODY SEALS INTACT:**

<input type="checkbox"/> Cooler	<input type="checkbox"/> _____	<input type="checkbox"/> No (Not Intact)	<input type="checkbox"/> Not Present	<input type="checkbox"/> N/A	Initial: <u>AB</u>
<input type="checkbox"/> Sample	<input type="checkbox"/> _____	<input type="checkbox"/> No (Not Intact)	<input checked="" type="checkbox"/> Not Present		Initial: <u>W.S.C</u>


SAMPLE CONDITION:

Yes No N/A

Chain-Of-Custody (COC) document(s) received with samples..... COC document(s) received complete..... Collection date/time, matrix, and/or # of containers logged in based on sample labels. COC not relinquished. No date relinquished. No time relinquished.Sampler's name indicated on COC..... Sample container label(s) consistent with COC..... Sample container(s) intact and good condition..... Correct containers and volume for analyses requested..... Analyses received within holding time..... Proper preservation noted on COC or sample container..... Unpreserved vials received for Volatiles analysisVolatile analysis container(s) free of headspace..... Tedlar bag(s) free of condensation..... **CONTAINER TYPE:**Solid: 4ozCGJ 8ozCGJ 16ozCGJ Sleeve EnCores® TerraCores® _____Water: VOA VOA_h VOA_na₂ 125AGB 125AGB_h 125AGBp 1AGB 1AGBn_a₂ 1AGBs 500AGB 500AGJ 500AGJs 250AGB 250CGB 250CGBs 1PB 500PB 500PBn_a 250PB 250PBn 125PB 125PBznna 100PB 100PBn_a₂ _____ _____ Air: Tedlar® Summa® _____ Other: _____ Checked/Labeled by: W.S.C

Container: C: Clear A: Amber P: Plastic G: Glass J: Jar (Wide-mouth) B: Bottle (Narrow-mouth)

Preservative: h: HCl n: HNO₃ na₂:Na₂S₂O₃ Na: NaOH p: H₃PO₄ s: H₂SO₄ znna: ZnAc₂+NaOH f: Field-filteredReviewed by: W.S.CScanned by: W.S.C



WORK ORDER #: 09-04-1668

SAMPLE ANOMALY FORM**SAMPLES - CONTAINERS & LABELS:**

Comments:

- Samples NOT RECEIVED but listed on COC
- Samples received but NOT LISTED on COC
- Holding time expired – list sample ID(s) and test
- Insufficient quantities for analysis – list test
- Improper container(s)/preservative used – list test
- No preservative noted on COC or label – list test & notify lab
- Sample labels illegible – note test/container type
- Sample labels do not match COC – Note in comments

- Sample ID
- Date and/or Time Collected
- Project Information
- # of containers

- Sample containers compromised – Note in comments

- Leaking
- Broken
- Without Labels

- Air sample containers compromised – Note in comments

- Flat
- Very low in volume
- Leaking (transferred into Calscience Tedlar® Bag*)
- Leaking (transferred into Client's Tedlar® Bag*)

- Other: _____

HEADSPACE – Containers with Bubble > 6mm or ¼ inch:

Sample #	Container ID(s)	# of Vials Received	Sample #	Container ID(s)	# of Vials Received	Sample #	Container ID(s)	# of RSK or CO ₂ or DO Received
7	B.C	3						
9,17,18	C	3						
15	ABC	3						

Comments: _____

*Transferred at Client's request.

Initial / Date W.S.C. 4/18-09

APPENDIX D

STATE WATER RESOURCES CONTROL BOARD RESOLUTION No. 2009-0042

STATE WATER RESOURCES CONTROL BOARD
RESOLUTION NO. 2009-0042

ACTIONS TO IMPROVE ADMINISTRATION OF THE
UNDERGROUND STORAGE TANK (UST) CLEANUP FUND AND
UST CLEANUP PROGRAM

WHEREAS:

1. The State Water Resources Control Board (State Water Board) is authorized to administer the petroleum UST Cleanup Program, which was enacted by the Legislature in 1984 to protect health, safety and the environment, and the petroleum UST Cleanup Fund (Fund), which was enacted by the Legislature in 1989 to assist UST owners and operators in meeting federal financial responsibility requirements and to provide reimbursement to those owners and operators for the high cost of cleaning up contamination caused by leaking USTs.
2. The Regional Water Quality Control Boards (Regional Water Boards), County Local Oversight Progam agencies (LOP agencies), and other local agencies direct corrective actions to cleanup soil and groundwater contamination at petroleum UST sites that have had unauthorized releases.
3. It is the responsibility of Regional Water Boards, LOP agencies, and other local agencies to close UST cases that are ready for closure. State Water Board Resolution No. 92-49 directs that water affected by an unauthorized release attain either background water quality or the best water quality that is reasonable if background water quality cannot be restored. Any alternative level of water quality less stringent than background must be consistent with the maximum benefit to the people of the state, not unreasonably affect current and anticipated beneficial use of affected water, and not result in water quality less than that prescribed in the water quality control plan for the basin within which the site is located. Resolution No. 92-49 does not require, however, that the requisite level of water quality be met at the time of site closure. Resolution No. 92-49 specifies compliance with cleanup goals and objectives within a reasonable time frame. Therefore, even if the requisite level of water quality has not yet been attained, a site may be closed if the level will be attained within a reasonable period. In previous decisions, the State Water Board, when determining a reasonable period, has considered all relevant factors including, but not limited to, existing and anticipated beneficial uses of water. If, for example, it will take 50 years to meet the requisite level of water quality, that may be a reasonable period if neither existing nor anticipated beneficial uses would be impacted during that time.
4. Of over 11,000 statewide active petroleum UST cleanup cases, approximately 8,900 are eligible for reimbursement of corrective action costs through the Fund.
5. Of over 11,000 active UST cleanup cases, 7,000 have been open for over ten years.
6. The Fund's revenues are generated by a storage fee (currently 1.4 cents) for every gallon of petroleum products placed into USTs. The State Board of Equalization collects the fee quarterly from owners of active USTs.

7. Since 1992, the Fund has expended over \$2.5 billion reimbursing cleanup costs at approximately 11,000 sites, of which 6,700 have been cleaned up and closed, and 4,300 remain active or suspended.
8. In recent years, the Fund has received up to \$250 million annually from storage fees, of which up to \$200 million was available to reimburse eligible claimants for the costs of ongoing UST cleanup at 4,300 sites.
9. In Fiscal Year (FY) 2008-2009 and subsequent FYs, the projected revenue to the Fund is \$230 million, of which \$150 million is available for cleanup reimbursements. The annual projected reimbursement payment demand from 4,300 claims is now \$240 million.
10. Because of the projected reduction in revenues, increased payment demand and depletion of a long-standing cash reserve, the Fund has suspended one-third, or 1,300, of its active status claims in FY 2008-2009. The Fund currently has 3,000 claims with active Letters of Commitment (LOCs), 1,300 claims with suspended LOCs, and 4,600 claims on its Priority List.
11. Priority Class C claimants are most affected by the reduced availability of funds and suspensions. The best current estimate is that the backlog of payments for Priority Class C claimants at the end of the current FY will be between \$80 and \$100 million, which represents four to five years worth of available revenue for Priority C under current projections (+\$20 million/year).
12. Claimants whose LOCs have been suspended have requested the immediate reactivation of their LOCs. The suspension of LOCs is a hardship for claimants and consultants who relied on Fund reimbursements to pay for cleanup costs and has negatively impacted their ability to arrange for interim financing.
13. Claimants with active LOCs have an expectation that they can submit a reimbursement request and expect to receive a check within some reasonably defined timeframe.
14. Health and Safety Code section 25299.57, subdivision (i) requires the State Water Board to pay for corrective action invoices within 60 days of receipt. The Fund has not consistently met the requirement to pay within 60 days but, until FY 2008-2009, payments have generally been issued within three to six months following receipt. At the current time, Priority B claimants are expected to receive reimbursement within 18 months of submission of a reimbursement request.
15. Reactivating suspended LOCs for Priority C claims in the short term would not allow the Fund to reliably project a reasonable payment timeframe for a new reimbursement request from reactivated Priority C claims.
16. Of the 4,300 claims with active or suspended LOCs in the Fund, over 43 percent have been open for ten years or more.
17. There is a significant financial burden to the Fund as well as a financial and time burden to UST owners in keeping UST cleanup cases open where there is little or no environmental benefit associated with continued investigation, remediation, or monitoring.

18. To protect health, safety and the environment, limited Fund resources should be focused on higher priority UST cleanup cases where there is a threat to water quality and sensitive receptors and not on cases where little or no environmental benefit of continued investigation, remediation, and monitoring can be demonstrated.
19. Health and Safety Code section 25299.39.2 authorizes the manager of the Fund to review the case history for all claims that have been active for five years or more and to make a recommendation to the State Water Board for closure (five year review). Upon receiving a recommendation, the State Water Board may close a case under the jurisdiction of a Regional Water Board or LOP agency.
20. Fund staff has completed reviews of over 1,400 claims and recommended closure on over 20 percent of the cases reviewed. Regional Water Board and LOP agency staffs have issued case closures for approximately one third of the cases identified for closure.
21. Regional Water Board Executive Officers have agreed to timely five-year review closure recommendations.
22. The Fund annually expends approximately \$80 million for quarterly monitoring activities. With rare exceptions, changing the monitoring frequency to semiannual would save \$40 million annually without harm to the environment or risk to health and safety.
23. Review of all UST cleanup cases should be conducted to ensure that high priority cases receive appropriate regulatory attention.
24. Numerous recommendations for actions to reduce the financial impact of the cash shortage in the Fund on claimants and their consultants and for overall improvement to the UST Cleanup Fund and UST Cleanup Program were submitted at a public workshop held by the State Water Board in Sacramento on March 9, 2009.

THEREFORE BE IT RESOLVED THAT:

The State Water Board directs all of the following measures be undertaken to protect health, safety and the environment and improve the administration of the UST Cleanup Fund and UST Cleanup Program:

1. The Regional Water Board and LOP agencies shall immediately begin to review all cases in the petroleum UST Cleanup Program using the general framework provided below.
 - a. The order of case reviews shall be determined by the Regional Water Boards and LOP agencies. Consideration should be given to reviewing first those cases with an active or suspended LOC with the Fund.
 - b. These case reviews shall, at a minimum, include the following for each UST case:
 - (1) Determination of whether or not the case is ready for closure.

(2) If the case is not ready for closure, determination of the following:

- (a) The impediments to closure.
 - (b) The specific environmental benefits of any additional work to be performed at the site.
 - (c) The existing sensitive receptors that are likely to be impacted by contamination at the site and the probable timeframe for those impacts to occur.
- c. Each case review shall be made publicly available on the State Water Board's GeoTracker web site within 30 days of when it is completed in a format acceptable to the Executive Director.
 - d. Regional Water Board and LOP agencies shall, within 90 days, close cases identified as ready for closure in the case review.
 - e. No new directives for additional corrective action shall be issued until all site reviews have been completed unless site-specific needs warrant otherwise.
 - f. The above listed tasks shall be accomplished within existing budgets and not later than June 30, 2010.
2. The Division of Water Quality (DWQ) shall compile the results of the case review effort and post its findings and conclusions on the State Water Board website. The report shall be posted beginning January 2010 and updated every six months until January 2011.
 3. Regional Water Board and LOP agencies shall reduce quarterly monitoring requirements to semiannual or less frequent monitoring at all sites unless site-specific needs warrant otherwise and shall notify all responsible parties of the new requirements no later than August 1, 2009. If more than semiannual monitoring is required for a case, the responsible party and State Water Board shall be notified of the rationale and the notice shall be posted on GeoTracker.
 4. The Fund Manager shall annually review each claim with an active LOC for five or more years consistent with Health and Safety Code section 25299.39.2 and make a finding that: 1) the case should be considered for closure, 2) the current course of corrective action is appropriate, or 3) a change in the course of corrective action is recommended. These findings shall be reported to regulatory staff for consideration and response. The claimant shall also be notified of the finding. In completing the five year review, the Fund Manager shall consider any results of the Regional Water Board or LOP agency case review on GeoTracker (Item 1 above.) and shall post the results of the five year review on GeoTracker.
 5. For cases where the five year review finding is that the case should be considered for closure and the regulatory staff has not responded or provided a reasonable basis for keeping the case open, the Fund Manager shall within one month, elevate the case to the Regional Water Board Executive Officer or LOP agency director for a thirty day review.
 - a. If the Regional Water Board Executive Officer or LOP agency director agrees to close the case, he or she shall send a No Further Action letter consistent with Health and Safety Code section 25296.10 within 90 days.

- b. For cases where there is continued disagreement about whether the case should be closed, the Fund Manager shall within six months recommend the case to the State Water Board for consideration of closure.
- 6. The Division of Financial Assistance (DFA) shall, by August 2009, enhance the Fund's web page to improve the transparency of the payment request queue and approvals and to allow claimants to better estimate when payments are likely to occur.
- 7. DFA shall at the earliest possible time, notify claimants in writing who have a suspended LOC of the expected date that the LOC will be reactivated.
- 8. DFA shall, by July 2009, develop forms and procedures necessary to facilitate options for claimants to assign anticipated Fund reimbursements to a financing program to help meet claimants' cash flow needs.
- 9. DFA and DWQ shall, by July 2009, create a taskforce composed of State and Regional Water Board staff, LOP and other local agency staff, consultants and tank owners and operators to make recommendations for improvements to Fund administrative procedures and response to the current cash shortage. The taskforce shall also make recommendations to improve the UST Cleanup regulatory program, including additional approaches to risk-based cleanup. The first meeting of this taskforce shall be held no later than July 15, 2009 and there shall be meetings held at least every other month from that point forward. The initial focus of the taskforce will be to identify issues to be addressed in the independent audit required by Resolved no. 11. The taskforce shall provide input for the audit by September 1, 2009. Further, State Water Board staff shall report on progress of taskforce activities as required by Resolved no. 13, and, by January 1, 2010, the taskforce shall make final recommendations to the State Water Board. As the taskforce identifies issues, staff shall bring items requiring immediate board action to a regularly scheduled meeting of the State Water Board. Nothing in this Resolved no. 9 shall provide a basis for not (1) implementing other actions required by this resolution or (2) requiring compliance with existing precedential decisions regarding closures.
- 10. DFA and DWQ shall pursue all available Federal economic stimulus money to make funds available for claim reimbursements.
- 11. The Division of Administrative Services shall, by July 2009, initiate an independent program and fiscal audit of the Fund and shall annually thereafter complete a fiscal audit. Additional programmatic audits shall be undertaken at an interval to be determined by the Executive Director. Program audits shall include input from the taskforce created in Resolved no. 9. Program audits shall include a review of Fund policies and procedures to detect and follow-up on suspected waste, abuse and fraud. The results of the initial program audit shall be posted on the State Water Board's web site no later than March 1, 2010.
- 12. DWQ shall, by January 2010, complete development of an updated Leaking Underground Fuel Tank (LUFT).manual.
- 13. DWQ and DFA shall report on progress toward completion of these activities every six months at a meeting of the State Water Board.

14. The issues identified in this resolution are of an ongoing nature and the State Water Board will take further appropriate action to address the funding shortfall and improve program effectiveness.

CERTIFICATION

The undersigned, Clerk to the Board, does hereby certify that the foregoing is a full, true, and correct copy of a resolution duly and regularly adopted at a meeting of the State Water Resources Control Board held on May 19, 2009.

AYE: Chairman Charles R. Hoppin
Vice Chair Frances Spivy-Weber
Board Member Arthur G. Baggett, Jr.
Board Member Tam M. Doduc

NAY: None

ABSENT: None

ABSTAIN: None


Jeanine Townsend
Clerk to the Board