

Environmental Management  
Company  
6001 Bollinger Canyon Rd, L4050  
P.O. Box 6012  
San Ramon, CA 94583-2324  
Tel 925-842-1589  
Fax 925-842-8370

Karen Streich  
Project Manager

RD 439

February 4 \_\_\_\_\_, 2003

**ChevronTexaco**

Alameda County Health Care Services  
1131 Harbor Bay Parkway, Suite 250  
Alameda, CA 94502-6577

Alameda County  
FEB 06 2004  
Environmental Health

Re: Chevron Service Station # 9-0917

Address: 5280 Hopyard Road, Pleasanton, California

I have reviewed the attached routine groundwater monitoring report dated January 20, 2004.

I agree with the conclusions and recommendations presented in the referenced report. The information in this report is accurate to the best of my knowledge and all local Agency/Regional Board guidelines have been followed. This report was prepared by Gettler-Ryan, Inc., upon whose assistance and advice I have relied.

This letter is submitted pursuant to the requirements of California Water Code Section 13267(b)(1) and the regulating implementation entitled Appendix A pertaining thereto.

I declare under penalty of perjury that the foregoing is true and correct.

Sincerely,



Karen Streich  
Project Manager

Enclosure: Report



# GETTLER-RYAN INC.

## TRANSMITTAL

January 20, 2004

G-R #385242

TO: Ms. Karen Streich  
Chevron Products Company  
P.O. Box 6004  
San Ramon, California 94583

CC: Ms. Kristene Wilder  
Cambria Environmental, Inc.  
4111 Citrus Avenue, Unit #9  
Rocklin, CA 95677

FROM: Deanna L. Harding  
Project Coordinator  
Gettler-Ryan Inc.  
6747 Sierra Court, Suite J  
Dublin, California 94568

RE: **Chevron Service Station  
#9-0917  
5280 Hopyard Road  
Pleasanton, California**

Alameda County  
Environmental Health  
FEB 06 2004

WE HAVE ENCLOSED THE FOLLOWING:

COPIES	DATED	DESCRIPTION
1	January 15, 2004	Groundwater Monitoring and Sampling Report Fourth Quarter - Event of December 15, 2003

### COMMENTS:

Please provide any comments/changes and propose any groundwater monitoring modifications for the next event prior to **February 3, 2004**, at which time the final report will be distributed to the following:

- cc: Mr. Eddie So, RWQCB - San Francisco Bay Region, 1515 Clay Street, Suite 1400, Oakland, CA 94612
- Mr. Dan Christopoulos, Christopoulos Properties, 43 Panoramic Way, Walnut Creek, CA 94595-1605
- Lamorinda Development and Investment, 89 Davis Road, Suite 260, Orinda, CA 94563
- Ms. Shannon Duchow, Motel 6 Operating L.P., 14651 Dallas Parkway, Suite 418, Dallas, TX 75240
- Mr. Scott Seery, Alameda County Health Care Services, Dept. of Environmental Health, 1131 Harbor Bay Parkway, Suite 250, Alameda, CA 94502-6577

Enclosures



# GETTLER - RYAN INC.

January 15, 2004  
G-R Job #385242

Ms. Karen Streich  
Chevron Products Company  
P.O. Box 6004  
San Ramon, CA 94583

**RE: Fourth Quarter Event of December 15, 2003**  
Groundwater Monitoring & Sampling Report  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

Dear Ms. Streich:

This report documents the most recent groundwater monitoring and sampling event performed by Gettler-Ryan Inc. (G-R) at the referenced site. All field work was conducted in accordance with G-R Standard Operating Procedure - Groundwater Sampling (attached).

Static groundwater levels were measured and the wells were checked for the presence of separate-phase hydrocarbons. Static water level data, groundwater elevations, and separate-phase hydrocarbon thickness (if any) are presented in the attached Table 1. A Potentiometric Map is included as Figure 1.

Groundwater samples were collected from the monitoring wells and submitted to a state certified laboratory for analyses. The field data sheets for this event are attached. Analytical results are presented in the table(s) listed below. The chain of custody document and laboratory analytical report are also attached.

Please call if you have any questions or comments regarding this report. Thank you.


Sincerely,

Deanna L. Harding  
Project Coordinator

Hagop Kevork  
P.E. No. C55734



- Figure 1: Potentiometric Map
- Table 1: Groundwater Monitoring Data and Analytical Results
- Table 2: Groundwater Analytical Results - Oxygenate Compounds
- Table 3: Dissolved Oxygen Concentrations
- Attachments: Standard Operating Procedure - Groundwater Sampling  
Field Data Sheets  
Chain of Custody Document and Laboratory Analytical Reports

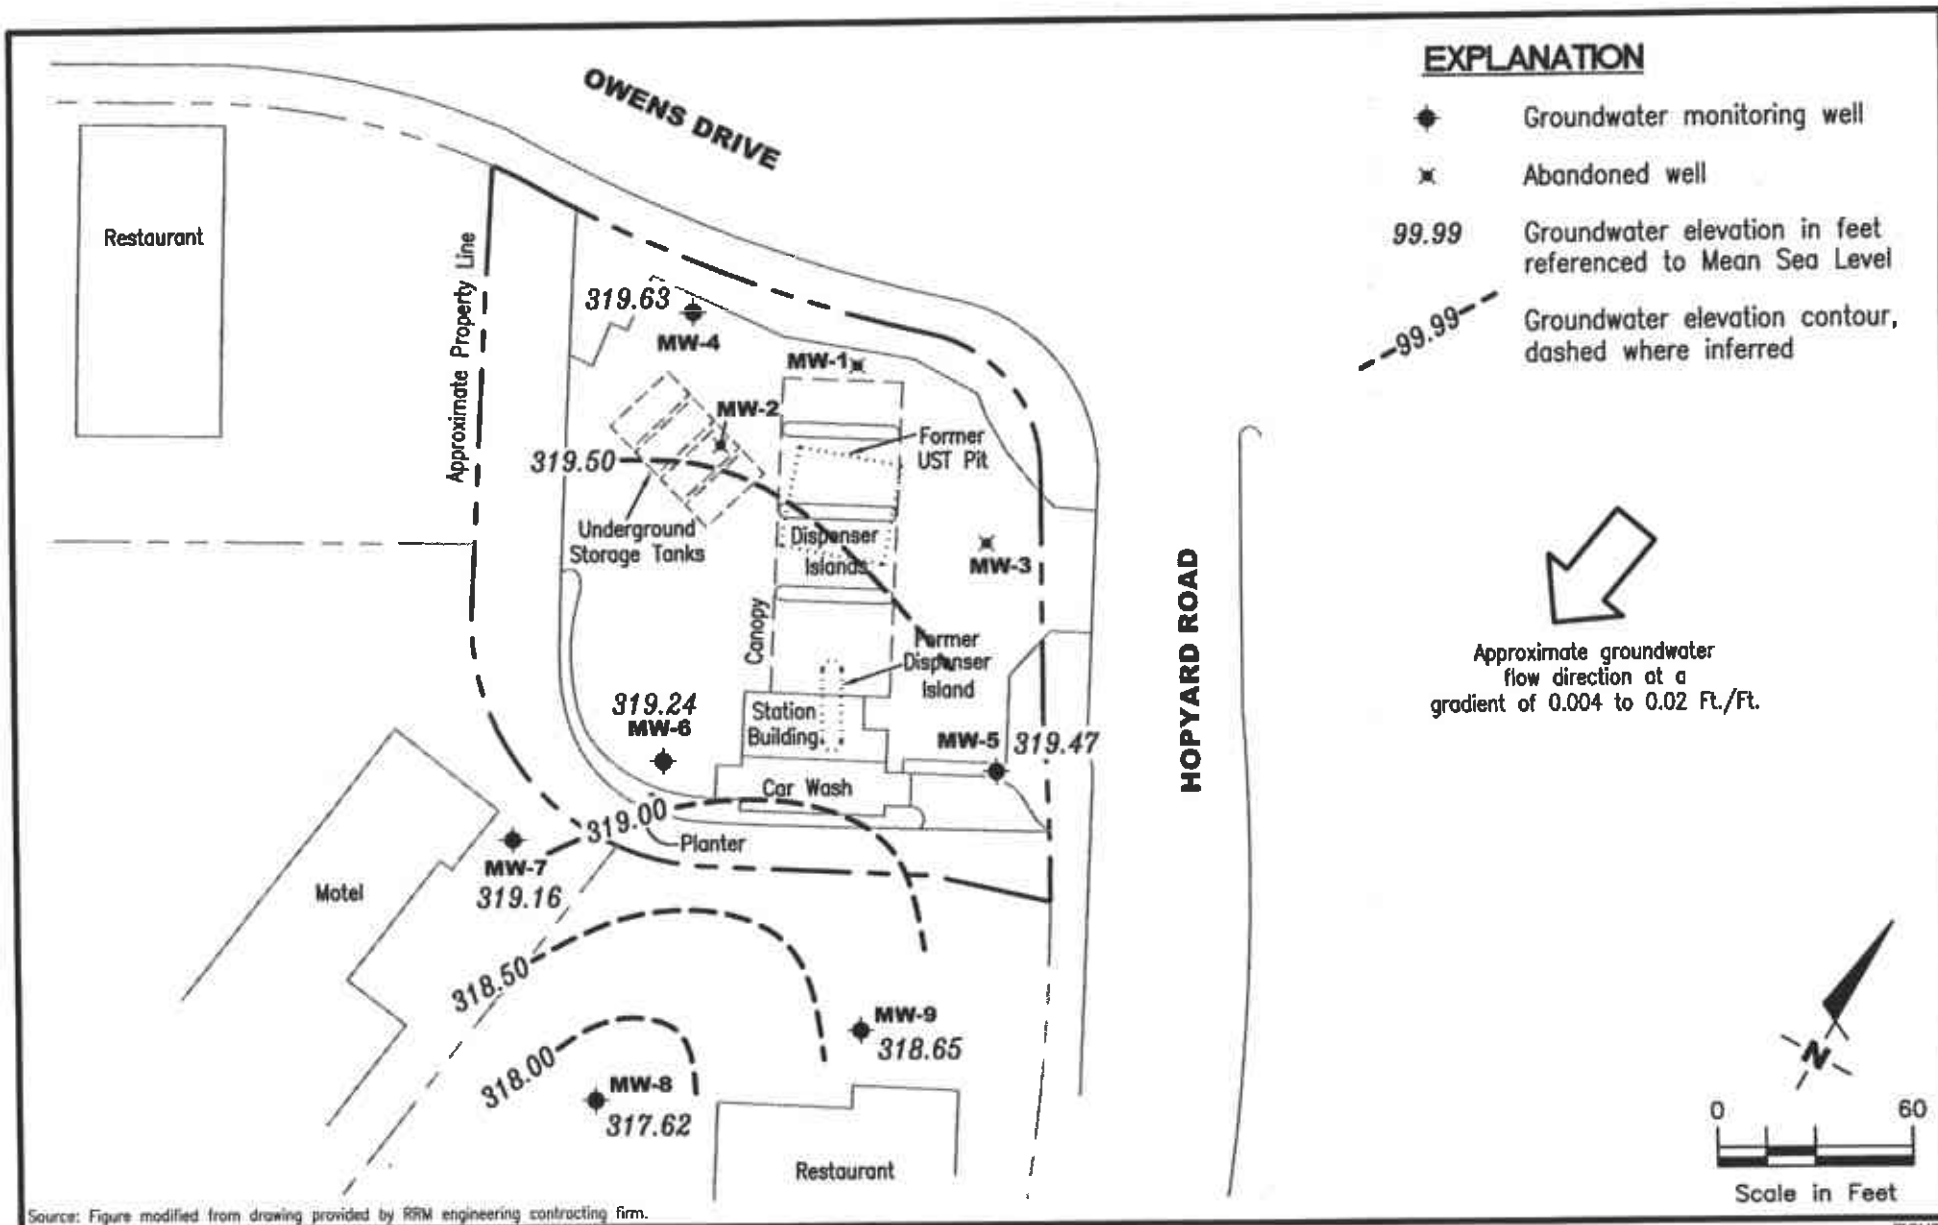

Source: Figure modified from drawing provided by RRM engineering contracting firm.

**GETTLER - RYAN INC.**  
 6747 Sierra Ct., Suite J  
 Dublin, CA 94568 (925) 551-7555

**POTENTIOMETRIC MAP**  
 Chevron Service Station #9-0917  
 5280 Hopyard Road  
 Pleasanton, California

FIGURE

1

PROJECT NUMBER  
 385242

REVIEWED BY

DATE  
 December 15, 2003

REVISED DATE

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-4									
09/16/91	327.28	317.69	9.59	<50	<0.5	<0.5	<0.5	<0.5	--
01/22/92	327.28	317.79	9.49	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/92	327.28	318.39	8.89	<50	<0.5	<0.5	<0.5	<0.5	--
06/05/92	327.28	318.06	9.22	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/92	327.28	317.93	9.35	<50	<0.5	<0.5	<0.5	<0.5	--
12/30/92	327.28	319.00	8.28	<50	<0.5	<0.5	<0.5	<0.5	--
03/22/93	327.28	319.03	8.25	<50	<0.5	<0.5	<0.5	<0.5	--
06/14/93	327.28	318.12	9.16	--	--	--	--	--	--
07/25/93	327.28	318.18	9.10	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/93	327.28	318.58	8.70	<50	<0.5	<0.5	<0.5	<0.5	--
12/28/93	327.28	317.38	9.90	<50	<0.5	<0.5	<0.5	0.5	--
03/21/94	327.28	318.03	9.25	<50	1.0	2.0	0.5	1.9	--
06/07/94	327.28	318.23	9.05	<50	<0.5	<0.5	<0.5	<0.5	--
10/07/94	327.28	318.31	8.97	<50	<0.5	<0.5	<0.5	<0.5	--
12/29/94	327.28	318.06	9.22	<50	<0.5	1.1	0.8	2.7	--
03/06/95	327.28	318.26	9.02	<50	<0.5	<0.5	<0.5	<0.5	--
06/14/95	327.28	318.47	8.81	170	<0.5	<0.5	<0.5	<0.5	--
09/14/95	327.28	318.00	9.28	<50	1.0	<0.5	1.6	<0.5	--
12/16/95	327.28	319.42	7.86	<50	<0.5	<0.5	<0.5	<0.5	150
03/28/96	327.28	318.94	8.34	<50	<0.5	<0.5	<0.5	<0.5	53
06/28/96	327.28	318.79	8.49	70	<0.5	<0.5	<0.5	<0.5	92
09/26/96	327.28	318.84	8.44	--	--	--	--	--	--
12/30/96	327.28	319.10	8.18	<50	<0.5	<0.5	<0.5	<0.5	100
03/13/97	327.28	318.43	8.85	--	--	--	--	--	--
06/30/97	327.28	318.79	8.49	260	<0.5	<0.5	<0.5	<0.5	330
09/30/97	326.93	318.32	8.61	--	--	--	--	--	--
12/31/97	326.93	318.40	8.53	<50	<0.5	<0.5	<0.5	<0.5	170
04/02/98	326.93	317.98	8.95	--	--	--	--	--	--
06/29/98	326.93	318.21	8.72	<50	<0.5	<0.5	<0.5	<0.5	150
09/16/98	326.93	317.59	9.34	--	--	--	--	--	--
12/23/98	326.93	318.18	8.75	<50	<0.5	<0.5	<0.5	<0.5	210
03/26/99	326.93	317.79	9.14	<100	<1.0	<1.0	<1.0	<1.0	303
06/25/99	326.93	317.72	9.21	<50	<0.5	<0.5	<0.5	<0.5	228/237 <sup>1</sup>

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>MW-4 (cont)</b>									
09/16/99	326.93	317.01	9.92	--	--	--	--	--	--
12/15/99	326.93	318.32	8.61	<50	<0.5	<0.5	<0.5	<0.5	310
03/07/00	326.93	318.59	8.34	--	--	--	--	--	--
06/19/00	326.93	318.84	8.09	<50	<0.50	<0.50	<0.50	<0.50	370
09/18/00	326.93	318.21	8.72	<50.0	<0.500	<0.500	<0.500	<0.500	326
12/01/00	326.93	318.03	8.90	<50.0	<0.500	<0.500	<0.500	<0.500	478
03/13/01	326.93	318.96	7.97	<50.0	<0.500	<0.500	<0.500	<0.500	9.53
06/01/01	326.93	318.62	8.31	<50	<0.50	<0.50	<0.50	<0.50	<2.5/<2.0 <sup>7</sup>
09/07/01	326.94	318.49	8.45	<50	<0.50	<0.50	<0.50	<1.5	400
12/05/01	326.94	319.44	7.50	<50	<0.50	<0.50	<0.50	<1.5	350
03/26/02	326.94	318.96	7.98	<50	<0.50	<0.50	<0.50	<1.5	340
06/14/02	326.94	319.10	7.84	<50	<0.50	<0.50	<0.50	<1.5	290
09/20/02	326.94	319.66	7.28	<50	<0.50	<0.50	<0.50	<1.5	420
12/12/02	326.94	320.18	6.76	<50	<0.50	<0.50	<0.50	<1.5	43/42 <sup>7</sup>
03/07/03	326.94	320.78	6.16	<50	<0.50	<0.50	<0.50	<1.5	550/430 <sup>7</sup>
06/06/03 <sup>9</sup>	326.94	321.33	5.61	<50	<0.5	<0.5	<0.5	<0.5	3
09/05/03 <sup>9</sup>	326.94	319.29	7.65	<50	<0.5	<0.5	<0.5	<0.5	11
12/15/03 <sup>9</sup>	326.94	319.63	7.31	<50	<0.5	<0.5	<0.5	<0.5	5
<b>MW-5</b>									
09/16/91	327.82	317.76	10.06	12,000	4,000	29	1,600	92	--
01/22/92	327.82	317.24	10.58	44,000	2,000	320	5,700	2,400	--
03/26/92	327.82	318.64	9.18	39,000	3,200	210	5,700	2,400	--
06/05/92	327.82	317.92	9.90	28,000	3,800	140	4,000	2,000	--
09/23/92	327.82	317.85	9.97	40,000	2,000	290	2,900	1,800	--
12/30/92	327.82	319.02	8.80	44,000	9,000	190	3,100	1,600	--
03/22/93	327.82	318.49	9.33	43,000	6,500	170	2,400	2,400	--
06/14/93	327.82	318.04	9.78	--	--	--	--	--	--
07/25/93	327.82	318.10	9.72	43,000	550	45	2,700	1,100	--
09/23/93	327.82	318.40	9.42	44,000	14,000	640	3,700	1,800	--
12/28/93	327.82	318.15	9.67	56,000	12,000	590	4,100	1,600	--
03/21/94	327.82	318.11	9.71	48,000	12,000	600	4,700	1,600	--

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
 Chevron Service Station #9-0917  
 5280 Hopyard Road  
 Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-5 (cont)									
06/07/94	327.82	318.10	9.72	42,000	13,000	480	3,700	1,200	--
10/07/94	327.82	318.27	9.55	15,000	1,100	41	950	34	--
12/29/94	327.82	317.90	9.92	45,000	12,000	460	3,600	1,400	--
03/06/95	327.82	318.50	9.32	40,000	9,700	210	3,500	700	--
06/14/95	327.82	318.41	9.41	42,000	8,000	170	3,700	640	--
09/14/95	327.82	317.30	10.52	26,000	4,100	85	2,000	270	--
12/16/95	327.82	319.48	8.34	35,000	7,300	<0.5	2,900	420	<500
03/28/96	327.82	318.09	9.73	30,000	5,200	160	3,500	600	<250
06/28/96	327.82	318.37	9.45	26,000	4,300	60	2,100	200	680
09/26/96	327.82	317.95	9.87	15,000	2,700	59	1,300	140	400
12/30/96	327.82	318.82	9.00	34,000	4,600	120	2,800	660	310
03/13/97	327.82	318.33	9.49	13,000	1,900	34	1,300	220	76
06/30/97	327.82	318.19	9.63	11,000	1,800	19	84	94	160
10/01/97	327.82	318.08	9.74	27,000	4,700	120	3,700	330	310
12/31/97	327.82	318.34	9.48	34,000	8,000	130	3,400	3,900	<500
04/02/98	327.82	317.44	10.38	27,000	4,600	65	3,400	270	270
06/29/98	327.82	317.79	10.03	16,000	3,000	<50	1,800	220	290
09/16/98	327.82	318.84	8.98	9,700	2,700	52	1,400	210	<250
12/23/98	327.82	318.00	9.82	5,100	1,600	18	570	39	130
03/26/99 <sup>2</sup>	327.82	318.26	9.56	25,800	4,410	58.4	2,550	57.2	137
06/25/99	327.82	INACCESSIBLE	--	--	--	--	--	--	--
09/16/99	327.82	317.51	10.31	8,850	1,310	20.3	802	120	155
12/15/99	327.82	317.52	10.30	10,000	2,800	33	1,600	160	250
03/07/00	327.82	318.29	9.53	18,700	3,830	95.6	1,900	305	309
06/19/00 <sup>3</sup>	327.82	318.90	8.92	1,000 <sup>4</sup>	290	3.4	<1.0	14	52
09/18/00 <sup>3,6</sup>	327.82	318.18	9.64	924 <sup>5</sup>	205	<5.00	<5.00	<5.00	83.1
12/01/00 <sup>3</sup>	327.82	318.05	9.77	<50.0	0.878	<0.500	<0.500	<0.500	<5.00
03/13/01 <sup>3</sup>	327.82	318.67	9.15	333	55.0	0.803	21.8	1.44	2.07
06/01/01 <sup>3</sup>	327.82	317.71	10.11	130 <sup>4</sup>	36	<0.50	<0.50	<0.50	7.8/<2.0 <sup>7</sup>
09/07/01 <sup>8</sup>	327.82	318.43	9.39	2,600	330	<10	200	12	14
12/05/01	327.82	319.57	8.25	25,000	730	36	2,900	650	<25
03/26/02	327.82	319.44	8.38	25,000	1,500	31	2,100	400	<100
06/14/02	327.82	320.18	7.64	27,000	900	52	2,400	320	<50

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
 Chevron Service Station #9-0917  
 5280 Hopyard Road  
 Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>MW-5 (cont)</b>									
09/20/02	327.82	320.45	7.37	26,000	450	50	2,400	1,100	<100
12/12/02	327.82	320.33	7.49	23,000	260	32	1,900	1,100	<50/<2 <sup>7</sup>
03/07/03	327.82	320.38	7.44	21,000	270	39	2,000	1,100	<25/<1 <sup>7</sup>
06/06/03 <sup>9</sup>	327.82	321.10	6.72	1,700	22	3	190	140	<0.5
09/05/03 <sup>9</sup>	327.82	318.90	8.92	20,000	170	23	1,200	1,100	<2
12/15/03 <sup>9</sup>	327.82	319.47	8.35	22,000	240	23	1,300	970	<1
<b>MW-6</b>									
09/16/91	328.48	317.87	10.61	6,200	1,300	3.9	550	78	--
01/22/92	328.48	318.18	10.30	18,000	2,800	48	2,000	440	--
03/26/92	328.48	318.98	9.50	21,000	3,300	17	2,100	300	--
06/05/92	328.48	318.14	10.34	14,000	2,800	9.2	1,800	270	--
09/23/92	328.48	317.92	10.56	19,000	1,000	40	1,200	230	--
12/30/92	328.48	318.71	9.75	15,000	1,100	<5.0	1,000	77	--
03/22/93	328.48	319.21	9.27	15,000	1,300	10	770	220	--
06/14/93	328.48	318.33	10.15	--	--	--	--	--	--
07/25/93	328.48	318.23	10.25	6,400	630	<2.5	440	6.0	--
09/23/93	328.48	318.31	10.17	9,500	1,000	23	690	110	--
12/28/93	328.48	317.96	10.52	11,000	890	31	730	48	--
03/21/94	328.48	318.20	10.28	5,700	380	10	270	22	--
06/07/94	328.48	318.20	10.28	5,300	600	4.4	370	26	--
10/07/94	328.48	318.06	10.42	2,600	270	<5.0	110	<5.0	--
12/29/94	328.48	318.23	10.25	4,500	560	6.2	360	<5.0	--
03/06/95	328.48	319.12	9.36	4,100	480	15	290	20	--
06/14/95	328.48	318.37	10.11	2,800	180	6.9	110	6.6	--
09/14/95	328.48	318.21	10.27	3,100	370	<0.5	250	<0.5	--
12/16/95	328.48	319.21	9.27	1,900	210	<0.5	76	<0.5	<13
03/28/96	328.48	319.13	9.35	1,000	120	<0.5	64	<0.5	<5.0
06/28/96	328.48	318.70	9.78	950	110	0.8	44	<0.5	22
09/26/96	328.48	319.02	9.46	1,100	120	1.6	48	<0.5	17
12/30/96	328.48	319.45	9.03	3,200	260	2.3	120	<0.5	23
03/13/97	328.48	318.76	9.72	2,000	250	<0.5	110	<0.5	<5.0



**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>MW-6 (cont)</b>									
06/30/97	328.48	318.81	9.67	470	<0.5	1.2	<0.5	<0.5	<5.0
10/01/97	327.82	318.53	9.29	1,500	120	3.4	27	<0.5	20
12/31/97	327.82	317.61	10.21	1,500	79	<2.5	28	<2.5	<12
04/02/98	327.82	318.86	8.96	760	48	2.3	9.9	<1.0	15
06/29/98	327.82	318.45	9.37	340	29	<2.5	7.1	<2.5	18
09/16/98	327.82	318.60	9.22	340	18	1.4	5.6	<1.0	18
12/23/98	327.82	317.51	10.31	390	5.4	1.2	0.58	1.2	15
03/26/99 <sup>2</sup>	327.82	317.91	9.91	1,310	132	18.5	38.5	1.88	19.1
06/25/99	327.82	317.50	10.32	856	37.4	5.2	10.7	<0.5	<2.0/<5.0 <sup>1</sup>
09/16/99	327.82	317.28	10.54	<50	1.19	<0.5	<0.5	<0.5	<5.0
12/15/99	327.82	319.33	8.49	1,400	110	<5.0	35	<5.0	37
03/07/00	327.82	318.60	9.22	1,200	97.9	2.16	44.8	<1.25	26
06/19/00 <sup>3</sup>	327.82	318.42	9.40	160 <sup>1</sup>	1.4	0.73	5.4	2.4	7.9
09/18/00 <sup>3,6</sup>	327.82	317.74	10.08	234 <sup>5</sup>	<0.500	1.72	<0.500	<0.500	<5.00
12/01/00 <sup>3</sup>	327.82	317.56	10.26	79.5 <sup>5</sup>	1.74	<0.500	<0.500	<0.500	<5.00
03/13/01 <sup>3</sup>	327.82	318.53	9.29	180	<0.500	<0.500	<0.500	<0.500	<0.500
06/01/01 <sup>3</sup>	327.82	317.24	10.58	280 <sup>4</sup>	4.1	0.62	<0.50	<0.50	25/<2.0 <sup>7</sup>
09/07/01 <sup>8</sup>	327.83	317.92	9.91	1,200	70	<0.50	42	1.9	<2.5
12/05/01	327.83	319.02	8.81	1,600	45	<2.0	26	<1.5	<2.5
03/26/02	327.83	318.90	8.93	590	6.0	<0.50	<0.50	<1.5	<2.5
06/14/02	327.83	318.97	8.86	740	15	<0.50	<0.50	<1.5	<2.5
09/20/02	327.83	319.83	8.00	770	9.8	1.9	0.71	<1.5	<2.5
12/12/02	327.83	319.83	8.00	780	5.7	<0.50	<0.50	<1.5	<2.5/<2 <sup>7</sup>
03/07/03	327.83	320.05	7.78	1,100	130	<0.50	19	<1.5	<2.5/<0.5 <sup>7</sup>
06/06/03 <sup>9</sup>	327.83	320.79	7.04	61	<0.5	<0.5	<0.5	<0.5	<0.5
09/05/03 <sup>9</sup>	327.83	318.79	9.04	390	<0.5	<0.5	<0.5	<0.5	0.9
12/15/03 <sup>9</sup>	327.83	319.24	8.59	<50	<0.5	<0.5	<0.5	<0.5	<0.5
<b>MW-7</b>									
06/17/97	326.37	318.32	8.05	ND	ND	ND	ND	ND	ND
09/30/97	326.37	318.78	7.59	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	326.37	318.49	7.88	<50	<0.5	<0.5	<0.5	<0.5	<2.5

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
 Chevron Service Station #9-0917  
 5280 Hopyard Road  
 Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>MW-7 (cont)</b>									
04/02/98	326.37	319.06	7.31	<50	2.6	<0.5	<0.5	<0.5	<2.5
06/29/98	326.37	318.39	7.98	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	326.37	318.55	7.82	<50	<0.5	<0.5	<0.5	<0.5	<2.5
12/23/98	326.37	318.37	8.00	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	326.37	318.43	7.94	<50	<0.5	<0.5	<0.5	<0.5	<2.0
06/25/99	326.37	318.65	7.72	<50	<0.5	<0.5	<0.5	<0.5	<2.0
09/16/99	326.37	317.61	8.76	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/15/99	326.37	318.42	7.95	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/07/00	326.37	319.38	6.99	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	326.37	318.64	7.73	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/18/00 <sup>6</sup>	326.37	318.21	8.16	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	326.37	317.06	9.31	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	326.37	318.65	7.72	<50.0	<0.500	<0.500	<0.500	<0.500	1.10
06/01/01	326.37	318.40	7.97	<50	<0.50	<0.50	<0.50	<0.50	<2.5/<2.0 <sup>7</sup>
09/07/01	326.37	318.61	7.76	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/05/01	326.37	318.99	7.38	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/26/02	326.37	318.96	7.41	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	326.37	318.85	7.52	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	326.37	319.65	6.72	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/12/02	326.37	319.18	7.19	<50	<0.50	<0.50	<0.50	<1.5	<2.5/<2 <sup>7</sup>
03/07/03	326.37	319.48	6.89	<50	<0.50	<0.50	<0.50	<1.5	<2.5/<0.5 <sup>7</sup>
06/06/03 <sup>9</sup>	326.37	319.62	6.75	<50	<0.5	<0.5	<0.5	<0.5	<0.5
09/05/03 <sup>9</sup>	326.37	318.75	7.62	<50	<0.5	<0.5	<0.5	<0.5	<0.5
12/15/03 <sup>9</sup>	326.37	319.16	7.21	<50	<0.5	<0.5	<0.5	<0.5	<0.5
<b>MW-8</b>									
06/17/97	325.89	318.15	7.74	ND	ND	ND	ND	ND	ND
09/30/97	325.89	318.16	7.73	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	325.89	318.27	7.62	<50	<0.5	<0.5	<0.5	<0.5	<2.5
04/02/98	325.89	318.48	7.41	<50	<0.5	1.3	0.67	3.5	<2.5
06/29/98	325.89	317.98	7.91	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	325.89	318.42	7.47	<50	<0.5	<0.5	<0.5	<0.5	<2.5

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>MW-8 (cont)</b>									
12/23/98	325.89	318.28	7.61	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	325.89	316.81	9.08	<50	<0.5	<0.5	<0.5	<0.5	5.01
06/25/99	325.89	315.94	9.95	<50	<0.5	<0.5	<0.5	<0.5	<2.0
09/16/99	325.89	316.00	9.89	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/15/99	325.89	317.14	8.75	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/07/00	325.89	317.11	8.78	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	325.89	318.34	7.55	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/18/00	325.89	317.64	8.25	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	325.89	317.45	8.44	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	325.89	318.32	7.57	<50.0	<0.500	<0.500	<0.500	<0.500	<0.500
06/01/01	325.89	317.97	7.92	<50	<0.50	<0.50	<0.50	<0.50	<2.5/<2.0 <sup>7</sup>
09/07/01	325.89	318.11	7.78	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/05/01	325.89	318.57	7.32	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/26/02	325.89	318.18	7.71	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	325.89	318.24	7.65	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	325.89	318.53	7.36	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/12/02	325.89	319.00	6.89	<50	<0.50	<0.50	<0.50	<1.5	<2.5/<2 <sup>7</sup>
03/07/03	325.89	318.94	6.95	<50	<0.50	<0.50	<0.50	<1.5	<2.5/<0.5 <sup>7</sup>
06/06/03 <sup>9</sup>	325.89	319.09	6.80	<50	<0.5	<0.5	<0.5	<0.5	<0.5
09/05/03 <sup>9</sup>	325.89	317.24	8.65	<50	<0.5	<0.5	<0.5	<0.5	<0.5
12/15/03 <sup>9</sup>	325.89	317.62	8.27	<50	<0.5	<0.5	<0.5	<0.5	<0.5
<b>MW-9</b>									
06/20/97	325.73	317.88	7.85	ND	ND	ND	ND	ND	ND
10/01/97	325.73	318.10	7.63	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	325.73	318.53	7.20	<50	<0.5	<0.5	<0.5	<0.5	<2.5
04/02/98	325.73	318.52	7.21	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/29/98	325.73	315.31	10.42	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	325.73	315.99	9.74	<50	<0.5	<0.5	<0.5	<0.5	<2.5
12/23/98	325.73	317.59	8.14	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	325.73	317.62	8.11	<50	<0.5	<0.5	<0.5	<0.5	<2.0
06/25/99	325.73	318.28	7.45	<50	<0.5	<0.5	<0.5	<0.5	<2.0

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
 Chevron Service Station #9-0917  
 5280 Hopyard Road  
 Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>MW-9 (cont)</b>									
09/16/99	325.73	316.87	8.86	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/15/99	325.73	317.93	7.80	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/07/00	325.73	318.37	7.36	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	325.73	318.39	7.34	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/18/00	325.73	317.61	8.12	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	325.73	317.46	8.27	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	325.73	318.34	7.39	<50.0	<0.500	<0.500	<0.500	<0.500	<0.500
06/01/01	325.73	317.92	7.81	<50	<0.50	<0.50	<0.50	<0.50	<2.5/<2.0 <sup>7</sup>
09/07/01	325.73	317.55	8.18	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/05/01	325.73	318.58	7.15	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/26/02	325.73	318.47	7.26	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	325.73	318.62	7.11	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	325.73	318.74	6.99	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/12/02	325.73	318.92	6.81	<50	<0.50	<0.50	<0.50	<1.5	<2.5/<2 <sup>7</sup>
03/07/03	325.73	318.95	6.78	<50	<0.50	<0.50	<0.50	<1.5	<2.5/<0.5 <sup>7</sup>
06/06/03 <sup>9</sup>	325.73	319.09	6.64	<50	<0.5	<0.5	<0.5	<0.5	<0.5
09/05/03 <sup>9</sup>	325.73	318.30	7.43	<50	<0.5	<0.5	<0.5	<0.5	<0.5
12/15/03 <sup>9</sup>	325.73	318.65	7.08	<50	<0.5	<0.5	<0.5	<0.5	<0.5
<b>MW-1</b>									
07/12/89	326.48	--	--	100	<0.5	<0.5	6.0	<0.5	--
08/02/89	326.48	318.38	8.10	--	--	--	--	--	--
10/24/89	326.48	318.97	7.51	<50	1.0	<0.5	13	<0.5	--
03/12/90	326.48	318.07	8.41	140	0.8	<0.5	1.0	<0.5	--
03/26/90	326.48	318.34	8.14	--	--	--	--	--	--
06/22/90	326.48	318.17	8.31	<50	<0.5	<0.5	<0.5	<0.5	--
09/11/90	326.48	318.35	8.14	<50	<0.5	<0.5	<0.5	<0.5	--
04/18/91	326.48	318.34	8.02	77	<0.5	<0.5	<0.5	<0.5	--
ABANDONED									

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>MW-2</b>									
07/17/89	327.53	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
08/02/89	327.53	318.48	9.05	--	--	--	--	--	--
10/24/89	327.53	318.29	9.24	<50	<0.5	<0.5	<0.5	<0.5	--
03/12/90	327.53	317.46	10.07	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/90	327.53	317.48	10.05	--	--	--	--	--	--
06/22/90	327.53	317.48	10.05	<50	<0.5	<0.5	<0.5	<0.5	--
09/11/90	327.53	317.85	9.68	<50	<0.5	<0.5	<0.5	<0.5	--
04/18/91	327.53	318.30	9.23	<50	<0.5	<0.5	<0.5	<0.5	--
ABANDONED									
<b>MW-3</b>									
07/17/89	326.47	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
08/02/89	326.47	318.32	8.15	--	--	--	--	--	--
10/24/89	326.47	318.88	7.59	<50	<0.5	<0.5	<0.5	<0.5	--
03/12/90	326.47	318.00	8.47	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/90	326.47	317.64	8.83	--	--	--	--	--	--
06/22/90	326.47	317.64	8.83	<50	0.4	<0.5	0.8	<0.5	--
09/11/90	326.47	318.06	8.41	<50	<0.5	<0.5	<0.5	<0.5	--
04/18/91	326.47	318.49	7.98	<50	<0.5	<0.5	<0.5	<0.5	--
ABANDONED									
<b>BAILER BLANK</b>									
03/22/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
07/25/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/28/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/21/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
<b>TRIP BLANK</b>									
06/22/90	--	--	--	<50	<0.3	<0.3	<0.3	<0.6	--
09/16/91	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
01/22/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
06/05/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/30/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/22/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
07/25/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/28/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/21/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
06/07/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
10/07/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/29/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/06/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
06/14/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/14/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/16/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/28/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
06/28/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
09/26/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/30/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
03/13/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
06/30/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
10/01/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
04/02/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/29/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
12/23/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.0
09/16/99	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
 Chevron Service Station #9-0917  
 5280 Hopyard Road  
 Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
TRIP BLANK (cont)									
12/15/99	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/07/00	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/18/00	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	--	--	--	<50.0	<0.500	1.61	<0.500	0.593	<0.500
06/01/01	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/07/01	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
QA									
12/05/01	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/26/02	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/12/02	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/07/03	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/06/03 <sup>9</sup>	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5
09/05/03 <sup>9</sup>	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5
12/15/03 <sup>9</sup>	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5

**Table 1**  
**Groundwater Monitoring Data and Analytical Results**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

---

**EXPLANATIONS:**

Groundwater monitoring data and laboratory analytical results prior to June 19, 2000, were compiled by reports prepared by Blaine Tech Services, Inc.

TOC = Top of Casing

(ft.) = Feet

GWE = Groundwater Elevation

(msl) = Mean sea level

DTW = Depth to Water

TPH-G = Total Petroleum Hydrocarbons as Gasoline

B = Benzene

T = Toluene

E = Ethylbenzene

X = Xylenes

MTBE = Methyl tertiary butyl ether

(ppb) = Parts per billion

-- = Not Measured/Not Analyzed

QA = Quality Assurance/Trip Blank

- 1 Confirmation run.
- 2 ORC installed.
- 3 ORC present in well.
- 4 Laboratory report indicates gasoline C6-C12.
- 5 Laboratory report indicates unidentified hydrocarbons C6-C12.
- 6 Laboratory report indicates insufficient preservative to reduce sample pH to less than 2. Sample was analyzed within 14 days, but beyond the seventh day recommended for Benzene, Toluene, Xylenes, and Ethylbenzene.
- 7 MTBE by EPA Method 8260.
- 8 Removed ORC from well.
- 9 BTEX and MTBE by EPA Method 8260.



**Table 2**  
**Groundwater Analytical Results - Oxygenate Compounds**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID	DATE	ETHANOL (ppb)	TBA (ppb)	MTBE (ppb)	DIPE (ppb)	ETBE (ppb)	TAME (ppb)	1,2-DCA (ppb)	EDB (ppb)
MW-4	06/01/01	--	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
	12/12/02	--	<100	42	<2	<2	<2	<2	<2
	03/07/03	--	<5	430	<0.5	<0.5	3	<0.5	<0.5
	06/06/03	--	--	3	--	--	--	--	--
	09/05/03	<50	--	11	--	--	--	--	--
	12/15/03	<50	--	5	--	--	--	--	--
MW-5	06/01/01	--	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
	12/12/02	--	<100	<2	<2	<2	<2	<2	<2
	03/07/03	--	<10	<1	<1	<1	<1	<1	<1
	06/06/03	--	--	<0.5	--	--	--	--	--
	09/05/03	<200	--	<2	--	--	--	--	--
	12/15/03	<130	--	<1	--	--	--	--	--
MW-6	06/01/01	--	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
	12/12/02	--	<100	<2	<2	<2	<2	4	<2
	03/07/03	--	<5	<0.5	<0.5	<0.5	<0.5	1	<0.5
	06/06/03	--	--	<0.5	--	--	--	--	--
	09/05/03	<50	--	0.9	--	--	--	--	--
	12/15/03	<50	--	<0.5	--	--	--	--	--
MW-7	06/01/01	--	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
	12/12/02	--	<100	<2	<2	<2	<2	<2	<2
	03/07/03	--	<5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
	06/06/03	--	--	<0.5	--	--	--	--	--
	09/05/03	<50	--	<0.5	--	--	--	--	--
	12/15/03	<50	--	<0.5	--	--	--	--	--
MW-8	06/01/01	--	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
	12/12/02	--	<100	<2	<2	<2	<2	<2	<2
	03/07/03	--	<5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5

**Table 2**  
**Groundwater Analytical Results - Oxygenate Compounds**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID	DATE	ETHANOL (ppb)	TBA (ppb)	MTBE (ppb)	DIPE (ppb)	ETBE (ppb)	TAME (ppb)	1,2-DCA (ppb)	EDB (ppb)
MW-8 (cont)	06/06/03	--	--	<0.5	--	--	--	--	--
	09/05/03	<50	--	<0.5	--	--	--	--	--
	12/15/03	<50	--	<0.5	--	--	--	--	--
MW-9	06/01/01	--	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
	12/12/02	--	<100	<2	<2	<2	<2	<2	<2
	03/07/03	--	<5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
	06/06/03	--	--	<0.5	--	--	--	--	--
	09/05/03	<50	--	<0.5	--	--	--	--	--
	12/15/03	<50	--	<0.5	--	--	--	--	--

**Table 2**  
**Groundwater Analytical Results - Oxygenate Compounds**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

---

**EXPLANATIONS:**

TBA = Tertiary butyl alcohol  
MTBE = Methyl tertiary butyl ether  
DIPE = Di-isopropyl ether  
ETBE = Ethyl tertiary butyl ether  
TAME = Tertiary amyl methyl ether  
1,2-DCA = 1,2-Dichloroethane  
EDB = Ethylene dibromide/1,2-Dibromoethane  
(ppb) = Parts per billion  
-- = Not Analyzed

**ANALYTICAL METHOD:**

EPA Method 8260 for Oxygenate Compounds

**Table 3**  
**Dissolved Oxygen Concentrations**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID	DATE	Before Purging (mg/L)	After Purging (mg/L)
MW-4	09/07/01	1.96	--
	12/05/01	1.96	--
	03/26/02	2.10	--
	06/14/02	3.10	--
	09/20/02	2.30	--
	12/12/02	2.10	--
	03/07/03	0.40	--
	06/06/03	2.10	--
	09/05/03	2.00	--
	12/15/03	2.46	--
MW-5	06/19/00	9.65	--
	09/18/00	3.59	--
	12/01/00	3.76	--
	03/13/01	3.59	--
	06/01/01	3.36	--
	09/07/01	4.02	--
	12/05/01	1.04	--
	03/26/02	1.00	--
	06/14/02	0.90	--
	09/20/02	1.00	--
	12/12/02	1.10	--
	03/07/03	0.10	--
	06/06/03	0.80	--
	09/05/03	1.00	--
12/15/03	1.78	--	
MW-6	06/19/00	5.88	--
	09/18/00	4.81	--
	12/01/00	4.27	--
	03/13/01	4.12	--
	06/01/01	3.84	--
	09/07/01	4.26	--
	12/05/01	1.26	--
	03/26/02	1.30	--
	06/14/02	1.40	--
	09/20/02	1.30	--
	12/12/02	1.40	--
	03/07/03	0.90	--
	06/06/03	1.20	--
	09/05/03	1.30	--
12/15/03	1.91	--	

**Table 3**  
**Dissolved Oxygen Concentrations**  
Chevron Service Station #9-0917  
5280 Hopyard Road  
Pleasanton, California

WELL ID	DATE	Before Purging (mg/L)	After Purging (mg/L)
MW-7	09/07/01	2.04	--
	12/05/01	1.84	--
	03/26/02	2.00	--
	06/14/02	2.00	--
	09/20/02	2.10	--
	12/12/02	2.00	--
	03/07/03	0.10	--
	06/06/03	1.50	--
	09/05/03	1.80	--
	12/15/03	3.02	--
MW-8	09/07/01	2.17	--
	12/05/01	2.10	--
	03/26/02	2.10	--
	06/14/02	2.00	--
	09/20/02	2.10	--
	12/12/02	2.20	--
	03/07/03	0.60	--
	06/06/03	1.70	--
	09/05/03	2.00	--
	12/15/03	2.93	--
MW-9	09/07/01	1.72	--
	12/05/01	2.21	--
	03/26/02	2.20	--
	06/14/02	1.90	--
	09/20/02	2.00	--
	12/12/02	2.10	--
	03/07/03	0.60	--
	06/06/03	1.80	--
	09/05/03	1.90	--
	12/15/03	3.15	--

**EXPLANATIONS:**

(mg/L) = Milligrams per liter  
-- = Not Measured

## STANDARD OPERATING PROCEDURE - GROUNDWATER SAMPLING

Gettler-Ryan Inc. field personnel adhere to the following procedures for the collection and handling of groundwater samples prior to analysis by the analytical laboratory. Prior to sample collection, the type of analysis to be performed is determined. Loss prevention of volatile compounds is controlled and sample preservation for subsequent analysis is maintained.

Prior to sampling, the presence or absence of free-phase hydrocarbons is determined using an interface probe. Product thickness, if present, is measured to the nearest 0.01 foot and is noted in the field notes. In addition, all depth to water level measurements are collected with a static water level indicator and are also recorded in the field notes, prior to purging and sampling any wells.

After water levels are collected and prior to sampling, if purging is to occur, each well is purged a minimum of three well casing volumes of water using pre-cleaned pumps (stack, suction, Grundfos), or disposable bailers. Temperature, pH and electrical conductivity are measured a minimum of three times during the purging. Purging continues until these parameters stabilize.

Groundwater samples are collected using disposable bailers. The water samples are transferred from the bailer into appropriate containers. Pre-preserved containers, supplied by analytical laboratories, are used when possible. When pre-preserved containers are not available, the laboratory is instructed to preserve the sample as appropriate. Duplicate samples are collected for the laboratory to use in maintaining quality assurance/quality control standards. The samples are labeled to include the job number, sample identification, collection date and time, analysis, preservation (if any), and the sample collector's initials. The water samples are placed in a cooler, maintained at 4°C for transport to the laboratory. Once collected in the field, all samples are maintained under chain of custody until delivered to the laboratory.

The chain of custody document includes the job number, type of preservation, if any, analysis requested, sample identification, date and time collected, and the sample collector's name. The chain of custody is signed and dated (including time of transfer) by each person who receives or surrenders the samples, beginning with the field personnel and ending with the laboratory personnel.

A laboratory supplied trip blank accompanies each sampling set. For sampling sets greater than 20 samples, 5% trip blanks are included. The trip blank is analyzed for some or all of the same compounds as the groundwater samples.

As requested by Chevron Products Company, the purge water and decontamination water generated during sampling activities is transported by IWM to McKittrick Waste Management located in McKittrick, California.



# GETTLER - RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242  
 Site Address: 5280 Hopyard Road Event Date: 12-15-03 (inclusive)  
 City: Pleasanton, CA Sampler: Joc

Well ID: MW-4 Date Monitored: 12-15-03 Well Condition: O.K.  
 Well Diameter: 2 in.  
 Total Depth: 24.79 ft.  
 Depth to Water: 7.21 ft.  
17.48 xVF 0.17 = 2.97 x3 (case volume) = Estimated Purge Volume: 9 gal.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

**Purge Equipment:**  
 Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump  \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Other: \_\_\_\_\_

**Sampling Equipment:**  
 Disposable Bailer  \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Discrete Bailer \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Bailed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: 0 ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 0825 Weather Conditions: clear/cold  
 Sample Time/Date: 0855 12-15-03 Water Color: clear Odor: \_\_\_\_\_  
 Purging Flow Rate: 1 gpm. Sediment Description: \_\_\_\_\_  
 Did well de-water? \_\_\_\_\_ If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (CE)	D.O. (mg/L)	ORP (mV)
<u>0837</u>	<u>3</u>	<u>7.57</u>	<u>8.03</u>	<u>69.4</u>	<u>Pre: 2.46</u>	
<u>0840</u>	<u>6</u>	<u>7.56</u>	<u>7.91</u>	<u>70.0</u>		
<u>0843</u>	<u>9</u>	<u>7.47</u>	<u>7.31</u>	<u>70.2</u>		

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-4</u>	<u>6</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)/ETHANOL(8260)</u>

COMMENTS: \_\_\_\_\_

Add/Replaced Lock: \_\_\_\_\_ Add/Replaced Plug: \_\_\_\_\_ Size: \_\_\_\_\_



# GETTLER-RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242  
 Site Address: 5280 Hopyard Road Event Date: 12-15-03 (inclusive)  
 City: Pleasanton, CA Sampler: Joe

Well ID: MW-5 Date Monitored: 12-15-03 Well Condition: OK  
 Well Diameter: 2 in.  
 Total Depth: 23.91 ft.  
 Depth to Water: 8.35 ft.  
15.56 xVF 0.17 = 2.65 x3 (case volume) = Estimated Purge Volume: 8 gal.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Purge Equipment:  
 Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump  \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Other: \_\_\_\_\_

Sampling Equipment:  
 Disposable Bailer  \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Discrete Bailer \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Bailed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: 0 ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 0935 Weather Conditions: clear  
 Sample Time/Date: 1002 12-15-03 Water Color: clear Odor: \_\_\_\_\_  
 Purging Flow Rate: 1 gpm. Sediment Description: \_\_\_\_\_  
 Did well de-water? \_\_\_\_\_ If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (C/E)	D.O. (mg/L)	ORP (mV)
<u>0946</u>	<u>3</u>	<u>6.84</u>	<u>1.81</u>	<u>69.0</u>	Pre: <u>1.78</u>	
<u>0948</u>	<u>5</u>	<u>6.74</u>	<u>1.90</u>	<u>69.2</u>		
<u>0951</u>	<u>8</u>	<u>6.76</u>	<u>1.94</u>	<u>69.2</u>		

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-5</u>	<u>6</u> x vov vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)/ ETHANOL(8260)</u>

COMMENTS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Add/Replaced Lock: \_\_\_\_\_ Add/Replaced Plug: \_\_\_\_\_ Size: \_\_\_\_\_





# GETTLER-RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242  
 Site Address: 5280 Hopyard Road Event Date: 12-15-03 (inclusive)  
 City: Pleasanton, CA Sampler: Joe

Well ID: MW-6 Date Monitored: 12-15-03 Well Condition: O.K.  
 Well Diameter: 2 in.  
 Total Depth: 25.19 ft.  
 Depth to Water: 8.59 ft.  
16.60 xVF 0.17 = 2.82 x3 (case volume) = Estimated Purge Volume: 8.5 gal.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

### Purge Equipment:

Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump  \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Other: \_\_\_\_\_

### Sampling Equipment:

Disposable Bailer  \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Discrete Bailer \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Bailed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: 0 ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 0904 Weather Conditions: clear  
 Sample Time/Date: 0925 12-15-03 Water Color: clear Odor: \_\_\_\_\_  
 Purging Flow Rate: 1 gpm. Sediment Description: \_\_\_\_\_  
 Did well de-water? \_\_\_\_\_ If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm) x 10 <sup>2</sup>	Temperature (C/E)	D.O. (mg/L)	ORP (mV)
<u>0913</u>	<u>3.5</u>	<u>7.48</u>	<u>5.58</u>	<u>69.0</u>	Pre: <u>1.91</u>	_____
<u>0915</u>	<u>6</u>	<u>7.50</u>	<u>6.12</u>	<u>69.0</u>	_____	_____
<u>0917</u>	<u>6.5</u>	<u>7.51</u>	<u>6.18</u>	<u>69.9</u>	_____	_____
_____	_____	_____	_____	_____	_____	_____

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-6</u>	<u>6 x vov vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)/ ETHANOL(8260)</u>
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

### COMMENTS:

\_\_\_\_\_

Add/Replaced Lock: \_\_\_\_\_

Add/Replaced Plug: \_\_\_\_\_ Size: \_\_\_\_\_



# GETTLER - RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242  
 Site Address: 5280 Hopyard Road Event Date: 12-15-03 (inclusive)  
 City: Pleasanton, CA Sampler: SoC

Well ID: MW-7 Date Monitored: 12-15-03 Well Condition: o.k.  
 Well Diameter: 2 in.  
 Total Depth: 20.02 ft.  
 Depth to Water: 7.21 ft.  
12.81 xVF 0.17 = 2.18 x3 (case volume) = Estimated Purge Volume: 7 gal.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Purge Equipment:  
 Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump  \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Other: \_\_\_\_\_

Sampling Equipment:  
 Disposable Bailer  \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Discrete Bailer \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Bailed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: 0 ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 0630 Weather Conditions: clear  
 Sample Time/Date: 0655 12-15-03 Water Color: clear Odor: \_\_\_\_\_  
 Purging Flow Rate: 1 gpm. Sediment Description: \_\_\_\_\_  
 Did well de-water? \_\_\_\_\_ If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm) <sup>100</sup>	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>0644</u>	<u>25</u>	<u>7.41</u>	<u>6.97</u>	<u>70.1</u>	<u>Pre: 3.02</u>	
<u>0646</u>	<u>5</u>	<u>7.30</u>	<u>7.11</u>	<u>69.7</u>		
<u>0648</u>	<u>7</u>	<u>7.32</u>	<u>7.24</u>	<u>69.8</u>		

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-7</u>	<u>6</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)/ETHANOL(8260)</u>

COMMENTS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Add/Replaced Lock: \_\_\_\_\_ Add/Replaced Plug: \_\_\_\_\_ Size: \_\_\_\_\_



# GETTLER-RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917  
 Site Address: 5280 Hopyard Road  
 City: Pleasanton, CA

Job Number: 385242  
 Event Date: 12-15-03 (inclusive)  
 Sampler: Joc

Well ID: MW-8 Date Monitored: 12-15-03 Well Condition: OK  
 Well Diameter: 2 in.  
 Total Depth: 20.35 ft.  
 Depth to Water: 8.27 ft.  
12.08 x VF 0.17 = 2.05 x3 (case volume) = Estimated Purge Volume: 6.5 gal.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

### Purge Equipment:

Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump  \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Other: \_\_\_\_\_

### Sampling Equipment:

Disposable Bailer  \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Discrete Bailer \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Bailed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: 0 ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 0712 Weather Conditions: clear  
 Sample Time/Date: 0735 / 12-15-03 Water Color: clear Odor: \_\_\_\_\_  
 Purging Flow Rate: 1 gpm. Sediment Description: \_\_\_\_\_  
 Did well de-water? \_\_\_\_\_ If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (C)	D.O. (mg/L)	ORP (mV)
<u>0720</u>	<u>2</u>	<u>7.27</u>	<u>10.11</u>	<u>69.5</u>	<u>Pre: 2.93</u>	
<u>0723</u>	<u>4</u>	<u>7.30</u>	<u>9.21</u>	<u>68.9</u>		
<u>0725</u>	<u>6.5</u>	<u>7.26</u>	<u>9.24</u>	<u>69.3</u>		

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-8</u>	<u>6</u> x vva vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)/ ETHANOL(8260)</u>

### COMMENTS:

Add/Replaced Lock: \_\_\_\_\_

Add/Replaced Plug: \_\_\_\_\_ Size: \_\_\_\_\_



# GETTLER-RYAN INC.

## WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242  
 Site Address: 5280 Hopyard Road Event Date: 12-15-03 (inclusive)  
 City: Pleasanton, CA Sampler: Joe

Well ID: MW-9 Date Monitored: 12-15-03 Well Condition: OK  
 Well Diameter: 2 in.  
 Total Depth: 19.98 ft.  
 Depth to Water: 7.08 ft.  
12.90 xVF 0.17 = 2.19 x3 (case volume) = Estimated Purge Volume: 7 gal.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

**Purge Equipment:**  
 Disposable Bailer \_\_\_\_\_  
 Stainless Steel Bailer \_\_\_\_\_  
 Stack Pump \_\_\_\_\_  
 Suction Pump  \_\_\_\_\_  
 Grundfos \_\_\_\_\_  
 Other: \_\_\_\_\_

**Sampling Equipment:**  
 Disposable Bailer  \_\_\_\_\_  
 Pressure Bailer \_\_\_\_\_  
 Discrete Bailer \_\_\_\_\_  
 Other: \_\_\_\_\_

Time Started: \_\_\_\_\_ (2400 hrs)  
 Time Bailed: \_\_\_\_\_ (2400 hrs)  
 Depth to Product: \_\_\_\_\_ ft  
 Depth to Water: \_\_\_\_\_ ft  
 Hydrocarbon Thickness: 0 ft  
 Visual Confirmation/Description: \_\_\_\_\_  
 Skimmer / Absorbant Sock (circle one)  
 Amt Removed from Skimmer: \_\_\_\_\_ gal  
 Amt Removed from Well: \_\_\_\_\_ gal  
 Product Transferred to: \_\_\_\_\_

Start Time (purge): 0742 Weather Conditions: clear/cold  
 Sample Time/Date: 0815 12-15-03 Water Color: clear Odor: \_\_\_\_\_  
 Purging Flow Rate: 1 gpm. Sediment Description: \_\_\_\_\_  
 Did well de-water? \_\_\_\_\_ If yes, Time: \_\_\_\_\_ Volume: \_\_\_\_\_ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (C/E)	D.O. (mg/L)	ORP (mV)
<u>0758</u>	<u>2.5</u>	<u>7.74</u>	<u>8.95</u>	<u>69.2</u>	<u>Pre: 3.15</u>	
<u>0801</u>	<u>5</u>	<u>7.20</u>	<u>8.96</u>	<u>69.1</u>		
<u>0804</u>	<u>7</u>	<u>7.22</u>	<u>8.50</u>	<u>69.4</u>		

### LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-9</u>	<u>6 x vva vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)/ ETHANOL(8260)</u>

COMMENTS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Add/Replaced Lock: \_\_\_\_\_ Add/Replaced Plug: \_\_\_\_\_ Size: \_\_\_\_\_

# Chevron California Region Analysis Request/Chain of Custody



121603-003

Acc. #: 10904 For Lancaster Laboratories use only  
 Sample #: 4186103-11

SCR#: \_\_\_\_\_  
**Gr. # 878744**

Facility #: SS#9-0917 G-R#385242 Global ID#T0600100345  
 Site Address: 5280 HOPYARD ROAD, PLEASANTON, CA  
 Chevron PM: KS Lead Consultant: CAMBRIA  
 Consultant/Office: G-R, Inc., 6747 Sierra Court, Suite J, Dublin, Ca. 94568  
 Consultant Prj. Mgr.: Deanna L. Harding (deanna@grinc.com)  
 Consultant Phone #: 925-551-7555 Fax #: 925-551-7899  
 Sampler: JOE ATEMIAN  
 Service Order #: \_\_\_\_\_  Non SAR: \_\_\_\_\_

**Matrix**  
 Potable Water  
 NPDES  
 Soil  
 Air  
 Composite

Analyses Requested									
Preservation Codes									
H	H							H	
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BTEX + MTBE 8260	8021	TPH 8015 MOD	GRO	TPH 8015 MOD DRO	Silica Gel Cleanup	B260 full scan	Oxygenates	Lead 7420	7421
<i>Ethanol (8260)</i>									

**Preservative Codes**  
 H = HCl      T = Thiosulfate  
 N = HNO<sub>3</sub>    B = NaOH  
 S = H<sub>2</sub>SO<sub>4</sub>   O = Other

- J value reporting needed
- Must meet lowest detection limits possible for 8260 compounds
- 8021 MTBE Confirmation
- Confirm highest hit by 8260
- Confirm all hits by 8260
- Run \_\_\_ oxy s on highest hit
- Run \_\_\_ oxy s on all hits

Sample Identification	Date Collected	Time Collected	Grab	Composite	Soil	Water	Oil	Air	Total Number of Containers	BTEX + MTBE 8260	8021	TPH 8015 MOD	GRO	TPH 8015 MOD DRO	Silica Gel Cleanup	B260 full scan	Oxygenates	Lead 7420	7421	Ethanol (8260)	
QA	-	-	-	-		<input checked="" type="checkbox"/>			2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>										
MW-4	12-15-03	0855	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>
MW-5	"	1002	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>
MW-6	"	0925	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>
MW-7	"	0655	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>
MW-8	"	0735	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>
MW-9	"	0815	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>										<input checked="" type="checkbox"/>

**Comments / Remarks**

**Turnaround Time Requested (TAT) (please circle)**  
 STD. TAT      72 hour      48 hour  
 24 hour      4 day      5 day

**Data Package Options (please circle if required)**  
 QC Summary      Type I — Full  
 Type VI (Raw Data)       Coelt Deliverable not needed  
 WIP (RWQCB)  
 Disk

Relinquished by: <i>[Signature]</i>	Date: <u>12-12-03</u>	Time: <u>1020</u>	Received by: <i>[Signature]</i>	Date: <u>12/16/03</u>	Time: <u>0802</u>
Relinquished by: <i>[Signature]</i>	Date: <u>12/16/03</u>	Time: _____	Received by: <i>[Signature]</i>	Date: <u>12/16/03</u>	Time: <u>0930</u>
Relinquished by: <i>[Signature]</i>	Date: <u>12/16/03</u>	Time: <u>1430</u>	Received by: <i>[Signature]</i>	Date: <u>12/16/03</u>	Time: _____
Relinquished by Commercial Carrier: UPS      FedEx      Other <i>[Signature]</i>	Temperature Upon Receipt: <u>2</u> °C		Received by: <i>[Signature]</i>	Date: <u>12/17/03</u>	Time: <u>0930</u>
Custody Seals intact? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No					

## ANALYTICAL RESULTS

Prepared for:

ChevronTexaco  
6001 Bollinger Canyon Rd L4310  
San Ramon CA 94583

925-842-8582

Prepared by:

Lancaster Laboratories  
2425 New Holland Pike  
Lancaster, PA 17605-2425

## SAMPLE GROUP

The sample group for this submittal is 878744. Samples arrived at the laboratory on Wednesday, December 17, 2003. The PO# for this group is 99011184 and the release number is STREICH.

<u>Client Description</u>		<u>Lancaster Labs Number</u>
QA-T-031215	NA Water	4186705
MW-4-W-031215	Grab Water	4186706
MW-5-W-031215	Grab Water	4186707
MW-6-W-031215	Grab Water	4186708
MW-7-W-031215	Grab Water	4186709
MW-8-W-031215	Grab Water	4186710
MW-9-W-031215	Grab Water	4186711


1 COPY TO  
ELECTRONIC  
COPY TO

Cambria C/O Gettler- Ryan  
Gettler-Ryan

Attn: Deanna L. Harding  
Attn: Cheryl Hansen

Questions? Contact your Client Services Representative  
Teresa L Cunningham at (717) 656-2300.

Respectfully Submitted,

  
Victoria M. Martell  
Chemist

Lancaster Laboratories Sample No. **WW 4186705**

 QA-T-031215                      NA                      Water  
 Facility# 90917    Job# 385242                      GRD  
 5280 Hopyard-Pleasanton    T0600100345    QA  
 Collected: 12/15/2003 00:00

Account Number: 10904

 Submitted: 12/17/2003 09:25  
 Reported: 12/26/2003 at 13:45  
 Discard: 01/26/2004

 ChevronTexaco  
 6001 Bollinger Canyon Rd L4310  
 San Ramon CA 94583

HRPQA

CAT No.	Analysis Name	CAS Number	As Received	As Received	Units	Dilution Factor
			Result	Method Detection Limit		
01728	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time.					
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

### Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis	Analyst	Dilution Factor
				Date and Time		
01728	TPH-GRO - Waters	N. CA LUFT Gasoline	1	12/18/2003 17:00	Michael F Barrow	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	12/19/2003 00:20	Elizabeth M Taylor	1
01146	GC VOA Water Prep	SW-846 5030B	1	12/18/2003 17:00	Michael F Barrow	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	12/19/2003 00:20	Elizabeth M Taylor	n.a.



Lancaster Laboratories Sample No. **WW 4186706**

 MW-4-W-031215                      Grab                      Water  
 Facility# 90917    Job# 385242                                      GRD  
 5280 Hopyard-Pleasanton    T0600100345    MW-4  
 Collected: 12/15/2003 08:55                      by JA

Account Number: 10904

 Submitted: 12/17/2003 09:25  
 Reported: 12/26/2003 at 13:45  
 Discard: 01/26/2004

 ChevronTexaco  
 6001 Bollinger Canyon Rd L4310  
 San Ramon CA 94583

HRP04

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time.						
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH					
01587	Ethanol	64-17-5	N.D.	50.	ug/l	1
02010	Methyl Tertiary Butyl Ether	1634-04-4	5.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

### Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	12/18/2003 17:29	Michael F Barrow	1
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH	SW-846 8260B	1	12/18/2003 20:48	Elizabeth M Taylor	1
01146	GC VOA Water Prep	SW-846 5030B	1	12/18/2003 17:29	Michael F Barrow	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	12/18/2003 20:48	Elizabeth M Taylor	n.a.

Lancaster Laboratories Sample No. **WW 4186707**

 MW-5-W-031215                      Grab                      Water  
 Facility# 90917    Job# 385242                                      GRD  
 5280 Hopyard-Pleasanton    T0600100345    MW-5  
 Collected: 12/15/2003 10:02                      by JA

Account Number: 10904

 Submitted: 12/17/2003 09:25  
 Reported: 12/26/2003 at 13:45  
 Discard: 01/26/2004

 ChevronTexaco  
 6001 Bollinger Canyon Rd L4310  
 San Ramon CA 94583

HRP05

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	22,000.	2,500.	ug/l	50
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time.					
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH					
01587	Ethanol	64-17-5	N.D.	130.	ug/l	2.5
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	1.	ug/l	2.5
05401	Benzene	71-43-2	240.	1.	ug/l	2.5
05407	Toluene	108-88-3	23.	1.	ug/l	2.5
05415	Ethylbenzene	100-41-4	1,300.	13.	ug/l	25
06310	Xylene (Total)	1330-20-7	970.	1.	ug/l	2.5

The reporting limits for the GC/MS volatile compounds were raised because sample dilution was necessary to bring target compounds into the calibration range of the system.

State of California Lab Certification No. 2116

### Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	12/18/2003 17:58	Michael F Barrow	50
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH	SW-846 8260B	1	12/18/2003 21:09	Elizabeth M Taylor	2.5
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH	SW-846 8260B	1	12/18/2003 21:31	Elizabeth M Taylor	25
01146	GC VOA Water Prep	SW-846 5030B	1	12/18/2003 17:58	Michael F Barrow	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	12/18/2003 21:09	Elizabeth M Taylor	n.a.

Lancaster Laboratories Sample No. WW 4186708

 MW-6-W-031215 Grab Water GRD  
 Facility# 90917 Job# 385242  
 5280 Hopyard-Pleasanton T0600100345 MW-6  
 Collected: 12/15/2003 09:25 by JA

Account Number: 10904

 Submitted: 12/17/2003 09:25  
 Reported: 12/26/2003 at 13:45  
 Discard: 01/26/2004

 ChevronTexaco  
 6001 Bollinger Canyon Rd L4310  
 San Ramon CA 94583

HRP06

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time.						
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH					
01587	Ethanol	64-17-5	N.D.	50.	ug/l	1
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1
Matrix QC was performed on this sample for the GCMS volatile analysis. Please see the attached QC summary report for compounds showing a matrix bias.						

State of California Lab Certification No. 2116

### Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	12/18/2003 18:27	Michael F Barrow	1
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH	SW-846 8260B	1	12/18/2003 21:52	Elizabeth M Taylor	1
01146	GC VOA Water Prep	SW-846 5030B	1	12/18/2003 18:27	Michael F Barrow	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	12/18/2003 21:52	Elizabeth M Taylor	n.a.

Lancaster Laboratories Sample No. WW 4186709

 MW-7-W-031215 Grab Water GRD  
 Facility# 90917 Job# 385242  
 5280 Hopyard-Pleasanton T0600100345 MW-7  
 Collected: 12/15/2003 06:55 by JA

Account Number: 10904

 Submitted: 12/17/2003 09:25  
 Reported: 12/26/2003 at 13:45  
 Discard: 01/26/2004

 ChevronTexaco  
 6001 Bollinger Canyon Rd L4310  
 San Ramon CA 94583

HRP07

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time.					
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH					
01587	Ethanol	64-17-5	N.D.	50.	ug/l	1
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

### Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	12/18/2003 18:56	Michael F Barrow	1
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH	SW-846 8260B	1	12/18/2003 22:55	Elizabeth M Taylor	1
01146	GC VOA Water Prep	SW-846 5030B	1	12/18/2003 18:56	Michael F Barrow	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	12/18/2003 22:55	Elizabeth M Taylor	n.a.

Lancaster Laboratories Sample No. **WW 4186710**

 MW-8-W-031215                      Grab                      Water  
 Facility# 90917    Job# 385242                                      GRD  
 5280 Hopyard-Pleasanton    T0600100345    MW-8  
 Collected: 12/15/2003 07:35                      by JA

Account Number: 10904

 Submitted: 12/17/2003 09:25  
 Reported: 12/26/2003 at 13:45  
 Discard: 01/26/2004

 ChevronTexaco  
 6001 Bollinger Canyon Rd L4310  
 San Ramon CA 94583

HRP08

CAT No.	Analysis Name	CAS Number	As Received Result	As Received	Units	Dilution Factor
				Method		
01728	TPH-GRO - Waters	n.a.	N.D.	50. Detection Limit	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time.						
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH					
01587	Ethanol	64-17-5	N.D.	50.	ug/l	1
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

### Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis	Analyst	Dilution Factor
				Date and Time		
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	12/18/2003 19:25	Michael F Barrow	1
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH	SW-846 8260B	1	12/18/2003 23:17	Elizabeth M Taylor	1
01146	GC VOA Water Prep	SW-846 5030B	1	12/18/2003 19:25	Michael F Barrow	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	12/18/2003 23:17	Elizabeth M Taylor	n.a.

Lancaster Laboratories Sample No. **WW 4186711**

 MW-9-W-031215                      Grab                      Water  
 Facility# 90917    Job# 385242                                      GRD  
 5280 Hopyard-Pleasanton    T0600100345    MW-9  
 Collected: 12/15/2003 08:15                      by JA

Account Number: 10904

 Submitted: 12/17/2003 09:25  
 Reported: 12/26/2003 at 13:45  
 Discard: 01/26/2004

 ChevronTexaco  
 6001 Bollinger Canyon Rd L4310  
 San Ramon CA 94583

HRP09

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time.						
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH					
01587	Ethanol	64-17-5	N.D.	50.	ug/l	1
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

### Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	12/18/2003 19:54	Michael F Barrow	1
01594	BTEX+5 Oxygenates+EDC+EDB+ETOH	SW-846 8260B	1	12/18/2003 23:38	Elizabeth M Taylor	1
01146	GC VOA Water Prep	SW-846 5030B	1	12/18/2003 19:54	Michael F Barrow	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	12/18/2003 23:38	Elizabeth M Taylor	n.a.

## Quality Control Summary

 Client Name: ChevronTexaco  
 Reported: 12/26/03 at 01:46 PM

Group Number: 878744

### Laboratory Compliance Quality Control

Analysis Name	Blank Result	Blank MDL	Report Units	LCS %REC	LCSD %REC	LCS/LCSD Limits	RPD	RPD Max
Batch number: 03352A08B TPH-GRO - Waters	N.D.	50.	ug/l	115		70-130		
Batch number: P033522AA Ethanol	N.D.	50.	ug/l	134		46-145		
Methyl Tertiary Butyl Ether	N.D.	0.5	ug/l	92		77-127		
Benzene	N.D.	0.5	ug/l	93		85-117		
Toluene	N.D.	0.5	ug/l	91		85-115		
Ethylbenzene	N.D.	0.5	ug/l	91		82-119		
Xylene (Total)	N.D.	0.5	ug/l	91		84-120		

### Sample Matrix Quality Control

Analysis Name	MS %REC	MSD %REC	MS/MSD Limits	RPD	BKG MAX	DUP CONC	DUP RPD	Dup RPD Max
Batch number: 03352A08B TPH-GRO - Waters	126	123	63-154	2	30			
Batch number: P033522AA Ethanol	83	89	38-149	7	30			
Methyl Tertiary Butyl Ether	97	96	69-134	1	30			
Benzene	98	100	83-128	3	30			
Toluene	96	97	83-127	1	30			
Ethylbenzene	97	98	82-129	1	30			
Xylene (Total)	96	97	82-130	1	30			

### Surrogate Quality Control

 Analysis Name: TPH-GRO - Waters  
 Batch number: 03352A08B  
 Trifluorotoluene-F

4186705	116
4186706	113
4186707	124
4186708	114
4186709	113
4186710	113
4186711	112
Blank	115
LCS	116
MS	118
MSD	116

Limits: 57-146

 Analysis Name: BTEX+MTBE by 8260B  
 Batch number: P033522AA

\*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The background result was more than four times the spike added.

## Quality Control Summary

Client Name: ChevronTexaco  
Reported: 12/26/03 at 01:46 PM

Group Number: 878744

### Surrogate Quality Control

	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
4186705	100	99	104	97
4186706	98	98	104	97
4186707	100	100	103	98
4186708	101	101	104	97
4186709	100	100	104	97
4186710	101	101	105	97
4186711	102	100	103	97
Blank	97	97	104	97
LCS	100	98	103	96
MS	100	100	104	97
MSD	101	99	103	97
Limits:	81-120	82-112	85-112	83-113

\*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The background result was more than four times the spike added.



# Explanation of Symbols and Abbreviations

The following defines common symbols and abbreviations used in reporting technical data:

<b>N.D.</b>	none detected	<b>BMQL</b>	Below Minimum Quantitation Level
<b>TNTC</b>	Too Numerous To Count	<b>MPN</b>	Most Probable Number
<b>IU</b>	International Units	<b>CP Units</b>	cobalt-chloroplatinate units
<b>umhos/cm</b>	micromhos/cm	<b>NTU</b>	nephelometric turbidity units
<b>C</b>	degrees Celsius	<b>F</b>	degrees Fahrenheit
<b>meq</b>	milliequivalents	<b>lb.</b>	pound(s)
<b>g</b>	gram(s)	<b>kg</b>	kilogram(s)
<b>ug</b>	microgram(s)	<b>mg</b>	milligram(s)
<b>ml</b>	milliliter(s)	<b>l</b>	liter(s)
<b>m3</b>	cubic meter(s)	<b>ul</b>	microliter(s)
<b>&lt;</b>	less than - The number following the sign is the <u>limit of quantitation</u> , the smallest amount of analyte which can be reliably determined using this specific test.		
<b>&gt;</b>	greater than		
<b>J</b>	estimated value - The result falls within the Method Detection Limit (MDL) and Limit of Quantitation (LOQ).		
<b>ppm</b>	parts per million - One ppm is equivalent to one milligram per kilogram (mg/kg), or one gram per million grams. For aqueous liquids, ppm is usually taken to be equivalent to milligrams per liter (mg/l), because one liter of water has a weight very close to a kilogram. For gases or vapors, one ppm is equivalent to one microliter of gas per liter of gas.		
<b>ppb</b>	parts per billion		
<b>Dry weight basis</b>	Results printed under this heading have been adjusted for moisture content. This increases the analyte weight concentration to approximate the value present in a similar sample without moisture. All other results are reported on an as-received basis.		

## U.S. EPA CLP Data Qualifiers:

Organic Qualifiers	Inorganic Qualifiers
<b>A</b> TIC is a possible aldol-condensation product	<b>B</b> Value is <CRDL, but ≥IDL
<b>B</b> Analyte was also detected in the blank	<b>E</b> Estimated due to interference
<b>C</b> Pesticide result confirmed by GC/MS	<b>M</b> Duplicate injection precision not met
<b>D</b> Compound quantitated on a diluted sample	<b>N</b> Spike sample not within control limits
<b>E</b> Concentration exceeds the calibration range of the instrument	<b>S</b> Method of standard additions (MSA) used for calculation
<b>N</b> Presumptive evidence of a compound (TICs only)	<b>U</b> Compound was not detected
<b>P</b> Concentration difference between primary and confirmation columns >25%	<b>W</b> Post digestion spike out of control limits
<b>U</b> Compound was not detected	<b>*</b> Duplicate analysis not within control limits
<b>X,Y,Z</b> Defined in case narrative	<b>+</b> Correlation coefficient for MSA <0.995

Analytical test results for methods listed on the laboratories' accreditation scope meet all requirements of NELAC unless otherwise noted under the individual analysis.

Measurement uncertainty values, as applicable, are available upon request.

Tests results relate only to the sample tested. Clients should be aware that a critical step in a chemical or microbiological analysis is the collection of the sample. Unless the sample analyzed is truly representative of the bulk of material involved, the test results will be meaningless. If you have questions regarding the proper techniques of collecting samples, please contact us. We cannot be held responsible for sample integrity, however, unless sampling has been performed by a member of our staff. This report shall not be reproduced except in full, without the written approval of the laboratory.

**WARRANTY AND LIMITS OF LIABILITY** - In accepting analytical work, we warrant the accuracy of test results for the sample as submitted. THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. WE DISCLAIM ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING A WARRANTY OF FITNESS FOR PARTICULAR PURPOSE AND WARRANTY OF MERCHANTABILITY. IN NO EVENT SHALL LANCASTER LABORATORIES BE LIABLE FOR INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFIT OR GOODWILL REGARDLESS OF (A) THE NEGLIGENCE (EITHER SOLE OR CONCURRENT) OF LANCASTER LABORATORIES AND (B) WHETHER LANCASTER LABORATORIES HAS BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. We accept no legal responsibility for the purposes for which the client uses the test results. No purchase order or other order for work shall be accepted by Lancaster Laboratories which includes any conditions that vary from the Standard Terms and Conditions of Lancaster Laboratories and we hereby object to any conflicting terms contained in any acceptance or order submitted by client.