March 30, 1994

131.0100.003

Alameda County Environmental Health Services Hazardous Materials Division 80 Swan Way, Room 200 Oakland, California 94621

Attention: Ms. Susan Hugo

QUARTERLY GROUNDWATER MONITORING REPORT FEBRUARY 1994 SAMPLING EVENT EMERY BAY PLAZA 1650 65TH STREET EMERYVILLE, CALIFORNIA SMEMAZMAT

Dear Ms. Hugo:

This letter presents data collected by PES Environmental, Inc. (PES) during the February 14, 1994 quarterly groundwater monitoring conducted at Emery Bay Plaza, located at 1650 65th Street in Emeryville, California (Plate 1). PES has been retained by Emery Bay Plaza to conduct groundwater monitoring at the site. PES also provides operation, maintenance and monitoring of a groundwater extraction and treatment system at the site.

The purpose of the groundwater monitoring program at this site is to: (1) evaluate the presence of hydrocarbons in groundwater; (2) provide data to assess the performance and effectiveness of the groundwater remedial program; and (3) monitor seasonal water level variations at the site. The monitoring is performed in accordance with California Regional Water Quality Control Board (RWQCB) guidelines and the approved remedial action plan for this site.

BACKGROUND

Six monitoring wells and one extraction well were installed at the site (Plate 2) following removal of an onsite underground storage tank (UST) in July 1987 and several offsite USTs in September and October 1989. Groundwater has been monitored since November 1989. An activated carbon groundwater treatment system was installed and its operation was begun in December 1990. Discharges of treated groundwater to the sanitary sewer have been conducted under the authority of an East Bay Municipal Utility District wastewater discharge permit (Permit # 502-45131). Groundwater extraction was discontinued on October 25, 1993

Ms. Susan Hugo March 30, 1994 Page 2

pending startup of a passive in-situ bioremediation pilot program. The present sampling is the eighteenth consecutive sampling event since groundwater monitoring was initiated, and the tenth to be conducted by PES.

GROUNDWATER ELEVATIONS

Water-Level Measurement Procedures

Prior to sampling, the groundwater level in each of the six monitoring wells was measured to a precision of 0.01 feet using an electronic water-level indicator. Prior to each measurement, the portion of the water-level indicator that was submerged in the well was cleaned with a mild detergent solution and rinsed with de-ionized water.

Results

Water-level data were converted to water-level elevations referenced to mean sea level (MSL). A groundwater elevation map constructed from the data is presented on Plate 3. An historical summary of groundwater elevations for wells at the site is presented in Table 1.

Groundwater elevations have increased in all monitoring wells since the November 15, 1993 sampling event. This is indicative of a seasonal rise in the regional water table because of the winter rains. Based on measured water levels on February 14, 1994 groundwater flow direction at the site was calculated to be toward the southwest, with an approximate gradient of 0.01 foot per foot. This is generally consistent with historical groundwater flow direction and gradient.

GROUNDWATER SAMPLING AND ANALYTICAL TESTING

Sampling Protocol

Groundwater samples were collected on February 14, 1994 by Blaine Tech Services, Inc. (Blaine Tech) from Monitoring Wells MW-2, MW-3, MW-4, MW-5, MW-6, MW-7 and extraction well EW-1. Prior to sampling, the groundwater was visually inspected to assess the presence of floating product. A minimum of three well volumes were evacuated prior to sampling using a teflon bladder pump. During pumping the discharge water was measured for pH, temperature, electrical conductivity and turbidity. Groundwater samples were collected with a clean teflon bailer and decanted into clean 40-milliliter glass vials with teflon lined caps.

Ms. Susan Hugo March 30, 1994 Page 3

Samples were immediately labeled to designate sample number, time and date collected, and analysis requested, and stored in a chilled, thermally insulated cooler for transport to the analytical laboratory for chemical analysis. The information collected during the groundwater sampling and the chain of custody records are presented in a groundwater sampling report prepared by Blaine Tech, provided in Appendix A.

Analytical Program

Groundwater samples from all wells including the extraction well were analyzed by Coast-to-Coast Analytical Services, Inc. (Coast to Coast), a State-certified laboratory located in San Jose, California. Samples were analyzed for total petroleum hydrocarbons quantified as gasoline (TPH-gas) and benzene, toluene, ethylbenzene, and total xylenes (BTEX) by EPA Test Method 8015M/8020.

Analytical Results

Detectable levels of TPH-gas were found in wells MW-2, MW-3, MW-5, MW-7 and EW-1. Detectable levels of BTEX were found in wells MW-2, MW-3, and EW-1; benzene was detected in MW-5 and MW-7. Consistent with historical monitoring data, Well MW-2, located within the excavation backfill for the former onsite UST, exhibited the highest levels of dissolved hydrocarbons (TPH-gas and BTEX).

Analytical results for all wells, including historical monitoring results for the previous sampling events and relevant federal and state standards, are presented in Table 2. Laboratory reports and chain of custody records are provided in Appendix B. The distribution of hydrocarbons in groundwater at the site on February 14, 1994 is presented on Plate 4.

SUMMARY

Groundwater elevations have increased in all wells since the November 15, 1994 sampling. The groundwater flow direction continues to be toward the southwest. Concentrations of TPH-gas in groundwater samples decreased in wells MW-2 and EW-1. Concentration of TPH-gas and BTEX in all other groundwater samples did not change significantly from last quarterly monitoring event.

Ms. Susan Hugo March 30, 1994 Page 4

If you have any questions or comments, please do not hesitate to call either of the undersigned.

Yours very truly,

PES ENVIRONMENTAL, INC.

Paul R. Lohman Staff Engineer

Andrew A. Briefer, P. E.

Associate Engineer

Attachments:

Table 1 Summary of Groundwater Elevations Through February 1994

Table 2 Summary of Analytical Results for Groundwater Samples Through

February 1994

Plate 1 Site Location Map

Plate 2 Well Location Map

Plate 3 Groundwater Elevation Contours on February 14, 1994

Plate 4 Dissolved Hydrocarbons in Groundwater on February 14, 1994

Appendix A Groundwater Sampling Report
Appendix B Analytical Laboratory Report

pc: Mr. Thomas Gram - P. O. Partners

Ms. Lynn Tolin - Emery Bay Plaza

Mr. Matt Dulka - Hanson, Bridgett, Marcus, Vlahos & Rudy

Table 1. Summary of Groundwater Elevations Through February 1994
Emery Bay Plaza
1650 65th Street, Emeryville, California

Well	Date	Measured	Top of	Depth to	Groundwate
Number		by	Casing	Water	Elevations
·			(feet MSL)	(feet)	(feet MSL)
MW-2	21-Feb-90	ES	15.75	11.72	4.03
10100-2	25-May-90	ES	15.75	11.83	3.92
	29-Aug-90	ES	15.75	11.72	4.03
	29-Nov-90	ES	15.75	11.99	3.76
	1-Mar-91	ES	15.79	12.87	2.92
	28-May-91	ES	15.79	12.21	3.58
	1-Aug-91	ES	15.79	12.21 NA	3.56 NA
	27-Jan-92	PES		11.78	4.01
			15.79		
	28-Feb-92	PES	15.79	11.70	4.09
	28-May-92	PES	15.79	11.83	3.96
	27-Aug-92	PES	15.79	12.28	3.51
	10-Nov-92	PES	15.79	12.40	3.39
	18-Feb-93	PES	15.79	12.00	3.79
	20-May-93	PES	15.79	12.00	3.79
	19-Aug-93	PES	15.79	12.11	3.68
	15-Nov-93	PES	15.79	11.64	4.15
	14-Feb-94	PES	15.79	11. 4 5	4.34
MW-3	21-Feb-90	ES	12.45	9.18	3.27
	25-May-90	ES	12.45	9.25	3.20
	29-Aug-90	ES	12.45	9.50	2.95
	29-Nov-90	ES	12.45	9.80	2.65
	1-Mar-91	ES	12.43	9.51	2.92
	28-May-91	ES	12.43	9.03	3.40
	1-Aug-91	ES	12.43	NA	NA
	27-Jan-92	PES	12.43	9.44	2.99
	28-Feb-92	PES	12.43	8.80	3.63
	28-May-92	PES	12.43	8.80	3.63
	27-Aug-92	PES	12.43	9.18	3.25
	10-Nov-92	PES	12.43	9.44	2.99
	18-Feb-93	PES	12.43	7.59	4.84
	20-May-93	PES	12.43	8.21	4.22
	19-Aug-93	PES	12.43	8.71	3.72
	15-Nov-93	PES	12.43	9.09	3.34
	14-Feb-94	PES	12.43	8.84	3.59
MW-4	21-Feb-90	ES	12.24	8.63	3.61
	25-May-90	ES	12.24	8.58	3.66
	29-Aug-90	ES	12.24	8.50	3.74
	29-Nov-90	ES	12.24	8.74	3.50

Table 1. Summary of Groundwater Elevations Through February 1994
Emery Bay Plaza
1650 65th Street, Emeryville, California

Well	Date	Measured	Top of	Depth to	Groundwate
Number		by	Casing	Water	Elevations
<u> </u>			(feet MSL)	(feet)	(feet MSL)
MW-4	4.8404	50	40.04	0.05	0.50
IVI VV -4	1-Mar-91	ES	12.24	8.65	3.59
	28-May-91	ES	12.24	8.57	3.67
	1-Aug-91	ES .	12.24	NA	NA
	27-Jan-92	PES	12.24	8.62	3.62
	28-Feb-92	PES	12.24	8.52	3.72
	28-May-92	PES	12.94	8.35	3.89
	27-Aug-92	PES	12.24	9.00	3.24
	10-Nov-92	PES	12.24	8.85	3.39
	18-Feb-93	PES	12.24	8.17	4.07
	20-May-93	PES	12.24	8.21	4.03
	19-Aug-93	PES	12.24	8.20	4.04
	15-Nov-93	PES	12.24	8.33	3.91
	14-Feb-94	PES	12.24	8.30	3.94
MW-5	21-Feb-90	ES	12.81	6.91	5.90
·	25-May-90	ES	12.81	7.58	5.23
	29-Aug-90	ES	12.81	7.75	5.06
	29-Nov-90	ES	12.81	8.17	4.64
	1-Mar-91	ES	12.82	8.11	4.71
	28-May-91	ES	12.82	7.39	5.43
	1-Aug-91	ES	12.82	NA	NA
	27-Jan-92	PES	12.82	7.90	4.92
	28-Feb-92	PES	12.82	7.73	5.09
	28-May-92	PES	12.82	7.18	5.64
	27-Aug-92	PES	12.82	7.54	5.28
	10-Nov-92	PES	12.82	7.90	4.92
	18-Feb-93	PES	12.82	6.58	6.24
	20-May-93	PES	12.82	6.29	6.53
	19-Aug-93	PES	12.82	6.89	5.93
	15-Nov-93	PES	12.82		5.39
	14-Feb-94			7.43	
	14-760-34	PES	12.82	7.16	5.66
MW-6	1-Mar-91	ES	12.03	8.59	3.44
	28-May-91	ES	12.03	8.35	3.68
	1-Aug-91	EŞ	12.03	NA	NA
	27-Jan-92	PES	12.03	8.32	3.71
	28-Feb-92	PES	12.03	8.08	3.95
	28-May-92	PES	12.03	8.04	3.99
	27-Aug-92	PES	12.03	8.48	3.55
	10-Nov-92	PES	12.03	8.52	3.51

Table 1. Summary of Groundwater Elevations Through February 1994
Emery Bay Plaza
1650 65th Street, Emeryville, California

Well Number	Date	Measured by	Top of Casing (feet MSL)	Depth to Water (feet)	Groundwate Elevations (feet MSL)
MW-6	18-Feb-93	PES	12.03	8.14	3.89
	20-May-93	PES	12.03	8.46	3.57
	19-Aug-93	PES	12.03	8.61	3.42
	15-Nov-93	PES	12.03	8.30	3.73
	14-Feb-94	PES	12.03	8.09	3.94
MW-7	1-Mar-91	ES	12.90	7.51	5.39
	28-May-91	ES	12.90	7.07	5.83
	1-Aug-91	ES	12.90	NA	NA
	27-Jan-92	PES	12.90	7.28	5.62
	28-Feb-92	PES	12.90	7.04	5.86
	28-May-92	PES	12.90	6.81	6.09
	27-Aug-92	PES	12.90	7.12	5.78
	10-Nov-92	PES	12.90	7.80	5.10
	18-Feb-93	PES	12.90	6.54	6.36
	20-May-93	PES	12.90	6.17	6.73
	19-Aug-93	PES	12.90	6.60	6.30
	15-Nov-93	PES	12.90	6.89	6.01
	14-Feb-94	PES	12.90	6.50	6.40

NOTES:

Ft MSL = feet above Mean Sea Level

ES = Engineering-Science, Inc. PES = PES Environmental, Inc.

NA = Information not available at this date.

Table 2. Summary of Analytical Results for Groundwater Samples Through February, 1994
Emery Bay Plaza
1650 65th Street, Emeryville, California

Well Number	Sample Date	Sampled by	TPH as Gasoline	TPH as Diesel	Benzene	Toluene	Ethyl- Benzene	Total Xylenes	Purgeable Halocarbons	Lead
					MCL = 0.001	DAL = 0.1	MCL = 0.68	MCL = 1.75		MCL = 0.005
MW-2	Nov-89	ES	100	NA	8.4	7.4	2.4	13	0.015 *	0.05
	Feb-90	ES	54	NA	7.8	5.6	1.6	8.4	0.032 *	0.021
	Maγ-90	ES	40	NA	7.8	7.5	1.6	7.6	0.076 *	0.025
	Aug-90	ES	49	4.6	9	8	ND	8.9	0.040 *	0.0059
	Nov-90	ES	73	3.5	6.9	5.9	1.4	7.4	NA	NA
	Mar-91	ES	72	1.8	5.5	6.6	1	7.7	NA	NA
	May-91	ES	31	ND	8.4	4.7	1.7	6.3	NA	NA
	Aug-91	ES	47	ND	7.6	1.6	7.3	7.8	NA	NA
	29-Jan-92	PES	77.000	NA	10.000	8.700	2.000	7.600	NA	NA
	28-Feb-92	PES	70.000	NA	9.100	6.400	0.530	7.400	NA	NA
	28-May-92	PES	54.000	NA	8.000	4.800	2.400	6.200	NA	NA
	27-Aug-92	PES	47.000	NA	2.700	2.900	3.400	9.200	NA	NA
	10-Nov-92	PES	45.000	< 20.000	6.600	4.000	2.000	5.800	< 0.050	NA
	18-Feb-93	PES	14.000	NA	2.300	0.810	0.670	1.400	NA	NA
	20-May-93	PES	43.000	NA	7.300	5.200	1.500	5.500	NA	NA
	19-Aug-93	PES	45.000	NA	4.900	3.700	1.300	3.400	NA	NA
	15-Nov-93	PES	97.000	NA	6.100	1.700	1.700	4.100	NA	NA
	14-Feb-94	PES	27.000	NA	5.000	0.830	1.200	3.100	NA	NA
MW-3	Nov-89	ES	0.13	NA	0.0022	ND	ND	0.003	ND	ND
	Feb-90	ES	ND	NA	0.0025	ND	ND	ND	NA	0.011
	May-90	ES	ND	ND	0.002	ND	ND	ND	ND	NA
	Aug-90	ES	ND	0.8	0.0044	0.0029	ND	0.0054	NA	NA
	Nov-90	ES	0.9	0.8	0.0034	ND	ND	ND	NA	NA
	Mar-91	ES	ND	ND	0.025	0.025	0.0053	0.32	NA	NA
	May-91	ES	ND	ND	0.0026	ND	ND	ND	NA	NA
	Aug-91	ES	ND	ND	0.0019	ND	ND	ND	NA	NA

Table 2. Summary of Analytical Results for Groundwater Samples Through February, 1994 Emery Bay Plaza 1650 65th Street, Emeryville, California

Well Number	Sample Date	Sampled by	TPH as Gasoline	TPH as Diesel	Benzene	Toluene	Ethyl- Benzene	Total Xylenes	Purgeable Halocarbons	Lead
					MCL = 0.001	DAL = 0.1	MCL = 0.68	MCL = 1.75		MCL = 0.005
MW-3	29-Jan-92	PES	0.092	NA	0.0024	< 0.0003	0.0006	< 0.0003	NA	NA
IVI VV -3	28-Feb-92	PES	0.160***	NA	0.0024	< 0.0003	0.0000	0.0005	NA NA	NA NA
		PES	< 0.050	NA NA	0.0028	< 0.0005	< 0.0007	< 0.0005	NA NA	NA NA
	28-May-92		0.370		0.0025	< 0.0005	< 0.0005	< 0.0005		
	27-Aug-92	PES		NA		< 0.0003			NA <0.0003	NA
	10-Nov-92	PES	0.240	< 0.100	0.0042		< 0.0003	< 0.0006	< 0.0003	NA
	18-Feb-93	PES	0.140	NA	0.0018	< 0.0005	< 0.0005	< 0.0005	NA	NA
	20-May-93	PES	0.072	NA	0.0031	< 0.0005	< 0.0005	< 0.0005	NA	NA
	19-Aug-93	PES	< 0.050	NA	0.0032	< 0.0005	< 0.0005	0.0007	NA	NA
	15-Nov-93	PES	0.070	NA	0.0023	0.0007	< 0.0005	0.0015	NA	NA
	14-Feb-94	PES	0.120	NA	0.0053	0.0023	0.0012	0.0042	NA	NA
MW-4	Nov-89	ES	0.2	NA	0.0023	ND	ND	ND	ND	ND
	Feb-90	ES	ND	NA	ND	ИD	ND	ND	NA	0.006
	May-90	ES	ND	ND	0.001	ND	ND	ND	ND	NA
	Aug-90	ES	ND	0.8	0.0089	0.0071	ND	0.0094	NA	NA
	Nov-90	ES	ND	0.7	0.0027	ND	ND	ND	NA	NA
	Mar-91	ES	NA	ND	0.003	ND	ND	ND	NA	NA
	May-91	ES	NA	ND	0.0024	ND	ND	ND	NA	NA
	Aug-91	ES	NA	ND	0.0015	ND	ND	ND	NA	NA
	29-Jan-92	PES	< 0.050	NA	0.0022	0.0004	< 0.0003	0.0007	NA	NA
	28-Feb-92	PES	< 0.050	NA	0.0016	< 0.0003	< 0.0003	0.0003	NA	NA
	28-May-92	PES	< 0.050	NA	0.0015	< 0.0005	< 0.0005	< 0.0005	NA	NA
	27-Aug-92	PES	0.080	NA	0.003	< 0.001	< 0.0005	0.0005	NA	NA
	10-Nov-92	PES	0.180	< 0.100	0.060	0.0009	< 0.0003	< 0.0006	<0.0003	NA

Table 2. Summary of Analytical Results for Groundwater Samples Through February, 1994 Emery Bay Plaza 1650 65th Street, Emeryville, California

Well Number	Sample Date	Sampled by	TPH as Gasoline	TPH as Diesel	Benzene	Toluene	Ethyl- Benzene	Total Xylenes	Purgeable Halocarbons	Lead
					MCL = 0.001	DAL = 0.1	MCL = 0.68	MCL = 1.75		MCL = 0.005
MW-4	18-Feb-93	PES	0.060	NA	0.0017	< 0.0005	< 0.0005	< 0.0005	NA	NA
19177	20-May-93	PES	< 0.050	NA	0.0022	< 0.0005	< 0.0005	< 0.0005	NA	NA
	19-Aug-93	PES	< 0.050	NA	0.0020	0.0006	< 0.0005	0.0005	NA	NA
	15-Nov-93	PES	< 0.050	NA	0.0020	0.0005	< 0.0005	0.0009	NA	NA
	14-Feb-94	PES	< 0.050	NA	< 0.0005	< 0.0005	< 0.0005	< 0.0005	ΝA	NA
MW-5	Nov-89	ES	ND	NA	0.074	ND	ND	0.0042	ND	ND
	Feb-90	ES	ND	NA	0.2	ND	ND	ND	NA	0.012
	May-90	ES	ND	ND	0.11	ND	ND	ND	ND	NA
	Aug-90	ES	ND	0.7	0.066	0.0022	ND	0.0038	NA	NA
	Nov-90	ES	0.6	0.9	0.069	ND	ND	ND	NA	NA
	Mar-91	ES	ND	1.1	0.066	0.0023	NĐ	ND	NA	NA
	May-91	ES	ND	ND	0.11	ND	ND	ND	NA	NA
	Aug-91	ES	ND	ND	0.078	0.0021	ND	ND	NA	NA
	29-Jan-92	PES	0.190	NA	0.090	0.0005	< 0.0003	0.0006	NA	NA
	28-Feb-92	PES	0.230 * * *	NA	0.110	0.0009	< 0.0003	0.0005	NA	NA
	28-May-92	PES	0.130	NA	0.100	< 0.0005	< 0.0005	< 0.0005	NA	NA
	27-Aug-92	PES	0.520	NA	0.083	0.002	< 0.0005	< 0.0005	NA	NA
	10-Nov-92	PES	0.240	< 0.100	0.074	0.0010	< 0.0003	< 0.0006	< 0.0003	NA
	18-Feb-93	PES	0.190	NA	0.056	0.0006	< 0.0005	< 0.0005	NA	NA
	20-May-93	PES	< 0.200	NA	0.056	< 0.002	< 0.002	< 0.002	NA	NA
	19-Aug-93	PES	0.170	NA	0.050	0.0007	< 0.0005	< 0.0005	NA	NA
	15-Nov-93	PES	0.220	NA	0.049	0.001	< 0.001	< 0.001	NA	NA
	14-Feb-94	PES	0.140	NA	0.062	< 0.0005	<0.0005	< 0.0005	NA	NA
MW-6	May-90	ES	NA	ND	ND	ND	ND	ND	ND	ND**
	Aug-90	ES	NA	ND	NA	NA	NΑ	NA	NA	ND**
	Nov-90	ES	1.2	1.4	0.0012	ND	ND	ND	0.0012	NA

Table 2. Summary of Analytical Results for Groundwater Samples Through February, 1994
Emery Bay Plaza
1650 65th Street, Emeryville, California

Well Number	Sample Date	Sampled by	TPH as Gasoline	TPH as Diesel	Benzene	Toluene	Ethyl- Benzene	Total Xylenes	Purgeable Halocarbons	Lead
					MCL = 0.001	DAL = 0.1	MCL = 0.68	MCL = 1.75		MCL = 0.005
MW-6	Mar-91	ES	ND	ND	ND	ND	ND	ND	NA	NA
	May-91	ES	ND	ND	ND	NĐ	ND	ND	NA	NA
	Aug-91	ES	ND	ND	ND	ND	ND	ND	NA	NA
	29-Jan-92	PES	< 0.050	NA	< 0.0003	< 0.0003	< 0.0003	< 0.0003	NA	NA
	28-Feb-92	PES	< 0.050	NA	< 0.0003	< 0.0003	< 0.0003	< 0.0003	NA	NA
	28-May-92	PES	< 0.050	NA	< 0.0005	< 0.0005	< 0.0005	< 0.0005	NA	NA
	27-Aug-92	PES	0.050***	NA	< 0.0005	< 0.001	< 0.0005	< 0.0005	NA	NA
	10-Nov-92	PES	< 0.050	< 0.100	< 0.0003	< 0.0003	< 0.0003	< 0.0006	< 0.0003	NA
	18-Feb-93	PES	< 0.050	NA	< 0.0005	< 0.0005	< 0.0005	< 0.0005	NA	NA
	20-May-93	PES	< 0.050	NA	< 0.0005	< 0.0005	< 0.0005	< 0.0005	NA	NA
	19-Aug-93	PES	< 0.050	NA	< 0.0005	< 0.0005	< 0.0005	< 0.0005	NA	NA
	15-Nov-93	PES	< 0.050	NA	< 0.0005	< 0.0005	< 0.0005	< 0.0005	NA	NA
	14-Feb-94	PES	< 0.050	NA	< 0.0005	< 0.0005	< 0.0005	< 0.0005	NA	NA
MW-7	May-90	ES	NA	0.6	0.24	ND	ND	ND	0.24	ND**
	Aug-90	ES	ND	ND	0.081	0.0018	ND	ND	0.0844	ND**
	Nov-90	ES	ND	0.8	0.054	ND	ND	ND	0.054	NA
	Mar-91	ES	ND	ND	0.1	0.0036	ND	ND	NA	NA
	May-91	ES	ND	ND	0.12	0.0027	ND	ND	NA	NA
	Aug-91	ES	ND	ND	0.074	0.0033	ND	ND	NA	NA
	29-Jan-92	PES	0.270	NA	0.025	0.0005	< 0.0003	0.0008	NA	NA
	28-Feb-92	PES	0.100 * * *	NA	0.033	0.0007	< 0.0003	0.0007	NA	NA
	28-May-92	PES	0.150	NA	0.021	< 0.0005	< 0.0005	< 0.0005	NA	NA
	27-Aug-92	PES	0.440	NA	0.011	0.001	< 0.0005	< 0.0005	NA	NA
	10-Nov-92	PES	0.370	< 0.100	0.031	0.0012	< 0.0003	0.0012	< 0.0003	NA

Table 2. Summary of Analytical Results for Groundwater Samples Through February, 1994
Emery Bay Plaza
1650 65th Street, Emeryville, California

Well Number	Sample Date	Sampled by	TPH as Gasoline	TPH as Diesel	Benzene MCL = 0.001	Toluene DAL = 0.1	Ethyl- Benzene MCL = 0.68	Total Xylenes MCL = 1.75	Purgeable Halocarbons	Lead MCL = 0.005
MW-7	18-Feb-93	PES	0.270	NA	0.077	0.0013	< 0.0005	0.0014	NA	NA
	20-May-93	PES	0.300	NA	0.150	0.003	< 0.002	0.003	NA	NA
	19-Aug-93	PES	0.110	NA	0.040	0.0010	< 0.0005	0.0011	NA	NA
	15-Nov-93	PES	0.120	NA	0.015	0.0006	< 0.0005	0.0023	NA	NA
	14-Feb-94	PES	0.120	NA	0.038	< 0.0005	< 0.0005	< 0.0005	NA	NA
EW-1	May-90	ES	20	ND	7.5	4.5	1	6.3	0.068	ND**
	Aug-90	ES	NA	3.5	6	4.2	ND	4.6	0.016 *	ND**
	Nov-90	ES	47	3.1	6	3.4	1	4.7	NA	NA
	17-Dec-90	ES	NA	NA	11	7.9	2.2	10	NA	NA
	19-Dec-90	ES	NA	NA	3.7	2.5	ND	2.3	NA	NA
	21-Dec-90	ES	NA	NA	3.2	2.2	ND	1.7	NA	NA
	27-Dec-90	ES	NA	NA	2.9	2.1	0.16	1.5	NA	NΑ
	4-Jan-91	ES	NA	NA	3.2	2.8	ND	ND	NA	NA
	11-Jan-91	ES	NA	NA	3	2.4	0.2	1.8	NA	NA
	6-Feb-91	ES	NA	NA	0.47	0.23	0.011	0.39	NA	NA
	13-Feb-91	ES	NA	NA	1.2	0.28	ND	0.36	NA	NA
	15-Mar-91	ES	NA	NA	0.13	0.085	0.006	0.17	NA	NA
	3-Jul-91	ES	NA	NA	1.3	0.95	0.22	1.4	NA	NA
	1-Aug-91	ES	NA	NA	0.22	0.19	0.013	0.27	NA	NA
	16-Aug-91	ES	NA	NA	0.17	0.16	0.013	0.19	NA	NA
	13-Nov-91	ES	NA	NA	3.1	0.27	0.04	0.22	NA	NA
	29-Jan-92	PES	2.700	NA	0.570	0.150	0.0070	0.260	NA	NA
	26-Mar-92	PES	25.000	NA	3.600	2.600	0.530	2.600	NA	NA
	28-May-92	PES	16.000	NA	3.300	3.200	0.750	2.600	NA	NA
	29-Jun-92	PES	7.000	NA	2.200	3.100	0.270	1.400	NA	NA
	21-Jul-92	PES	1.600	NA	0.220	0.017	< 0.0005	0.100	NA	NA
	27-Aug-92	PES	NS	NS	NS	NS	NS	NS	NS	NS

Table 2. Summary of Analytical Results for Groundwater Samples Through February, 1994
Emery Bay Plaza
1650 65th Street, Emeryville, California

Well Number	Sample Date	Sampled by	TPH as Gasoline	TPH as Diesel	Benzene	Toluene	Ethyl- Benzene	Total Xylenes	Purgeable Halocarbons	Lead
		<u></u>			MCL = 0.001	DAL = 0.1	MCL = 0.68	MCL = 1.75		MCL = 0.005
EW-1	23-Sep-92	PES	5.200	NA	1.100	0.590	0.100	1.000	NA	NA
	27-Oct-92	PES	1.300	NA	0.220	0.061	0.0053	0.110	NA	NA
	24-Nov-92	PES	7.100	NA	1.400	1.100	0.120	0.890	NA	NA
	18-Feb-93	PES	7.200	NA	1.400	0.930	0.210	1.000	NA	NΑ
	09-Mar-93	PES	4.600	NA	0.990	0.750	0.062	0.840	NA	NA
	21-Apr-93	PES	4.900	NΑ	0.270	0.180	0.020	0.190	NA	NA
	13-May-93	PES	2.600	NA	0.520	0.110	0.023	0.330	NA	NA
	28-Jun-93	PES	9.500	NA	1.900	0.460	0.230	1.000	NA	NA
	11-Aug-93	PES	1.300	NA	< 0.002	< 0.002	< 0.002	0.400	NA	NA
	15-Nov-93	PES	46.000	NA	2.900	0.380	0.500	1.700	NA	NA
	14-Feb-94	PES	21.000	NA	4.500	0.860	1.000	2.800	NA	NA

NOTES:

ES = Engineering-Science, Inc.

PES = PES Environmental, Inc.

NA = Not analyzed

ND = Not detected above method detection limit.

NS = Not sampled.

< 0.0005 = Not detected above indicated method detection limit.

MCL = California Maximum Contaminant level, current as of January 1991.

DAL = Department of Health Services Action Levels, current as of January 1991.


TPH = Total Petroleum Hydrocarbons

^{* = 1,2-}Dichlorethane concentration (only 1,2-Dichloroethane detected).

^{** =} Organic Lead

^{*** =} TPH quantified as gasoline but chromatogram pattern was not typical of gasoline.

^{**** =} Small amount of Diesel 2 was detected in sample.

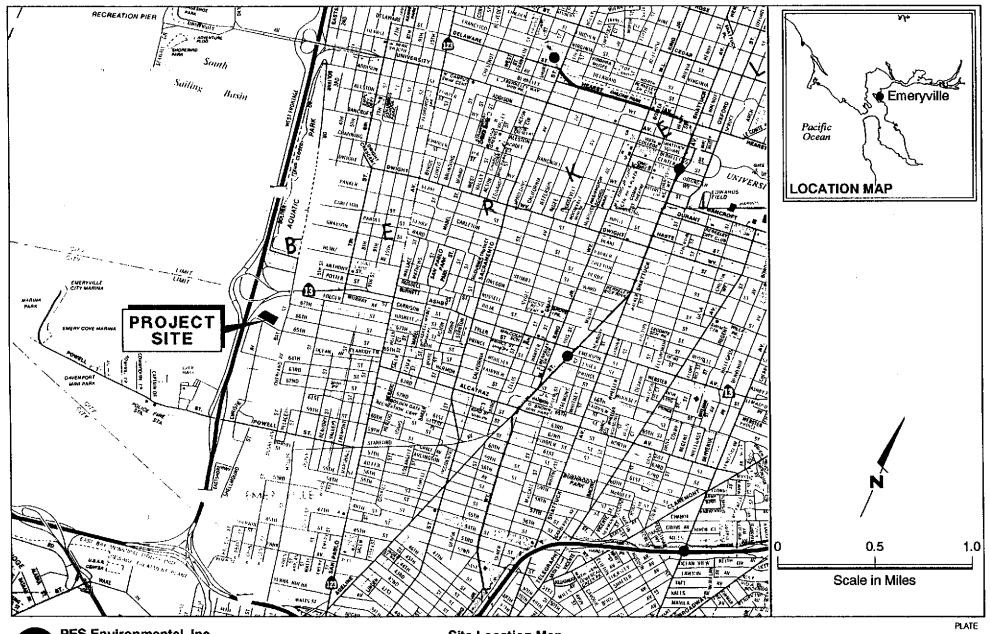

PES Environmental, Inc.Engineering & Environmental Services

Site Location Map 1650 65th Street Emeryville, California


JOB NUMBER 131.01.003

REVIEWED BY

DATE 3/94

REVISED DATE

REVISED DATE

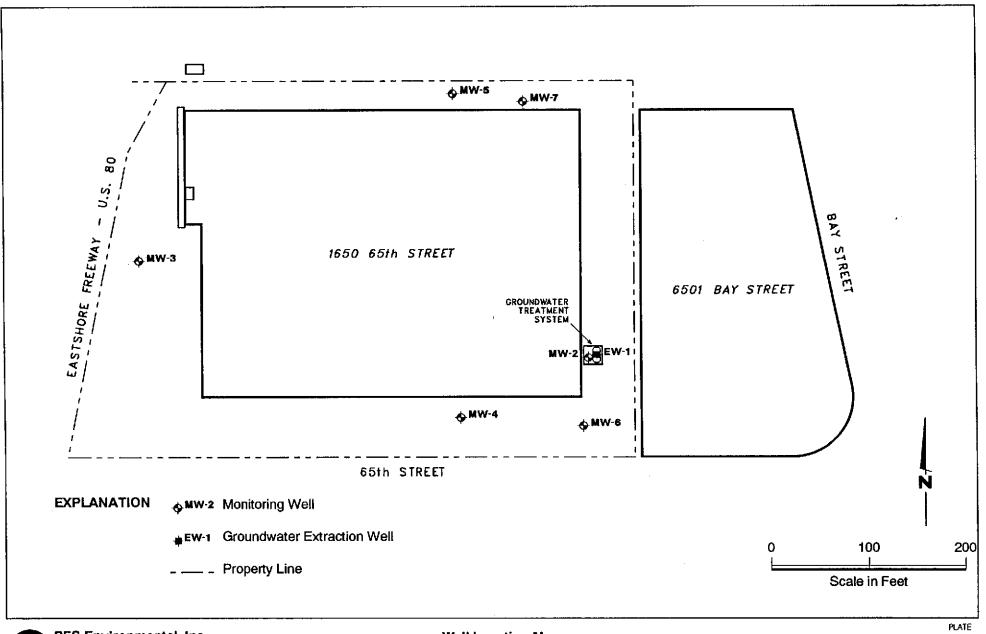


PES Environmental, Inc. Engineering & Environmental Services Well Location Map 1650 65th Street Emeryville, California

2

REVISED DATE

REVISED DATE

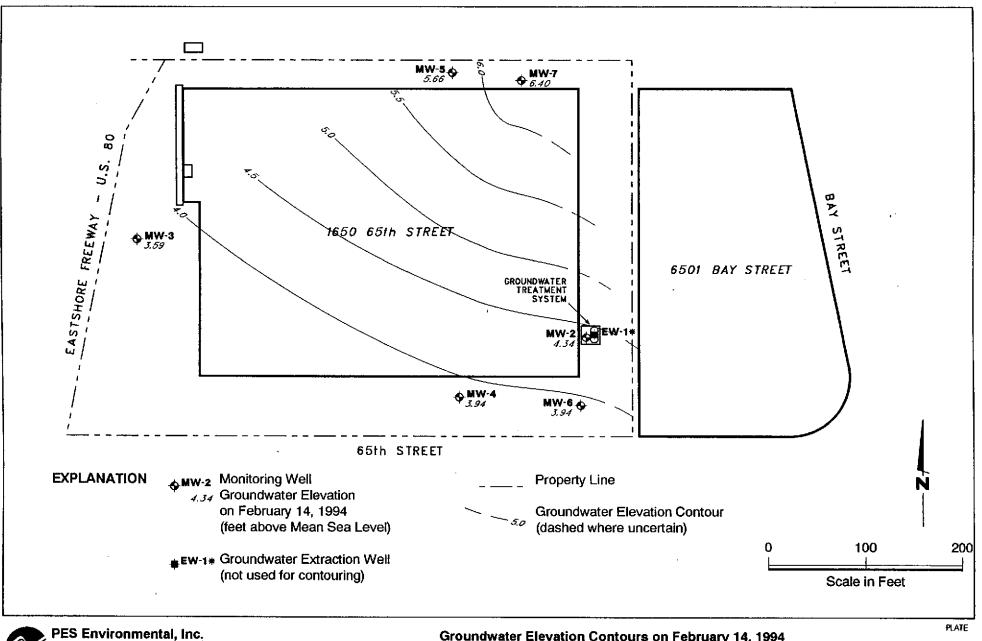



JOB NUMBER


131.03.001

Groundwater Elevation Contours on February 14, 1994

1650 65th Street Emeryville, California

REVISED DATE

REVISED DATE

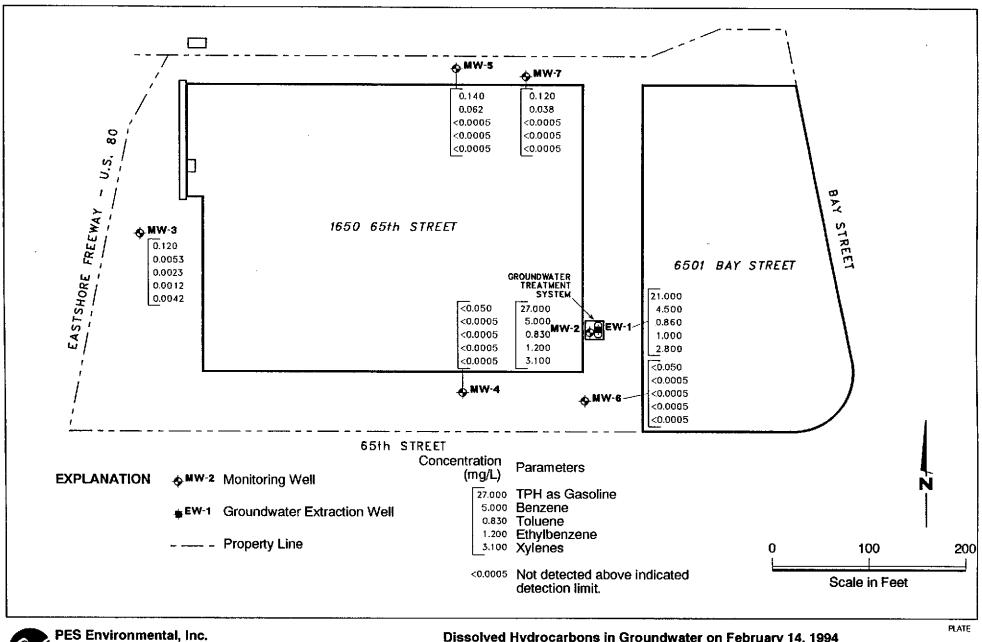



Engineering & Environmental Services

Dissolved Hydrocarbons in Groundwater on February 14, 1994 1650 65th Street


Emeryville, California

REVISED DATE

REVISED DATE

JOB NUMBER 131.03.001 REVIEWED BY

DATE 3/94



BLAINE TECH SERVICES INC.

985 TIMOTHY DRIVE SAN JOSE, CA 95133 (408) 995-5535 FAX (408) 293-8773

February 23, 1994

PES Environmental, Inc. 1682 Novato Blvd., Suite 100 Novato, CA 94947

Attn: Paul Lohman

SITE:
P.O. Partners
1650 65th Street
Emeryville, California

DATE: February 14, 1994

GROUNDWATER SAMPLING REPORT 940214-A-1

Blaine Tech Services, Inc. perform specialized environmental sampling and documentation as an independent third party. In order to avoid compromising the objectivity necessary for the proper and disinterested performance of this work, Blaine Tech Services, Inc. does not participate in the interpretation of analytical results or become involved with the marketing or installation of remedial systems.

This report deals with the groundwater well sampling performed by our firm on February 14, 1994, in response to your request. Data collected in the course of our work at the site are presented in the TABLE OF WELL MONITORING DATA. This information was collected during our inspection, well evacuation, and sample collection. Measurements include the total depth of the well and depth to water. Water surfaces were further inspected for the presence of immiscibles. A series of electrical conductivity, pH, and temperature readings were obtained during well evacuation and at the time of sample collection.

TABLE OF WELL MONITORING DATA

Well I.D.	MW-2	MW-3	MW-4	MW-5
Date Sampled	02/14/94	02/14/94	02/14/94	02/14/94
Well Diameter (in.)	2	4	4	4
Total Well Depth (ft.)	26.15	18.20	15.88	18.0
Depth To Water (ft.)	11.45	8.84	8.30	7.16
Free Product (in.)	NONE	NONE	пои	NONE
Reason If Not Sampled				
1 Case Volume (gal.)	2,35	6.08	4.92	7.0
Did Well Dewater?	NO	NO	ио	NO
==:	7.0	19.0	15.0	21.0
Gallons Actually Evacuated	7.0	17.0		
Furging Device	BAILER	ELECTRIC SUBMERSIBLE	MIDDLEBURG	MIDDLEBURG
Sampling Device	BAILER	BAILER	BAILER	BAILER
Time	16:38 16:42 16:4	3 13:35 13:39 13:43	12:48 12:54 12:59	14:15 14:22 14:30
	63.8 63.8 63.8	59.4 64.7 64.8	64.8 66.3 65.8	60.8 60.3 59.4
Temperature (Fahrenheit)	8.0 8.0 8.0	9.1 8.4 8.3	7.4 7.4 7.6	0.4 8.4 8.3
pH	3300 2700 2600	1400 3500 3600	8800 B400 8200	3000 2900 3000
Conductivity (micromhos/cm)		24.2 5.32 4.36	32.8 34.8 38.7	46.5 41.6 31.6
Nephelometric Turbidity Units	>200 >200 >200	24.6 3.32 4.50	32.0 01.0 300.	
BTS Chain of Custody	940214-A-1	940214-A-1	940214-A-1	940214-A-1
BTS Sample I.D.	MW-2	MW-3	MW-4	MW-5
DHS HMTL Laboratory	COAST TO COAST	COAST TO COAST	COAST TO COAST	COAST TO COAST
	TPH (GAS), BTEX	TPH (GAS), BTEX	TPH (GAS), BTEX	TPH (GAS), BTEX
Analysis	TEN (GWS) DIEV	Ten foundly name		* · • •

TABLE OF WELL MONITORING DATA

Well I.D.	M₩-6	MW-7	EW-1
Date Sampled	02/14/94	02/14/94	02/11/94
Well Diameter (in.)	4	4	4
Total Well Depth (ft.)	18.78	18.75	27.80
Depth To Water (ft.)	8.09	6,50	11.38
Free Product (in.)	NONE	NONE	NONE
Reason If Not Sampled			
1 Case Volume (gal.)	6,95	7.96	10.67
Did Well Dewater?	NO	NO	NO
Gallons Actually Evacuated	21.0	24.0	32.0
Purging Device	MIDDLEBURG	MIDDLEBURG	ELECTRIC SUBMERSIBLE
Sampling Device	BAILER	BAILER	BAILER
Time	12:06 12:13 12:20	10:56 11:04 11:19	15:07 15:15 15:19
Temperature (Fahrenheit)	63.8 64.1 63.5	58.7 59.8 58.5	64.1 63.2 63.9
рН	6.8 6.8 6.8	8.0 7.7 7.6	8.6 7.9 7.7
Conductivity (micromhos/cm)	>10000 >10000 >10000	1700 1600 1600	900 2800 4000
Nephelometric Turbidity Units	36.5 30.7 34.6	36.2 18.7 16.2	28.9 15.05 6.63
BTS Chain of Custody	940214-A-1	940214-A-1	940214-A-1
BTS Sample I.D.	MW-6	MW-7	EW-1
DHS HMTL Laboratory	COAST TO COAST	COAST TO COAST	COAST TO COAST
Analysis	TPH (GAS), BTEX	TPH (GAS), BTEX	TPH (GAS), BTEX

Evacuation and Sampling Equipment

As shown in the TABLE OF MONITORING DATA the wells at this site were evacuated according to a protocol requirement for three case volumes. The wells were evacuated using either bailers, USGS/Middleburg Pumps or Electric Submersible Pumps.

Samples were collected using stainless steel bailers.

Bailers: A bailer, in its simplest form, is a hollow tube which has been fitted with a check valve at the lower end. The device can be lowered into a well by means of a cord. When the bailer enters the water, the check valve opens and liquid flows into the interior of the bailer. The bottom check valve prevents water from escaping when the bailer is drawn up out of the well.

Two types of bailers are used in groundwater wells at sites where fuel hydrocarbons are of concern. The first type of bailer is made of a clear material such as acrylic plastic and is used to obtain a sample of the surface and the near surface liquids in order to detect the presence of visible or measurable fuel hydrocarbon floating on the surface. The second type of bailer is made of Teflon or stainless steel and is used as an evacuation and/or sampling device.

Bailers are inexpensive and relatively easy to clean. Because they are manually operated, variations in operator technique may have a greater influence than would be found with more automated sampling equipment. Also where fuel hydrocarbons are involved, the bailer may include near surface contaminants that are not representative of water deeper in the well.

USGS/Middleburg Positive Displacement Sampling Pumps: USGS/Middleburg positive displacement sampling pumps are EPA approved pumps appropriate for use in wells down to two inches in diameter and depths up to several hundred feet. The pump contains a flexible Teflon bladder which is alternately allowed to fill with well water and then collapsed. Actuation of the pump is accomplished with compressed air supplied by a single hose to one side of the Teflon membrane. Water on the other side of the membrane is squeezed out of the pump and up a Teflon conductor pipe to the surface. Evacuation and sampling are accomplished as a continuum. The rate of water removal is relatively slow and loss of volatiles almost non-existent. There is only positive pressure on the water being sampled and there is no impeller cavitation or suction. The pumps can be placed at any location within the well, can draw water from the very bottom of the well case, and are virtually immune to the erosive effects of silt or lack of water which destroy other types of pumps.

Disadvantages associated with Middleburg pumps include their high cost, low flow rate, temperamental operation, and cleaning requirements which are both elaborate and time consuming.

Electric Submersible Pumps: Electric submersible pumps are appropriate for the high volume evacuation of wells of any depth provided the well diameter is large enough to

admit the pump. Four inch and three inch diameter wells will readily accept electric submersible pumps, while two inch wells do not. In operation, the pump is lowered into the well with a pipe train above it. A checkvalve immediately above the pump and below the first section of pipe prevents water that has entered the pipe from flowing back into the well. Electricity is provided to the pump via an electrical cable and the action of the pump is to push water up out of the well.

Electric submersible pumps are often used as well evacuation devices, which are then supplanted with a more specialized sample collection device (such as a bailer) at the time of sampling. An alternative is to use the pump for both evacuation and sampling. When a bailer is used to collect the sample, interpretation of results by the consultant should allow for variations attributable to near surface contamination entering the bailer. When the electric submersible is, itself, used for sample collection it should be operated with the output restricted to a point where the loss of volatiles becomes indistinguishable from the level obtained with true sampling pumps.

It should be noted that when the pump is used for both evacuation and sample collection that it is possible to perform these operation as an uninterrupted continuum. This contrasts with the variations in elapsed time between evacuation and sample collection that occur when field personnel cease one mode of operation and must bring other apparatus into use.

Decontamination

All apparatus is brought to the site in clean and serviceable condition. The equipment is decontaminated after each use and before leaving the site.

Effluent Materials

The evacuation process creates a volume of effluent water which must be contained. Purge water from this sampling event was discharged through the carbon filtration system on site.

Sampling Methodology

Samples were obtained by standardized sampling procedures that follow an evacuation and sample collection protocol. The sampling methodology conforms both State and Regional Water Quality Control Board standards and specifically adheres to EPA requirements for apparatus, sample containers and sample handling as specified in publication SW 846 and the T.E.G.D. which is published separately.

Sample Containers

Sample containers are supplied by the laboratory performing the analyses.

Sample Handling Procedures

Following collection, samples are promptly placed in an ice chest containing prefrozen blocks of an inert ice substitute such as Blue Ice or Super Ice.

Sample Designations

All sample containers are identified with both a sampling event number and a discrete sample identification number. Please note that the sampling event number is the number that appears on our chain of custody. It is roughly equivalent to a job number, but applies only to work done on a particular day of the year rather than spanning several days as jobs and projects often do.

Chain of Custody

Samples are continuously maintained in an appropriate cooled container while in our custody and until delivered to the laboratory under our standard chain of custody. If the samples are taken charge of by a different party (such as another person from our office, a courier, etc.) prior to being delivered to the laboratory, appropriate release and acceptance records are made on the chain of custody (time, date, and signature of person releasing the samples followed by the time, date and signature of the person accepting custody of the samples).

Hazardous Materials Testing Laboratory

The samples obtained at this site were transported in cooled ice chest to the office of Blaine Tech Services, Inc. to be stored in a refrigerator overnight. The following day, the samples were released into the custody of a courier for delivery to Coast to Coast Analytical Services.

Personnel

All Blaine Tech Services, Inc. personnel receive 29 CFR 1910.120(e)(2) training as soon after being hired as is practical. In addition, many of our personnel have additional certifications that include specialized training in level B supplied air apparatus and the supervision of employees working on hazardous materials sites. Employees are not sent to a site unless we are confident they can adhere to any site safety provisions in force at the site and unless we know that they can follow the written provisions of an SSP and the verbal directions of an SSO.

In general, employees sent to a site to perform groundwater well sampling will assume an OSHA level D (wet) environment exists unless otherwise informed. The use of gloves and double glove protocols protects both our employees and the integrity of the samples being collected. Additional protective gear and procedures for higher OSHA levels of protection are available.

Please call if we can be of any further assistance.

Richard C. Blaine

RCB/dk

attachments: chain of custody

BLAINE		AN JOS	OTHY DRIVE SE, CA 95133			CONDUCT AN	ALYSIS	TO DETECT	Γ	LAB CAST	TO (0.	AST.	DHS#
TECH SERVICES	INC.		08) 995-5535 08) 293-8773							ALL ANALYSES MUST SET BY CALIFORNIA	MEET SPECII DHS AND	FICATIONS AN	ID DETECTION LIM
CHAIN OF CUSTODY 940214A1					١, ١					□ EPA □ LIA		[SUM	OB NEGION
CLIENT JES				SE	W					OTHER			
	1685			CONTAINERS	12/2					TAVORE PES	ons e Repor	+ to	÷
SITE PO PARTU 1650 651 EMERY 1	n 5%.				N					PES	Enviro	maun	tal
EMERY	ILLE		4.	SITE	10					A-t7	N: PAO	A hoho	442
	IMATRIXI	CON	ITAINERS	COMPOSITE ALL	20		-1-				(415)8	99-1600	
SAMPLE I.D.	S = SOIL W = H2O	TOTAL		00 = 0	N					JOGH 131.01	00.003 STATUS	CONDITION	
EWI _	W	3	VOAS		X						-		
mul		3	1		X	<u></u>							
MW3		3			У						<u>.</u>	<u> </u>	
mw4		3			X								
mw<		3			Х								
mulo_		3			X								
mw1	7	3	7		X								
											·		
SAMPLING DATE TIME COMPLETED 2-14-94 16	SAMPL PERFO	ING PRMED	F 3 1		unt	is.				RESULTS NEEDED NO LATER THAN	Ros	DATE	
RELEASED BY	· · · · · · · · · · · · · · · · · · ·		2/15	E.	,	11ME 905	₽ F	ECEIVED BY		050 for		DATE 3/15 /94	TIME 905
REVEASED BY		-	DAT			TIME	Þ	ECEIVED B	Y	8. [A.(.)		DATÉ	TIME
RELEASED BY			DAT	E		TIME	7	ECEIVED B	Y			DATE	TIME
SHIPPED VIA			lnΔ1	E SE	NT	TIME SENT	Jec	OLEA#		<u> </u>			

大多様のないというないのは、あれるはないようないとなっていない。



NorCal Division (San Jose Laboratory) 2059 Junction Ave.

San Jose, CA 95131 (408) 955-9077

CLIENT: Paul Lohman

PES Environmental Inc

1682 Novato Boulevard, Suite 100

Novato, CA 94947

Lab Number: JK-0509-2

Project

: 131.0100.003, PO Partners

Analyzed : 02/23/94

and been ITS

Analyzed by: LD

Method : EPA 8020/8015M

REPORT OF ANALYTICAL RESULTS

Page 1 of 1

SAMPLE DESCRIPTION	MATRIX	SAMPLED BY		SAMPLED DATE	RECEIVED
MW2	Groundwater	J.L.		02/14/94	02/15/94
CONSTITUENT		(CAS RN)	*PQL μg/L	RESULT µg/L	NOTE
BTEX + TPH (Gasoline)			····	.	1
Benzene			50.	5000.	
Toluene			50.	830.	
Ethylbenzene			50.	1200.	
Xylenes			50.	3100.	
Total Petroleum Hydrocarbons (Gasoline)		5000.	27000.	
Percent Surrogate Recovery	•			94.	

San Jose Lab Certifications: CAELAP #1204

*RESULTS listed as 'ND' were not detected at or above the listed PQL (Practical Quantitation Limit) (1) EXTRACTED by EPA 5030 (purge-and-trap)

02/25/94 GC#2\223B320A DT/et/jst W-BTX-022394 Respectfully submitted, COAST-TO-COAST ANALYTICAL SERVICES, INC.



CLIENT: Paul Lohman

PES Environmental Inc

Novato, CA 94947

1682 Novato Boulevard, Suite 100

COAST-TO-COAST ANALYTICAL SERVICES, INC.

NorCal Division (San Jose Laboratory) 2059 Junction Ave.

San Jose, CA 95131 (408) 955-9077

Lab Number: JK-0509-3

Project

: 131.0100.003, PO Partners

Analyzed

: 02/24/94

Analyzed by: LD

Mustaser par mp

Method : EPA 8020/8015M

REPORT OF ANALYTICAL RESULTS

Page 1 of 1

SAMPLE DESCRIPTION	MATRIX	SAMPLED BY		SAMPLED DATE	RECEIVED
MM3	Groundwater	J.L.		02/14/94	02/15/94
CONSTITUENT		(CAS RN)	*PQL μg/L	RESULT µg/L	NOTE
BTEX + TPH (Gasoline)					1
Benzene			0.5	5.3	
Toluene			0.5	2.3	
Ethylbenzene			0.5	1.2	
Xylenes			0.5	4.2	
Total Petroleum Hydrocarbons (Gasoline)		50.	120.	
Percent Surrogate Recovery	•			98.	

San Jose Lab Certifications: CAELAP #1204

*RESULTS listed as 'ND' were not detected at or above the listed PQL (Practical Quantitation Limit)

(1) EXTRACTED by EPA 5030 (purge-and-trap)

02/25/94 GC#2\223B325A DT/et/jst W-BTX-022394 Respectfully submitted,

COAST-TO-COAST ANALYTICAL SERVICES, INC.



NorCal Division (San Jose Laboratory) 2059 Junction Ave.

San Jose, CA 95131 (408) 955-9077

CLIENT: Paul Lohman

PES Environmental Inc

1682 Novato Boulevard, Suite 100

Novato, CA 94947

Lab Number: JK-0509-4

Project

: 131.0100.003, PO Partners

Analyzed : 02/25/94

Analyzed by: LD

Method : EPA 8020/8015M

REPORT OF ANALYTICAL RESULTS

Page 1 of 1

SAMPLE DESCRIPTION	MATRIX	SAMPLED BY		SAMPLED DATE	RECEIVED
MW4	Groundwater	J.L.		02/14/94	02/15/94
CONSTITUENT		(CAS RN)	*PQL µg/L	result µg/l	NOTE
BTEX + TPH (Gasoline)					1
Benzene			0.5	ND	
Toluene			0.5	NID	
Ethylbenzene			0.5	ND	
Xylenes			0.5	ND	
Total Petroleum Hydrocarbons (Gasoline	<u>e</u>)		50.	ND	
Percent Surrogate Recovery	•			91.	

San Jose Lab Certifications: CAELAP #1204

*RESULTS listed as 'ND' were not detected at or above the listed PQL (Practical Quantitation Limit)

(1) EXTRACTED by EPA 5030 (purge-and-trap)

02/25/94 GC#2\224B316A DT/et/jst W-BTX-022494 Respectfully submitted, COAST-TO-COAST ANALYTICAL SERVICES, INC.



NorCal Division (San Jose Laboratory) 2059 Junction Ave.

San Jose, CA 95131 (408) 955-9077

Lab Number: JK-0509-5

CLIENT: Paul Lohman

Project

: 131.0100.003, PO Partners

PES Environmental Inc

: 02/24/94

1682 Novato Boulevard, Suite 100 Novato, CA 94947

Analyzed

Analyzed by: LD

Method

: EPA 8020/8015M

REPORT OF ANALYTICAL RESULTS

Page 1 of 1

SAMPLE DESCRIPTION	MATRIX	SAMPLED BY		SAMPLED DATE	RECEIVED
MW5	Groundwater	J.L.	, <u>, , , , , , , , , , , , , , , , , , </u>	02/14/94	02/15/94
CONSTITUENT		(CAS RN)	*PQL μg/L	RESULT µg/L	NOTE
BTEX + TPH (Gasoline)					1
Benzene			0.5	62.	
Toluene			0.5	ND	
Ethylbenzene			0.5	NID	
Xylenes			0.5	ND	
Total Petroleum Hydrocarbons (Gasoline)		50.	140.	
Percent Surrogate Recovery	•			9 5.	

San Jose Lab Certifications: CAELAP #1204

*RESULTS listed as 'ND' were not detected at or above the listed PQL (Practical Quantitation Limit)

(1) EXTRACTED by EPA 5030 (purge-and-trap)

02/25/94 GC#2\223B324A DT/et/jst W-BTX-022394

Respectfully submitted, COAST-TO-COAST ANALYTICAL SERVICES, INC.



NorCal Division (San Jose Laboratory) 2059 Junction Ave.

San Jose, CA 95131 (408) 955-9077

CLIENT: Paul Lohman

PES Environmental Inc

1682 Novato Boulevard, Suite 100

Novato, CA 94947

Lab Number: JK-0509-6

Project: 131.0100.003, PO Partners

Analyzed : 02/23/94

Analyzed by: LD

Method : EPA 8020/8015M

REPORT OF ANALYTICAL RESULTS

Page 1 of 1

SAMPLE DESCRIPTION	MATRIX	SAMPLED BY		SAMPLED DATE	RECEIVED
MW6	Groundwater	J.L.		02/14/94	02/15/94
CONSTITUENT		(CAS RN)	*PQL μg/L	RESULT µg/L	NOTE
BTEX + TPH (Gasoline)			· -		1
Benzene			0.5	ND	
Toluene			0.5	ND	
Ethylbenzene			0.5	ND	
Xylenes			0.5	ND	
Total Petroleum Hydrocarbons (Gasoline	!)		50.	ND	
Percent Surrogate Recovery	•			91.	

San Jose Lab Certifications: CAELAP #1204

*RESULTS listed as 'ND' were not detected at or above the listed PQL (Practical Quantitation Limit)

(1) EXTRACTED by EPA 5030 (purge-and-trap)

02/25/94 GC#2\223B322A DT/et/jst W-BTX-022394 Respectfully submitted, COAST-TO-COAST ANALYTICAL SERVICES, INC.



NorCal Division (San Jose Laboratory) 2059 Junction Ave.

San Jose, CA 95131 (408) 955-9077

CLIENT: Paul Lohman

PES Environmental Inc

1682 Novato Boulevard, Suite 100

Novato, CA 94947

Lab Number: JK-0509-7

Project: 131

: 131.0100.003, PO Partners

Analyzed : 02/24/94

Analyzed by: LD

Method : EPA 8020/8015M

REPORT OF ANALYTICAL RESULTS

Page 1 of 1

SAMPLE DESCRIPTION	MATRIX	SAMPLED BY		SAMPLED DATE	RECEIVED
MW7	Groundwater	J.L.	<u>-</u>	02/14/94	02/15/94
CONSTITUENT		(CAS RN)	*PQL µg/L	RESULT µg/L	NOTE
BTEX + TPH (Gasoline)		· · · · · · · · · · · · · · · · · · ·			1
Benzene			0.5	38.	
Toluene			0.5	ND	
Ethylbenzene			0.5	ND	
Xylenes			0.5	ФИ	
Total Petroleum Hydrocarbons (Gasoline	:)		50.	120.	
Percent Surrogate Recovery	•			89.	

San Jose Lab Certifications: CAELAP #1204

*RESULTS listed as 'ND' were not detected at or above the listed PQL (Practical Quantitation Limit)

(1) EXTRACTED by EPA 5030 (purge-and-trap)

02/25/94 W-BTX-022394 DT/et/jst W-BTX-022394 Respectfully submitted,
COAST-TO-COAST ANALYTICAL SERVICES, INC.



NorCal Division (San Jose Laboratory) 2059 Junction Ave.

San Jose, CA 95131 (408) 955-9077

CLIENT: Paul Lohman

PES Environmental Inc

1682 Novato Boulevard, Suite 100

Novato, CA 94947

Lab Number: JK-0509-1

: 131.0100.003, PO Partners

Analyzed : 02/25/94

Analyzed by: LD

Method

: EPA 8020/8015M

REPORT OF ANALYTICAL RESULTS

Page 1 of 1

SAMPLE DESCRIPTION	MATRIX	SAMPLED BY		SAMPLED DATE	E RECEIVED
EW1	Groundwater	J.L.		02/14/94	02/15/94
CONSTITUENT	·	(CAS RN)	*PQL µg/L	RESULT µg/L	NOTE
BTEX + TPH (Gasoline)					1
Benzene			100.	4500.	
Toluene			100.	860.	
Ethylbenzene			100.	1000.	
Xylenes			100.	2800.	
Total Petroleum Hydrocarbons (Gasoline	e)		10000.	21000.	
Percent Surrogate Recovery	,			100.	

San Jose Lab Certifications: CAELAP #1204

*RESULTS listed as 'ND' were not detected at or above the listed PQL (Practical Quantitation Limit) (1) EXTRACTED by EPA 5030 (purge-and-trap)

02/25/94 GC#2\224B317 DT/et/jst W-BTX-022494

Respectfully submitted, COAST-TO-COAST ANALYTICAL SERVICES, INC.

BLAINE		THY DRIVE E, CA 95133		CONDUCT	ANALYSIS TO DE	TECT	ILAB COAST	To Co.	45T	DHS#
TECH SERVICES INC.		8) 995-5535 8) 293-8773					ALL ANALYSES MUS SET BY CALIFORNIA	T MEET SPECIF	ICATIONS AND	DETECTION LIMITS OB REGION 2
CHAIN OF CUSTODY 940214A1			(n)				☐ EPA☐ LIA☐ OTHER		Mumor	DB REGION
CLIENT PES			CONTAINERS				SPECIAL INSTRUCTI	_		
SITE PO PACTUER	25		SONT TANOS	1			Invoice. PE.	& Repor	t to	
SITE PO PACTURA 1650 65 TH S EMERY VILL].			1 1			PE.	S ENVIVO	nmend	al
EMERYVILL	E C	7.	SITE				A+1	N: PAU	e hohm	iAN
	. —	TAINERS	COMPOSITE ALL				Job# 131.01	(415)89	19-1600	
l 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TOTAL		<u></u>				ADD'L INFORMATION	STATUS	CONDITION	LAB SAMPLE #
EW/ 1	N 3	VOAS	X				-1		<u> </u>	JK0509
mwe	3		X				-2			<u> </u>
imu3	3		<u> </u>				.3	<u></u>		
mw4	3					-	-4			
mw5	3	+	X				-5		1	
mule	3		\nearrow				-4			
mw1	7 3	7	×				 -7			
									-	
									-	
SAMPLING DATE TIME S COMPLETED 2-14-94 16-5	AMPLING PERFORMED B	Y Orefold	loin	,			RESULTS NEEDED NO LATER THAN	Rout	TINE	
HELEASED BY Addinatio	6	2/15/	r	TIME 905	RECEIVE	D BY	Q EQ for		DATE 15 94	TIME 905
RECENTIFIED TO So Jo	e	DATE		1TIME 918	▲ RECEIVE	OMBY /	lue-		1daté 02/15/194	100 Z
RELEASED BY		DATÉ		TIME	RECEIVE				DATE	TIME
SHIPPED VIA World Cou	(Mel)	DATE	SENT	TIME SEN	T COOLER#					