

LAW OFFICES OF BARRY M. GALLAGHER  
A PROFESSIONAL CORPORATION

BARRY M. GALLAGHER  
RICHARD J. TAGGI  
MICHAEL A. VILLA

ONE KAISER PLAZA, SUITE 480  
OAKLAND, CALIFORNIA 94612-3685  
TELEPHONE 510-836-1266  
FACSIMILE 510-836-1559

July 14, 1997

Amy Leech  
Alameda County Health Care Services  
Department of Environmental Health  
1131 Harbor Bay Parkway, 2nd Floor  
Alameda, CA 94502

**RE: 3600 Depot Road, Hayward**

Dear Amy:

The one monitoring well on my property at 3600 Depot Road, and the two monitoring wells on the adjacent property at 3636 Depot Road, have now been decommissioned pursuant to permit. Enclosed is a copy of the well completion report prepared by the contractor, West Hazmat Drilling.

Consistent with your May 2 letter, I would very much appreciate your earliest attention to providing me with a site closure letter.

Thank you for your attention to this matter.

Best regards,

  
Barry M. Gallagher

BMG/rl  
enclosure

**CONFIDENTIAL**

STATE OF CALIFORNIA DWR  
WELL COMPLETION REPORT  
(WELL LOGS)

**REMOVED**



# ZONE 7 WATER AGENCY

6997 PARKSIDE DRIVE, PLEASANTON, CALIFORNIA 94588-5127 PHONE (510) 484-2600 X235  
FAX (510) 462-3914

## DRILLING PERMIT APPLICATION

### FOR APPLICANT TO COMPLETE

### FOR OFFICE USE

LOCATION OF PROJECT 600 Depot Road, Hayward  
California 94545

PERMIT NUMBER 97356

WELL NUMBER 3S/2W 30Q80 to 30Q82

APN \_\_\_\_\_

California Coordinates Source \_\_\_\_\_ ft. Accuracy ± \_\_\_\_\_ ft.

CCN \_\_\_\_\_ ft. CCE \_\_\_\_\_ ft.

APN \_\_\_\_\_

### PERMIT CONDITIONS

Circled Permit Requirements Apply

#### CLIENT

Name Barry M. Gallagher

Address 9 Ashmount Way Phone (510) 836-1266

City Oakland Zip 94610

**FAX (510) 836-1559**

#### APPLICANT

Name Same as above

Address \_\_\_\_\_ Fax \_\_\_\_\_

City \_\_\_\_\_ Phone \_\_\_\_\_

City \_\_\_\_\_ Zip \_\_\_\_\_

#### TYPE OF PROJECT

Well Construction		Geotechnical Investigation	
Cathodic Protection	<input type="checkbox"/>	General	<input type="checkbox"/>
Water Supply	<input type="checkbox"/>	Contamination	<input type="checkbox"/>
Monitoring	<input type="checkbox"/>	Well Destruction	<input checked="" type="checkbox"/>

#### PROPOSED WATER SUPPLY WELL USE

New Domestic	<input type="checkbox"/>	Replacement Domestic	<input type="checkbox"/>
Municipal	<input type="checkbox"/>	Irrigation	<input type="checkbox"/>
Industrial	<input type="checkbox"/>	Other _____	<input type="checkbox"/>

#### DRILLING METHOD:

Mud Rotary	<input type="checkbox"/>	Air Rotary	<input type="checkbox"/>	Auger	<input type="checkbox"/>
Cable	<input type="checkbox"/>	Other	<input type="checkbox"/>		

West Hazmat Drilling Corporation

DRILLER'S LICENSE NO. License No. 554979

#### WELL PROJECTS

Drill Hole Diameter	_____ in.	Maximum	_____
Casing Diameter	<u>4</u> in.	Depth	<u>15</u> ft.
Surface Seal Depth	_____ ft.	Number	<u>3</u>

#### GEOTECHNICAL PROJECTS

Number of Borings	_____	Maximum	_____
Hole Diameter	_____ in.	Depth	_____ ft.

ESTIMATED STARTING DATE 6/1/97

ESTIMATED COMPLETION DATE 6/1/97

I hereby agree to comply with all requirements of this permit and Alameda County Ordinance No. 73-68.

#### APPLICANT'S

SIGNATURE \_\_\_\_\_ Date 5.17

**Barry M. Gallagher**

#### A. GENERAL

1. A permit application should be submitted so as to arrive at the Zone 7 office five days prior to proposed starting date.
2. Submit to Zone 7 within 60 days after completion of permitted work the original Department of Water Resources Water Well Driller's Report or equivalent for well projects, or drilling logs and location sketch for geotechnical projects.
3. Permit is void if project not begun within 90 days of approval date.

#### B. WATER SUPPLY WELLS

1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
2. Minimum seal depth is 50 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved.

#### C. GROUNDWATER MONITORING WELLS INCLUDING PIEZOMETERS

1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
2. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.

#### D. GEOTECHNICAL. Backfill bore hole with compacted cuttings or heavy bentonite and upper two feet with compacted material. In areas of known or suspected contamination, tremied cement grout shall be used in place of compacted cuttings.



#### E. CATHODIC. Fill hole above anode zone with concrete placed by tremie.

#### F. WELL DESTRUCTION. See attached.

#### G. SPECIAL CONDITIONS

Approved Wyman Hong Date 13 Jun 97

Wyman Hong

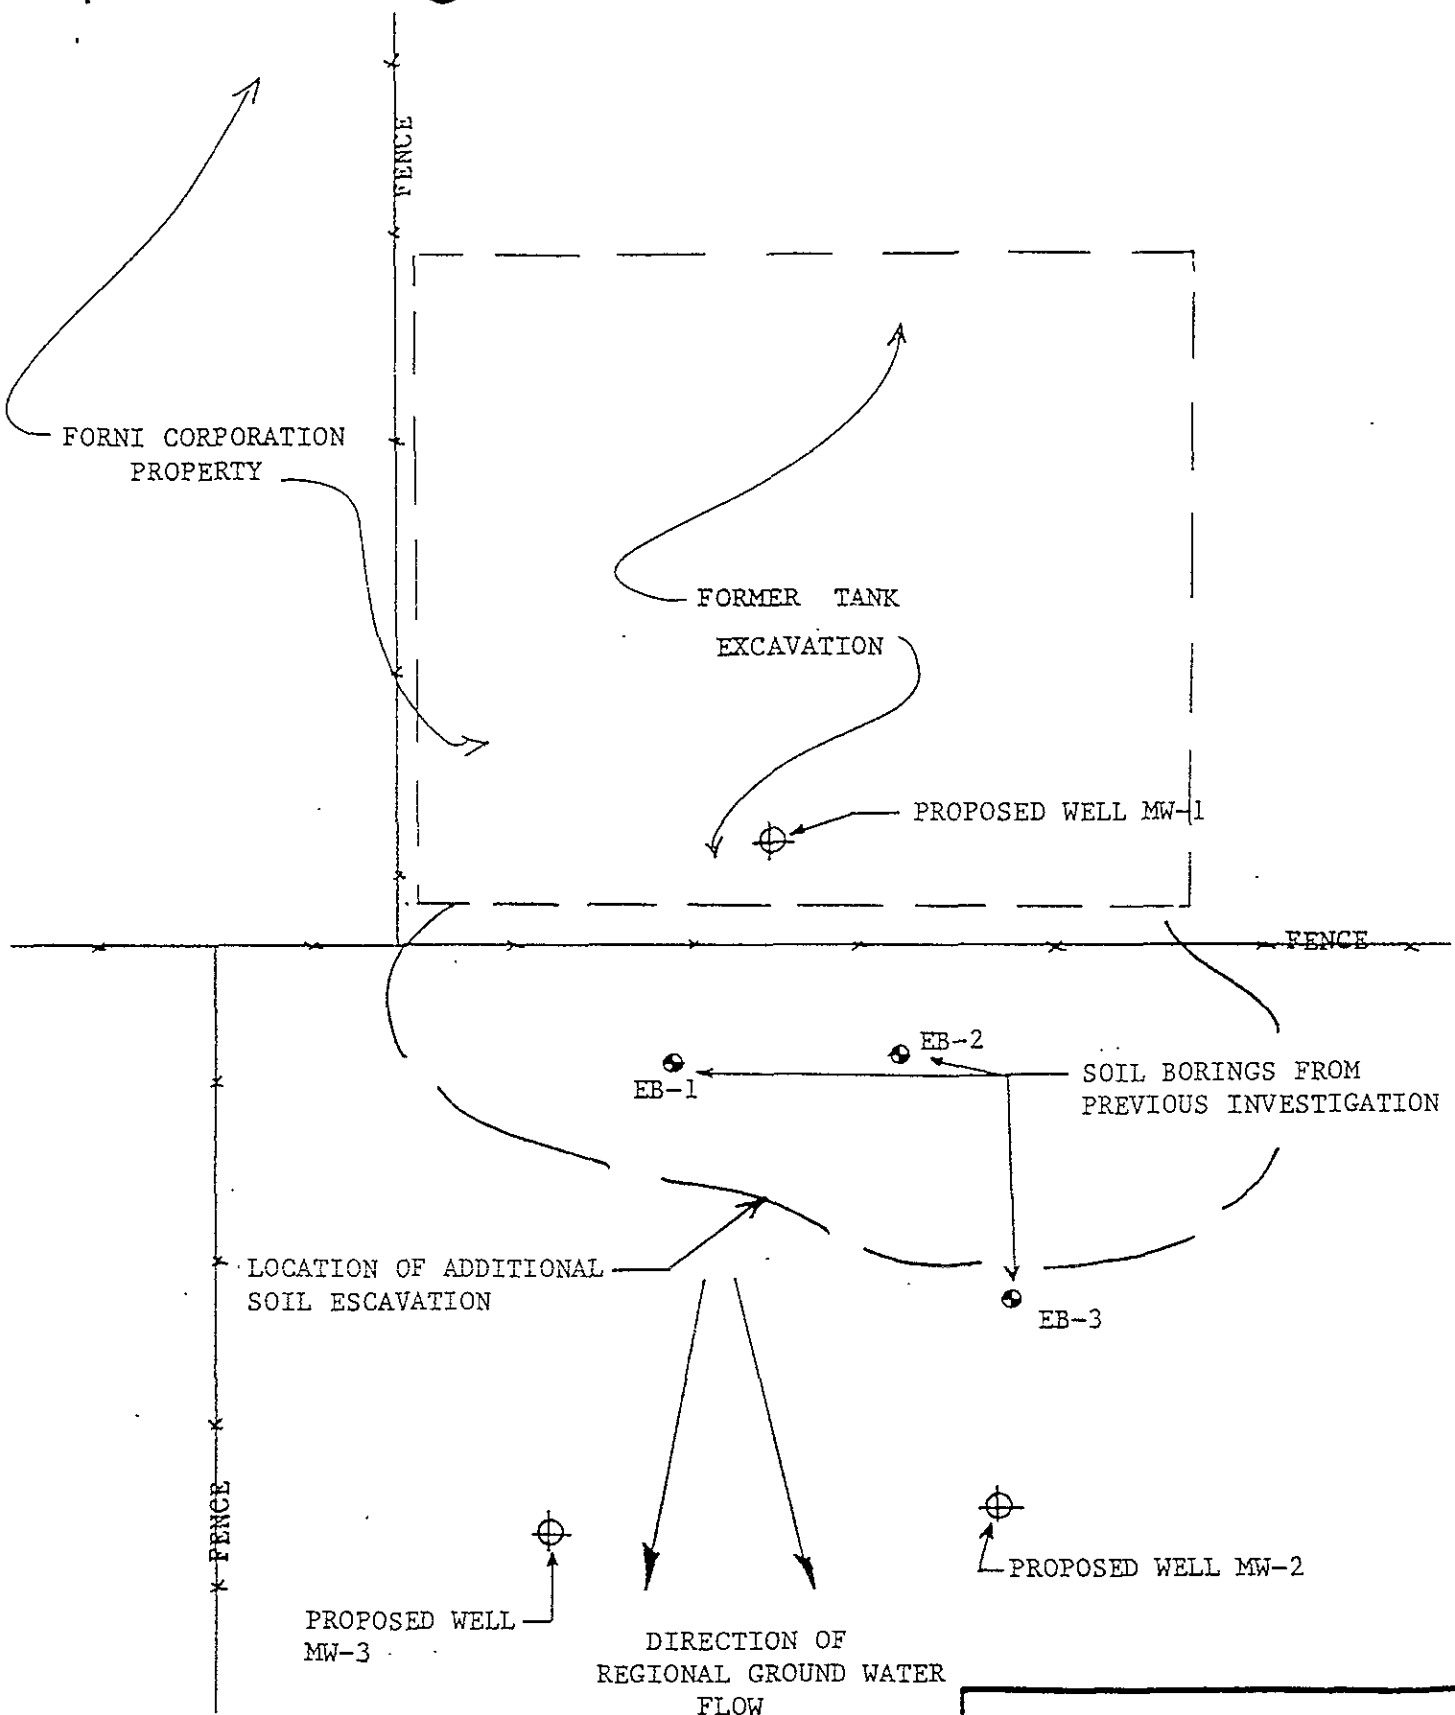

FORN CORPORATION		
DATE 9/25/94	SCALE 1"=10'	DRAWN BY dcg
WELL LOCATIONS		
		Figure 4

LOCATION FORNE CORPORATION

DATE 11/30/94

DRILLER Exploration Geoservices

BORING No. NW-1

DEPTH (ft)	DESCRIPTION	U.S.G	OVM/PID	WELL DESIGN		SAMPLE	BLOW COUNT	COMMENTS
				b	grout			
5	GRAVELLY SAND, (FILL) with concrete rubble, moist, medium dense	GP						
7.5	SILTY CLAY, gray-brown, firm, moist	CH	7.5					
10	SAND, fine-grained, green, saturated, loose	SP				S1	18	
6.5	SILTY CLAY, brown, wet, firm	CH	6.5					
15	SILTY CLAY, dark-brown, dry, stiff		1.6			S2	39	
	Bottom of Boring 15.0 feet							

LOCATION FORNI CORPORATION

DATE 11/30/94

DRILLER Exploration Geoservices

BORING No. MW-2

DEPTH (ft)	DESCRIPTION	U.S.C.	OVM/PIID	WELL DESIGN		SAMPLE	BLOW COUNT	COMMENTS
				b	grout			
5	SANDY GRAVEL (FILL), light-gray, moist, dense	GP	2.2		casing	S1	35	
	SILTY CLAY, dark-gray, moist, stiff	CL						
	SILTY SAND, olive-green, moist, dense	SM						
10	SILTY CLAY, medium-brown, moist, stiff	CH	2.2	#2/12 sand	0.010 slot	S2	19	
15	SILTY CLAY, medium-brown, dry, stiff	CH	2.1			S3	39	
Bottom of boring 16.5 feet. Boring backfilled to 15.0 feet with bentonite.								

LOCATION FORN1 CORPORATION

DATE 11/30/94

DRILLER Exploration Geoservices

BORING No. MW-3

DEPTH (ft)	DESCRIPTION	U.S.C.	OVM/PLD	WELL DESIGN	SAMPLE	BLOW COUNT	COMMENTS
	<u>SANDY GRAVEL (FILL)</u> , light-gray, moist, dense	GP		b grout	casing		
	<u>SILTY CLAY</u> , dark-gray, moist, stiff	CL	0.5				
5	<u>SILTY CLAY</u> , olive-green, moist, stiff	CH		#2/12 sand	0.010 slot	S1	36
10	<u>SAND</u> , fine-grained, brown, saturated, loose	SM	2.1				
	<u>SILTY CLAY</u> , medium-brown, moist, stiff	CH					
15			1.7			S3	38
	Bottom of Boring 15.0 feet.						