



HydroSolutions of California, Inc.

5917 Moss Creek Circle • Suite 2
Fair Oaks, California 95628 • (916) 967-1222 • FAX (916) 967-1223

April 23, 1996

Susan Hugo
Alameda County Department of Environmental Health
1131 Harbor Bay Parkway
Alameda, California 94502-6577

SUBJECT: QUARTERLY PROGRESS & GROUNDWATER
MONITORING REPORT (APRIL 1996)
4800 SAN PABLO AVENUE
EMERYVILLE, CALIFORNIA

96 APR 25 PM 1:57
ENVIRONMENTAL
PROTECTION

RRSP: 96286-06-35

Dear Susan:

As requested by the County (correspondence dated February 7, 1996), HydroSolutions of California, Inc. (HSCI) submits this second quarterly progress report of activities conducted on behalf of the City of Emeryville Redevelopment Agency.

STATUS OF INVESTIGATION

HSCI has submitted a draft copy of a request to establish a containment zone to the County. In addition, a health and safety plan and a notification document is being prepared in draft form for the County's review. These documents will be submitted during May 1996.

The April 1996 water sampling event (three groundwater monitoring wells [WB-8, WB-9, WB-14]) was completed on April 5, 1996. This quarterly report includes a summary of groundwater data to date.

PROPOSED ACTIVITIES

Activities include: 1) completion and submittal of the request for establishing a containment zone and 2) implementation of the July 1996 groundwater sampling event.

TIME SCHEDULES

Activities of the above mentioned activities are expected to be completed in the next 90-120 days.

METHOD OF CLEANUP

Containment zone including monitoring for one year.

METHOD AND LOCATION OF DISPOSAL OF RELEASED HAZARDOUS SUBSTANCES

Purged groundwater is being placed in one 55-gallon drum.

MANIFESTS

None since January 1996.

Page 2 of 2
HydroSolutions of California, Inc.
RRSP: 96286-06-35
April 23, 1996

MONITOR WELL DATA

Table 1 illustrates well data including; 1) well designation, 2) total depth, 3) screened interval, 4) sample date, 5) depth to groundwater, 6) target constituent concentrations and 7) comments.

A figure illustrating the relative groundwater elevation and direction of slope is included.


Lastly, three graphs have been prepared for your use: 1) water level (depth to groundwater) at WB-8 versus time, 2) BTXE concentrations versus time at WB-8 (central area of plume) and 3) BTXE concentrations versus time at WB-9 (down-gradient area of plume).

GROUNDWATER ELEVATION DATA

Table 1 illustrates groundwater elevation data. Based on measurements collected April 5, 1996, ground water table slopes to the north. Groundwater slope in the southern portion of the subject property is minimal compared to the northern area (adjacent the Temescal Creek).

If you have questions, comments or require modification of future progress reports, please contact me.

Respectfully submitted,

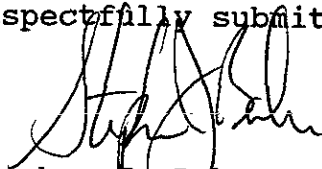




Stephen J. Baker
Registered Geologist (No. 4354)
Registered Hydrogeologist (No. 181)


Attachment:

- Laboratory data results
- Chain-of-custody
- BTXE Concentration vs Time at WB-8
- BTXE Concentration vs Time at WB-9
- Depth to Groundwater vs Time at WB-8
- Table 1. Monitor Well Data
- Figure 1. Groundwater Elevation Map

cc: Maryann Leshin, City of Emeryville Redevelopment Agency

EXPLANATION

-  B-5 BORING
-  WB-7 GROUNDWATER MONITOR WELL
-  80 GROUNDWATER TABLE CONTOUR LINE AND RELATIVE ELEVATION (FT)

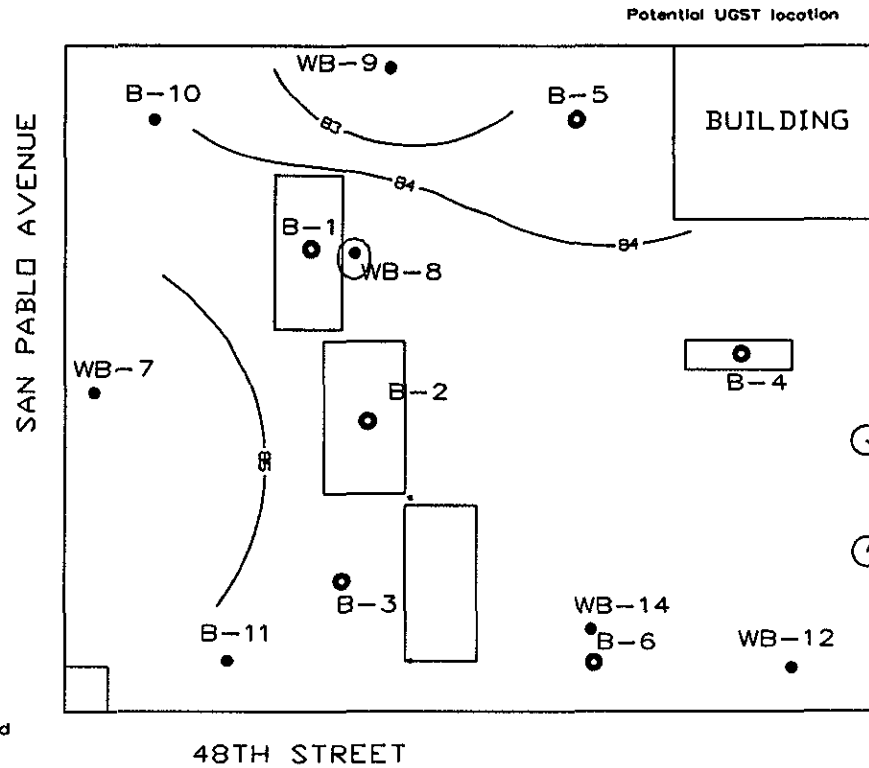

NOTES:

Exploratory drilling completed December 23, 1993 and June 16-17, 1994.

A Geoprobe system was used as the coring device for B-1 through B-6. A hollow stem augur was utilized for WB-7 through B-13.

Groundwater was encountered in boring, B-6, at 8.5 feet. Borings, B-1 through B-5 did not penetrate groundwater.

Ground water monitoring wells designated as WB-____. All wells except WB-14 are 30 feet deep, perforated between the 20 and 30 foot depths, gravel pack to 18 foot depth and grouted to the ground surface. A locking well head is constructed at grade for each well.


Well, WB-14, is 12 feet in depth, perforated between 7 and 12 feet, gravel packed to a 5 foot depth and grouted to the ground surface.

Ground water level elevations are relative elevations.

Borings, WB-7 through B-13, were surveyed with a transit and rod.

Groundwater contour lines calculated by inverse distance method. Data includes WB-7,8,9 and 12.

Water level measurements collected April 5, 1996.



HydroSolutions of California, Inc.

5917 Moss Creek Circle, Suite 2
Fair Oaks, California 95628-2714
(916) 967-1222

Title

GROUNDWATER TABLE MAP

Site

4800 SAN PABLO AVENUE
EMERYVILLE, CALIFORNIA

Project Number

96286

Date

04-23-96

Scale

AS SHOWN


FIGURE

TABLE 1. MONITOR WELL DATA
 4800 SAN PABLO AVENUE, EMERYVILLE, CALIFORNIA
 APRIL 23, 1996


WELL DESIGNATION	WB-8	WB-9	WB-14	WB-12	WB-7
TOTAL DEPTH	31	31	11	31	31
SCREENED INTERVAL	20-30	20-30	7-12	20-30	20-30
<hr/>					
SAMPLE DATE	6-20-94				
DEPTH TO WATER	10.87	13.48	7.00	10.40	9.62
GROUNDWATER ELEVATION	83.45	80.42	87.42	84.16	83.95
TPH-G	230	270	1900	ND	ND
TPHR	ND	ND	1100	1700	ND
BENZENE	3	2.8	65	ND	ND
TOLUENE	1	1.3	3.2	ND	ND
XYLENE	ND	ND	10	ND	ND
ETHYLBENZENE	0.6	ND	ND	ND	ND
<hr/>					
SAMPLE DATE	1-11-96				
DEPTH TO WATER	10.08	12.67	6.52	9.85	8.88
GROUNDWATER ELEVATION	84.24	81.23	87.90	84.71	84.69
TPH-G	230	300	220	ND	ND
TPH-D	ND	-	ND	ND	-
TPH-motor oil	-	-	-	ND	-
TPHR	160000	-	6900	-	-
BENZENE	2.2	10	3.2	ND	ND
TOLUENE	ND	1.1	ND	ND	ND
XYLENE	2	4.4	1.4	ND	ND
ETHYLBENZENE	5.5	9.6	0.8	ND	ND
DISSOLVED OXYGEN	2.4	3.0	0.6	1.4	1.4
SULFATE	8	12	160	35	40
<hr/>					
SAMPLE DATE	4-05-96				
DEPTH TO WATER	10.87	13.48	7.00	9.79	7.98
GROUNDWATER ELEVATION	85.04	82.02	88.78	84.77	85.59
TPH-G	200	420	130		
TPH-D	ND	---	ND		
TPH-motor oil	ND	---	ND		
BENZENE	3.5	11	1.9		
TOLUENE	ND	ND	ND		
XYLENE	0.9	11	1.4		
ETHYLBENZENE	1.6	3.0	ND		
DISSOLVED OXYGEN	3.1	2.4	0.9		
SULFATE	10	44	2		

- Results reported in ug/l.
- NA means is not applicable or no data generated
- ND means nondetectable
- Petroleum analysis completed by Excelchem Environmental Labs during last two quarterly groundwater sampling events
- TPH-G reported in ug/l (ppb). Analyzed by EPA Method 5030 purge and trap. Detectable limit is 50 ug/l.
- Benzene, toluene, xylene, and ethylbenzene reported in ug/l (ppb). Analyzed by EPA Method 602. Detectable limit is 0.5 ug/l.

- TPH-D analyzed by EPA Method 3510 followed by modified EPA Method 8015 with direct sample injection into a GC equipped with a FID detector. Detectable limit is 0.050 ug/l.
- TPH-motor oil analyzed by extraction using EPA Method 3510 followed by modified EPA Method 8015 with direct sample injection into a GC equipped with a FID. Detectable limit is 500 ug/l.
- TPHR analyzed by Modified EPA Method 418.1. Detectable limit is 10 mg/l.

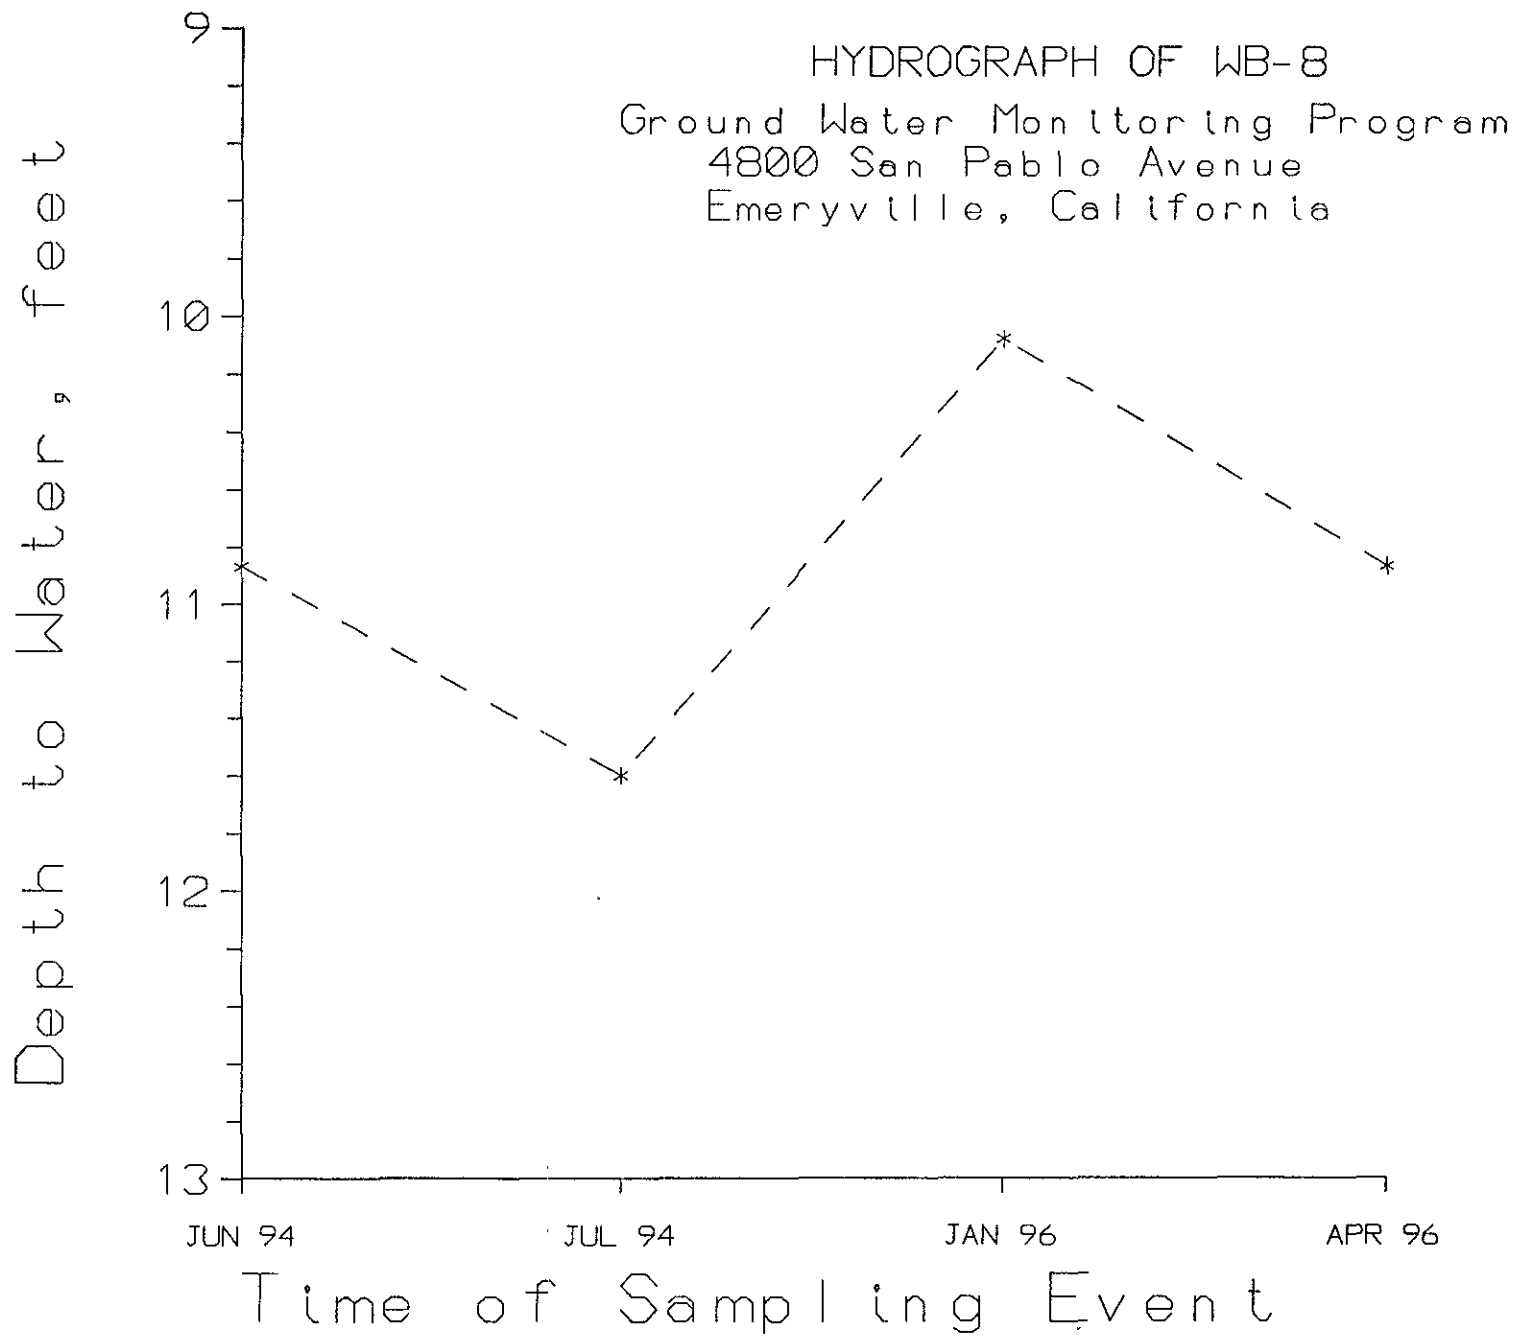


Ground Water Monitoring Program
4800 San Pablo Avenue
Emeryville, California
WB-8

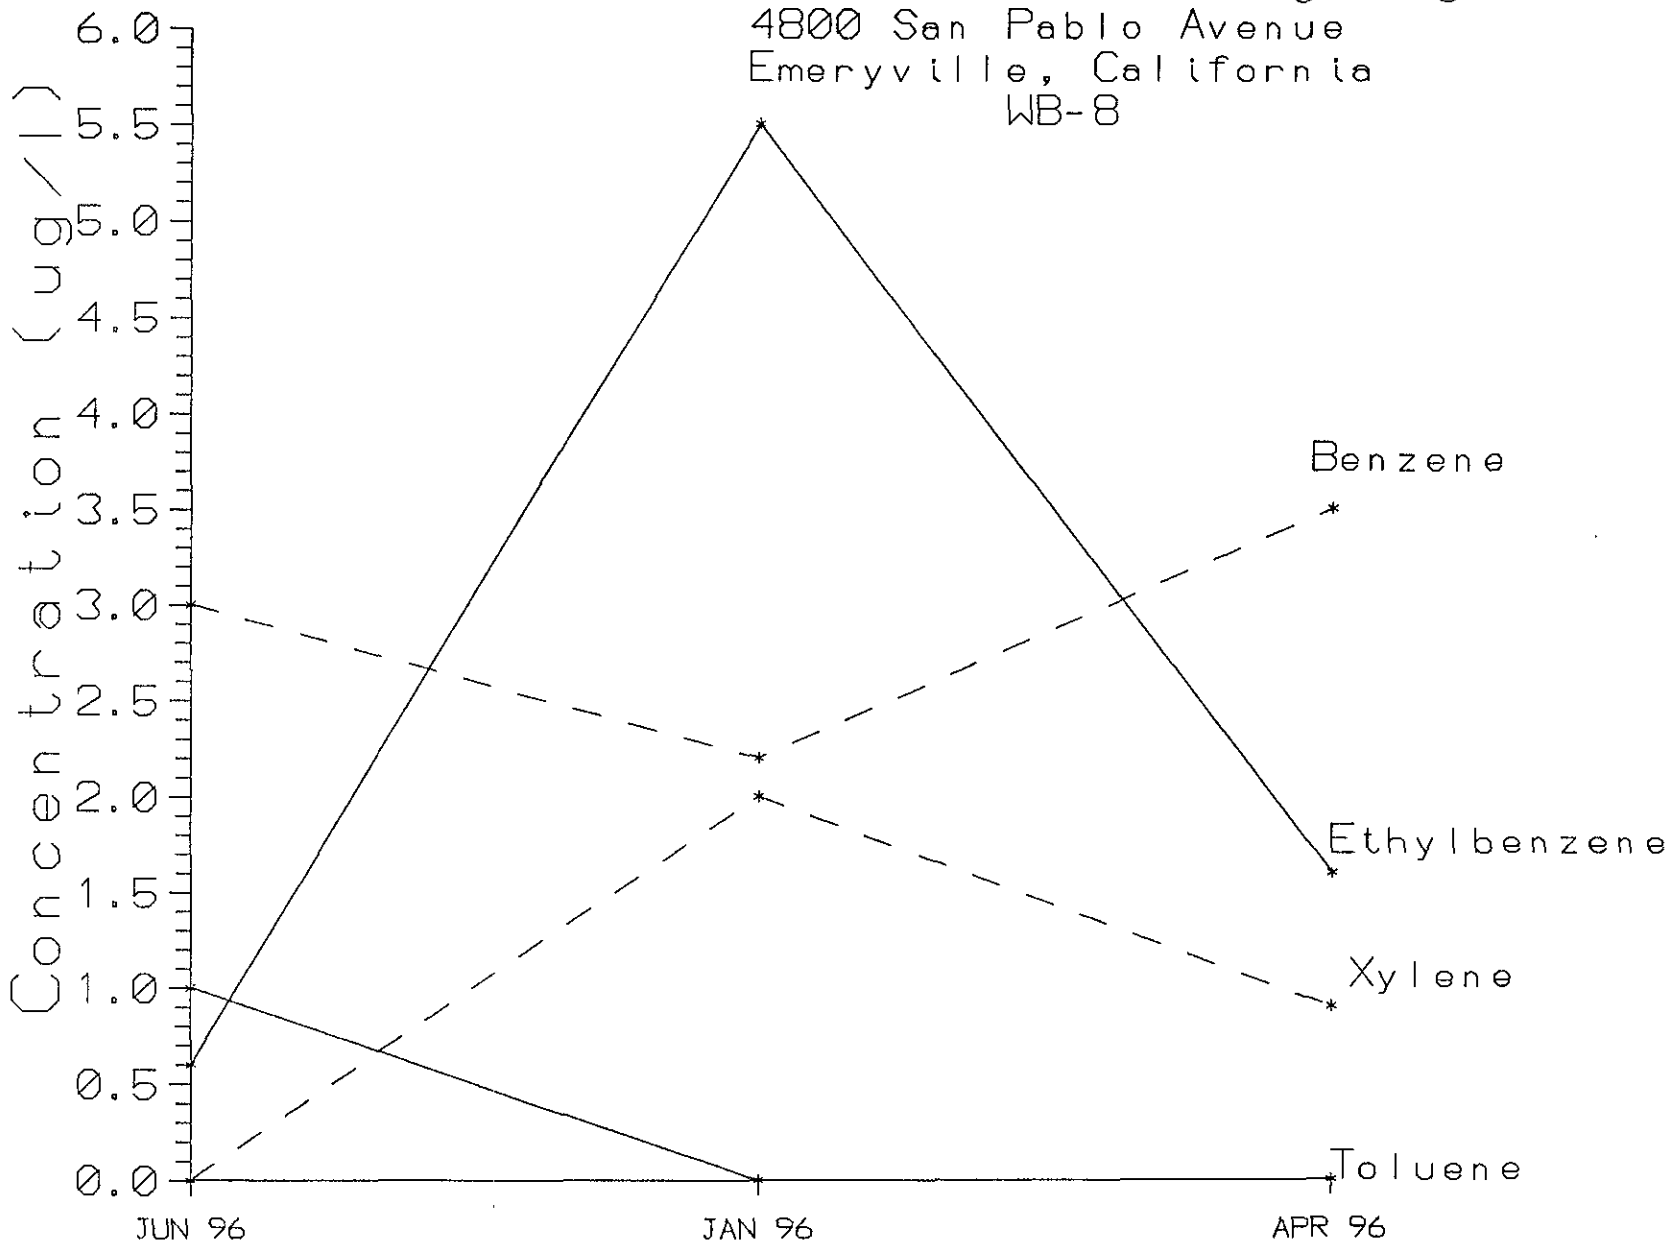

Time of Sampling Event


Ground Water Monitoring Program
4800 San Pablo Avenue
Emeryville, California
WB-9

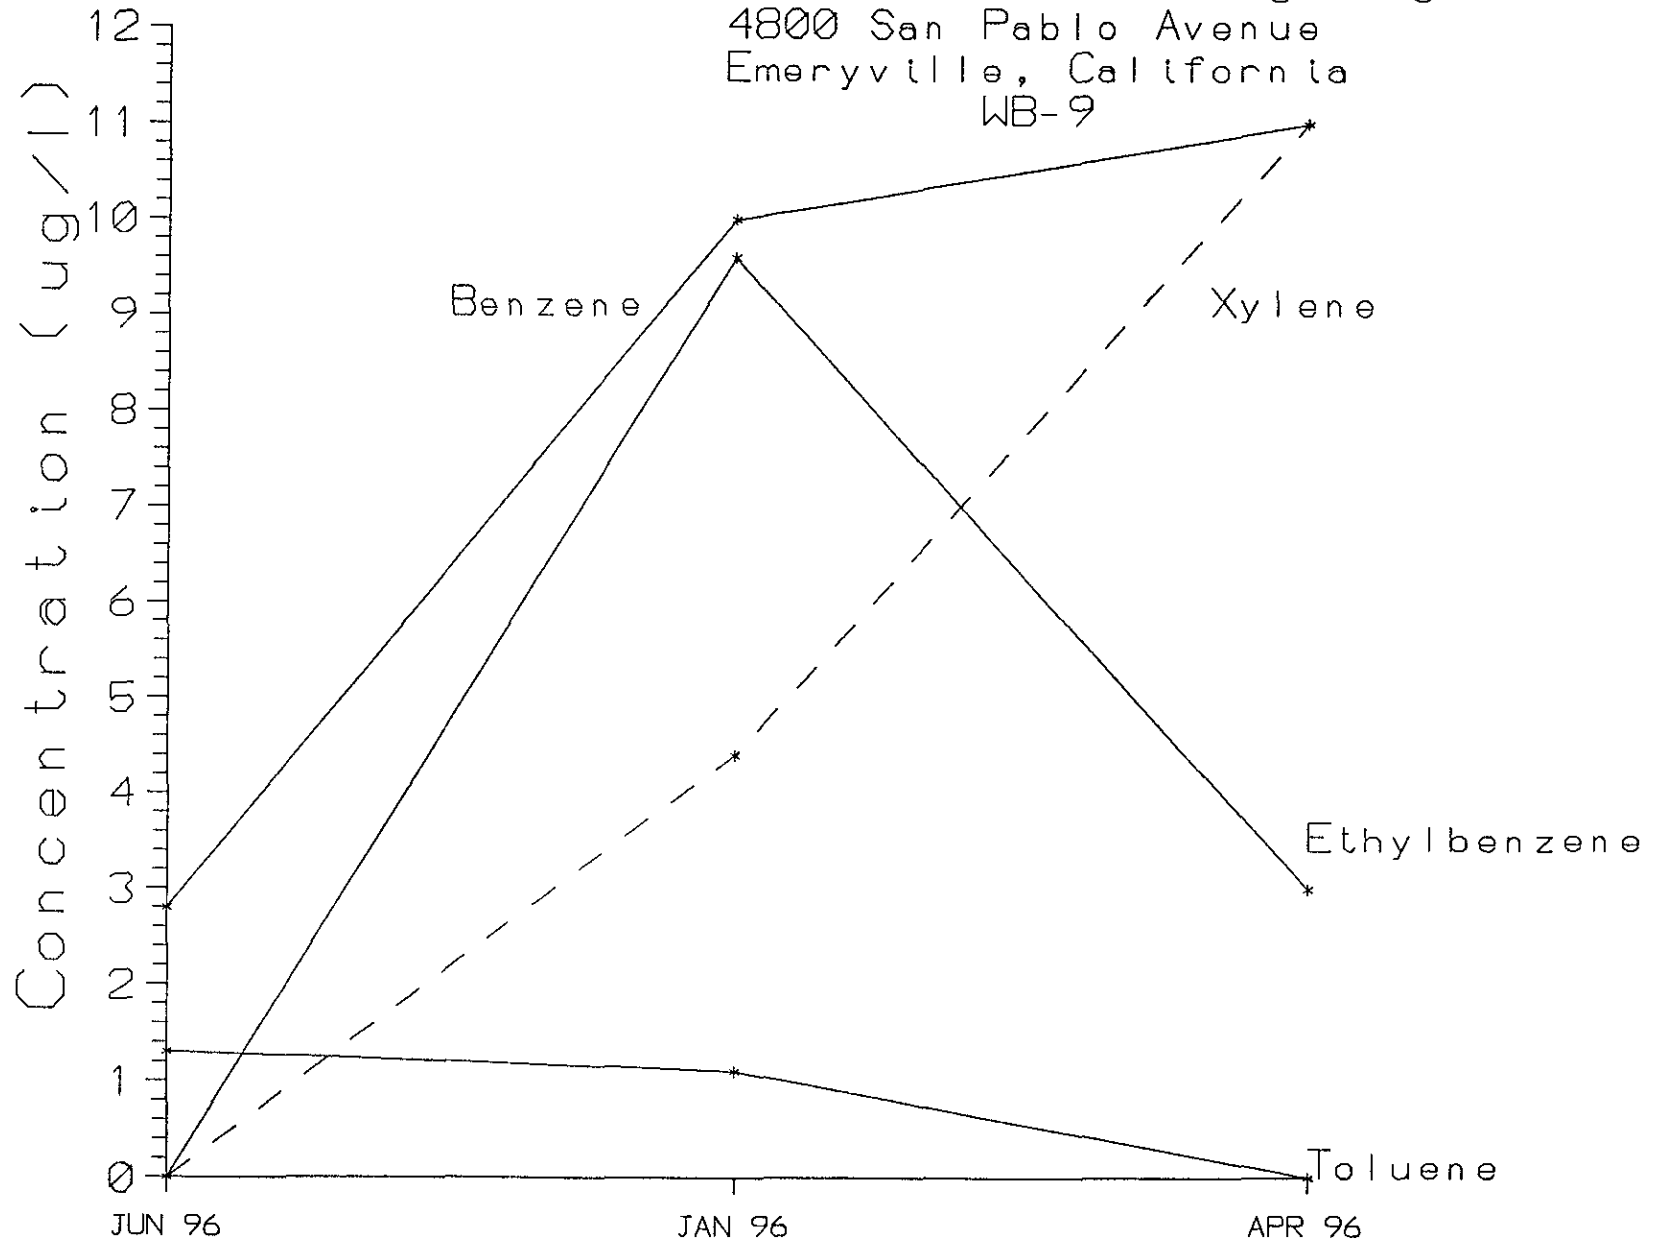

Time of Sampling Event

EXCELCHEM ENVIRONMENTAL LABS

500 Giuseppe Court, Suite 9
Roseville, CA 95678
Phone#: (916) 773-3664 Fax#: (916) 773-4784



ANALYSIS REPORT

Attention:	Mr Stephen Baker HYDROSOLUTIONS OF CALIF. 5917 Moss Creek Circle, Suite 2 Fair Oaks, CA 95628	Date Sampled :	04-05-96
		Date Received:	04-05-96
		BTEX Analyzed:	04-09-96
		TPHg Analyzed:	04-09-96
Project :	96286 / Pablo	Matrix:	Water

	Benzene <u>PPB</u>	Toluene <u>PPB</u>	Ethyl- benzene <u>PPB</u>	Total Xylenes <u>PPB</u>	TPHg <u>PPB</u>	Chlorobenzene Surrogate %REC
Reporting Limit:	0.5	0.5	0.5	0.5	50	

SAMPLE

Laboratory Identification:

WB-8 W0496081	3.5	ND	1.6	0.9	200	104%
WB-9 W0496082	11	ND	3.0	11	420	105%
WB-14 W0496083	1.9	ND	ND	1.4	130	108%

ppb= Parts per billion = $\mu\text{g/L}$ = micrograms per Liter


ND = Not detected. Compound(s) may be present at concentrations below the reporting limit.

DF = Dilution Factor = 1

ANALYTICAL PROCEDURES

BTEX-- Benzene, toluene, ethylbenzene, and total xylene isomers (BTEX) are measured by extraction using EPA Method 5030 followed by analysis using EPA Method 602 which utilizes a gas chromatograph (GC) equipped with a photoionization detector (PID).

TPHg--Total petroleum hydrocarbons as gasoline (low to medium boiling points) are measured by extraction using EPA Method 5030, followed by modified EPA Method 8015 which utilizes a GC equipped with a FID.



Laboratory Representative

04-12-96
Date Reported

EXCELCHEM ENVIRONMENTAL LABS

500 Giuseppe Court, Suite 9
Roseville, CA 95678

Phone#: (916) 773-3664 Fax#: (916) 773-4784



ANALYSIS REPORT

Attention:	Mr. Stephen Baker	Date Sampled :	04-05-96
	HYDROSOLUTIONS OF CALIF.	Date Received:	04-05-96
	5917 Moss Creek Circle, Suite 2	TPHd Analyzed:	04-09-96
	Fair Oaks, CA 95628	TPHo Analyzed:	04-11-96
Project :	96286 / Pablo	Matrix:	Water

	TPHd <u>PPB</u>	TPHo <u>PPB</u>
Reporting Limit:	50	500
SAMPLE		
Laboratory Identification:		
WB-8 W0496081	ND	ND
WB-14 W0496083	ND	ND

PPB = Parts per billion = ug/L = microgram per Liter

ND = Not detected. Compound(s) may be present at concentrations below the reporting limit

DF = Dilution Factor = 1

ANALYTICAL PROCEDURES

TPHd--Total petroleum hydrocarbons as diesel are measured by extraction using EPA Method 3510 followed by modified EPA Method 8015 with direct sample injection into a GC equipped with a FID.


TPHo--Total petroleum hydrocarbons as oil are measured by extraction using EPA Method 3510 followed by modified EPA Method 8015 with direct sample injection into a GC equipped with a FID


Laboratory Representative

04-12-96
Date Reported

EXCEL CHEM ENVIRONMENTAL LABS

500 Giuseppe Court, Suite 9
Roseville, CA 95678
Phone#: (916) 773-3664 Fax#: (916) 773-4784



QA/QC REPORT

Attention: Mr. Stephen Baker Date Analyzed: 04-09-96
HYDROSOLUTIONS OF CALIF. Matrix: Water
5917 Moss Creek Circle, Suite 2
Fair Oaks, CA 95628
Project: 96286 / Pablo

	Benzene	Toluene	Ethyl- benzene	Total Xylenes
	<u>PPB</u>	<u>PPB</u>	<u>PPB</u>	<u>PPB</u>
Reporting Limit:	0.5	0.5	0.5	0.5

QA/QC PARAMETER

Matrix Blank	ND	ND	ND	ND
--------------	----	----	----	----

PERCENT RECOVERIES

Matrix Spike	100%	100%	98%	97%
Matrix Spike Duplicate	99%	97%	98%	96%

ppb = parts per billion = ug/L = microgram per liter

ND = Not detected. Compound(s) may be present at concentrations below the reporting limit

All surrogate recoveries were within 30% of target values.

Spikes & Spike Duplicates were each spiked with 250 ng BTEX standard.

ANALYTICAL PROCEDURES


BTEX-- Benzene, toluene, ethylbenzene, and total xylene isomers (BTEX) are measured by extraction using EPA Method 5030 followed by analysis using EPA Method 602 which utilizes a gas chromatograph (GC) equipped with a photoionization detector (PID).


Laboratory Representative

04-12-96
Date Reported

EXCELCHEM ENVIRONMENTAL LABS

500 Giuseppe Court, Suite 9
Roseville, CA 95678
Phone#: (916) 773-3664 Fax#: (916) 773-4784



QA/QC REPORT

Attention:	Mr. Stephen Baker HYDROSOLUTIONS OF CALIF. 5917 Moss Creek Circle, Suite 2 Fair Oaks, CA 95628	Date Analyzed:	04-09-96
		Matrix:	Water
Project:	96286 / Pablo		

	TPHd
	<u>PPB</u>
Reporting Limit:	50

QA/QC PARAMETER

Matrix Blank	ND
--------------	----

PERCENT RECOVERIES

Laboratory Control Spike	77%
--------------------------	-----

Laboratory Control Spike Duplicate	90%
------------------------------------	-----

ppb = parts per billion = ug/L = microgram per liter

ND = Not detected. Compound(s) may be present at concentrations below the reporting limit

Spikes & Spike Duplicates were each spiked with 5000 ug of diesel standard.

ANALYTICAL PROCEDURES

TPHd-- Total petroleum hydrocarbons as diesel (high boiling points) are measured by extraction using EPA Method 3510, followed by modified EPA Method 8015 with direct sample injection into a GC equipped with an FID.


Laboratory Representative

04-12-96
Date Reported

