

PROTEONOTAL SSMERZI AM 8:03

March 16, 1995 Project 330-048.2A

Mr. Mike Whelan ARCO Products Company 2155 South Bascom Avenue, Suite 202 Campbell, California 95008

Re: Quarterly Report - Fourth Quarter 1994 ARCO Service Station 2152 22141 Center Street at Grove Way Castro Valley, California

Dear Mr. Whelan:

This letter, prepared by Pacific Environmental Group, Inc. (PACIFIC) on behalf of ARCO Products Company, presents the results of the fourth quarter 1994 groundwater monitoring at the site referenced above. In addition, a summary of work completed and anticipated at the site is included.

QUARTERLY GROUNDWATER MONITORING RESULTS

Groundwater samples were collected by Integrated Wastestream Management, Inc. (IWM) on November 22, 1994, and analyzed for the presence of total petroleum hydrocarbons calculated as gasoline (TPH-g), benzene, toluene, ethylbenzene, and xylenes (BTEX compounds). IWM's certified analytical reports, chain-of-custody documentation, and field data sheets are presented as Attachment A. IWM's groundwater sampling procedures are presented as Attachment B.

Depth to water data collected on November 22, 1994 indicated that groundwater elevations in site monitoring wells have fallen approximately 0.49 foot since August 25, 1994. Groundwater flow is toward the southwest with a gradient of approximately 0.004. Groundwater elevation data are presented in Table 1. A groundwater elevation contour map based on the data of November 22, 1994 is shown on Figure 1.

TPH-g and benzene were not detected in any site well during the groundwater sampling event of November 22, 1994. This is consistent with previous quarterly data. No hydrocarbons have been detected in site groundwater since July 1991. Separate-phase hydrocarbons have never been observed in any site well. Groundwater analytical data

are presented in Table 2. A TPH-g and benzene concentration map is shown on Figure 2.

SUMMARY OF WORK

Work Completed Fourth Quarter 1994

- Sampled site wells for fourth quarter 1994 groundwater monitoring program. Sampling was performed by IWM.
- Prepared and submitted third quarter 1994 groundwater monitoring report.

Work Anticipated First Quarter 1995

- Prepare and submit fourth quarter 1994 groundwater monitoring report.
- Sample site wells for first quarter 1995 groundwater monitoring program. Sampling to be performed by PACIFIC.
- Prepare first quarter 1995 groundwater monitoring report.
- Pursue site closure with Alameda County Health Care Services Agency.

If there are any questions regarding the contents of this letter, please call.

Sincerely,

Pacific Environmental Group, Inc.

Edward Buskirk

Project Scienfist

Michael Hurd Senior Geologist

CEG 1885

MICHAEL HURD
No. 1885 46
CERTIFIED. CERTIFIE

Attachments: Table 1 - Groundwater Elevation Data

Table 2 - Groundwater Analytical Data - Total Petroleum Hydrocarbons

(TPH as Gasoline and BTEX Compounds)
Groundwater Elevation Contour Man

Figure 1 - Groundwater Elevation Contour Map Figure 2 - TPH-g/Benzene Concentration Map

Attachment A - Certified Analytical Reports, Chain-of-Custody

Documentation, and Field Data Sheets

Attachment B - Groundwater Sampling Procedures

cc: Mr. Scott Seery, Alameda County Health Care Services Agency

Mr. Kevin Graves, Regional Water Quality Control Board - S.F. Bay Region

Table 1
Groundwater Elevation Data

· · · · ·		Well	Depth to	Groundwater
Well	Date	Elevation	Water	Elevation
Number	Gauged	(feet, MSL)	(feet, TOC)	(feet, MSL)
MW-1	06/25/90	217.16	49.80	167.36
	09/07/90		50.00	167.16
	09/26/90		50.09	167.07
	12/14/90		50.44	166.72
	01/08/91		50.45	166.71
]	02/21/91		50.51	166.65
1	03/19/91		50.16	167.00
<u> </u>	04/02/91		50.14	167.02
ļ	05/02/91		49.77	167.39
	06/18/91		49.75	167.41
	07/08/91		49.80	167.36
	08/22/91		50.08	167.08
	09/18/91		50.11	167.05
	10/15/91		50.30	166,86
ļ	11/13/91		50.30	166.86
	12/27/91		50.28	166.88
1	01/18/92		50,39	166,77
	02/20/92		50.16	167.00
ļ .	03/13/92		49.75	167.41
	04/24/92		49.18	167.98
1	05/15/92		49.22	167.94
	06/08/92		49.30	167.86
	07/25/92		49.42	167.74
1	08/23/92		49.52	167.64
1	09/04/92		49.71	167.45
	10/19/02		49.98	167.18
	11/23/92		50.10	167.06
	12/18/92		50.29	166.87
1	01/14/93		49.81	167.35
	02/24/93		48.71	168.45
	03/30/93		48.02	169.14
	04/09/93		47.81	169.35
1	07/30/93		47.61	169.55
1	10/29/93		48,00	169.16
	03/04/94		48.34	168.82
	05/17/94		47.51	169.65
	08/25/94		47.86 48.36	169.30 168,80
1	11/22/94		40,50	100,00
MW-2	06/25/90	216.50	49.04	167.46
1	09/07/90		49.22	167.28
	09/26/90		49.32	167.18
	12/14/90		49.66	166.84
	01/08/91		49.72	166.78
	02/21/91		49.77	166.73
	03/19/91		49.44	167.06
	04/02/91		49,43	167.07
	05/02/91		49.03	167.47
1	06/18/91		48.98	167.52
1	07/08/91		49.03	167.47
	08/22/91		49.30	167.20
	09/18/91		49.34	167.16
1	10/15/91		49.51	166.9 <u>9</u>

Table 1 (continued) Groundwater Elevation Data

		Well	Depth to	Groundwater
Well	Date	Elevation	Water	Elevation
Number		(feet, MSL)		(feet, MSL)
MW-2	11/13/91	(1004 11102)	49.53	166.97
(cont.)	12/27/91		49.49	167.01
(**************************************	01/18/92		49.60	166.90
	02/20/92		49.39	167.11
	03/13/92		48.97	167.53
ł	04/24/92		48.47	168.03
	05/15/92		48.47	168.03
	06/08/92		48.50	168.00
}	07/25/92		48.52	167.98
ł	08/23/92		44,95	171.55
	09/04/92		48,95	167.55
	10/19/02		49.20	167.30
	11/23/92		. 49.35	167.15
	12/18/92		49.57	166.93
	01/14/93		49.10	167.40
	02/24/93		47.86	168.64
1	03/30/93		47.17	169.33
1	04/09/93		47.02	169.48
1	07/30/93		46.80	169.70
	10/29/93		47.20	169.30
	03/04/94		47.48	169.02
1	05/17/94		46.68	169.82
1	08/25/94		47.04	169.46
	11/22/94		47.53	168.97
	11,22,01			
MW-3	06/25/90	217.57	50.55	167.02
1	09/07/90		50.73	166.84
	09/26/90		50.81	166.76
	12/14/90		51.1 5	166.42
	01/08/91		51.16	166.41
	02/21/91		51.21	166.36
1	03/19/91		50.93	166.64
1	04/02/91		50.92	166.65
-	05/02/91		50.51	167.06
1	06/18/91		50.47	167.10
	07/08/91		50.54	167.03
1	08/22/91		50.80	166.77
	09/18/91		50.82	166.75
	10/15/91		51.02	166.55
1	11/13/91		51.03	166.54
	12/27/91		51.01	166.56
	01/18/92		51.15	166.42
1	02/20/92		50.84	166.73
	03/13/92		50.39	167.18
	04/24/92		49.82	167.75
	05/15/92	<u>~</u>	49.90	167.67
İ	07/25/92		50.14	167.43
1	08/23/92		50.12	167.45
1	09/04/92		50.38	167.19
1	10/19/02		50.71	166.86
1	11/23/92		50.81	166.76
	12/18/92		50.50	167.07
1	01/14/93		Well Inaccess	sible

Table 1 (continued) Groundwater Elevation Data

			30/-0	Deeth te	Groundwater
١,,	/ell	Date	Well Elevation	Depth to Water	Elevation
1	nber	Gauged		(feet, TOC)	
	V-3	02/24/93		Vell Inaccessi	
	ont.)	03/30/93	•	48.82	168.75
"	, i.i.,	04/09/93		48.71	168.86
ı		07/30/93		48.33	169,24
1		10/29/93		48.64	168.93
1		03/04/94		49.15	168.42
Ì		05/17/94		48.33	169.24
i		08/25/94		48.66	168.91
		11/22/94		49,15	168.42
M	N-4	06/25/90	215.18	48.06	167.12
		09/07/90		48.25	166.93
1		09/26/90		48.35	166.83
1		12/14/90		48.68	166.50
1		01/08/91		48.70	166.48
		02/21/91		48.76	166.42
ł		03/19/91		48.44	166.74
		04/02/91		48.43	166.75
		05/02/91		48.04	167.14
1		06/18/91		48.00	167.18
1		07/08/91		48.04	167.14
1		08/22/91		48.34	166,84
1		09/18/91		48.35	166.83
1		10/15/91		48.54	166.64
1		11/13/91		48.56	166,62
1		12/27/91		48.52	166.66
1		01/18/92		48.68	166,50
1		02/20/92		.48.37	166,81
1		03/13/92		47.96	167.22
1		04/24/92		47.41	167.77
		05/15/92		47.46	167.72
-		06/08/92		47.52	167.66
1		07/25/92		47.67	167.51
		08/23/92		47.78	167.40
Ì		09/04/92	*	47.78	167.40
		10/19/02		48.22	166,96
1		11/23/92		48.34	166.84
		12/18/92		48.50	166.68
		01/14/93		48.03	167.15
-		02/24/93		46.95	168.23
		03/30/93		46.25	168.93
1		04/09/93		46.18	169.00
		07/30/93		45.96	169,22
		10/29/93		46.12	169.06
		03/04/94		46.60	168.58
1		05/04/94		45.78	169.40
-		08/25/94		46.11	169.07
		11/22/94		46.60	168.58
		1112434		-, 0.00	
1	W-2	02/24/93	216.38	38.28	178.10
1 '		03/30/93	_	38.32	178.06
1		04/09/93		38.33	178.05
		07/30/93		38.36	178.02
		07,00,00			

Table 1 (continued) Groundwater Elevation Data


		Well	Depth to	Groundwater
Weil	Date	Elevation	Water	Elevation
Number	Gauged	(feet, MSL)	(feet, TOC)	(feet, MSL)
VW-2	10/29/93		- Well Dry	
(cont.)	03/04/94		38.34	178.04
` '	05/17/94		NM	NM
ŀ	08/25/94		NM	NM
	11/22/94		NM	. NM
VW-3	02/24/93	NS	NM	NM
	03/30/93		38.27	NM
:	04/09/93		Vell Inaccess	
1	07/30/93		Well Dry	
	10/29/93		Well Dry	
	03/04/94		38.27	NM
1	05/17/94		MM	NM I
1	08/25/94		NM	NM
	11/22/94		NM	NM
VW-4	02/24/93	NS	NM	
	03/30/93		Well Dry	
İ	04/09/93		Well Dry	
	07/30/93		Well Dry	
	10/29/93		Well Dry	
	03/04/94		Well Dry	
	05/17/94		NM	NM
	08/25/94		NM	MM
	11/22/94		NM	NM
VW-5	02/24/93	NS		NM
	03/30/93		Well Dry -	
	04/09/93		Well Inaccess	
	07/30/93		Well Dry -	
	10/29/93		Well inaccess	
VW-5	03/04/94		Well Dry	
(cont.)	05/17/94		NM	NM
-	08/25/94		NM	NM
	11/22/94		NM	NM
MSL	= Mean s			
TOC	= Top of c			
NS	= Not sur	•		
NM	= Not mea	asured		

Table 2
Groundwater Analytical Data
Total Petroleum Hydrocarbons
(TPH as Gasoline and BTEX Compounds)

		TPH as			Ethyl-	
Weli	Date	Gasoline	Benzene	Toluene	benzene	Xylenes
Number	Sampled	(ppb)	(dqq)	(ppb)	(dqq)	(dqq)
MW-1	06/26/90	64	0.63	<0.50	<0.50	<0.50
	09/26/90	<50	<0.50	<0.50	< 0.50	< 0.50
	01/08/91	<50	< 0.50	<0.50	<0.50	<0.50
	04/02/91	<50	<0.05	<0.05	< 0.05	<0.05
1	07/08/91	120	2.3	4.6	1.3	9.6
1	10/15/91	<30	< 0.30	< 0.30	<0.30	<0.30
1	03/13/92	<30	< 0.30	<0.30	< 0.30	<0.30
	06/08/92	<30	< 0.30	<0.30	<0.30	<0.30
!	09/04/92	<50	<0.5	<0.5	<0.5	<0.5
	10/19/92	<50	<0.5	<0.5	<0.5	<0.5
	01/14/93	<50	<0.50	<0.50	< 0.50	<0.50
	04/09/93	<50	<0.5	<0.5	<0.5	<0.5
Į.	07/30/93	<50	<0.50	< 0.50	<0.50	<0.50
	10/29/93	<50	<0.50	<0.50	<0.50	<0.50
	03/04/94	<50	<0.5	<0.5	<0.5	<0.5
	05/17/94	<50	<0.5	<0.5	<0.5	. <0.5
	08/25/94	<50	<0.5	<0.5	<0.5	<0.5
1	11/22/94	<50	<0.5	<0.5	<0.5	<0.5
MW-2	06/26/90	27	<0.50	<0.50	<0.50	<0.50
ļ	09/26/90	<50	<0.50	<0.50	<0.50	<0.50
•	01/08/91	<50	<0.50	<0.50	<0.50	<0.50
	04/02/91	<50	<0.05	<0.05	<0.05	<0.05
	07/08/91	30	0.42	0.47	<0.30	0.89
1	10/15/91	<30	<0.30	<0.30	<0.30	<0.30
1	03/13/92	<30	<0.30	<0.30	<0.30	<0.30
1	06/08/92	<30	<0.30	<0:30	<0.30	<0.30
ļ	09/04/92	<50	、 <0.5	<0.5	<0.5	<0.5
	10/19/92	<50	<0.5	<0.5	<0.5	<0.5
	01/14/93	<50	<0.50	<0.50	<0.50	<0.50
	04/09/93	<50	<0.5	<0.5	<0.5	<0.5
1	07/30/93	<50	<0.50	< 0.50	<0.50	<0.50
1	10/29/93	<50	<0.50	<0.50	<0.50	<0.50
1	03/04/94	<50	<0.5	<0.5	<0.5	<0.5
1	05/17/94	<50	<0.5	<0.5	<0.5	<0.5
	08/25/94	<50	<0.5	<0.5	<0.5	<0.5
	11/22/94	<50	<0.5	<0.5	<0.5	<0.5
LATATO	06/26/90	52	0.65	1.5	<0.50	2
MW-3	09/26/90	<50	<0.50	<0.50	<0.50	<0.50
1	09/26/90	<50 <50	<0.50	<0.50	<0.50	<0.50
1	01/08/91	<50 <50	<0.50	<0.50	<0.05	<0.05
	04/02/91	<50 67	0.69	1.5	0.65	4.7
	10/15/91	<30	<0.30	<0.30	<0.30	<0.30
	03/13/92	<30	<0.30	<0.30	<0.30 ⁻	<0.30
1		<30 <30		<0.30	<0.30	<0.30
	06/08/92 09/04/92		<0.5	<0.50	<0.5	<0.5
	10/19/92		<0.5 <0.5	<0.5	<0.5 <0.5	<0.5
	01/14/93	×50 NS	VU.S NS	NS	~0.5 NS	NS
	04/09/93		<0.5	<0.5	<0.5	<0.5
L	04/09/93	<u> </u>	~0.5	~0.5	~0.0	

Table 2 (continued) Groundwater Analytical Data Total Petroleum Hydrocarbons (TPH as Gasoline and BTEX Compounds)

	•	TPH as			Ethyl-	
Well	Date	Gasoline	Benzene	Toluene	benzene	Xylenes
Number	Sampled	(ppb)	(ppb)	(dqq)	(ppb)	(ppb)
KW-3	07/30/93	<50	<0.50	<0.50	<0.50	<0.50
(cont.)	10/29/93	<50	<0.50	<0.50	<0.50	<0.50
ļ	03/04/94	<50	<0.5	<0.5	<0.5	<0.5
	05/17/94	<50	<0.5	<0.5	<0.5	<0.5
	08/25/94	<50	<0.5	<0.5	<0.5	<0.5
1	11/22/94	<50	<0.5	<0.5	<0.5	<0.5
1						
MW-4	06/26/90	<20	<0.50	<0.50	<0.50	<0.50
1.	09/26/90	<50	<0.50	<0.50	<0.50	<0.50
1	01/08/91	<50	<0.50	<0.50	<0.50	<0.50
	04/02/91	<50	<0.05	<0.05	<0.05	<0.05
1	07/08/91	50	1.4	2.4	0.62	4.2
	10/15/91	<30	<0.30	<0.30	<0.30	<0.30
	03/13/92	<30	<0.30	< 0.30	<0.30	<0.30
	06/08/92	<30	<0.30	< 0.30	<0.30	<0.30
ļ	09/04/92	<50	<0.5	<0.5	<0.5	<0.5
i	10/19/92	<50	<0.5	<0.5	<0.5	<0.5
	01/14/93	<50	<0.50	<0.50	<0.50	<0.50
1	04/09/93	<50	<0.05	<0.5	<0.5	<0.5
l	07/30/93	<50	<0.50	< 0.50	<0.50	<0.50
	10/29/93	<50	<0.50	<0.50	<0.50	<0.50
	03/04/94	<50	<0.05	<0.5	<0.5	<0.5
	05/17/94	<50	<0.5	<0.5	<0.5	<0.5
	08/25/94	<50	. <0.5	<0.5	<0.5	<0.5
	11/22/94	<50	<0.5	<0.5	<0.5	<0.5
ppb = Par	rts per billior	1				

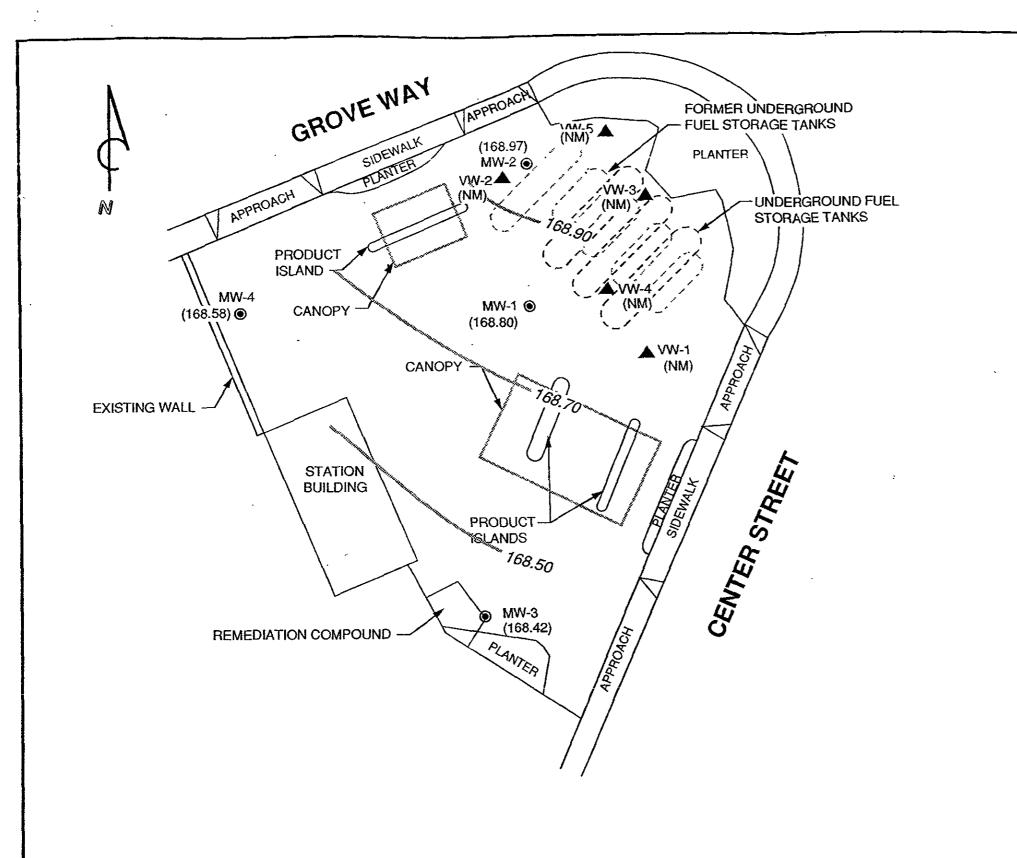

LEGEND

- MW-4 GROUNDWATER MONITORING WELL LOCATION AND DESIGNATION
- VW-1 A SOIL VAPOR EXTRACTION WELL LOCATION AND DESIGNATION
- (168.42) GROUNDWATER ELEVATION IN FEET MSL, 11-22-94
- 168.90 GROUNDWATER ELEVATION CONTOUR IN FEET MSL, 11-22-94

(NM) WELL NOT MEASURED




APPROXIMATE DIRECTION OF GROUNDWATER FLOW

APPROXIMATE GRADIENT = 0.004

Reference: Basemap taken from RESNA



PACIFIC ENVIRONMENTAL GROUP, INC.




ARCO SERVICE STATION 2152 22141 Center Street at Grove Way Castro Valley, California

GROUNDWATER ELEVATION CONTOUR MAP

FIGURE:

PROJECT: 330-048.2A

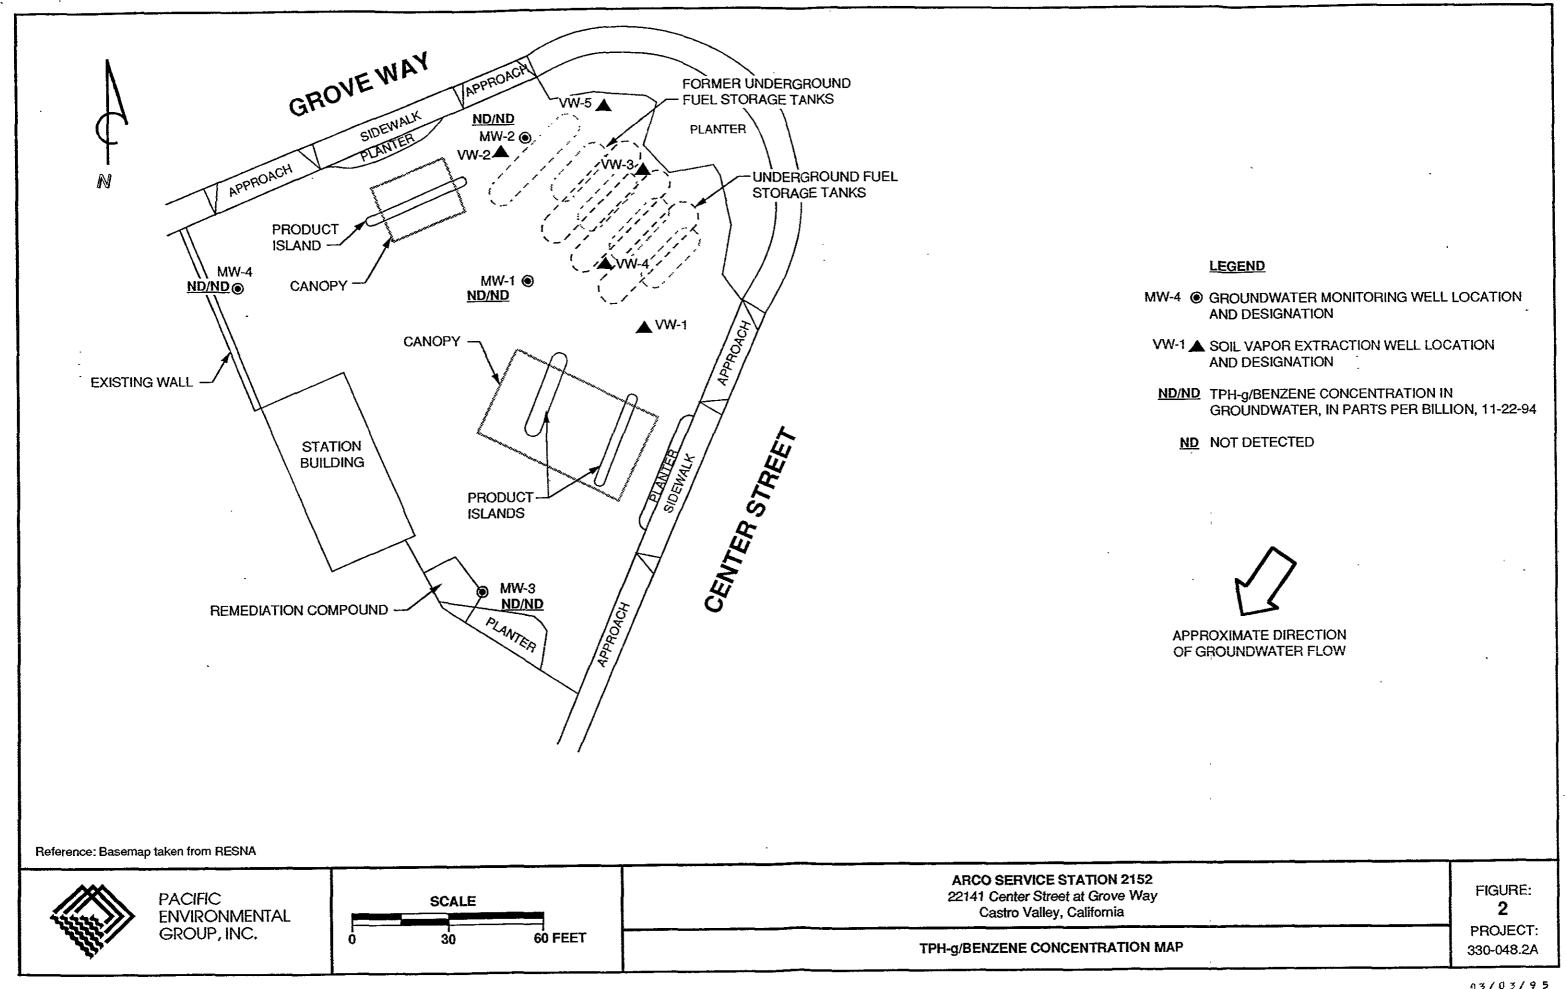

ATTACHMENT A

CERTIFIED ANALYTICAL REPORTS, CHAIN-OF-CUSTODY DOCUMENTATION, AND FIELD DATA SHEETS

DEC 27 1994

PACIFIC ENVIRONMENTAL CHOUP, INC.

I NTEGRATED
W ASTESTREAM
M ANAGEMENT

December 16, 1994

Kelly Brown Pacific Environmental Group 2025 Gateway Place, Ste# 440 San Jose, CA 95110

Dear Mr. Brown:

Attached are the field data sheets and analytical results for quarterly ground water sampling at ARCO Facility No. 2152 in Castro Valley, California. Integrated Wastestream Management measured the depth to water and collected samples from wells at this site on November 22, 1994.

Sampling was carried out in accordance with the protocols described in the "Request for Bid for Quarterly Sampling at ARCO Facilities in Northern California".

Please call us if you have any questions.

Sincerely,

Integrated Wastestream Management

Tom DeLon

Project Manager

Walter H. Howe Registered Geologist

No. 730

I NTEGRATED W ASTESTREAM M ANAGEMENT

Summary of Ground Water Sample Analyses for ARCO Facility A-2152, Castro Valley, California

WELL NUMBER	MW-1	MW-2	MW-3	MW-4	
DATE SAMPLED DEPTH TO WATER	11/22/94 48.36	11/22/94 47.53	11/22/94 49.15	11/22/94 46.60	
SHEEN	NONE	NONE	NONE	NONE	
PRODUCT THICKNESS	NA	NA	NA	NA	
ТРНд	ND	ND	ND	ND	
BTEX			•		
BENZENE	ND	ND	ND	ND	
TOLUENE	ND	ND	ND	ND	
ETHLYBENZENE	ND	ND	ND	ND	
XYLENES	ND	ND	ND	ND	

FOOTNOTES:

Concentrations reported in ug/L (ppb)

TPHg = Total Purgeable Petroleum Hydrocarbons (USEPA Method 8015 Modified)

BTEX Distinction (USEPA Method 8020)

PCE = Tetrachloroethene (USEPA Method 8010)

*=Well inaccessible

** = Not sampled per consultant request

DCE = cis-1, 2-Dichloroethene (USEPA Method 8010)

TCE = Trichloroethene (USEAP Method 8010)

ND = Not Detected

NA = Not applicable

FP = Floating product

= See laboratory analytical report

FIELD REPORT

Depth To Water / Floating Product Survey

11-18-94 Site Arrival Time: /700 11-22-94 Site Departure Time: /320

Weather Conditions: Suns

DT	W: Well B	lox	or [V	Vell (Casin	ıg (ciı	rcle one)							Clean
	Project No	_									34. C.V	/ .	Date: //-/8-94 Day of Week: Friday	
	Client / Sta	ation	#:	<u> </u>	<u>w</u>	211	52	Field Tech	nician:	<u> Vince</u>	<u>Ualdee</u>	?	Day of Week: Friday	
DTW ORDER	WELL ID	SURFACE SEAL	LID SECURE	GASKET	LOCK	EXPANDING CAP	TOTAL DEPTH (Feet)	FIRST DEPTH TO WATER (Feet)	SECOND DEPTH TO WATER (Feet)	DEPTH TO FLOATING PRODUCT (Feet)	FLOATING PRODUCT THICKNESS (Feet)	SHEEN (Y=YES, N=NO) FP=FLOATING PRODUCT	COMMENTS	MATERIALS
2	MW-1	OK	70	OK	22	Ů	53.41	48.36	48.36	NA	N/A	N	4"	15/16
	mw-2		_			OK/		47.53+			NA	N	Au	15/16
3	mw-3							49.15		NA	NA	N	4"	15/16
시	mw-4	OX.	JU.	OK	622	OK	60.60	46.40+	46.601		2/1	λ	1411	FILLEIN
									_					
													<u>.</u>	
		 												
		 		1		 								
-		 	 			\Box								
 		+	\vdash	 	 	 								
		 	+	\vdash	 	 						<u> </u>	·	
		-	 	 	 	 			<u> </u>			 		
				\vdash	 	 								
 		1.	\vdash	+-	 	-	-					 		
L	<u> </u>			<u> </u>		<u>.l</u>	ــــــــــــــــــــــــــــــــــــــ	<u> </u>	1	<u> </u>				

PAGE 7 OF7 DATE: 11-24-94 CLIENT/STATION#: MOW C	2152 ADDRESS: 22141 Conten St. Casta Valley
WELL ID: MW-2 TD 59.53 AT 53 O.W X Gal. X Casing - Calculated Linear Ft. Volume Purge Purge DATE PURGED: 11-22-94 START (2400 HR): 1228 DTW: 49.5 TIME VOLUME pH (E.C. X 1,000) TEMP. COLOR (2400 HR) (GAL) (UNITS) (UMHOS/CM@25 C) (F) (VISUAL) 1211 3 7.33 O.940 68.7 CLOUDY 1225 DTW: 49.5 1211 12 7.33 O.940 68.7 CLOUDY 1225 DTW: 49.5 1211 12 7.33 O.940 68.7 CLOUDY 1225 DTW: 49.5 1211 12 7.33 O.940 68.7 CLOUDY 1225 DTW: 49.5 1211 12 7.33 O.940 68.7 CLOUDY 1225 DTW: 49.5 1211 12 7.33 O.940 68.7 CLOUDY 1225 DTW: 49.5 1221 18 7.32 O.940 68.7 CLOUDY 1225 DTW: 49.5 1221 18 7.32 O.940 68.7 CLOUDY 1225 DTW: 49.5 1221 18 7.32 O.940 68.7 CLOUDY 1225 DTW: 49.5 1221 18 7.34 O.940 68.7 CLOUDY 1225 DTW: 49.5 1221 18 7.35 O.940 68.7 CLOUDY 1225 DTW: 49.5 1221 18 7.34 O.940 68.7 CLOUDY 1225 DTW: 49.5 1222 DTW: 49.5 1223 DTW: 49.5 124 DTW: 49.5 125 DTW: 49.5 126 DTW: 49.5 127 DTW: 49.5 127 DTW: 49.5 128 DTW: 49.5 129 DTW: 49.5 120 DTW:	WELL ID: \(\text{YW} - \) \(\text{TD} \) \(\text{DTW} \) \(\text{X} \) \(\text{Gal.} \) \(\text{X} \) \(\text{Calculated} \) \(\text{Purpo} \) \(\text{DATE PURGED: } \(\text{I/22.91} \) \(\text{TIME (2400 HR): } \) \(\text{1302} \) \(\text{DTW: } \) \(\text{EADEMATERS: } \) \(\text{TIME (2400 HR): } \) \(\text{1302} \) \(\text{DTW: } \) \(\text{EADEMATERS: } \) \(\text{TIME (2400 HR): } \) \(\text{1302} \) \(\text{DTW: } \) \(\text{EADEMATERS: } \) \(\text{TIME (2400 HR): } \) \(\text{1302} \) \(\text{DTW: } \) \(\text{EADEMATERS: } \) \(\text{TIME (2400 HR): } \) \(\text{1302} \) \(\text{DTW: } \) \(\text{TIME (2400 HR): } \) \(\text{1302} \) \(\text{DTW: } \) \(\text{TIME (2400 HR): } \) \(\text{1302} \) \(\text{DTW: } \) \(\text{TOLOR} \) \(\text{(OLOR)} \) \(\text{(VISUAL)} \) \(\text{1302} \) \(\text{1300} \) \(\tex
WELL ID: TD - DTW X Gal. X Casing - Calculated Linear Ft. Volume Purge DATE PURGED: START (2400 HR): END (2400 HR) DATE SAMPLED: TIME (2400 HR): DTW: TIME VOLUME PH (E.C. X 1,000) TEMP. COLOR (2400 HR) (GAL) (UNITS) (UMHOS/CM@25 C) (F) (VISUAL)	WELL ID: TD DTW X Gal. Linear Ft. Volume Purge DATE PURGED: START (2400 HR): END (2400 HR) DTW: TIME VOLUME PH (E.C. X 1,000) TEMP. COLOR (2400 HR) (GAL) (UNITS) (UMHOS/CM@25 C) (F) (VISUAL)
Total purge: PURGING EQUIP.: Centrifugal Pump Bailer Disp. SAMPLING EQUIP: Bailer Disp. REMARKS:	Total purge: PURGING EQUIP.: Centrifugal Pump Bailer Disp. SAMPLING EQUIP: Bailer Disp. REMARKS:
PRINT NAME: CASING DIAMETER (inches): 2 3 4 6 8 12 Other GALLON/LINEAR FOOT: 0.17 0.38 0.66 1.5 2.6 5.8 Other	

	nich
PAGE 30F3 DATE: 11-22-94 CLIENT/STATION#: Unco	2152 ADDRESS: 22141 Conden St. C.V.
WELL ID: HW-3 TD 60.30 DTW 15	WELL ID: MW - A TD W. CO. DTW X Gal. X Casing - Coloulated Purge DATE PURGED: 1/-2-2 44 START (2400 HR): 12 40 END (2400 HR) 1308 DATE SAMPLED: 1/-2-2 44 START (2400 HR): 1310 DTW: 48.1 TIME VOLUME pH (E.C. X 1,000) TEMP. COLOR (2400 HR) (GAL) (UNITS) (UMHOS/CM@25 C) (F) (VISUAL) 1249 5 6.48 0.94 09.4 cloudy 1249 10 (0.90 1.00 09.0 cloudy 1258 20 (0.80 10.88 1.03 08.1 Cloudy Total purge: PURGING EQUIP: (Centrifugal Pump) Bailer Disp. REMARKS:
WELL ID: TD DTW X Gal. X Casing - Calculated Linear Ft. Volume Purgo DATE PURGED: START (2400 HR): END (2400 HR) DATE SAMPLED: TIME (2400 HR): DTW: TIME VOLUME pH (E.C. X 1,000) TEMP. COLOR (2400 HR) (GAL) (UNITS) (UMHOS/CM@25 C) (F) (VISUAL)	WELL ID: TD DTW X Gal. X Casing - Calculated Linear Ft. Volume Purgo DATE PURGED: START (2400 HR): END (2400 HR) DATE SAMPLED: TIME (2400 HR): DTW: TIME VOLUME pH (E.C. X 1,000) TEMP. COLOR (2400 HR) (GAL) (UNITS) (UMHOS/CM@25 C) (F) (VISUAL)
Fotal purge: PURGING EQUIP.: Centrifugal Pump Bailer Disp. SAMPLING EQUIP: Bailer Disp. REMARKS:	Total purge: PURGING EQUIP.: Centrifugal Pump Bailer Disp. SAMPLING EQUIP: Bailer Disp. REMARKS:
PRINT NAME: VINCE VOLDES	SIGNATURE: La Salad
CASING DIAMETER (inches): 2 3 4 6 8 12 Othe GALLON/LINEAR FOOT: 0.17 0.38 0.66 1.5 2.6 5.8 Othe	· · · · · · · · · · · · · · · · · · ·



December 7, 1994

Service Request No. <u>\$941504</u>

Gina Austin Tom DeLon IWM 950 Ames Avenue Milpitas, CA 95035

Re: ARCO Facility No. 2152

Dear Ms. Austin/Mr. DeLon:

Attached are the results of the water samples submitted to our lab on November 22, 1994. For your reference, these analyses have been assigned our service request number S941504.

All analyses were performed consistent with our laboratory's quality assurance program. All results are intended to be considered in their entirety, and CAS is not responsible for use of less than the complete report. Results apply only to the samples analyzed.

Please call if you have any questions.

Respectfully submitted:

COLUMBIA ANALYTICAL SERVICES, INC.

Keoni A. Murphy

Program Director

Annelise J. Bazar Regional QA Coordinator

KAM/ajb

Acronyms

ASTM American Society for Testing and Materials

CARB California Air Resources Board

CAS Number Chemical Abstract Service registry Number

CFC Chlorofluorocarbon

DEC Department of Environmental Conservation

DEQ Department of Environmental Quality

DHS Department of Health Services

DOE Department of Ecology :

DOH Department of Health

EPA U. S. Environmental Protection Agency

GC Gas Chromatography

GC/MS Gas Chromatography/Mass Spectrometry

LUFT Leaking Underground Fuel Tank

MCL Maximum Contaminant Level is the highest permissible concentration of a substance allowed in drinking water as established by the USEPA.

MDL Method Detection Limit

MRL Method Reporting Limit

NA Not Applicable

NAN Not Analyzed

NC Not Calculated

NCASI National Council of the Paper Industry for Air and Stream Improvement

ND Not Detected at or above the MRL

NR Not Requested

NIOSH National Institute for Occupational Safety and Health

PQL Practical Quantitation Limit

RCRA Resource Conservation and Recovery Act

SIM Selected Ion Monitoring

TPH Total Petroleum Hydrocarbons

VPH Volatile Petroleum Hydrocarbons

Analytical Report

Client:

IWM

Project:

ARCO Facility No. 2152

Sample Matrix:

Water

Service Request: S941504

Date Collected: 11/22/94

Date Received: 11/22/94 Date Extracted: NA

Date Analyzed: 12/5/94

BTEX and TPH as Gasoline EPA Methods 5030/8020/California DHS LUFT Method

	Analyte: Units: Method Reporting Limit:	TPH as Gasoline ug/L (ppb) 50	Benzene ug/L (ppb) 0.5	Toluene ug/L (ppb) 0.5	Ethyl- benzene ug/L (ppb) 0.5	Xylenes, Total ug/L (ppb) 0.5
Sample Name	Lab Code					
MW-1 (49.8)	S941504-001	ND	ND	ND	ND	ND
MW-2 (49.5)	S941504-002	ND	ND	ND	ND	ND
MW-3 (51)	S941504-003	ND	ND	ND	ND	ND
MW-4 (48.1)	S941504-004	ND	ND	ND	ND	ND
Method Blank	S941205-WB	ND	ND	ND	ND	ND

Approved By:

5ABTXGAS/061694

Date: _

Page 3 of 8

APPENDIX A LABORATORY QC RESULTS

QA/QC Report

Client:

IWM

Project:

ARCO Facility No. 2152

Sample Matrix: Water

Service Request: S941504

Date Collected: 11/22/94

Date Received: 11/22/94

Date Extracted: NA Date Analyzed: 12/5/94

Surrogate Recovery Summary BTEX and TPH as Gasoline EPA Methods 5030/8020/California DHS LUFT Method

Sample Name	Lab Code	Percent Recovery α, α, α -Trifluorotoluene
MW-1 (49.8)	\$941504-001	95
MW-2 (49.5)	S941504-002	95
MW-3 (51)	S941504-003	91
MW-4 (48.1)	\$941504-004	93
MS	S941530-003MS	96
DMS	S941530-003DMS	97
Method Blank	S941205-WB	92

CAS Acceptance Limits: 69-116

SUR 1/062994

Page 5 of 8

QA/QC Report

Client:

IWM

Project:

ARCO Facility No. 2152

Service Request: S941504

Date Analyzed: 12/5/94

Initial Calibration Verification (ICV) Summary BTEX and TPH as Gasoline EPA Methods 5030/8020/California DHS LUFT Method Units: ppb

Analyte	True Value	Result	Percent Recovery	CAS Percent Recovery Acceptance Limits
Benzene	. 25	27.0	108	85-115
Toluene	25	26.2	105	85 -1 15
Ethylbenzene	25	26.5	106	85-115
Xylenes, Total	75	77.1	103	85-115
Gasoline	250	252	101	90-110

Approved By: ICV25AL/060194

Kom AMengley

Date: Accomber 7, 1994

Page 6 of 8

QA/QC Report

Client:

IWM

Project:

ARCO Facility No. 2152

Sample Matrix:

Water

Service Request: S941504

Date Collected: 11/22/94

Date Received: 11/22/94

Date Extracted: NA
Date Analyzed: 12/5/94

Matrix Spike/Duplicate Matrix Spike Summary

BTE

EPA Methods 5030/8020 Units: ug/L (ppb)

Sample Name:

Batch QC

Lab Code:

S941530-003

Percent Recovery

						1 61 6				
								CAS	Relative	
	Spike	Spike Level			Result			Acceptance	Percent	
Analyte	MS	DMS	Result	MS	DMS	MS	DMS	Limits	Difference	
Benzene	25	25	ND	26.0	27.3	104	109	75-135	5	
Toluene	25	25	ND	24.8	26.4	99	106	73-136	6	
Ethylbenzene	25	25	ND -	25.9	26.9	104	108	69-142	4	

Approved By:

DMS1S/060194

Date:

Page 7 of 8

APPENDIX B

CHAIN OF CUSTODY

ARCO								Task O	order No.	工	-w	~)- (94	- Ę	<u>50</u>	<u></u>					. (Chain of Custo	dy
ARCO Facil		A21	52	Ci ^r	ty acility) (CAST	Just	Jallen	٦ ٦	Project (Consu	t manag iltant)	ger	Or	Υ	De	28	,0m		***				Laboratoryname	•
ARCO engir	neer (4.2	u).				Telepho (ARCO)	one no.) 415571	2434	Telepho (Consu	one no.	102	194	2-8	955	Fa:	x no.	nt) \checkmark	08/	942	149	19	Contract number	<u>~a</u>
Consultant i	name.		Jn	$\overline{\cap}$				Address (Consulta		50 /	An	w	as	٠. ر		$\overline{\gamma}_{\!$	بلاز	ნ	CA	、५∈	5031	5	Contract number	
ĺ				Matrix		Prese	ervation					1							0002/0				Method of shipment	
Sample I.D.	Lab no.	Container no.	Soil	Water	Other	Ice	Acid	ルンユタダ Sampling date	Sampling time	BTEX 602/EPA 8020	BTEX/TPH EPA M602/8020/8015	TPH Modified 8015 Gas M. Diesel	Oil and Grease 413.1 🗀 413.2 🗀	TPH EPA 418.1/SM503E	EPA 601/8010	EPA 624/8240	EPA 625/8270	TCLP Semi Metals □ VOA □ VOA □	CAM Metals EPA 601	Lead Org./DHS ☐ Lead EPA 7420/7421 ☐			Method of shipment SAUPLE deliver Special detection	-
FB - 1	5	2		/			/	1/28-94	1130		<i>V</i> .	1				L							Limit/reporting	
mw-1	1	2		1	_	<u> </u>	/		1302		1	1												
MW-2	2	2	<u> </u>	/	<u> </u>	V	/		1228		<u></u>	/												
MW-3	3	2	<u> </u>	1	<u> </u>	_/	/		1236		1	1										 	Special QA/QC	
MW-4	4	2	<u> </u>	V	<u> </u>	1	/	88	1312		/	J												
												,											Remark#	
		ļ			<u> </u>		<u> </u>				ļ						İ						Hold	
		<u> </u>	ļ	<u> </u>	<u> </u>	<u> </u>																ļ	On '	
		ļ			<u> </u>	ļ		<u></u>		ļ!													1-13-1	
		<u> </u> '		<u> </u>	<u> </u>	<u> </u>	ļ.,		ļ	ļ														
		<u> </u>	ļ	<u> </u>				<u> </u>		<u> </u>				<u> </u>										
 	ļ	<u> </u>	\			<u> </u>																	I sh number	
		<u> </u>			<u> </u>	ļ	<u> </u>		ļ	<u> </u>			, I										Lab number 594/50 C	1
		ļ ,	ļ'																				Turnaround time	
			<u> </u>		ļļ			<u> </u>														•	Priority Rush 1 Business Day	
Condition of		,			Ofar	~/	<u></u>		700	<u> </u>	erature	receive	id:	<u> </u>	100								Rush	
Relinquished	yoy/sam		Jalo	July	;	1	11/22	194	19308	Receiv	W.	Fac	D-	-1 .	CAS	Tr	T 1	1/2-1	2/9	4 1	45	00	2 Business Days	
Relinquished	by						Date	1	Time	Receiv	/ed by		0	<i>f</i>	,	100		<i></i>					Expedited 5 Business Days	
Relinquished by				Date Time			Received by laboratory					D	Date Time						Standard 10 Business Days	JEI				

ATTACHMENT B GROUNDWATER SAMPLING PROCEDURES

FIELD PROCEDURES: GROUNDWATER SAMPLING

PRELIMINARY: SITE SAFETY

IWM SAFETY PRACTICES APPLY AT ALL TIMES! OBSERVE ALL STANDARD PROCEDURES WITH SPECIAL ATTENTION TO THESE HAZARDS:

- Vehicular traffic: Insure visibility of yourself and your equipment
- Pedestrian activity: Anticipate and prevent tripping hazards

A. WATER-LEVEL MEASUREMENTS

GENERAL

- 1. Water-level measurements must be taken before disturbing the water in the well in any way. The water in the well should be in an undisturbed state for a minimum of 24 hours before performing this task.
- 2. To insure consistency in date from event-to-event, the measurement must be taken from the same point on the well top casing. As a general rule, take the measurement from the highest point of the casing. Typically, there is a notch in the casing for this purpose. If no such mark is visible, place one at the highest point of the casing, take measurements from that point, and make a note of this in the field notes.
- 3. Always work from the cleanest wells (based on past data) to the dirtiest.
- 4. Keep your equipment CLEAN! Between wells clean the probes, lines and associated attachments with a clean cloth soaked in water containing Alconox (or like cleaning agent). Thoroughly rinse in tap water in a 5 gallon bucket. After each rinsing, empty the bucket into a 55 gallon drum or other purge water containment vessel.
- 5. Take measurements to the nearest .01 foot.

PROCEDURE (NO FREE PRODUCT ANTICIPATED)

- 1. Inspect the wellhead for the following: damage of any kind, indications of possible leakage into the well at the wellhead, damaged or missing locks, etc. Remove any standing water in or around the well head. Note all irregularities.
- 2. Lower the (CLEAN!) water-level indicator slowly down the well until the indicator sounds.
- 3. Continue lowering the indicator about 2 inches more before very slowly raising the indicator until the sound stops.
- 4. Take the measurement at the casing.
- 5. Repeat this procedure. If the next reading is within .01 foot of the first, then record the first measurement. If not, repeat this procedure until two consecutive measurements are within .01 foot.
- 6. Remove and CLEAN the equipment (probe <u>and</u> tape) before proceding to the next well.

PROCEDURE (FREE PRODUCT ANTICIPATED)

- 1. Inspect the wellhead for the following: damage of any kind, indications of possible leakage into the well at the wellhead, damaged or missing locks, etc. Remove any standing water in or around the well head. Note all irregularities.
- 2. Lower the (CLEAN!) oil-water interface probe slowly down the well until the indicator sounds. The presence of product is indicated by a steady sound; its absence by a broken sound. (If there is no evidence of product, follow procedure for water-level measurements where no product is anticipated.)
- 3. If the presence of product is indicated, lower the probe very slowly until the signal changes to broken pattern.
- 4. Continue lowering the indicator about 2 inches more before very slowly raising the indicator until the sound becomes steady; note this measurement at the casing as the depth to water. Continue raising the probe until the sound stops; note this measurement at the casing as the depth to product.
- 5. Repeat this procedure. If the next readings are within .01 foot of the first set, then record the first measurements. If not, repeat this entire procedure until two consecutive measurements sets are within .01 foot.
- 6. Remove and CLEAN the equipment before using in another well.

B. SUBJECTIVE ANALYSIS

GENERAL

- 1. Always work from the cleanest wells (based on past data) to the dirtiest.
- 2. Follow this procedure for cleaning the bailer between wells:
- a. Fill and empty the bailer once using tap water.
- b. Refill bailer approximately two-thirds full with a mixture of water and Alconox (or like cleaning agent).
- c. Clean bailer inside and out with a bottle brush.
- d. Empty the bailer then repeat this process at least three times.
- e. After each cleaning, empty the cleaning liquids into a 55 gallon drum or other purge water containment vessel.
- 3. Clean the lines (or wire) and associated attachments with a clean cloth soaked in water containing Alconox (or like cleaning agent). Thoroughly rinse in tap water in a 5 gallon bucket. After each rinsing, empty the bucket into a 55 gallon drum or other purge water containment vessel.

PROCEDURE

- 1. Gently lower the (CLEAN) bailer into the well until it reaches the water surface.
- 2. Lower the bailer further about half its length.
- 3. Remove the bailer and examine the water therein for the following:
- a. Presence of Free Product: Note and record thickness to the nearest eighth of an inch.
- b. Sheen: Note visual indications of sheen as follows: "Heavy", "Moderate" or "Llight".
- c. Emulsion: Record presence of emulsion as "Heavy", "Moderate", or "Light".
- d. Color: Record if floating product is present.

C. WELL PURGING: GENERAL

GENERAL

- 1. To minimize any risk of cross contamination, whenever possible use surface pumps and disposable tubing.
- 2. If another alternative is used for purging (bailers, submersible pumps, bladder pumps, etc.), follow cleaning procedures outlined for bailers and equipment above.

PROCEDURE

- 1. Determine the volume of water in the well.
- 2. If the well recharges, remove three well volumes. If the well doesn't recharge, or does so slowly, continue purging until the recharge water stabilizes with regard to pH, temperature and conductivity, or until the well is empty.
- 3. Contain purged water in labeled 55 gallon drums or other provided containment.

D. WATER SAMPLE COLLECTION

GENERAL

- 1. In general, use disposable bailers for all sampling.
- 2. If a teflon bailer is reused, follow this procedure for cleaning the bailer between wells:
- a. Fill and empty the bailer once using tap water.
- b. Refill bailer approximately two-thirds full with a mixture of water and Alconox (or like cleaning agent).
- c. Clean bailer inside and out with a bottle brush.
- d. Empty the bailer then repeat this process at least three times.
- e. After each cleaning, empty the cleaning liquids into a 55 gallon drum or other purge water containment vessel.
- 3. Clean the lines (or wire) and associated attachments with a clean cloth soaked in water containing Alconox (or like cleaning agent). Thoroughly rinse in tap water in a 5 gallon bucket. After each rinsing, empty the bucket into a 55 gallon drum or other purge water containment vessel.
- 4. Always work from the cleanest wells (based on past data) to the dirtiest.
- 5. Always keep your samples chilled.

PROCEDURE

- 1. If well recharges, sample may be obtained immediately after purging. If during the course of the sampling day a well does not recharge sufficiently to half fill the bailer, return the next morning to take the sample.
- 2. Review the sampling list to determine which analysis(es) is(are) required for each well during this sampling event. Note any special handling requirements (addition of preservatives, etc.). Complete the sample labels with the following: sample ID number, project ID number and date. Attach the labels to the sample

containers. Always prepare duplicate samples for analysis and indicate the number of containers on the Chain of Custody. Also, label two sample containers with the project ID number, date and the words "Field Blank"; fill these two containers with distilled water and place in the holders provided for transport (see 5. below).

- 3. Lower a new disposable bailer into the well and take a sample from below the water's surface. Minimize agitation while removing the bailer.
- 4. Using the valve at the bottom of the bailer, fill the sample vial very slowly to minimize agitation of the liquid. Cap the vial tightly, then tap it and invert it to check for any air. Top off the vial if there is any air present.
- 5. Place all sample vials in the holders provided for transport. Place holders inside a cooler containing enough ice to keep the sample temperature below 4 degrees Centigrade. However, do not permit the samples to freeze.
- 6. After sampling is complete, lock cooler if possible; if not, seal with tape and sign across tape so that any tampering will be evident.
- 7. Enter the information concerning the collected samples on the field notes and on the Chain of Custody.
- 8. Before resealing each wellhead, replace any lock or cap, as required.

E. CHAIN OF CUSTODY PROCEDURE

GENERAL

- 1. Only list on the Chain of Custody those samples that will go to the lab; samples to be held for possible future analysis should only be noted on the field notes.
- 2. Fill out the Chain of Custody in ink.

PROCEDURE

- 1. Fill out as much of the form as possible before beginning work on the site.
- 2. Provide the following:
- a. Your name, signature and phone number.
- b. The Project Manager's name and phone number.
- c. The laboratory.
- d. The turnaround time.

- 3. For each sample, provide the sample ID number, site ID, sample date and analysis(es) requested.
- 4. After the samples are taken, note the sample condition.
- 5. The completed Chain of Custody must accompany the shipping container to the laboratory; keep a copy for the Project Manager.
- 6. Each time the samples change custody the date and time are directely noted on the Chain of Custody which is signed by both the transferor and the transferee.
- 7. The laboratory will make the final entry upon receipt of the samples. Sample condition will be noted on the Chain of Custody. The original Chain of Custody will be returned with the sample results and a copy will be kept by the laboratory.