

# Fax Transmittal

**Mountain View Office**  
405 Clyde Avenue  
Mountain View, CA 94043  
Tel: 650.967.2365  
Fax: 650.967.2785

**Oakland Office**  
129 Filbert Street  
Oakland, CA 94607  
Tel: 510.267.1970  
Fax: 510.267.1972

**Pasadena Office**  
1785 Locust Street, Suite 10  
Pasadena, CA 91106  
Tel: 626.396.1490  
Fax: 626.396.1491

**Pleasanton Office**  
2150 Rheem Drive, Suite E  
Pleasanton, CA 94588  
Tel: 925.510.462.7808  
Fax: 925.510.462.8346

**To:** Mr. Amir Jholami  
**Fax:** 510-337-9335

**From:** Stason Foster  
**Date:** December 29, 1998  
**Pages:** 4 (Including Cover)  
**Project:** 701 Fremont, San Leandro  
**Job #:**

**CC:**

Please notify us if you received this fax in error by calling the office indicated above.

Please call if you need any additional information.

Sincerely,



Stason I. Foster, P.E.

Mail copy to follow:  Yes  No

Time Sent: \_\_\_\_\_

Sent By: \_\_\_\_\_

May 2, 1997  
1063-1B

Mr. Rich Gilardi  
GARDNER ASSOCIATES  
20815 Cambridge Avenue  
Hayward, California 94541

RE: **WELL DESTRUCTION DETAILS**  
**701 FREMONT AVENUE**  
**SAN LEANDRO, CALIFORNIA**

Dear Mr. Gilardi:

As requested, we have completed the destruction of the three on-site monitoring wells at 701 Fremont Avenue in San Leandro, California. This work was performed in accordance with our agreement with you dated April 17, 1997.

Under the conditions of the Zone 7 Water Agency, the three approximately 25-foot deep, 2-inch diameter monitoring wells (MW-1, MW-2, and MW-3) were destroyed on May 1, 1997. Each of the wells was pressure grouted by the licensed C57 driller Exploration Geoservices, Incorporated. A copy of the well destruction permit is attached to this letter.

This report was prepared for the use of Gardner Associates. We make no warranty, expressed or implied, except that our services have been performed in accordance with environmental principles generally accepted at this time and location. If you have any questions, please call and we would be glad to discuss them with you.

Very truly yours,

**LOWNEY ASSOCIATES**

*S Foster*

Stason I. Foster, P.E.  
Associate  
Environmental Engineer



SIF:PJR:tc  
11.

Copies: Addressee (3)

Attachment: Permit Application

APR-30-87 WED 16:25

415 967 2785

P. 01

Apr-23-97 01:58P Lawney Associates



# ZONE 7 WATER AGENCY

5997 PARKSIDE DRIVE

PLEASANTON, CALIFORNIA 94588

VOICE (510) 484-2600

FAX (510) 462-3914

## DRILLING PERMIT APPLICATION

FOR APPLICANT TO COMPLETE

FOR OFFICE USE

LOCATION OF PROJECT 701 Fremont Blvd. AVE.  
San Leandro, CA  
(Permit # 94512)

PERMIT NUMBER 97265  
LOCATION NUMBER 3S/3W 1C80 to 1C82

CLIENT  
Name S & S Building Supply  
Address 701 Fremont Blvd. Voice 510-351-7020  
City San Leandro, CA Zip 94527

PERMIT CONDITIONS  
Circled Permit Requirements Apply

APPLICANT  
Name Lawney Associates  
PAUL REGINATO Fax 415-967-2785  
Address 405 Clyde Avenue Voice 415-967-2365  
City Mountain View, CA Zip 94043

TYPE OF PROJECT  
Well Construction  Geotechnical Investigation   
Cathodic Protection  General   
Water Supply  Contamination   
Monitoring  Well Destruction

PROPOSED WATER SUPPLY WELL USE  
Domestic  Industrial  Other   
Municipal  Irrigation

DRILLING METHOD:  
Mud Rotary  Air Rotary  Auger   
Cable  Other Pressure Grout

DRILLER'S LICENSE NO. C-57 484288

WELL PROJECTS  
Drill Hole Diameter  in. Maximum Depth 25 ft.  
Casing Diameter  in. Number 3  
Surface Seal Depth  ft.

GEOTECHNICAL PROJECTS  
Number of Borings  Maximum Depth  ft.  
Hole Diameter  in.


ESTIMATED STARTING DATE 5/6/97  
ESTIMATED COMPLETION DATE 5/6/97

I hereby agree to comply with all requirements of this permit and Alameda County Ordinance No. 73-68.

APPLICANT'S SIGNATURE RR. Mc Date 4/23/97

- A. GENERAL
  1. A permit application should be submitted so as to arrive at the Zone 7 office five days prior to proposed starting date.
  2. Submit to Zone 7 within 60 days after completion of permitted work the original Department of Water Resources Water Well Drillers Report or equivalent for well Projects, or drilling logs and location sketch for geotechnical projects.
  3. Permit is void if project not begun within 90 days of approval date.
- B. WATER WELLS, INCLUDING PIEZOMETERS
  1. Minimum surface seal thickness is two inches of cement grout placed by tremie.
  2. Minimum seal depth is 50 feet for municipal and industrial wells or 20 feet for domestic and irrigation wells unless a lesser depth is specially approved. Minimum seal depth for monitoring wells is the maximum depth practicable or 20 feet.
- C. GEOTECHNICAL. Backfill bore hole with compacted cuttings or heavy bentonite and upper two feet with compacted material. In areas of known or suspected contamination, tremied cement grout shall be used in place of compacted cuttings.
- D. CATHODIC. Fill hole above anode zone with concrete placed by tremie.
- E. WELL DESTRUCTION. See attached.

Approved Wyman Hong Date 29 Apr 97  
Wyman Hong

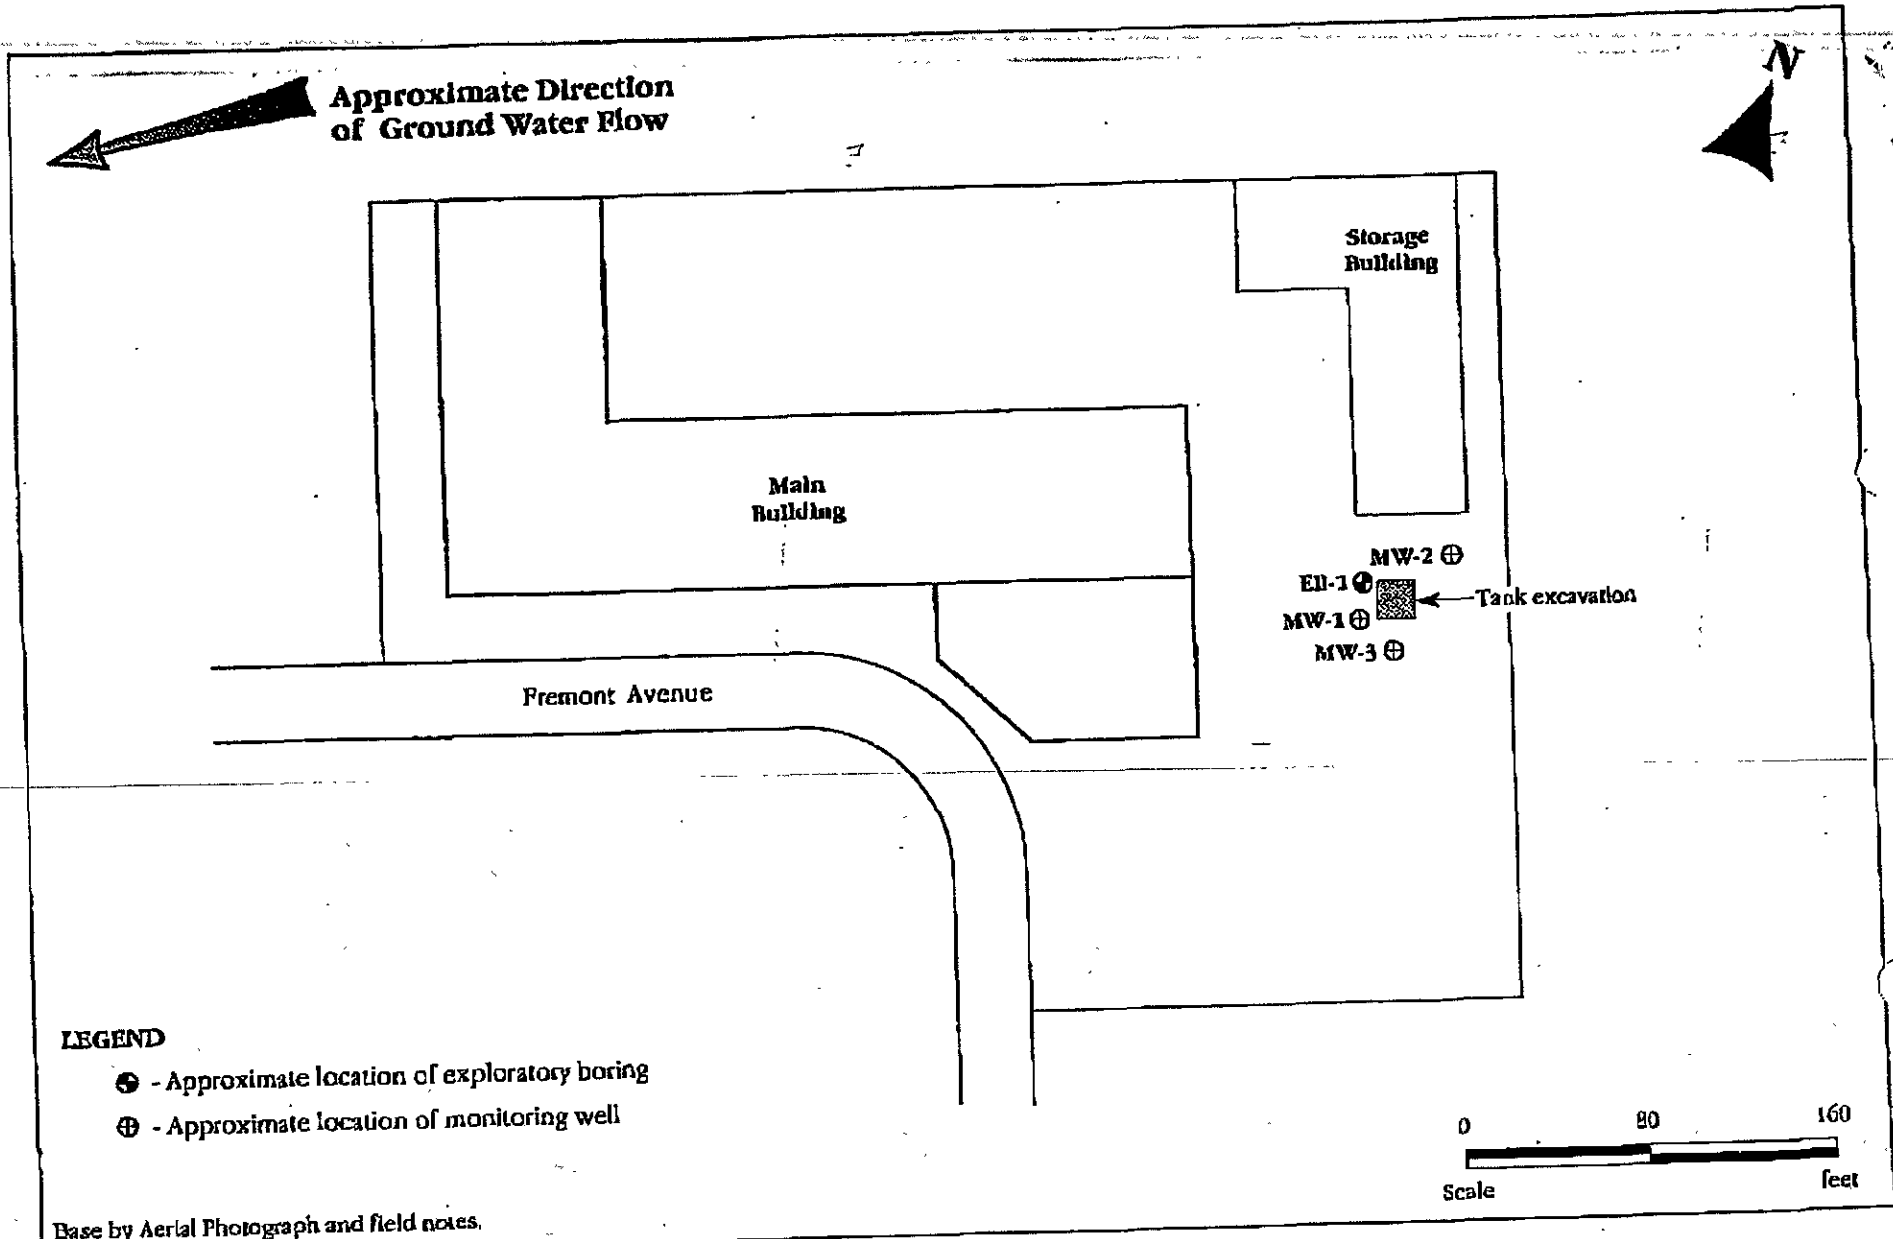

Base by Aerial Photograph and field notes.

1063-1, 11/90 BAF'EB

**SITE PLAN**  
**S & S BUILDING SUPPLY**  
 San Leandro, California

**LOVNEY ASSOCIATES**  
 Environmental/Geotechnical/Engineering Services

**FIGURE 2**  
 1063-1, December 1994