



**RECEIVED**

2:36 pm, Jun 26, 2008

Alameda County  
Environmental Health

**Denis L. Brown**

Jerry Wickham  
Alameda County Health Care Services Agency  
1131 Harbor Bay Parkway, Suite 250  
Alameda, California 94502-6577

**Shell Oil Products US**

HSE – Environmental Services  
20945 S. Wilmington Ave.  
Carson, CA 90810-1039  
Tel (707) 865 0251  
Fax (707) 865 2542  
Email [denis.l.brown@shell.com](mailto:denis.l.brown@shell.com)

Re: Shell-branded Service Station  
999 San Pablo Avenue  
Albany, California  
SAP Code 135037  
Incident No. 98995143  
ACHCSA Case No. RO0000121

Dear Mr. Wickham:

The attached document is provided for your review and comment. Upon information and belief, I declare, under penalty of perjury, that the information contained in the attached document is true and correct.

If you have any questions or concerns, please call me at (707) 865-0251.

Sincerely,

A handwritten signature in black ink that reads "Denis L. Brown". The signature is fluid and cursive, with a long horizontal stroke at the end.

Denis L. Brown  
Project Manager



**CONESTOGA-ROVERS  
& ASSOCIATES**

19449 Riverside Drive, Suite 230, Sonoma, California 95476  
Telephone: 707-935-4850 Facsimile: 707-935-6649  
www.CRAworld.com

June 26, 2008

Mr. Jerry Wickham  
Alameda County Health Care Services Agency  
1131 Harbor Bay Parkway, Suite 250  
Alameda, California 94502-6577

Re: **Groundwater Monitoring Report – Second Quarter 2008**  
Shell-branded Service Station  
999 San Pablo Avenue  
Albany, California  
SAP Code 135037  
Incident No. 98995143  
ACHCSA Case No. RO0000121

Dear Mr. Wickham:

Conestoga-Rovers & Associates (CRA) prepared this report on behalf of Equilon Enterprises LLC dba Shell Oil Products US (Shell) in accordance with the quarterly reporting requirements of 23 CCR 2652d.


If you have any questions regarding the contents of this document, please call Dennis Baertschi at (707) 268-3813.

Sincerely,

**Conestoga-Rovers & Associates**

Dennis Baertschi  
Project Manager

Ana Friel, PG



cc: Mr. Denis Brown, Shell  
Mr. Gregg Biggs, Site owner

Equal  
Employment  
Opportunity Employer



**CONESTOGA-ROVERS  
& ASSOCIATES**

Mr. Jerry Wickham  
June 26, 2008

## **GROUNDWATER MONITORING REPORT – SECOND QUARTER 2008**

<b>Site Address</b>	<u>999 San Pablo Ave., Albany</u>
<b>Site Use</b>	<u>Shell-branded Service Station</u>
<b>Shell Project Manager</b>	<u>Denis Brown</u>
<b>Consultant and Contact Person</b>	<u>CRA, Dennis Baertschi</u>
<b>Lead Agency and Contact</b>	<u>ACHCSA, Jerry Wickham</u>
<b>Agency Case No.</b>	<u>RO0000121</u>
<b>Shell SAP Code</b>	<u>135037</u>
<b>Shell Incident No.</b>	<u>98995143</u>
<b>Date of Most Recent Agency Correspondence</b>	<u>June 28, 2001</u>

### **Current Quarter's Activities**

1. Blaine Tech Services, Inc. (Blaine) gauged and sampled wells according to the established monitoring program for this site.
2. CRA prepared a vicinity map (Figure 1) and a groundwater contour and chemical concentration map (Figure 2). The Blaine report, presenting the analytical data, is included in Attachment A.
3. Groundwater sampling was coordinated this quarter with sampling at the adjacent ARCO Station located at 1001 San Pablo Avenue. The report for the ARCO site, presenting the groundwater monitoring results, is included in Attachment B.

### **Current Quarter's Findings**

<b>Groundwater Flow Direction</b>	<u>Southwesterly</u>
<b>Hydraulic Gradient</b>	<u>0.06</u>
<b>Depth to Water</b>	<u>6.30 to 10.50 feet below top of well casing</u>

### **Proposed Activities for Next Quarter**

1. Blaine will gauge and sample wells during the second month of the quarter, according to the established monitoring program for this site, and CRA will prepare a report.



**CONESTOGA-ROVERS  
& ASSOCIATES**

Mr. Jerry Wickham  
June 26, 2008

Figures:           1 - Vicinity Map  
                      2 - Groundwater Contour and Chemical Concentration Map

Attachments:    A - Blaine Tech Services, Inc. - Groundwater Monitoring Report  
                      B - Groundwater Monitoring Results - ARCO

CRA prepared this document for use by our client and appropriate regulatory agencies. It is based partially on information available to CRA from outside sources and/or in the public domain, and partially on information supplied by Cambria and its subcontractors. CRA makes no warranty or guarantee, expressed or implied, included or intended in this document, with respect to the accuracy of information obtained from these outside sources or the public domain, or any conclusions or recommendations based on information that was not independently verified by CRA. This document represents the best professional judgment of CRA. None of the work performed hereunder constitutes or shall be represented as a legal opinion of any kind or nature.

II:\Sonoma.Shell\Albany 999 San Pablo Ave\QMRs\2008\2Q08\CRA text 999 San Pablo 2Q08.doc



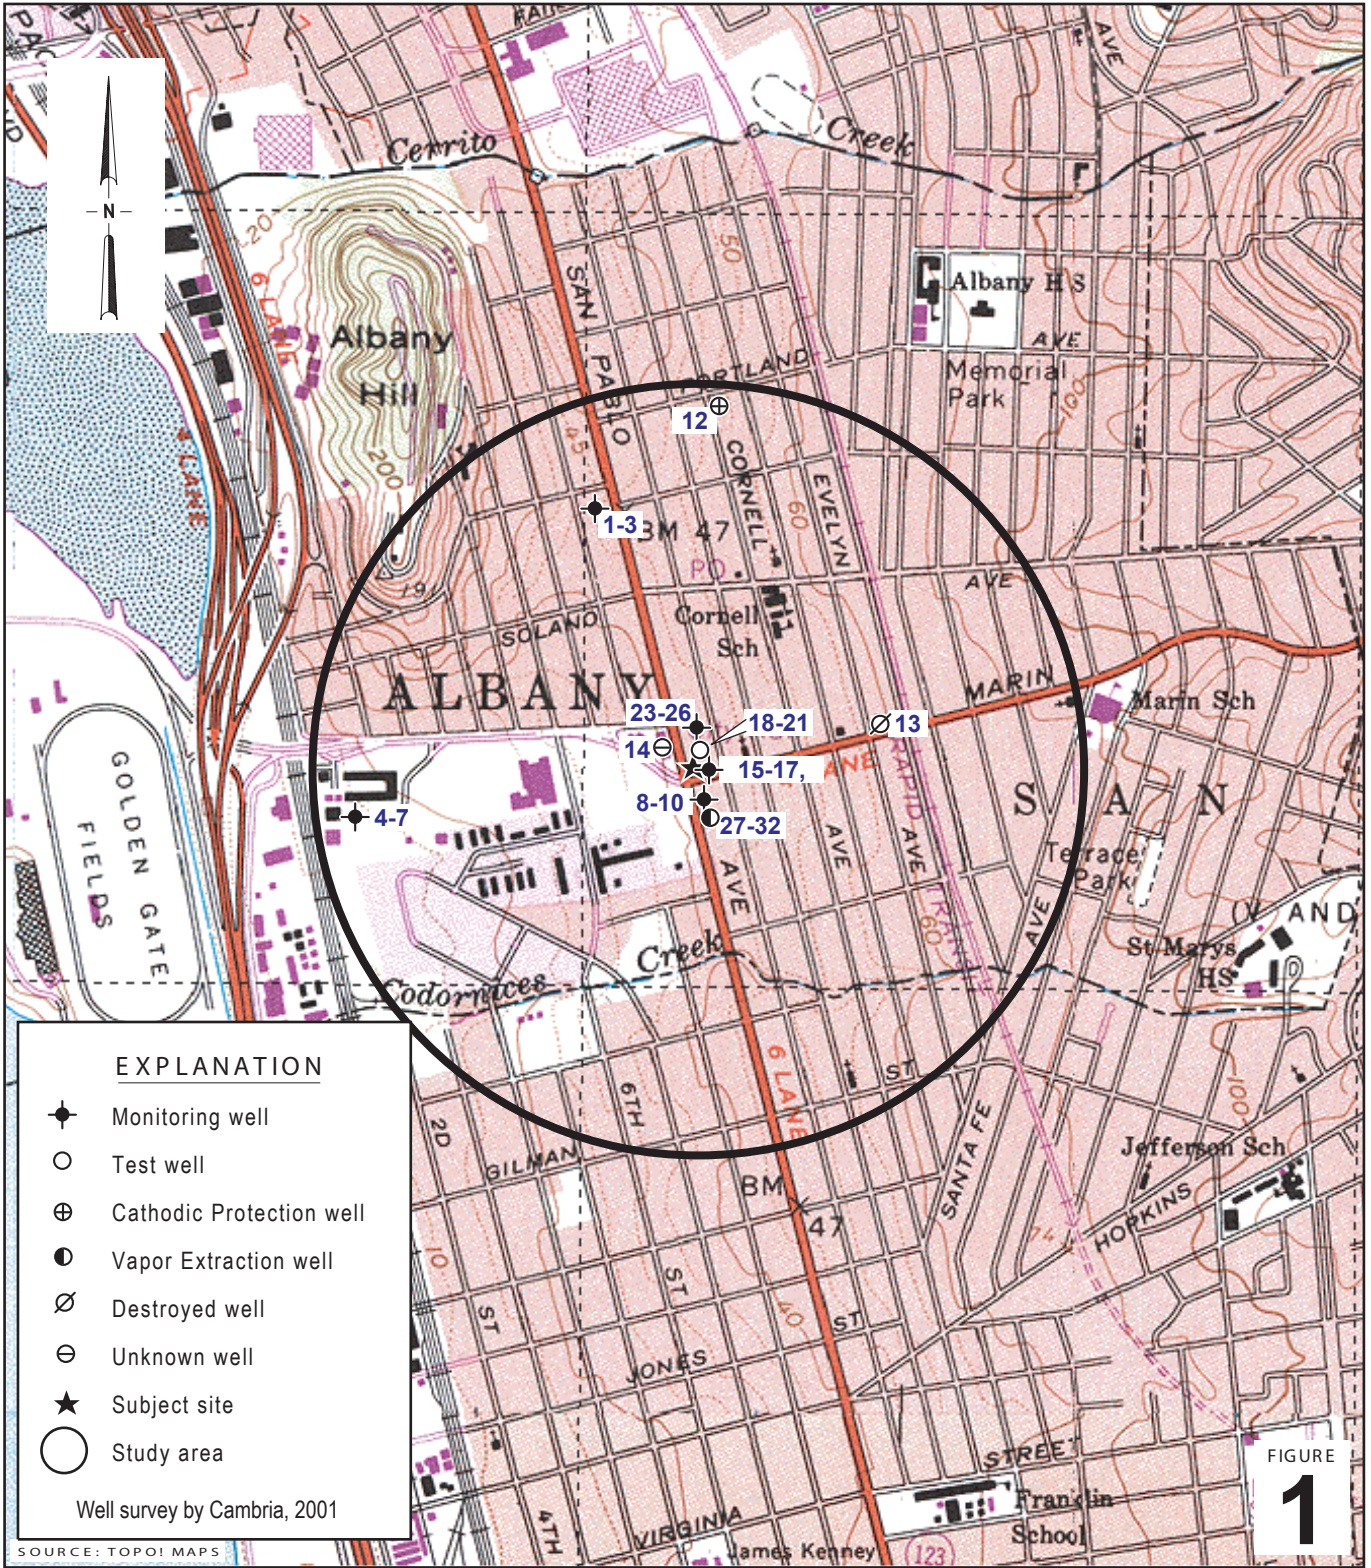


FIGURE 1


**Shell-branded Service Station**  
 999 San Pablo Avenue  
 Albany, California



**CONESTOGA-ROVERS  
 & ASSOCIATES**

**Vicinity Map**  
 (1/2-Mile Radius)



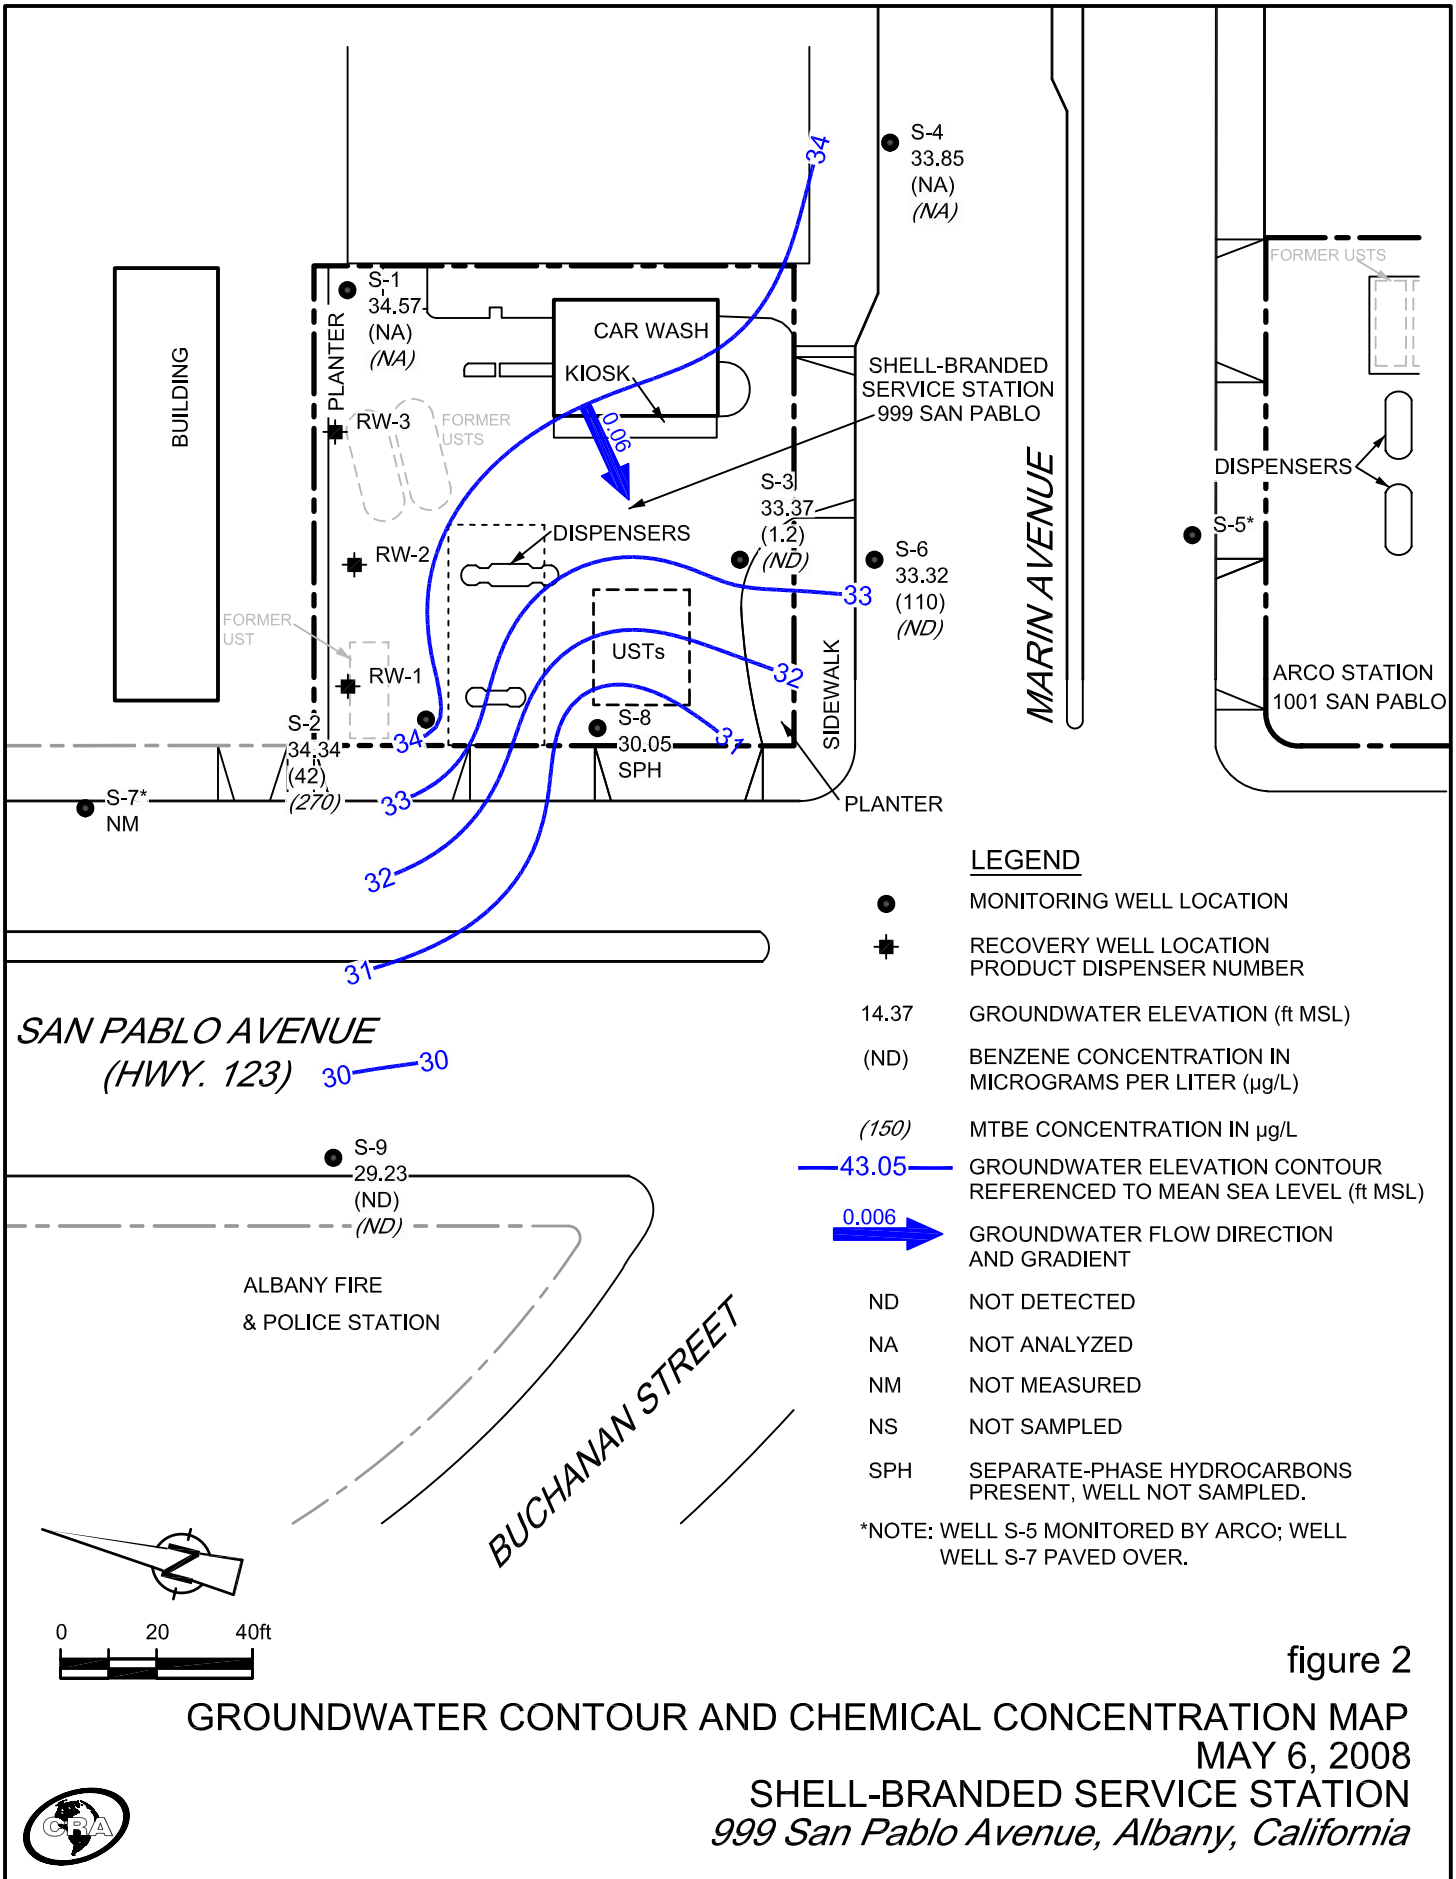

**Attachment A**

**Blaine Tech Services, Inc.  
Groundwater Monitoring Report**

---

# BLAINE

TECH SERVICES INC.

---

GROUNDWATER SAMPLING SPECIALISTS  
SINCE 1985

May 29, 2008

Denis Brown  
Shell Oil Products US  
20945 South Wilmington Avenue  
Carson, CA 90810

Second Quarter 2008 Groundwater Monitoring at  
Shell-branded Service Station  
999 San Pablo Avenue  
Albany, CA

Monitoring performed on March 20, April 30 and May 6,  
2008

---

## Groundwater Monitoring Report **080506-BD-1**

This report covers the routine monitoring of groundwater wells at this Shell-branded facility. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purgewater (if applicable) is, likewise, collected and transported to the Martinez Refining Company.

Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight-hour refresher courses.



Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. Our activities at this site consisted of objective data and sample collection only. No interpretation of analytical results, defining of hydrological conditions or formulation of recommendations was performed.

Please call if you have any questions.

Yours truly,

Mike Ninokata  
Project Manager

MN/jb

attachments: Cumulative Table of WELL CONCENTRATIONS  
Certified Analytical Report  
Field Data Sheets

cc: Dennis Baertschi  
Conestoga-Rovers & Associates  
19449 Riverside Dr., Suite 230  
Sonoma, CA 95476

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-1	05/13/1991	1,500	20	2.6	86	74	NA	NA	NA	NA	NA	NA	42.73	8.24	34.49	NA	NA
S-1	08/23/1991	2,900	27	<2.5	75	18	NA	NA	NA	NA	NA	NA	42.73	8.37	34.36	NA	NA
S-1	11/07/1991	2,900	8	2.5	46	26	NA	NA	NA	NA	NA	NA	42.73	8.30	34.43	NA	NA
S-1	01/28/1992	2,000	11	<2.5	60	20	NA	NA	NA	NA	NA	NA	42.73	7.84	34.89	NA	NA
S-1	05/06/1992	1,200	5.5	<2.5	80	36	NA	NA	NA	NA	NA	NA	42.73	7.95	34.78	NA	NA
S-1	08/26/1992	2,000	9.4	<2.5	130	<2.5	NA	NA	NA	NA	NA	NA	42.73	8.24	34.49	NA	NA
S-1	10/28/1992	1,300	27	3.2	72	13	NA	NA	NA	NA	NA	NA	42.73	8.52	34.21	NA	NA
S-1	01/19/1993	1,500	13	3	29	31	NA	NA	NA	NA	NA	NA	42.73	6.54	36.19	NA	NA
S-1	04/29/1993	2,000	15	<2.5	82	<65	NA	NA	NA	NA	NA	NA	42.73	7.93	34.80	NA	NA
S-1	07/22/1993	620	1.1	4.2	3.5	13	NA	NA	NA	NA	NA	NA	42.73	8.09	34.64	NA	NA
S-1	10/21/1993	1,200	34	25	15	9.5	NA	NA	NA	NA	NA	NA	42.73	9.43	33.30	NA	NA
S-1	01/04/1994	860	<2.5	<2.5	5.7	5.3	NA	NA	NA	NA	NA	NA	42.73	8.25	34.48	NA	NA
S-1	04/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.02	34.71	NA	NA
S-1	07/25/1994	1,200	8.3	7.4	15	20	NA	NA	NA	NA	NA	NA	42.73	8.22	34.51	NA	NA
S-1	10/10/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.29	34.44	NA	NA
S-1	01/26/1995	1,000	12	0.6	12	420	NA	NA	NA	NA	NA	NA	42.73	6.88	35.85	NA	NA
S-1	04/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.65	35.08	NA	NA
S-1	07/28/1995	660	7.2	1	11	8.9	NA	NA	NA	NA	NA	NA	42.73	7.90	34.83	NA	4
S-1	10/31/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.72	35.01	NA	NA
S-1	01/10/1996	1,100	3.5	7	5.1	9.4	NA	NA	NA	NA	NA	NA	42.73	8.24	34.49	NA	7.4
S-1	04/25/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.74	34.99	NA	NA
S-1	07/23/1996	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	42.73	7.92	34.81	NA	2.7
S-1	12/10/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.56	35.17	NA	0.6
S-1	02/20/1997	<50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	42.73	7.95	34.78	NA	3
S-1	05/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.11	34.62	NA	0.5
S-1	08/22/1997	810	18	<2.0	5.1	4.4	18	NA	NA	NA	NA	NA	42.73	7.86	34.87	NA	3
S-1	11/03/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.35	34.38	NA	1.1
S-1	02/20/1998	<50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	42.73	6.09	36.64	NA	2.9

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-1	05/18/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.69	35.04	NA	1.1
S-1	08/20/1998	390	6.7	<0.50	0.64	<0.50	14	NA	NA	NA	NA	NA	42.73	8.20	34.53	NA	1.9
S-1	11/06/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.23	34.50	NA	NA
S-1	02/16/1999	<50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	42.73	7.47	35.26	NA	1.5
S-1	05/28/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.60	35.13	NA	1.3
S-1	08/24/1999	72.4	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	42.73	7.95	34.78	NA	1.4
S-1	11/16/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.87	34.86	NA	1.3
S-1	02/02/2000	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	42.73	7.26	35.47	NA	1.4
S-1	05/09/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.13	34.60	NA	1.0
S-1	08/03/2000	209	6.42	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	42.73	8.12	34.61	NA	1.4
S-1	11/15/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.06	34.67	NA	1.0
S-1	02/14/2001	179	4.46	<0.500	<0.500	<0.500	8.72	NA	NA	NA	NA	NA	42.73	8.08	34.65	NA	1.1
S-1	05/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.05	34.68	NA	1.0
S-1	08/15/2001	270	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	42.73	8.40	34.33	NA	1.3
S-1	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	7.42	35.31	NA	0.4
S-1	02/06/2002	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	42.73	7.60	35.13	NA	2.2
S-1	06/04/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.73	8.16	34.57	NA	0.8
S-1	07/25/2002	230	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	42.57	7.84	34.73	NA	0.9
S-1	11/27/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	8.01	34.56	NA	0.6
S-1	01/30/2003	310	<0.50	<0.50	3.6	1.6	NA	<5.0	NA	NA	NA	NA	42.57	7.56	35.01	NA	1.5
S-1	06/03/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	7.87	34.70	NA	1.6
S-1	08/08/2003	730	<0.50	<0.50	12	6.4	NA	<0.50	NA	NA	NA	NA	42.57	7.95	34.62	NA	1.3
S-1	11/13/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	7.90	34.67	NA	0.8
S-1	02/04/2004	220	<0.50	<0.50	1.8	1.1	NA	<0.50	NA	NA	NA	NA	42.57	7.37	35.20	NA	1.2
S-1	05/12/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	8.05	34.52	NA	1.1
S-1	08/23/2004	110 g	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	42.57	8.10	34.47	NA	0.6
S-1	12/01/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	7.84	34.73	NA	NA
S-1	02/07/2005	53 h	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	42.57	7.48	35.09	NA	0.49

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

S-1	05/02/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	8.05	34.52	NA	NA
S-1	08/04/2005	850	<0.50	<0.50	4.5	1.0	NA	<0.50	NA	NA	NA	NA	42.57	8.05	34.52	NA	0.01
S-1	11/16/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	8.19	34.38	NA	NA
S-1	03/02/2006	170	<0.50	<0.50	2.4	0.91	NA	<0.50	NA	NA	NA	NA	42.57	7.58	34.99	NA	0.32
S-1	05/31/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	8.03	34.54	NA	NA
S-1	08/29/2006	<50.0	<0.500	<0.500	<0.500	<0.500	NA	<0.500	NA	NA	NA	NA	42.57	7.99	34.58	NA	1.05
S-1	12/06/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	8.07	34.50	NA	0.4
S-1	01/30/2007	640	<0.50	<0.50	1.9	<1.0	NA	<0.50	NA	NA	NA	NA	42.57	8.32	34.25	NA	1.20
S-1	05/15/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	7.85	34.72	NA	0.16
S-1	08/29/2007	980 j	0.37 l	<1.0	3.3	<1.0	NA	<1.0	<2.0	<2.0	<2.0	<10	42.57	7.87	34.70	NA	2.54
S-1	11/29/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	42.57	8.18	34.39	NA	0.28
S-1	02/21/2008	430 j	<0.50	<1.0	<1.0	<1.0	NA	<1.0	NA	NA	NA	NA	42.57	7.94	34.63	NA	0.27
<b>S-1</b>	<b>05/06/2008</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>42.57</b>	<b>8.00</b>	<b>34.57</b>	<b>NA</b>	<b>0.1</b>

S-2	05/13/1991	23,000	3,900	230	1,100	3,200	NA	NA	NA	NA	NA	NA	40.73	8.50	32.23	NA	NA
S-2	08/23/1991	23,000	4,400	260	1,900	2,400	NA	NA	NA	NA	NA	NA	40.73	8.80	31.93	NA	NA
S-2	11/07/1991	40,000	4,000	160	1,020	3,400	NA	NA	NA	NA	NA	NA	40.73	8.61	32.12	NA	NA
S-2	01/28/1992	22,000	1,600	70	420	1,700	NA	NA	NA	NA	NA	NA	40.73	7.80	32.93	NA	NA
S-2	05/06/1992	20,000	2,600	110	860	1,900	NA	NA	NA	NA	NA	NA	40.73	8.10	32.63	NA	NA
S-2	08/26/1992	42,000	5,000	160	1,100	3,500	NA	NA	NA	NA	NA	NA	40.73	8.37	32.36	NA	NA
S-2	10/28/1992	34,000	4,800	330	1,600	2,900	NA	NA	NA	NA	NA	NA	40.73	8.64	32.09	NA	NA
S-2	01/19/1993	20,000	2,300	370	660	1,300	NA	NA	NA	NA	NA	NA	40.73	5.82	34.91	NA	NA
S-2	04/29/1993	40,000	2,000	67	900	1,900	NA	NA	NA	NA	NA	NA	40.73	7.70	33.03	NA	NA
S-2	07/22/1993	22,000	3,000	120	1,000	1,600	NA	NA	NA	NA	NA	NA	40.73	8.38	32.35	NA	NA
S-2 (D)	07/22/1993	17,000	3,000	110	1,000	1,500	NA	NA	NA	NA	NA	NA	40.73	8.38	32.35	NA	NA
S-2	10/21/1993	14,000	2,800	74	870	1,100	NA	NA	NA	NA	NA	NA	40.73	8.58	32.15	NA	NA
S-2 (D)	10/21/1993	13,000	3,200	53	960	820	NA	NA	NA	NA	NA	NA	40.73	8.58	32.15	NA	NA
S-2	01/04/1994	21,000	2,100	67	990	770	NA	NA	NA	NA	NA	NA	40.73	7.70	33.03	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-2 (D)	01/04/1994	22,000	2,000	64	910	750	NA	NA	NA	NA	NA	NA	40.73	7.70	33.03	NA	NA
S-2	04/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.62	33.11	NA	NA
S-2	07/25/1994	43,000	2,600	490	990	1,300	NA	NA	NA	NA	NA	NA	40.73	7.86	32.87	NA	NA
S-2	10/10/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	8.12	32.61	NA	NA
S-2	01/26/1995	21,000	790	12	290	570	NA	NA	NA	NA	NA	NA	40.73	6.38	34.35	NA	5.5
S-2	04/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.01	33.72	NA	NA
S-2	07/28/1995	14,000	2,400	360	960	370	NA	NA	NA	NA	NA	NA	40.73	7.82	32.91	NA	4
S-2	10/31/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.57	33.16	NA	NA
S-2	01/10/1996	17,000	1,400	<50	480	170	NA	NA	NA	NA	NA	NA	40.73	8.13	32.60	NA	7.2
S-2	04/25/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.72	33.01	NA	NA
S-2	07/23/1996	16,000	2,700	69	1,100	110	9,500	NA	NA	NA	NA	NA	40.73	8.10	32.63	NA	2.2
S-2 (D)	07/23/1996	11,000	2,600	68	1,000	96	10,000	11,000	NA	NA	NA	NA	40.73	8.10	32.63	NA	2.2
S-2	12/10/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	8.57	32.16	NA	0.5
S-2	02/20/1997	10,000	500	<10	90	130	6,400	NA	NA	NA	NA	NA	40.73	8.15	32.58	NA	4
S-2	05/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	8.79	31.94	NA	1.1
S-2	08/22/1997	23,000	1,300	65	740	290	4,500	NA	NA	NA	NA	NA	40.73	8.05	32.68	NA	3.2
S-2 (D)	08/22/1997	20,000	1,200	<100	630	250	3,900	NA	NA	NA	NA	NA	40.73	8.05	32.68	NA	3.2
S-2	11/03/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	8.75	31.98	NA	1.2
S-2	02/20/1998	450	28	1.3	7.4	12	35	NA	NA	NA	NA	NA	40.73	6.34	34.39	NA	0.4
S-2	05/18/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.95	32.78	NA	0.8
S-2	08/20/1998	22,000	290	44	420	410	7,300	NA	NA	NA	NA	NA	40.73	7.73	33.00	NA	1.9
S-2	11/06/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	8.47	32.26	NA	NA
S-2	02/16/1999	27,000	200	<200	770	840	5,400	NA	NA	NA	NA	NA	40.73	7.24	33.49	NA	1.4
S-2	05/28/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.82	32.91	NA	1.3
S-2	08/24/1999	13,400	196	<25.0	439	113	597	NA	NA	NA	NA	NA	40.73	8.61	32.12	NA	1.2
S-2	11/16/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	8.17	32.56	NA	1.1
S-2	02/02/2000	7,850	176	88.0	134	111	540	NA	NA	NA	NA	NA	40.73	7.57	33.16	NA	1.2
S-2	05/09/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.94	32.79	NA	1.3

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-2	08/03/2000	35,000	255	122	842	224	905	726e	NA	NA	NA	NA	40.73	8.07	32.66	NA	1.1
S-2	11/15/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	8.13	32.60	NA	1.3
S-2	02/14/2001	13,000	147	<25.0	309	54.4	581	NA	NA	NA	NA	NA	40.73	6.39	34.34	NA	1.4
S-2	05/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	7.21	33.52	NA	1.5
S-2	08/15/2001	15,000	67	4.1	220	33	NA	440	NA	NA	NA	NA	40.73	8.27	32.46	NA	0.6
S-2	12/31/2001	NA	NA	NA	NA	NA	NA	270	NA	NA	NA	NA	40.73	6.07	34.66	NA	0.2
S-2	02/06/2002	15,000	53	2.8	120	31	NA	220	NA	NA	NA	NA	40.73	7.98	32.75	NA	1.8
S-2	06/04/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.73	6.70	34.03	NA	0.2
S-2	07/25/2002	9,000	75	4.0	180	24	NA	460	NA	NA	NA	NA	40.63	7.67	32.96	NA	0.9
S-2	11/27/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.63	7.84	32.79	NA	0.7
S-2	01/30/2003	15,000	26	<2.5	92	22	NA	210	NA	NA	NA	NA	40.63	7.29	33.34	NA	15.6
S-2	06/03/2003	17,000	<25	<25	130	<50	NA	290	NA	NA	NA	NA	40.63	7.87	32.76	NA	5.4
S-2	08/08/2003	4,500	<2.5	<2.5	9.4	<5.0	NA	140	NA	NA	NA	NA	40.63	8.18	32.45	NA	16.2
S-2	11/13/2003	10,000	18	<10	47	21	NA	180	NA	NA	NA	NA	40.63	7.98	32.65	NA	19.5
S-2	02/04/2004	5,700	54	<10	54	<20	NA	270	NA	NA	NA	NA	40.63	7.21	33.42	NA	>15
S-2	05/12/2004	8,200	18	<10	<10	<20	NA	250	NA	NA	NA	NA	40.63	8.07	32.56	NA	3.1
S-2	08/23/2004	4,100	<10	<10	<10	<20	NA	84	<40	<40	<40	<100	40.63	8.52	32.11	NA	10.7
S-2	12/01/2004	2,000	3.4	<2.5	6.2	<5.0	NA	77	NA	NA	NA	NA	40.63	8.70	31.93	NA	11.8
S-2	02/07/2005	7,400	32	1.6	29	3.1	NA	210	NA	NA	NA	NA	40.63	7.58	33.05	NA	0.11
S-2	05/02/2005	8,100	84	4.9	83	5.5	NA	320	NA	NA	NA	NA	40.63	7.45	33.18	NA	0.6
S-2	08/04/2005	4,900	48	2.1	19	2.8	NA	330	<4.0	<4.0	<4.0	55	40.63	7.90	32.73	NA	0.4
S-2	11/16/2005	13,700	43.8	2.79	25.1	5.92	NA	156	NA	NA	NA	NA	40.63	8.33	32.30	NA	0.5
S-2	03/02/2006	5,800	44	3.2	20	5.6	NA	190	NA	NA	NA	NA	40.63	6.74	33.89	NA	0.63
S-2	05/31/2006	11,100	72.0	4.20	22.4	5.36	NA	308	NA	NA	NA	NA	40.63	7.46	33.17	NA	0.6
S-2	08/29/2006	37,400	72.1	5.08	39.6	6.89	NA	377	<0.500	<0.500	<0.500	46.7	40.63	8.02	32.61	NA	0.70
S-2	12/06/2006	5,000	41	3.2	11	5.2	NA	170	NA	NA	NA	NA	40.63	8.04	32.59	NA	0.5
S-2	01/30/2007	4,200	24	1.7	5.9	2.3	NA	140	NA	NA	NA	NA	40.63	8.08	32.55	NA	0.11
S-2	05/15/2007	8,100 j	48	3.5	19	6.2 l	NA	180	NA	NA	NA	NA	40.63	8.05	32.58	NA	0.11



**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-2	08/29/2007	8,400 j	60	3.8	12	4.68 l	NA	270	<4.0	<4.0	<4.0	64	40.63	8.01	32.62	NA	1.02
S-2	11/29/2007	4,100 j	48	4.8 m	11	12.3	NA	280	NA	NA	NA	NA	40.63	8.25	32.38	NA	0.55
S-2	02/21/2008	7,300 j	57	4.0	13	4.7	NA	250	NA	NA	NA	NA	40.63	7.25	33.38	NA	0.40
<b>S-2</b>	<b>05/06/2008</b>	<b>8,900</b>	<b>42</b>	<b>3.1</b>	<b>9.8</b>	<b>4.1</b>	<b>NA</b>	<b>270</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>40.63</b>	<b>6.30</b>	<b>34.34</b>	<b>0.01</b>	<b>0.10/2.0</b>

S-3	05/13/1991	3,300	30	3.6	26	13	NA	NA	NA	NA	NA	NA	41.46	7.90	33.56	NA	NA
S-3	08/23/1991	2,000	25	4	9.3	4.5	NA	NA	NA	NA	NA	NA	41.46	8.14	33.32	NA	NA
S-3	11/07/1991	4,000	20	3.9	5	4.9	NA	NA	NA	NA	NA	NA	41.46	7.91	33.55	NA	NA
S-3	01/28/1992	2,100	21	7.6	6.7	15	NA	NA	NA	NA	NA	NA	41.46	7.53	33.93	NA	NA
S-3 (D)	01/28/1992	2,100	18	6.1	7.1	14	NA	NA	NA	NA	NA	NA	41.46	7.53	33.93	NA	NA
S-3	05/06/1992	6,600	38	51	45	65	NA	NA	NA	NA	NA	NA	41.46	7.55	33.91	NA	NA
S-3	08/26/1992	5,800	18	12	29	60	NA	NA	NA	NA	NA	NA	41.46	7.53	33.93	NA	NA
S-3	10/28/1992	3,000	55	11	16	32	NA	NA	NA	NA	NA	NA	41.46	7.95	33.51	NA	NA
S-3	01/19/1993	3,100	<5	5.1	11	16	NA	NA	NA	NA	NA	NA	41.46	6.12	35.34	NA	NA
S-3	04/29/1993	3,000	31	22	<5	14	NA	NA	NA	NA	NA	NA	41.46	7.27	34.19	NA	NA
S-3	07/22/1993	2,600	3.1	43	23	53	NA	NA	NA	NA	NA	NA	41.46	7.62	33.84	NA	NA
S-3	10/21/1993	2,500	73	14	16	32	NA	NA	NA	NA	NA	NA	41.46	7.81	33.65	NA	NA
S-3	01/04/1994	4,800	13	21	<12.5	33	NA	NA	NA	NA	NA	NA	41.46	7.49	33.97	NA	NA
S-3	04/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	7.32	34.14	NA	NA
S-3	07/25/1994	2,600	6.1	4	3.8	12	NA	NA	NA	NA	NA	NA	41.46	7.66	33.80	NA	NA
S-3	10/10/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	7.49	33.97	NA	NA
S-3	01/26/1995	3,600	30	6.8	5.6	19	NA	NA	NA	NA	NA	NA	41.46	6.50	34.96	NA	NA
S-3 (D)	01/26/1995	2,200	9.9	15	14	22	NA	NA	NA	NA	NA	NA	41.46	6.50	34.96	NA	NA
S-3	04/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.79	34.67	NA	NA
S-3	07/28/1995	3,700	27	9.3	20	34	NA	NA	NA	NA	NA	NA	41.46	7.28	34.18	NA	4
S-3	10/31/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.74	34.72	NA	NA
S-3	01/10/1996	4,000	10	<0.5	13	28	NA	NA	NA	NA	NA	NA	41.46	7.48	33.98	NA	6.1
S-3	04/25/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.90	34.56	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-3	07/23/1996	2,100	20	<0.5	<0.5	<0.5	<25	NA	NA	NA	NA	NA	41.46	7.04	34.42	NA	2.1
S-3	12/10/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	7.96	33.50	NA	0.7
S-3	02/20/1997	3,500	83	<5.0	18	16	130	NA	NA	NA	NA	NA	41.46	7.44	34.02	NA	3
S-3 (D)	02/20/1997	3,000	69	<5.0	14	12	70	NA	NA	NA	NA	NA	41.46	7.44	34.02	NA	3
S-3	05/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	7.13	34.33	NA	0.6
S-3	08/22/1997	4,700	60	12	19	21	40	NA	NA	NA	NA	NA	41.46	6.81	34.65	NA	2.9
S-3	11/03/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	7.40	34.06	NA	0.9
S-3	02/20/1998	3,400	<10	<10	14	18	85	NA	NA	NA	NA	NA	41.46	6.55	34.91	NA	0.8
S-3 (D)	02/20/1998	3,100	8.6	7.8	12	16	57	NA	NA	NA	NA	NA	41.46	6.55	34.91	NA	0.8
S-3	05/18/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.81	34.65	NA	0.7
S-3	08/20/1998	4,400	67	23	9.8	22	240	NA	NA	NA	NA	NA	41.46	6.98	34.48	NA	2.2
S-3	11/06/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.96	34.50	NA	NA
S-3	02/16/1999	2,000	6.9	6.2	3.7	4.8	47	NA	NA	NA	NA	NA	41.46	6.93	34.53	NA	2.0
S-3	05/28/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.74	34.72	NA	1.8
S-3	08/24/1999	4,170	54.8	14.2	6.65	13.7	43.4	NA	NA	NA	NA	NA	41.46	9.05	32.41	NA	1.9
S-3	11/16/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	7.09	34.37	NA	1.6
S-3	02/02/2000	2,410	133	112	24.9	104	46.0	NA	NA	NA	NA	NA	41.46	6.59	34.87	NA	1.9
S-3	05/09/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	7.13	34.33	NA	1.9
S-3	08/03/2000	3,890	17.2	21.9	<10.0	<10.0	166	NA	NA	NA	NA	NA	41.46	6.82	34.64	NA	1.8
S-3	11/15/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.98	34.48	NA	1.6
S-3	02/14/2001	2,800	35.8	5.57	3.83	2.94	1,070	1,250	NA	NA	NA	NA	41.46	6.57	34.89	NA	1.1
S-3	05/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.46	6.72	34.74	NA	1.6
S-3	08/15/2001	2,700	2.0	0.52	<0.50	2.0	NA	140	NA	NA	NA	NA	41.46	7.44	34.02	NA	0.6
S-3	12/31/2001	2,300	<2.0	<2.0	<2.0	<2.0	NA	470	NA	NA	NA	NA	41.46	6.62	34.84	NA	0.6
S-3	02/06/2002	2,000	2.6	1.6	4.3	7.8	NA	170	NA	NA	NA	NA	41.46	7.22	34.24	NA	2.2
S-3	06/04/2002	2,400	1.0	1.1	0.54	4.5	NA	120	NA	NA	NA	NA	41.46	7.34	34.12	NA	0.5
S-3	07/25/2002	3,100	0.86	<0.50	<0.50	2.0	NA	92	NA	NA	NA	NA	41.37	6.98	34.39	NA	1.0
S-3	11/27/2002	2,600	2.0	0.55	<0.50	2.1	NA	44	NA	NA	NA	NA	41.37	7.62	33.75	NA	0.7

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-3	01/30/2003	1,200	2.1	1.3	1.6	3.4	NA	42	NA	NA	NA	NA	41.37	7.14	34.23	NA	13.6
S-3	06/03/2003	2,700	2.9	<0.50	0.50	2.8	NA	43	NA	NA	NA	NA	41.37	7.25	34.12	NA	1.7
S-3	08/08/2003	1,400	2.4	0.71	<0.50	2.2	NA	32	NA	NA	NA	NA	41.37	7.67	33.70	NA	>20
S-3	11/13/2003	5,200	5.1	2.4	<1.0	5.6	NA	69	NA	NA	NA	NA	41.37	7.56	33.81	NA	19.6
S-3	02/04/2004	2,800	1.9	<1.0	1.0	2.6	NA	20	NA	NA	NA	NA	41.37	7.12	34.25	NA	>15
S-3	05/12/2004	1,900	2.8	<1.0	<1.0	2.2	NA	9.7	NA	NA	NA	NA	41.37	7.94	33.43	NA	4.0
S-3	08/23/2004	1,400	7.6	1.1	<1.0	2.9	NA	13	<4.0	<4.0	<4.0	<10	41.37	8.09	33.28	NA	13.3
S-3	12/01/2004	950	1.9	<1.0	<1.0	<2.0	NA	5.6	NA	NA	NA	NA	41.37	8.21	33.16	NA	13.0
S-3	02/07/2005	1,800	1.4	<1.0	<1.0	2.1	NA	9.9	NA	NA	NA	NA	41.37	7.69	33.68	NA	0.25
S-3	05/02/2005	4,000	2.3	1.1	1.6	3.0	NA	9.9	NA	NA	NA	NA	41.37	7.20	34.17	NA	0.5
S-3	08/04/2005	3,600	2.1	<1.0	<2.0	3.6	NA	8.5	<4.0	<4.0	<4.0	33	41.37	8.14	33.23	NA	0.2
S-3	11/16/2005	6,000	2.24	0.800	0.660	3.35	NA	3.83	NA	NA	NA	NA	41.37	8.39	32.98	NA	0.6
S-3	03/02/2006	1,500	1.3	<0.50	0.57	2.0	NA	5.1	NA	NA	NA	NA	41.37	7.09	34.28	NA	0.52
S-3	05/31/2006	5,560	1.71	0.730	1.24	3.89	NA	8.01 i	NA	NA	NA	NA	41.37	7.95	33.42	NA	0.5
S-3	08/29/2006	4,850	1.82	0.680	1.19	2.22	NA	3.16	<0.500	<0.500	<0.500	<10.0	41.37	6.35	35.02	NA	0.88
S-3	12/06/2006	2,900	1.1	<0.50	<0.50	2.2	NA	<0.50	NA	NA	NA	NA	41.37	8.41	32.96	NA	0.3
S-3	01/30/2007	2,100	1.0	<0.50	0.53	1.8	NA	5.7	NA	NA	NA	NA	41.37	8.31	33.06	NA	0.36
S-3	05/15/2007	3,500 j	1.1	0.51 l	0.76 l	2.38 l	NA	8.0	NA	NA	NA	NA	41.37	7.60	33.77	NA	0.11
S-3	08/29/2007	<50 j	1.5	0.48 l	0.50 l	2.81 l	NA	<1.0	<2.0	<2.0	<2.0	<10	41.37	8.64	32.73	NA	0.57
S-3	11/29/2007	3,800 j	1.8	0.80 l,m	0.65 l	3.34 l	NA	5.9	NA	NA	NA	NA	41.37	8.36	33.01	NA	0.22
S-3	02/21/2008	2,900 j	0.60	<1.0	<1.0	1.2	NA	5.0	NA	NA	NA	NA	41.37	7.35	34.02	NA	0.44
<b>S-3</b>	<b>05/06/2008</b>	<b>2,400</b>	<b>1.2</b>	<b>&lt;1.0</b>	<b>&lt;1.0</b>	<b>1.7</b>	<b>NA</b>	<b>&lt;1.0</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>41.37</b>	<b>8.00</b>	<b>33.37</b>	<b>NA</b>	<b>0.2/1.4</b>

S-4	05/13/1991	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	7.44	33.66	NA	NA
S-4	08/23/1991	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	8.32	32.78	NA	NA
S-4	11/07/1991	260	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	8.32	32.78	NA	NA
S-4	01/28/1992	110c	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	7.40	33.70	NA	NA
S-4	05/06/1992	54	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	7.21	33.89	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-4	08/26/1992	67	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	8.13	32.97	NA	NA
S-4	10/28/1992	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	8.73	32.37	NA	NA
S-4	01/19/1993	86	1.2	0.7	2.7	15	NA	NA	NA	NA	NA	NA	41.10	5.86	35.24	NA	NA
S-4	04/29/1993	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	7.02	34.08	NA	NA
S-4 (D)	04/29/1993	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	7.02	34.08	NA	NA
S-4	07/22/1993	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	7.76	33.34	NA	NA
S-4	10/21/1993	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	8.53	32.57	NA	NA
S-4	01/04/1994	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	7.92	33.18	NA	NA
S-4	04/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.71	33.39	NA	NA
S-4	07/25/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.82	33.28	NA	NA
S-4	10/10/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	8.15	32.95	NA	NA
S-4	01/26/1995	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	41.10	5.73	35.37	NA	NA
S-4	04/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	6.26	34.84	NA	NA
S-4	07/28/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.80	33.30	NA	NA
S-4	10/31/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	8.45	32.65	NA	NA
S-4	01/10/1996	<50	1	2.8	<0.5	2.1	NA	NA	NA	NA	NA	NA	41.10	8.26	32.84	NA	2.8
S-4	04/25/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.14	33.96	NA	NA
S-4	07/23/1996	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	41.10	8.18	32.92	NA	3.8
S-4	12/10/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.04	34.06	NA	3.9
S-4	02/20/1997	<50	<0.50	<0.50	<0.50	<0.50	6.7	NA	NA	NA	NA	NA	41.10	7.07	34.03	NA	5
S-4	05/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	6.63	34.47	NA	0.8
S-4	08/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.69	33.41	NA	3.7
S-4	11/03/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	8.26	32.84	NA	1.3
S-4	02/20/1998	130	6.9	4.6	5.2	17	2.8	NA	NA	NA	NA	NA	41.10	5.57	35.53	NA	1.8
S-4	05/18/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.13	33.97	NA	1.4
S-4	08/20/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.77	33.33	NA	4.0
S-4	11/06/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.85	33.25	NA	NA
S-4	02/16/1999	<50	<0.50	<0.50	<0.50	<0.50	23	NA	NA	NA	NA	NA	41.10	6.51	34.59	NA	3.6

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-4	05/28/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.00	34.10	NA	3.2
S-4	08/24/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	9.13	31.97	NA	1.9
S-4	11/16/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.79	33.31	NA	1.7
S-4	02/02/2000	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	41.10	7.19	33.91	NA	1.9
S-4	05/09/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.51	33.59	NA	1.8
S-4	08/03/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.83	33.27	NA	1.9
S-4	11/15/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.69	33.41	NA	1.5
S-4	02/14/2001	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	41.10	6.20	34.90	NA	1.6
S-4	05/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	6.56	34.54	NA	1.6
S-4	08/15/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.90	33.20	NA	0.6
S-4	12/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	5.62	35.48	NA	2.7
S-4	02/06/2002	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	41.10	7.29	33.81	NA	0.2
S-4	06/04/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.10	7.45	33.65	NA	0.6
S-4	07/25/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.39	33.65	NA	0.8
S-4	11/27/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.60	33.44	NA	NA
S-4	01/30/2003	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	41.04	8.45	32.59	NA	NA
S-4	06/03/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	6.82	34.22	NA	NA
S-4	08/08/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.36	33.68	NA	NA
S-4	11/13/2003	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.56	33.48	NA	NA
S-4	02/04/2004	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	41.04	6.47	34.57	NA	NA
S-4	05/12/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.10	33.94	NA	NA
S-4	08/23/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.60	33.44	NA	NA
S-4	12/01/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.23	33.81	NA	NA
S-4	02/07/2005	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	41.04	6.12	34.92	NA	NA
S-4	05/02/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	6.50	34.54	NA	NA
S-4	08/04/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.13	33.91	NA	NA
S-4	11/16/2005	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.43	33.61	NA	NA
S-4	03/02/2006	<50	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	41.04	6.05	34.99	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-4	05/31/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	6.64	34.40	NA	NA
S-4	08/29/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.25	33.79	NA	NA
S-4	12/06/2006	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.39	33.65	NA	NA
S-4	01/30/2007	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	41.04	7.24	33.80	NA	NA
S-4	05/15/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	6.60	34.44	NA	NA
S-4	08/29/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.42	33.62	NA	NA
S-4	11/29/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	41.04	7.22	33.82	NA	NA
S-4	02/21/2008	<50 j	<0.50	<1.0	<1.0	<1.0	NA	<1.0	NA	NA	NA	NA	41.04	6.20	34.84	NA	NA
<b>S-4</b>	<b>05/06/2008</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>41.04</b>	<b>7.19</b>	<b>33.85</b>	<b>NA</b>	<b>NA</b>

S-5	05/13/1991	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	14.60	30.57	6.48	NA
S-5	08/23/1991	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	15.14	29.25	5.50	NA
S-5	11/07/1991	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	15.10	29.17	5.35	NA
S-5	01/28/1992	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	14.05	29.86	4.90	NA
S-5	05/06/1992	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	14.31	30.21	5.66	NA
S-5	08/26/1992	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	14.26	28.77	3.80	NA
S-5	10/28/1992	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	14.22	28.82	3.81	NA
S-5	01/19/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	12.36	30.80	3.96	NA
S-5	04/29/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	9.64	31.07	0.90	NA
S-5	07/22/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	9.55	31.16	0.90	NA
S-5	10/21/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	11.23	29.34	0.73	NA
S-5	01/04/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	11.69	29.82	1.90	NA
S-5	04/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	11.42	29.87	1.62	NA
S-5	07/25/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	12.01	29.41	1.79	NA
S-5	10/10/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	12.05	29.38	1.80	NA
S-5	01/26/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	8.42	32.95	1.72	NA
S-5	04/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	10.03	30.90	1.17	NA
S-5	07/28/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	11.42	30.07	1.87	NA



**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-5	10/31/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	13.21	27.21	0.54	NA
S-5	01/10/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	12.05	28.04	0.13	NA
S-5	04/25/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	9.68	30.33	0.03	NA
S-5	07/23/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	9.82	30.20	0.04	NA
S-5	12/10/1996	270,000	8,800	29,000	5,200	37,000	<2,500	NA	NA	NA	NA	NA	39.99	9.10	30.91	0.03	NA
S-5 (D)	12/10/1996	400,000	9,200	32,000	7,200	50,000	<2,500	NA	NA	NA	NA	NA	39.99	9.10	30.91	0.03	NA
S-5	02/20/1997	88,000	2,000	11,000	1,600	19,000	<500	NA	NA	NA	NA	NA	39.99	8.93	31.06	NA	5
S-5	05/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	10.07	29.94	0.02	NA
S-5	08/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	10.24	29.77	0.02	NA
S-5	11/03/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	10.91	29.10	0.02	NA
S-5	02/20/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	7.81	32.20	0.03	NA
S-5	05/18/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	9.64	30.37	0.02	NA
S-5	05/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.99	10.13	29.86	NA	NA
S-6	05/13/1991	13,000	600	140	210	310	NA	NA	NA	NA	NA	NA	40.12	7.82	32.30	NA	NA
S-6	08/23/1991	9,800	480	80	120	150	NA	NA	NA	NA	NA	NA	40.12	9.58	30.54	NA	NA
S-6	11/07/1991	6,200	240	23	25	27	NA	NA	NA	NA	NA	NA	40.12	10.86	29.26	NA	NA
S-6	01/28/1992	5,600	250	15	41	36	NA	NA	NA	NA	NA	NA	40.12	8.97	31.15	NA	NA
S-6	05/06/1992	7,100	330	29	110	210	NA	NA	NA	NA	NA	NA	40.12	8.27	31.85	NA	NA
S-6	08/26/1992	13,000	240	<50	56	780	NA	NA	NA	NA	NA	NA	40.12	9.57	31.55	NA	NA
S-6	10/28/1992	10,000	470	210	67	170	NA	NA	NA	NA	NA	NA	40.12	8.90	32.22	NA	NA
S-6	01/19/1993	4,800	100	26	27	45	NA	NA	NA	NA	NA	NA	40.12	4.84	35.28	NA	NA
S-6	04/29/1993	7,000	430	20	<12.5	42	NA	NA	NA	NA	NA	NA	40.12	5.61	34.51	NA	NA
S-6	07/22/1993	5,800	260	120	65	150	NA	NA	NA	NA	NA	NA	40.12	6.56	33.56	NA	NA
S-6	10/21/1993	5,500	270	69	120	140	NA	NA	NA	NA	NA	NA	40.12	8.73	31.39	NA	NA
S-6	01/04/1994	7,100	180	58	63	62	NA	NA	NA	NA	NA	NA	40.12	7.14	32.98	NA	NA
S-6	04/13/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	7.21	32.91	NA	NA
S-6	07/25/1994	12,000	190	52	30	39	NA	NA	NA	NA	NA	NA	40.12	6.85	33.27	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-6 (D)	07/25/1994	7,200	170	32	31	34	NA	NA	NA	NA	NA	NA	40.12	6.85	33.27	NA	NA
S-6	10/10/1994	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	6.20	33.92	NA	NA
S-6	01/26/1995	5,800	120	23	24	44	NA	NA	NA	NA	NA	NA	40.12	4.89	35.23	NA	NA
S-6	04/21/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	5.61	34.51	NA	NA
S-6	07/28/1995	4,400	210	23	34	60	NA	NA	NA	NA	NA	NA	40.12	5.30	34.82	NA	3
S-6 (D)	07/28/1995	6,100	230	20	38	59	NA	NA	NA	NA	NA	NA	40.12	5.30	34.82	NA	3
S-6	10/31/1995	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	4.98	35.14	NA	NA
S-6	01/10/1996	6,800	170	87	35	105	NA	NA	NA	NA	NA	NA	40.12	5.67	34.45	NA	2.2
S-6 (D)	01/10/1996	7,800	230	120	50	210	NA	NA	NA	NA	NA	NA	40.12	5.67	34.45	NA	2.2
S-6	04/25/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	5.23	34.89	NA	NA
S-6	07/23/1996	2,600	170	<0.5	<0.5	8.5	<25	NA	NA	NA	NA	NA	40.12	5.40	34.72	NA	1.4
S-6	12/10/1996	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	6.68	33.44	NA	0.7
S-6	02/20/1997	6,300	160	7.7	14	31	77	NA	NA	NA	NA	NA	40.12	5.70	34.42	NA	2
S-6	05/22/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	5.49	34.63	NA	0.9
S-6	08/22/1997	6,200	160	26	15	27	49	NA	NA	NA	NA	NA	40.12	5.71	34.41	NA	2.8
S-6	11/03/1997	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	6.15	33.97	NA	1.4
S-6	02/20/1998	4,100	150	<10	<10	15	55	NA	NA	NA	NA	NA	40.12	5.25	34.87	NA	0.4
S-6	05/18/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	5.69	34.43	NA	0.4
S-6	08/20/1998	7,800	240	38	16	39	110	NA	NA	NA	NA	NA	40.12	6.04	34.08	NA	1.5
S-6 (D) b	08/20/1998	8,400	270	30	19	31	130	NA	NA	NA	NA	NA	40.12	6.04	34.08	NA	1.5
S-6	11/06/1998	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	6.10	34.02	NA	NA
S-6	02/16/1999	6,000	190	19	14	20	<2.5	NA	NA	NA	NA	NA	40.12	5.84	34.28	NA	1.7
S-6	05/28/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	9.51	30.61	NA	1.9
S-6	08/24/1999	6,870	193	32.1	18.8	36.4	<25.0	NA	NA	NA	NA	NA	40.12	8.29	31.83	NA	2.7
S-6	11/16/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	5.93	34.19	NA	2.6
S-6	02/02/2000	2,310	164	122	28.6	133	63.1	NA	NA	NA	NA	NA	40.12	5.33	34.79	NA	2.6
S-6	05/09/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	6.41	33.71	NA	2.4
S-6	08/03/2000	5,600	188	27.4	<10.0	25.2	174	NA	NA	NA	NA	NA	40.12	5.84	34.28	NA	2.7

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-6	11/15/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	5.58	34.54	NA	2.3
S-6	02/14/2001	6,140	126	13.2	8.01	18.0	205	NA	NA	NA	NA	NA	40.12	5.50	34.62	NA	1.3
S-6	05/31/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.12	5.52	34.60	NA	1.2
S-6	08/15/2001	6,000	160	9.1	5.8	24	NA	51	NA	NA	NA	NA	40.12	6.04	34.08	NA	0.4
S-6	12/31/2001	6,900	120	12	6.6	24	NA	44	NA	NA	NA	NA	40.12	5.52	34.60	NA	0.4
S-6	02/06/2002	4,300	110	7.3	4.8	18	NA	39	NA	NA	NA	NA	40.12	6.34	33.78	NA	0.5
S-6	06/04/2002	4,300	140	8.4	4.9	22	NA	26	NA	NA	NA	NA	40.12	6.19	33.93	NA	0.4
S-6	07/25/2002	3,900	140	9.0	5.5	23	NA	31	NA	NA	NA	NA	39.92	6.05	33.87	NA	0.7
S-6	11/27/2002	5,200	160	9.6	4.9	24	NA	26	NA	NA	NA	NA	39.92	6.26	33.66	NA	NA
S-6	01/30/2003	4,700	200	9.6	5.5	25	NA	30	NA	NA	NA	NA	39.92	5.73	34.19	NA	NA
S-6	06/03/2003	3,900	160	10	<10	25	NA	30	NA	NA	NA	NA	39.92	5.52	34.40	NA	NA
S-6	08/08/2003	2,900	150	8.8	3.6	18	NA	18	NA	NA	NA	NA	39.92	6.14	33.78	NA	NA
S-6	11/13/2003	8,300	220	19	11	35	NA	28	NA	NA	NA	NA	39.92	5.85	34.07	NA	NA
S-6	02/04/2004	7,400	310	17	10	31	NA	30	NA	NA	NA	NA	39.92	5.51	34.41	NA	NA
S-6	05/12/2004	4,000	230	10	5.5	24	NA	21	NA	NA	NA	NA	39.92	6.10	33.82	NA	NA
S-6	08/23/2004	6,000	260	16	9.0	32	NA	19	NA	NA	NA	NA	39.92	6.38	33.54	NA	NA
S-6	12/01/2004	9,600	280	23	11	47	NA	24	NA	NA	NA	NA	39.92	6.41	33.51	NA	NA
S-6	02/07/2005	7,100	300	14	8.4	35	NA	21	NA	NA	NA	NA	39.92	5.94	33.98	NA	NA
S-6	05/02/2005	6,100	250	12	8.1	30	NA	16	NA	NA	NA	NA	39.92	5.90	34.02	NA	NA
S-6	08/04/2005	5,200	180	13	8.0	31	NA	15	NA	NA	NA	NA	39.92	6.67	33.25	NA	NA
S-6	11/16/2005	9,950	147	15.3	9.82	32.3	NA	10.8	NA	NA	NA	NA	39.92	6.64	33.28	NA	NA
S-6	03/02/2006	2,400	72	9.2	7.0	21	NA	6.4	NA	NA	NA	NA	39.92	5.92	34.00	NA	NA
S-6	05/31/2006	9,460	182	13.6	8.80	33.5	NA	11.4 i	NA	NA	NA	NA	39.92	6.28	33.64	NA	NA
S-6	08/29/2006	8,840	108	26.6	12.4	37.7	NA	10.1	NA	NA	NA	NA	39.92	7.19	32.73	NA	NA
S-6	12/06/2006	4,900	130	17	8.2	35	NA	9.4	NA	NA	NA	NA	39.92	7.06	32.86	NA	NA
S-6	01/30/2007	4,500	100	22	12	38	NA	8.1	NA	NA	NA	NA	39.92	6.94	32.98	NA	NA
S-6	05/15/2007	6,900 j	120	9.2	6.7	27.6	NA	6.4	NA	NA	NA	NA	39.92	6.30	33.62	NA	NA
S-6	08/29/2007	9,300 j	110	30	14	52	NA	6.4	5.3 l	<10	<10	<50	39.92	7.27	32.65	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-6	11/29/2007	4,300 j	110	19 m	14	53	NA	8.7	NA	NA	NA	NA	39.92	6.87	33.05	NA	NA
S-6	02/21/2008	5,600 j	110	8.6	5.0	28.3	NA	6.4	NA	NA	NA	NA	39.92	5.75	34.17	NA	NA
<b>S-6</b>	<b>05/06/2008</b>	<b>5,900</b>	<b>110</b>	<b>12</b>	<b>7.5</b>	<b>30.1</b>	<b>NA</b>	<b>&lt;1.0</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>39.92</b>	<b>6.60</b>	<b>33.32</b>	<b>NA</b>	<b>NA</b>

S-7	05/13/1991	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.56	29.54	NA	NA
S-7	08/23/1991	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	11.16	28.94	NA	NA
S-7	11/07/1991	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	11.48	28.62	NA	NA
S-7	01/28/1992	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.72	29.38	NA	NA
S-7	05/06/1992	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.34	29.76	NA	NA
S-7	08/26/1992	160	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	11.13	28.97	NA	NA
S-7	10/28/1992	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	11.52	28.58	NA	NA
S-7	01/19/1993	50	1.1	0.6	1.9	9.2	NA	NA	NA	NA	NA	NA	40.10	8.68	31.42	NA	NA
S-7	04/29/1993	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	9.90	30.20	NA	NA
S-7	07/22/1993	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	40.10	NA	NA	NA	NA
S-7	10/21/1993	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	11.10	29.00	NA	NA
S-7	01/04/1994	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.40	29.70	NA	NA
S-7	04/13/1994	<50	1.4	0.61	<0.5	0.64	NA	NA	NA	NA	NA	NA	40.10	10.20	29.90	NA	NA
S-7 (D)	04/13/1994	<50	1.4	0.61	<0.5	0.66	NA	NA	NA	NA	NA	NA	40.10	10.20	29.90	NA	NA
S-7	07/25/1994	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.48	29.62	NA	NA
S-7 a	10/10/1994	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.64	29.46	NA	NA
S-7	01/26/1995	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	7.75	32.35	NA	4.6
S-7	04/21/1995	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	8.51	31.59	NA	NA
S-7	07/28/1995	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.20	29.90	NA	3
S-7	10/31/1995	<50	<0.5	<0.5	<0.5	<0.5	NA	NA	NA	NA	NA	NA	40.10	10.86	29.24	NA	4.9
S-7	01/10/1996	<50	<0.5	2	<0.5	2.6	NA	NA	NA	NA	NA	NA	40.10	10.33	29.77	NA	7.6
S-7	04/25/1996	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	40.10	9.13	30.97	NA	6.2
S-7	07/23/1996	<50	<0.5	<0.5	<0.5	<0.5	14	NA	NA	NA	NA	NA	40.10	10.18	29.92	NA	3.7
S-7	12/10/1996	<50	<0.5	<0.5	<0.5	<0.5	<2.5	NA	NA	NA	NA	NA	40.10	9.04	31.06	NA	4.6

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-7	02/20/1997	<50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	40.10	9.60	30.50	NA	5
S-7	05/22/1997	<50	1.3	<0.50	<0.50	<0.50	5.5	NA	NA	NA	NA	NA	40.10	10.63	29.47	NA	0.8
S-7	08/22/1997	<50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	40.10	10.95	29.15	NA	2.6
S-7	11/03/1997	<50	2.2	1.7	0.58	3.4	<2.5	NA	NA	NA	NA	NA	40.10	11.29	28.81	NA	2.6
S-7	02/20/1998	350	23	13	14	42	3.8	NA	NA	NA	NA	NA	40.10	7.73	32.37	NA	4.6
S-7	05/18/1998	<50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	40.10	10.29	29.81	NA	4.4
S-7	08/20/1998	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	40.10	11.00	29.10	NA	5.4
S-7	11/06/1998	<50	<0.50	<0.50	<0.50	<0.50	<2.5	NA	NA	NA	NA	NA	40.10	11.19	28.91	NA	5.2
S-7	02/16/1999	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	40.10	NA	NA	NA	NA
S-7	05/28/1999	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	40.10	9.76	30.34	NA	2.7
S-7	08/24/1999	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	40.10	10.61	29.49	NA	2.1
S-7	11/16/1999	<50.0	<0.500	<0.500	<0.500	<0.500	3.68	NA	NA	NA	NA	NA	40.10	10.90	29.20	NA	2.3
S-7	02/02/2000	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00	NA	NA	NA	NA	NA	40.10	10.30	29.80	NA	2.1
S-7	05/09/2000	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	40.10	10.25	29.85	NA	2.7
S-7	08/03/2000	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	40.10	10.65	29.45	NA	2.5
S-7	11/15/2000	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	NA	NA	NA	NA	NA	40.10	10.53	29.57	NA	4.6
S-7	02/14/2001	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	40.10	NA	NA	NA	NA
S-7	05/31/2001	<50	<0.50	<0.50	<0.50	0.77	NA	4.6	NA	NA	NA	NA	40.10	9.46	30.64	NA	2.1
S-7	08/15/2001	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	40.10	10.93	29.17	NA	2.0
S-7	12/31/2001	<50	<0.50	<0.50	<0.50	<0.50	NA	6.0	NA	NA	NA	NA	40.10	9.14	30.96	NA	3.0
S-7	02/06/2002	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	40.10	8.61	31.49	NA	3.2
S-7	06/04/2002	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	40.10	10.41	29.69	NA	0.9
S-7	07/25/2002	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	39.91	10.37	29.54	NA	1.1
S-7	11/27/2002	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	39.91	10.52	29.39	NA	NA
S-7	01/30/2003	<50	<0.50	<0.50	<0.50	<0.50	NA	<5.0	NA	NA	NA	NA	39.91	9.38	30.53	NA	NA
S-7	06/03/2003	<50	<0.50	<0.50	<0.50	<1.0	NA	0.72	NA	NA	NA	NA	39.91	10.18	29.73	NA	NA
S-7	08/08/2003	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.91	10.43	29.48	NA	NA
S-7	11/13/2003	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.91	10.39	29.52	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-7	02/04/2004	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.91	9.17	30.74	NA	NA
S-7	05/12/2004	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.91	10.20	29.71	NA	NA
S-7	08/23/2004	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72 f	10.53	29.19	NA	NA
S-7	12/01/2004	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	10.36	29.36	NA	NA
S-7	02/07/2005	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	8.78	30.94	NA	NA
S-7	05/02/2005	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	9.46	30.26	NA	NA
S-7	08/04/2005	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	11/16/2005	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	03/02/2006	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	05/31/2006	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	08/29/2006	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	12/06/2006	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	01/30/2007	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	05/15/2007	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	08/29/2007	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	11/29/2007	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
S-7	02/21/2008	Well paved over		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>S-7</b>	<b>05/06/2008</b>	<b>Well paved over</b>		<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>

S-8	05/10/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	10.85	29.67	NA	NA
S-8	05/12/2004	<1,300	<13	<13	<13	<25	NA	2,500	NA	NA	NA	NA	40.52	10.95	29.57	NA	NA
S-8	08/23/2004	1,300	15	<13	<13	<25	NA	2,500	<50	<50	<50	570	40.52	11.40	29.12	NA	NA
S-8	12/01/2004	1,400 h	<13	<13	<13	<25	NA	2,700	NA	NA	NA	NA	40.52	11.10	29.42	NA	NA
S-8	02/07/2005	6,400	240	27	290	100	NA	370	NA	NA	NA	NA	40.52	10.22	30.30	NA	NA
S-8	05/02/2005	6,300	160	25	200	74	NA	190	NA	NA	NA	NA	40.52	10.05	30.47	NA	NA
S-8	08/04/2005	2,500	130	7.5	<6.0	14	NA	290	<8.0	<8.0	<8.0	92	40.52	10.88	29.64	NA	NA
S-8	11/16/2005	27,700	43.2	4.36	637	1,200	NA	638	NA	NA	NA	NA	40.52	11.28	29.24	NA	NA
S-8	03/02/2006	9,900	160	13	490	530	NA	110	NA	NA	NA	NA	40.52	8.85	31.67	NA	NA



**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-8	05/31/2006	14,300	270	53.1	283	246	NA	102 i	NA	NA	NA	NA	40.52	10.34	30.18	NA	NA
S-8	08/29/2006	14,700	107	9.42	196	195	NA	278	<0.500	<0.500	<0.500	36.1	40.52	11.17	29.35	NA	NA
S-8	12/06/2006	7,800	150	8.6	120	110	NA	200	NA	NA	NA	NA	40.52	11.21	29.31	NA	NA
S-8	01/30/2007	7,500	220	18	180	96	NA	170	NA	NA	NA	NA	40.52	10.72	29.80	NA	NA
S-8	05/15/2007	9,600 j	NA	24	160	112	NA	130	NA	NA	NA	NA	40.52	10.50	30.02	NA	NA
S-8	08/29/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	11.44	29.11	0.04	NA
S-8	08/30/2007	6,100 j	35	2.7	140	234	NA	170	<4.0	<4.0	<4.0	820	40.52	11.37	29.25	0.13	NA
S-8	09/25/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	11.56	29.22	0.32	NA
S-8	10/29/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	11.23	29.50	0.26	NA
S-8	11/29/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	11.08	29.60	0.20	NA
S-8	12/11/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	10.61	30.03	0.15	NA
S-8	01/24/2008	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	9.61	30.97	0.08	NA
S-8	02/21/2008	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	40.52	9.11	31.43	0.03	NA
<b>S-8</b>	<b>03/20/2008</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>40.52</b>	<b>10.22</b>	<b>30.40</b>	<b>0.12</b>	<b>NA</b>
<b>S-8</b>	<b>04/30/2008</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>40.52</b>	<b>10.91</b>	<b>29.67</b>	<b>0.07</b>	<b>NA</b>
<b>S-8</b>	<b>05/06/2008</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>40.52</b>	<b>10.50</b>	<b>30.05</b>	<b>0.04</b>	<b>NA</b>

S-9	05/10/2004	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.72	10.34	29.38	NA	NA
S-9	05/12/2004	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	10.42	29.30	NA	NA
S-9	08/23/2004	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	11.32	28.40	NA	NA
S-9	12/01/2004	Unable to locate		NA	NA	NA	NA	NA	NA	NA	NA	NA	39.72	NA	NA	NA	NA
S-9	02/07/2005	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	8.74	30.98	NA	NA
S-9	05/02/2005	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	39.72	NA	NA	NA	NA
S-9	08/04/2005	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	8.79	30.93	NA	NA
S-9	11/16/2005	<50.0	<0.500	<0.500	<0.500	<0.500	NA	<0.500	NA	NA	NA	NA	39.72	10.30	29.42	NA	NA
S-9	03/02/2006	<50	<0.50	<0.50	<0.50	<0.50	NA	<0.50	NA	NA	NA	NA	39.72	5.86	33.86	NA	NA
S-9	05/31/2006	<50.0	<0.500	<0.500	<0.500	0.540	NA	<0.500	NA	NA	NA	NA	39.72	9.85	29.87	NA	NA
S-9	08/29/2006	<50.0	<0.500	<0.500	<0.500	<0.500	NA	<0.500	NA	NA	NA	NA	39.72	10.75	28.97	NA	NA

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
S-9	12/06/2006	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	10.60	29.12	NA	NA
S-9	01/30/2007	<50	<0.50	<0.50	<0.50	<1.0	NA	<0.50	NA	NA	NA	NA	39.72	10.45	29.27	NA	NA
S-9	05/15/2007	61 j,k	<0.50	<1.0	<1.0	<1.0	NA	<1.0	NA	NA	NA	NA	39.72	10.15	29.57	NA	NA
S-9	08/29/2007	71 j	<0.50	<1.0	1.3	2.1	NA	<1.0	<2.0	<2.0	<2.0	<10	39.72	10.96	28.76	NA	NA
S-9	11/29/2007	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	39.72	NA	NA	NA	NA
S-9	02/21/2008	<50 j	<0.50	<1.0	<1.0	<1.0	NA	<1.0	NA	NA	NA	NA	39.72	7.36	32.36	NA	NA
<b>S-9</b>	<b>05/06/2008</b>	<b>&lt;50</b>	<b>&lt;0.50</b>	<b>&lt;1.0</b>	<b>&lt;1.0</b>	<b>&lt;1.0</b>	<b>NA</b>	<b>&lt;1.0</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>NA</b>	<b>39.72</b>	<b>10.49</b>	<b>29.23</b>	<b>NA</b>	<b>NA</b>

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

<b>Well ID</b>	<b>Date</b>	<b>TPPH</b> (ug/L)	<b>B</b> (ug/L)	<b>T</b> (ug/L)	<b>E</b> (ug/L)	<b>X</b> (ug/L)	<b>MTBE</b> <b>8020</b> (ug/L)	<b>MTBE</b> <b>8260</b> (ug/L)	<b>DIPE</b> (ug/L)	<b>ETBE</b> (ug/L)	<b>TAME</b> (ug/L)	<b>TBA</b> (ug/L)	<b>TOC</b> (MSL)	<b>Depth to</b> <b>Water</b> (ft.)	<b>GW</b> <b>Elevation</b> (MSL)	<b>SPH</b> <b>Thickness</b> (ft.)	<b>DO</b> <b>Reading</b> (ppm)
----------------	-------------	-----------------------	--------------------	--------------------	--------------------	--------------------	--------------------------------------	--------------------------------------	-----------------------	-----------------------	-----------------------	----------------------	---------------------	--	--	---	--------------------------------------

Abbreviations:

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to May 31, 2001, analyzed by EPA Method 8015.

BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to May 31, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260B

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260B

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260B

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260B

TOC = Top of Casing Elevation

TOB = Top of Wellbox Elevation

SPH = Separate-Phase Hydrocarbons

GW = Groundwater

DO = Dissolved Oxygen

ug/L = Parts per billion

mg/L = Parts per million

MSL = Mean sea level

ft. = Feet

ppm = Parts per million

<n = Below detection limit

(D) = Duplicate sample

NA = Not applicable

**WELL CONCENTRATIONS**  
**Shell-branded Service Station**  
**999 San Pablo Avenue**  
**Albany, CA**

Well ID	Date	TPPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	SPH Thickness (ft.)	DO Reading (ppm)
---------	------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	--------------	----------------------------	--------------------------	---------------------------	------------------------

Notes:

a = Sample analyzed for total dissolved solids (450 mg/L).

b = Surrogate recovery outside QC limits due to matrix effect.

c = Chromatogram pattern indicated an unidentified hydrocarbon.

d = This sample analyzed outside of EPA recommended hold time.

e = Concentration is an estimate value above the linear quantitation range.

f = Top of casing elevation lowered 0.19 feet on June 22, 2004 due to wellhead maintenance.

g = Hydrocarbon reported does not match the laboratory standard.

h = Quantity of unknown hydrocarbon(s) in sample based on gasoline.

i = Secondary ion abundances were outside method requirements. Identification based on analytical judgement.

j = Analyzed by EPA Method 8015B (M).

k = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.

l = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.

m = Analyte was present in the associated method blank.

When separate-phase hydrocarbons are present, ground water elevation is adjusted using the relation:


Corrected ground water elevation = Top-of-casing elevation - depth to water + (0.8 x hydrocarbon thickness).

Ownership of well S-5 is being transferred to Arco.

Beginning July 25, 2002 depth to waters referenced to Top of Casing.

Site surveyed January 9, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.

Wells S-8 and S-9 surveyed May 11, 2004 by Virgil Chavez Land Surveying of Vallejo, CA.

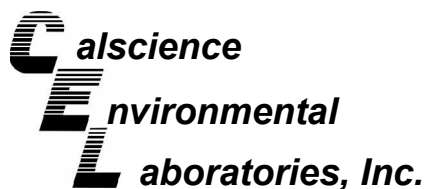

May 22, 2008

Michael Ninokata  
Blaine Tech Services, Inc.  
1680 Rogers Avenue  
San Jose, CA 95112-1105

Subject: **CalScience Work Order No.: 08-05-0900**  
**Client Reference: 999 San Pablo Ave., Albany, CA**

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 5/9/2008 and analyzed in accordance with the attached chain-of-custody.

Unless otherwise noted, all analytical testing was accomplished in accordance with the guidelines established in our Quality Systems Manual, applicable standard operating procedures, and other related documentation. The original report of subcontracted analysis, if any, is provided herein, and follows the standard CalScience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.

If you have any questions regarding this report, please do not hesitate to contact the undersigned.

Sincerely,

A handwritten signature in black ink, appearing to read "Jessie Kim".

CalScience Environmental  
Laboratories, Inc.  
Jessie Kim  
Project Manager

## Analytical Report



Blaine Tech Services, Inc.  
1680 Rogers Avenue  
San Jose, CA 95112-1105

Date Received: 05/09/08  
Work Order No: 08-05-0900  
Preparation: EPA 5030B  
Method: LUFT GC/MS / EPA 8260B  
Units: ug/L

Project: 999 San Pablo Ave., Albany, CA

Page 1 of 2

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-2	08-05-0900-1-A	05/06/08 13:45	Aqueous	GC/MS LL	05/13/08	05/14/08 02:06	080513L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
TPPH	8900	500	10		p/m-Xylene	4.1	2.0	2	
Benzene	42	1.0	2		o-Xylene	ND	2.0	2	
Ethylbenzene	9.8	2.0	2		Methyl-t-Butyl Ether (MTBE)	270	2.0	2	
Toluene	3.1	2.0	2						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
1,4-Bromofluorobenzene	105	70-130			1,4-Bromofluorobenzene-TPPH	102	70-130		

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-3	08-05-0900-2-A	05/06/08 12:35	Aqueous	GC/MS LL	05/13/08	05/14/08 02:31	080513L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
TPPH	2400	50	1		p/m-Xylene	1.7	1.0	1	
Benzene	1.2	0.50	1		o-Xylene	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Toluene	ND	1.0	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
1,4-Bromofluorobenzene	103	70-130			1,4-Bromofluorobenzene-TPPH	97	70-130		


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-6	08-05-0900-3-A	05/06/08 10:45	Aqueous	GC/MS LL	05/13/08	05/14/08 02:55	080513L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
TPPH	5900	500	10		p/m-Xylene	23	1.0	1	
Benzene	110	0.50	1		o-Xylene	7.1	1.0	1	
Ethylbenzene	7.5	1.0	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Toluene	12	1.0	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
1,4-Bromofluorobenzene	102	70-130			1,4-Bromofluorobenzene-TPPH	97	70-130		

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-9	08-05-0900-4-A	05/06/08 13:45	Aqueous	GC/MS LL	05/13/08	05/14/08 00:51	080513L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
TPPH	ND	50	1		p/m-Xylene	ND	1.0	1	
Benzene	ND	0.50	1		o-Xylene	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Toluene	ND	1.0	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
1,4-Bromofluorobenzene	96	70-130			1,4-Bromofluorobenzene-TPPH	92	70-130		

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers



**Analytical Report**



Blaine Tech Services, Inc.  
 1680 Rogers Avenue  
 San Jose, CA 95112-1105

Date Received: 05/09/08  
 Work Order No: 08-05-0900  
 Preparation: EPA 5030B  
 Method: LUFT GC/MS / EPA 8260B  
 Units: ug/L

Project: 999 San Pablo Ave., Albany, CA

Page 2 of 2


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
Method Blank	099-12-715-340	N/A	Aqueous	GC/MS LL	05/13/08	05/14/08 00:26	080513L02

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
TPPH	ND	50	1		p/m-Xylene	ND	1.0	1	
Benzene	ND	0.50	1		o-Xylene	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Toluene	ND	1.0	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
1,4-Bromofluorobenzene	97	70-130			1,4-Bromofluorobenzene-TPPH	92	70-130		

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
Method Blank	099-12-715-344	N/A	Aqueous	GC/MS LL	05/14/08	05/14/08 12:48	080514L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
TPPH	ND	50	1		p/m-Xylene	ND	1.0	1	
Benzene	ND	0.50	1		o-Xylene	ND	1.0	1	
Ethylbenzene	ND	1.0	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
Toluene	ND	1.0	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
1,4-Bromofluorobenzene	94	70-130			1,4-Bromofluorobenzene-TPPH	89	70-130		

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

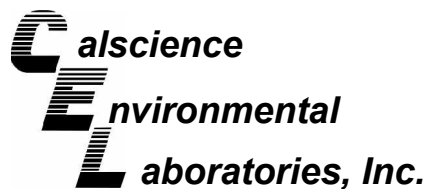

## Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.  
1680 Rogers Avenue  
San Jose, CA 95112-1105


Date Received: 05/09/08  
Work Order No: 08-05-0900  
Preparation: EPA 5030B  
Method: LUFT GC/MS / EPA  
8260B

Project 999 San Pablo Ave., Albany, CA


Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
S-9	Aqueous	GC/MS LL	05/13/08	05/14/08	080513S02

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	94	93	70-130	1	0-30	
Ethylbenzene	93	96	70-130	3	0-30	
Toluene	94	95	70-130	1	0-30	
p/m-Xylene	91	93	70-130	2	0-30	
o-Xylene	96	98	70-130	2	0-30	
Methyl-t-Butyl Ether (MTBE)	102	100	70-130	1	0-30	
Tert-Butyl Alcohol (TBA)	103	103	70-130	0	0-30	
Diisopropyl Ether (DIPE)	102	100	70-130	2	0-30	
Ethyl-t-Butyl Ether (ETBE)	102	101	70-130	1	0-30	
Tert-Amyl-Methyl Ether (TAME)	102	100	70-130	2	0-30	
Ethanol	94	103	70-130	9	0-30	

RPD - Relative Percent Difference , CL - Control Limit





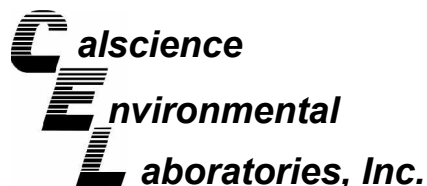

## Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.  
1680 Rogers Avenue  
San Jose, CA 95112-1105


Date Received: 05/09/08  
Work Order No: 08-05-0900  
Preparation: EPA 5030B  
Method: LUFT GC/MS / EPA  
8260B


Project 999 San Pablo Ave., Albany, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
08-05-1011-5	Aqueous	GC/MS LL	05/14/08	05/14/08	080514S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	97	98	70-130	0	0-30	
Ethylbenzene	98	99	70-130	2	0-30	
Toluene	98	99	70-130	1	0-30	
p/m-Xylene	99	99	70-130	0	0-30	
o-Xylene	97	100	70-130	2	0-30	
Methyl-t-Butyl Ether (MTBE)	95	102	70-130	7	0-30	
Tert-Butyl Alcohol (TBA)	87	98	70-130	12	0-30	
Diisopropyl Ether (DIPE)	98	102	70-130	4	0-30	
Ethyl-t-Butyl Ether (ETBE)	96	101	70-130	5	0-30	
Tert-Amyl-Methyl Ether (TAME)	95	103	70-130	8	0-30	
Ethanol	89	98	70-130	10	0-30	

RPD - Relative Percent Difference , CL - Control Limit



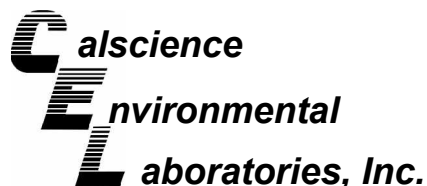

## Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.  
1680 Rogers Avenue  
San Jose, CA 95112-1105


Date Received: N/A  
Work Order No: 08-05-0900  
Preparation: EPA 5030B  
Method: LUFT GC/MS / EPA 8260B

Project: 999 San Pablo Ave., Albany, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-12-715-340	Aqueous	GC/MS LL	05/13/08	05/13/08	080513L02

<u>Parameter</u>	<u>LCS %REC</u>	<u>LCSD %REC</u>	<u>%REC CL</u>	<u>RPD</u>	<u>RPD CL</u>	<u>Qualifiers</u>
TPPH	94	93	65-135	2	0-30	
Benzene	101	99	70-130	1	0-30	
Ethylbenzene	104	99	70-130	5	0-30	
Toluene	103	101	70-130	2	0-30	
p/m-Xylene	105	100	70-130	5	0-30	
o-Xylene	108	104	70-130	4	0-30	
Methyl-t-Butyl Ether (MTBE)	104	107	70-130	2	0-30	
Tert-Butyl Alcohol (TBA)	110	106	70-130	4	0-30	
Diisopropyl Ether (DIPE)	106	106	70-130	1	0-30	
Ethyl-t-Butyl Ether (ETBE)	105	106	70-130	0	0-30	
Tert-Amyl-Methyl Ether (TAME)	106	107	70-130	1	0-30	
Ethanol	104	111	70-130	7	0-30	

RPD - Relative Percent Difference , CL - Control Limit

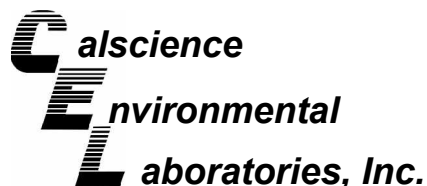

## Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.  
1680 Rogers Avenue  
San Jose, CA 95112-1105

Date Received: N/A  
Work Order No: 08-05-0900  
Preparation: EPA 5030B  
Method: LUFT GC/MS / EPA 8260B

Project: 999 San Pablo Ave., Albany, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-12-715-344	Aqueous	GC/MS LL	05/14/08	05/14/08	080514L01

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
TPPH	98	99	65-135	1	0-30	
Benzene	99	96	70-130	4	0-30	
Ethylbenzene	101	103	70-130	2	0-30	
Toluene	102	100	70-130	2	0-30	
p/m-Xylene	102	104	70-130	2	0-30	
o-Xylene	104	107	70-130	3	0-30	
Methyl-t-Butyl Ether (MTBE)	102	101	70-130	1	0-30	
Tert-Butyl Alcohol (TBA)	98	98	70-130	0	0-30	
Diisopropyl Ether (DIPE)	107	102	70-130	4	0-30	
Ethyl-t-Butyl Ether (ETBE)	104	100	70-130	3	0-30	
Tert-Amyl-Methyl Ether (TAME)	104	103	70-130	2	0-30	
Ethanol	97	104	70-130	7	0-30	

RPD - Relative Percent Difference , CL - Control Limit

Work Order Number: 08-05-0900

<u>Qualifier</u>	<u>Definition</u>
*	See applicable analysis comment.
1	Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification.
2	Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification.
3	Recovery of the Matrix Spike (MS) or Matrix Spike Duplicate (MSD) compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification.
4	The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification.
5	The PDS/PDSD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported with no further corrective action required.
A	Result is the average of all dilutions, as defined by the method.
B	Analyte was present in the associated method blank.
C	Analyte presence was not confirmed on primary column.
E	Concentration exceeds the calibration range.
H	Sample received and/or analyzed past the recommended holding time.
J	Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
N	Nontarget Analyte.
ND	Parameter not detected at the indicated reporting limit.
Q	Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater.
U	Undetected at the laboratory method detection limit.
X	% Recovery and/or RPD out-of-range.
Z	Analyte presence was not confirmed by second column or GC/MS analysis.



LAB (LOCATION)

- CALSCIENCE ( \_\_\_\_\_ )
- SPL ( \_\_\_\_\_ )
- XENCO ( \_\_\_\_\_ )
- TEST AMERICA ( \_\_\_\_\_ )
- OTHER ( \_\_\_\_\_ )



# Shell Oil Products Chain Of Custody Record

Please Check Appropriate Box:

<input checked="" type="checkbox"/> ENV. SERVICES	<input type="checkbox"/> MOTIVA RETAIL	<input type="checkbox"/> SHELL RETAIL
<input type="checkbox"/> MOTIVA SD&CM	<input type="checkbox"/> CONSULTANT	<input type="checkbox"/> LUBES
<input type="checkbox"/> SHELL PIPELINE	<input type="checkbox"/> OTHER _____	

Print Bill To Contact Name: **Denis Brown**

INCIDENT # (ENV SERVICES): 9 8 9 9 5 1 4 3

DATE: 5/6/08

PAGE: 1 of 1

SAMPLING COMPANY: **Blaine Tech Services** LOG CODE: **BTSS**

ADDRESS: **1680 Rogers Ave, San Jose, CA 95112**

PROJECT CONTACT (Hardcopy or PDF Report to): **Michael Ninokata**

TELEPHONE: (408)573-0555 FAX: (408)573-7771 E-MAIL: mninokata@blainetech.com

STATE: **CA** GLOBAL ID NO.: **T0600101277**

SITE ADDRESS: Street and City: **999 San Pablo Ave., Albany**

EDF DELIVERABLE TO (Name, Company, Office Location): **Dennis Baertshi, CRA, Eureka Office** PHONE NO.: **707-268-3813** E-MAIL: **sonomaedf@croworld.com** CONSULTANT PROJECT NO.: **080506-ED1**

SAMPLER NAME(S) (Print): **B. Doshier** LAB USE ONLY: **05-0900**

TURNAROUND TIME (CALENDAR DAYS):  
 STANDARD (14 DAY)  5 DAYS  3 DAYS  2 DAYS  24 HOURS  RESULTS NEEDED ON WEEKEND

LA - RWQCB REPORT FORMAT  UST AGENCY:

SPECIAL INSTRUCTIONS OR NOTES :  
 Run TPH-d w/Silica Gel Clean Up

SHELL CONTRACT RATE APPLIES  
 STATE REIMBURSEMENT RATE APPLIES  
 EDD NOT NEEDED  
 RECEIPT VERIFICATION REQUESTED


REQUESTED ANALYSIS

LAB USE ONLY	Field Sample Identification	SAMPLING		MATRIX	PRESERVATIVE					NO. OF CONT.	REQUESTED ANALYSIS												TEMPERATURE ON RECEIPT °C	Container PID Readings or Laboratory Notes												
		DATE	TIME		HCL	HNO3	H2SO4	NONE	OTHER		TPH - Purgeable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)	Ethanol (8260B)			Methanol (8015M)											
		1	S-2		5/6/08	1345	W	X								X	X	X																		
2	S-3		1235	W	X							X	X	X																						
3	S-6		1045	W	X							X	X	X																						
4	S-9		1345	W	X							X	X	X																						

Relinquished by: (Signature)	Received by: (Signature)	Date: 5/6/08	Time: 1439
Relinquished by: (Signature)  (Sample Custodian)	Received by: (Signature)	Date: 5/8/08	Time: 1505
Relinquished by: (Signature)	Received by: (Signature)	Date: 5-9-08	Time: 1030

650 105774202

05/2/06 Revision

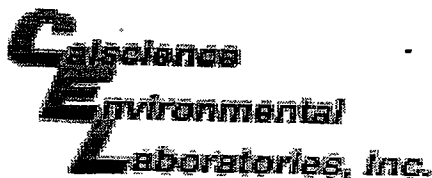

WORK ORDER #: 08 - 05 - 0900

Cooler 1 of 1

SAMPLE RECEIPT FORM

CLIENT: Blaine Tech

DATE: 5/9/08

TEMPERATURE - SAMPLES RECEIVED BY:

CALSCIENCE COURIER:

- Chilled, cooler with temperature blank provided.
Chilled, cooler without temperature blank.
Chilled and placed in cooler with wet ice.
Ambient and placed in cooler with wet ice.
Ambient temperature.
C Temperature blank.

LABORATORY (Other than Calscience Courier):

- 3.1 C Temperature blank.
C IR thermometer.
Ambient temperature.

Initial: JP

CUSTODY SEAL INTACT:

Sample(s): Cooler: No (Not Intact): Not Present: [check]

Initial: JP

SAMPLE CONDITION:

Table with 4 columns: Item, Yes, No, N/A. Rows include Chain-Of-Custody document(s), Sampler's name, Sample container label(s), Sample container(s) intact, Correct containers and volume, Proper preservation, VOA vial(s) free of headspace, Tedlar bag(s) free of condensation.

Initial: JP

COMMENTS:

Blank lines for handwritten comments.

# SHELL WELLHEAD INSPECTION FORM

## (FOR SAMPLE TECHNICIAN)

Site Address 999 San Pablo Ave Albany CA. Date 5/6/08

Job Number 080506-BD1 Technician B. Doshier Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
<sup>2</sup> S-1	X	X							DO
<sup>6</sup> S-2		X	X						
<sup>5</sup> S-3	X	X							
<sup>1</sup> S-4	X								CHRISSEY BOX
<sup>2</sup> S-6	X								CHRISSEY BOX
S-7								X	PAVED OVER
<sup>4</sup> S-8	X	X							
<sup>3</sup> S-9	X	X							

\*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: S-4 TAG is present, but not secure; lid does NOT indicate "monitoring well"  
S-6 same as S-4

# WELL GAUGING DATA

Project # 080506-TSDI Date 05/26/08 Client shell

Site 999 San Pablo Ave, Albany CA.

Well ID	Time ↙	Well Size (in.) ↗	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or <u>TOC</u>	Notes
S-1	3	0841					8.00	11.50		GO DO
S-2	3	0940	ODOR	6.29	.01	14 mL	6.30	11.30		DO
S-3	3	0929					8.00	11.90		DO
S-4	3	1009	* Gauged out of order, TRAFFIC *				7.19	13.71		GO TRAFFIC
S-6	3	1023	↓		↓		↓ 6.60	14.60		TRAFFIC
S-7	*	PAVED		OVER *			—	—		
S-8	4	0915	ODOR & Sheen	10.46	0.04	98 mL	10.50	15.60		VSPH
S-9	2	0900					10.49	15.90		



## SHELL WELL MONITORING DATA SHEET

BTS #: <u>080506-BD1</u>	Site: <u>48995143</u>
Sampler: <u>B.D.</u>	Date: <u>5/6/08</u>
Well I.D.: <u>5-1</u>	Well Diameter: 2 <u>3</u> 4 6 8 <u>    </u>
Total Well Depth (TD): <u>11.50</u>	Depth to Water (DTW): <u>8.00</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): <u>YST</u> HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:	

Purge Method: Bailer  Water  Sampling Method: Bailer   
 Disposable Bailer  Peristaltic  Disposable Bailer   
 Positive Air Displacement  Extraction Pump  Extraction Port   
 Electric Submersible  Other  Other:  Dedicated Tubing

_____ (Gals.) X _____ = _____ Gals. 1 Case Volume      Specified Volumes      Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius<sup>2</sup> * 0.163</td> </tr> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius <sup>2</sup> * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius <sup>2</sup> * 0.163														

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
						<i>* GAUGE ONLY *</i>
						<i>* Pre-purge D.O. *</i>

Did well dewater? Yes  No  Gallons actually evacuated:

Sampling Date:  Sampling Time:  Depth to Water:

Sample I.D.:  Laboratory: STL Other

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

EB I.D. (if applicable):  @  Time  Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Other:

D.O. (if req'd): Pre-purge: <u>0.1</u> mg/L	Post-purge: <del>                    </del> mg/L
O.R.P. (if req'd): Pre-purge: <del>                    </del> mV	Post-purge: <del>                    </del> mV

## SHELL WELL MONITORING DATA SHEET

BTS #: <u>080506-13D1</u>	Site: <u>98995143</u>
Sampler: <u>BD</u>	Date: <u>5/6/08</u>
Well I.D.: <u>S-2</u>	Well Diameter: 2 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): <u>11.30</u>	Depth to Water (DTW): <u>6.30</u>
Depth to Free Product: <u>6.29</u>	Thickness of Free Product (feet): <u>0.01</u>
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): <u>YST</u> HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>7.30</u>	

Purge Method: Bailer       Waterra       Sampling Method:  Bailer  
~~X~~ Disposable Bailer       Peristaltic       Disposable Bailer   
 Positive Air Displacement       Extraction Pump       Extraction Port   
 Electric Submersible       Other \_\_\_\_\_      Dedicated Tubing   
 Other: \_\_\_\_\_

1.8 (Gals.) X 3 = 5.4 Gals.  
 1 Case Volume      Specified Volumes      Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius <sup>2</sup> * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u> )	Turbidity (NTUs)	Gals. Removed	Observations
<u>1124</u>	<u>65.4</u>	<u>7.00</u>	<u>804.4</u>	<u>128</u>	<u>1.8</u>	<u>light orange in color</u>
<u>1126</u>	<u>64.4</u>	<u>6.83</u>	<u>797.2</u>	<u>123</u>	<u>3.6</u>	<u>heavy sheen</u>
<u>1128</u>	<u>64.2</u>	<u>6.82</u>	<u>800.7</u>	<u>97</u>	<u>5.4</u>	
	<u>* Bailed 14mL of sph &amp; 600 mL H<sub>2</sub>O</u>					
	<u>Deposited into Drum on site *</u>					

Did well dewater?    Yes     No      Gallons actually evacuated: 5.4

Sampling Date: 5/6/08    Sampling Time: 1345    Depth to Water: 7.30

Sample I.D.: S-2      Laboratory:    STL    Other CAL SCI

Analyzed for: TPH-G BTEX MTBE    TPH-D    Other:

EB I.D. (if applicable): \_\_\_\_\_ @ \_\_\_\_\_ Time    Duplicate I.D. (if applicable): \_\_\_\_\_

Analyzed for:    TPH-G    BTEX    MTBE    TPH-D    Other:

D.O. (if req'd):	Pre-purge: <u>0.10</u> mg/L	Post-purge: <u>2.0</u> mg/L	
O.R.P. (if req'd):	Pre-purge: _____ mV	Post-purge: _____ mV	

## SHELL WELL MONITORING DATA SHEET

BTS #: <u>080506 - BDI</u>	Site: <u>9899 5134 <sup>43</sup> 137</u>
Sampler: <u>BD</u>	Date: <u>5/6/08</u>
Well I.D.: <u>5-3</u>	Well Diameter: 2 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): <u>11.90</u>	Depth to Water (DTW): <u>8.00</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): <u>SI</u> HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>8.78</u>	

Purge Method: Bailer  Disposable Bailer  Positive Air Displacement  Electric Submersible  Waterra  Peristaltic  Extraction Pump  Other \_\_\_\_\_

Sampling Method:  Bailer  Disposable Bailer  Extraction Port  Dedicated Tubing  Other: \_\_\_\_\_

$\frac{1.4 \text{ (Gals.)} \times 3}{1 \text{ Case Volume}} = 4.2 \text{ Gals.}$ <p style="text-align: center; margin: 0;">Specified Volumes      Calculated Volume</p>	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius<sup>2</sup> * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius <sup>2</sup> * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius <sup>2</sup> * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u> )	Turbidity (NTUs)	Gals. Removed	Observations
<u>1215</u>	<u>66.7</u>	<u>6.93</u>	<u>572.8</u>	<u>149</u>	<u>1.4</u>	<u>orange color</u>
<u>1217</u>	<u>67.8</u>	<u>6.87</u>	<u>566.8</u>	<u>149</u>	<u>2.8</u>	<u>clear</u>
<u>1220</u>	<u>67.9</u>	<u>6.87</u>	<u>564.2</u>	<u>113</u>	<u>4.2</u>	
<u>* Well dewatered @ 4.2 gal *</u>						

Did well dewater?  Yes  No BD Gallons actually evacuated: 4.2

Sampling Date: 5/6/08 Sampling Time: 1235 Depth to Water: 8.78

Sample I.D.: 5-3 Laboratory: STL Other: CALSCI

Analyzed for:  TPH-G  BTEX  MTBE  TPH-D Other: \_\_\_\_\_

EB I.D. (if applicable): \_\_\_\_\_ @ \_\_\_\_\_ Time Duplicate I.D. (if applicable): \_\_\_\_\_

Analyzed for:  TPH-G  BTEX  MTBE  TPH-D Other: \_\_\_\_\_

D.O. (if req'd):	Pre-purge: <u>0.2</u> mg/L	Post-purge: <u>1.4</u> mg/L	
O.R.P. (if req'd):	Pre-purge: _____ mV	Post-purge: _____ mV	

## SHELL WELL MONITORING DATA SHEET

BTS #: <u>080506 - BDI</u>	Site: <u>98995143</u>
Sampler: <u>BD</u>	Date: <u>5/6/08</u>
Well I.D.: <u>5-6</u>	Well Diameter: 2 <input checked="" type="radio"/> 4 <input type="radio"/> 6 <input type="radio"/> 8 <input type="radio"/>
Total Well Depth (TD): <u>14.60</u>	Depth to Water (DTW): <u>6.60</u>
Depth to Free Product:	Thickness of Free Product (feet): <u>1.6</u>
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI <input type="checkbox"/> HACH <input type="checkbox"/>
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>8.20</u>	

Purge Method: Bailer  Disposable Bailer  Positive Air Displacement  Electric Submersible

Watterra: Peristaltic  Extraction Pump  Other \_\_\_\_\_

Sampling Method: Bailer  Disposable Bailer  Extraction Port  Dedicated Tubing  Other: \_\_\_\_\_

$\frac{2.9 \text{ (Gals.)} \times 3}{1 \text{ Case Volume}} = \frac{8.7 \text{ Gals.}}{\text{Specified Volumes}} = \text{Calculated Volume}$	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius<sup>2</sup> * 0.163</td> </tr> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius <sup>2</sup> * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius <sup>2</sup> * 0.163														

Time	Temp (°F)	pH	Cond. (mS or $\mu$ S)	Turbidity (NTUs)	Gals. Removed	Observations
1037	67.3	7.16	907.3	>1000	2.9	DARK GLEY
1039	67.2	7.08	895.7	>1000	5.8	
1041	67.2	7.08	894.4	>1000	8.7	

Did well dewater? Yes  No  Gallons actually evacuated: 8.7

Sampling Date: 5/6/08 Sampling Time: 1045 Depth to Water: 8.12

Sample I.D.: 5-6 Laboratory: STL Other CAL SCI

Analyzed for: TPH-G BTEX MTBE TPH-D Other: \_\_\_\_\_

EB I.D. (if applicable): \_\_\_\_\_ @ \_\_\_\_\_ Time Duplicate I.D. (if applicable): \_\_\_\_\_

Analyzed for: TPH-G BTEX MTBE TPH-D Other: \_\_\_\_\_

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

## SHELL WELL MONITORING DATA SHEET

BTS #: <u>080506 - B01</u>	Site: <u>98995743</u>
Sampler: <u>B.D.</u>	Date: <u>5/6/08</u>
Well I.D.: <u>5-7</u>	Well Diameter: 2 3 4 6 8 <u>    </u>
Total Well Depth (TD): <u>    </u>	Depth to Water (DTW): <u>    </u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): <u>YSI</u> <u>HACH</u>
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:	

Purge Method: ~~Bailer~~ ~~Disposable Bailer~~ ~~Positive Air Displacement~~ ~~Electric Submersible~~ Water Peristaltic Extraction Pump Other      Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing Other

<u>    </u> (Gals.) X <u>    </u> = <u>    </u> Gals. 1 Case Volume      Specified Volumes      Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius<sup>2</sup> * 0.163</td> </tr> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius <sup>2</sup> * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius <sup>2</sup> * 0.163														

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
						<u>No gauge or sample, well paved over.</u>

Did well dewater?    Yes    No      Gallons actually evacuated:     

Sampling Date:           Sampling Time:           Depth to Water:     

Sample I.D.:           Laboratory: STL    Other     

Analyzed for: TPH-G BTEX MTBE TPH-D Other:     

EB I.D. (if applicable):      @      Time      Duplicate I.D. (if applicable):     

Analyzed for: TPH-G BTEX MTBE TPH-D Other:     

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

## SHELL WELL MONITORING DATA SHEET

BTS #: <u>080506 - BDI</u>	Site: <u>98995143</u>
Sampler: <u>B.D.</u>	Date: <u>5/6/08</u>
Well I.D.: <u>5-8</u>	Well Diameter: 2 3 <u>4</u> 6 8 <u>    </u>
Total Well Depth (TD): <u>15.60</u>	Depth to Water (DTW): <u>10.50</u>
Depth to Free Product: <u>10.46</u>	Thickness of Free Product (feet): <u>0.04</u>
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:	

Purge Method: <del>Bailer</del> <del>Disposable Bailer</del> <del>Positive Air Displacement</del> <del>Electric Submersible</del>	<del>Water</del> <del>Peristaltic</del> <del>Extraction Pump</del> Other: <u>    </u>	Sampling Method: <del>Bailer</del> <del>Disposable Bailer</del> <del>Extraction Port</del> <del>Dedicated Tubing</del> Other: <u>    </u>
--	--	---

(Gals.) X <u>SPH bail</u> = <u>    </u> Gals. 1 Case Volume      Specified Volumes      Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius<sup>2</sup> * 0.163</td> </tr> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius <sup>2</sup> * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius <sup>2</sup> * 0.163														

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
<u>0925</u>	<u>*</u>	<u>Removed</u>	<u>aprox 98 ml of SPH</u>			
			<u>&amp; 1.5 gal of H<sub>2</sub>O *</u>			
			<u>* Depos in drum on site *</u>			
			<u>* DID NOT SAMPLE DO TO Detected SPH *</u>			

Did well dewater? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	Gallons actually evacuated: <u>    </u>
Sampling Date: <u>    </u>	Sampling Time: <u>    </u>
Sample I.D.: <u>    </u>	Depth to Water: <u>    </u>
Analyzed for: TPH-G BTEX MTBE TPH-D Other: <u>    </u>	Laboratory: STL Other: <u>    </u>
EB I.D. (if applicable): <u>    </u> @ <u>    </u> Time	Duplicate I.D. (if applicable): <u>    </u>
Analyzed for: TPH-G BTEX MTBE TPH-D Other: <u>    </u>	
D.O. (if req'd): Pre-purge: <u>    </u> mg/L	Post-purge: <u>    </u> mg/L
O.R.P. (if req'd): Pre-purge: <u>    </u> mV	Post-purge: <u>    </u> mV

## SHELL WELL MONITORING DATA SHEET

BTS #: <u>080506-BD1</u>	Site: <u>9899.5143</u>
Sampler: <u>B.D</u>	Date: <u>5/6/08</u>
Well I.D.: <u>S-9</u>	Well Diameter: <u>2</u> 3 4 6 8 _____
Total Well Depth (TD): <u>15.90</u>	Depth to Water (DTW): <u>10.49</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <sup>5.47</sup> <u>11.57</u>	

Purge Method:  Bailer  Disposable Bailer  Positive Air Displacement  Electric Submersible

Watertra  Peristaltic  Extraction Pump  Other \_\_\_\_\_

Sampling Method:  Bailer  Disposable Bailer  Extraction Port  Dedicated Tubing

Other: \_\_\_\_\_

$0.8 \text{ (Gals.)} \times 3 = 2.4 \text{ Gals.}$ 1 Case Volume      Specified Volumes      Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius<sup>2</sup> * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius <sup>2</sup> * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius <sup>2</sup> * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u> )	Turbidity (NTUs)	Gals. Removed	Observations
1311	65.3	7.01	606.1	431	0.8	cloudy
1313	65.2	6.99	599.2	1000	1.6	Brown
1315	64.7	7.00	600.7	1000	2.4	sitty
* Well dewatered @ 2.4 gals *						

Did well dewater?  Yes    No    Gallons actually evacuated: 2.4

Sampling Date: 5/6/08    Sampling Time: 1345    Depth to Water: 12.34 Traffic  
~~10.00~~ <sup>20</sup>

Sample I.D.: S-9    Laboratory: STL    Other: CAL SCI

Analyzed for:  TPH-G     BTEX     MTBE    TPH-D    Other:

EB I.D. (if applicable): @ Time    Duplicate I.D. (if applicable):

Analyzed for: TPH-G    BTEX    MTBE    TPH-D    Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

# SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 999 San Pablo Ave. Albany Date 4-30-08  
 Job Number 080430-EC1 Technician EC Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
S-8	<input checked="" type="checkbox"/>								

\*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: \_\_\_\_\_



# WELL GAUGING DATA

Project # 080430-EC1 Date 4-30-08 Client shell

Site 999 San Pablo Ave. Albany

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or <u>TOC</u>	Notes
S-8	0845	4	odor	10.84	.07	172	10.91	15.61		



# SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 999 San Pablo Ave., Albany Date 3/20/08  
 Job Number 080320-PLZ Technician P. Lonnish Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
S-8	X	X							

\*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: \_\_\_\_\_

# WELL GAUGING DATA

Project # 080320-PC1      Date 13/20/08      Client Swell

Site 999 San Pablo Ave., Albany

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	Notes
S-8	1405	4	odor	10.10	.12	295	10.22	—	TOC	

## SHELL WELL MONITORING DATA SHEET

BTS #: 080720-PC2	Site: 98995143
Sampler: PC	Date: 3/20/08
Well I.D.: 5-2	Well Diameter: 2 3 <u>4</u> 6 8
Total Well Depth (TD): 11	Depth to Water (DTW): 10.22
Depth to Free Product: 10.10	Thickness of Free Product (feet): 0.12
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]:	

Purge Method: Bailer Disposable Bailer Positive Air Displacement Electric Submersible	Waterra Peristaltic Extraction Pump Other _____	Sampling Method: Bailer Disposable Bailer Extraction Port Dedicated Tubing Other: _____
--	--	---

*SPH Bailer*

_____ (Gals.) X _____	= _____ Gals.	_____
1 Case Volume	Specified Volumes	Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius <sup>2</sup> * 0.163

Time	Temp (°F)	pH	Cond. (mS or µS)	Turbidity (NTUs)	Gals. Removed	Observations
		<i>29.5</i>				<i>30 ml SPH removed w/ Equal Water</i>

Did well dewater? Yes No	Gallons actually evacuated: _____
Sampling Date: _____	Sampling Time: _____
Sample I.D.: _____	Depth to Water: _____
Laboratory: STL Other _____	
Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____	
EB I.D. (if applicable): _____ @ _____ Time	Duplicate I.D. (if applicable): _____
Analyzed for: TPH-G BTEX MTBE TPH-D Other: _____	
D.O. (if req'd): Pre-purge: _____ mg/L	Post-purge: _____ mg/L
O.R.P. (if req'd): Pre-purge: _____ mV	Post-purge: _____ mV

**Attachment B**

**Groundwater Monitoring Results - ARCO**

**Table 1. Summary of Ground-Water Monitoring Data: Relative Water Elevations and Laboratory Analyses**  
**Station #2035, 1001 San Pablo Ave., Albany, CA**

Well and Sample Date	P/NP	TOC Elevation (feet msl)	Depth to Water (feet bgs)	Product Thickness (feet)	Water Level Elevation (feet msl)	Concentrations in (µg/L)						DO (mg/L)	Lab	pH	Comments
						GRO/TPHg	Benzene	Toluene	Ethyl-Benzene	Total Xylenes	MTBE				
<b>MW-1</b>															
4/11/2002	P	41.41	10.73	--	30.68	800	360	<5.0	<5.0	<5.0	<50	--	--	--	
11/27/2002	P	41.41	10.22	--	31.19	<50	<0.50	<0.50	<0.50	<0.50	1.7	1.1	--	--	
6/3/2003	--	41.41	9.14	--	32.27	1,700	430	<5.0	24	11	8.6	1.7	--	--	
11/13/2003	P	43.55	10.17	--	33.38	<50	<0.50	<0.50	<0.50	<0.50	0.95	2.3	SEQM	6.5	a
05/12/2004	P	43.55	9.28	--	34.27	120	7.2	<0.50	<0.50	<0.50	3.0	1.6	SEQM	6.0	
12/01/2004	P	43.55	9.16	--	34.39	<50	0.94	<0.50	<0.50	1.1	2.4	5.2	SEQM	6.6	
05/02/2005	P	43.55	8.58	--	34.97	1,300	390	<5.0	12	6.4	8.8	2.8	SEQM	6.5	
11/16/2005	P	43.55	9.50	--	34.05	<50	<0.50	<0.50	<0.50	0.54	0.92	1.7	SEQM	6.4	
5/31/2006	P	43.55	7.36	--	36.19	850	200	<2.5	5.4	<2.5	4.0	2.4	SEQM	6.5	
12/6/2006	P	43.55	9.91	--	33.64	<50	0.52	<0.50	<0.50	<0.50	0.72	4.50	TAMC	6.99	
5/15/2007	P	43.55	9.65	--	33.90	67	6.6	<0.50	<0.50	<0.50	1.8	2.43	TAMC	6.96	
11/29/2007	P	43.55	9.11	--	34.44	<50	<0.50	<0.50	<0.50	<0.50	0.98	4.51	TAMC	6.81	
<b>5/6/2008</b>	<b>P</b>	<b>43.55</b>	<b>8.25</b>	<b>--</b>	<b>35.30</b>	<b>890</b>	<b>140</b>	<b>0.53</b>	<b>5.4</b>	<b>5.8</b>	<b>&lt;0.50</b>	<b>1.89</b>	<b>CEL</b>	<b>6.61</b>	
<b>MW-2</b>															
4/11/2002	P	40.38	11.05	--	29.33	<50	<0.50	<0.50	<0.50	<0.50	24	--	--	--	
11/27/2002	P	40.38	10.51	--	29.87	<50	<0.50	<0.50	<0.50	<0.50	5.4	2.6	--	--	
6/3/2003	--	40.38	9.78	--	30.60	<50	<0.50	<0.50	<0.50	<0.50	23	1.7	--	--	
11/13/2003	P	42.52	10.69	--	31.83	<50	<0.50	<0.50	<0.50	<0.50	9.5	2.3	SEQM	6.5	a
05/12/2004	P	42.52	10.34	--	32.18	<250	<2.5	<2.5	<2.5	<2.5	27	2.2	SEQM	6.6	
12/01/2004	P	42.52	10.28	--	32.24	<50	<0.50	<0.50	<0.50	0.70	17	3.9	SEQM	6.6	
05/02/2005	P	42.52	9.50	--	33.02	<50	<0.50	<0.50	<0.50	<0.50	25	3.1	SEQM	6.6	
11/16/2005	P	42.52	10.50	--	32.02	<50	<0.50	<0.50	<0.50	0.50	7.6	2.8	SEQM	6.4	
5/31/2006	P	42.52	10.03	--	32.49	<50	<0.50	<0.50	<0.50	<0.50	24	2.0	SEQM	6.6	
12/6/2006	P	42.52	10.28	--	32.24	<50	<0.50	<0.50	<0.50	<0.50	1.6	3.72	TAMC	6.91	
5/15/2007	P	42.52	10.00	--	32.52	<50	<0.50	<0.50	<0.50	<0.50	44	2.90	TAMC	6.69	
11/29/2007	P	42.52	10.13	--	32.39	<50	<0.50	<0.50	<0.50	<0.50	1.9	4.83	TAMC	6.89	
<b>5/6/2008</b>	<b>P</b>	<b>42.52</b>	<b>9.55</b>	<b>--</b>	<b>32.97</b>	<b>&lt;50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>35</b>	<b>1.88</b>	<b>CEL</b>	<b>6.62</b>	
<b>MW-3</b>															
4/11/2002	P	41.44	11.05	--	30.39	250	9.4	<0.50	<0.50	<0.50	120	--	--	--	

**Table 1. Summary of Ground-Water Monitoring Data: Relative Water Elevations and Laboratory Analyses**  
**Station #2035, 1001 San Pablo Ave., Albany, CA**

Well and Sample Date	P/NP	TOC Elevation (feet msl)	Depth to Water (feet bgs)	Product Thickness (feet)	Water Level Elevation (feet msl)	Concentrations in (µg/L)						DO (mg/L)	Lab	pH	Comments
						GRO/TPHg	Benzene	Toluene	Ethyl-Benzene	Total Xylenes	MTBE				
<b>MW-3 Cont.</b>															
11/27/2002	P	41.44	10.49	--	30.95	<100	<1.0	<1.0	<1.0	2.5	56	2.2	--	--	
6/3/2003	--	41.44	9.44	--	32.00	130	<0.50	<0.50	<0.50	<0.50	47	4.1	--	--	
11/13/2003	P	43.62	10.68	--	32.94	53	<0.50	<0.50	<0.50	<0.50	36	3.8	SEQM	6.8	a
05/12/2004	P	43.62	9.95	--	33.67	65	<0.50	<0.50	<0.50	<0.50	39	4.2	SEQM	6.9	
12/01/2004	P	43.62	10.32	--	33.30	140	<0.50	<0.50	<0.50	<0.50	37	4.3	SEQM	6.9	
05/02/2005	P	43.62	9.12	--	34.50	140	<0.50	<0.50	<0.50	<0.50	23	3.1	SEQM	6.7	
11/16/2005	P	43.62	10.58	--	33.04	<50	<0.50	<0.50	<0.50	<0.50	32	4.1	SEQM	6.5	
5/31/2006	P	43.62	9.41	--	34.21	<50	<0.50	<0.50	<0.50	<0.50	20	4.3	SEQM	6.8	
12/6/2006	P	43.62	10.25	--	33.37	<50	<0.50	<0.50	<0.50	<0.50	20	2.71	TAMC	7.00	
5/15/2007	P	43.62	9.70	--	33.92	<50	<0.50	<0.50	<0.50	<0.50	40	5.89	TAMC	7.07	
11/29/2007	P	43.62	10.08	--	33.54	90	<0.50	<0.50	<0.50	<0.50	35	4.74	TAMC	6.61	
<b>5/6/2008</b>	<b>P</b>	<b>43.62</b>	<b>10.02</b>	<b>--</b>	<b>33.60</b>	<b>&lt;50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>14</b>	<b>2.05</b>	<b>CEL</b>	<b>6.61</b>	
<b>MW-4</b>															
4/11/2002	NP	40.33	10.81	--	29.52	<50	<0.50	<0.50	<0.50	<0.50	11	--	--	--	
11/27/2002	NP	40.33	10.09	--	30.24	<50	<0.50	<0.50	<0.50	<0.50	6.5	1.8	--	--	
6/3/2003	--	40.33	8.62	--	31.71	<250	<2.5	<2.5	<2.5	<2.5	120	1.1	--	--	
11/13/2003	NP	42.48	9.98	--	32.50	<50	<0.50	<0.50	<0.50	<0.50	20	1.3	SEQM	6.2	a
05/12/2004	P	42.48	9.48	--	33.00	<250	<2.5	<2.5	<2.5	<2.5	79	2.9	SEQM	6.6	
12/01/2004	NP	42.48	9.60	--	32.88	<50	<0.50	<0.50	<0.50	<0.50	1.8	1.9	SEQM	6.7	
05/02/2005	NP	42.48	8.67	--	33.81	<50	<0.50	<0.50	<0.50	<0.50	11	2.8	SEQM	6.6	
11/16/2005	NP	42.48	10.00	--	32.48	<50	<0.50	<0.50	<0.50	<0.50	0.93	1.7	SEQM	6.3	
5/31/2006	NP	42.48	8.52	--	33.96	<50	<0.50	<0.50	<0.50	<0.50	2.4	1.0	SEQM	7.0	
12/6/2006	NP	42.48	9.90	--	32.58	<50	<0.50	<0.50	<0.50	<0.50	7.8	0.85	TAMC	7.10	
5/15/2007	NP	42.48	9.18	--	33.30	<50	<0.50	<0.50	<0.50	<0.50	2.2	1.37	TAMC	6.85	
11/29/2007	NP	42.48	9.10	--	33.38	<50	<0.50	<0.50	<0.50	<0.50	9.1	1.81	TAMC	7.14	
<b>5/6/2008</b>	<b>P</b>	<b>42.48</b>	<b>9.40</b>	<b>--</b>	<b>33.08</b>	<b>&lt;50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>10</b>	<b>2.61</b>	<b>CEL</b>	<b>6.91</b>	
<b>MW-5</b>															
4/11/2002	NP	41.84	10.63	--	31.21	<50	<0.50	<0.50	<0.50	<0.50	<5.0	--	--	--	
11/27/2002	NP	41.84	10.65	--	31.19	--	--	--	--	--	--	--	--	--	



**Table 1. Summary of Ground-Water Monitoring Data: Relative Water Elevations and Laboratory Analyses**  
**Station #2035, 1001 San Pablo Ave., Albany, CA**

Well and Sample Date	P/NP	TOC Elevation (feet msl)	Depth to Water (feet bgs)	Product Thickness (feet)	Water Level Elevation (feet msl)	Concentrations in (µg/L)						DO (mg/L)	Lab	pH	Comments
						GRO/TPHg	Benzene	Toluene	Ethyl-Benzene	Total Xylenes	MTBE				
<b>MW-5 Cont.</b>															
6/3/2003	--	41.84	8.92	--	32.92	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.8	--	--	
11/13/2003	NP	44.03	10.58	--	33.45	<50	<0.50	<0.50	<0.50	<0.50	0.79	1.4	SEQM	5.7	a
05/12/2004	--	44.03	9.95	--	34.08	--	--	--	--	--	--	--	--	--	
12/01/2004	NP	44.03	10.05	--	33.98	<50	<0.50	<0.50	<0.50	<0.50	0.55	1.8	SEQM	6.3	
05/02/2005	--	44.03	8.75	--	35.28	--	--	--	--	--	--	--	--	--	
11/16/2005	NP	44.03	10.37	--	33.66	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.3	SEQM	6.2	
5/31/2006	--	44.03	9.07	--	34.96	--	--	--	--	--	--	--	--	--	
12/6/2006	NP	44.03	10.25	--	33.78	<50	<0.50	<0.50	<0.50	<0.50	0.99	1.24	TAMC	6.88	
5/15/2007	--	44.03	9.51	--	34.52	--	--	--	--	--	--	--	--	--	
11/29/2007	NP	44.03	9.95	--	34.08	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.93	TAMC	6.98	
<b>5/6/2008</b>	<b>--</b>	<b>44.03</b>	<b>9.67</b>	<b>--</b>	<b>34.36</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	
<b>MW-6</b>															
4/11/2002	NP	40.13	11.42	--	28.71	<50	<0.50	<0.50	<0.50	<0.50	<5.0	--	--	--	
11/27/2002	NP	40.13	13.11	--	27.02	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.3	--	--	
6/3/2003	--	40.13	12.48	--	27.65	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.1	--	--	
11/13/2003	NP	42.26	13.11	--	29.15	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.2	SEQM	6.8	a
05/12/2004	--	42.26	12.68	--	29.58	--	--	--	--	--	--	--	--	--	
12/01/2004	NP	42.26	12.68	--	29.58	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.7	SEQM	7.3	
05/02/2005	--	42.26	12.25	--	30.01	--	--	--	--	--	--	--	--	--	
11/16/2005	NP	42.26	12.98	--	29.28	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.2	SEQM	6.7	
5/31/2006	--	42.26	12.35	--	29.91	--	--	--	--	--	--	--	--	--	
12/6/2006	NP	42.26	12.98	--	29.28	<50	<0.50	<0.50	<0.50	<0.50	<0.50	1.24	TAMC	6.86	
5/15/2007	--	42.26	12.55	--	29.71	--	--	--	--	--	--	--	--	--	
11/29/2007	NP	42.26	12.75	--	29.51	<50	<0.50	<0.50	<0.50	<0.50	<0.50	--	TAMC	6.93	
<b>5/6/2008</b>	<b>--</b>	<b>42.26</b>	<b>12.91</b>	<b>--</b>	<b>29.35</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	<b>--</b>	
<b>RW-1</b>															
4/11/2002	P	40.33	9.20	--	31.13	15,000	750	2,000	380	2,000	1,500	--	--	--	
11/27/2002	P	40.33	10.31	--	30.02	<2,500	720	<25	<25	<25	<25	1.8	--	--	
6/3/2003	--	40.33	9.54	--	30.79	470	78	0.97	4.3	9	48	1.4	--	--	

**Table 1. Summary of Ground-Water Monitoring Data: Relative Water Elevations and Laboratory Analyses**

**Station #2035, 1001 San Pablo Ave., Albany, CA**

Well and Sample Date	P/NP	TOC Elevation (feet msl)	Depth to Water (feet bgs)	Product Thickness (feet)	Water Level Elevation (feet msl)	Concentrations in (µg/L)						DO (mg/L)	Lab	pH	Comments
						GRO/TPHg	Benzene	Toluene	Ethyl-Benzene	Total Xylenes	MTBE				
<b>RW-1 Cont.</b>															
11/13/2003	P	42.35	10.35	--	32.00	130	29	<0.50	<0.50	<0.50	44	1.3	SEQM	6.6	a
05/12/2004	P	42.35	9.80	--	32.55	<250	66	<2.5	<2.5	<2.5	<2.5	1.9	SEQM	6.9	
09/02/2004	--	42.35	10.42	--	31.93	--	--	--	--	--	--	--	--	--	
10/07/2004	--	42.35	10.36	--	31.99	--	--	--	--	--	--	--	--	--	
11/04/2004	--	42.35	9.93	--	32.42	--	--	--	--	--	--	--	--	--	
12/01/2004	P	42.35	10.02	--	32.33	<250	96	<2.5	<2.5	<2.5	16	1.8	SEQM	6.7	
05/02/2005	P	42.35	9.20	--	33.15	230	100	<1.0	<1.0	<1.0	50	2.5	SEQM	6.6	
11/16/2005	P	42.35	10.96	--	31.39	<100	28	<1.0	<1.0	<1.0	32	1.0	SEQM	6.5	
5/31/2006	P	42.35	9.34	--	33.01	320	32	<0.50	<0.50	<0.50	28	1.3	SEQM	6.8	
12/6/2006	P	42.35	10.10	--	32.25	50	27	<0.50	<0.50	<0.50	19	1.49	TAMC	7.54	
5/15/2007	P	42.35	9.42	--	32.93	280	32	<0.50	<0.50	<0.50	18	2.61	TAMC	7.10	
11/29/2007	P	42.35	9.75	--	32.60	<50	14	<0.50	<0.50	<0.50	18	4.86	TAMC	8.14	
<b>5/6/2008</b>	<b>P</b>	<b>42.35</b>	<b>9.71</b>	<b>--</b>	<b>32.64</b>	<b>610</b>	<b>110</b>	<b>&lt;2.5</b>	<b>&lt;2.5</b>	<b>&lt;2.5</b>	<b>2.6</b>	<b>2.48</b>	<b>CEL</b>	<b>6.95</b>	
<b>S-5</b>															
4/11/2002	P	40.33	10.17	--	30.16	30,000	390	1,400	410	7,400	<500	--	--	--	
11/27/2002	P	40.33	9.77	--	30.56	55,000	1,300	450	1,400	13,000	<50	4.3	--	--	
6/3/2003	--	40.33	9.12	--	31.21	--	--	--	--	--	--	1.4	--	--	
6/3/2003	--	40.33	9.03	--	31.30	44,000	680	260	1,100	9,900	<25	1.9	--	--	
11/13/2003	P	41.83	9.12	--	32.71	31,000	520	120	690	5,900	<50	1.4	SEQM	6.5	a
05/12/2004	P	41.83	9.95	--	31.88	28,000	760	79	910	5,000	<50	1.9	SEQM	6.6	
12/01/2004	P	41.83	9.61	--	32.22	26,000	1,500	64	1,400	4,000	<25	--	SEQM	6.5	b
05/02/2005	P	41.83	8.80	--	33.03	13,000	700	18	260	1,300	<5.0	1.8	SEQM	6.4	
11/16/2005	P	41.83	9.80	--	32.03	15,000	1,400	25	570	850	<5.0	1.1	SEQM	6.3	
5/31/2006	P	41.83	8.89	--	32.94	9,800	170	<5.0	490	390	<5.0	1.4	SEQM	6.6	
12/6/2006	P	41.83	9.65	--	32.18	16,000	1,100	<25	1,700	970	<25	1.23	TAMC	6.95	
5/15/2007	P	41.83	8.89	--	32.94	10,000	140	<5.0	340	310	<5.0	3.63	TAMC	7.10	
11/29/2007	P	41.83	9.48	--	32.35	13,000	770	8.6	500	360	<2.5	5.42	TAMC	7.28	c (Benzene)
<b>5/6/2008</b>	<b>P</b>	<b>41.83</b>	<b>9.30</b>	<b>--</b>	<b>32.53</b>	<b>7,400</b>	<b>320</b>	<b>2.8</b>	<b>580</b>	<b>130</b>	<b>&lt;0.50</b>	<b>3.37</b>	<b>CEL</b>	<b>6.88</b>	

ABBREVIATIONS & SYMBOLS:

-- = Not analyzed/applicable/measured/available  
< = Not detected at or above laboratory reporting limit  
ft bgs = Feet below ground surface  
ft MSL = Feet above mean sea level  
BTEX = Benzene, toluene, ethylbenzene and xylenes  
DO = Dissolved oxygen  
DTW = Depth to water in ft bgs  
GRO = Gasoline range organics, range C4-C12  
GWE = Groundwater elevation measured in ft MSL  
mg/L = Milligrams per liter  
MTBE = Methyl tert butyl ether  
NP = Not purged before sampling  
P = Purged before sampling  
TOC = Top of casing measured in ft MSL  
TPH-g = Total petroleum hydrocarbons as gasoline, analyzed using EPA Method 8015, Modified  
µg/L = Micrograms per liter  
SEQ/SEQM = Sequoia Analytical/Sequoia Morgan Hill Laboratories

FOOTNOTES:

a = Site resurveyed by URS on 10/15/03 to NAVD '88  
b = Sheen in well  
c = Sample taken from VOA vial with air bubble >6mm

NOTES:

No sampling occurs at this site during the first and third quarters of each calendar year.

TPH-g analyzed using EPA Method 8015, Modified and BTEX and MTBE by EPA method 8260B.

Beginning in the fourth quarter 2003, the laboratory modified the reported analyte list. TPH-g was changed to GRO. The resulting data may be impacted by the potential of non-TPH-g analytes within the requested fuel range resulting in a higher concentration being reported.

Beginning in the second quarter 2004, the carbon range for GRO was changed from C6-C10 to C4-C12.

Values for DO and pH were obtained through field measurements.

Note: The data within this table collected prior to April 2006 was provided to Broadbent & Associates, Inc. by Atlantic Richfield Company and their previous consultants. Broadbent & Associates, Inc. has not verified the accuracy of this information.

**Table 2. Summary of Fuel Additives Analytical Data**  
**Station #2035, 1001 San Pablo Ave., Albany, CA**

Well and Sample Date	Concentrations in (µg/L)								Comments
	Ethanol	TBA	MTBE	DIPE	ETBE	TAME	1,2-DCA	EDB	
<b>MW-1</b>									
6/3/2003	<1000	<200	8.6	<5.0	<5.0	<5.0	<5.0	<5.0	
11/13/2003	<100	<20	0.95	<0.50	<0.50	<0.50	--	--	
05/12/2004	<100	<20	3.0	<0.50	<0.50	<0.50	<0.50	<0.50	
12/01/2004	<100	<20	2.4	<0.50	<0.50	<0.50	<0.50	<0.50	
05/02/2005	<1,000	220	8.8	<5.0	<5.0	<5.0	<5.0	<5.0	
11/16/2005	<100	<20	0.92	<0.50	<0.50	<0.50	<0.50	<0.50	a
5/31/2006	<1,500	<100	4.0	<2.5	<2.5	<2.5	<2.5	<2.5	a
12/6/2006	<300	<20	0.72	<0.50	<0.50	<0.50	<0.50	<0.50	
5/15/2007	<300	<20	1.8	<0.50	<0.50	<0.50	<0.50	<0.50	
11/29/2007	<300	<20	0.98	<0.50	<0.50	<0.50	<0.50	<0.50	
<b>5/6/2008</b>	<b>&lt;300</b>	<b>&lt;10</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	
<b>MW-2</b>									
6/3/2003	<100	<20	23	<0.50	<0.50	<0.50	0.94	<0.50	
11/13/2003	<100	<20	9.5	<0.50	<0.50	<0.50	--	--	
05/12/2004	<500	<100	27	<2.5	<2.5	<2.5	<2.5	<2.5	
12/01/2004	<100	<20	17	<0.50	<0.50	<0.50	0.74	<0.50	
05/02/2005	<100	75	25	<0.50	<0.50	<0.50	<0.50	<0.50	
11/16/2005	<100	<20	7.6	<0.50	<0.50	<0.50	0.79	<0.50	a
5/31/2006	<300	<20	24	<0.50	<0.50	<0.50	0.66	<0.50	a
12/6/2006	<300	<20	1.6	<0.50	<0.50	<0.50	<0.50	<0.50	a
5/15/2007	<300	<20	44	<0.50	<0.50	<0.50	1.2	<0.50	
11/29/2007	<300	<20	1.9	<0.50	<0.50	<0.50	<0.50	<0.50	
<b>5/6/2008</b>	<b>&lt;300</b>	<b>&lt;10</b>	<b>35</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>0.93</b>	<b>&lt;0.50</b>	
<b>MW-3</b>									
6/3/2003	<100	<20	47	<0.50	<0.50	<0.50	<0.50	<0.50	
11/13/2003	<100	<20	36	<0.50	<0.50	<0.50	--	--	
05/12/2004	<100	<20	39	<0.50	<0.50	<0.50	<0.50	<0.50	
12/01/2004	<100	<20	37	<0.50	<0.50	<0.50	<0.50	<0.50	
05/02/2005	<100	<20	23	<0.50	<0.50	<0.50	<0.50	<0.50	
11/16/2005	<100	<20	32	<0.50	<0.50	<0.50	<0.50	<0.50	a

**Table 2. Summary of Fuel Additives Analytical Data**  
**Station #2035, 1001 San Pablo Ave., Albany, CA**

Well and Sample Date	Concentrations in (µg/L)								Comments
	Ethanol	TBA	MTBE	DIPE	ETBE	TAME	1,2-DCA	EDB	
<b>MW-3 Cont.</b>									
5/31/2006	<300	<20	20	<0.50	<0.50	<0.50	<0.50	<0.50	a
12/6/2006	<300	<20	20	<0.50	<0.50	<0.50	<0.50	<0.50	a
5/15/2007	<300	<20	40	<0.50	<0.50	<0.50	<0.50	<0.50	
11/29/2007	<300	<20	35	<0.50	<0.50	<0.50	<0.50	<0.50	
<b>5/6/2008</b>	<b>&lt;300</b>	<b>&lt;10</b>	<b>14</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	
<b>MW-4</b>									
6/3/2003	<500	<100	120	<2.5	<2.5	<2.5	<2.5	<2.5	
11/13/2003	<100	<20	20	<0.50	<0.50	<0.50	--	--	
05/12/2004	<500	<100	79	<2.5	<2.5	<2.5	<2.5	<2.5	
12/01/2004	<100	<20	1.8	<0.50	<0.50	<0.50	<0.50	<0.50	
05/02/2005	<100	75	11	<0.50	<0.50	<0.50	<0.50	<0.50	
11/16/2005	<100	<20	0.93	<0.50	<0.50	<0.50	<0.50	<0.50	a
5/31/2006	<300	<20	2.4	<0.50	<0.50	<0.50	<0.50	<0.50	a
12/6/2006	<300	<20	7.8	<0.50	<0.50	<0.50	<0.50	<0.50	a
5/15/2007	<300	<20	2.2	<0.50	<0.50	<0.50	<0.50	<0.50	
11/29/2007	<300	<20	9.1	<0.50	<0.50	<0.50	<0.50	<0.50	
<b>5/6/2008</b>	<b>&lt;300</b>	<b>&lt;10</b>	<b>10</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	
<b>MW-5</b>									
6/3/2003	<100	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	
11/13/2003	<100	<20	0.79	<0.50	<0.50	<0.50	--	--	
12/01/2004	<100	<20	0.55	<0.50	<0.50	<0.50	<0.50	<0.50	
11/16/2005	<100	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	a
12/6/2006	<300	<20	0.99	<0.50	<0.50	<0.50	<0.50	<0.50	a
11/29/2007	<300	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	
<b>MW-6</b>									
6/3/2003	<100	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	
11/13/2003	<100	<20	<0.50	<0.50	<0.50	<0.50	--	--	
12/01/2004	<100	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	
11/16/2005	<100	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	a
12/6/2006	<300	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	a

**Table 2. Summary of Fuel Additives Analytical Data  
Station #2035, 1001 San Pablo Ave., Albany, CA**

Well and Sample Date	Concentrations in (µg/L)								Comments
	Ethanol	TBA	MTBE	DIPE	ETBE	TAME	1,2-DCA	EDB	
<b>MW-6 Cont.</b>									
11/29/2007	<300	<20	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	
<b>RW-1</b>									
6/3/2003	<100	22	48	<0.50	<0.50	<0.50	<0.50	<0.50	
11/13/2003	<100	<20	44	<0.50	<0.50	<0.50	--	--	
05/12/2004	<500	<100	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	
12/01/2004	<500	<100	16	<2.5	<2.5	<2.5	<2.5	<2.5	
05/02/2005	<200	<40	50	<1.0	<1.0	<1.0	<1.0	<1.0	
11/16/2005	<200	<40	32	<1.0	<1.0	<1.0	<1.0	<1.0	a
5/31/2006	<300	<20	28	<0.50	<0.50	<0.50	<0.50	<0.50	a
12/6/2006	<300	<20	19	<0.50	<0.50	<0.50	<0.50	<0.50	a
5/15/2007	<300	<20	18	<0.50	<0.50	<0.50	<0.50	<0.50	
11/29/2007	<300	<20	18	<0.50	<0.50	<0.50	<0.50	<0.50	
<b>5/6/2008</b>	<b>&lt;1,500</b>	<b>&lt;50</b>	<b>2.6</b>	<b>&lt;2.5</b>	<b>&lt;2.5</b>	<b>&lt;2.5</b>	<b>&lt;2.5</b>	<b>&lt;2.5</b>	
<b>S-5</b>									
6/3/2003	<5,000	<1,000	<25	<25	<25	<25	<25	<25	
11/13/2003	<10,000	<2,000	<50	<50	<50	<50	--	--	
05/12/2004	<10,000	<2,000	<50	<50	<50	<50	<50	<50	
12/01/2004	<5,000	<1,000	<25	<25	<25	<25	<25	<25	
05/02/2005	<1,000	<200	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	
11/16/2005	<1,000	<200	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	a
5/31/2006	<3,000	<200	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	a
12/6/2006	<15,000	<1,000	<25	<25	<25	<25	<25	<25	a
5/15/2007	<3,000	<200	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	
11/29/2007	<1,500	<100	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	
<b>5/6/2008</b>	<b>&lt;300</b>	<b>&lt;10</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	<b>&lt;0.50</b>	

ABBREVIATIONS & SYMBOLS:

-- = Not analyzed/applicable/measured/available

< = Not detected at or above the laboratory reporting limit

1,2-DCA = 1,2-Dichloroethane

DIPE = Di-isopropyl ether

EDB = 1,2-Dibromoethane

ETBE = Ethyl tert-butyl ether

MTBE = Methyl tert-butyl ether

TAME = tert-Amyl methyl ether

TBA = tert-Butyl alcohol

µg/L = Micrograms per Liter

FOOTNOTE:

a = Calibration verification for ethanol was within method limits but outside contract limits.

NOTES:

All volatile organic compounds analyzed using EPA Method 8260B.

Note: The data within this table collected prior to April 2006 was provided to Broadbent & Associates, Inc. by Atlantic Richfield Company and their previous consultants. Broadbent & Associates, Inc. has not verified the accuracy of this information.