Chevron

August 12, 1998

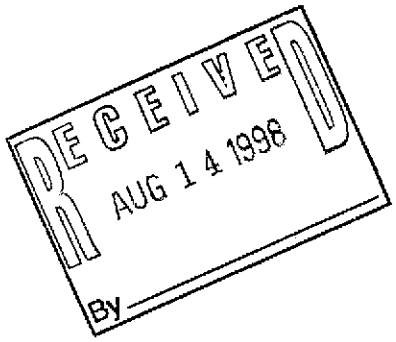

Chevron Products Company
6001 Bollinger Canyon Road
Building L, Room 1110
PO Box 6004
San Ramon, CA 94583-0904

Philip R. Briggs
Project Manager
Site Assessment & Remediation
Phone 925 842-9136
Fax 925 842-8370

Ms. Pam Evans
Alameda County Health Care Services
Department of Environmental Health
1131 Harbor Bay Parkway, Suite 250
Alameda, CA 94502-6577

#3628

Re: Chevron Service Station #9-0121
3026 Lakeshore Avenue
Oakland, California 94610

Dear Ms. Evans:

Enclosed is the Second Quarter Groundwater Monitoring Report for 1998, prepared by our consultant Blaine Tech Services, Inc. for the above noted site. The groundwater samples were analyzed for the presence of TPH-g, TPH-d, BTEX and MtBE constituents. Monitoring wells MW-5 and MW-6 are sampled semi-annually (1st and 3rd quarters), while wells MW-7 and MW-8 are sampled annually (1st quarter). The remaining four wells are sampled quarterly. All wells are measured for groundwater depth.

Monitoring wells MW-1 and MW-3 showed a decline in the benzene constituent from the previous sampling event, while it increased in well MW-4. A small amount of separate phase hydrocarbon (0.10 feet) was detected in monitoring well MW-2 with 0.01 gals of hydrocarbons removed. For the record, note that the diameter of monitoring wells MW-2, MW-3 and MW-4 is only ¾ inch. The chromatogram pattern for the TPH-d constituents detected in the ground water indicated an unidentified hydrocarbon.

Depth to groundwater varied from 1.83 feet to 9.97 feet below grade with a direction of flow predominately southwesterly.

Chevron will continue to monitor the wells in the sampling frequency as noted above. If you have any questions, please call me at (925) 842-9136.

Sincerely,
CHEVRON PRODUCTS COMPANY

Philip R. Briggs
Site Assessment and Remediation Project Manager

Enclosure

Cc. Mr. Bill Scudder, Chevron

BLAINE
TECH SERVICES INC.

1680 ROGERS AVENUE
SAN JOSE, CALIFORNIA 95112
(408) 573-7771 FAX
(408) 573-0555 PHONE

August 3, 1998

Phil Briggs
Chevron U.S.A. Products Company
P.O. Box 6004
San Ramon, CA 94583-0904

2nd Quarter 1998 Monitoring at 9-0121

Second Quarter 1998 Groundwater Monitoring at
Chevron Service Station Number 9-0121
3026 Lakeshore Avenue
Oakland, CA

Monitoring Performed on June 17, 1998

Groundwater Sampling Report **980617-C-3**

This report covers the routine monitoring of groundwater wells at this Chevron facility. Blaine Tech Services, Inc.'s work at the site includes inspection, gauging, evacuation, purgewater containment, sample collection and sample handling in accordance with standard procedures that conform to Regional Water Quality Control Board requirements.

Routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated volume of a three-case volume purge, elapsed evacuation time, total volume of water removed, and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purgewater is, likewise, collected and transported to McKittrick Waste Treatment Site for disposal.

Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL DATA AND ANALYTICAL RESULTS.** The full analytical report for the most recent samples is located in the **Analytical Appendix.** The table also contains new groundwater elevation calculations taken from the computer plotted gradient map which is located in the **Professional Engineering Appendix.**

At a minimum, Blaine Tech Services, Inc. field personnel are certified upon completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight hour refresher courses.

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. In order to avoid compromising the objectivity necessary for the proper and disinterested performance of this work, Blaine Tech Services, Inc. concentrates on objective data collection and does not participate in the interpretation of analytical results, the definition of geological or hydrological conditions, the formulation of recommendations, or the marketing of remedial systems.

Please call if you have any questions.

Yours truly,



Francis Thie
Vice President

FPT/ap

attachments: Professional Engineering Appendix
Cumulative Table of Well Data and Analytical Results
Analytical Appendix
Field Data Sheets

Professional Engineering Appendix

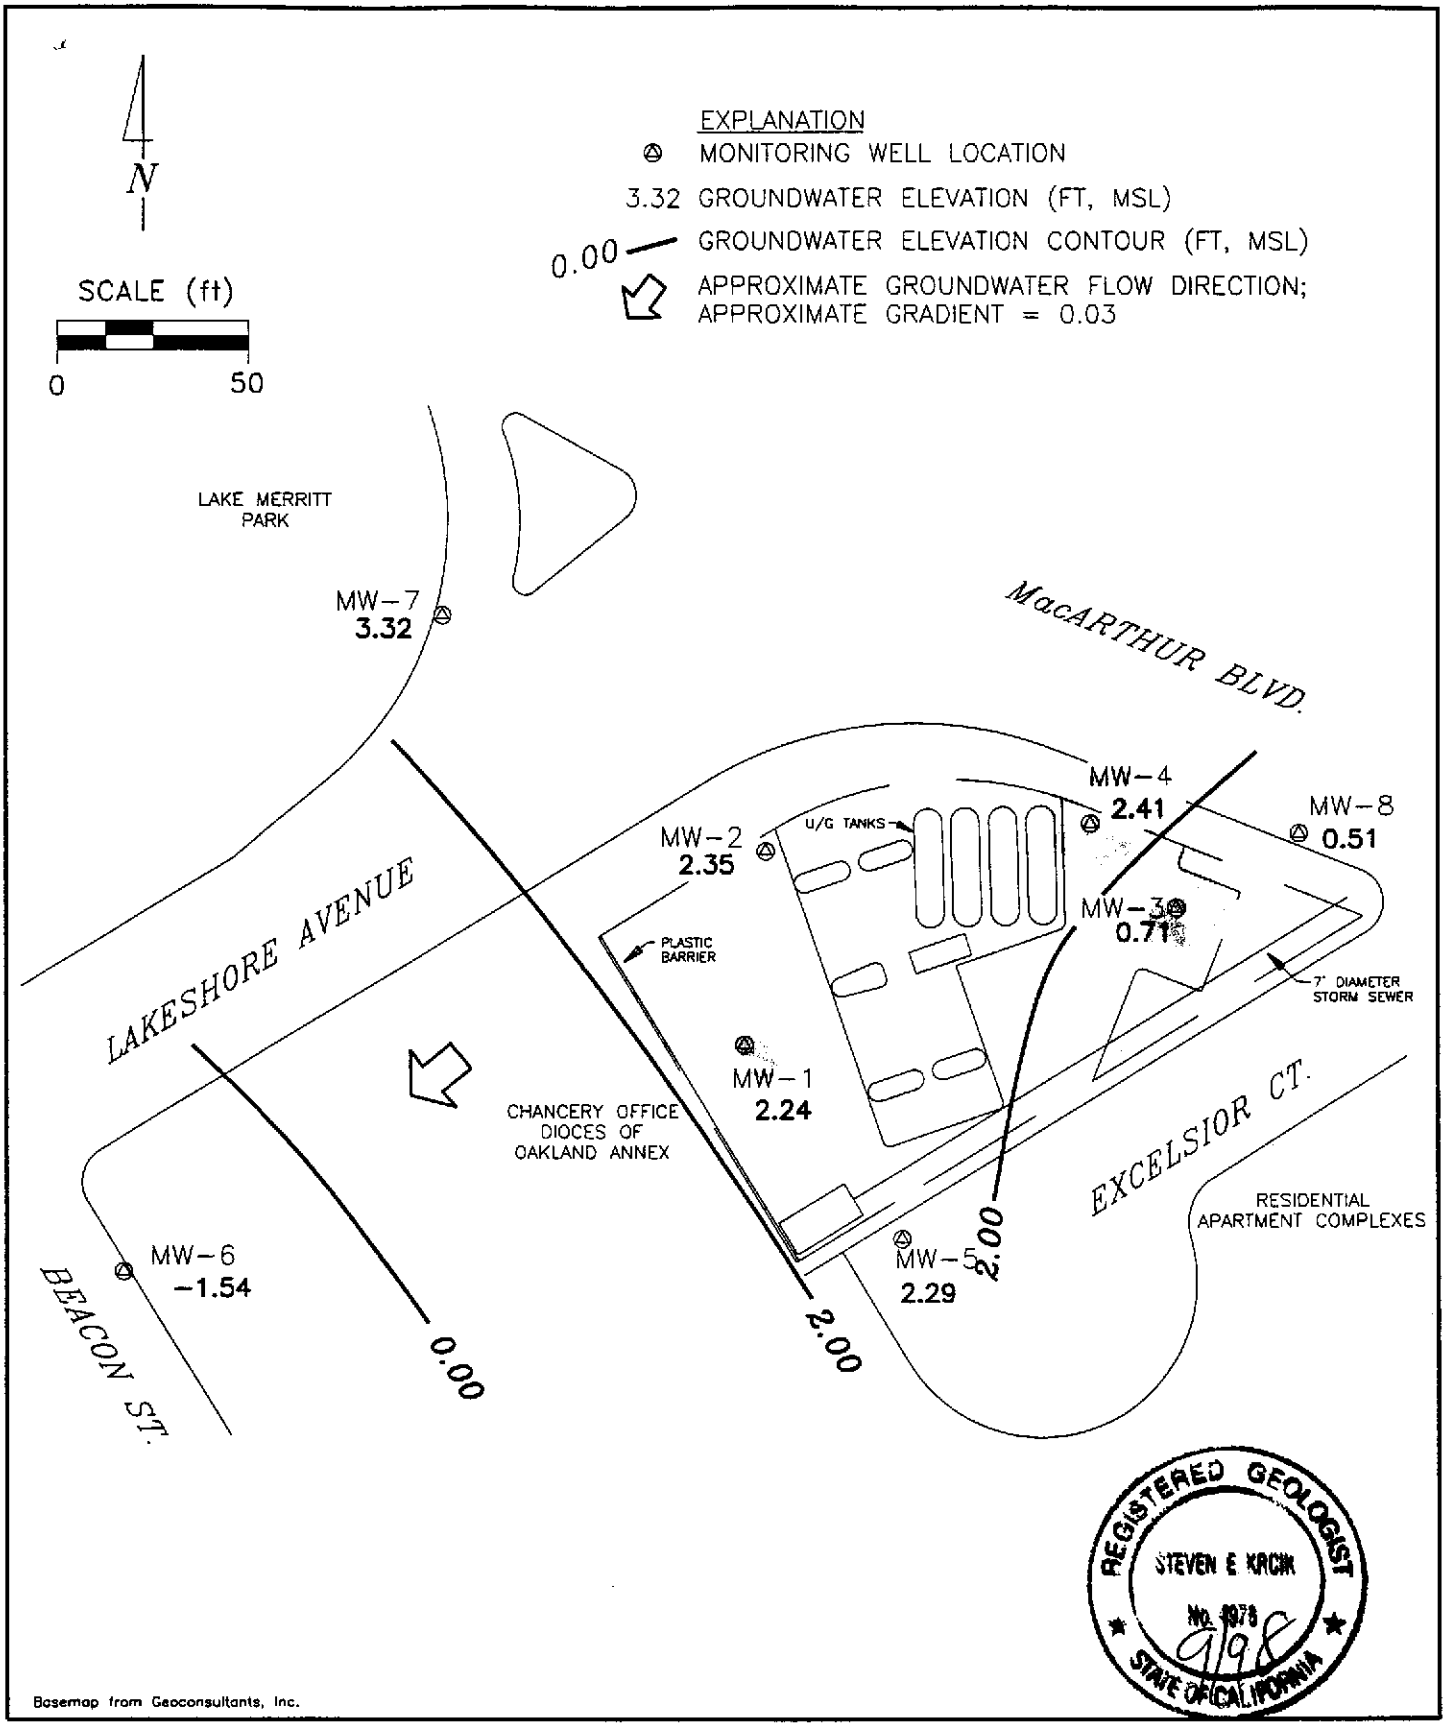

Basemap from Geoconsultants, Inc.

PREPARED BY RRM engineering contracting firm	Chevron Station 9-0121 3026 Lakeshore Avenue Oakland, California GROUNDWATER ELEVATION CONTOUR MAP, JUNE 17, 1998	FIGURE: 1 PROJECT: DAC04

Table of
Well Data and
Analytical Results

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-1															
08/20/91	6.82	1.62	5.20	--	--	--	--	5100	1700	21	220	34	260	--	--
09/30/91	6.82	1.15	5.67	Sheen	--	--	--	--	--	--	--	--	--	--	--
10/28/91	6.82	1.50	5.30	0.03	--	--	--	--	--	--	--	--	--	--	--
01/08/92	6.82	1.67	5.15	Sheen	--	--	--	5400	770	13	95	31	4400	--	--
01/13/92	6.82	--	--	--	--	--	--	--	--	--	--	--	--	--	--
06/23/92	6.89	1.48	5.41	--	--	--	--	7700	1500	40	230	100	2000	--	--
08/24/92	6.89	1.12	5.77	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	6.89	1.00	5.89	--	--	--	--	3500	1700	28	190	78	<50	--	--
10/26/92	6.89	0.95	5.94	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	6.89	2.18	4.71	--	--	--	--	60,000	7100	240	2000	1300	5500	--	--
01/08/93	6.89	--	--	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	6.89	2.17	4.72	--	--	--	--	530	1100	41	67	79	<10	--	--
06/11/93	6.89	5.37	5.07	--	--	--	--	7000	1900	33	120	69	--	840	9600
09/29/93	6.89	1.13	5.76	--	--	--	--	6600	1600	28	43	74	<10	--	--
12/20/93	6.89	1.74	5.15	--	--	--	--	6300	1900	36	82	65	<10	--	--
03/07/94	6.89	2.21	4.68	--	--	--	--	7700	1100	55	66	38	<10	--	12,000
06/17/94	6.89	1.83	5.06	--	--	--	--	4300	710	12	90	38	2200	--	--
09/12/94	6.89	1.24	5.65	--	--	--	--	6400	1500	<25	180	<25	2500	--	12,000
11/30/94	6.89	2.32	4.57	--	--	--	--	4900	690	26	97	60	2300*	--	3900
03/24/95	6.89	3.91	2.98	--	--	--	--	1800	160	7.3	11	14	1400**	--	1300
06/27/95	6.89	1.87	5.02	--	--	--	--	4600	1300	11	97	13	2300**	--	5100
09/28/95	6.89	1.59	5.30	--	--	--	--	6600	1500	<20	<20	<20	3900**	--	5800
12/19/95	6.89	2.21	4.68	--	--	--	--	3800	930	<10	100	<10	2600**	--	6300
02/28/96	6.89	3.27	3.62	--	--	--	--	3600	280	<5.0	18	5.5	1800**	--	2200
06/25/96	6.89	1.87	5.02	--	--	--	--	4700	1600	36	150	31	3000	--	3000
12/17/96	6.89	2.23	4.66	--	--	--	--	7800	1000	28	340	63	2700***	--	1200
03/31/97	6.89	2.01	4.88	--	--	--	--	5300	590	55	210	53	2200**	--	950
06/30/97	6.89	1.32	5.57	--	--	--	--	4400	350	<10	<10	11	2200**	--	580
09/12/97	6.89	1.56	5.33	--	--	--	--	3400	220	9.5	15	11	2300**	--	460
12/05/97	6.89	2.44	4.45	--	--	--	--	4700	870	21	120	18	1900**	--	750
02/16/98	6.89	3.52	3.37	--	--	--	--	4400	120	12	11	7.7	1600**	--	270
06/17/98	6.89	2.24	4.65	--	--	--	--	7800	<25	50	34	650	1300**	--	650

* Chromatogram pattern indicates a non-diesel mix.
** Chromatogram pattern indicates an unidentified hydrocarbon.
*** Chromatogram pattern indicates an unidentified hydrocarbon and weathered diesel.

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-2															
08/20/91	6.27	1.92	4.35	--	--	--	--	9300	3700	55	530	75	600	--	--
09/30/91	6.27	1.28	4.99	--	--	--	--	3500	2600	47	440	68	--	--	--
10/28/91	6.27	1.36	4.91	--	--	--	--	4600	1800	29	290	53	--	--	--
01/08/92	6.27	1.63	4.64	Sheen	--	--	--	14,000	4300	70	<25	130	--	--	--
01/13/92	6.27	--	--	--	--	--	--	--	--	--	--	--	38,000	--	--
06/23/92	6.27	1.63	4.64	0.02	--	--	--	--	--	--	--	--	--	--	--
08/24/92	6.27	1.34	4.94	0.02	--	--	--	--	--	--	--	--	--	--	--
09/21/92	6.27	1.20	5.08	0.01	--	--	--	--	--	--	--	--	--	--	--
10/26/92	6.27	0.34	5.93	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	6.27	--	--	--	--	--	--	21,000	5400	59	1300	160	160,000	--	--
01/08/93	6.27	2.57	3.70	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	6.27	2.89	3.38	Sheen	--	--	--	--	--	--	--	--	--	--	--
06/11/93	6.27	2.09	4.18	--	--	--	--	5900	1100	23	240	51	--	2300	--
09/29/93	6.27	0.07	6.20	--	--	--	--	--	--	--	--	--	--	--	--
12/20/93	6.27	1.94	4.35	0.02	--	--	--	--	--	--	--	--	--	--	--
03/07/94	6.27	2.60	3.67	--	--	--	--	26,000	5700	170	1000	150	<10	--	--
06/17/94	6.27	2.25	4.02	Sheen	--	--	--	--	--	--	--	--	--	--	--
09/12/94	6.27	1.45	4.83	0.01	--	--	--	--	--	--	--	--	--	--	--
11/30/94	6.27	2.27	4.00	--	--	--	Inaccessible	--	--	--	--	--	--	--	--
03/24/95	6.27	2.73	4.01	0.59	--	--	--	--	--	--	--	--	--	--	--
06/27/95	6.27	1.71	4.96	0.50	0.013	0.013	--	--	--	--	--	--	--	--	--
09/28/95	6.27	2.62	4.25	0.75	0.013	0.026	--	--	--	--	--	--	--	--	--
12/19/95	6.27	1.99	4.76	0.60	0.010	0.036	--	--	--	--	--	--	--	--	--
02/28/96	6.27	1.99	4.58	0.38	0.008	0.044	--	--	--	--	--	--	--	--	--
06/25/96	6.27	2.36	4.29	0.47	0.030	0.074	--	--	--	--	--	--	--	--	--
12/17/96	6.27	2.22	4.16	0.14	--	0.074	--	--	--	--	--	--	--	--	--
03/31/97	6.27	2.34	4.07	0.18	0.030	0.104	--	--	--	--	--	--	--	--	--
06/30/97	6.27	2.06	4.32	0.14	0.030	0.134	--	--	--	--	--	--	--	--	--
09/12/97	6.27	2.00	4.38	0.14	--	0.134	--	--	--	--	--	--	--	--	--
12/05/97	6.27	2.51	3.78	0.02	--	0.134	--	--	--	--	--	--	--	--	--
02/16/98	6.27	3.08	3.29	0.12	0.007	0.141	--	--	--	--	--	--	--	--	--
06/17/98	6.27	2.35	4.00	0.10	0.010	0.151	--	--	--	--	--	--	--	--	--

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-3															
08/20/91	8.71	0.26	8.45	--	--	--	--	3100	200	13	15	12	200	--	--
09/30/91	8.71	-0.03	8.74	--	--	--	--	1000	150	8.3	13	6.7	--	--	--
10/28/91	8.71	-0.05	8.76	--	--	--	--	1200	120	6.7	11	7.5	--	--	--
01/08/92	8.71	-0.06	8.77	--	--	--	--	410	120	0.9	4.1	3.4	--	--	--
01/13/92	8.71	--	--	--	--	--	--	--	--	--	--	--	220	--	--
06/23/92	8.71	0.03	8.68	--	--	--	--	630	43	0.8	8.2	3.4	<50	--	--
08/24/92	8.71	-0.14	8.85	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	8.71	-0.23	8.94	--	--	--	--	1800	730	1.4	66	39	<50	--	--
10/26/92	8.71	-0.36	9.07	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	8.71	--	--	--	--	--	--	840	270	3.4	15	4.2	850	--	--
01/08/93	8.71	1.02	7.69	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	8.71	0.97	7.74	--	--	--	--	760	270	4.0	10	5.0	<10	--	--
06/11/93	8.71	0.19	8.52	--	--	--	--	200	32	1.0	5.0	2.0	--	5600	--
09/29/93	8.71	2.66	6.05	--	--	--	--	9300	2800	60	270	62	--	--	--
12/20/93	8.71	-0.12	8.83	--	--	--	--	460	250	4.0	8.0	4.0	<10	--	--
03/07/94	8.71	0.64	8.07	--	--	--	--	2400	260	13	35	18	<10	--	--
06/17/94	8.71	0.19	8.52	--	--	--	--	1000	200	4.0	6.6	6.7	<50	--	--
09/12/94	8.71	-0.21	8.92	--	--	--	--	360	130	3.4	4.8	3.3	<50	--	130
11/30/94	8.71	0.58	8.13	--	--	--	Inaccessible	--	--	--	--	--	--	--	--
03/24/95	8.71	1.93	6.78	--	--	--	--	4100	920	<10	23	<10	1200*	--	70
06/27/95	8.71	0.49	8.22	--	--	--	--	3100	640	16	31	<10	1000*	--	<50
09/28/95	8.71	-0.14	8.85	--	--	--	--	490	78	3.4	4.4	2.4	460*	--	38
12/19/95	8.71	0.69	8.02	--	--	--	--	2600	580	<10	25	<10	650*	--	<50
02/28/96	8.71	1.16	7.55	--	--	--	--	1500	510	<5.0	9.9	<5.0	780*	--	<25
06/25/96	8.71	0.34	8.37	--	--	--	--	1300	390	7.8	14	6.5	1200*	--	31
12/17/96	8.71	0.41	8.30	--	--	--	--	760	85	<1.2	5.9	5.1	1100*	--	<6.2
03/31/97	8.71	0.52	8.19	--	--	--	--	2000	380	12	24	12	1300*	--	<25
06/30/97	8.71	0.00	8.71	--	--	--	--	1900	340	9.9	23	6.1	620*	--	<25
09/12/97	8.71	1.07	7.64	--	--	--	--	1200	200	4.6	14	4.8	400*	--	3.9
12/05/97	8.71	0.46	8.25	--	--	--	--	460	72	2.7	5.2	1.7	190*	--	<5.0
02/16/98	8.71	1.71	7.00	--	--	--	--	6200	1100	20	34	12	1000*	--	<50
06/17/98	8.71	0.71	8.00	--	--	--	--	3000	350	<10	<10	<10	1100*	--	120

* Chromatogram pattern indicates an unidentified hydrocarbon.

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-4															
08/20/91	7.37	1.32	5.05	--	--	--	--	1800	870	4.0	3.0	9.0	160	--	--
09/30/91	7.37	1.70	5.67	--	--	--	--	670	830	5.5	2.7	12	--	--	--
10/28/91	7.37	1.56	5.81	--	--	--	--	2800	990	5.8	4.8	19	--	--	--
01/08/92	7.37	2.03	5.34	--	--	--	--	2900	1200	10	7.0	18	--	--	--
01/13/92	7.37	--	--	--	--	--	--	--	--	--	--	--	1000	--	--
06/23/92	7.37	2.00	5.37	--	--	--	--	1600	380	6.5	3.0	12	<50	--	--
08/24/92	7.37	1.62	5.75	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	7.37	1.42	5.95	--	--	--	--	1200	480	5.6	3.7	11	<50	--	--
10/26/92	7.37	1.41	5.96	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	7.37	--	--	--	--	--	--	1500	700	3.6	3.2	11	1800	--	--
01/08/93	7.37	2.73	4.64	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	7.37	2.95	4.42	--	--	--	--	520	160	3.0	1.0	4.0	<10	--	--
06/11/93	7.37	2.25	5.12	--	--	--	--	1200	430	5.0	6.0	11	--	2600	--
09/29/93	7.37	1.57	5.80	--	--	--	--	1300	210	8.0	2.0	14	--	--	--
12/20/93	7.37	2.27	5.10	--	--	--	--	570	230	5.0	4.0	8.0	3900	--	--
03/07/94	7.37	2.36	5.01	--	--	--	--	2200	290	18	2.5	11	2600	--	22,000
06/17/94	7.37	1.55	5.82	--	--	--	--	2100	480	11	4.3	9.5	2800	--	--
09/12/94	7.37	1.73	5.64	--	--	--	--	1700	340	6.1	2.7	9.7	3000	--	63,000
11/30/94	7.37	1.79	5.58	--	--	--	Inaccessible	--	--	--	--	--	--	--	--
03/24/95	7.37	2.42	4.95	--	--	--	--	1500	280	<5.0	<5.0	6.9	3000*	--	12,000
06/27/95	7.37	-1.42	8.79	--	--	--	--	<10,000	310	<100	<100	<100	3100*	--	32,000
09/28/95	7.37	1.52	5.85	--	--	--	--	330	64	1.1	<0.5	<0.5	6300*	--	630
12/19/95	7.37	1.87	5.50	--	--	--	--	3000	520	<25	<25	<25	3400*	--	44,000
02/28/96	7.37	2.27	5.10	--	--	--	--	<10,000	230	<100	<100	<100	4700*	--	32,000
06/25/96	7.37	1.59	5.78	--	--	--	--	<10000	160	<100	<100	<100	3100	--	31,000
12/17/96	7.37	1.42	5.95	--	--	--	--	<5000	110	<50	<50	<50	3600**	--	22,000
03/31/97	7.37	1.75	5.62	--	--	--	--	<2500	130	<25	<25	<25	2700*	--	16,000
06/30/97	7.37	1.34	6.03	--	--	--	--	<2500	130	<25	<25	<25	2700*	--	14,000
09/12/97	7.37	1.68	5.69	--	--	--	--	<5000	63	<50	<50	<50	2100*	--	15,000
12/05/97	7.37	2.22	5.15	--	--	--	--	1300	120	<5.0	<5.0	8.5	2600*	--	15,000
02/16/98	7.37	1.11	6.26	--	--	--	--	1200	57	4.5	<2.5	7.0	1300*	--	12,000
06/17/98	7.37	2.41	4.96	--	--	--	--	5300	390	290	28	150	530*	--	17,000

* Chromatogram pattern indicates an unidentified hydrocarbon.
** Chromatogram pattern indicates an unidentified hydrocarbon and weathered diesel.

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-5															
06/23/92	14.14	1.90	12.24	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
08/24/92	14.14	1.85	12.29	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	14.14	1.68	12.46	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	60	--	--
10/26/92	14.14	1.62	12.52	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	14.14	3.02	11.12	--	--	--	--	--	--	--	--	--	--	--	--
01/08/93	14.14	--	--	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	14.14	4.40	9.74	--	--	--	--	<50	<0.5	<0.5	<0.5	0.9	<10	--	--
06/11/93	14.14	3.70	10.44	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	770	--
09/29/93	14.14	2.22	11.92	--	--	--	--	<50	<0.5	0.6	<0.5	0.6	<10	--	--
12/20/93	14.14	--	--	--	--	--	--	--	--	--	--	--	--	--	--
03/07/94	14.14	2.80	11.34	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<10	--	--
06/17/94	14.14	2.87	11.27	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
09/12/94	14.14	1.28	12.86	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	<5.0
11/30/94	14.14	2.23	11.91	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	99*	--	--
03/24/95	14.14	4.38	9.76	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
06/27/95	14.14	2.74	11.40	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	55**	--	--
09/28/95	14.14	2.24	11.90	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	300**	--	--
12/19/95	14.14	1.56	12.58	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	53**	--	3.1
02/28/96	14.14	2.44	11.70	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	<2.5
06/25/96	14.14	2.71	11.43	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	120**	--	36
12/17/96	14.14	2.74	11.40	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	89**	--	<2.5
03/31/97	14.14	2.04	12.10	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	150**	--	<2.5
06/30/97	14.14	1.36	12.78	--	--	--	Sampled biannually	--	--	--	--	--	--	--	--
09/12/97	14.14	0.46	13.68	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	<2.5
12/05/97	14.14	1.11	13.03	--	--	--	--	--	--	--	--	--	--	--	--
02/16/98	14.14	4.17	9.97	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	62**	--	<2.5
06/17/98	14.14	2.29	11.85	--	--	--	--	--	--	--	--	--	--	--	--

* Chromatogram pattern indicates a non-diesel mix.
** Chromatogram pattern indicates an unidentified hydrocarbon.

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-6															
06/23/92	4.46	-0.68	5.14	--	--	--	--	<50	4.3	<0.5	0.8	0.9	120	--	--
08/24/92	4.46	-0.49	4.95	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	4.46	-0.44	4.90	--	--	--	--	<250	<2.5	<2.5	<2.5	<2.5	<50	--	--
10/26/92	4.46	-1.06	5.52	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	4.46	-0.94	5.40	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	81	--	--
01/08/93	4.46	--	--	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	4.46	-1.64	6.10	--	--	--	--	<50	<0.5	<0.5	<0.5	0.7	<10	--	--
06/11/93	4.46	-2.10	6.56	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	15,000	--
09/29/93	4.46	-0.71	5.17	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<10	--	--
12/20/93	4.46	-1.47	5.93	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<10	--	--
03/07/94	4.46	-0.81	5.27	--	--	--	--	54	<0.5	<0.5	<0.5	0.6	<10	--	--
06/17/94	4.46	--	--	--	--	--	--	--	--	--	--	--	--	--	--
09/12/94	4.46	-0.64	5.10	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	<50
11/30/94	4.46	-1.12	5.58	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	800*	--	--
03/24/95	4.46	-1.87	6.33	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	490**	--	--
06/27/95	4.46	-3.74	8.20	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	300**	--	--
09/28/95	4.46	-0.19	4.65	--	--	--	--	120	1.1	<0.5	<0.5	<0.5	1200**	--	--
12/19/95	4.46	-1.58	6.04	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	820**	--	<2.5
02/28/96	4.46	-1.54	6.00	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	270**	--	<2.5
06/25/96	4.46	-1.71	6.17	--	--	--	--	97	<0.5	<0.5	<0.5	0.71	750**	--	<2.5
12/17/96	4.46	-1.67	6.13	--	--	--	--	65	<0.5	<0.5	<0.5	<0.5	540**	--	<2.5
03/31/97	4.46	-2.23	6.69	--	--	--	--	65	<0.5	<0.5	<0.5	<0.5	780**	--	<2.5
06/30/97	4.46	-2.62	7.08	--	--	--	Sampled biannually	--	--	--	--	--	--	--	--
09/12/97	4.46	-0.95	5.41	--	--	--	--	65	<0.5	<0.5	<0.5	<0.5	270**	--	<2.5
12/05/97	4.46	-1.96	6.42	--	--	--	--	--	--	--	--	--	--	--	--
02/16/98	4.46	-0.30	4.76	--	--	--	--	140	<0.5	<0.5	<0.5	<0.5	330**	--	<2.5
06/17/98	4.46	-1.54	6.00	--	--	--	--	--	--	--	--	--	--	--	--

* Chromatogram pattern indicates a non-diesel mix.
** Chromatogram pattern indicates an unidentified hydrocarbon.

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-7															
06/23/92	5.26	0.88	4.38	--	--	--	--	<50	4.7	<0.5	<0.5	<0.5	<50	--	--
08/24/92	5.26	-0.29	5.55	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	5.26	-0.39	5.65	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
10/26/92	5.26	-0.25	5.51	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	5.26	1.31	3.95	--	--	--	--	<50	2.9	<0.5	<0.5	<0.5	60	--	--
01/08/93	5.26	--	--	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	5.26	2.76	2.50	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<10	--	--
06/11/93	5.26	1.80	3.46	--	--	--	--	<50	0.6	<0.5	<0.5	<0.5	--	2200	--
09/29/93	5.26	-0.26	5.52	--	--	--	--	<50	2.0	1.0	1.0	7.0	<10	--	--
12/20/93	5.26	0.85	4.41	--	--	--	--	<50	2.0	<0.5	<0.5	<0.5	<10	--	--
03/07/94	5.26	2.64	2.62	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<10	--	--
06/17/94	5.26	1.99	3.27	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
09/12/94	5.26	1.15	4.11	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	<5.0
11/30/94	5.26	2.50	2.76	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	92*	--	--
03/24/95	5.26	3.06	2.20	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
06/27/95	5.26	1.36	3.90	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	69**	--	--
09/28/95	5.26	0.41	4.85	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	84**	--	--
12/19/95	5.26	2.24	3.02	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	84**	--	<2.5
02/28/96	5.26	3.83	1.43	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	99**	--	<2.5
06/25/96	5.26	0.97	4.29	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	110**	--	<2.5
12/17/96	5.26	3.08	2.18	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	54**	--	<2.5
03/31/97	5.26	2.32	2.94	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	100**	--	<2.5
06/30/97	5.26	1.68	3.58	--	--	--	Sampled annually	--	--	--	--	--	--	--	--
09/12/97	5.26	1.85	3.41	--	--	--	--	--	--	--	--	--	--	--	--
12/05/97	5.26	3.37	1.89	--	--	--	--	--	--	--	--	--	--	--	--
02/16/98	5.26	3.43	1.83	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	77**	--	<2.5
06/17/98	5.26	3.32	1.94	--	--	--	--	--	--	--	--	--	--	--	--

* Chromatogram pattern indicates a non-diesel mix.
** Chromatogram pattern indicates an unidentified hydrocarbon.

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
MW-8															
06/23/92	8.94	-15.20	24.14	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
08/24/92	8.94	0.34	8.60	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	8.94	0.55	8.39	--	--	--	--	94	<0.5	<0.5	<0.5	<0.5	<50	--	--
10/26/92	8.94	-0.18	9.12	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	8.94	0.83	8.11	--	--	--	--	<50	0.7	5.0	0.7	2.9	79	--	--
01/08/93	8.94	--	--	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	8.94	--	--	--	--	--	--	--	--	--	--	--	--	--	--
06/11/93	8.94	0.55	8.39	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	3500	--
09/29/93	8.94	0.69	8.25	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<10	--	--
12/20/93	8.94	0.48	8.46	--	--	--	--	<50	<0.5	0.6	<0.5	1.0	<10	--	--
03/07/94	8.94	0.28	8.66	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<10	--	--
06/17/94	8.94	0.12	8.82	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	--
09/12/94	8.94	0.11	8.83	--	--	--	--	<50	<0.5	<0.5	<0.5	0.8	<50	--	<5.0
11/30/94	8.94	0.31	8.63	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	120*	--	--
03/24/95	8.94	0.43	8.51	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	110**	--	--
06/27/95	8.94	-0.03	8.97	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	67**	--	--
09/28/95	8.94	0.04	8.90	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	91**	--	--
12/19/95	8.94	0.54	8.40	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	76**	--	<2.5
02/28/96	8.94	0.50	8.44	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<50	--	<2.5
06/25/96	8.94	0.05	8.89	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	80**	--	<2.5
12/17/96	8.94	0.49	8.45	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	79**	--	<2.5
03/31/97	8.94	0.18	8.76	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	72**	--	3.6
06/30/97	8.94	-0.18	9.12	--	--	--	Sampled annually	--	--	--	--	--	--	--	--
09/12/97	8.94	0.13	8.81	--	--	--	--	--	--	--	--	--	--	--	--
12/05/97	8.94	0.59	8.35	--	--	--	--	--	--	--	--	--	--	--	--
02/16/98	8.94	1.00	7.94	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	68**	--	4.3
06/17/98	8.94	0.51	8.43	--	--	--	--	--	--	--	--	--	--	--	--

* Chromatogram pattern indicates a non-diesel mix.
** Chromatogram pattern indicates an unidentified hydrocarbon.

Cumulative Table of Well Data and Analytical Results

Vertical Measurements are in feet. Volumetric Measurements are in gallons. Analytical results are in parts per billion (ppb)

DATE	Well Head Elev.	Ground Water Elev.	Depth To Water	SPH Thickness	SPH Removed	Total SPH Removed	Notes	TPH-Gasoline	Benzene	Toluene	Ethyl-Benzene	Xylene	TPH-Diesel	TDS	MTBE
TRIP BLANK															
08/24/92	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
09/21/92	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
10/26/92	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
12/23/92	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
01/08/93	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
03/25/93	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/11/93	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
09/29/93	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/20/93	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/07/94	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/17/94	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
09/12/94	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	1.0	--	--	--
11/30/94	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/24/95	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/27/95	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
09/28/95	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/19/95	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
02/28/96	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/25/96	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/17/96	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	<2.5
03/31/97	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	<2.5
06/30/97	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	<2.5
09/12/97	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	<2.5
12/05/97	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	<2.5
02/16/98	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	<2.5
06/17/98	--	--	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	<2.5

Note: Blaine Tech Services, Inc. began routine monitoring of the groundwater wells at this site on November 1, 1994.
Earlier field data and analytical results are drawn from the September 27, 1994 Groundwater Technology, Inc. report.

ABBREVIATIONS:
TPH = Total Petroleum Hydrocarbons
TDS = Total Dissolved Solids
MTBE = Methyl-tert-butyl Ether

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Sampled: 06/17/98
1680 Rogers Avenue	Sample Descript: MW1	Received: 06/18/98
San Jose, CA 95112	Matrix: LIQUID	Extracted: 06/24/98
	Analysis Method: EPA 8015 Mod	Analyzed: 06/25/98
Attention: Fran Thie	Lab Number: 9806C36-01	Reported: 07/02/98

QC Batch Number: GC0624980HBPEXA
Instrument ID: GCHP19B

Total Extractable Petroleum Hydrocarbons (TEPH)

Analyte	Detection Limit ug/L	Sample Results ug/L
TEPH as Diesel	**50**	**1300**
Chromatogram Pattern:	**C9-C24**	**Unid.-HC**

Surrogates	Control Limits %		% Recovery
n-Pentacosane (C25)	50	150	81

Results quantitated against a diesel standard.
Analytes reported as N.D. were not present above the stated limit of detection.

SEQUOIA ANALYTICAL - ELAP #1210

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Sampled: 06/17/98
1680 Rogers Avenue	Sample Descript: MW1	Received: 06/18/98
San Jose, CA 95112	Matrix: LIQUID	
	Analysis Method: 8015Mod/8020	Analyzed: 06/26/98
Attention: Fran Thie	Lab Number: 9806C36-01	Reported: 07/02/98

Total Purgeable Petroleum Hydrocarbons (TPPH) with BTEX and MTBE

Analyte	Detection Limit ug/L	Sample Results ug/L
TPPH as Gas	**2500**	**7800**
Methyl t-Butyl Ether	**25**	**650**
Benzene	25	N.D.
Toluene	**25**	**50**
Ethyl Benzene	**25**	**34**
Xylenes (Total)	**25**	**650**
Chromatogram Pattern:		**GAS**

Surrogates	Control Limits %		% Recovery
Trifluorotoluene	70	130	87

Analytes reported as N.D. were not present above the stated limit of detection.

SEQUOIA ANALYTICAL - ELAP #1894

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Sampled: 06/17/98
1680 Rogers Avenue	Sample Descript: MW3	Received: 06/18/98
San Jose, CA 95112	Matrix: LIQUID	Extracted: 06/29/98
	Analysis Method: EPA 8015 Mod	Analyzed: 06/30/98
Attention: Fran Thie	Lab Number: 9806C36-02	Reported: 07/02/98

QC Batch Number: GC0629980HBPEXB
Instrument ID: GCHP5B

Total Extractable Petroleum Hydrocarbons (TEPH)

Analyte	Detection Limit ug/L	Sample Results ug/L
TEPH as Diesel	**50**	**1100**
Chromatogram Pattern:	**C9-C24**	**Unid.-HC**

Surrogates	Control Limits %		% Recovery
n-Pentacosane (C25)	50	150	89

Results quantitated against a diesel standard.
Analytes reported as N.D. were not present above the stated limit of detection.

SEQUOIA ANALYTICAL - ELAP #1210

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Sampled: 06/17/98
1680 Rogers Avenue	Sample Descript: MW3	Received: 06/18/98
San Jose, CA 95112	Matrix: LIQUID	
	Analysis Method: 8015Mod/8020	Analyzed: 06/26/98
Attention: Fran Thie	Lab Number: 9806C36-02	Reported: 07/02/98

Total Purgeable Petroleum Hydrocarbons (TPPH) with BTEX and MTBE

Analyte	Detection Limit ug/L	Sample Results ug/L
TPPH as Gas	**1000**	**3000**
Methyl t-Butyl Ether	**10**	**120**
Benzene	**10**	**350**
Toluene	10	N.D.
Ethyl Benzene	10	N.D.
Xylenes (Total)	10	N.D.
Chromatogram Pattern:		**GAS**

Surrogates	Control Limits %		% Recovery
Trifluorotoluene	70	130	100

Analytes reported as N.D. were not present above the stated limit of detection.

SEQUOIA ANALYTICAL - ELAP #1894

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Sampled: 06/17/98
1680 Rogers Avenue	Sample Descript: MW4	Received: 06/18/98
San Jose, CA 95112	Matrix: LIQUID	Extracted: 06/24/98
	Analysis Method: EPA 8015 Mod	Analyzed: 06/25/98
Attention: Fran Thie	Lab Number: 9806C36-03	Reported: 07/02/98

QC Batch Number: GC0624980HBPEXA
Instrument ID: GCHP5A

Total Extractable Petroleum Hydrocarbons (TEPH)

Analyte	Detection Limit ug/L	Sample Results ug/L
TEPH as Diesel	**50**	**530**
Chromatogram Pattern:	**C9-C24**	**Unid.-HC**

Surrogates	Control Limits %		% Recovery
n-Pentacosane (C25)	50	150	37 Q

Results quantitated against a diesel standard.
Analytes reported as N.D. were not present above the stated limit of detection.

SEQUOIA ANALYTICAL - ELAP #1210

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Sampled: 06/17/98
1680 Rogers Avenue	Sample Descript: MW4	Received: 06/18/98
San Jose, CA 95112	Matrix: LIQUID	
	Analysis Method: 8015Mod/8020	Analyzed: 06/26/98
Attention: Fran Thie	Lab Number: 9806C36-03	Reported: 07/02/98

Total Purgeable Petroleum Hydrocarbons (TPPH) with BTEX and MTBE

Analyte	Detection Limit ug/L	Sample Results ug/L
TPPH as Gas	**1000**	**5300**
Methyl t-Butyl Ether	**500**	**17000**
Benzene	**10**	**390**
Toluene	**10**	**290**
Ethyl Benzene	**10**	**28**
Xylenes (Total)	**10**	**150**
Chromatogram Pattern:		**GAS**

Surrogates	Control Limits %		% Recovery
Trifluorotoluene	70	130	87

Analytes reported as N.D. were not present above the stated limit of detection.

SEQUOIA ANALYTICAL - ELAP #1894

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Sampled: 06/17/98
1680 Rogers Avenue	Sample Descript: TB	Received: 06/18/98
San Jose, CA 95112	Matrix: LIQUID	
	Analysis Method: 8015Mod/8020	Analyzed: 06/26/98
Attention: Fran Thie	Lab Number: 9806C36-04	Reported: 07/02/98

Total Purgeable Petroleum Hydrocarbons (TPPH) with BTEX and MTBE

Analyte	Detection Limit ug/L	Sample Results ug/L
TPPH as Gas	50	N.D.
Methyl t-Butyl Ether	2.5	N.D.
Benzene	0.50	N.D.
Toluene	0.50	N.D.
Ethyl Benzene	0.50	N.D.
Xylenes (Total)	0.50	N.D.
Chromatogram Pattern:		

Surrogates	Control Limits %		% Recovery
Trifluorotoluene	70	130	87

Analytes reported as N.D. were not present above the stated limit of detection.

SEQUOIA ANALYTICAL - ELAP #1894

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services	Client Proj. ID: Chevron 9-0121	Received: 06/18/98
1680 Rogers Avenue		
San Jose, CA 95112	Lab Proj. ID: 9806C36	Reported: 07/02/98
Attention: Fran Thie		

LABORATORY NARRATIVE

In order to properly interpret this report, it must be reproduced in its entirety. This report contains a total of 12 pages including the laboratory narrative, sample results, quality control, and related documents as required (cover page, COC, raw data, etc.).

Diesel Notes:

Sample 9806C36-3 has low surragate recovery. Due to lack of sample re-extraction was not an option. The result should only be accepted as an estimate.

TPH-Gas/BTEX:

Sample 9806C36-01 was diluted 50-fold.
Sample 9806C36-02 was diluted 20-fold.
Sample 9806C36-03 was diluted 10-fold.

SEQUOIA ANALYTICAL

Mike Gregory
Project Manager

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services
1680 Rogers Avenue
San Jose, CA 95112
Attention: Fran Thie

Client Project ID: Chevron 9-0121

QC Sample Group: 9806C36-01,03

Reported: Jul 2, 1998

QUALITY CONTROL DATA REPORT

Matrix:	Liquid
Method:	EPA 8015A
Analyst:	A. Porter
ANALYTE	Diesel

QC Batch #: GC0624980HBPEXA

Sample No.:	9806C36-3
Date Prepared:	6/24/98
Date Analyzed:	6/25/98
Instrument I.D.#:	GCHP5A
Sample Conc., ug/L:	530
Conc. Spiked, ug/L:	1000
Matrix Spike, ug/L:	2100
% Recovery:	157
Matrix Spike Duplicate, ug/L:	2900
% Recovery:	237
Relative % Difference:	41
RPD Control Limits:	0-50

LCS Batch#: BLK062498AS

Date Prepared:	6/24/98
Date Analyzed:	6/25/98
Instrument I.D.#:	GCHP5A
Conc. Spiked, ug/L:	1000
Recovery, ug/L:	600
LCS % Recovery:	60

Percent Recovery Control Limits:

MS/MSD	50-150
LCS	60-140

Quality Assurance Statement: All standard operating procedures and quality control requirements have been met.

SEQUOIA ANALYTICAL

Mike Gregory
Project Manager

Please Note:
The LCS is a control sample of known, interferent free matrix that is analyzed using the same reagents, preparation, and analytical methods employed for the samples. The matrix spike is an aliquot of sample fortified with known quantities of specific compounds and subjected to the entire analytical procedure. If the recovery of analytes from the matrix spike does not fall within specified control limits due to matrix interference, the LCS recovery is to be used to validate the batch.

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services
1680 Rogers Avenue
San Jose, CA 95112
Attention: Fran Thie

Client Project ID: Chevron 9-0121

QC Sample Group: 9806C36-02

Reported: Jul 2, 1998

QUALITY CONTROL DATA REPORT

Matrix:	Liquid
Method:	EPA 8015A
Analyst:	G WARDLE
ANALYTE	Diesel

QC Batch #: GC0629980HBPEXB

LCS ID: BLK069898BS/BSD
Date Prepared: 6/29/98
Date Analyzed: 6/30/98
Instrument I.D.#: GCHP5B

Conc. Spiked, ug/L: 1000

Blank Spike, ug/L: 730
% Recovery: 73

Blank Spike Duplicate, ug/L: 750
% Recovery: 75

Relative % Difference: 2.7

% Recovery Control Limits: 50-150

RPD Control Limits: 0-50

Quality Assurance Statement: All standard operating procedures and quality control requirements have been met.

SEQUOIA ANALYTICAL

Mike Gregory
Project Manager

Please Note:
The LCS is a control sample of known, interferent free matrix that is analyzed using the same reagents, preparation, and analytical methods employed for the samples. The matrix spike is an aliquot of sample fortified with known quantities of specific compounds and subjected to the entire analytical procedure. If the recovery of analytes from the matrix spike does not fall within specified control limits due to matrix interference, the LCS recovery is to be used to validate the batch.

Sequoia Analytical

680 Chesapeake Drive, Redwood City, CA 94063, (650) 364-9600, FAX (650) 364-9233
404 N. Wiget Lane, Walnut Creek, CA 94598, (925) 988-9600, FAX (925) 988-9673
819 Striker Avenue, Suite 8, Sacramento, CA 95834, (916) 921-9600, FAX (916) 921-0100
1455 McDowell Blvd. North, Ste. D, Petaluma, CA 94954, (707) 792-1865, FAX (707) 792-0342

Blaine Tech Services, Inc.
1680 Rogers Ave.
San Jose, CA 95112
Attention: Fran Thie

Client Project ID: Chevron 9-0121
Matrix: Liquid
Work Order #: 9806C36 -01-04
Reported: Jul 7, 1998

QUALITY CONTROL DATA REPORT

Analyte:	Benzene	Toluene	Ethyl Benzene	Xylenes
QC Batch#:	06V8421	06V8421	06V8421	06V8421
Analy. Method:	EPA 8020	EPA 8020	EPA 8020	EPA 8020
Prep. Method:	EPA 8015M	EPA 8015M	EPA 8015M	EPA 8015M
Analyst:	L. Hall	L. Hall	L. Hall	L. Hall
LCS/LCSD #:	LCS062698	LCS062698	LCS062698	LCS062698
Sample Conc.:	N.D.	N.D.	N.D.	N.D.
Prepared Date:	6/26/98	6/26/98	6/26/98	6/26/98
Analyzed Date:	6/26/98	6/26/98	6/26/98	6/26/98
Instrument I.D.#:	-	-	-	-
Conc. Spiked:	20 µg/L	20 µg/L	20 µg/L	20 µg/L
Result:	18	19	20	19
LCS % Recovery:	90	95	100	95
Dup. Result:	18	18	18	18
LCSD % Recov.:	90	90	90	90
RPD:	0.0	5.4	11	5.4
RPD Limit:	0-30	0-30	0-30	0-30

MS/MSD LCS Control Limits	80-120	80-120	80-120	80-120

SEQUOIA ANALYTICAL
Elap #1849

Mike Gregory
Project Manager

Please Note:
The LCS is a control sample of known, interferent-free matrix that is analyzed using the same reagents, preparation, and analytical methods employed for the samples. The matrix spike is an aliquot of sample fortified with known quantities of specific compounds and subjected to the entire analytical procedure. If the recovery of analytes from the matrix spike does not fall within specified control limits due to matrix interference, the LCS recovery is to be used to validate the batch.

** MS = Matrix Spike, MSD = MS Duplicate, RPD = Relative % Difference

Fax copy of Lab Report and COC to Chevron Contact: ☐ No

Chain-of-Custody-Record

Chevron U.S.A. Inc.
P.O. BOX 5004
San Ramon, CA 94583
FAX (415)842-9591

Chevron Facility Number: 9-0121
Facility Address: 3026 Lakeshore Ave., Oakland, CA
Consultant Project Number:
Consultant Name: Blaine Tech Services, Inc.
Address: 1680 Rogers Ave., San Jose, CA 95112
Project Contact (Name): Fran Thie
(Phone): (408)573-0555 (Fax Number): (408)573-7771

Chevron Contact (Name): Phil Briggs
(Phone): (510) 842-9136
Laboratory Name: Sequoia
Laboratory Release Number: 9029940
Samples Collected by (Name): Cassidy
Collection Date: 6-17-98
Signature:

Sample Number	Lab Sample Number	Number of Containers	Matrix S = Soil A = Air W = Water C = Charcoal	Type G = Grab C = Composite D = Discrete	Time	Sample Preservation	Iced (Yes or No)	Analyses To Be Performed: BTEX + TPH GASOLINE (8020 + 8015)	TPH Diesel (8015)	Oil and Grease (5520)	Purgeable Halocarbons (8010)	Purgeable Aromatics (8020)	Purgeable Organics (8240)	Extractable Organics (8270)	Metals Cd,Cr,Pb,Zn,Ni (ICAP or AA)						DO NOT BILL FOR TB-LB / Remarks
MW1		5	W		1200	HCL	Y	X	X												
MW3		~~4~~ 5	↓		1245	↓	↓	X	X												
MW4		5			1150			X	X												
TB		2	↓			↓	↓	X													
																					2 18 11.56

8006C36

Relinquished By (Signature)	Organization	Date/Time	Received By (Signature)	Organization	Date/Time
	BTS	6.18.98 9:45		SEQUOIA	6.18.98 9:45
Relinquished By (Signature)	Organization	Date/Time	Received By (Signature)	Organization	Date/Time
	SEQUOIA	6-18-98			
Relinquished By (Signature)	Organization	Date/Time	Received For Laboratory By (Signature)		Date/Time
					6/18/98 11:56

Turn Around Time (Circle Choice)
24 Hrs.
48 Hrs.
5 Days
10 Days
As Contracted

Field
Data
Sheets

WELL GAUGING DATA

Project # 980617-C3 Date 6-17-98 Client Chevron

Site 3026 Lakeshore Ave Oakland

Well ID	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	
MW1	4				[redacted]	4.65	19.15	TOC	
MW2	3/4	odor	3.90	0.10	25	4.00	—		
MW3	3/4					8.00	17.40		
MW4	3/4					4.96	14.09		
MW5	2					11.85	32.60		
MW6	2					6.00	18.70		
MW7	2					1.94	14.82		
MW8	2					8.43	25.13		

CHEVRON WELL MONITORING DATA SHEET

Project #: 980617-C3	Station #: 9_0121
Sampler: CM	Date: 6-17-98
Well I.D.: MW1	Well Diameter: 2 3 (4) 6 8 ____
Total Well Depth: 19.15	Depth to Water: 4.65
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH

Well Diameter	Multiplier	Well Diameter	Multiplier
2"	0.16	5"	1.02
3"	0.37	6"	1.47
4"	0.65	Other	radius² * 0.163

Purge Method:
- Bailer
- Disposable Bailer
- Middleburg
- Electric Submersible ✓
- Extraction Pump
- Other: _____

Sampling Method:
- Bailer
- Disposable Bailer ✓
- Extraction Port
- Other: _____

9.4	X	3	=	28.2 Gals.
1 Case Volume (Gals.)		Specified Volumes		Calculated Volume

Time	Temp (°F)	pH	Cond.	Gals. Removed	Observations
1155	70.3	7.8	2100	10	
1156	69.8	7.5	1900	20	
1157	68.9	7.5	1700	29	

Did well dewater? Yes (No)		Gallons actually evacuated: 29	
Sampling Time: 12:00		Sampling Date: 6-17-98	
Sample I.D.: MW1		Laboratory: (Sequoia) GTEL N. Creek Assoc. Labs	
Analyzed for: (TPH-G) (BTEX) (MTBE) (TPH-D)		Other:	
Duplicate I.D.:	Analyzed for: TPH-G BTEX MTBE TPH-D	Other:	
D.O. (if req'd):	Pre-purge:	mg/L	Post-purge: mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge: mV

CHEVRON WELL MONITORING DATA SHEET

Project #: 980617-C3	Station #: 9-0121
Sampler: CM	Date: 6-17-98
Well I.D.: MW 2	Well Diameter: 2 3 4 6 8 ___
Total Well Depth: M	Depth to Water: 4.00
Depth to Free Product: 3.90	Thickness of Free Product (feet): .10
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH

Well Diameter	Multiplier	Well Diameter	Multiplier
2"	0.16	5"	1.02
3"	0.37	6"	1.47
4"	0.65	Other	radius² * 0.163

Purge Method: Bailer / Disposable Bailer / Middleburg / Electric Submersible / Extraction Pump / Other: _____

Sampling Method: Bailer / Disposable Bailer / Extraction Port / Other: _____

1 Case Volume (Gals.)	X	Specified Volumes	=	Calculated Volume
—		—		— Gals.

Time	Temp (°F)	pH	Cond.	Gals. Removed	Observations
			Bailed approx 25 ml		
				FP	

Did well dewater? Yes No	Gallons actually evacuated:		
Sampling Time:	Sampling Date:		
Sample I.D.:	Laboratory: Sequoia GTEL N. Creek Assoc. Labs		
Analyzed for: TPH-G BTEX MTBE TPH-D	Other:		
Duplicate I.D.:	Analyzed for: TPH-G BTEX MTBE TPH-D	Other:	
D.O. (if req'd): Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd): Pre-purge:	mV	Post-purge:	mV

4

CHEVRON WELL MONITORING DATA SHEET

Project #: 980617-C3	Station #: 90121
Sampler: CM	Date: 6-17-98
Well I.D.: MW3	Well Diameter: 2 3 4 6 8 3/4
Total Well Depth: 17.40	Depth to Water: 8.00
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH

Well Diameter	Multiplier	Well Diameter	Multiplier
2"	0.16	5"	1.02
3"	0.37	6"	1.47
4"	0.65	Other	radius² * 0.163

Purge Method: Bailer; Disposable Bailer; Middleburg; Electric Submersible; Extraction Pump; X Other: Pen Bailer

Sampling Method: Bailer; Disposable Bailer; Extraction Port; Other: Pen Bailer x

.2	X	3	=	.6 Gals.
1 Case Volume (Gals.)		Specified Volumes		Calculated Volume

Time	Temp (°F)	pH	Cond.	Gals. Removed	Observations
1215	71.1	6.9	7800	.2	
1225	70.9	6.8	7700	.4	
1235	70.4	6.8	7700	.6	

Did well dewater? Yes (No)		Gallons actually evacuated: .6	
Sampling Time: 1245		Sampling Date: 6-17-98	
Sample I.D.: MW3		Laboratory: (Sequoia) GTEL N. Creek Assoc. Labs	
Analyzed for: (TPH-G) (BTEX) (MTBE) (TPH-D)		Other:	
Duplicate I.D.:	Analyzed for: TPH-G BTEX MTBE TPH-D	Other:	
D.O. (if req'd):	Pre-purge:	mg/L Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV Post-purge:	mV

CHEVRON WELL MONITORING DATA SHEET

Project #: 980617-C3	Station #: 9-0121
Sampler: CM	Date: 6-17-98
Well I.D.: MW4	Well Diameter: 2 3 4 6 8 3/4
Total Well Depth: 14.09	Depth to Water: 4.96
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: (PVC) Grade	D.O. Meter (if req'd): YSI HACH

Well Diameter	Multiplier	Well Diameter	Multiplier	
2"	0.16	5"	1.02	
3"	0.37	6"	1.47	
4"	0.65	Other	radius² * 0.163	= .02

Purge Method: Bailer / Disposable Bailer / Middleburg / Electric Submersible / Extraction Pump ✓ / Other: PDM

Sampling Method: Bailer / Disposable Bailer / Extraction Port / Other: PDM ✓

1 Case Volume (Gals.)	X	Specified Volumes	=	Calculated Volume
.18	X	3	=	.54 Gals.

Time	Temp (°F)	pH	Cond.	Gals. Removed	Observations
1115	69.9	7.0	3600	.2	
1125	70.1	7.1	3500	.4	
1135	70.3	7.1	3500	.6	

Did well dewater? Yes (No)		Gallons actually evacuated: .6	
Sampling Time: 1150		Sampling Date: 6-17-98	
Sample I.D.: MW4		Laboratory: (Sequoia) GTEL N. Creek Assoc. Labs	
Analyzed for: (TPH-G) (BTEX) (MTBE) (TPH-D)		Other:	
Duplicate I.D.:	Analyzed for: TPH-G BTEX MTBE TPH-D	Other:	
D.O. (if req'd):	Pre-purge:	mg/L	Post-purge: mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge: mV