geotechnical and environmental consulting services

1140 - 5th Avenue, Crockett, CA 94525

(510) 787-6867 - Fax (510) 787-1457.

September 10, 1999

Ms. Susan Hugo Alameda County Environmental Health Services 1131 Harbor Bay Parkway, 2nd Floor Alameda, California 94502

RE: Third Quarter - 1999 Monitoring and Sampling Reports Former Berkeley Farms Truck Repair Shop and Yard Former Berkeley Farms Dairy 4575 and 4550 San Pablo Avenue Emeryville, California 94608

Dear Ms. Hugo:

Enclosed are the third quarter, 1999 monitoring and sampling reports for the above-referenced sites. Should you have any questions regarding the reports, please feel free to call me at (510) 787-6867.

Sincerely,

Geo-Logic

Joel G. Greger, C.E.G.

Certified Engineering Geologist

License No. EG 1633 Exp. Date 8/31/2000

Attachments: Reports

66 2E6 13 5W 3: 21

SUD CKES

EMAIN OFFICTION ...

1140 - 5th Avenue, Crockett, CA 94525

(510) 787-6867 - Fax (510) 787-1457

GL-97-110.R10 Paradiso Job No. 1103-03 September 10, 1999

Mr. Pat Roland Berkeley Farms 25500 Clawiter Road Hayward, California

RE:

Third Quarter 1999 Monitoring and Sampling Report for Former Berkeley Farms Truck Repair Shop and Yard 4575 San Pablo Avenue, Emeryville, California 94608

#### Mr. Roland:

This report presents the results of the third quarter 1999 monitoring and sampling of the wells at the subject site. During this quarter, the wells were monitored and sampled on September 6, 1999. Also during this quarter, Well MW1 was properly abandoned and replacement well Mw1A was constructed, developed, and initially sampled. This work was reported in Geo-Logic's report (GL-97-110.R9) dated August 12, 1999.

The work during this quarter was performed in compliance with the guidelines established Regional Water Quality Control Board (RWQCB), and Alameda County Department Environmental Health Services (ACEHS).

## SITE DESCRIPTION AND BACKGROUND

The subject site is located on the western side of San Pablo Avenue between 45th and 47th Streets in Emeryville, California, and formerly contained a service station facility at the southern portion of the property. Until 1998, the site operated as a truck repair shop and yard for Berkeley Farms. A Site Plan (Figure 1) is attached to this report.

Geo-Logic's previous work at the site includes sampling during overexcavation of a waste oil tank at the northern end of the property. This work is summarized in Geo-Logic's reports (GL-97-110.R1 and GL-97-110.R2), both dated February 10, 1998. Following this work, installation of three monitoring wells was proposed (work plan/proposal GL-98-110, dated November 15, 1997). The wells were installed in February, 1998. This work, including the results of the first quarter of monitoring and sampling, was documented in Geo-Logic's report (GL-97-110.R3) dated March 7, 1998.

In April and May, 1998, a former service station fuel tank pit at the southern portion of the site was extensively overexcavated. This work, and the results of the second quarter of monitoring and sampling, was documented in Geo-Logic's report (GL-97-110.R4) dated June 9, 1998.

On September 5, 1998, as discussed in a prior meeting with Ms. Susan Hugo of the ACEHS, ORC filter socks were placed in monitoring wells MW2 and MW3. ORC is a insoluble solid peroxygen consisting of magnesium peroxide which has been formulated to release oxygen at a controlled rate when hydrated. The purpose of the ORC in wells MW2 and MW3 was to enhance conditions for the natural biodegradation of

Third Quarter 1999 Monitoring and Sampling Report - September 10, 1999 Former Berkeley Farms Truck Repair Shop & Yard, 4575 San Pablo Ave., Emeryville

petroleum hydrocarbons. Prior to installation of the ORC, baseline measurements of dissolved oxygen in groundwater (DO) were taken. With the concurrence of MS. Susan Hugo of the ACEHS, the ORC was removed from well MW2 on February 5, 1999.

On July 30, 1999, well MW1, damaged during construction, was properly abandoned and replacement well MW1A was constructed, developed, and initially sampled. This work was reported in Geo-Logic's report (GL-97-110.R9) dated August 12, 1999.

#### **RECENT FIELD ACTIVITIES**

Wells MW1A, MW2 and MW3 were monitored and sampled during this quarter on September 6, 1999. Prior to sampling, the wells were checked for depth to water, and the presence of free product and sheen. No free product or sheen was noted in either of the wells. The monitoring data collected this quarter is summarized in Table 1.

After recording the monitoring data, the wells were each purged of approximately eight gallons of water. Once a minimum of approximately three to four casing volumes had been removed from each well and the groundwater level was observed to have stabilized, water samples were then collected by the use of a clean Teflon bailer. The samples were decanted into clean VOA vials, which were then sealed with Teflon-lined screw caps, labeled, and stored in a cooler on ice, until delivery to a state-certified laboratory.

#### **HYDROLOGY**

On September 6, 1999, the measured depth to ground water in monitoring wells MW1A, MW2, and MW3 ranged from 8.20 to 9.88 feet below the tops of the well casings. Since last quarter, the elevation of ground water in the three wells has shown decreases ranging from 0.11 to 0.69 feet. Using the data from the three wells, and the data from two wells at 4550 San Pablo Avenue (also monitored on September 6, 1999), the calculated ground water flow direction was to the west, as shown on the attached Potentio-metric Surface Map, Figure 1. The hydraulic gradient at the site on September 6, 1999, was approximately 0.01. The ground water flow direction and hydraulic gradient is consistent with previous quarters.

#### **ANALYTICAL RESULTS**

Water samples from the three wells were analyzed at Calcoast Analytical, Inc., in Emeryville, California. All samples were accompanied by properly executed Chain of Custody documentation. The samples were analyzed for TPH as gasoline and TPH as diesel by EPA method 8015, and benzene, toluene, ethylbenzene, and xylenes (BTEX) and methyl tertiary butyl ether (MTBE) by EPA method 8020. In addition, the sample collected from MW2, located in the downgradient vicinity of a former waste oil tank, was analyzed for TPH as Motor Oil by EPA Method 8015-modified.

The concentrations of TPH as gasoline, henzene, and TPH as diesel detected in the ground water samples collected on September 6, 1999, are shown on the attached Figure 2. The results of the water analyses are summarized in Table 2. Copies of the laboratory analyses and the Chain of Custody documentation are attached to this report.

Third Quarter 1999 Monitoring and Sampling Report - September 10, 1999 Former Berkeley Farms Truck Repair Shop & Yard, 4575 San Pablo Ave., Emeryville

#### **DISTRIBUTION**

A copy of this report should be sent to Ms. Susan Hugo of the ACEHS.

#### **LIMITATIONS**

Environmental changes, either naturally-occurring or artificially-induced, may cause changes in ground water levels and flow paths, thereby changing the extent and concentration of any contaminants. Our studies assume that the field and laboratory data are reasonably representative of the site as a whole, and assume that subsurface conditions are reasonably conducive to interpolation and extrapolation.

The results of this work are based on the data obtained from the field and laboratory analyses obtained from a state-certified laboratory. We have analyzed these data using what we believe to be currently applicable engineering techniques and principles in the Northern California region. We make no warranty, either expressed or implied, regarding the above, including laboratory analyses, except that our services have been performed in accordance with generally accepted professional principles and practices existing for such work.

If you have any questions regarding this report, please do not hesitate to call me at (510) 787-6867.

JOEL G. GREGER

No. EG 1633 Certified Engineering

GEOLOGIST

Sincerely,

Geo-Logic

Joel G. Greger, C.E.G.

Certified Engineering Geologist

License No. EG 1633 Exp. Date 8/31/2000

Attachments:

Tables I and 2

Figures 1 & 2

Laboratory Analyses and Chain of Custody documentation

Well #	Ground Water Elevation (feet)	Depth to Water (feet)	Total Well Depth (feet)□	Product Thickness (feet)	Sheen	Water Purged (gallons)					
			Sampled on Se	ptember 6,	1999)						
MW1A	32.92	9.88	16.94	0	No	8					
MW2	32.16	8.62	16.55	0	No	8					
MW3	32.88	8.20	16.59	0	No	8					
(Monitored and Sampled on June 7, 1999)											
MW1			inaccessible,	damaged)							
MW2	32.65	8.13	16.55	0	ИО	8					
KW3	33.57	7.51	16.61	0	ИО	8					
	(Moni		Sampled on Ma		)						
MW1			inaccessible,	. damaged)							
MW2	35.28	5.5	16.56	0	No	8					
MM3	35.85	5.23	16.60	0	Мо	8					
	(Moni	tored and s	Sampled on No	vember 17,	1998)						
MW1	32.95	9.06	16.59	0	No	7					
MW2	31.73	9.05	16.55	0	No	7					
MW3	33.09	7.99	16.61	0	No	7					
	(Moni	tored and	Sampled on Au	gust 21, 19	98)						
MW1	35.51	7.84	16.60	0	No	7					
MW2	34.17	8.61	16.56	0	No	7					
MW3	35.42	6.27	16.61	0	No	7					
	(Moni	tored and	Sampled on Ju	ne 3, 1998)							
MW1	35.51	6.50	16.60	0	No	8					
MW2	34.17	6.61	16.57	0	No	8					
MW3	35.42	5.66	16.62	0	ИО	8					
	(Moni	tored and	Sampled on Fe	bruary 27,	1998)						
MW1	37.51	4.50	16.61	0	No	8					
MW2	35.61	5.17	16.58	0	No	8					
MW3	37.28	3.80	16.63	0	No	8					
	(Monit	ored and D	eveloped on I	February 24	<u>, 1998</u> )						
MW1	37.57	4.44	16.59	0	No	24					
MW2	35.69	5.09	16.58	0	No	21					
MM3	37.38	3.70	16.62	0	ИО	25					

TABLE 1
SUMMARY OF GROUND WATER MONITORING AND PURGING DATA

Well #	Ground Water Elevation (feet)	Depth to Water (feet)[	Total Well Depth (feet)	Product Thickness (feet)	Sheen	Water Purged (gallons)							
	(Moni	tored and S	sampled on Sep	otember 6,	1999)								
MW1A	32.92	9.88	16.94	0	No	8							
MW2	32.16	8.62	16.55	0	No	8							
KW3	32.88	8.20	16.59	0	No	8							
	(Monitored and Sampled on June 7, 1999)												
MW1	•	(Well	inaccessible,	damaged)									
MW2	32.65	8.13	16.55	0	No	8							
MW3	33.57	7.51	16.61	0	No	8							
(Monitored and Sampled on March 4, 1999)													
MW1		(Well	inaccessible,	damaged)									
MW2	35.28	5.5	16.56	0	No	8							
MW3	35.85	5.23	16.60	0	Ио	8							
	(Moni	tored and S	Sampled on No	vember 17,	1998)								
MW1	32.95	9.06	16.59	0	No	7							
MW2	31.73	9.05	16.55	0	No	7							
MW3	33.09	7.99	16.61	0	Ио	7							
	(Moni	tored and	Sampled on Au	gust 21, 19	98)								
MW1	35.51	7.84	16.60	0	No	7							
MW2	34.17	8.61	16.56	0	No	7							
MW3	35.42	6.27	16.61	0	No	7							
	(Moni	tored and	Sampled on Ju	ne 3, 1998)									
MW1	35.51	6.50	16.60	0	No	8							
MW2	34.17	6.61	16.57	0	No	8							
KWM3	35.42	5.66	16.62	0	ИО	8							
	(Moni	tored and	Sampled on Fe		1998)								
MW1	37.51	4.50	16.61	0	No	8							
MW2	35.61	5.17	16.58	0	No	8							
MM3	37.28	3.80	16.63	0	No	8							
			eveloped on l	February 24									
MW1	37.57	4.44	16.59	0	No	24							
MW2	35.69	5.09	16.58	0	No	21							
MW3	37.38	3.70	16.62	0	No	25							

Third Quarter 1999 Monitoring and Sampling Report - September 10, 1999 Former Berkeley Farms Truck Repair Shop & Yard, 4575 San Pablo Ave., Emeryville

#### TABLE 1 - Continued

#### SUMMARY OF GROUND WATER MONITORING AND PURGING DATA

	Top of Casing
	Elevation*
Well #	(feet)
MW1A	42.01
MW2	40.78
MW3	41.08

Depth to water and total well depth measurements are taken from the top of the well casings.

<sup>\*</sup> The elevation of the tops of the well casings have been surveyed relative to City of Oakland Benchmark No. 241.

TABLE 2
SUMMARY OF LABORATORY ANALYSES - WATER

<u>Date</u>	Sample <u>Number</u>	TPH as <u>Diesel</u>	TPH as <u>Gasoline</u>	<u>Benzene</u>	<u>Toluene</u>	Ethyl- <u>benzene</u>	Xylenes
9/6/99	MW1A	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
8/6/99	MW1A	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
6/7/99	MW1		(Well	inaccessi	ole, damage		
3/4/99	MW1		(Well	inaccessil	ole, damage		
11/17/9		88,000	29,000	2,300	3,000	3,600	3,100
8/21/98		96,000	38,000	1,700	1,000	2,400	3,300
6/2/98	MW1	105,000	34,000	1,900	1,600	2,400	3,500
2/27/98		81,000	27,000	2,200	910	1,700	2,700
2/2//30			•				
9/6/99	MW2	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
6/7/99	MW2	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
3/4/99	MW2	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
11/17/9		4,300	260	190	420	470	600
8/21/98		1,900	<5.0	<0.5	<0.5	220	400
6/2/98	MW2	7,600	60	220	510	800	1,100
2/27/98		14,000	<5.0	<0.5	120	460	730
2,2.,50		•					.0 5
9/6/99	MW3	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
6/7/99	MW3	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
3/4/99	MW3	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
11/17/9		<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
8/21/98		<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
6/2/98	MW3	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5
2/27/98			<5.0	<0.5	<0.5	<0.5	<0.5
	on Limit	<5.0	<5.0	<0.5	<0.5	<0.5	<0.5

<sup>+</sup> Cadmium, chromium, lead, nickel, and zinc were nondetectable, except for 0.078 mg/l of nickel detected in MW1.


TABLE 2 - (Continued)


SUMMARY OF LABORATORY ANALYSES - WATER

<u>Date</u>	Sample <u>Number</u>		TPH as Motor Oil	<u>TEPH</u>	MTBE	TOTAL LEAD
9/6/99	MW1				<0.5	
6/7/99	MW1			cessible, da		
3/4/99	MW1		(Well inac	cessible, da	maged)	
11/17/98	MW1				<0.5	
6/2/98	MW1*		<del></del>	80,000	<0.5	<5.0
2/27/98	MWl				<0.5	<del></del>
, ,						
9/6/99	MW2		47		<0.5	<del></del>
6/7/99	MW2		<0.5		<0.5	
3/4/99	MW2		<0.5		<0.5	
11/17/98	MW2		<0.5		<0.5	
6/2/98	MW2	*		3,800	<0.5	<5.0
2/27/98	MW2			20,000**	<0.5	
			-			
9/6/99	MW3				<0.5	
6/7/99	KWM3		<del></del>		<0.5	
3/4/99	MW3				<0.5	
11/17/98	EWM				<0.5	
6/2/98	KWM3	*	<del></del>	<5.0	<0.5	<5.0
2/27/98	MW3					. <del></del>
• •						
Detection	Limit		<0.5	<5.0	<0.5	<5.0

- \* All EPA Method 8010 constituents were nondetectable.
- \*\* 20,000 ppb of Total Recoverable Petroleum Hydrocarbons by EPA Method 418.1.
- -- analyses not performed

Results are in micrograms per liter ( $\mu g/L$ ), unless otherwise indicated.

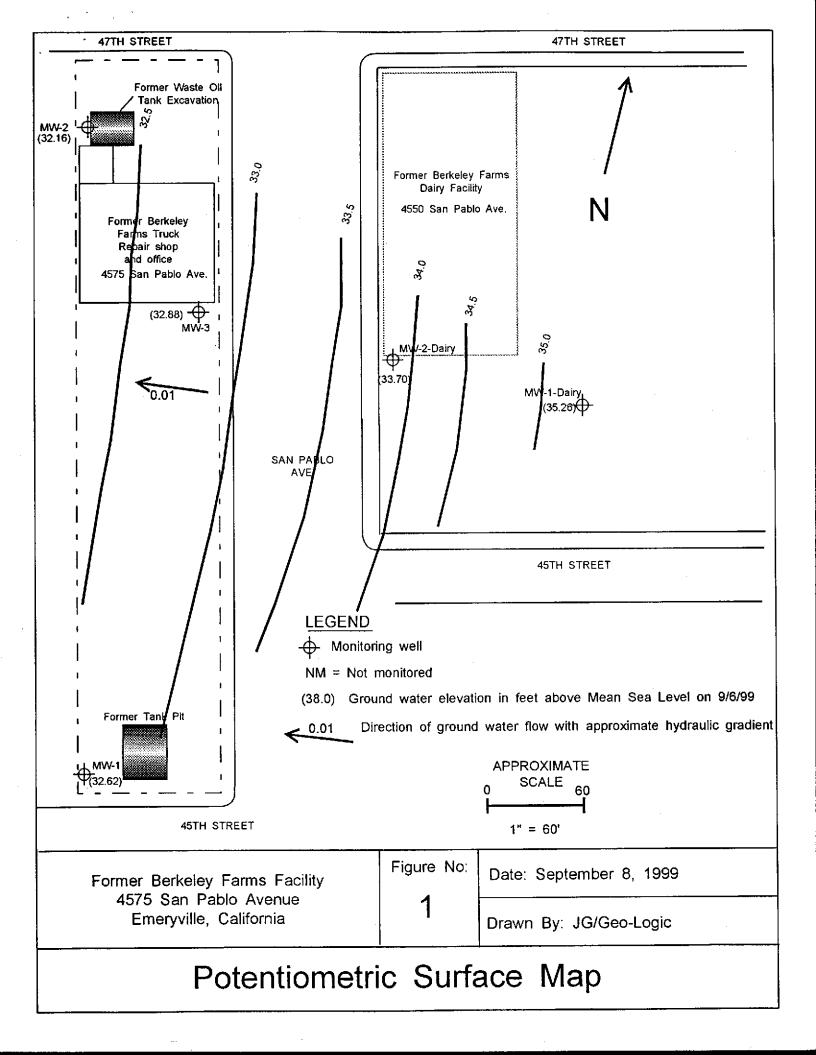

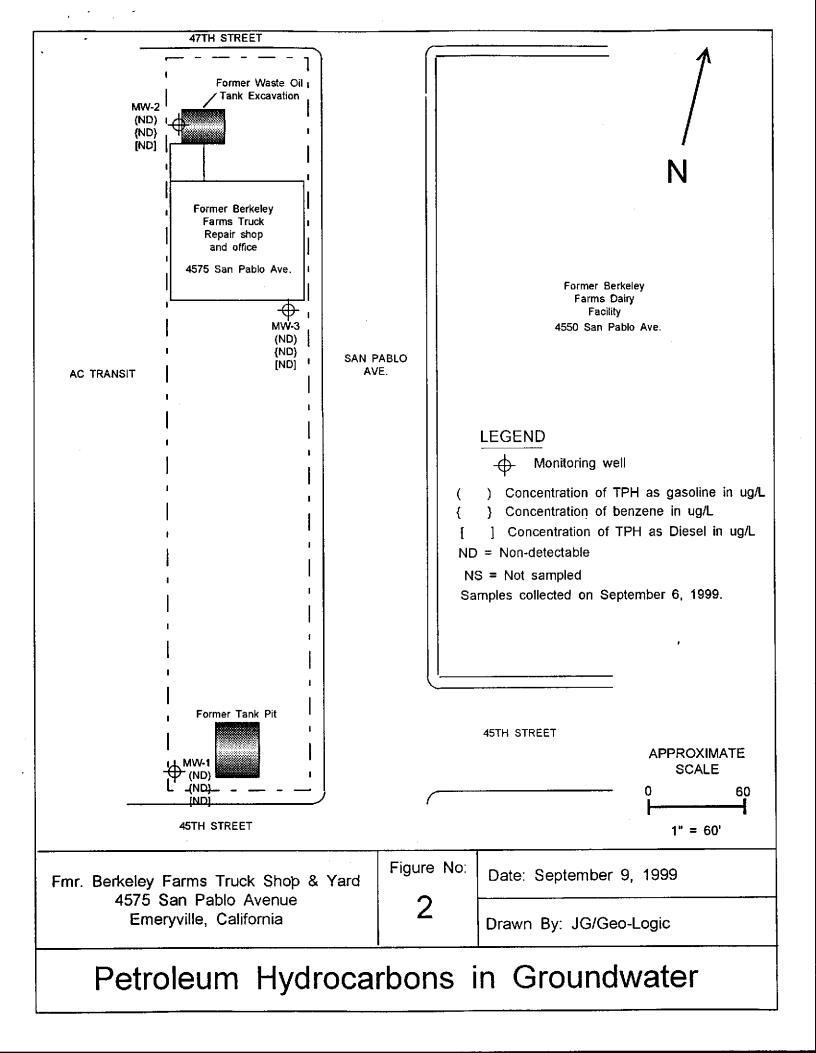

# **CALCOAST ANALYTICAL**

# Materials Chemistry

Certified by
California Department of Health Services
City of Los Angeles, Dept. of Building & Safety

September 9, 1999

Geo - Logic 1140 - 5th Avenue Crockett, CA 94525

Attn: Mr. Joel Greger

Ref: Lab File No. 0907-1A/C-99

#### 1. SAMPLES:

Three (3) water samples, each contained in two (2) VOAs;

Project:

Former Berkeley Farms Truck Shop, 4575 San Pablo, Emeryville

Project No:

1103 - 03

Samples:

A. MW1

B. MW2

C. MW3

Collected: September 6, 1999 Received: September 7, 1999

#### 2. ANALYSIS REQUIRED:

- A. Total Petroleum Hydrocarbons gasoline (TPH-g) by Gas Chromatography (GC).
- B. Total Petroleum Hydrocarbons diesel (TPH-d) by GC.
- C. Benzene, Toluene, Ethylbenzene and Xylene (BTEX) by GC.
- D. Methyl-tert-butyl ether (MTBE) by GC.
- E. Total Petroleum Hydrocarbons motor oil, on Sample B only, by GC.

#### 3. METHODS OF ANALYSIS:

- A. EPA Method 8015; SW-846
- B. EPA Method 8015; SW-846
- C. EPA Method 8020; SW-846
- D. EPA Method 8020; SW-846
- E. EPA Method 8015 (modified); SW-846

COATINGS . BUILDING MATERIALS . HAZARDOUS WASTE SPECTROSCOPY . CHROMATOGRAPHY . MICROSCOPY

TELEPHONE (510) 652-2979 FAX (510) 652-3085 P.O. BOX 8702 • EMERYVILLE, CA 94662 4072 WATTS STREET • EMERYVILLE, CA 94608

#### 4. RESULTS:

### A. TPH - gasoline

		SAMPLE	TPH - gasoline (μg/L)	
A.	MW1		< 5.0 (ND)	
B.	MW2		< 5.0 (ND)	
C.	MW3		< 5.0 (ND)	

Method Blank / Detection Limit = < 5.0 μg/L (none detected)
Mean Splke Recovery = 111%

### B. TPH - diesel

				TPH - diesel	
		SAMPLE		(μ <b>g/L</b> )	
Α.	MW1			< 5.0 (ND)	
В.	MW2			< 5.0 (ND)	
C.	MW3			< 5.0 (ND)	

Method Blank / Detection Limit = < 5.0  $\mu$ g/L (none detected) Mean Spike Recovery = 96%

#### C. BTEX

Sample		Concentration	+(μg/L)	10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	Benzene	Toluene	Ethylbenzene	Xylene
A. MW1	< 0.5 (ND)	< 0.5 (ND)	< 0.5 (ND)	< 0. <u>5 (ND)</u>
B. MW2	< 0.5 (ND)	< 0.5 (ND)	< 0.5 (ND)	< 0.5 (ND)
C. MW3	< 0.5 (ND)	< 0.5 (ND)	< 0.5 (ND)	< 0.5 (ND)
Method Blank	< 0.5 (ND)	< 0.5 (ND)	< 0.5 (ND)	< 0.5 (ND)
Mean Spike	105%	104%	92%	108%
Recovery				

#### D. MTBE

		SAMPLE	(μg/L)	
Δ	MW1		< 0.5 (ND)	
<del> </del>	MW2		< 0.5 (ND)	
C.	MW3		< 0.5 (ND)	

Method Blank / Detection Limit = < 0.5 µg/L (none detected)

#### E. TPH - motor oil

	SAMPI F	TPH - motor oll (μg/L)
B. MW2		47

Method Blank / Detection Limit = < 0.5 μg/L (none detected)

Ronald W. Shrewsbury Analytical Chemist

RWS: swr

ALL SAMPLES SUBMITTED FOR TESTING WILL BE HELD 30 DAYS FROM REPORT DATE AT WHICH TIME THEY WILL BE RETURNED TO CLIENT OR DESTROYED. CLIENT WILL BE RESPONSIBLE FOR ALL SHIPPING, HANDLING, AND DISPOSAL CHARGES. SAMPLES WILL BE STORED UPON WRITTEN INSTRUCTIONS AND FEE ARRANGEMENTS.

This report was made at the request of and for the use only of the purchaser of said report. Any use of or dissemination of information contained herein or reference to Calcoast Labs, Inc. without prior written consent of Calcoast Labs, Inc. is strictly prohibited

# Calcoast Analytical, Inc.

	Tomacide in a	The Contract	Sec. S.	S. 917				4.5					(C) (S)	string &					100	Line to		700	
Proj. Mg Joel Gregor-Ceologic Company: for Paradiso Me Chance		1,00								An	i se i	(eport		e de la			e 2 % +					理法	. Tarefreen
Company: for favoradiso Mechanice			,																			i	1
Address: PMS /X S/.	_							ļ				0						0			į	Ì	
San leandro CA												0					,	è					NUMBER OF CONTAINED
San Clandro CH	_				SNO	,					18.1)	00	埋					200			ļ		OF C.
Samples (signature) (Phone No	.)	8 8	(5)	ATICS 0	GRB9	8 2	52.5 52.5 52.5	8 C			EPA E	3	2.		AMT			60					ABER.
Quel 11 50 7876867	्री इ	(503)	1EPH 30, 801	ARON 2, 802	HALO 0)	GANK 0, 524	ALS. / 8270,	GREA T. F.	ĝ	୍ର	VER.	1	<u>හි</u>	(13)	5		- ~	3	}				Ź
Joel 117 (Fax No. 570 7871457	30,08 30,08	TPH - Gasoine (5030, 8015) w/ BTEX (EPA 602, 8020)	ese( )	PA 60	1,801	VOLATILE ORGANICS (EPA 624, 8240, 524.2)	BASENEUTRALS, ACIDS (EPA 625/627, 8270, 525)	TOTAL OIL & GREASE (EPA 5520, B+F, E+F)	PCB (EPA 608, 8030)	8 88 8	TOTAL RECOVERABLE HYDROCARBONS (EPA 4	Ď	LUFT METALS: Cd. CA, Pb, Zn, Ni	CAM METALS (17)	PRIORITY POLLUTANT METALS (13)	TOTALLEAD	EXTRACTION (Ta.P., STLC)	40					
500 7871457	± ₹	H.G.	¥.₽	83.EX	RGE PA 60	2 X 2 1	PA 62	PA 55	18 A 18 A 18 A 18 A 18 A 18 A 18 A 18 A	PA 60	절절	"/w	F F	W W	RIORI ETAL	OTAL	XTRY P. P.	9					
5/0/0///5/	는 iii	<u>}</u>	<u>₽ (ii)</u>	5.2	<u> </u>	<u> </u>	品區	유민	8 H	K. (ii)	구 그	_	12 2	_0_	₹ 2	<u> </u>	шE	-	,	-			
Sample ID Type Date Time Preserve											1							-	<u> </u>				
MW/ wat 96/99 9 Am		X	X	-/-	<i></i>		ra	2	<del> </del>	<u> </u>		×	-			<del></del>		-	ļ	ļ			$\frac{2}{2}$
$m\omega 2$		X	<b>*</b>	77 '			1 66	- 2	<del> </del>			×	-			<del> </del>		X	-	-			2
mw3 V V		┲								<del>                                     </del>	<del> </del>	×	<del> </del>		-				-	1			_
	-	+								<u> </u>													
										_							ļ	ļ	<u> </u>	<u> </u>			
		<u> </u>	ļ		-		<del> </del>		-	<u> </u>			<del> </del>			_	-	<del> </del>	-	<del> </del>			
Project Information Sample Receipt		Poline	quished	By		<u> </u>	<u> </u>	<u></u>		<u></u>		J	Relino	luished	Bv:	<u> </u>							2.
	A STATE OF THE PARTY.	(Signa	ature)	().	Į	اسرج	1					•	(Signa		,								
Project Name Firmer Carbolic Farms Head Space Head Space		7		7.00	u	• •	٠.	•															ļ
Project No. Shap Rec'd Good Condition/Cold		(Signal) (Print)	To	101	1	<u> </u>	61.	E3/	2-														
PO# Conforms To Record		(Print	ed Nam	ie)									(Printe	ed Nam	re}								
TAT Standard 24 48 72	Other	10	1	/	<i>~</i>	. مر																	
5-Day		17	(6/	99	*	7-	95	15	W				(Date				{Time	١.					
Special Instructions / Comments:		(Date	) / 		<b>_</b>								Care			<u>.</u>	(11110	.1					
Refer to Job Name + No on		Recei (Signa	ived By			/	ر بو	1	[//	1		_ 1	. Recei		:		•						2.
in chart + invace		(Sign	ature)	/~	(06	י שני	, C	7		U			(Sign:	ilure)									
Trugle	Sheep	1/2	7																				
Former Bechelos Farmo to	by (1	(7-7-							0	<u> </u>			Print	ed Nan									
Refer to Joh Name + No on Ial Sheets + invoice prophe Former Berholes Farms 19575 San Pable		(Print	ed Nam	(e)			1 /.	/,	$/\!\!\!/L$	7			<b>"</b> "	5 <b>0</b> (168)	ic,				i				
Emeryvike	-	1	Ko	120	7	<i>F</i>	Γ/\	121	/ /	~2													1
· Comery or ce	_	(Date	19/	110	14	(Time	2) 9	7:4	<i>( )</i>	2 In			(Date	)			(Time	e)					
	<del></del>	1_	7	0/ (				ι,		, <b>,</b>													
( paradiso Johno 1/03-03	• )														СЗМу	Docum	nents\C	Calcoas	at\Tenus	lates\C	nain of C	ustody	y(1)