

Environmental Management
Company
6001 Bollinger Canyon Rd, L4050
P.O. Box 6012
San Ramon, CA 94583-2324
Tel 925-842-1589
Fax 925-842-8370

Karen Streich
Project Manager

20-383

April 16, 2004

ChevronTexaco

Alameda County Health Care Services
1131 Harbor Bay Parkway, Suite 250
Alameda, CA 94502-6577

Alameda County
APR 21 2004
Environmental Health

Re: Chevron Service Station # 9-0260

Address: 21995 Foothill Boulevard, Hayward, CA

I have reviewed the attached routine groundwater monitoring report dated March 25, 2004.

I agree with the conclusions and recommendations presented in the referenced report. The information in this report is accurate to the best of my knowledge and all local Agency/Regional Board guidelines have been followed. This report was prepared by Gettler-Ryan, Inc., upon whose assistance and advice I have relied.

This letter is submitted pursuant to the requirements of California Water Code Section 13267(b)(1) and the regulating implementation entitled Appendix A pertaining thereto.

I declare under penalty of perjury that the foregoing is true and correct.

Sincerely,



Karen Streich
Project Manager

Enclosure: Report



GETTLER-RYAN Inc.

TRANSMITTAL

March 29, 2004

G-R #385110

TO: Mr. Robert Foss
Cambria Environmental Technology, Inc.
5900 Hollis Street, Suite A
Emeryville, CA 94608

CC: Ms. Karen Streich
ChevronTexaco Company
P.O. Box 6004
San Ramon, California 94583

FROM: Deanna L. Harding
Project Coordinator
Gettler-Ryan Inc.
6747 Sierra Court, Suite J
Dublin, California 94568

RE: **Chevron Service Station**
#9-0260
21995 Foothill Boulevard
Hayward, California

WE HAVE ENCLOSED THE FOLLOWING:

COPIES	DATED	DESCRIPTION
1	March 25, 2004	Groundwater Monitoring and Sampling Report First Quarter - Event of February 27, 2004

COMMENTS:

This report is being sent for your review. Please provide any comments/changes and propose any groundwater monitoring modifications for the next event prior to **April 16, 2004**, at which time the final report will be distributed to the following:

cc: Mr. Scott Seery, Alameda County Health Care Services, Dept. of Environmental Health, 1131 Harbor Bay Parkway,
Suite 250, Alameda, CA 94502-6577
Mr. Hugh Murphy, City of Hayward Fire Department, 777 B Street, Hayward, CA 94541
Mr. and Mrs. Arthur Castillo, 1180 Rex Road, Hayward, CA 94541

Enclosures

trans/9-0260-ks



GETTLER - RYAN INC.

March 25, 2004
G-R Job #385110

Ms. Karen Streich
ChevronTexaco Company
P.O. Box 6004
San Ramon, CA 94583

RE: First Quarter Event of February 27, 2004
Groundwater Monitoring & Sampling Report
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

Dear Ms. Streich:

This report documents the most recent groundwater monitoring and sampling event performed by Gettler-Ryan Inc. (G-R) at the referenced site. All field work was conducted in accordance with G-R Standard Operating Procedure - Groundwater Sampling (attached).

Static groundwater levels were measured and the wells were checked for the presence of separate-phase hydrocarbons. Static water level data, groundwater elevations and separate-phase hydrocarbon thickness (if any) are presented in the attached Table 1. A Potentiometric Map is included as Figure 1.

Groundwater samples were collected from the monitoring wells and submitted to a state certified laboratory for analyses. The field data sheets for this event are attached. Analytical results are presented in the table(s) listed below. The chain of custody document and laboratory analytical report are also attached.

Please call if you have any questions or comments regarding this report. Thank you.


Sincerely,

Deanna L. Harding
Project Coordinator

Hagop Kevork
P.E. No. C55734



Figure 1: Potentiometric Map
Table 1: Groundwater Monitoring Data and Analytical Results
Attachments: Standard Operating Procedure - Groundwater Sampling
Field Data Sheets
Chain of Custody Document and Laboratory Analytical Reports

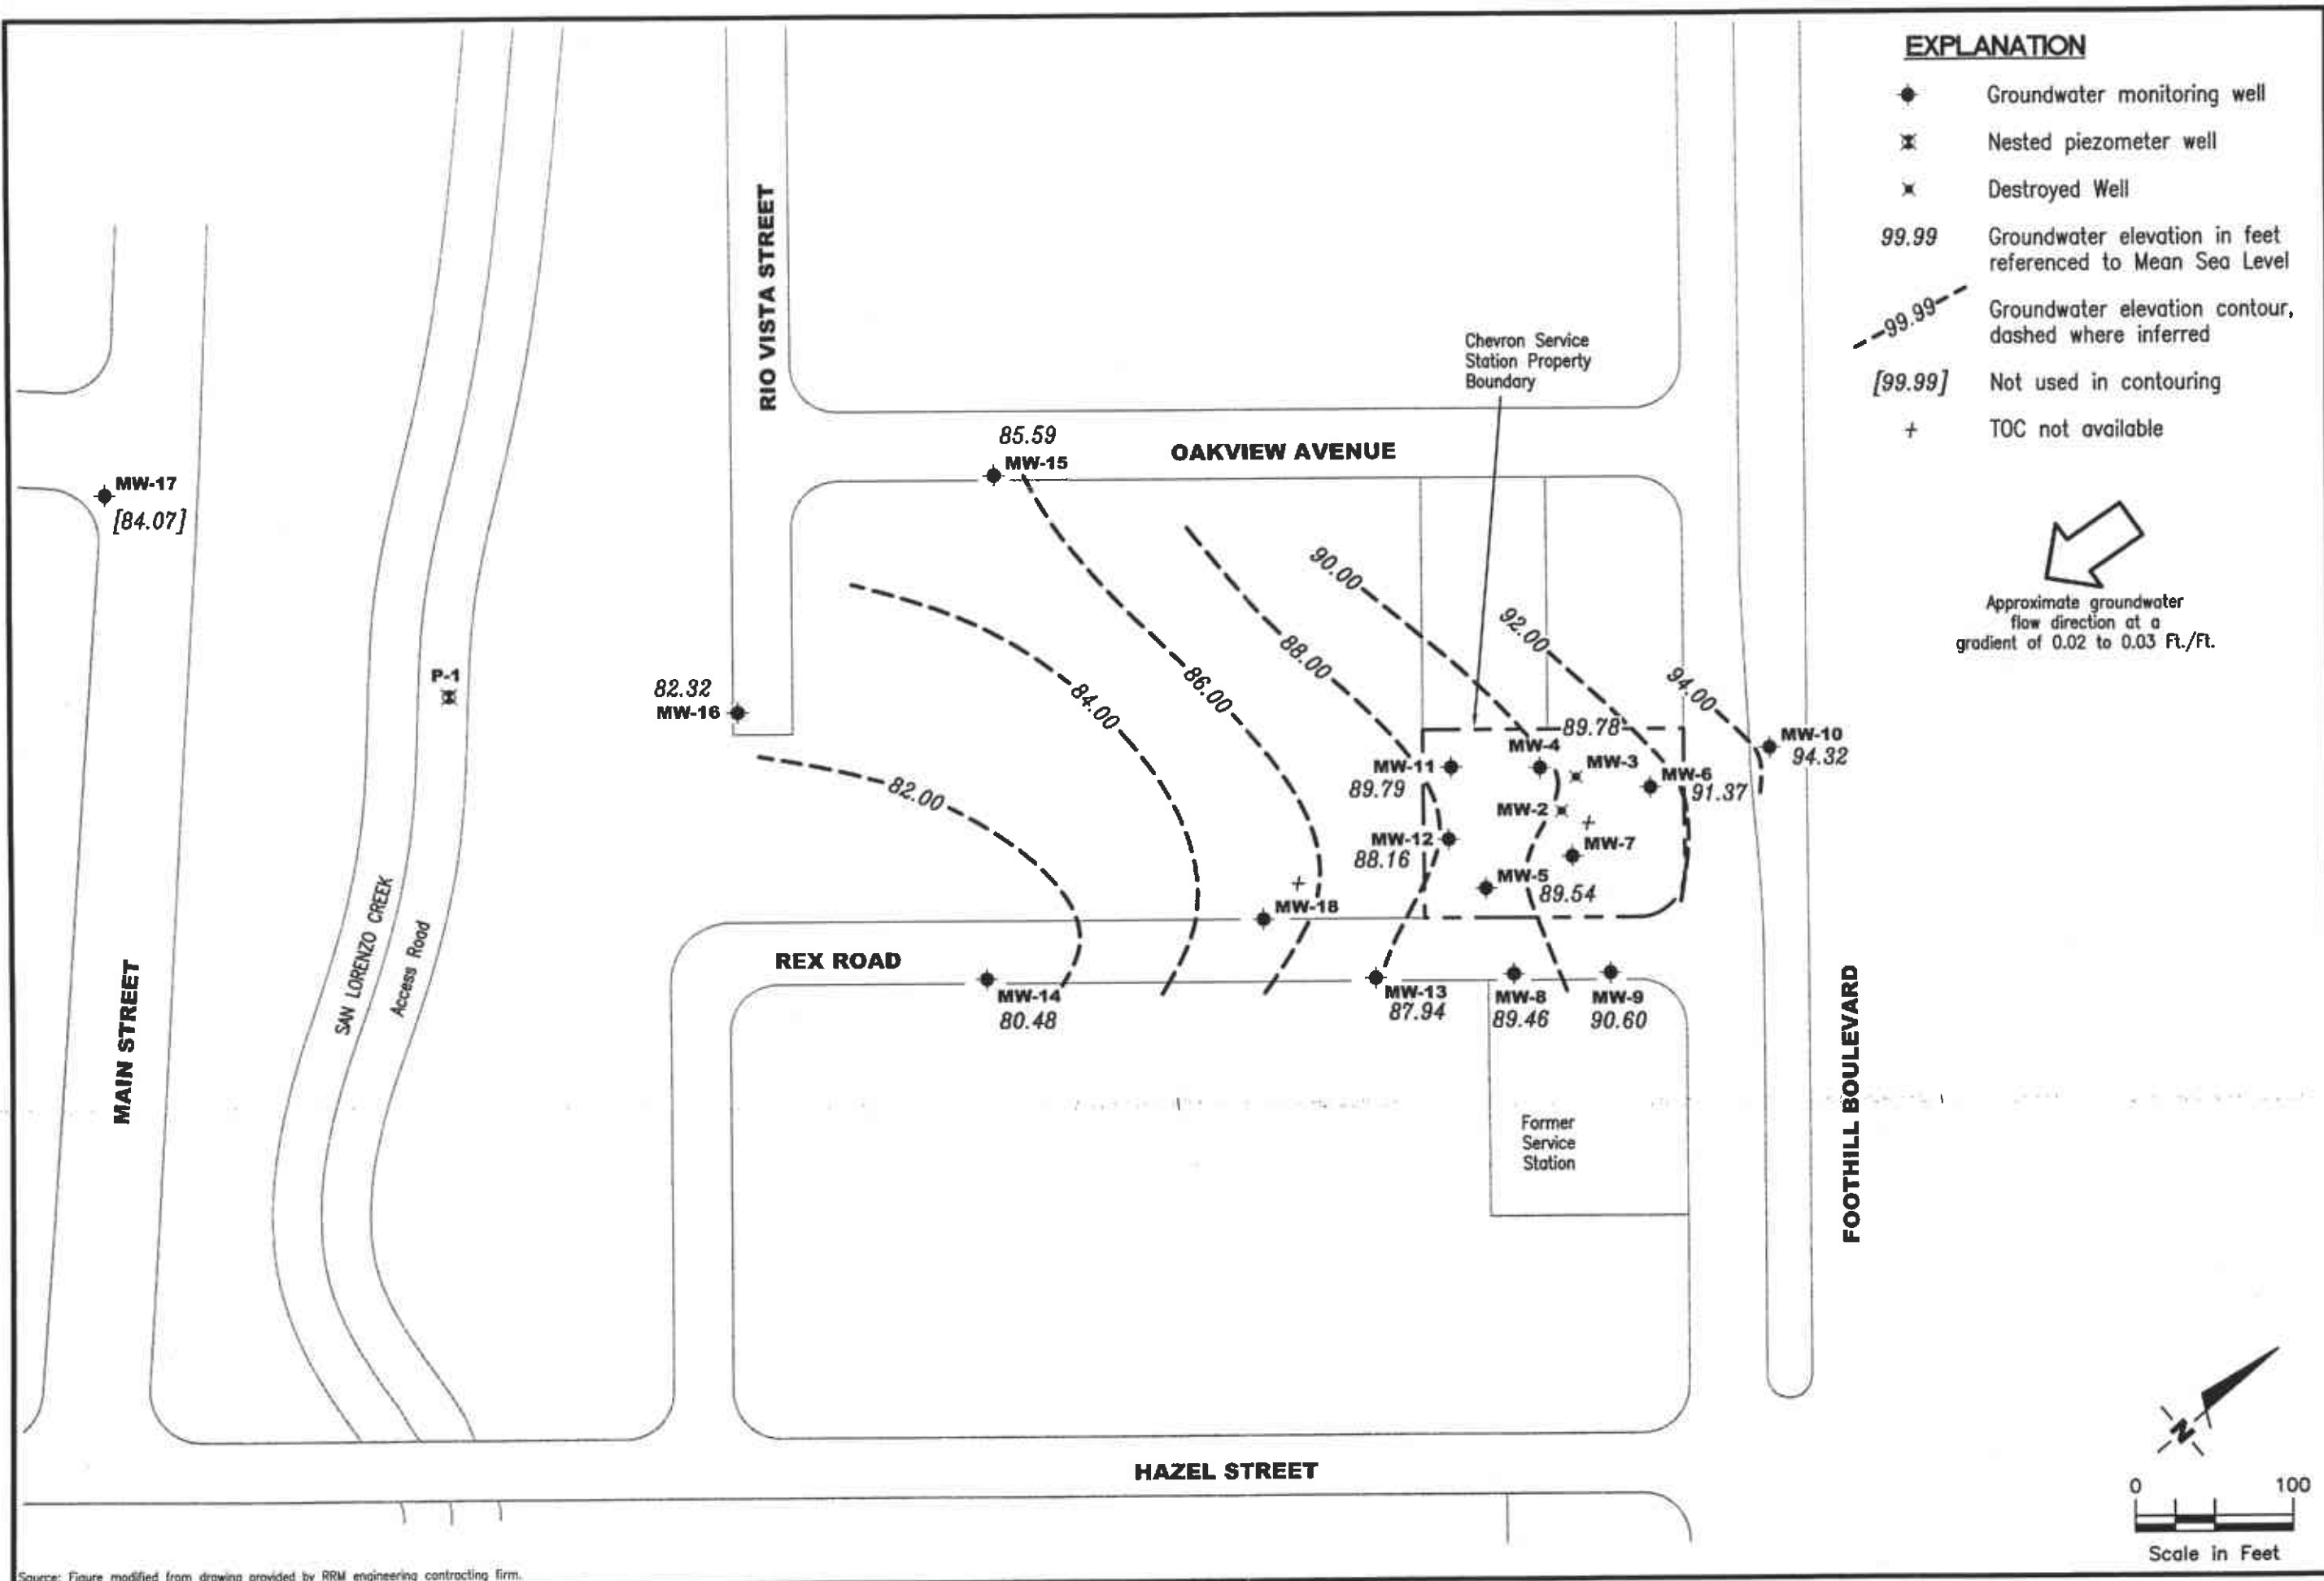

Source: Figure modified from drawing provided by RRM engineering contracting firm.

FIGURE

1

POTENTIOMETRIC MAP
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

GETTLER - RYAN INC.
6747 Sierra Ct., Suite J
Dublin, CA 94568
(925) 551-7555

PROJECT NUMBER	REVIEWED BY	DATE	REVISED DATE
385110		February 27, 2004	

FILE NAME: P:\DRAWING\CHEVRON\9-0260\004-9-0260.DWG | Layout Tab: Pot1

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-4													
02/05/88	--	--	--	--	--	88,000	24,000	19,000	1,700	10,000	--	--	--
06/15/88	--	87.83	12.92	--	--	95,000	45,000	30,000	2,100	17,000	--	--	--
09/27/88	100.75	86.53	14.22	--	--	500,000	41,000	27,000	<5,000	16,000	--	<5,000	--
09/27/88 ¹	100.75	--	--	--	--	88,000	1,200	4,100	1,600	12,000	--	230	270
01/05/89	100.75	87.55	13.20	--	--	64,000	41,000	29,000	2,700	14,000	--	--	--
04/06/89	100.75	88.43	12.32	--	--	--	--	--	--	--	--	--	--
06/28/89	100.75	86.50	14.25	--	--	110,000	34,000	24,000	2,400	13,000	--	--	--
10/03/89	100.75	86.00	14.75	--	--	240,000	36,000	31,000	3,200	19,000	--	--	--
01/04/90	100.75	86.00	14.75	--	--	130,000	33,000	28,000	2,400	14,000	--	--	--
04/03/90	100.75	86.94	13.81	--	--	110,000	41,000	32,000	2,900	17,000	--	--	--
07/03/90	100.75	86.69	14.06	--	--	180,000	32,000	30,000	2,600	15,000	--	--	--
11/06/90	100.75	85.09	15.66	--	--	170,000	31,000	30,000	2,700	17,000	--	--	--
01/04/91	100.75	85.87	15.18	--	--	--	--	--	--	--	--	--	--
04/03/91	100.75	89.75	11.00	--	--	130,000	21,000	24,000	2,300	14,000	--	--	--
07/02/91	100.75	86.50	14.25	--	--	--	--	--	--	--	--	--	--
10/02/91	100.75	84.59	16.16	--	--	240,000	27,000	33,000	2,600	16,000	--	--	--
01/02/92	100.75	85.49	15.26	--	--	--	--	--	--	--	--	--	--
04/07/92	100.75	88.37	12.38	--	--	--	--	--	--	--	--	--	--
08/13/92	100.75	84.05	16.68	--	--	--	--	--	--	--	--	--	--
12/03/92	100.73	84.58	16.17	--	--	1,300,000	17,000	41,000	12,000	90,000	--	--	--
03/25/93	100.73	90.23	10.50	--	--	--	--	--	--	--	--	--	--
10/04/94	100.73	87.89	12.84	--	--	--	--	--	--	--	--	--	--
11/14/94	100.73	INACCESSIBLE ³	--	--	--	--	--	--	--	--	--	--	--
05/15/95	100.73	89.36	11.37	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	100.73	88.43	12.30	--	--	--	--	--	--	--	--	--	--
11/28/95	100.73	86.08	14.65	--	--	97,000	23,000	18,000	1,400	8,800	430	--	--
02/20/96	100.73	92.83	7.90	--	--	SAMPLED SEMI-ANNUALLY					--	--	--
05/29/96	100.73	89.73	11.00	--	--	59,000	11,000	11,000	740	4,400	<500	--	--
08/27/96	100.73	87.49	13.24	--	--	--	--	--	--	--	--	--	--
11/22/96	100.73	89.23	11.50	--	--	130,000	20,000	14,000	1,200	7,000	21,000	--	--
02/18/97	100.73	91.26	9.47	--	--	--	--	--	--	--	--	--	--
05/23/97 ⁴	100.73	88.10	12.63	--	--	120,000	23,000	21,000	1,400	8,400	50,000	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-4 (cont)													
08/04/97	100.73	87.51	13.22	--	--	120,000	25,000	22,000	1,600	8,000	15,000	--	--
11/25/97 ⁵	100.73	86.83	13.90	--	--	460,000	44,000	45,000	4,000	19,000	290,000	--	--
02/25/98	100.73	87.03	13.70	--	--	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/21/98	100.73	88.74	11.99	--	--	100,000	11,000	8,600	720	4,200	3,100	--	--
08/19/98	100.73	80.70	20.03	--	--	--	--	--	--	--	--	--	--
11/19/98	100.73	81.05	19.68	--	--	51,000	5,200	8,900	1,200	6,400	1,600	--	--
02/12/99	100.73	87.52	13.21	--	--	--	--	--	--	--	--	--	--
05/10/99	100.73	87.99	12.74	--	--	68,800	9,680	11,500	1,450	7,700	2,080/328 ⁷	--	--
09/02/99	100.73	85.14	15.59	--	--	--	--	--	--	--	--	--	--
02/03/00	100.73	87.83	12.90	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	100.73	88.01	12.72	0.00	0.00	3,400 ⁸	24	<10	<10	890	430	--	--
08/02/00 ¹⁵	100.73	86.18	14.55	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	100.73	85.34	15.39	0.00	0.00	66,700	13,900	12,400	1,460	7,940	<250	--	--
02/08/01 ¹⁵	100.73	84.99	15.74	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	100.73	84.24	16.49	0.00	0.00	490,000	2,990	<5,000	<5,000	8,660	18.8	--	--
08/28/01 ¹⁵	100.73	82.77	17.96	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/26/01 ¹⁵	100.73	85.43	15.30	0.00	0.00	39,000	2,700	2,900	1,200	5,700	<100	--	--
02/22/02 ¹⁵	100.73	88.84	11.89	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	100.73	85.52	15.21	0.00	0.00	55,000	4,300	4,900	1,700	9,900	<100	--	--
08/29/02 ¹⁵	100.73	85.01	15.72	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02 ¹⁵	100.73	85.50	15.23	0.00	0.00	39,000	3,600	4,200	1,500	7,300	<50	--	--
02/28/03	100.73	89.03	11.70	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/03 ¹⁷	100.73	88.34	12.39	0.00	0.00	51,000	4,400	5,200	1,300	7,000	5	--	--
08/22/03	100.73	86.18	14.55	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/24-25/03 ¹⁷	100.73	85.76	14.97	0.00	0.00	50,000	3,500	6,300	1,400	7,200	1	--	--
02/27/04	100.73	89.78	10.95	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
MW-5													
02/05/88	--	--	--	--	--	80,000	16,000	15,000	2,600	17,000	--	--	--
06/15/88	--	87.67	12.30	--	--	77,000	42,000	38,000	2,500	16,000	--	--	--
09/27/88	99.97	86.72	13.25	--	--	470,000	39,000	32,000	<5,000	16,000	--	<5,000	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-5 (cont)													
09/27/88 ¹	99.97	--	--	--	--	48,000	1,800	3,500	1,600	10,000	--	420	410
01/05/89	99.97	87.27	12.70	--	--	82,000	44,000	37,000	2,400	14,000	--	--	--
04/06/89	99.97	87.75	12.22	--	--	--	--	--	--	--	--	--	--
06/28/89	99.97	86.16	13.81	--	--	80,000	36,000	24,000	2,400	13,000	--	--	--
10/03/89	99.97	85.70	14.27	--	--	240,000	40,000	35,000	2,600	15,000	--	--	--
01/04/90	99.97	85.66	14.31	--	--	130,000	37,000	31,000	2,400	13,000	--	--	--
04/03/90	99.97	86.47	13.50	--	--	120,000	41,000	33,000	2,500	14,000	--	--	--
07/03/90	99.97	86.33	13.64	--	--	200,000	28,000	25,000	1,800	10,000	--	--	--
11/06/90	99.97	84.83	15.14	--	--	370,000	38,000	36,000	4,700	31,000	--	--	--
01/04/91	99.97	85.08	14.90	0.01	--	--	--	--	--	--	--	--	--
04/03/91	99.97	88.41	11.56	--	--	140,000	36,000	32,000	2,700	17,000	--	--	--
07/02/91	99.97	86.08	13.89	--	--	--	--	--	--	--	--	--	--
10/02/91	99.97	84.71	15.26	--	--	230,000	34,000	31,000	2,700	16,000	--	--	--
01/02/92	99.97	85.00	14.97	--	--	--	--	--	--	--	--	--	--
04/07/92	99.97	86.53	13.44	--	--	220,000	35,000	30,000	2,500	14,000	--	--	--
08/13/92	99.97	84.36	15.61	--	--	--	--	--	--	--	--	--	--
12/03/92	99.97	83.68	16.29	<0.02 ²	--	--	--	--	--	--	--	--	--
03/25/93	99.97	89.00	10.97	--	--	--	--	--	--	--	--	--	--
06/23/93	99.97	87.40	12.60	0.04	--	--	--	--	--	--	--	--	--
09/21/93	99.97	85.99	14.00	0.03	--	--	--	--	--	--	--	--	--
12/02/93	99.97	85.73	14.27	0.04	--	--	--	--	--	--	--	--	--
03/08/94	99.97	87.81	12.16	--	--	--	--	--	--	--	--	--	--
06/13/94	99.97	87.22	13.01	0.32	--	--	--	--	--	--	--	--	--
10/04/94	99.97	84.41	15.56	--	--	--	--	--	--	--	--	--	--
11/14/94	99.97	86.62	13.35	--	--	1,100,000	64,000	69,000	9,200	61,000	--	--	--
05/15/95	99.97	89.79	10.18	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.97	88.20	11.77	--	--	--	--	--	--	--	--	--	--
11/28/95	99.97	85.75	14.22	--	--	320,000	34,000	38,000	5,800	31,000	2,000	--	--
02/20/96	99.97	89.60	10.37	Sheen	--	SAMPLED SEMI-ANNUALLY					--	--	--
05/29/96	99.97	89.08	10.89	--	--	150,000	23,000	25,000	2,200	12,000	<500	--	--
08/27/96	99.97	87.22	12.75	--	--	--	--	--	--	--	--	--	--
11/22/96	99.97	87.50	12.47	--	--	170,000	25,000	27,000	2,000	12,000	<500	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-5 (cont)													
02/18/97	99.97	90.46	9.51	--	--	--	--	--	--	--	--	--	--
05/23/97	99.97	87.72	12.25	--	--	160,000	29,000	34,000	2,900	16,000	<250	--	--
08/04/97	99.97	87.09	12.88	--	--	130,000	27,000	31,000	2,500	13,000	<500	--	--
11/25/97	99.97	85.16	14.81	--	--	310,000 ⁵	52,000	59,000	5,500	28,000	3,300	--	--
02/25/98	99.97	82.51	17.46	--	--	--	--	--	--	--	--	--	--
05/21/98	99.97	88.37	11.60	--	--	220,000	20,000	26,000	2,000	10,000	8,500	--	--
08/19/98	99.97	82.27	17.70	--	--	--	--	--	--	--	--	--	--
11/19/98	99.97	--	--	--	--	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
02/12/99	99.97	87.18	12.79	--	--	--	--	--	--	--	--	--	--
05/10/99	99.97	87.25	12.72	--	--	102,000	13,300	17,200	1,240	<200	7,560/<250 ⁷	--	--
09/02/99	99.97	85.18	14.79	--	--	--	--	--	--	--	--	--	--
02/03/00	99.97	86.86	13.11	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	99.97	87.28	12.69	0.00	0.00	360 ⁸	6.2	<2.5	<2.5	13	13	--	--
08/02/00 ¹⁵	99.97	85.81	14.16	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
11/09-10/00 ¹⁵	99.97	85.36	14.61	0.00	0.00	3,280	331	235	35.7	260	9.41	--	--
02/08/01 ¹⁵	99.97	84.76	15.21	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	99.97	83.77	16.20	0.00	0.00	26,700	5,490	6,310	145	2,910	<0.500	--	--
08/28/01 ¹⁵	99.97	DRY	--	--	--	--	--	--	--	--	--	--	--
11/26/01 ¹⁵	99.97	84.61	15.36	0.00	0.00	88,000	14,000	19,000	1,300	8,000	<200	--	--
02/22/02 ¹⁵	99.97	87.75	12.22	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
05/24/02 ¹⁵	99.97	84.74	15.23	0.00	0.00	92,000	11,000	17,000	1,600	9,400	<200	--	--
08/29/02 ¹⁵	99.97	84.65	15.32	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
11/29/02	99.97	85.21	14.76	0.00	0.00	62	4.9	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	99.97	88.22	11.75	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
05/30/03 ¹⁷	99.97	87.36	12.61	0.00	0.00	8,100	1,600	1,100	72	700	8	--	--
08/22/03	99.97	86.12	13.85	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
11/24-25/03 ¹⁷	99.97	85.01	14.96	0.00	0.00	86,000	9,300	16,000	1,200	6,200	<10	--	--
02/27/04	99.97	89.54	10.43	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-6													
02/05/88	--	--	--	--	--	53,000	5,100	4,400	2,100	14,000	--	--	--
06/15/88	--	87.92	13.51	--	--	33,000	9,200	5,500	520	20,000	--	--	--
09/27/88	101.43	86.87	14.56	--	--	17,000	2,200	2,800	1,700	5,100	--	--	--
01/05/89	101.43	87.95	13.48	--	--	37,000	5,000	3,400	2,200	10,000	--	--	--
04/06/89	101.43	88.83	12.60	--	--	--	--	--	--	--	--	--	--
06/28/89	101.43	86.85	14.58	--	--	80,000	7,000	4,100	2,000	9,700	--	--	--
10/03/89	101.43	88.40	13.03	--	--	110,000	8,500	5,100	2,600	14,000	--	--	--
01/04/90	101.43	86.35	15.08	--	--	59,000	5,200	2,600	2,000	11,000	--	--	--
04/03/90	101.43	87.37	14.06	--	--	31,000	6,600	2,600	2,200	12,000	--	--	--
07/03/90	101.43	87.15	14.28	--	--	66,000	5,800	2,900	2,000	9,800	--	--	--
11/06/90	101.43	85.33	16.10	--	--	--	--	--	--	--	--	--	--
01/04/91	101.43	85.91	15.52	--	--	50,000	5,600	2,200	1,800	9,400	--	--	--
04/03/91	101.43	90.40	11.03	--	--	--	--	--	--	--	--	--	--
07/02/91	101.43	86.99	14.44	--	--	81,000	11,000	2,700	2,100	13,000	--	--	--
10/02/91	101.43	85.21	16.22	--	--	--	--	--	--	--	--	--	--
01/02/92	101.43	85.72	15.71	--	--	67,000	7,500	1,900	1,800	9,500	--	--	--
04/07/92	101.43	87.96	13.47	--	--	--	--	--	--	--	--	--	--
08/13/92	101.43	85.46	15.97	--	--	--	--	--	--	--	--	--	--
12/03/92	101.43	84.81	16.62	--	--	--	--	--	--	--	--	--	--
03/25/93	101.43	90.85	10.58	--	--	110,000	12,000	2,900	4,200	14,000	--	--	--
06/23/93	101.43	88.42	13.01	--	--	--	--	--	--	--	--	--	--
09/21/93	101.43	86.69	14.74	--	--	62,000	12,000	1,400	2,100	12,000	--	--	--
12/02/93	101.43	86.56	14.87	--	--	--	--	--	--	--	--	--	--
03/08/94	101.43	89.39	12.04	--	--	61,000	7,000	1,500	1,500	7,400	--	--	--
06/13/94	101.43	88.06	13.37	--	--	--	--	--	--	--	--	--	--
10/04/94	101.43	85.87	15.56	--	--	78,000	13,000	940	1,900	10,000	--	--	--
11/14/94	101.43	87.90	13.53	--	--	--	--	--	--	--	--	--	--
05/15/95	101.43	90.90	10.53	--	--	--	--	--	--	--	--	--	--
08/04/95	101.43	89.05	12.38	--	--	51,000	8,600	1,400	1,900	7,800	--	--	--
11/28/95	101.43	86.80	14.63	--	--	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/20/96	101.43	91.71	9.72	--	--	59,000	11,000	1,600	2,100	9,400	<500	--	--
05/29/96	101.43	90.49	10.94	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-6 (cont)													
08/27/96	101.43	88.03	13.40	--	--	84,000	11,000	960	2,300	7,700	<500	--	--
11/22/96	101.43	88.53	12.90	--	--	--	--	--	--	--	--	--	--
02/18/97	101.43	91.42	10.01	--	--	14,000	3,700	160	720	1,800	400	--	--
05/23/97	101.43	88.68	12.75	--	--	--	--	--	--	--	--	--	--
08/04/97	101.43	87.95	13.48	--	--	62,000	13,000	930	3,500	8,500	710	--	--
11/25/97	101.43	87.22	14.21	--	--	--	--	--	--	--	--	--	--
02/25/98	101.43	86.58	14.85	--	--	30,000	2,400	910	740	4,000	2,600	--	--
05/21/98	101.43	89.76	11.67	--	--	--	--	--	--	--	--	--	--
08/19/98	101.43	85.57	15.86	--	--	37,000	390	220	160	3,600	1,600/1,000 ⁷	--	--
11/19/98	101.43	--	--	--	--	NOT SAMPLED DUE TO INSUFFICIENT WATER				--	--	--	--
02/12/99	101.43	89.60	11.83	--	--	80	2.4	<0.5	0.68	6.2	<2.5	--	--
05/10/99	101.43	88.43	13.00	--	--	--	--	--	--	--	--	--	--
09/02/99	101.43	85.71	15.72	--	--	4,440	23.4	<5.0	45.3	46.2	<50	--	--
02/03/00	101.43	88.23	13.20	--	--	8,300	22	<10	43	140	77	--	--
05/09/00 ¹⁵	101.43	88.38	13.05	0.00	0.00	--	--	--	--	--	--	--	--
08/02/00 ¹⁵	101.43	86.68	14.75	0.00	0.00	1,700 ⁸	32	4.9	<2.5	<2.5	55	--	--
11/09-10/00 ¹⁵	101.43	85.87	15.56	0.00	0.00	--	--	--	--	--	--	--	--
02/08/01 ¹⁵	101.43	85.56	15.87	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	101.43	DRY	--	--	--	--	--	--	--	--	--	--	--
08/28/01 ¹⁵	101.43	DRY	--	--	--	--	--	--	--	--	--	--	--
11/26/01 ¹⁵	101.43	85.97	15.46	0.00	0.00	--	--	--	--	--	--	--	--
02/22/02 ¹⁵	101.43	89.49	11.94	0.00	0.00	6,300	<10	1.7	17	26	<25	--	--
05/24/02 ¹⁵	101.43	85.89	15.54	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
08/29/02 ¹⁵	101.43	DRY	--	--	--	--	--	--	--	--	--	--	--
11/29/02	101.43	85.65	15.78	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/28/03	101.43	89.36	12.07	0.00	0.00	180	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03	101.43	88.59	12.84	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
08/22/03	101.43	87.03	14.40	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER				--	--	--	--
11/24-25/03	101.43	86.31	15.12	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/27/04 ¹⁷	101.43	91.37	10.06	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-7													
02/05/88	--	--	--	--	--	81,000	34,000	36,000	2,400	16,000	--	--	--
06/15/88	--	88.34	12.57	--	--	77,000	40,000	41,000	1,400	24,000	--	--	--
09/27/88	100.91	87.31	13.60	--	--	30,000	9,700	8,900	400	4,100	--	<10	2,600
01/05/89	100.91	87.93	12.98	--	--	96,000	36,000	38,000	2,800	16,000	--	--	--
04/06/89	100.91	88.57	12.34	--	--	--	--	--	--	--	--	--	--
06/28/89	100.91	86.83	14.08	--	--	110,000	31,000	30,000	2,600	16,000	--	--	--
10/03/89	100.91	86.38	14.53	--	--	230,000	34,000	34,000	2,400	15,000	--	--	--
01/04/90	100.91	86.42	14.49	--	--	150,000	41,000	40,000	2,400	15,000	--	--	--
04/03/90	100.91	87.25	13.66	--	--	100,000	31,000	28,000	2,100	16,000	--	--	--
07/03/90	100.91	87.05	13.86	--	--	190,000	30,000	27,000	1,800	13,000	--	--	--
11/06/90	100.91	85.33	15.58	--	--	160,000	27,000	25,000	1,900	15,000	--	--	--
01/04/91	100.91	85.66	15.25	--	--	--	--	--	--	--	--	--	--
04/03/91	100.91	89.50	11.41	--	--	240,000	40,000	36,000	2,400	18,000	--	--	--
07/02/91	100.91	86.73	14.18	--	--	--	--	--	--	--	--	--	--
10/02/91	100.91	85.13	15.78	--	--	220,000	26,000	27,000	2,500	18,000	--	--	--
01/02/92	100.91	85.46	15.45	--	--	--	--	--	--	--	--	--	--
04/07/92	100.91	87.43	13.48	--	--	260,000	27,000	26,000	2,400	15,000	--	--	--
08/13/92	100.91	85.02	15.89	--	--	--	--	--	--	--	--	--	--
12/03/92	100.91	84.48	16.43	--	--	330,000	29,000	31,000	3,300	18,000	--	--	--
03/25/93	100.91	89.81	11.10	--	--	--	--	--	--	--	--	--	--
06/23/93	100.91	88.13	13.63	1.06	--	--	--	--	--	--	--	--	--
09/21/93	100.91	86.57	14.88	0.67	--	--	--	--	--	--	--	--	--
12/02/93	100.91	86.32	14.74	0.19	--	--	--	--	--	--	--	--	--
03/08/94	100.91	88.54	12.37	--	--	--	--	--	--	--	--	--	--
06/13/94	100.91	88.03	13.12	0.30	--	--	--	--	--	--	--	--	--
10/04/94	100.91	INACCESSIBLE ³		--	--	--	--	--	--	--	--	--	--
11/14/94	100.91	87.22	13.83	0.18	0.50	--	--	--	--	--	--	--	--
05/15/95	100.91	89.85	11.07	0.01	0.00	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	100.91	88.38	12.53	--	--	--	--	--	--	--	--	--	--
11/28/95	100.91	86.53	14.62	0.30	2.00	--	--	--	--	--	--	--	--
02/20/96	100.91	90.84	10.09	0.02	0.0625	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/29/96	100.91	90.00	10.93	0.02	0.50	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-7 (cont)													
08/27/96	100.91	88.18	12.75	0.02	0.50	--	--	--	--	--	--	--	--
11/22/96	100.91	87.94	12.99	0.02	0.50	--	--	--	--	--	--	--	--
02/18/97	100.91	91.33	9.58	0.01	0.50	--	--	--	--	--	--	--	--
05/23/97	100.91	88.36	12.55	--	--	8,300	210	580	130	1,400	<250	--	--
08/04/97	100.91	87.68	13.23	--	--	96,000	12,000	16,000	2,300	14,000	3,600	--	--
02/25/98	100.91	83.89	17.02	--	--	--	--	--	--	--	--	--	--
05/21/98	100.91	88.98	11.93	--	--	150,000	7,100	15,000	1,700	9,600	21,000	--	--
08/19/98	100.91	82.72	18.19	--	--	--	--	--	--	--	--	--	--
11/19/98	100.91	--	--	--	--	NOT SAMPLED DUE TO INSUFFICIENT WATER				--	--	--	--
02/12/99	100.91	88.10	12.81	--	--	--	--	--	--	--	--	--	--
05/10/99	100.91	87.87	13.04	--	--	11,200	384	764	116	618	<1,000/558 ⁷	--	--
09/02/99	100.91	85.16	15.75	--	--	--	--	--	--	--	--	--	--
02/03/00	100.91	86.84	14.07	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	100.91	87.55	13.36	0.00	0.00	150 ⁸	0.52	<0.50	<0.50	2.1	130	--	--
08/02/00 ¹⁵	100.91	85.94	14.97	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
11/09-10/00 ¹⁵	100.91	85.93	14.98	0.00	0.00	559	24.1	12.4	2.34	12.5	5.32	--	--
02/08/01 ¹⁵	100.91	84.89	16.02	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	100.91	83.21	17.70	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER				--	--	--	--
08/28/01 ¹⁵	100.91	82.92	17.99	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
11/26/01 ¹⁵	100.91	84.76	16.15	0.00	0.00	82,000	12,000	23,000	840	6,500	<100	--	--
02/22/02 ¹⁵	100.91	88.22	12.69	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
05/24/02 ¹⁵	100.91	84.73	16.18	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER				--	--	--	--
08/29/02 ¹⁵	100.91	84.74	16.17	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
11/29/02	100.91	85.59	15.32	0.00	0.00	890	50	150	14	77	<10	--	--
02/28/03	-- ¹⁶	-- ¹⁶	10.07	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
05/30/03 ¹⁷	-- ¹⁶	-- ¹⁶	11.12	0.00	0.00	190	0.8	1	1	3	62	--	--
08/22/03	-- ¹⁶	-- ¹⁶	DRY	--	--	--	--	--	--	--	--	--	--
11/24-25/03 ¹⁷	-- ¹⁶	-- ¹⁶	13.99	0.00	0.00	1,000	110	6	18	6	6	--	--
02/27/04	-- ¹⁶	-- ¹⁶	11.31	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-8													
10/27/88	--	--	--	--	--	190,000	27,000	43,000	2,200	15,000	--	--	--
01/05/89	--	87.65	12.02	--	--	87,000	24,000	39,000	3,000	15,000	--	--	--
04/06/89	99.67	87.89	11.78	--	--	--	--	--	--	--	--	--	--
06/28/89	99.67	86.27	13.40	--	--	120,000	22,000	35,000	2,900	16,000	--	--	--
10/03/89	99.67	85.92	13.84	0.11	--	--	--	--	--	--	--	--	--
01/04/90	99.67	85.76	13.99	0.10	--	--	--	--	--	--	--	--	--
04/03/90	99.67	86.84	13.07	0.30	--	--	--	--	--	--	--	--	--
07/03/90	99.67	86.59	13.11	0.04	--	--	--	--	--	--	--	--	--
11/06/90	99.67	85.02	14.77	0.15	--	--	--	--	--	--	--	--	--
01/04/91	99.67	85.22	14.59	0.18	--	--	--	--	--	--	--	--	--
04/03/91	99.67	88.18	11.53	0.05	--	--	--	--	--	--	--	--	--
07/02/91	99.67	86.34	13.71	0.48	--	--	--	--	--	--	--	--	--
10/02/91	99.67	85.05	14.84	0.27	--	--	--	--	--	--	--	--	--
01/02/92	99.67	84.86	15.05	0.30	--	--	--	--	--	--	--	--	--
04/07/92	99.67	87.73	12.17	0.29	--	--	--	--	--	--	--	--	--
08/13/92	99.67	84.96	14.96	0.31	--	--	--	--	--	--	--	--	--
12/03/92	99.67	84.44	15.85	0.78	--	--	--	--	--	--	--	--	--
03/25/93	99.67	88.89	10.78	--	--	--	--	--	--	--	--	--	--
06/23/93	99.67	87.60	12.27	0.25	--	--	--	--	--	--	--	--	--
09/21/93	99.67	86.25	13.68	0.32	--	--	--	--	--	--	--	--	--
12/02/93	99.67	85.86	14.00	0.24	--	--	--	--	--	--	--	--	--
03/08/94	99.67	87.83	11.84	--	--	--	--	--	--	--	--	--	--
06/13/94	99.67	87.58	12.11	0.03	--	--	--	--	--	--	--	--	--
10/04/94	99.67	85.47	14.20	--	--	--	--	--	--	--	--	--	--
11/14/94	99.67	85.61	14.06	--	--	140,000	12,000	36,000	2,400	17,000	--	--	--
05/15/95	99.67	89.72	9.95	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.67	88.53	11.14	--	--	--	--	--	--	--	--	--	--
11/28/95	99.67	86.35	13.32	--	--	100,000	6,900	34,000	2,700	16,000	650	--	--
02/20/96	99.67	89.67	10.00	--	--	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/29/96	99.67	89.37	10.30	--	--	130,000	8,800	30,000	2,300	14,000	<500	--	--
08/27/96	99.67	87.42	12.25	--	--	--	--	--	--	--	--	--	--
11/22/96	99.67	87.66	12.01	--	--	150,000	7,400	33,000	2,400	14,000	<500	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPH SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-8 (cont)													
02/18/97	99.67	90.56	9.11	--	--	--	--	--	--	--	--	--	--
05/23/97	99.67	88.09	11.58	--	--	140,000	11,000	38,000	3,200	18,000	<250	--	--
08/04/97	99.67	87.49	12.18	--	--	140,000	8,000	38,000	3,500	18,000	<500	--	--
11/25/97	99.67	82.62	17.05	--	--	290,000 ⁵	15,000	71,000	7,400	36,000	3,600	--	--
02/25/98	99.67	89.64	10.03	--	--	--	--	--	--	--	--	--	--
05/21/98	99.67	90.26	9.41	--	--	110,000	2,800	11,000	1,200	9,800	660	--	--
08/19/98	99.67	82.47	17.20	--	--	--	--	--	--	--	--	--	--
11/19/98	99.67	83.00	16.67	--	--	51,000	3,100	25,000	2,300	15,000	3,100	--	--
02/12/99	99.67	89.15	10.52	--	--	--	--	--	--	--	--	--	--
05/10/99	99.67	88.72	10.95	--	--	104,000	2,980	22,000	1,960	12,800	<2,500/<333 ⁷	--	--
09/02/99	99.67	89.40	10.27	--	--	--	--	--	--	--	--	--	--
02/03/00	99.67	88.22	11.45	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	99.67	88.77	10.90	0.00	0.00	37,000 ⁸	2,200	12,000	<100	8,400	1,900	--	--
08/02/00 ¹⁵	99.67	87.42	12.25	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	99.67	86.73	12.94	0.00	0.00	63,100	2,330	17,200	1,520	11,300	<250	--	--
02/08/01 ¹⁵	99.67	86.42	13.25	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	99.67	85.51	14.16	0.00	0.00	79,400	1,120	18,900	<2,500	13,400	47.6	--	--
08/28/01 ¹⁵	99.67	84.08	15.59	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/26/01 ¹⁵	99.67	86.07	13.60	0.00	0.00	48,000	640	10,000	980	8,500	<100	--	--
02/22/02 ¹⁵	99.67	89.16	10.51	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	99.67	86.61	13.06	0.00	0.00	62,000	1,100	14,000	1,300	9,600	<200	--	--
08/29/02 ¹⁵	99.67	86.11	13.56	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02	99.67	86.63	13.04	0.00	0.00	57,000	590	11,000	1,200	10,000	<50	--	--
02/28/03	99.67	89.59	10.08	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/03 ¹⁷	99.67	88.67	11.00	0.00	0.00	13,000	100	650	270	2,100	<0.5	--	--
08/22/03 ¹⁵	99.67	86.97	12.70	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/24-25/03 ¹⁷	99.67	86.39	13.28	0.00	0.00	64,000	450	17,000	1,300	9,900	<5	--	--
02/27/04	99.67	89.46	10.21	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-9													
10/27/88	--	--	--	--	--	50,000	2,000	9,900	2,000	14,000	--	--	--
01/05/89	--	88.52	12.63	--	--	55,000	670	8,900	3,400	16,000	--	--	--
04/06/89	101.15	88.69	12.46	--	--	--	--	--	--	--	--	--	--
06/28/89	101.15	87.11	14.04	--	--	100,000	510	4,500	2,600	13,000	--	--	--
10/03/89	101.15	86.54	14.61	--	--	130,000	540	8,000	3,200	17,000	--	--	--
01/04/90	101.15	86.56	14.59	--	--	83,000	600	4,600	2,600	14,000	--	--	--
04/03/90	101.15	87.40	13.75	--	--	52,000	1,600	5,400	3,100	16,000	--	--	--
07/03/90	101.15	87.31	13.84	--	--	100,000	520	5,400	3,200	16,000	--	--	--
11/06/90	101.15	85.73	15.42	--	--	--	--	--	--	--	--	--	--
01/04/91	101.15	85.78	15.37	--	--	59,000	1,100	5,600	2,500	13,000	--	--	--
04/03/91	101.15	88.88	12.27	--	--	--	--	--	--	--	--	--	--
07/02/91	101.15	86.98	14.17	--	--	130,000	1,900	7,600	3,600	20,000	--	--	--
10/02/91	101.15	85.47	15.68	--	--	--	--	--	--	--	--	--	--
01/02/92	101.15	85.50	15.65	--	--	100,000	3,300	8,200	2,800	14,000	--	--	--
04/07/92	101.15	87.31	13.84	--	--	--	--	--	--	--	--	--	--
08/13/92	101.15	85.65	15.50	--	--	45,000	1,300	3,000	1,500	7,100	--	--	--
12/03/92	101.15	84.49	16.66	--	--	--	--	--	--	--	--	--	--
03/25/93	101.15	89.67	11.48	--	--	220,000	540	3,200	2,100	18,000	--	--	--
06/23/93	101.15	88.32	12.83	--	--	--	--	--	--	--	--	--	--
09/21/93	101.15	86.84	14.31	--	--	54,000	1,900	3,400	1,700	9,100	--	--	--
12/02/93	101.15	86.46	14.70	0.01	--	--	--	--	--	--	--	--	--
03/08/94	101.15	88.52	12.63	--	--	49,000	800	780	390	3,600	--	--	--
06/13/94	101.15	87.50	13.65	--	--	--	--	--	--	--	--	--	--
10/04/94	101.15	85.95	15.20	--	--	180,000	2,600	5,400	1,700	11,000	--	--	--
11/14/94	101.15	86.90	14.25	--	--	--	--	--	--	--	--	--	--
05/15/95	101.15	90.51	10.64	--	--	--	--	--	--	--	--	--	--
08/04/95	101.15	89.26	11.89	--	--	42,000	1,400	2,700	1,700	9,000	--	--	--
11/28/95	101.15	87.23	13.92	--	--	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/20/96	101.15	90.54	10.61	Sheen	--	41,000	1,600	1,700	750	6,500	<100	--	--
05/29/96	101.15	90.34	10.81	--	--	--	--	--	--	--	--	--	--
08/27/96	101.15	88.25	12.90	Sheen	--	71,000	2,700	3,600	920	5,900	290	--	--
11/22/96	101.15	88.27	12.88	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-9 (cont)													
02/18/97	101.15	91.49	9.66	0.01	--	78,000	1,800	3,800	2,300	13,000	510	--	--
05/23/97	101.15	88.62	12.53	--	--	--	--	--	--	--	--	--	--
08/04/97	101.15	88.15	13.00	--	--	73,000	2,600	2,200	440	9,600	370	--	--
11/25/97	101.15	84.03	17.12	--	--	--	--	--	--	--	--	--	--
02/25/98	101.15	88.46	12.69	--	--	34,000	150	510	1,300	6,400	<250	--	--
05/21/98	101.15	91.01	10.14	--	--	--	--	--	--	--	--	--	--
08/19/98	101.15	86.05	15.10	--	--	42,000	<50	330	890	4,200	<250	--	--
11/19/98	101.15	85.18	15.97	--	--	--	--	--	--	--	--	--	--
02/12/99	101.15	89.90	11.25	--	--	13,000	<100	200	560	2,200	<500	--	--
05/10/99	101.15	88.81	12.34	--	--	16,900	<50	112	506	1,850	<500/<20 ⁷	--	--
09/02/99	101.15	89.81	11.34	--	--	7,200	<25	<25	185	493	<250	--	--
02/03/00	101.15	88.93	12.22	--	--	11,000	68	22	380	1,000	66	--	--
05/09/00 ¹⁵	101.15	89.55	11.60	0.00	0.00	--	--	--	--	--	--	--	--
08/02/00 ¹⁵	101.15	88.10	13.05	0.00	0.00	3,400 ⁸	41	10	<5.0	360	77	--	--
11/09-10/00 ¹⁵	101.15	87.51	13.64	0.00	0.00	--	--	--	--	--	--	--	--
02/08/01 ¹⁵	101.15	87.09	14.06	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	101.15	86.20	14.95	0.00	0.00	--	--	--	--	--	--	--	--
08/28/01 ¹⁵	101.15	85.03	16.12	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER				--	--	--	--
11/26/01 ¹⁵	101.15	86.49	14.66	0.00	0.00	--	--	--	--	--	--	--	--
02/22/02 ¹⁵	101.15	90.20	10.95	0.00	0.00	5,300	<10	4.5	79	190	<20	--	--
05/24/02 ¹⁵	101.15	87.52	13.63	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
08/29/02 ¹⁵	101.15	86.75	14.40	0.00	0.00	4,200	<5.0	2.7	80	37	<2.5	--	--
11/29/02	101.15	87.27	13.88	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/28/03	101.15	90.68	10.47	0.00	0.00	6,300	<100	11	130	210	<100	--	--
05/30/03	101.15	89.54	11.61	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
08/22/03 ¹⁷	101.15	87.64	13.51	0.00	0.00	5,500	1	5	150	38	<0.5	--	--
11/24-25/03	101.15	87.21	13.94	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/27/04 ¹⁷	101.15	90.60	10.55	0.00	0.00	6,300	0.7	6	160	39	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-10													
10/27/88	--	--	--	--	--	<500	26	13	<5.0	<5.0	--	--	--
01/05/89	--	89.72	12.64	--	--	<1,000	<0.3	<0.3	<0.3	<0.3	--	--	--
04/06/89	102.36	90.98	11.38	--	--	--	--	--	--	--	--	--	--
06/28/89	102.36	88.72	13.64	--	--	<500	<0.5	<0.5	<0.5	<0.5	--	--	--
10/03/89	102.36	88.51	13.85	--	--	<500	<0.5	<0.5	<0.5	<0.5	--	--	--
01/04/90	102.36	88.61	13.75	--	--	<50	0.5	1.1	<0.5	1.7	--	--	--
04/03/90	102.36	89.50	12.86	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
07/03/90	102.36	88.93	13.43	--	--	--	--	--	--	--	--	--	--
11/06/90	102.36	87.54	14.82	--	--	--	--	--	--	--	--	--	--
01/04/91	102.36	88.38	13.98	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/03/91	102.36	92.57	9.79	--	--	--	--	--	--	--	--	--	--
07/02/91	102.36	90.08	12.28	--	--	--	--	--	--	--	--	--	--
10/02/91	102.36	87.83	14.53	--	--	--	--	--	--	--	--	--	--
01/02/92	102.36	88.76	13.60	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/07/92	102.36	90.53	11.83	--	--	--	--	--	--	--	--	--	--
08/13/92	102.36	88.41	13.95	--	--	--	--	--	--	--	--	--	--
12/03/92	102.36	88.40	13.96	--	--	--	--	--	--	--	--	--	--
03/25/93	102.36	93.91	8.45	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--	--
06/23/93	102.36	91.03	11.60	--	--	--	--	--	--	--	--	--	--
09/21/93	102.36	89.31	13.32	--	--	--	--	--	--	--	--	--	--
12/02/93	102.36	89.36	13.27	--	--	--	--	--	--	--	--	--	--
03/08/94	102.36	91.51	10.85	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/13/94	102.36	--	--	--	--	--	--	--	--	--	--	--	--
10/04/94	102.36	88.46	13.90	--	--	--	--	--	--	--	--	--	--
11/14/94	102.36	90.56	11.80	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
05/15/95	102.36	93.38	8.98	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	102.36	91.92	10.44	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/28/95	102.36	88.81	13.55	--	--	<50	1.6	0.81	<0.5	<0.5	<0.6	--	--
02/20/96	102.36	93.84	8.52	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	102.36	93.16	9.20	--	--	<50	<0.5	<0.5	<0.5	0.9	<5.0	--	--
08/27/96	102.36	90.35	12.01	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	102.36	90.84	11.52	--	--	<50	<0.5	<0.5	<0.5	1.0	<5.0	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-10 (cont)													
02/18/97	102.36	93.87	8.49	--	--	<50	0.7	<0.5	<0.5	<0.5	<5.0	--	--
05/23/97	102.36	91.48	10.88	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/04/97	102.36	89.07	13.29	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/25/97	102.36	89.06	13.30	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	102.36	94.54	7.82	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/21/98	102.36	96.22	6.14	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
08/19/98	102.36	90.62	11.74	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	102.36	88.96	13.40	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	102.36	93.94	8.42	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/10/99	102.36	92.14	10.22	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0/<2.0 ⁷	--	--
09/02/99	102.36	93.13	9.23	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	102.36	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--
05/09/00	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
08/02/00	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
11/09-10/00	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
02/08/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
05/02/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
08/28/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
11/26/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
02/22/02	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
05/24/02	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
08/29/02	102.36	88.90	13.46	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
11/29/02	102.36	89.30	13.06	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	102.36	92.79	9.57	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03 ¹⁷	102.36	92.37	9.99	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ^{15,17}	102.36	90.54	11.82	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03 ¹⁷	102.36	89.42	12.94	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	102.36	94.32	8.04	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-11													
06/28/89	--	85.64	14.33	--	--	60,000	36,000	13,000	2,500	12,000	--	--	--
10/03/89	--	85.36	14.61	--	--	14,000	4,200	1,400	240	1,300	--	--	--
01/04/90	99.97	85.42	14.55	--	--	82,000	33,000	11,000	2,000	10,000	--	--	--
04/03/90	99.97	86.15	13.82	--	--	78,000	35,000	12,000	2,300	12,000	--	--	--
07/03/90	99.97	85.97	14.00	--	--	140,000	32,000	12,000	2,100	10,000	--	--	--
11/06/90	99.97	84.41	15.56	--	--	--	--	--	--	--	--	--	--
01/04/91	99.97	85.09	14.88	0.30	--	--	--	--	--	--	--	--	--
04/03/91	99.97	89.22	10.75	0.21	--	340,000	29,000	14,000	3,700	24,000	--	--	--
07/02/91	99.97	86.00	13.97	0.02	--	130,000	27,000	14,000	2,200	12,000	--	--	--
10/02/91	99.97	84.37	15.60	--	--	--	--	--	--	--	--	--	--
01/02/92	99.97	85.46	14.51	--	--	77,000	18,000	14,000	1,900	10,000	--	--	--
04/07/92	99.97	86.84	13.13	--	--	--	--	--	--	--	--	--	--
08/13/92	99.97	82.53	17.04	--	--	--	--	--	--	--	--	--	--
12/03/92	99.57	83.98	15.59	--	--	--	--	--	--	--	--	--	--
03/25/93	99.57	89.51	10.06	--	--	110,000	13,000	2,100	5,900	9,800	--	--	--
03/08/94	99.57	87.87	11.70	--	--	--	--	--	--	--	--	--	--
06/13/94	99.57	87.41	12.16	--	--	--	--	--	--	--	--	--	--
10/04/94	99.57	INACCESSIBLE ³	--	--	--	--	--	--	--	--	--	--	--
11/14/94	99.57	INACCESSIBLE ³	--	--	--	--	--	--	--	--	--	--	--
05/15/95	99.57	89.55	10.02	--	--	--	--	--	--	--	--	--	--
08/04/95	99.57	87.75	11.82	--	--	33,000	9,400	3,000	1,800	6,100	--	--	--
11/28/95	99.57	82.85	16.72	--	--	SAMPLED SEMI-ANNUALLY					--	--	--
02/20/96	99.57	89.57	10.00	--	--	22,000	4,500	2,200	560	3,500	<120	--	--
05/29/96	99.57	88.43	11.14	--	--	--	--	--	--	--	--	--	--
08/27/96	99.57	86.44	13.13	--	--	85,000	10,000	6,600	1,500	6,500	260	--	--
11/22/96	99.57	87.47	12.10	--	--	--	--	--	--	--	--	--	--
02/18/97	99.57	90.34	9.23	--	--	42,000	7,100	3,100	830	4,200	510	--	--
05/23/97	99.57	87.29	12.28	--	--	--	--	--	--	--	--	--	--
08/04/97	99.57	86.72	12.85	--	--	79,000	14,000	8,400	2,300	9,900	6,900	--	--
11/25/97	99.57	85.71	13.86	--	--	--	--	--	--	--	--	--	--
02/25/98	99.57	82.55	17.02	--	--	34,000	5,200	2,200	1,200	4,400	5,000/5,300 ⁷	--	--
05/21/98	99.57	88.40	11.17	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH		TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
					REMOVED	(gallons)								
MW-11 (cont)														
08/19/98	99.57	80.79	18.78	--	--	--	--	--	--	--	--	--	--	--
11/19/98	99.57	81.22	18.35	--	--	16,000	1,200	<100	690	1,200	540	--	--	--
02/12/99	99.57	88.15	11.42	--	--	4,200	580	41	220	470	<50	--	--	--
05/10/99	99.57	87.01	12.56	--	--	--	--	--	--	--	--	--	--	--
09/02/99	99.57	84.83	14.74	--	--	5,150	496	43.6	150	405	<250	--	--	--
02/03/00	99.57	87.23	12.34	--	--	14,000	3,400	150	860	1,500	<250	--	--	--
05/09/00 ¹⁵	99.57	87.24	12.33	0.00	0.00	--	--	--	--	--	--	--	--	--
08/02/00 ¹⁵	99.57	85.52	14.05	0.00	0.00	7,100 ⁸	2,900	61	<20	1,200	<100	--	--	--
11/09-10/00 ¹⁵	99.57	84.85	14.72	0.00	0.00	--	--	--	--	--	--	--	--	--
02/08/01 ¹⁵	99.57	84.68	14.89	0.00	0.00	18,100 ¹¹	4,300	146	743	819	<250	--	--	--
05/02/01 ¹⁵	99.57	83.82	15.75	0.00	0.00	--	--	--	--	--	--	--	--	--
08/28/01 ¹⁵	99.57	82.55	17.02	0.00	0.00	2,900 ¹³	600	35	120	91	100	--	--	--
11/26/01 ¹⁵	99.57	84.90	14.67	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
02/22/02 ¹⁵	99.57	88.00	11.57	0.00	0.00	7,700	710	61	370	500	<20	--	--	--
05/24/02 ¹⁵	99.57	84.81	14.76	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
08/29/02 ¹⁵	99.57	84.41	15.16	0.00	0.00	14,000	1,300	82	630	910	<20	--	--	--
11/29/02 ¹⁵	99.57	84.82	14.75	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
02/28/03	99.57	87.97	11.60	0.00	0.00	5,100	600	95	150	390	<50	--	--	--
05/30/03	99.57	87.17	12.40	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
08/22/03 ¹⁷	99.57	85.14	14.43	0.00	0.00	25,000	3,000	980	1,200	2,000	7	--	--	--
11/24-25/03	99.57	84.52	15.05	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
02/27/04 ¹⁷	99.57	89.79	9.78	0.00	0.00	10,000	970	570	430	1,100	1	--	--	--
MW-12														
06/28/89	--	85.54	14.10	--	--	55,000	30,000	21,000	2,900	19,000	--	--	--	--
10/03/89	--	85.34	14.30	--	--	170,000	30,000	23,000	2,700	15,000	--	--	--	--
01/04/90	99.64	85.29	14.35	--	--	110,000	24,000	19,000	2,300	12,000	--	--	--	--
04/03/90	99.64	86.05	13.59	--	--	89,000	41,000	28,000	3,300	17,000	--	--	--	--
07/03/90	99.64	85.87	13.77	--	--	170,000	27,000	20,000	2,200	12,000	--	--	--	--
11/06/90	99.64	84.45	15.19	0.06	--	110,000	28,000	21,000	2,400	14,000	--	--	--	--
01/04/91	99.64	--	14.52	--	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-12 (cont)													
04/03/91	99.64	--	10.91	--	--	--	--	--	--	--	--	--	--
04/09/91	99.64	--	--	--	--	170,000	39,000	17,000	2,400	14,000	--	--	--
07/02/91	99.64	--	13.51	--	--	--	--	--	--	--	--	--	--
10/02/91	99.64	--	14.93	--	--	170,000	27,000	15,000	2,600	17,000	--	--	--
01/02/92	99.64	85.19	14.45	--	--	--	--	--	--	--	--	--	--
04/07/92	99.64	86.59	13.05	--	--	--	--	--	--	--	--	--	--
08/13/92	99.22	81.83	17.39	--	--	--	--	--	--	--	--	--	--
12/03/92	99.22	83.88	15.34	--	--	2,400,000	19,000	21,000	14,000	110,000	--	--	--
03/25/93	99.22	88.85	10.37	--	--	--	--	--	--	--	--	--	--
06/23/93	99.22	87.01	12.21	--	--	110,000	30,000	19,000	2,000	12,000	--	--	--
03/08/94	99.22	87.27	11.95	--	--	--	--	--	--	--	--	--	--
06/13/94	99.22	86.87	12.35	--	--	62,000	6,600	6,900	2,400	9,900	--	--	--
10/04/94	99.22	INACCESSIBLE ³		--	--	--	--	--	--	--	--	--	--
11/14/94	99.22	INACCESSIBLE ³		--	--	--	--	--	--	--	--	--	--
05/15/95	99.22	89.16	10.06	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.22	87.62	11.60	--	--	--	--	--	--	--	--	--	--
11/28/95	99.22	82.59	16.63	--	--	110,000	26,000	22,000	2,300	12,000	1,100	--	--
02/20/96	99.22	88.12	11.10	--	--	SAMPLED SEMI-ANNUALLY							
05/29/96	99.22	87.74	11.48	--	--	120,000	18,000	18,000	2,000	11,000	710	--	--
08/27/96	99.22	86.72	12.50	--	--	--	--	--	--	--	--	--	--
11/22/96	99.22	86.30	12.92	--	--	160,000	24,000	22,000	1,900	11,000	980	--	--
02/18/97	99.22	90.02	9.20	--	--	--	--	--	--	--	--	--	--
05/23/97 ⁶	99.22	87.22	12.00	--	--	130,000	27,000	22,000	2,700	15,000	6,200	--	--
08/04/97	99.22	86.64	12.58	--	--	130,000	23,000	28,000	2,700	13,000	11,000	--	--
11/25/97	99.22	85.30	13.92	--	--	290,000 ⁵	53,000	31,000	6,400	30,000	35,000	--	--
02/25/98	99.22	81.01	18.21	--	--	--	--	--	--	--	--	--	--
05/21/98	99.22	88.04	11.18	--	--	150,000	14,000	16,000	1,800	250	66,000/69,000 ⁷	--	--
08/19/98	99.22	80.82	18.40	--	--	--	--	--	--	--	--	--	--
11/19/98	99.22	81.24	17.98	--	--	68,000	15,000	10,000	2,000	8,800	14,000	--	--
02/12/99	99.22	84.27	14.95	--	--	--	--	--	--	--	--	--	--
05/10/99	99.22	86.75	12.47	--	--	72,600	9,920	8,100	1,600	7,480	25,800/32,500 ⁷	--	--
09/02/99	99.22	85.37	13.85	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-12 (cont)													
2/3/000	99.22	86.77	12.45	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	99.22	86.96	12.26	0.00	0.00	27,000 ⁸	7,800	4,000	<100	6,600	6,100	--	--
08/02/00 ¹⁵	99.22	85.37	13.85	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	99.22	84.73	14.49	0.00	0.00	46,400	9,550	5,470	1,240	7,660	5,150	--	--
02/08/01 ¹⁵	99.22	84.43	14.79	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	99.22	83.49	15.73	0.00	0.00	94,000	8,720	3,630	<2,500	8,800	3,410	--	--
08/28/01 ¹⁵	99.22	82.16	17.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/26/01 ¹⁵	99.22	84.27	14.95	0.00	0.00	5,000	770	72	150	470	230	--	--
02/22/02 ¹⁵	99.22	87.43	11.79	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	99.22	84.42	14.80	0.00	0.00	52,000	5,200	4,500	1,800	8,300	990	--	--
08/29/02 ¹⁵	99.22	84.24	14.98	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02	99.22	84.69	14.53	0.00	0.00	40,000	4,900	3,800	1,100	7,000	1,000	--	--
02/28/03	99.22	87.81	11.41	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/03 ¹⁷	99.22	86.97	12.25	0.00	0.00	46,000	4,300	3,100	1,400	7,500	670	--	--
08/22/03	99.22	85.16	14.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/24-25/03 ¹⁷	99.22	84.62	14.60	0.00	0.00	45,000	5,200	3,100	1,400	8,400	480	--	--
02/27/04	99.22	88.16	11.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
MW-13													
06/28/89	--	85.25	13.22	--	--	54,000	12,000	10,000	1,900	15,000	--	--	--
10/03/89	--	84.93	13.54	--	--	120,000	10,000	10,000	2,300	15,000	--	--	--
01/04/90	98.47	84.83	13.64	--	--	87,000	6,800	10,000	2,000	12,000	--	--	--
04/03/90	98.47	85.52	12.95	--	--	53,000	12,000	14,000	2,900	17,000	--	--	--
07/03/90	98.47	85.42	13.05	--	--	90,000	8,400	11,000	2,000	11,000	--	--	--
11/06/90	98.47	84.35	14.12	--	--	--	--	--	--	--	--	--	--
01/04/91	98.47	84.42	14.05	--	--	72,000	5,500	12,000	2,300	12,000	--	--	--
04/03/91	98.47	87.06	11.41	--	--	--	--	--	--	--	--	--	--
07/02/91	98.47	85.30	13.17	--	--	120,000	12,000	13,000	2,500	14,000	--	--	--
10/02/91	98.47	84.23	14.24	--	--	--	--	--	--	--	--	--	--
01/02/92	98.47	84.34	14.13	0.03	--	--	--	--	--	--	--	--	--
04/07/92	98.47	85.41	13.06	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-13 (cont)													
08/13/92	98.47	84.21	14.26	--	--	84,000	7,400	11,000	2,600	13,000	--	--	--
12/03/92	98.47	83.65	14.82	--	--	--	--	--	--	--	--	--	--
03/25/93	98.47	87.74	10.73	--	--	97,000	5,200	2,500	7,200	12,000	--	--	--
06/23/93	98.47	86.50	11.97	--	--	--	--	--	--	--	--	--	--
09/21/93	98.47	85.39	13.08	--	--	80,000	7,600	9,000	2,900	14,000	--	--	--
12/02/93	98.47	85.02	13.45	--	--	--	--	--	--	--	--	--	--
03/08/94	98.47	86.72	11.75	--	--	78,000	5,300	7,600	2,600	10,000	--	--	--
06/13/94	98.47	86.17	12.30	--	--	--	--	--	--	--	--	--	--
10/04/94	98.47	84.29	14.18	--	--	39,000	2,300	2,700	850	4,600	--	--	--
11/14/94	98.47	85.85	12.62	--	--	--	--	--	--	--	--	--	--
05/15/95	98.47	88.54	9.93	--	--	--	--	--	--	--	--	--	--
08/04/95	98.47	87.39	11.08	--	--	47,000	7,700	10,000	2,900	10,000	--	--	--
11/28/95	98.47	85.52	12.95	--	--	SAMPLED SEMI-ANNUALLY							
02/20/96	98.47	88.61	9.86	--	--	59,000	5,500	5,500	2,900	8,800	<120	--	--
05/29/96	98.47	88.17	10.30	--	--	--	--	--	--	--	--	--	--
08/27/96	98.47	86.50	11.97	--	--	65,000	3,500	2,800	2,200	6,900	200	--	--
11/22/96	98.47	86.76	11.71	--	--	--	--	--	--	--	--	--	--
02/18/97	98.47	89.31	9.16	--	--	69,000	4,500	4,100	2,500	7,900	310	--	--
05/23/97	98.47	86.91	11.56	--	--	--	--	--	--	--	--	--	--
08/04/97	98.47	86.32	12.15	--	--	61,000	5,700	5,100	3,600	9,200	230	--	--
11/25/97	98.47	85.35	13.12	--	--	--	--	--	--	--	--	--	--
02/25/98	98.47	87.96	10.51	--	--	42,000	3,800	1,000	2,000	5,000	<250	--	--
05/21/98	98.47	89.12	9.35	--	--	--	--	--	--	--	--	--	--
08/19/98	98.47	84.47	14.00	--	--	57,000	1,600	440	1,900	4,500	<250	--	--
11/19/98	98.47	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--
02/12/99	98.47	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--
03/26/99	98.47	89.17	9.30	--	--	30,800	473	101	1,430	2,800	106	--	--
05/10/99	98.47	87.74	10.73	--	--	--	--	--	--	--	--	--	--
09/02/99	98.47	87.48	10.99	--	--	87,000	2,610	19,100	1,510	12,000	<2,500	--	--
02/03/00	98.47	88.02	10.45	--	--	2,900	200	16	200	340	68	--	--
05/09/00	98.47	87.95	10.52	0.00	0.00	--	--	--	--	--	--	--	--
08/02/00	98.47	86.69	11.78	0.00	0.00	1,600 ⁸	15	4.1	7.3	160	<13	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-13 (cont)													
11/09-10/00	98.47	86.18	12.29	0.00	0.00	--	--	--	--	--	--	--	--
02/08/01	98.47	85.76	12.71	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01	98.47	84.98	13.49	0.00	0.00	--	--	--	--	--	--	--	--
08/28/01	98.47	DRY	--	--	--	--	--	--	--	--	--	--	--
11/26/01	98.47	DRY	--	--	--	--	--	--	--	--	--	--	--
02/22/02	98.47	INACCESSIBLE - CAR PARKED OVER WELL				--	--	--	--	--	--	--	--
05/24/02	98.47	86.06	12.41	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
08/29/02	98.47	85.57	12.90	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER				--	--	--	--
11/29/02	98.47	85.86	12.61	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/28/03	98.47	88.48	9.99	0.00	0.00	340	<5.0	0.94	0.52	5.0	<10	--	--
05/30/03	98.47	INACCESSIBLE - VEHICLE PARKED OVER WELL				--	--	--	--	--	--	--	--
08/22/03 ^{17,18}	98.47	86.47	12.00	0.00	0.00	770	10	2	8	2	<0.5	--	--
11/24-25/03	98.47	85.85	12.62	0.00	0.00	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/27/04 ¹⁷	98.47	87.94	10.53	0.00	0.00	2,300	27	7	14	10	<0.5	--	--
MW-14													
08/29/90	--	78.29	21.39	--	--	970	4.0	2.0	0.7	2.0	--	--	1.0
11/06/90	--	78.06	21.62	--	--	920	10	10	4.0	9.0	--	--	--
01/04/91	99.68	77.99	21.69	--	--	1,000	<0.5	4.0	2.6	4.2	--	--	--
04/03/91	99.68	80.15	19.53	--	--	1,200	380	6.0	7.0	18	--	--	--
07/02/91	99.68	78.75	20.93	--	--	460	27	1.0	1.2	1.0	--	--	--
10/02/91	99.68	78.16	21.52	--	--	480	6.7	0.8	1.4	1.8	--	--	--
01/02/92	99.68	78.25	21.43	--	--	1,100	2.4	1.5	6.2	18	--	--	--
04/07/92	99.68	78.32	21.36	--	--	290	<0.5	1.4	<0.5	1.2	--	--	--
08/13/92	99.68	78.61	21.07	--	--	370	10	1.2	<0.5	0.9	--	--	--
12/03/92	99.68	78.01	21.67	--	--	230	1.3	<0.5	<0.5	<0.5	--	--	--
03/25/93	99.68	80.65	19.03	--	--	390	57	2.1	1.3	1.7	--	--	--
06/23/93	99.68	79.74	19.94	--	--	4,400	460	220	16	62	--	--	--
09/21/93	99.68	79.03	20.65	--	--	680	8.7	1.7	3.2	12	--	--	--
12/02/93	99.68	78.63	21.05	--	--	900	0.8	7.0	3.0	7.0	--	--	--
03/08/94	99.68	79.63	20.05	--	--	1,700	2.4	7.7	5.6	14	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-14 (cont)													
06/13/94	99.68	79.47	20.21	--	--	750	0.8	8.0	3.2	5.7	--	--	--
10/04/94	99.68	78.98	20.70	--	--	130	3.4	5.4	<0.5	2.0	--	--	--
11/14/94	99.68	79.68	20.00	--	--	9,900	620	1,600	120	920	--	--	--
05/15/95	99.68	81.19	18.49	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.68	80.30	19.38	--	--	1,000	170	58	6.6	20	--	--	--
11/28/95	99.68	79.35	20.33	--	--	1,500	300	72	65	190	<6.0	--	--
02/20/96	99.68	82.72	16.96	--	--	70	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	99.68	81.10	18.58	--	--	1,600	170	39	5.0	21	6.3	--	--
08/27/96	99.68	79.89	19.79	--	--	80	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	99.68	80.13	19.55	--	--	620	49	13	7.2	22	210	--	--
02/18/97	99.68	82.37	17.31	--	--	190	14	9.6	3.1	15	<5.0	--	--
05/23/97	99.68	80.12	19.56	--	--	130	18	16	3.4	17	<5.0	--	--
08/04/97	99.68	79.80	19.88	--	--	200	8.3	7.9	4.1	10	<5.0	--	--
11/25/97	99.68	79.91	19.77	--	--	530	42	62	10	37	<5.0	--	--
02/25/98	99.68	85.40	14.28	--	--	220	26	10	7.0	22	23	--	--
05/21/98	99.68	81.90	17.78	--	--	8,300	1,400	48	29	59	<50	--	--
08/19/98	99.68	80.35	19.33	--	--	7,900	610	390	51	300	<250	--	--
11/19/98	99.68	79.40	20.28	--	--	87	1.0	<0.5	<0.5	<0.5	27	--	--
02/12/99	99.68	81.36	18.32	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/10/99	99.68	80.57	19.11	--	--	1,930	254	41.2	6.71	23	76.4/<5.0 ⁷	--	--
09/02/99	99.68	79.57	20.11	--	--	647	38.1	1.45	<0.5	1.32	10.8	--	--
02/03/00	99.68	80.80	18.88	--	--	UNABLE TO SAMPLE		--	--	--	--	--	--
05/09/00	99.68	80.99	18.69	0.00	0.00	370 ⁹	9.7	2.2	1.3	1.5	13	--	--
08/02/00	99.68	79.99	19.69	0.00	0.00	80 ¹⁰	1.2	1.8	0.85	1.2	3.1	--	--
11/09-10/00	99.68	79.49	20.19	0.00	0.00	92.3	<0.500	0.921	<0.500	<0.500	<2.50	--	--
02/08/01	99.68	79.01	20.67	0.00	0.00	728 ¹¹	33.7	<5.00	<5.00	<5.00	<25.0	--	--
05/02/01	99.68	79.68	20.00	0.00	0.00	338	3.28	<5.00	<5.00	<5.00	1.35	--	--
08/28/01	99.68	79.06	20.62	0.00	0.00	83 ¹⁴	1.7	0.64	<0.50	<0.50	2.6	--	--
11/26/01	99.68	79.13	20.55	0.00	0.00	240	2.8	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	99.68	80.41	19.27	0.00	0.00	4,000	460	140	55	51	<20	--	--
05/24/02	99.68	79.98	19.70	0.00	0.00	5,800	580	360	61	340	<20	--	--
08/29/02	99.68	79.16	20.52	0.00	0.00	360	14	0.98	<0.50	2.3	<2.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-14 (cont)													
11/29/02	99.68	78.98	20.70	0.00	0.00	1,400	32	1.8	0.62	2.6	<2.5	--	--
02/28/03	99.68	80.41	19.27	0.00	0.00	320	<5.0	0.64	<0.50	<1.5	<10	--	--
05/30/03 ¹⁷	99.68	80.58	19.10	0.00	0.00	560	150	7	4	8	<0.5	--	--
08/22/03 ¹⁷	99.68	79.96	19.72	0.00	0.00	690	<0.5	<0.5	<0.5	0.6	<0.5	--	--
11/24-25/03 ¹⁷	99.68	79.10	20.58	0.00	0.00	52	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	99.68	80.48	19.20	0.00	0.00	330	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
MW-15													
08/29/90	--	79.48	16.58	--	--	2,000	26	2.0	72	110	--	--	--
11/06/90	--	78.63	17.43	--	--	1,300	40	5.0	45	63	--	--	--
01/04/91	96.06	79.69	16.37	--	--	1,700	46	2.8	58	86	--	--	--
04/03/91	96.06	83.60	12.46	--	--	2,100	74	0.8	44	85	--	--	--
07/02/91	96.06	79.53	16.53	--	--	1,700	39	<0.5	35	46	--	--	--
10/02/91	96.06	78.73	17.33	--	--	1,100	50	<0.5	40	33	--	--	--
01/02/92	96.06	79.60	16.46	--	--	1,300	51	<0.5	30	30	--	--	--
04/07/92	96.06	81.36	14.70	--	--	2,600	98	<5.0	64	36	--	--	--
08/13/92	96.06	79.34	16.72	--	--	510	55	<0.5	35	2.8	--	--	--
12/03/92	96.06	78.63	17.43	--	--	1,000	64	0.9	22	4.4	--	--	--
03/25/93	96.06	82.73	13.33	--	--	1,300	86	52	0.7	7.7	--	--	--
06/23/93	96.06	80.83	15.23	--	--	7,300	34	<0.5	85	160	--	--	--
09/21/93	96.06	79.74	16.32	--	--	1,500	39	<0.5	32	33	--	--	--
12/02/93	96.06	79.49	16.57	--	--	990	28	4.0	8.0	10	--	--	--
03/08/94	96.06	81.45	14.61	--	--	3,400	44	4.0	28	53	--	--	--
10/04/94	96.06	79.58	16.48	--	--	310	11	10	2.2	12	--	--	--
11/14/94	96.06	81.86	14.20	--	--	450	27	2.4	2.2	4.2	--	--	--
05/15/95	96.06	82.68	13.38	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	96.06	81.15	14.91	--	--	<50	0.6	<0.5	<0.5	0.8	--	--	--
11/28/95	96.06	79.94	16.12	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.60	--	--
02/20/96	96.06	85.08	10.98	--	--	1,600	25	0.5	20	38	16	--	--
05/29/96 ⁴	96.06	--	--	--	--	--	--	--	--	--	--	--	--
08/27/96	96.06	80.62	15.44	--	--	80	<0.5	<0.5	<0.5	0.7	<5.0	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-15 (cont)													
11/22/96	96.06	81.57	14.49	--	--	1,500	14	<0.5	6.1	12	7.2	--	--
02/18/97	96.06	83.89	12.17	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/23/97	96.06	81.03	15.03	--	--	130	20	9.7	0.9	1.5	<5.0	--	--
08/04/97	96.06	80.58	15.48	--	--	60	1.3	<0.5	<0.5	1.1	<5.0	--	--
11/25/97	96.06	80.67	15.39	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	96.06	89.53	6.53	--	--	4,300	27	<10	37	46	<50	--	--
05/21/98	96.06	83.09	12.97	--	--	430	25	<0.5	2.3	1.2	<2.5	--	--
08/19/98	96.06	81.16	14.90	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	96.06	80.01	16.05	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	96.06	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--
05/10/99	96.06	81.67	14.39	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0/ ⁷ <2.0	--	--
09/02/99	96.06	80.53	15.53	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	96.06	83.82	12.24	--	--	480	2.5	<1.0	2.6	1.4	<5.0	--	--
05/09/00	96.06	82.41	13.65	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
08/02/00	96.06	81.04	15.02	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/09-10/00	96.06	80.54	15.52	0.00	0.00	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--
02/08/01	96.06	80.36	15.70	0.00	0.00	92.6 ¹¹	0.894	<0.500	<0.500	<0.500	<2.50	--	--
05/02/01	96.06	81.44	14.62	0.00	0.00	<50.0 ¹²	0.830	<5.00	<5.00	5.94	<0.500	--	--
08/28/01	96.06	80.15	15.91	0.00	0.00	<50	<0.50	0.71	<0.50	<0.50	<2.5	--	--
11/26/01	96.06	80.65	15.41	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	96.06	82.51	13.55	0.00	0.00	99	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/24/02	96.06	81.45	14.61	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
08/29/02	96.06	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
11/29/02	96.06	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
02/28/03	96.06	81.80	14.26	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03 ¹⁷	96.06	81.86	14.20	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ¹⁷	96.06	81.00	15.06	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03	96.06	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
02/27/04 ¹⁷	96.06	85.59	10.47	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH		TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
					REMOVED	(gallons)								
MW-16														
08/29/90	--	77.26	20.89	--	--		11,000	6,000	51	1,100	20	--	--	--
11/06/90	--	76.88	21.27	--	--		15,000	6,300	340	1,300	540	--	--	--
01/04/91	98.15	76.52	21.63	--	--		16,000	6,800	820	1,300	1,500	--	--	--
04/03/91	98.15	78.83	19.32	--	--		45,000	7,300	2,200	1,800	4,900	--	--	--
07/02/91	98.15	77.47	20.68	--	--		30,000	6,400	530	1,500	1,800	--	--	--
10/02/91	98.15	76.97	21.18	--	--		24,000	4,600	450	1,400	1,600	--	--	--
01/02/92	98.15	76.85	21.30	--	--		20,000	4,700	240	1,200	1,100	--	--	--
04/07/92	98.15	77.96	20.19	--	--		40,000	5,000	980	1,100	2,100	--	--	--
08/13/92	98.15	77.38	20.77	--	--		17,000	4,500	240	860	530	--	--	--
12/03/92	98.15	76.71	21.44	--	--		39,000	4,600	410	1,100	2,200	--	--	--
03/25/93	98.15	79.32	18.83	--	--		39,000	5,500	1,400	690	2,000	--	--	--
06/23/93	98.15	78.43	19.72	--	--		29,000	6,600	1,200	1,400	3,700	--	--	--
09/21/93	98.15	77.77	20.38	--	--		36,000	6,300	340	1,200	1,800	--	--	--
12/02/93	98.15	77.31	20.84	--	--		28,000	5,600	230	900	820	--	--	--
03/08/94	98.15	77.88	20.27	--	--		35,000	6,500	760	1,000	1,300	--	--	--
10/04/94	98.15	77.57	20.58	--	--		39,000	9,700	680	1,300	3,300	--	--	--
11/14/94	98.15	78.03	20.12	--	--		26,000	5,500	640	690	1,800	--	--	--
05/15/95	98.15	79.99	18.16	--	--		<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	98.15	78.85	19.30	--	--		23,000	6,200	1,900	1,500	4,500	--	--	--
11/28/95	98.15	77.73	20.42	--	--		38,000	6,200	1,700	1,800	5,700	<120	--	--
02/20/96	98.15	81.75	16.40	--	--		46,000	6,600	2,200	2,400	7,300	<250	--	--
05/29/96	98.15	79.61	18.54	--	--		54,000	6,300	1,600	2,200	7,900	<250	--	--
08/27/96	98.15	78.73	19.42	--	--		45,000	4,100	260	1,600	2,800	<250	--	--
11/22/96	98.15	78.79	19.36	--	--		36,000	3,500	120	1,400	1,500	260	--	--
02/18/97	98.15	80.93	17.22	--	--		62,000	5,800	1,300	2,200	8,900	160	--	--
05/23/97	98.15	78.67	19.48	--	--		32,000	4,000	370	1,900	2,900	<250	--	--
08/04/97	98.15	78.43	19.72	--	--		26,000	3,300	280	2,100	1,500	200	--	--
11/25/97	98.15	78.42	19.73	--	--		38,000	3,900	370	2,400	3,000	250	--	--
02/25/98	98.15	84.13	14.02	--	--		60,000	6,400	1,400	2,200	13,000	<1,000	--	--
05/21/98	98.15	80.24	17.91	--	--		71,000	5,100	1,200	2,300	8,200	560	--	--
08/19/98	98.15	78.90	19.25	--	--		40,000	2,300	740	1,700	2,700	<250	--	--
11/19/98	98.15	77.85	20.30	--	--		51,000	2,900	<200	2,200	6,300	<1,000	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-16 (cont)													
02/12/99	98.15	80.24	17.91	--	--	11,000	1,100	81	810	470	130	--	--
05/10/99	98.15	79.02	19.13	--	--	52,300	4,100	587	2,430	8,800	708/<66.7 ⁷	--	--
09/02/99	98.15	78.16	19.99	--	--	26,600	1,400	1,540	1,480	2,940	<500	--	--
02/03/00	98.15	79.50	18.65	--	--	47,000	5,600	620	3,000	14,000	450	--	--
05/09/00	99.15	80.58	18.57	0.00	0.00	15,000 ⁸	990	100	800	2,000	410	--	--
08/02/00	99.15	79.57	19.58	0.00	0.00	10,000 ⁸	1,100	95	1,000	2,300	<130	--	--
11/09-10/00	99.15	79.13	20.02	0.00	0.00	5,580	334	49.3	530	256	33.6	--	--
02/08/01	99.15	78.56	20.59	0.00	0.00	25,400 ¹¹	1,340	99.9	1,380	2,700	350	--	--
05/02/01	99.15	79.44	19.71	0.00	0.00	45,600	2,130	83.6	<2,500	7,460	13.3	--	--
08/28/01	99.15	INACCESSIBLE - PAVED OVER			--	--	--	--	--	--	--	--	--
11/26/01	99.15	INACCESSIBLE - PAVED OVER			--	--	--	--	--	--	--	--	--
02/22/02	99.15	80.05	19.10	0.00	0.00	32,000	1,300	110	1,800	6,100	<50	--	--
05/24/02	99.15	79.65	19.50	0.00	0.00	13,000	590	29	830	1,000	<20	--	--
08/29/02	99.15	78.94	20.21	0.00	0.00	9,800	500	28	670	430	<10	--	--
11/29/02	99.15	78.66	20.49	0.00	0.00	23,000	1,600	110	1,200	3,400	<10	--	--
02/28/03	99.15	79.97	19.18	0.00	0.00	20,000	1,300	90	1,000	3,300	<100	--	--
05/30/03 ¹⁷	99.15	80.34	18.81	0.00	0.00	47,000	2,100	160	2,000	8,100	<3	--	--
08/22/03 ¹⁷	99.15	79.59	19.56	0.00	0.00	25,000	1,300	94	1,200	3,200	2	--	--
11/24-25/03 ¹⁷	99.15	78.77	20.38	0.00	0.00	13,000	660	47	800	950	4	--	--
02/27/04 ¹⁷	99.15	82.32	16.83	0.00	0.00	20,000	1,000	70	1,000	3,100	3	--	--
MW-17													
08/13/92	--	82.70	23.30	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/03/92	--	81.26	24.74	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/25/93	106.00	83.86	22.14	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--	--
06/23/93	106.00	82.98	23.02	--	--	<50	<0.5	<0.5	<0.5	1.0	--	--	--
09/21/93	106.00	82.91	23.09	--	--	<50	<0.5	<0.5	<0.5	<0.8	--	--	--
12/02/93	106.00	82.63	23.37	--	--	--	--	--	--	--	--	--	--
03/08/94	106.00	83.17	22.83	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/13/94	106.00	83.38	22.62	--	--	<50	1.2	1.1	<0.5	0.9	--	--	--
10/04/94	106.00	83.00	23.00	--	--	62	8.0	2.9	0.7	3.1	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-17 (cont)													
11/14/94	106.00	82.97	23.03	--	--	550	22	120	8.9	84	--	--	--
05/15/95	106.00	84.28	21.72	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	106.00	83.63	22.37	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/28/95	106.00	83.03	22.97	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.6	--	--
02/20/96	106.00	84.22	21.78	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	106.00	84.28	21.72	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/27/96	106.00	83.57	22.43	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	106.00	83.18	22.82	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/18/97	106.00	84.69	21.31	--	--	140	34	11	1.6	7.7	71	--	--
05/23/97	106.00	83.75	22.25	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/04/97	106.00	83.47	22.53	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/25/97	106.00	83.09	22.91	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	106.00	86.37	19.63	--	--	<50	3.8	3.3	1.3	4.2	3.5	--	--
05/21/98	106.00	95.39	10.61	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
08/19/98	106.00	84.26	21.74	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	106.00	83.64	22.36	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	106.00	84.16	21.84	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/10/99	106.00	84.55	21.45	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0/<2.0 ⁷	--	--
09/02/99	106.00	83.54	22.46	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	106.00	83.81	22.19	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/09/00	106.00	84.21	21.79	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
08/02/00	106.00	83.76	22.24	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/09-10/00	106.00	83.43	22.57	0.00	0.00	<1,000	<10.0	<10.0	<10.0	<10.0	<50.0	--	--
02/08/01	106.00	83.18	22.82	0.00	0.00	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--
05/02/01	106.00	83.52	22.48	0.00	0.00	55.8	<0.500	<5.00	<5.00	<5.00	<0.500	--	--
08/28/01	106.00	83.05	22.95	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/26/01	106.00	82.92	23.08	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	106.00	83.97	22.03	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/24/02	106.00	83.84	22.16	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
08/29/02	106.00	82.27	23.73	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
11/29/02	106.00	83.02	22.98	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	106.00	84.02	21.98	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-17 (cont)													
05/30/03 ¹⁷	106.00	84.15	21.85	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ¹⁷	106.00	83.52	22.48	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03 ¹⁷	106.00	83.16	22.84	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	106.00	84.07	21.93	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
MW-18													
08/04/97	--	--	16.60	--	--	66,000	8,600	6,100	2,800	12,000	190	--	--
11/25/97	--	--	16.22	--	--	90,000	8,500	6,000	3,400	14,000	1,200	--	--
02/25/98	--	--	12.75	--	--	60,000	6,600	4,000	2,300	11,000	<120	--	--
05/21/98	--	--	15.24	--	--	70,000	4,700	1,800	1,700	9,600	880	--	--
08/19/98	--	--	16.34	--	--	93,000	4,900	1,700	2,100	9,000	<250	--	--
11/19/98	--	--	17.15	--	--	62,000	5,600	2,300	2,700	12,000	1,800	--	--
02/12/99	--	--	16.08	--	--	48,000	3,700	2,400	1,900	8,800	1,900	--	--
05/10/99	--	--	14.98	--	--	54,700	3,250	1,770	1,900	7,570	1,270/<66.7 ⁷	--	--
09/02/99	--	--	15.86	--	--	34,400	2,120	1,230	1,420	5,460	<500	--	--
02/03/00	--	--	15.91	--	--	46,000	2,500	1,100	1,900	8,800	<1,000	--	--
05/09/00	--	--	13.93	0.00	0.00	30,000 ⁸	1,400	410	440	4,700	1,300	--	--
08/02/00	--	--	15.25	0.00	0.00	22,000 ⁸	1,200	480	1,400	5,800	<130	--	--
11/09-10/00	--	--	15.85	0.00	0.00	29,500	1,130	474	2,020	6,270	333	--	--
02/08/01	--	--	16.27	0.00	0.00	61,600 ¹¹	1,700	<500	2,690	8,110	<2,500	--	--
05/02/01	--	--	16.15	0.00	0.00	57,800	1,040	104	<2,500	6,670	20.1	--	--
08/28/01	--	--	17.03	0.00	0.00	32,000 ¹³	1,200	370	2,100	5,600	790	--	--
11/26/01	--	--	16.64	0.00	0.00	41,000	780	320	1,800	5,600	<200	--	--
02/22/02	--	--	14.93	0.00	0.00	44,000	950	270	1,300	3,900	<100	--	--
05/24/02	--	--	15.92	0.00	0.00	36,000	1,200	460	1,600	4,800	<50	--	--
08/29/02	--	--	16.56	0.00	0.00	37,000	970	520	1,900	4,800	<50	--	--
11/29/02	--	--	16.51	0.00	0.00	36,000	710	350	1,900	5,300	<20	--	--
02/28/03	--	--	14.53	0.00	0.00	19,000	350	130	270	2,500	<200	--	--
05/30/03 ¹⁷	--	--	14.56	0.00	0.00	29,000	390	110	890	2,700	<3	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (mst)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
MW-18 (cont)													
08/22/03 ¹⁷	--	--	14.70	0.00	0.00	17,000	270	67	600	1,700	<1	--	--
11/24-25/03 ¹⁷	--	--	16.39	0.00	0.00	23,000	320	39	980	2,100	<1	--	--
02/27/04 ¹⁷	--	--	13.77	0.00	0.00	18,000	200	29	310	1,400	<1	--	--
P-1													
08/13/92	--	76.41	10.02	--	--	--	--	--	--	--	--	--	--
12/03/92	--	75.63	10.80	--	--	--	--	--	--	--	--	--	--
03/25/93	86.43	77.48	8.95	--	--	--	--	--	--	--	--	--	--
EQUIPMENT BLANK													
01/05/89	--	--	--	--	--	<1,000	<0.3	<0.3	<0.3	<0.3	--	--	--
03/08/94	--	--	--	--	--	<50	1.0	1.4	<0.5	1.5	--	--	--
TRIP BLANK													
01/05/89	--	--	--	--	--	<1,000	<0.3	<0.3	<0.3	<0.3	--	--	--
10/03/89	--	--	--	--	--	<500	<0.5	<0.5	<0.5	<0.5	--	--	--
01/04/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/03/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
07/03/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/06/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
01/04/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/03/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
07/02/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
10/02/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
01/02/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/07/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/13/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/03/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/25/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
TRIP BLANK (cont)													
06/23/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
09/21/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.8	--	--	--
12/02/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/08/94	--	--	--	--	--	<50	0.6	0.8	<0.5	0.6	--	--	--
06/13/94	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
10/04/94	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/14/94	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
05/15/95	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/28/95	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.60	--	--
02/20/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/27/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/18/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/23/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/04/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/25/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/21/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
08/19/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
03/26/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.0	--	--
05/10/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
09/02/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/09/00	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
08/02/00	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/09-10/00	--	--	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)	EDB (ppb)	DCE (ppb)
TRIP BLANK (cont)													
02/08/01	--	--	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--
05/02/01	--	--	--	--	--	<50.0	<0.500	<5.00	<5.00	<5.00	<0.500	--	--
08/28/01	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
QA													
11/26/01	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/24/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
08/29/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
11/29/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

EXPLANATIONS:

Groundwater monitoring data and laboratory analytical results prior to May 9, 2000, were compiled from reports prepared by Blaine Tech Services, Inc.

TOC = Top of Casing

(ft.) = Feet

GWE = Groundwater Elevation

(msl) = Mean sea level

DTW = Depth to Water

SPHT = Separate Phase Hydrocarbons Thickness

SPH = Separate Phase Hydrocarbons

TPH-G = Total Petroleum Hydrocarbons as Gasoline

B = Benzene

T = Toluene

E = Ethyl benzene

X = Xylenes

MTBE = Methyl tertiary butyl ether

EDB = Ethylene Dibromide

DCE = 1,2-Dichloroethane

(ppb) = Parts per billion

-- = Not Measured/Not Analyzed

QA = Quality Assurance/Trip Blank

1 Repeat analysis.

2 Estimated thickness.

3 Well inaccessible due to downhole equipment.

4 The TPH as Gasoline value was 99,000 ppb when MTBE is not included in the calculation.

5 Laboratory report indicates results were taken from both a low level and a diluted analysis.

6 The TPH as Gasoline value was 125,000 ppb when MTBE is not included in the calculation.

7 Confirmation run.

8 Laboratory report indicates gasoline C6-C12.

9 Laboratory report indicates gasoline C6-C12 + unidentified hydrocarbons <C6.

10 Laboratory report indicates gasoline C6-C12 + unidentified hydrocarbons C6-C12.

11 Laboratory report indicates weathered gasoline C6-C12.

12 Laboratory report indicates analyte was initially analyzed within hold time; however, due to instrument carryover, the sample was reanalyzed outside the method specified hold time to confirm the carryover.

13 Laboratory report indicates gasoline C6-C10.

14 Laboratory report indicates unidentified hydrocarbons C6-C10.

15 Connected to remediation system.

16 TOC was altered during removal of extraction system; unable to determine GWE. Do not use in contouring.

17 BTEX and MTBE by EPA Method 8260.

18 Hose in well.

STANDARD OPERATING PROCEDURE - GROUNDWATER SAMPLING

Gettler-Ryan Inc. field personnel adhere to the following procedures for the collection and handling of groundwater samples prior to analysis by the analytical laboratory. Prior to sample collection, the type of analysis to be performed is determined. Loss prevention of volatile compounds is controlled and sample preservation for subsequent analysis is maintained.

Prior to sampling, the presence or absence of free-phase hydrocarbons is determined using an interface probe. Product thickness, if present, is measured to the nearest 0.01 foot and is noted in the field notes. In addition, all depth to water level measurements are collected with a static water level indicator and are also recorded in the field notes, prior to purging and sampling any wells.

After water levels are collected and prior to sampling, if purging is to occur, each well is purged a minimum of three well casing volumes of water using pre-cleaned pumps (stack, suction, Grundfos), or disposable bailers. Temperature, pH and electrical conductivity are measured a minimum of three times during the purging. Purging continues until these parameters stabilize.

Groundwater samples are collected using disposable bailers. The water samples are transferred from the bailer into appropriate containers. Pre-preserved containers, supplied by analytical laboratories, are used when possible. When pre-preserved containers are not available, the laboratory is instructed to preserve the sample as appropriate. Duplicate samples are collected for the laboratory to use in maintaining quality assurance/quality control standards. The samples are labeled to include the job number, sample identification, collection date and time, analysis, preservation (if any), and the sample collector's initials. The water samples are placed in a cooler, maintained at 4°C for transport to the laboratory. Once collected in the field, all samples are maintained under chain of custody until delivered to the laboratory.

The chain of custody document includes the job number, type of preservation, if any, analysis requested, sample identification, date and time collected, and the sample collector's name. The chain of custody is signed and dated (including time of transfer) by each person who receives or surrenders the samples, beginning with the field personnel and ending with the laboratory personnel.

A laboratory supplied trip blank accompanies each sampling set. For sampling sets greater than 20 samples, 5% trip blanks are included. The trip blank is analyzed for some or all of the same compounds as the groundwater samples.

As requested by ChevronTexaco Company, the purge water and decontamination water generated during sampling activities is transported by IWM to McKittrick Waste Management located in McKittrick, California.



GETTLER - RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Hester

Well ID: MW-4
Well Diameter: 2 1/4 in.
Total Depth: 22.00 ft.
Depth to Water: 10.95 ft.

Date Monitored: 2/27/04 Well Condition: OK

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF = _____ x3 (case volume) = Estimated Purge Volume: _____ gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): _____ Weather Conditions: _____
Sample Time/Date: 1 Water Color: _____ Odor: _____
Purging Flow Rate: _____ gpm. Sediment Description: _____
Did well de-water? _____ If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-	x vna vial	YES	HCL	LANCASTER	TPH-G(8015)/BTX+MTBE(8260)
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

COMMENTS: M10

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: **ChevronTexaco #9-0260**
Site Address: **21995 Foothill Blvd.**
City: **Hayward, CA**

Job Number: **385110**
Event Date: **2/27/04** (inclusive)
Sampler: **Jim Herrin**

Well ID: **MW-5**
Well Diameter: **210** in.
Total Depth: **18.80** ft.
Depth to Water: **10.43** ft.

Date Monitored: **2/27/04** Well Condition: **OK**

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF = _____ x3 (case volume) = Estimated Purge Volume: _____ gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): _____ Weather Conditions: _____
Sample Time/Date: **1** Water Color: _____ Odor: _____
Purging Flow Rate: _____ gpm. Sediment Description: _____
Did well de-water? _____ If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-	x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTX+MTBE(8260)
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

COMMENTS: **M 10**

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260 Job Number: 385110
Site Address: 21995 Foothill Blvd. Event Date: 2/27/04 (inclusive)
City: Hayward, CA Sampler: Jim Hansen

Well ID: MW-6 Date Monitored: 2/27/04 Well Condition: OK
Well Diameter: 2 1/4 in.
Total Depth: 16.76 ft.
Depth to Water: 10.06 ft.
6.70 xVF .66 = 4.42 x3 (case volume) = Estimated Purge Volume: 13.26 gal.

Volume Factor (VF)	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump X
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer X
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): 11:30 Weather Conditions: Cloudy
Sample Time/Date: 11:50 12/27/04 Water Color: Cloudy Odor: None
Purging Flow Rate: 2 gpm. Sediment Description: _____
Did well de-water? _____ If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>11:30</u>	<u>4</u>	<u>7.53</u>	<u>863</u>	<u>17.5</u>		
<u>11:36</u>	<u>8</u>	<u>7.22</u>	<u>831</u>	<u>17.8</u>		
<u>11:40</u>	<u>12</u>	<u>6.73</u>	<u>806</u>	<u>18.4</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW- <u>6</u>	<u>6</u> x vial	YES	HCL	LANCASTER	TPH-G(8015)/BTX+MTBE(8260)

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Hearn

Well ID: MW-7
Well Diameter: 2 1/4 in.
Total Depth: 16.60 ft.
Depth to Water: 11.31 ft.

Date Monitored: 2/26/04 Well Condition: ok

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF = _____ x3 (case volume) = Estimated Purge Volume: _____ gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbant Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): _____ Weather Conditions: _____
Sample Time/Date: 1 Water Color: _____ Odor: _____
Purging Flow Rate: _____ gpm. Sediment Description: _____
Did well de-water? _____ If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-</u>	<u>x vae vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTX+MTBE(8260)</u>
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER - RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: **ChevronTexaco #9-0260**
Site Address: **21995 Foothill Blvd.**
City: **Hayward, CA**

Job Number: **385110**
Event Date: **2/27/04** (inclusive)
Sampler: **Jim Horan**

Well ID: **MW-8**
Well Diameter: **2 1/4** in.
Total Depth: **17.75** ft.
Depth to Water: **10.21** ft.

Date Monitored: **2/27/04** Well Condition: **o/c**

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF = x3 (case volume) = Estimated Purge Volume: gal.

Purge Equipment:

Disposable Bailer
Stainless Steel Bailer
Stack Pump
Suction Pump
Grundfos
Other:

Sampling Equipment:

Disposable Bailer
Pressure Bailer
Discrete Bailer
Other:

Time Started: (2400 hrs)
Time Bailed: (2400 hrs)
Depth to Product: ft
Depth to Water: ft
Hydrocarbon Thickness: ft
Visual Confirmation/Description:
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: gal
Amt Removed from Well: gal
Product Transferred to:

Start Time (purge):
Sample Time/Date:
Purging Flow Rate: gpm.
Did well de-water?
Weather Conditions:
Water Color:
Odor:
Sediment Description:
If yes, Time: Volume: gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-	x voc vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS:

Add/Replaced Lock:

Add/Replaced Plug: Size:



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Heron

Well ID: MW-9
Well Diameter: 2 1/4 in.
Total Depth: 17.25 ft.
Depth to Water: 10.55 ft.
6.70

Date Monitored: 2/27/04 Well Condition: OK

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

$xVF .66 = 4.42$ x3 (case volume) = Estimated Purge Volume: 13.26 gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump X
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer X
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): 1455 Weather Conditions: Cloudy
Sample Time/Date: 1510 2/27/04 Water Color: Cloudy Odor: No
Purging Flow Rate: 2 gpm. Sediment Description: 1.5H+
Did well de-water? No If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1458</u>	<u>4</u>	<u>7.91</u>	<u>745</u>	<u>18.9</u>		
<u>1501</u>	<u>8</u>	<u>7.54</u>	<u>716</u>	<u>19.4</u>		
<u>1503</u>	<u>12</u>	<u>7.22</u>	<u>682</u>	<u>19.9</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-9</u>	<u>6</u> x vva vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Hearn

Well ID: MW-10
Well Diameter: 2 1/4 in.
Total Depth: 27.68 ft.
Depth to Water: 8.04 ft.
19.64 xVF .66 = 12.96 x3 (case volume) = Estimated Purge Volume: 38.88 gal.

Date Monitored: 2/27/04 Well Condition: OK

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump X
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer X
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft.
Depth to Water: _____ ft.
Hydrocarbon Thickness: _____ ft.
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): 1000 Weather Conditions: cloudy
Sample Time/Date: 1020 12/27/04 Water Color: cloudy Odor: no
Purging Flow Rate: 4 gpm. Sediment Description: 1.0 lbs
Did well de-water? no If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1003</u>	<u>12</u>	<u>7.53</u>	<u>789</u>	<u>17.7</u>		
<u>1007</u>	<u>24</u>	<u>7.28</u>	<u>763</u>	<u>17.9</u>		
<u>1011</u>	<u>36</u>	<u>7.05</u>	<u>727</u>	<u>18.3</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-10</u>	<u>6</u> x vov vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Herman

Well ID: MW-11
Well Diameter: 2 1/4 in.
Total Depth: 19.00 ft.
Depth to Water: 9.78 ft.
9.22

Date Monitored: 2/27/04

Well Condition: OK

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

xVF = 66 = 6.08 x3 (case volume) = Estimated Purge Volume: 18.25 gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump X
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer X
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft.
Depth to Water: _____ ft.
Hydrocarbon Thickness: _____ ft.
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): 1050 Weather Conditions: CLOUD
Sample Time/Date: 1110 12/27/04 Water Color: CLOUD Odor: NO
Purging Flow Rate: 3 gpm. Sediment Description: 1.5/1.5
Did well de-water? NO If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>1053</u>	<u>6</u>	<u>7.46</u>	<u>387</u>	<u>17.7</u>		
<u>1057</u>	<u>12</u>	<u>7.21</u>	<u>421</u>	<u>17.9</u>		
<u>1100</u>	<u>18</u>	<u>6.87</u>	<u>465</u>	<u>18.3</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-11</u>	<u>6</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN Inc.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Heaton

Well ID: MW-12
Well Diameter: 2 1/8 in.
Total Depth: 20.46 ft.
Depth to Water: 11.06 ft.

Date Monitored: 2/27/04 Well Condition: OK

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF = _____ x3 (case volume) = Estimated Purge Volume: _____ gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): _____ Weather Conditions: _____
Sample Time/Date: 1 Water Color: _____ Odor: _____
Purging Flow Rate: _____ gpm. Sediment Description: _____
Did well de-water? _____ If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-</u>	<u>x voa vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

COMMENTS: MLO

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER - RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Heron

Well ID: MW-13 Date Monitored: 2/27/04 Well Condition: OK
Well Diameter: 2 1/4 in.
Total Depth: 13.78 ft.
Depth to Water: 10.53 ft.
3.25 x VF .66 = 2.14 x3 (case volume) = Estimated Purge Volume: 6.43 gal.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment:

Disposable Bailer ☒
Stainless Steel Bailer ☐
Stack Pump ☐
Suction Pump ☐
Grundfos ☐
Other: ☐

Sampling Equipment:

Disposable Bailer ☒
Pressure Bailer ☐
Discrete Bailer ☐
Other: ☐

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): 1425 Weather Conditions: Cloudy
Sample Time/Date: 1445 / 2/27/04 Water Color: Cloudy Odor: no
Purging Flow Rate: _____ gpm. Sediment Description: 1.5 HJ
Did well de-water? no If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1429</u>	<u>2</u>	<u>7.11</u>	<u>834</u>	<u>18.8</u>		
<u>1434</u>	<u>4</u>	<u>6.92</u>	<u>806</u>	<u>18.9</u>		
<u>1439</u>	<u>6</u>	<u>6.55</u>	<u>768</u>	<u>19.3</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-13</u>	<u>x vob vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
 Site Address: 21995 Foothill Blvd.
 City: Hayward, CA

Job Number: 385110
 Event Date: 2/27/04 (inclusive)
 Sampler: Jim Hezron

Well ID: MW-14
 Well Diameter: 2 1/4 in.
 Total Depth: 40.90 ft.
 Depth to Water: 19.20 ft.
21.70

Date Monitored: 2/27/04 Well Condition: ok

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

xVF .17 = 3.68 x3 (case volume) = Estimated Purge Volume: 11.06 gal.

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump X
 Suction Pump _____
 Grundfos _____
 Other: _____

Sampling Equipment:

Disposable Bailer X
 Pressure Bailer _____
 Discrete Bailer _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Bailed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbent Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Product Transferred to: _____

Start Time (purge): 1320 Weather Conditions: CLOUD
 Sample Time/Date: 1345 2/27/04 Water Color: CLOUD Odor: NO
 Purging Flow Rate: 1 gpm. Sediment Description: 1.5 M
 Did well de-water? NO If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1323</u>	<u>3</u>	<u>6.86</u>	<u>497</u>	<u>18.7</u>		
<u>1326</u>	<u>6</u>	<u>6.75</u>	<u>435</u>	<u>19.2</u>		
<u>1330</u>	<u>9</u>	<u>6.61</u>	<u>422</u>	<u>19.4</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-14</u>	<u>6</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
 Site Address: 21995 Foothill Blvd.
 City: Hayward, CA

Job Number: 385110
 Event Date: 2/27/04 (inclusive)
 Sampler: Jim Heaton

Well ID: MW-15
 Well Diameter: 6 1/4 in.
 Total Depth: 22.00 ft.
 Depth to Water: 10.47 ft.
11.53

Date Monitored: 2/27/04 Well Condition: OK

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF 1.17 = 1.96 x3 (case volume) = Estimated Purge Volume: 5.88 gal.

Purge Equipment:

Disposable Bailer X
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Other: _____

Sampling Equipment:

Disposable Bailer X
 Pressure Bailer _____
 Discrete Bailer _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Bailed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Product Transferred to: _____

Start Time (purge): 1520 Weather Conditions: Cloudy
 Sample Time/Date: 1540 2/27/04 Water Color: Cloudy Odor: No
 Purging Flow Rate: — gpm. Sediment Description: 1.5 ft
 Did well de-water? No If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1524</u>	<u>1.5</u>	<u>7.34</u>	<u>673</u>	<u>18.7</u>		
<u>1528</u>	<u>3.0</u>	<u>7.27</u>	<u>651</u>	<u>19.3</u>		
<u>1532</u>	<u>4.5</u>	<u>7.18</u>	<u>627</u>	<u>19.7</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW- <u>15</u>	<u>6</u> x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTX+MTBE(8260)

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Herron

Well ID: MW-16
Well Diameter: 2 1/4 in.
Total Depth: 37.82 ft.
Depth to Water: 16.83 ft.
21.85

Date Monitored: 2/27/04 Well Condition: OK

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF .17 = 3.57 x3 (case volume) = Estimated Purge Volume: 10.70 gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump X
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer X
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): 1550 Weather Conditions: cloudy
Sample Time/Date: 1610 2/27/04 Water Color: 1-6 Odor: no
Purging Flow Rate: 1 gpm. Sediment Description: no
Did well de-water? no If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1553</u>	<u>3</u>	<u>7.73</u>	<u>633</u>	<u>19.2</u>		
<u>1556</u>	<u>6</u>	<u>7.35</u>	<u>629</u>	<u>19.5</u>		
<u>1559</u>	<u>9</u>	<u>7.09</u>	<u>591</u>	<u>19.8</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-16</u>	<u>6</u> x voc vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Herron

Well ID: MW-17 Date Monitored: 2/27/04 Well Condition: OK
Well Diameter: 21.4 in.
Total Depth: 33.06 ft.
Depth to Water: 21.93 ft.
11.13 x VF .17 = 1.89 x3 (case volume) = Estimated Purge Volume: 5.67 gal.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Purge Equipment:

Disposable Bailer ✓
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer ✓
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Product Transferred to: _____

Start Time (purge): 1225 Weather Conditions: cloudy
Sample Time/Date: 1250 / 2/27/04 Water Color: cloudy Odor: no
Purging Flow Rate: — gpm. Sediment Description: 1.5 ft
Did well de-water? no If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1229</u>	<u>1.5</u>	<u>6.01</u>	<u>706</u>	<u>18.4</u>		
<u>1234</u>	<u>3.0</u>	<u>7.52</u>	<u>635</u>	<u>18.5</u>		
<u>1239</u>	<u>4.5</u>	<u>7.09</u>	<u>599</u>	<u>18.9</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-17</u>	<u>6</u> x vov vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0260
Site Address: 21995 Foothill Blvd.
City: Hayward, CA

Job Number: 385110
Event Date: 2/27/04 (inclusive)
Sampler: Jim Herndon

Well ID: MW-18
Well Diameter: 2 1/4 in.
Total Depth: 23.64 ft.
Depth to Water: 13.77 ft.

Date Monitored: 2/27/04 Well Condition: OK

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Depth to Water: 13.77 ft.
9.87 x VF .17 = 1.67 x3 (case volume) = Estimated Purge Volume: 5.030 gal.

Purge Equipment:

Disposable Bailer ✓
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Other: _____

Sampling Equipment:

Disposable Bailer ✓
Pressure Bailer _____
Discrete Bailer _____
Other: _____

Time Started: _____ (2400 hrs)
Time Bailed: _____ (2400 hrs)
Depth to Product: _____ ft.
Depth to Water: _____ ft.
Hydrocarbon Thickness: _____ ft.
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal.
Amt Removed from Well: _____ gal.
Product Transferred to: _____

Start Time (purge): 1355 Weather Conditions: C/Cloudy
Sample Time/Date: 1415 2/27/04 Water Color: C/Cloudy Odor: As
Purging Flow Rate: _____ gpm. Sediment Description: 1.5 BT
Did well de-water? No If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
<u>1358</u>	<u>1.5</u>	<u>6.93</u>	<u>473</u>	<u>18.3</u>		
<u>1402</u>	<u>3.0</u>	<u>6.81</u>	<u>455</u>	<u>18.7</u>		
<u>1406</u>	<u>4.5</u>	<u>6.75</u>	<u>429</u>	<u>19.1</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-18</u>	<u>6</u> x vov vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____

Chevron California Region Analysis Request/Chain of Custody



030104-07

Acct. #: 10904

For Lancaster Laboratories use only
Sample #: 4225836-46

SCR#:

Grp# 886006

Facility #: SS#9-0260 G-R#385110 Global ID#T0600100315
Site Address: 21995 FOOTHILL BLVD., HAYWARD, CA
Chevron PM: KS Lead Consultant: CAMBRIA
Consultant/Office: G-R, Inc., 6747 Sierra Court, Suite J, Dublin, Ca. 94568
Consultant Prj. Mgr.: Deanna L. Harding (deanna@grinc.com)
Consultant Phone #: 925-551-7555 Fax #: 925-551-7899
Sampler: _____
Service Order #: _____ ☐ Non SAR: _____

Matrix		Analyses Requested															
		Preservation Codes															
Soil	Water	Oil	Air	Total Number of Containers													
					BTX + MTBE 8260	TPH 8015 MOD GRO	TPH 8015 MOD DRO	8260 full scan	Oxygenates	Lead 7420	7421						
☐	☐	☐	☐		☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Preservative Codes
H = HCl T = Thiosulfate
N = HNO₃ B = NaOH
S = H₂SO₄ O = Other
☐ J value reporting needed
☒ Must meet lowest detection limits possible for 8260 compounds
8021 MTBE Confirmation
☐ Confirm highest hit by 8260
☐ Confirm all hits by 8260
☐ Run ____ oxy s on highest hit
☐ Run ____ oxy s on all hits

Sample Identification	Date Collected	Time Collected	Grab	Composite	Soil	Water	Oil	Air	Total Number of Containers	BTX + MTBE 8260	TPH 8015 MOD GRO	TPH 8015 MOD DRO	8260 full scan	Oxygenates	Lead 7420	7421
QA	2/27/04		X						2	X	X					
MW-6		1150	X			X			6	X	X					
MW-9		1510	X			X			6	X	X					
MW-10		1020	X			X			6	X	X					
MW-11		410	X			X			6	X	X					
MW-13		1445	X			X			6	X	X					
MW-14		1345	X			X			6	X	X					
MW-15		1540	X			X			6	X	X					
MW-16		1610	X			X			6	X	X					
MW-17		1250	X			X			6	X	X					
MW-18	✓	1415	X			X			6	X	X					

Comments / Remarks

Turnaround Time Requested (TAT) (please circle)
 STD. TAT 24 hour 72 hour 48 hour
 4 day 5 day

Data Package Options (please circle if required)
 QC Summary Type I — Full
 Type VI (Raw Data) ☐ Coelt Deliverable not needed
 WIP (RWQCB)
 Disk

Relinquished by: <i>[Signature]</i>	Date: 2/27/04	Time: 1800	Received by: <i>[Signature]</i>	Date: 3/1/04	Time: 1157
Relinquished by: <i>[Signature]</i>	Date: 3/1/04	Time: 1345	Received by: <i>[Signature]</i>	Date: 3/1/04	Time: 1345
Relinquished by: <i>[Signature]</i>	Date: 3/1/04	Time: 1600	Received by: <i>[Signature]</i>	Date: 3/1/04	Time: 1600
Relinquished by Commercial Carrier: UPS FedEx Other <u>Airborne</u>			Received by: <i>[Signature]</i>		
Temperature Upon Receipt: 2.9 °C			Custody Seals Intact? <u>Yes</u> No		



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2661 • www.lancasterlabs.com

ANALYTICAL RESULTS

Prepared for:

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

925-842-8582

Prepared by:

Lancaster Laboratories
2425 New Holland Pike
Lancaster, PA 17605-2425

SAMPLE GROUP

The sample group for this submittal is 886606. Samples arrived at the laboratory on Tuesday, March 02, 2004. The PO# for this group is 99011184 and the release number is STREICH.

<u>Client Description</u>		<u>Lancaster Labs Number</u>
QA-T-040227	NA Water	4225836
MW-6-W-040227	Grab Water	4225837
MW-9-W-040227	Grab Water	4225838
MW-10-W-040227	Grab Water	4225839
MW-11-W-040227	Grab Water	4225840
MW-13-W-040227	Grab Water	4225841
MW-14-W-040227	Grab Water	4225842
MW-15-W-040227	Grab Water	4225843
MW-16-W-040227	Grab Water	4225844
MW-17-W-040227	Grab Water	4225845
MW-18-W-040227	Grab Water	4225846


1 COPY TO
ELECTRONIC
COPY TO

Cambria C/O Gettler- Ryan
Gettler-Ryan

Attn: Deanna L. Harding
Attn: Cheryl Hansen

Questions? Contact your Client Services Representative
Teresa L Cunningham at (717) 656-2300.

Respectfully Submitted,


Victoria M. Manell
Chemist

Lancaster Laboratories Sample No. WW 4225836

QA-T-040227 NA Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 QA
Collected: 02/27/2004

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOOQA

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Units	Dilution Factor
				Method	Detection Limit		
01728	TPH-GRO - Waters	n.a.	N.D.		50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
06054	BTEX+MTBE by 8260B						
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.		0.5	ug/l	1
05401	Benzene	71-43-2	N.D.		0.5	ug/l	1
05407	Toluene	108-88-3	N.D.		0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.		0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.		0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date and Time			
01728	TPH-GRO - Waters	N. CA LUFT Gasoline	1	03/04/2004 12:36		Todd T Smythe	1
		Method					
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 12:45		Carrie J McCullough	1
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 12:36		Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 12:45		Carrie J McCullough	n.a.



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW 4225837

MW-6-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-6
Collected: 02/27/2004 11:50

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO-6

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Units	Dilution Factor
				Method	Detection Limit		
01728	TPH-GRO - Waters	n.a.	N.D.		50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
06054	BTEX+MTBE by 8260B						
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.		0.5	ug/l	1
05401	Benzene	71-43-2	N.D.		0.5	ug/l	1
05407	Toluene	108-88-3	N.D.		0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.		0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.		0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	N, CA LUFT Gasoline	1	03/04/2004 13:05	Todd T Smythe	1
		Method				
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 13:12	Carrie J McCullough	1
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 13:05	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 13:12	Carrie J McCullough	n.a.

Lancaster Laboratories Sample No. WW 4225838

MW-9-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-9
Collected: 02/27/2004 15:10

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO-9

CAT	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	6,300.	250.	ug/l	5
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.					
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	0.7	0.5	ug/l	1
05407	Toluene	108-88-3	6.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	160.	5.	ug/l	10
06310	Xylene (Total)	1330-20-7	39.	0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline	1	03/04/2004 13:34	Todd T Smythe	5
06054	BTEX+MTBE by 8260B	Method SW-846 8260B	1	03/09/2004 14:32	Carrie J McCullough	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 14:58	Carrie J McCullough	10
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 13:34	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 14:32	Carrie J McCullough	n.a.



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW 4225839

MW-10-W-040227 Grab Water GRD
Facility# 90260 Job# 385110
21995 Foothill, Hayward T0600100315 MW-10
Collected: 02/27/2004 10:20

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO10

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.					
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	03/04/2004 14:03	Todd T Smythe	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 15:25	Carrie J McCullough	1
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 14:03	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 15:25	Carrie J McCullough	n.a.



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW 4225840

MW-11-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-11
Collected: 02/27/2004 11:10

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO11

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	10,000.	500.	ug/l	10
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	1.	1.	ug/l	2
05401	Benzene	71-43-2	970.	10.	ug/l	20
05407	Toluene	108-88-3	570.	10.	ug/l	20
05415	Ethylbenzene	100-41-4	430.	10.	ug/l	20
06310	Xylene (Total)	1330-20-7	1,100.	10.	ug/l	20

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	03/04/2004 14:32	Todd T Smythe	10
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 15:51	Carrie J McCullough	2
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 16:18	Carrie J McCullough	20
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 14:32	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 15:51	Carrie J McCullough	n.a.

Lancaster Laboratories Sample No. WW 4225841

MW-13-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-13
Collected: 02/27/2004 14:45

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO13

CAT	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	2,300.	50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.					
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	27.	0.5	ug/l	1
05407	Toluene	108-88-3	7.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	14.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	10.	0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	03/04/2004 15:01	Todd T Smythe	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 16:44	Carrie J McCullough	1
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 15:01	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 16:44	Carrie J McCullough	n.a.



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW 4225842

MW-14-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-14
Collected: 02/27/2004 13:45

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO14

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	330.	50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.					
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

Laboratory Chronicle

CAT	Analysis					Dilution
No.	Analysis Name	Method	Trial#	Date and Time	Analyst	Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline	1	03/04/2004 15:29	Todd T Smythe	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 17:38	Carrie J McCullough	1
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 15:29	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 17:38	Carrie J McCullough	n.a.

Lancaster Laboratories Sample No. WW 4225843

MW-15-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-15
Collected: 02/27/2004 15:40

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO15

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Units	Dilution Factor
				Method	Detection Limit		
01728	TPH-GRO - Waters	n.a.	N.D.		50.	ug/l	1
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
06054	BTEX+MTBE by 8260B						
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.		0.5	ug/l	1
05401	Benzene	71-43-2	N.D.		0.5	ug/l	1
05407	Toluene	108-88-3	N.D.		0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.		0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.		0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date and Time			
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	03/04/2004 15:58		Todd T Smythe	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 18:04		Carrie J McCullough	1
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 15:58		Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 18:04		Carrie J McCullough	n.a.



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW 4225844

MW-16-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-16
Collected: 02/27/2004 16:10

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO16

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Units	Dilution Factor
				Method	Detection Limit		
01728	TPH-GRO - Waters	n.a.	20,000.		2,500.	ug/l	50
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
06054	BTEX+MTBE by 8260B						
02010	Methyl Tertiary Butyl Ether	1634-04-4	3.	2.		ug/l	4
05401	Benzene	71-43-2	1,000.	10.		ug/l	20
05407	Toluene	108-88-3	70.	2.		ug/l	4
05415	Ethylbenzene	100-41-4	1,000.	10.		ug/l	20
06310	Xylene (Total)	1330-20-7	3,100.	10.		ug/l	20

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	N. CA LUFT Gasoline	1	03/04/2004 16:27	Todd T Smythe	50
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 18:31	Carrie J McCullough	4
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 18:57	Carrie J McCullough	20
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 16:27	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 18:31	Carrie J McCullough	n.a.

Lancaster Laboratories Sample No. WW 4225845

MW-17-W-040227 Grab Water
 Facility# 90260 Job# 385110 GRD
 21995 Foothill, Hayward T0600100315 MW-17
 Collected: 02/27/2004 12:50

Account Number: 10904

Submitted: 03/02/2004 09:10
 Reported: 03/12/2004 at 13:22
 Discard: 04/12/2004

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

FOO17

CAT	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01728	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	03/04/2004 17:54	Todd T Smythe	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 19:24	Carrie J McCullough	1
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 17:54	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/09/2004 19:24	Carrie J McCullough	n.a.

Lancaster Laboratories Sample No. WW 4225846

MW-18-W-040227 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill, Hayward T0600100315 MW-18
Collected: 02/27/2004 14:15

Account Number: 10904

Submitted: 03/02/2004 09:10
Reported: 03/12/2004 at 13:22
Discard: 04/12/2004

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

FOO18

CAT			As Received	As Received		Dilution
No.	Analysis Name	CAS Number	Result	Method Detection Limit	Units	Factor
01728	TPH-GRO - Waters	n.a.	18,000.	1,000.	ug/l	20
	The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.					
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	1.	ug/l	2
05401	Benzene	71-43-2	200.	1.	ug/l	2
05407	Toluene	108-88-3	29.	1.	ug/l	2
05415	Ethylbenzene	100-41-4	310.	1.	ug/l	2
06310	Xylene (Total)	1330-20-7	1,400.	2.	ug/l	4
	The reporting limits for the GC/MS volatile compounds were raised because sample dilution was necessary to bring target compounds into the calibration range of the system.					

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT			Analysis			Dilution
No.	Analysis Name	Method	Trial#	Date and Time	Analyst	Factor
01728	TPH-GRO - Waters	N. CA LUFT Gasoline	1	03/04/2004 18:23	Todd T Smythe	20
		Method				
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/09/2004 19:50	Carrie J McCullough	4
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	03/10/2004 19:39	Carrie J McCullough	2
01146	GC VOA Water Prep	SW-846 5030B	1	03/04/2004 18:23	Todd T Smythe	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	1	03/10/2004 19:39	Carrie J McCullough	n.a.
01163	GC/MS VOA Water Prep	SW-846 5030B	2	03/09/2004 19:50	Carrie J McCullough	n.a.

Quality Control Summary

Client Name: ChevronTexaco
Reported: 03/12/04 at 01:23 PM

Group Number: 886606

Matrix QC may not be reported if site-specific QC samples were not submitted. In these situations, to demonstrate precision and accuracy at a batch level, a LCS/LCSD was performed, unless otherwise specified in the method.

Laboratory Compliance Quality Control

Analysis Name	Blank Result	Blank MDL	Report Units	LCS %REC	LCSD %REC	LCS/LCSD Limits	RPD	RPD Max
Batch number: 04064A08B TPH-GRO - Waters	Sample number(s): 4225836-4225844 N.D.	50.	ug/l	101	104	70-130	2	30
Batch number: 04064A08C TPH-GRO - Waters	Sample number(s): 4225845-4225846 N.D.	50.	ug/l	101	104	70-130	2	30
Batch number: P040692AA Methyl Tertiary Butyl Ether	Sample number(s): 4225836-4225846 N.D.	0.5	ug/l	101		77-127		
Benzene	N.D.	0.5	ug/l	102		85-117		
Toluene	N.D.	0.5	ug/l	97		85-115		
Ethylbenzene	N.D.	0.5	ug/l	97		82-119		
Xylene (Total)	N.D.	0.5	ug/l	98		84-120		
Batch number: P040702AA Methyl Tertiary Butyl Ether	Sample number(s): 4225846 N.D.	0.5	ug/l	101		77-127		
Benzene	N.D.	0.5	ug/l	104		85-117		
Toluene	N.D.	0.5	ug/l	98		85-115		
Ethylbenzene	N.D.	0.5	ug/l	98		82-119		

Sample Matrix Quality Control

Analysis Name	MS %REC	MSD %REC	MS/MSD Limits	RPD	BKG MAX	DUP CONC	DUP RPD	Dup RPD Max
Batch number: 04064A08B TPH-GRO - Waters	Sample number(s): 4225836-4225844 131		63-154					
Batch number: 04064A08C TPH-GRO - Waters	Sample number(s): 4225845-4225846 131		63-154					
Batch number: P040692AA Methyl Tertiary Butyl Ether	Sample number(s): 4225836-4225846 103	104	69-134	1	30			
Benzene	108	112	83-128	3	30			
Toluene	104	105	83-127	1	30			
Ethylbenzene	103	105	82-129	1	30			
Xylene (Total)	104	106	82-130	2	30			
Batch number: P040702AA Methyl Tertiary Butyl Ether	Sample number(s): 4225846 108	103	69-134	3	30			
Benzene	113	111	83-128	2	30			
Toluene	108	105	83-127	2	30			
Ethylbenzene	107	106	82-129	2	30			

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The background result was more than four times the spike added.

Quality Control Summary

Client Name: ChevronTexaco
Reported: 03/12/04 at 01:23 PM

Group Number: 886606

Sample Matrix Quality Control

Analysis Name	MS %REC	MSD %REC	MS/MSD Limits	RPD RPD	BKG MAX	DUP Conc	DUP Conc	DUP RPD	Dup Max
---------------	------------	-------------	------------------	------------	------------	-------------	-------------	------------	------------

Surrogate Quality Control

Analysis Name: TPH-GRO - Waters
Batch number: 04064A08B
Trifluorotoluene-F

4225836	107
4225837	107
4225838	110
4225839	104
4225840	109
4225841	137
4225842	107
4225843	109
4225844	105
Blank	105
LCS	115
LCSD	119
MS	119

Limits: 57-146

Analysis Name: TPH-GRO - Waters
Batch number: 04064A08C
Trifluorotoluene-F

4225845	101
4225846	103
Blank	110
LCS	115
LCSD	119
MS	119

Limits: 57-146

Analysis Name: BTEX+MTBE by 8260B
Batch number: P040692AA

	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
4225836	102	100	94	94
4225837	101	98	95	95
4225838	102	102	97	96
4225839	101	99	96	96
4225840	102	103	96	96
4225841	102	105	97	97
4225842	101	100	94	97
4225843	102	99	94	95
4225844	103	103	96	96
4225845	101	98	93	95
Blank	100	99	95	95
LCS	102	99	95	95

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The background result was more than four times the spike added.

Quality Control Summary

Client Name: ChevronTexaco
Reported: 03/12/04 at 01:23 PM

Group Number: 886606

Surrogate Quality Control

MS	101	99	95	96
MSD	101	97	94	94
Limits:	81-120	82-112	85-112	83-113
Analysis Name: BTEX+MTBE by 8260B				
Batch number: P040702AA				
	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
4225846	102	104	97	98
Blank	101	99	94	95
LCS	101	98	95	95
MS	102	97	96	108
MSD	102	98	95	107
Limits:	81-120	82-112	85-112	83-113

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The background result was more than four times the spike added.

Explanation of Symbols and Abbreviations

The following defines common symbols and abbreviations used in reporting technical data:

N.D.	none detected	BMQL	Below Minimum Quantitation Level
TNTC	Too Numerous To Count	MPN	Most Probable Number
IU	International Units	CP Units	cobalt-chloroplatinate units
umhos/cm	micromhos/cm	NTU	nephelometric turbidity units
C	degrees Celsius	F	degrees Fahrenheit
meq	milliequivalents	lb.	pound(s)
g	gram(s)	kg	kilogram(s)
ug	microgram(s)	mg	milligram(s)
ml	milliliter(s)	l	liter(s)
m3	cubic meter(s)	ul	microliter(s)
<	less than - The number following the sign is the <u>limit of quantitation</u> , the smallest amount of analyte which can be reliably determined using this specific test.		
>	greater than		
J	estimated value - The result falls within the Method Detection Limit (MDL) and Limit of Quantitation (LOQ).		
ppm	parts per million - One ppm is equivalent to one milligram per kilogram (mg/kg), or one gram per million grams. For aqueous liquids, ppm is usually taken to be equivalent to milligrams per liter (mg/l), because one liter of water has a weight very close to a kilogram. For gases or vapors, one ppm is equivalent to one microliter of gas per liter of gas.		
ppb	parts per billion		
Dry weight basis	Results printed under this heading have been adjusted for moisture content. This increases the analyte weight concentration to approximate the value present in a similar sample without moisture. All other results are reported on an as-received basis.		

U.S. EPA CLP Data Qualifiers:

Organic Qualifiers

A	TIC is a possible aldol-condensation product
B	Analyte was also detected in the blank
C	Pesticide result confirmed by GC/MS
D	Compound quantitated on a diluted sample
E	Concentration exceeds the calibration range of the instrument
N	Presumptive evidence of a compound (TICs only)
P	Concentration difference between primary and confirmation columns >25%
U	Compound was not detected
X,Y,Z	Defined in case narrative

Inorganic Qualifiers

B	Value is <CRDL, but ≥IDL
E	Estimated due to interference
M	Duplicate injection precision not met
N	Spike sample not within control limits
S	Method of standard additions (MSA) used for calculation
U	Compound was not detected
W	Post digestion spike out of control limits
*	Duplicate analysis not within control limits
+	Correlation coefficient for MSA <0.995

Analytical test results for methods listed on the laboratories' accreditation scope meet all requirements of NELAC unless otherwise noted under the individual analysis.

Measurement uncertainty values, as applicable, are available upon request.

Tests results relate only to the sample tested. Clients should be aware that a critical step in a chemical or microbiological analysis is the collection of the sample. Unless the sample analyzed is truly representative of the bulk of material involved, the test results will be meaningless. If you have questions regarding the proper techniques of collecting samples, please contact us. We cannot be held responsible for sample integrity, however, unless sampling has been performed by a member of our staff. This report shall not be reproduced except in full, without the written approval of the laboratory.

WARRANTY AND LIMITS OF LIABILITY - In accepting analytical work, we warrant the accuracy of test results for the sample as submitted. THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. WE DISCLAIM ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING A WARRANTY OF FITNESS FOR PARTICULAR PURPOSE AND WARRANTY OF MERCHANTABILITY. IN NO EVENT SHALL LANCASTER LABORATORIES BE LIABLE FOR INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFIT OR GOODWILL REGARDLESS OF (A) THE NEGLIGENCE (EITHER SOLE OR CONCURRENT) OF LANCASTER LABORATORIES AND (B) WHETHER LANCASTER LABORATORIES HAS BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. We accept no legal responsibility for the purposes for which the client uses the test results. No purchase order or other order for work shall be accepted by Lancaster Laboratories which includes any conditions that vary from the Standard Terms and Conditions of Lancaster Laboratories and we hereby object to any conflicting terms contained in any acceptance or order submitted by client.