



**CONESTOGA-ROVERS
& ASSOCIATES**

RECEIVED

1:35 pm, Nov 24, 2008

Alameda County
Environmental Health

5900 Hollis Street, Suite A, Emeryville, California 94608
Telephone: 510-420-0700 Facsimile: 510-420-9170
www.CRAworld.com

November 14, 2008

Reference No. 311915

Mr. Steven Plunkett
Alameda County Environmental Health Services
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

Re: Third Quarter 2008 Groundwater Monitoring Report
Chevron Service Station 9-0260
21995 Foothill Boulevard
Hayward, California
Fuel Leak Case No. RO0000383

Dear Mr. Plunkett:

Conestoga-Rovers & Associates is submitting the attached *Groundwater Monitoring and Sampling Report* for the site referenced above on behalf of Chevron Environmental Management Company (Chevron). The report prepared by Gettler-Ryan Inc. (G-R) and dated October 3, 2008, presents the results of the Third Quarter 2008 sampling and monitoring event. Also attached are Figure 1 (Vicinity Map) and Figure 2 (Concentration Map) presenting the third quarter 2008 analytical results and groundwater flow direction data. A perjury letter from Chevron and Professional Geologist stamp are included within the G-R report.

Please contact Charlotte Evans at (510) 420-3351 if you have any questions or require additional information.

Sincerely,


CONESTOGA-ROVERS & ASSOCIATES

Charlotte Evans

CE/doh/1
Enc.

cc: Mr. Aaron Costa, Chevron Environmental Management Company

FIGURES

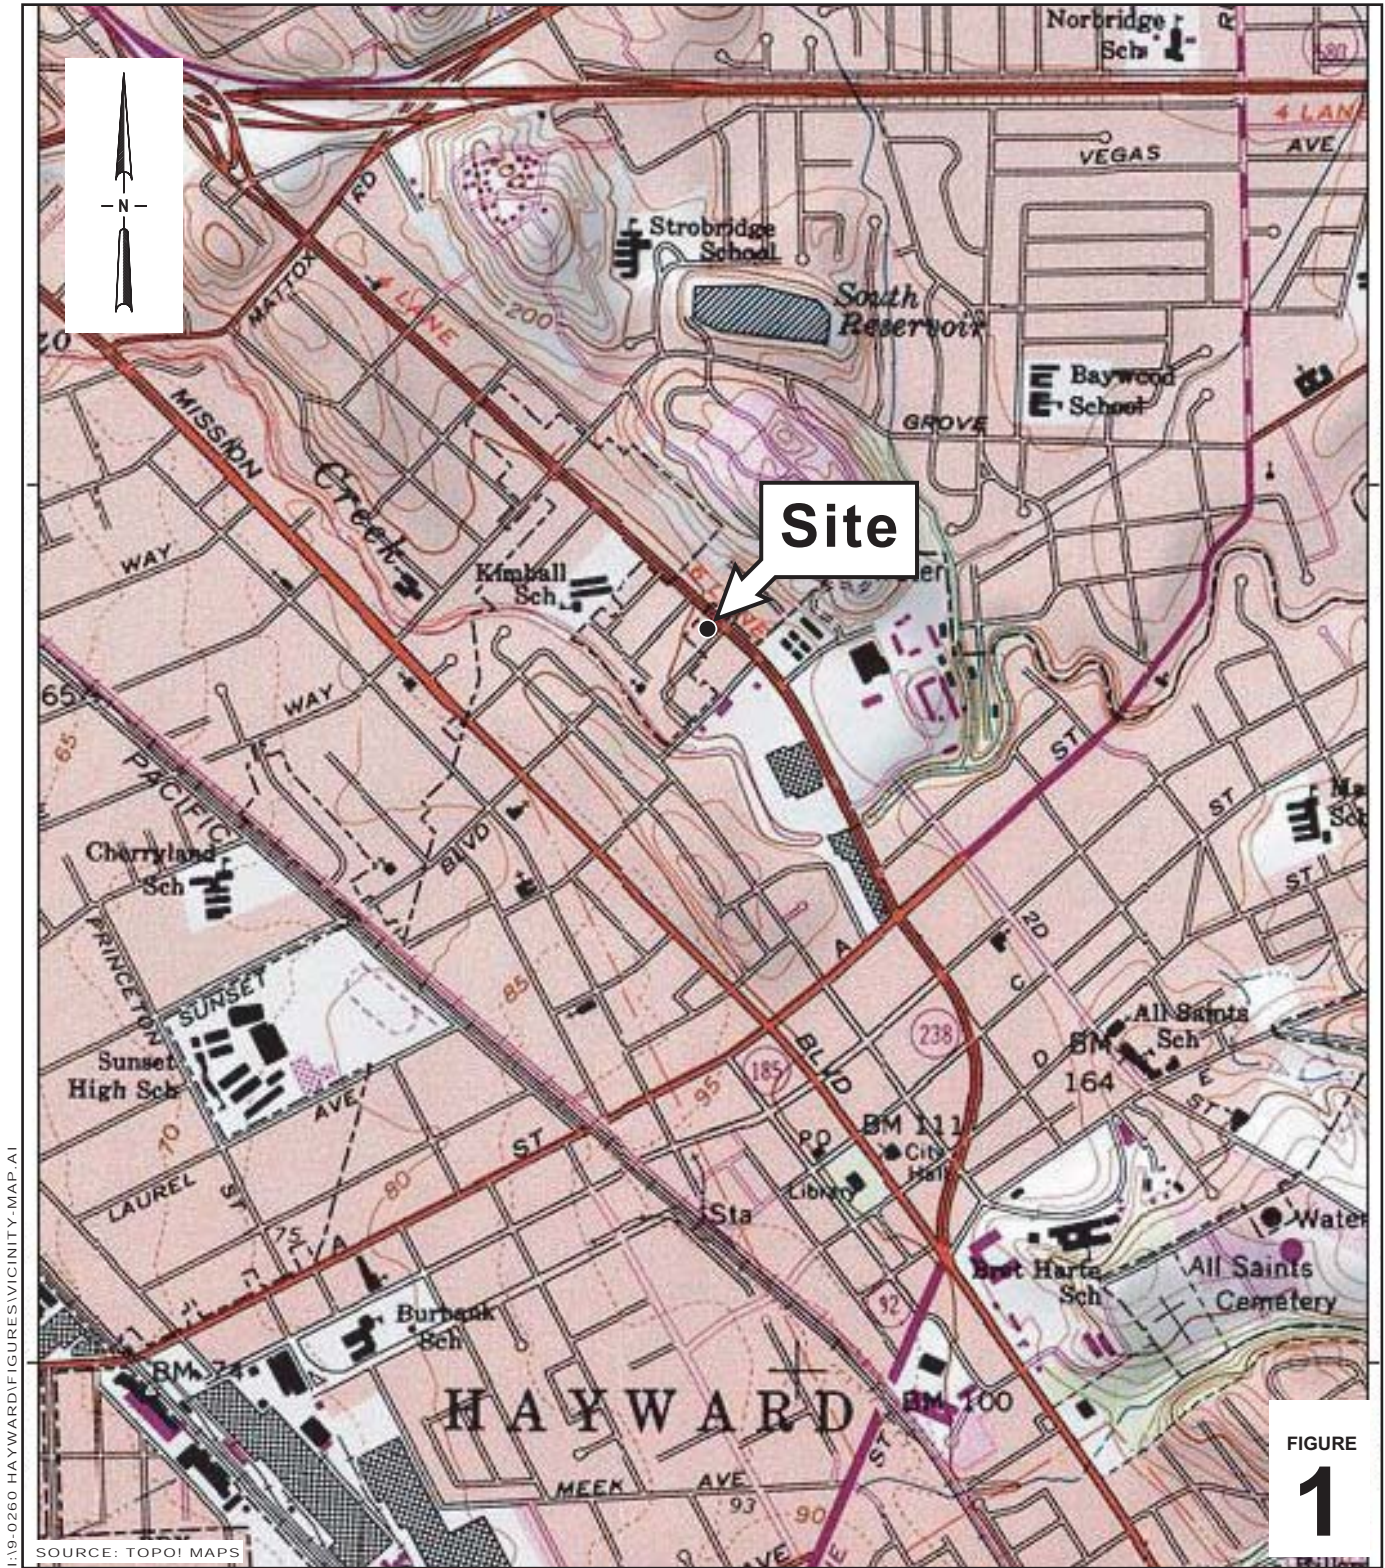

0 1/8 1/4 1/2 1
SCALE : 1" = 1/4 MILE

Former Chevron Station 9-0260

21995 Foothill Boulevard

Hayward, California



**CONESTOGA-ROVERS
& ASSOCIATES**

Vicinity Map

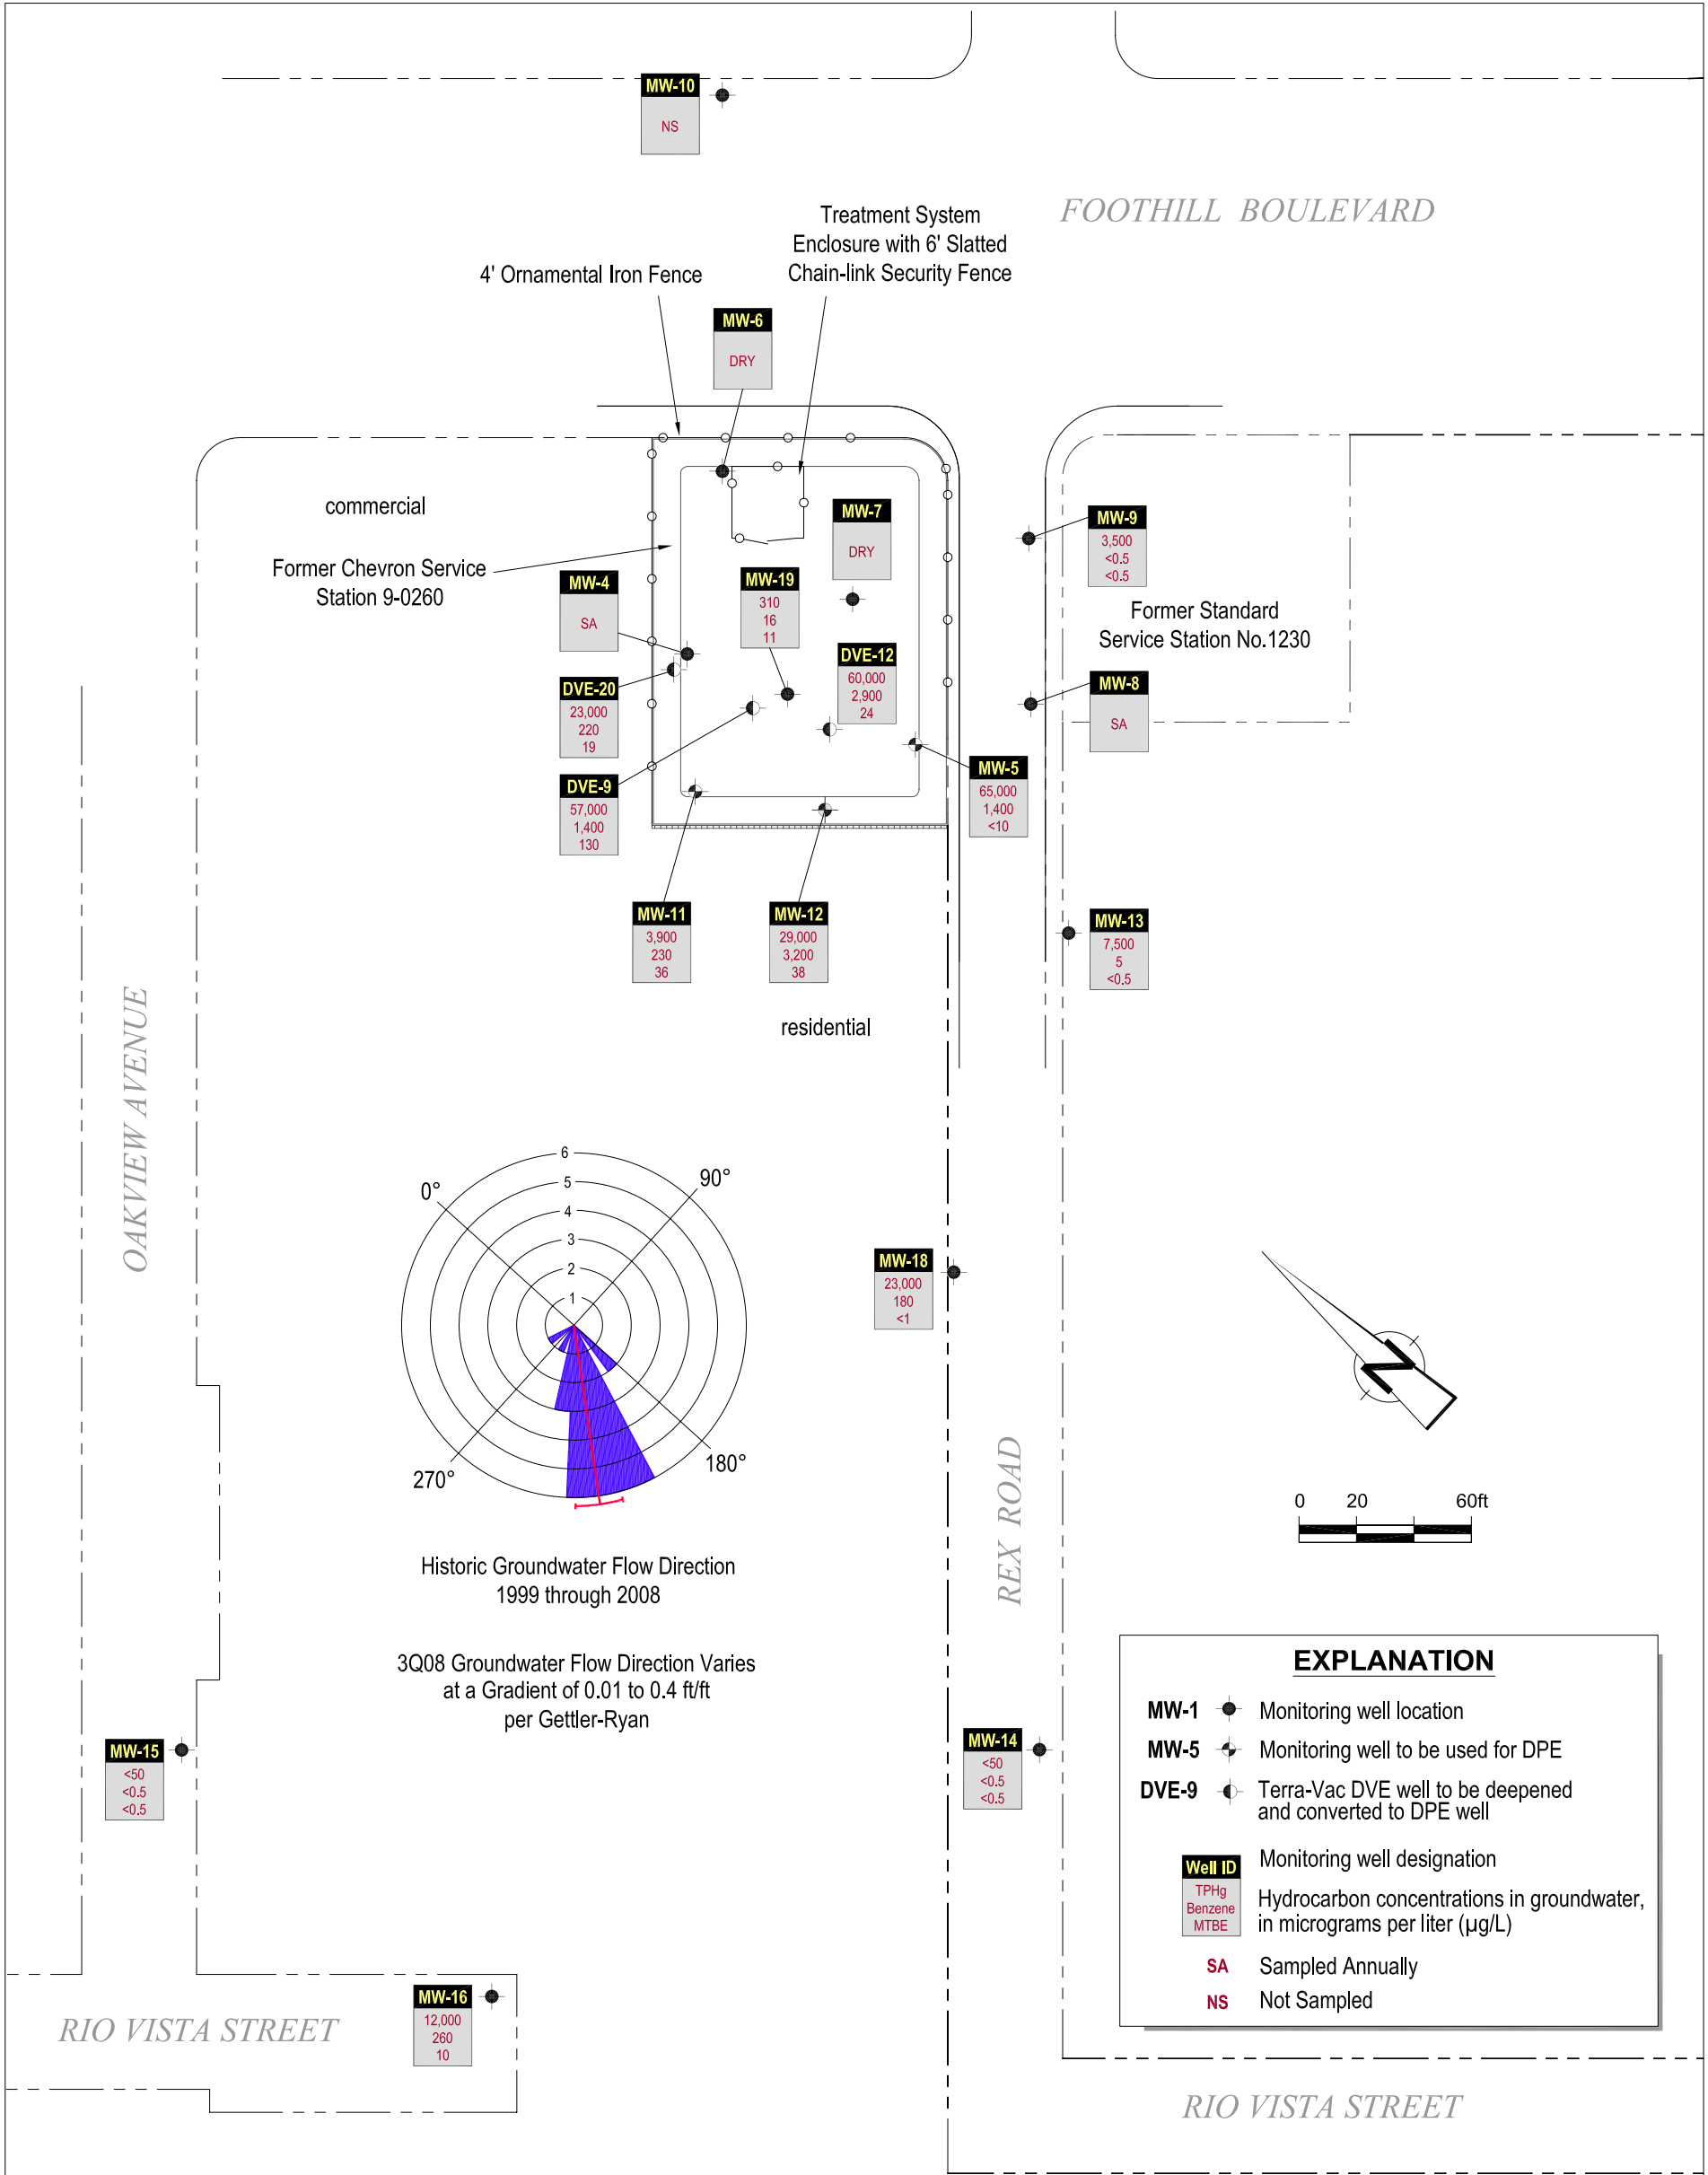


Figure 2
HYDROCARBON CONCENTRATIONS IN GROUNDWATER
FORMER CHEVRON SERVICE STATION 9-0260
21995 FOOTHILL BOULEVARD
Hayward, California
August 22, 2008



G-R Third Quarter, 2008 Quarterly Monitoring Report
October 3, 2008



GETTLER-RYAN Inc.



TRANSMITTAL

October 3, 2008

G-R #385110

TO: Ms. Charlotte Evans
Conestoga-Rovers & Associates
5900 Hollis Street, Suite A
Emeryville, CA 94608

CC: Mr. Aaron Costa
Chevron EMC
6111 Bollinger Canyon Road,
Room 3660
San Ramon, California 94583
(VIA PDF)

FROM: Deanna L. Harding
Project Coordinator
Gettler-Ryan Inc.
6747 Sierra Court, Suite J
Dublin, California 94568

RE: **Chevron Service Station
#9-0260
21995 Foothill Boulevard
Hayward, California
RO 0000383**

WE HAVE ENCLOSED THE FOLLOWING:

COPIES	DATED	DESCRIPTION
1	September 29, 2008	Groundwater Monitoring and Sampling Report Third Quarter Event of August 22, 2008

COMMENTS:

Pursuant to your request, we are providing you with a copy of the above referenced report for **your use and distribution to the following (via PDF):**

Mr. Steven Plunkett, Alameda County Health Care Services, Dept. of Environmental Health, 1131 Harbor Bay Parkway, Suite 250, Alameda, CA 94502-6577 (**Distributed by CRA via PDF**)

Please provide any comments/changes and propose any groundwater monitoring modifications for the next event prior to **October 16, 2008**, at which time this final report will be distributed to the following:

cc: Mr. Hugh Murphy, City of Hayward Fire Department, 777 B Street, Hayward, CA 94541-5007
Mr. Thomas Wong, 1180 Rex Road, Hayward, CA 94541

Enclosures

trans/9-0260-AC

6747 Sierra Court, Suite J • **Dublin**, CA 94568 • (925) 551-7555 • Fax (925) 551-7888
3140 Gold Camp Drive, Suite 170 • **Rancho Cordova**, CA 95670 • (916) 631-1300 • Fax (916) 631-1317
1364 N. McDowell Blvd., Suite B2 • **Petaluma**, CA 94954 • (707) 789-3255 • Fax (707) 789-3218



Aaron Costa
Project Manager
Marketing Business Unit

**Chevron Environmental
Management Company**
6111 Bollinger Canyon Road
San Ramon, CA 94583
Tel (925) 543-2961
Fax (925) 543-2324
acosta@chevron.com

October 3, 2008

Alameda County Health Care Services
1131 Harbor Bay Parkway, Suite 250
Alameda, CA 94502-6577

Re: Chevron Service Station No. 9-0260
Address 21995 Foothill Blvd.

I have reviewed the attached routine groundwater monitoring report dated
October 3, 2008.

I agree with the conclusions and recommendations presented in the referenced report. The information in this report is accurate to the best of my knowledge and all local Agency/Regional Board guidelines have been followed. This report was prepared by Gettler-Ryan Inc., upon whose assistance and advice I have relied.

This letter is submitted pursuant to the requirements of California Water Code Section 13267(b)(1) and the regulating implementation entitled Appendix A pertaining thereto.

I declare under penalty of perjury that the foregoing is true and correct.

Sincerely,

A handwritten signature in black ink, appearing to read "Aaron Costa", written in a cursive style.

Aaron Costa
Project Manager

Attachment: Report

WELL CONDITION STATUS SHEET

Client/Facility #: **Chevron #9-0260**
 Site Address: **21995 Foothill Blvd,**
 City: **Hayward, CA**

Job # **385110**
 Event Date: **8/22 5/21/08**
 Sampler: **SH**

(1 of 2)

WELL ID	Vault Frame Condition	Gasket/ O-Ring (M)missing	BOLTS (M) Missing (R) Replaced	Bolt Flanges B= Broken S= Stripped R=Retap	APRON Condition C=Cracked B=Broken G=Gone	Grout Seal (Deficient) inches from TOC	Casing (Condition prevents tight cap seal)	REPLACE LOCK Y/N	REPLACE CAP Y/N	WELL VAULT Manufacture/Size/ # of Bolts	Pictures Taken Yes / No
P-1	ok							✓	✓	12" emco	✓
MW-16	ok			3xS	ok			✓	✓	8" BL	✓
MW-15	ok							✓	✓	12" emco	✓
MW-14	ok	M	ok		CRacked	ok		✓	✓	"	✓
MW-13	ok	N/A			ok			✓	✓	CHARIS	✓
MW-8	ok				ok			✓	✓	24" vault	✓
MW-9	ok				ok			✓	✓	"	✓
MW-10	ok							✓	✓	12" Pemco	✓
MW-18	ok	M		2xS	M	ok	ok	✓	✓	10" Pemco emco	✓

Comments _____

WELL CONDITION STATUS SHEET

Client/Facility #: **Chevron #9-0260**
 Site Address: **21995 Foothill Blvd.**
 City: **Hayward, CA**

Job # **385110**
 Event Date: **8-22-08**
 Sampler: **AW**

2 of 2

WELL ID	Vault Frame Condition	Gasket/ O-Ring (M)missing	BOLTS (M) Missing (R) Replaced	Bolt Flanges B= Broken S= Stripped R=Retap	APRON Condition C=Cracked B=Broken G=Gone	Grout Seal (Deficient) inches from TOC	Casing (Condition prevents tight cap seal)	REPLACE LOCK Y/N	REPLACE CAP Y/N	WELL VAULT Manufacture/Size/ # of Bolts	Pictures Taken Yes / No
MW-19	OK	—	—	—	→	10"	OK	N	N	EMCO / 12" / 2	N
MW-6	OK	OK	2M	2B	OK	OK	OK	N	N	Lid missing (Diverged)	
MW-7	OK	—	—	—	—	—	→	N	N	Morrison / 12" / 2	
MW-4	NA	—	—	—	→	OK	OK	N	N	Open casing / 4" / N/A	
MW-5	OK	OK	OK	OK	OK	OK	OK	N	N	24" Round vault	
MW-11	↓	↓	↓	↓	↓	↓	↓	↓	↓		
MW-12	↓	↓	↓	↓	↓	↓	↓	↓	↓		
DVE9	↓	↓	↓	↓	↓	↓	↓	↓	↓		
DVE12	↓	↓	↓	↓	↓	↓	↓	↓	↓		
DVE20	↓	↓	↓	↓	↓	↓	↓	↓	↓		

Comments _____



GETTLER-RYAN Inc.



September 29, 2008
G-R Job #385110

Mr. Aaron Costa
Chevron Environmental Management Company
6111 Bollinger Canyon Road, Room 3660
San Ramon, CA 94583

RE: Third Quarter Event of August 22, 2008
Groundwater Monitoring & Sampling Report
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

Dear Mr. Costa:

This report documents the most recent groundwater monitoring and sampling event performed by Gettler-Ryan Inc. (G-R) at the referenced site. All field work was conducted in accordance with G-R Standard Operating Procedure - Groundwater Sampling (attached).

Static groundwater levels were measured and the wells were checked for the presence of separate-phase hydrocarbons. Static water level data, groundwater elevations and separate-phase hydrocarbon thickness (if any) are presented in the attached Table 1. A Potentiometric Map is included as Figure 1.

Groundwater samples were collected from the monitoring wells and submitted to a state certified laboratory for analyses. The field data sheets for this event are attached. Analytical results are presented in the table(s) listed below. The chain of custody document and laboratory analytical report are also attached. All groundwater and decontamination water generated during sampling activities was removed from the site, per the Standard Operating Procedure.

Please call if you have any questions or comments regarding this report. Thank you.

Sincerely,

Deanna L. Harding

Deanna L. Harding
Project Coordinator

Douglas J. Lee

Douglas J. Lee
Senior Geologist, P.G. No. 6882





Figure 1: Potentiometric Map
Table 1: Groundwater Monitoring Data and Analytical Results
Attachments: Standard Operating Procedure - Groundwater Sampling
Field Data Sheets
Chain of Custody Document and Laboratory Analytical Reports

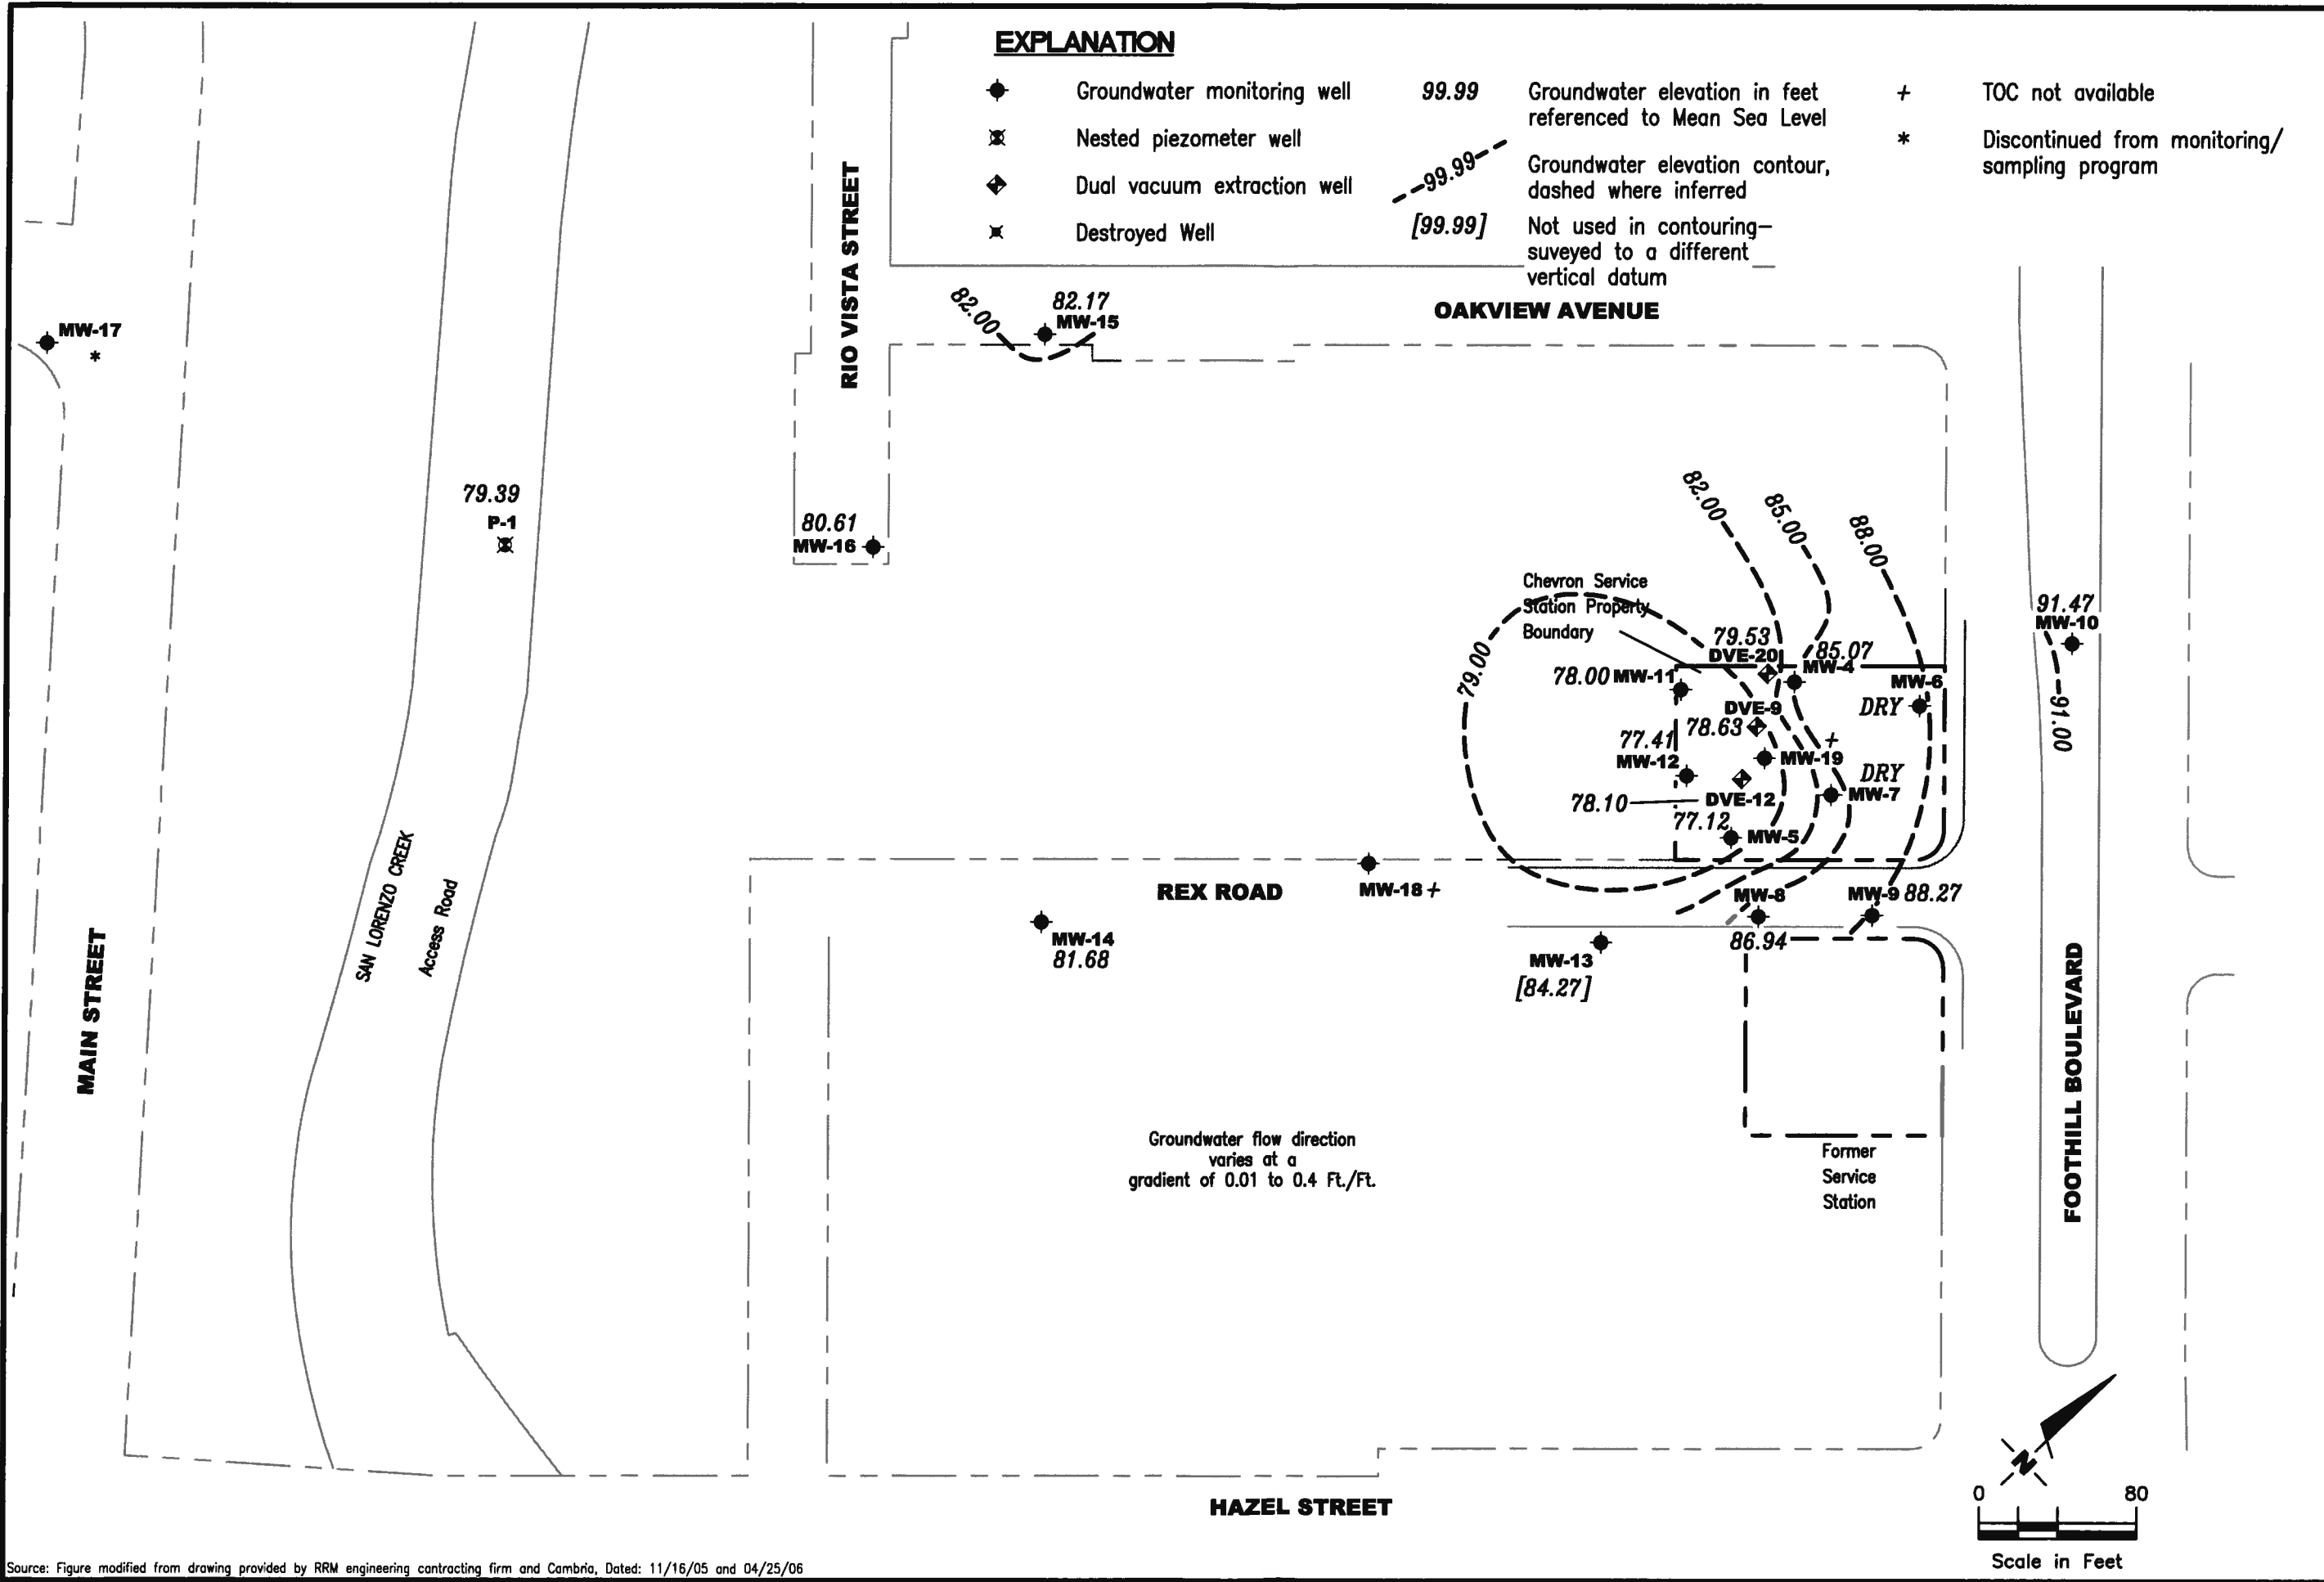

Source: Figure modified from drawing provided by RRM engineering contracting firm and Cambria, Dated: 11/16/05 and 04/25/06

GETTLER - RYAN INC.
 6747 Sierra Court, Suite J
 Dublin, CA 94568
 (925) 551-7555

POTENTIOMETRIC MAP
 Chevron Service Station #9-0260
 21995 Foothill Boulevard
 Hayward, California

PROJECT NUMBER
385110

REVIEWED BY
[Signature]

DATE
August 22, 2008

REVISED DATE

FIGURE
1

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fL)	GWE (msl)	DTW (fL)	SPHT (fL)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-4													
02/05/88	--	--	--	--	--	88,000	24,000	19,000	1,700	10,000	--	--	--
06/15/88	--	87.83	12.92	--	--	95,000	45,000	30,000	2,100	17,000	--	--	--
09/27/88	100.75	86.53	14.22	--	--	500,000	41,000	27,000	<5,000	16,000	--	<5,000	--
09/27/88 ¹	100.75	--	--	--	--	88,000	1,200	4,100	1,600	12,000	--	230	270
01/05/89	100.75	87.55	13.20	--	--	64,000	41,000	29,000	2,700	14,000	--	--	--
04/06/89	100.75	88.43	12.32	--	--	--	--	--	--	--	--	--	--
06/28/89	100.75	86.50	14.25	--	--	110,000	34,000	24,000	2,400	13,000	--	--	--
10/03/89	100.75	86.00	14.75	--	--	240,000	36,000	31,000	3,200	19,000	--	--	--
01/04/90	100.75	86.00	14.75	--	--	130,000	33,000	28,000	2,400	14,000	--	--	--
04/03/90	100.75	86.94	13.81	--	--	110,000	41,000	32,000	2,900	17,000	--	--	--
07/03/90	100.75	86.69	14.06	--	--	180,000	32,000	30,000	2,600	15,000	--	--	--
11/06/90	100.75	85.09	15.66	--	--	170,000	31,000	30,000	2,700	17,000	--	--	--
01/04/91	100.75	85.87	15.18	--	--	--	--	--	--	--	--	--	--
04/03/91	100.75	89.75	11.00	--	--	130,000	21,000	24,000	2,300	14,000	--	--	--
07/02/91	100.75	86.50	14.25	--	--	--	--	--	--	--	--	--	--
10/02/91	100.75	84.59	16.16	--	--	240,000	27,000	33,000	2,600	16,000	--	--	--
01/02/92	100.75	85.49	15.26	--	--	--	--	--	--	--	--	--	--
04/07/92	100.75	88.37	12.38	--	--	--	--	--	--	--	--	--	--
08/13/92	100.75	84.05	16.68	--	--	--	--	--	--	--	--	--	--
12/03/92	100.73	84.58	16.17	--	--	1,300,000	17,000	41,000	12,000	90,000	--	--	--
03/25/93	100.73	90.23	10.50	--	--	--	--	--	--	--	--	--	--
10/04/94	100.73	87.89	12.84	--	--	--	--	--	--	--	--	--	--
11/14/94	100.73	INACCESSIBLE ³		--	--	--	--	--	--	--	--	--	--
05/15/95	100.73	89.36	11.37	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	100.73	88.43	12.30	--	--	--	--	--	--	--	--	--	--
11/28/95	100.73	86.08	14.65	--	--	97,000	23,000	18,000	1,400	8,800	430	--	--
02/20/96	100.73	92.83	7.90	--	--	SAMPLED SEMI-ANNUALLY				--	--	--	--
05/29/96	100.73	89.73	11.00	--	--	59,000	11,000	11,000	740	4,400	<500	--	--
08/27/96	100.73	87.49	13.24	--	--	--	--	--	--	--	--	--	--
11/22/96	100.73	89.23	11.50	--	--	130,000	20,000	14,000	1,200	7,000	21,000	--	--
02/18/97	100.73	91.26	9.47	--	--	--	--	--	--	--	--	--	--
05/23/97 ⁴	100.73	88.10	12.63	--	--	120,000	23,000	21,000	1,400	8,400	50,000	--	--
08/04/97	100.73	87.51	13.22	--	--	120,000	25,000	22,000	1,600	8,000	15,000	--	--
11/25/97 ⁵	100.73	86.83	13.90	--	--	460,000	44,000	45,000	4,000	19,000	290,000	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-4 (cont)													
02/25/98	100.73	87.03	13.70	--	--	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/21/98	100.73	88.74	11.99	--	--	100,000	11,000	8,600	720	4,200	3,100	--	--
08/19/98	100.73	80.70	20.03	--	--	--	--	--	--	--	--	--	--
11/19/98	100.73	81.05	19.68	--	--	51,000	5,200	8,900	1,200	6,400	1,600	--	--
02/12/99	100.73	87.52	13.21	--	--	--	--	--	--	--	--	--	--
05/10/99	100.73	87.99	12.74	--	--	68,800	9,680	11,500	1,450	7,700	2,080/328 ⁷	--	--
09/02/99	100.73	85.14	15.59	--	--	--	--	--	--	--	--	--	--
02/03/00	100.73	87.83	12.90	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	100.73	88.01	12.72	0.00	0.00	3,400 ⁸	24	<10	<10	890	430	--	--
08/02/00 ¹⁵	100.73	86.18	14.55	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	100.73	85.34	15.39	0.00	0.00	66,700	13,900	12,400	1,460	7,940	<250	--	--
02/08/01 ¹⁵	100.73	84.99	15.74	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	100.73	84.24	16.49	0.00	0.00	490,000	2,990	<5,000	<5,000	8,660	18.8	--	--
08/28/01 ¹⁵	100.73	82.77	17.96	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/26/01 ¹⁵	100.73	85.43	15.30	0.00	0.00	39,000	2,700	2,900	1,200	5,700	<100	--	--
02/22/02 ¹⁵	100.73	88.84	11.89	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	100.73	85.52	15.21	0.00	0.00	55,000	4,300	4,900	1,700	9,900	<100	--	--
08/29/02 ¹⁵	100.73	85.01	15.72	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02 ¹⁵	100.73	85.50	15.23	0.00	0.00	39,000	3,600	4,200	1,500	7,300	<50	--	--
02/28/03	100.73	89.03	11.70	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/03 ¹⁷	100.73	88.34	12.39	0.00	0.00	51,000	4,400	5,200	1,300	7,000	5	--	--
08/22/03	100.73	86.18	14.55	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/24-25/03 ¹⁷	100.73	85.76	14.97	0.00	0.00	50,000	3,500	6,300	1,400	7,200	1	--	--
02/27/04	100.73	89.78	10.95	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/21/04 ¹⁷	100.73	86.13	14.60	0.00	0.00	61,000	3,900	11,000	2,000	11,000	<10	--	--
08/26/04	100.73	85.26	15.47	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/04 ¹⁷	100.73	85.64	15.09	0.00	0.00	61,000	1,900	5,000	1,700	8,600	<5	--	--
02/11/05	100.73	UNABLE TO LOCATE - DUE TO OVERGROWN VEGETATION						--	--	--	--	--	--
06/16/05 ¹⁷	100.73	88.68	12.05	0.00	0.00	45,000	1,700	6,300	1,300	6,800	<5	--	--
08/31/05	100.73	88.77	11.96	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/30/05 ¹⁷	100.73	85.54	15.19	0.00	0.00	56,000	2,200	7,800	1,400	8,100	<10	--	--
02/27/06	100.73	89.11	11.62	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30-31/06 ¹⁷	100.73	89.26	11.47	0.00	0.00	36,000	1,200	6,000	1,100	5,700	6	--	--
08/29/06	100.73	86.91	13.82	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-4 (cont)													
12/13/06 ¹⁷	100.73	88.22	12.51	0.00	0.00	59,000	1,600	10,000	1,900	10,000	<10	--	--
02/28/07	100.73	90.36	10.37	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/07 ¹⁷	100.73	86.96	13.77	0.00	0.00	550	9	70	12	58	<0.5	--	--
08/29/07	100.73	83.84	16.89	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/21/07 ¹⁷	103.89	89.12	14.77	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/20/08	103.89	91.53	12.36	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/21/08 ¹⁷	103.89	90.17	13.72	0.00	0.00	17,000	88	1,200	740	4,600	5	--	--
06/24/08 ¹⁷	103.89	89.74	14.15	0.00	0.00	27,000	190	4,100	1,100	6,100	9	--	--
08/22/08	103.89	85.07	18.82	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
MW-5													
02/05/88	--	--	--	--	--	80,000	16,000	15,000	2,600	17,000	--	--	--
06/15/88	--	87.67	12.30	--	--	77,000	42,000	38,000	2,500	16,000	--	--	--
09/27/88	99.97	86.72	13.25	--	--	470,000	39,000	32,000	<5,000	16,000	--	<5,000	--
09/27/88 ¹	99.97	--	--	--	--	48,000	1,800	3,500	1,600	10,000	--	420	410
01/05/89	99.97	87.27	12.70	--	--	82,000	44,000	37,000	2,400	14,000	--	--	--
04/06/89	99.97	87.75	12.22	--	--	--	--	--	--	--	--	--	--
06/28/89	99.97	86.16	13.81	--	--	80,000	36,000	24,000	2,400	13,000	--	--	--
10/03/89	99.97	85.70	14.27	--	--	240,000	40,000	35,000	2,600	15,000	--	--	--
01/04/90	99.97	85.66	14.31	--	--	130,000	37,000	31,000	2,400	13,000	--	--	--
04/03/90	99.97	86.47	13.50	--	--	120,000	41,000	33,000	2,500	14,000	--	--	--
07/03/90	99.97	86.33	13.64	--	--	200,000	28,000	25,000	1,800	10,000	--	--	--
11/06/90	99.97	84.83	15.14	--	--	370,000	38,000	36,000	4,700	31,000	--	--	--
01/04/91	99.97	85.08	14.90	0.01	--	--	--	--	--	--	--	--	--
04/03/91	99.97	88.41	11.56	--	--	140,000	36,000	32,000	2,700	17,000	--	--	--
07/02/91	99.97	86.08	13.89	--	--	--	--	--	--	--	--	--	--
10/02/91	99.97	84.71	15.26	--	--	230,000	34,000	31,000	2,700	16,000	--	--	--
01/02/92	99.97	85.00	14.97	--	--	--	--	--	--	--	--	--	--
04/07/92	99.97	86.53	13.44	--	--	220,000	35,000	30,000	2,500	14,000	--	--	--
08/13/92	99.97	84.36	15.61	--	--	--	--	--	--	--	--	--	--
12/03/92	99.97	83.68	16.29	<0.02 ²	--	--	--	--	--	--	--	--	--
03/25/93	99.97	89.00	10.97	--	--	--	--	--	--	--	--	--	--
06/23/93	99.97	87.40	12.60	0.04	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-5 (cont)													
09/21/93	99.97	85.99	14.00	0.03	--	--	--	--	--	--	--	--	--
12/02/93	99.97	85.73	14.27	0.04	--	--	--	--	--	--	--	--	--
03/08/94	99.97	87.81	12.16	--	--	--	--	--	--	--	--	--	--
06/13/94	99.97	87.22	13.01	0.32	--	--	--	--	--	--	--	--	--
10/04/94	99.97	84.41	15.56	--	--	--	--	--	--	--	--	--	--
11/14/94	99.97	86.62	13.35	--	--	1,100,000	64,000	69,000	9,200	61,000	--	--	--
05/15/95	99.97	89.79	10.18	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.97	88.20	11.77	--	--	--	--	--	--	--	--	--	--
11/28/95	99.97	85.75	14.22	--	--	320,000	34,000	38,000	5,800	31,000	2,000	--	--
02/20/96	99.97	89.60	10.37	Sheen	--	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/29/96	99.97	89.08	10.89	--	--	150,000	23,000	25,000	2,200	12,000	<500	--	--
08/27/96	99.97	87.22	12.75	--	--	--	--	--	--	--	--	--	--
11/22/96	99.97	87.50	12.47	--	--	170,000	25,000	27,000	2,000	12,000	<500	--	--
02/18/97	99.97	90.46	9.51	--	--	--	--	--	--	--	--	--	--
05/23/97	99.97	87.72	12.25	--	--	160,000	29,000	34,000	2,900	16,000	<250	--	--
08/04/97	99.97	87.09	12.88	--	--	130,000	27,000	31,000	2,500	13,000	<500	--	--
11/25/97	99.97	85.16	14.81	--	--	310,000 ⁵	52,000	59,000	5,500	28,000	3,300	--	--
02/25/98	99.97	82.51	17.46	--	--	--	--	--	--	--	--	--	--
05/21/98	99.97	88.37	11.60	--	--	220,000	20,000	26,000	2,000	10,000	8,500	--	--
08/19/98	99.97	82.27	17.70	--	--	--	--	--	--	--	--	--	--
11/19/98	99.97	--	--	--	--	NOT SAMPLED DUE TO INSUFFICIENT WATER			--	--	--	--	--
02/12/99	99.97	87.18	12.79	--	--	--	--	--	--	--	--	--	--
05/10/99	99.97	87.25	12.72	--	--	102,000	13,300	17,200	1,240	<200	7,560/<250 ⁷	--	--
09/02/99	99.97	85.18	14.79	--	--	--	--	--	--	--	--	--	--
02/03/00	99.97	86.86	13.11	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	99.97	87.28	12.69	0.00	0.00	360 ⁸	6.2	<2.5	<2.5	13	13	--	--
08/02/00 ¹⁵	99.97	85.81	14.16	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	99.97	85.36	14.61	0.00	0.00	3,280	331	235	35.7	260	9.41	--	--
02/08/01 ¹⁵	99.97	84.76	15.21	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	99.97	83.77	16.20	0.00	0.00	26,700	5,490	6,310	145	2,910	<0.500	--	--
08/28/01 ¹⁵	99.97	DRY	--	--	--	--	--	--	--	--	--	--	--
11/26/01 ¹⁵	99.97	84.61	15.36	0.00	0.00	88,000	14,000	19,000	1,300	8,000	<200	--	--
02/22/02 ¹⁵	99.97	87.75	12.22	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	99.97	84.74	15.23	0.00	0.00	92,000	11,000	17,000	1,600	9,400	<200	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-5 (cont)													
08/29/02 ¹⁵	99.97	84.65	15.32	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02	99.97	85.21	14.76	0.00	0.00	62	4.9	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	99.97	88.22	11.75	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/03 ¹⁷	99.97	87.36	12.61	0.00	0.00	8,100	1,600	1,100	72	700	8	--	--
08/22/03	99.97	86.12	13.85	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/24-25/03 ¹⁷	99.97	85.01	14.96	0.00	0.00	86,000	9,300	16,000	1,200	6,200	<10	--	--
02/27/04	99.97	89.54	10.43	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/21/04 ¹⁷	99.97	85.39	14.58	0.00	0.00	45,000	4,700	12,000	870	5,000	<10	--	--
08/26/04	99.97	84.29	15.68	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/04 ¹⁷	99.97	84.77	15.20	0.00	0.00	71,000	5,000	13,000	870	5,200	<10	--	--
02/11/05	99.97	87.46	12.51	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/16/05 ¹⁷	99.97	88.84	11.13	0.00	0.00	17,000	1,400	3,900	220	1,700	<5	--	--
08/31/05	99.97	85.99	13.98	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/30/05 ¹⁷	99.97	85.03	14.94	0.00	0.00	49,000	2,900	12,000	840	5,000	<25	--	--
02/27/06	99.97	87.98	11.99	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30-31/06 ^{17,19}	99.97	89.14	10.83	0.00	0.00	89,000	6,500	19,000	2,600	13,000	<25	--	--
08/29/06 ¹⁷	99.97	86.89	13.08	0.00	0.00	110,000	5,900	22,000	2,400	13,000	<50	--	--
12/13/06 ¹⁷	99.97	87.95	12.02	0.00	0.00	110,000	6,100	23,000	1,600	10,000	<25	--	--
02/28/07	DISCONTINUED FROM MONITORING/SAMPLING											--	--
05/30/07 ^{17,18}	99.97	88.52	11.45	0.00	0.00	100,000	4,200	17,000	1,600	8,700	<25	--	--
08/29/07 ^{17,18}	99.97	--	-- ⁵	0.00	0.00	84,000	3,200	22,000	1,800	10,000	<13	--	--
11/21/07 ¹⁸	101.74	88.70**	13.06	0.03	0.28	NOT SAMPLED DUE TO THE PRESENCE OF SPH					--	--	--
02/20/08	101.74	CONNECTED TO REMEDIATION SYSTEM				--	--	--	--	--	--	--	--
05/21/08 ^{15,17,18}	101.74	89.77	11.97	0.00	0.00	57,000 ²²	1,400	22,000	1,700	9,900	<10	--	--
06/24/08 ^{15,17,18}	NP	101.74	89.16	12.58	0.00	25,000	1,300	22,000	1,400	10,000	<10	--	--
08/22/08 ^{15,17,18}	NP	101.74	77.12	24.62	0.00	65,000	1,400	18,000	1,600	8,800	<10	--	--
MW-6													
02/05/88	--	--	--	--	--	53,000	5,100	4,400	2,100	14,000	--	--	--
06/15/88	--	87.92	13.51	--	--	33,000	9,200	5,500	520	20,000	--	--	--
09/27/88	101.43	86.87	14.56	--	--	17,000	2,200	2,800	1,700	5,100	--	--	--
01/05/89	101.43	87.95	13.48	--	--	37,000	5,000	3,400	2,200	10,000	--	--	--
04/06/89	101.43	88.83	12.60	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-6 (cont)													
06/28/89	101.43	86.85	14.58	--	--	80,000	7,000	4,100	2,000	9,700	--	--	--
10/03/89	101.43	88.40	13.03	--	--	110,000	8,500	5,100	2,600	14,000	--	--	--
01/04/90	101.43	86.35	15.08	--	--	59,000	5,200	2,600	2,000	11,000	--	--	--
04/03/90	101.43	87.37	14.06	--	--	31,000	6,600	2,600	2,200	12,000	--	--	--
07/03/90	101.43	87.15	14.28	--	--	66,000	5,800	2,900	2,000	9,800	--	--	--
11/06/90	101.43	85.33	16.10	--	--	--	--	--	--	--	--	--	--
01/04/91	101.43	85.91	15.52	--	--	50,000	5,600	2,200	1,800	9,400	--	--	--
04/03/91	101.43	90.40	11.03	--	--	--	--	--	--	--	--	--	--
07/02/91	101.43	86.99	14.44	--	--	81,000	11,000	2,700	2,100	13,000	--	--	--
10/02/91	101.43	85.21	16.22	--	--	--	--	--	--	--	--	--	--
01/02/92	101.43	85.72	15.71	--	--	67,000	7,500	1,900	1,800	9,500	--	--	--
04/07/92	101.43	87.96	13.47	--	--	--	--	--	--	--	--	--	--
08/13/92	101.43	85.46	15.97	--	--	--	--	--	--	--	--	--	--
12/03/92	101.43	84.81	16.62	--	--	--	--	--	--	--	--	--	--
03/25/93	101.43	90.85	10.58	--	--	110,000	12,000	2,900	4,200	14,000	--	--	--
06/23/93	101.43	88.42	13.01	--	--	--	--	--	--	--	--	--	--
09/21/93	101.43	86.69	14.74	--	--	62,000	12,000	1,400	2,100	12,000	--	--	--
12/02/93	101.43	86.56	14.87	--	--	--	--	--	--	--	--	--	--
03/08/94	101.43	89.39	12.04	--	--	61,000	7,000	1,500	1,500	7,400	--	--	--
06/13/94	101.43	88.06	13.37	--	--	--	--	--	--	--	--	--	--
10/04/94	101.43	85.87	15.56	--	--	78,000	13,000	940	1,900	10,000	--	--	--
11/14/94	101.43	87.90	13.53	--	--	--	--	--	--	--	--	--	--
05/15/95	101.43	90.90	10.53	--	--	--	--	--	--	--	--	--	--
08/04/95	101.43	89.05	12.38	--	--	51,000	8,600	1,400	1,900	7,800	--	--	--
11/28/95	101.43	86.80	14.63	--	--	SAMPLED SEMI-ANNUALLY				--	--	--	--
02/20/96	101.43	91.71	9.72	--	--	59,000	11,000	1,600	2,100	9,400	<500	--	--
05/29/96	101.43	90.49	10.94	--	--	--	--	--	--	--	--	--	--
08/27/96	101.43	88.03	13.40	--	--	84,000	11,000	960	2,300	7,700	<500	--	--
11/22/96	101.43	88.53	12.90	--	--	--	--	--	--	--	--	--	--
02/18/97	101.43	91.42	10.01	--	--	14,000	3,700	160	720	1,800	400	--	--
05/23/97	101.43	88.68	12.75	--	--	--	--	--	--	--	--	--	--
08/04/97	101.43	87.95	13.48	--	--	62,000	13,000	930	3,500	8,500	710	--	--
11/25/97	101.43	87.22	14.21	--	--	--	--	--	--	--	--	--	--
02/25/98	101.43	86.58	14.85	--	--	30,000	2,400	910	740	4,000	2,600	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-6 (cont)													
05/21/98	101.43	89.76	11.67	--	--	--	--	--	--	--	--	--	--
08/19/98	101.43	85.57	15.86	--	--	37,000	390	220	160	3,600	1,600/1,000 ⁷	--	--
11/19/98	101.43	--	--	--	--	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
02/12/99	101.43	89.60	11.83	--	--	80	2.4	<0.5	0.68	6.2	<2.5	--	--
05/10/99	101.43	88.43	13.00	--	--	--	--	--	--	--	--	--	--
09/02/99	101.43	85.71	15.72	--	--	4,440	23.4	<5.0	45.3	46.2	<50	--	--
02/03/00	101.43	88.23	13.20	--	--	8,300	22	<10	43	140	77	--	--
05/09/00 ¹⁵	101.43	88.38	13.05	0.00	0.00	--	--	--	--	--	--	--	--
08/02/00 ¹⁵	101.43	86.68	14.75	0.00	0.00	1,700 ⁸	32	4.9	<2.5	<2.5	55	--	--
11/09-10/00 ¹⁵	101.43	85.87	15.56	0.00	0.00	--	--	--	--	--	--	--	--
02/08/01 ¹⁵	101.43	85.56	15.87	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	101.43	DRY	--	--	--	--	--	--	--	--	--	--	--
08/28/01 ¹⁵	101.43	DRY	--	--	--	--	--	--	--	--	--	--	--
11/26/01 ¹⁵	101.43	85.97	15.46	0.00	0.00	--	--	--	--	--	--	--	--
02/22/02 ¹⁵	101.43	89.49	11.94	0.00	0.00	6,300	<10	1.7	17	26	<25	--	--
05/24/02 ¹⁵	101.43	85.89	15.54	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/29/02 ¹⁵	101.43	DRY	--	--	--	--	--	--	--	--	--	--	--
11/29/02	101.43	85.65	15.78	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
02/28/03	101.43	89.36	12.07	0.00	0.00	180	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03	101.43	88.59	12.84	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/22/03	101.43	87.03	14.40	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
11/24-25/03	101.43	86.31	15.12	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
02/27/04 ¹⁷	101.43	91.37	10.06	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/21/04	101.43	86.97	14.46	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/26/04	101.43	DRY AT 15.21 FEET		--	--	--	--	--	--	--	--	--	--
11/29/04	101.43	DRY AT 14.61 FEET		--	--	--	--	--	--	--	--	--	--
02/11/05 ¹⁷	101.43	88.76	12.67	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/16/05	101.43	89.12	12.31	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/31/05	101.43	86.90	14.53	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
11/30/05	101.43	86.32	15.11	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
02/27/06 ¹⁷	101.43	89.46	11.97	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30-31/06	101.43	89.68	11.75	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/29/06 ¹⁷	101.43	87.07	14.36	0.00	0.00	110	0.6	<0.5	<0.5	<0.5	<0.5	--	--
12/13/06	101.43	88.38	13.05	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-6 (cont)													
02/28/07 ¹⁷	101.43	91.66	9.77	0.00	0.00	1,400	<0.5	<0.5	0.7	<0.5	<0.5	--	--
05/30/07	101.43	88.81	12.62	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/07	101.43	DRY	--	--	--	--	--	--	--	--	--	--	--
11/21/07	104.01	DRY	--	--	--	--	--	--	--	--	--	--	--
02/20/08 ¹⁷	104.01	92.15	11.86	0.00	0.00	1,200	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/21/08	104.01	90.92	13.09	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/24/08	104.01	90.04	13.97	0.00	0.00	--	--	--	--	--	--	--	--
08/22/08	104.01	DRY AT 14.70 FEET		--	--	--	--	--	--	--	--	--	--
MW-7													
02/05/88	--	--	--	--	--	81,000	34,000	36,000	2,400	16,000	--	--	--
06/15/88	--	88.34	12.57	--	--	77,000	40,000	41,000	1,400	24,000	--	--	--
09/27/88	100.91	87.31	13.60	--	--	30,000	9,700	8,900	400	4,100	--	<10	2,600
01/05/89	100.91	87.93	12.98	--	--	96,000	36,000	38,000	2,800	16,000	--	--	--
04/06/89	100.91	88.57	12.34	--	--	--	--	--	--	--	--	--	--
06/28/89	100.91	86.83	14.08	--	--	110,000	31,000	30,000	2,600	16,000	--	--	--
10/03/89	100.91	86.38	14.53	--	--	230,000	34,000	34,000	2,400	15,000	--	--	--
01/04/90	100.91	86.42	14.49	--	--	150,000	41,000	40,000	2,400	15,000	--	--	--
04/03/90	100.91	87.25	13.66	--	--	100,000	31,000	28,000	2,100	16,000	--	--	--
07/03/90	100.91	87.05	13.86	--	--	190,000	30,000	27,000	1,800	13,000	--	--	--
11/06/90	100.91	85.33	15.58	--	--	160,000	27,000	25,000	1,900	15,000	--	--	--
01/04/91	100.91	85.66	15.25	--	--	--	--	--	--	--	--	--	--
04/03/91	100.91	89.50	11.41	--	--	240,000	40,000	36,000	2,400	18,000	--	--	--
07/02/91	100.91	86.73	14.18	--	--	--	--	--	--	--	--	--	--
10/02/91	100.91	85.13	15.78	--	--	220,000	26,000	27,000	2,500	18,000	--	--	--
01/02/92	100.91	85.46	15.45	--	--	--	--	--	--	--	--	--	--
04/07/92	100.91	87.43	13.48	--	--	260,000	27,000	26,000	2,400	15,000	--	--	--
08/13/92	100.91	85.02	15.89	--	--	--	--	--	--	--	--	--	--
12/03/92	100.91	84.48	16.43	--	--	330,000	29,000	31,000	3,300	18,000	--	--	--
03/25/93	100.91	89.81	11.10	--	--	--	--	--	--	--	--	--	--
06/23/93	100.91	88.13	13.63	1.06	--	--	--	--	--	--	--	--	--
09/21/93	100.91	86.57	14.88	0.67	--	--	--	--	--	--	--	--	--
12/02/93	100.91	86.32	14.74	0.19	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-7 (cont)													
03/08/94	100.91	88.54	12.37	--	--	--	--	--	--	--	--	--	--
06/13/94	100.91	88.03	13.12	0.30	--	--	--	--	--	--	--	--	--
10/04/94	100.91	INACCESSIBLE ³	13.83	--	--	--	--	--	--	--	--	--	--
11/14/94	100.91		13.83	0.18	0.50	--	--	--	--	--	--	--	--
05/15/95	100.91	89.85	11.07	0.01	0.00	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	100.91	88.38	12.53	--	--	--	--	--	--	--	--	--	--
11/28/95	100.91	86.53	14.62	0.30	2.00	--	--	--	--	--	--	--	--
02/20/96	100.91	90.84	10.09	0.02	0.0625	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/29/96	100.91	90.00	10.93	0.02	0.50	--	--	--	--	--	--	--	--
08/27/96	100.91	88.18	12.75	0.02	0.50	--	--	--	--	--	--	--	--
11/22/96	100.91	87.94	12.99	0.02	0.50	--	--	--	--	--	--	--	--
02/18/97	100.91	91.33	9.58	0.01	0.50	--	--	--	--	--	--	--	--
05/23/97	100.91	88.36	12.55	--	--	8,300	210	580	130	1,400	<250	--	--
08/04/97	100.91	87.68	13.23	--	--	96,000	12,000	16,000	2,300	14,000	3,600	--	--
02/25/98	100.91	83.89	17.02	--	--	--	--	--	--	--	--	--	--
05/21/98	100.91	88.98	11.93	--	--	150,000	7,100	15,000	1,700	9,600	21,000	--	--
08/19/98	100.91	82.72	18.19	--	--	--	--	--	--	--	--	--	--
11/19/98	100.91	--	--	--	--	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
02/12/99	100.91	88.10	12.81	--	--	--	--	--	--	--	--	--	--
05/10/99	100.91	87.87	13.04	--	--	11,200	384	764	116	618	<1,000/558 ⁷	--	--
09/02/99	100.91	85.16	15.75	--	--	--	--	--	--	--	--	--	--
02/03/00	100.91	86.84	14.07	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	100.91	87.55	13.36	0.00	0.00	150 ⁸	0.52	<0.50	<0.50	2.1	130	--	--
08/02/00 ¹⁵	100.91	85.94	14.97	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	100.91	85.93	14.98	0.00	0.00	559	24.1	12.4	2.34	12.5	5.32	--	--
02/08/01 ¹⁵	100.91	84.89	16.02	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	100.91	83.21	17.70	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
08/28/01 ¹⁵	100.91	82.92	17.99	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/26/01 ¹⁵	100.91	84.76	16.15	0.00	0.00	82,000	12,000	23,000	840	6,500	<100	--	--
02/22/02 ¹⁵	100.91	88.22	12.69	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	100.91	84.73	16.18	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
08/29/02 ¹⁵	100.91	84.74	16.17	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02	100.91	85.59	15.32	0.00	0.00	890	50	150	14	77	<10	--	--
02/28/03	-- ¹⁶	-- ¹⁶	10.07	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH		TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
					REMOVED (gallons)									
MW-7 (cont)														
05/30/03 ¹⁷	-- ¹⁶	-- ¹⁶	11.12	0.00	0.00	190	0.8	1	1	3	62	--	--	--
08/22/03	-- ¹⁶	-- ¹⁶	DRY	--	--	--	--	--	--	--	--	--	--	--
11/24-25/03 ¹⁷	-- ¹⁶	-- ¹⁶	13.99	0.00	0.00	1,000	110	6	18	6	6	--	--	--
02/27/04	-- ¹⁶	-- ¹⁶	11.31	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
06/21/04	-- ¹⁶	-- ¹⁶	13.48	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--	
08/26/04	-- ¹⁶	-- ¹⁶	14.33	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
11/29/04 ¹⁷	-- ¹⁶	-- ¹⁶	14.15	0.00	0.00	1,800	480	2	32	14	28	--	--	--
02/11/05	-- ¹⁶	-- ¹⁶	11.16	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
06/16/05 ¹⁷	-- ¹⁶	-- ¹⁶	10.84	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	29	--	--	--
08/31/05	-- ¹⁶	-- ¹⁶	12.15	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
11/30/05 ¹⁷	-- ¹⁶	-- ¹⁶	13.91	0.00	0.00	120	10	1	<0.5	<0.5	9	--	--	--
02/27/06	-- ¹⁶	-- ¹⁶	10.47	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
05/30-31/06 ¹⁷	-- ¹⁶	-- ¹⁶	10.10	0.00	0.00	91	1	3	0.6	0.9	99	--	--	--
08/29/06	-- ¹⁶	-- ¹⁶	12.62	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
12/13/06 ¹⁷	-- ¹⁶	-- ¹⁶	12.57	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--	--
02/28/07	-- ¹⁶	-- ¹⁶	9.54	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
05/30/07 ¹⁷	-- ¹⁶	-- ¹⁶	12.01	0.00	0.00	<50	<0.5	1	<0.5	<0.5	28	--	--	--
08/29/07	-- ¹⁶	-- ¹⁶	14.62	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
11/21/07 ¹⁷	103.17	89.30	13.87	0.00	0.00	9,900	340	4,100	190	840	11	--	--	--
02/20/08	103.17	91.56	11.61	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--	--
05/21/08 ¹⁷	103.17	90.56	12.61	0.00	0.00	<50 ²²	<0.5	<0.5	<0.5	<0.5	31	--	--	--
06/24/08 ¹⁷	103.17	90.20	12.97	0.00	0.00	<50	1	1	<0.5	2	47	--	--	--
08/22/08	103.17	DRY AT 16.62 FEET		--	--	--	--	--	--	--	--	--	--	--
MW-8														
10/27/88	--	--	--	--	--	190,000	27,000	43,000	2,200	15,000	--	--	--	--
01/05/89	--	87.65	12.02	--	--	87,000	24,000	39,000	3,000	15,000	--	--	--	--
04/06/89	99.67	87.89	11.78	--	--	--	--	--	--	--	--	--	--	--
06/28/89	99.67	86.27	13.40	--	--	120,000	22,000	35,000	2,900	16,000	--	--	--	--
10/03/89	99.67	85.92	13.84	0.11	--	--	--	--	--	--	--	--	--	--
01/04/90	99.67	85.76	13.99	0.10	--	--	--	--	--	--	--	--	--	--
04/03/90	99.67	86.84	13.07	0.30	--	--	--	--	--	--	--	--	--	--
07/03/90	99.67	86.59	13.11	0.04	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-8 (cont)													
11/06/90	99.67	85.02	14.77	0.15	--	--	--	--	--	--	--	--	--
01/04/91	99.67	85.22	14.59	0.18	--	--	--	--	--	--	--	--	--
04/03/91	99.67	88.18	11.53	0.05	--	--	--	--	--	--	--	--	--
07/02/91	99.67	86.34	13.71	0.48	--	--	--	--	--	--	--	--	--
10/02/91	99.67	85.05	14.84	0.27	--	--	--	--	--	--	--	--	--
01/02/92	99.67	84.86	15.05	0.30	--	--	--	--	--	--	--	--	--
04/07/92	99.67	87.73	12.17	0.29	--	--	--	--	--	--	--	--	--
08/13/92	99.67	84.96	14.96	0.31	--	--	--	--	--	--	--	--	--
12/03/92	99.67	84.44	15.85	0.78	--	--	--	--	--	--	--	--	--
03/25/93	99.67	88.89	10.78	--	--	--	--	--	--	--	--	--	--
06/23/93	99.67	87.60	12.27	0.25	--	--	--	--	--	--	--	--	--
09/21/93	99.67	86.25	13.68	0.32	--	--	--	--	--	--	--	--	--
12/02/93	99.67	85.86	14.00	0.24	--	--	--	--	--	--	--	--	--
03/08/94	99.67	87.83	11.84	--	--	--	--	--	--	--	--	--	--
06/13/94	99.67	87.58	12.11	0.03	--	--	--	--	--	--	--	--	--
10/04/94	99.67	85.47	14.20	--	--	--	--	--	--	--	--	--	--
11/14/94	99.67	85.61	14.06	--	--	140,000	12,000	36,000	2,400	17,000	--	--	--
05/15/95	99.67	89.72	9.95	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.67	88.53	11.14	--	--	--	--	--	--	--	--	--	--
11/28/95	99.67	86.35	13.32	--	--	100,000	6,900	34,000	2,700	16,000	650	--	--
02/20/96	99.67	89.67	10.00	--	--	SAMPLED SEMI-ANNUALLY					--	--	--
05/29/96	99.67	89.37	10.30	--	--	130,000	8,800	30,000	2,300	14,000	<500	--	--
08/27/96	99.67	87.42	12.25	--	--	--	--	--	--	--	--	--	--
11/22/96	99.67	87.66	12.01	--	--	150,000	7,400	33,000	2,400	14,000	<500	--	--
02/18/97	99.67	90.56	9.11	--	--	--	--	--	--	--	--	--	--
05/23/97	99.67	88.09	11.58	--	--	140,000	11,000	38,000	3,200	18,000	<250	--	--
08/04/97	99.67	87.49	12.18	--	--	140,000	8,000	38,000	3,500	18,000	<500	--	--
11/25/97	99.67	82.62	17.05	--	--	290,000 ⁵	15,000	71,000	7,400	36,000	3,600	--	--
02/25/98	99.67	89.64	10.03	--	--	--	--	--	--	--	--	--	--
05/21/98	99.67	90.26	9.41	--	--	110,000	2,800	11,000	1,200	9,800	660	--	--
08/19/98	99.67	82.47	17.20	--	--	--	--	--	--	--	--	--	--
11/19/98	99.67	83.00	16.67	--	--	51,000	3,100	25,000	2,300	15,000	3,100	--	--
02/12/99	99.67	89.15	10.52	--	--	--	--	--	--	--	--	--	--
05/10/99	99.67	88.72	10.95	--	--	104,000	2,980	22,000	1,960	12,800	<2,500/<333 ⁷	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-8 (cont)													
09/02/99	99.67	89.40	10.27	--	--	--	--	--	--	--	--	--	--
02/03/00	99.67	88.22	11.45	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	99.67	88.77	10.90	0.00	0.00	37,000 ⁸	2,200	12,000	<100	8,400	1,900	--	--
08/02/00 ¹⁵	99.67	87.42	12.25	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	99.67	86.73	12.94	0.00	0.00	63,100	2,330	17,200	1,520	11,300	<250	--	--
02/08/01 ¹⁵	99.67	86.42	13.25	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	99.67	85.51	14.16	0.00	0.00	79,400	1,120	18,900	<2,500	13,400	47.6	--	--
08/28/01 ¹⁵	99.67	84.08	15.59	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/26/01 ¹⁵	99.67	86.07	13.60	0.00	0.00	48,000	640	10,000	980	8,500	<100	--	--
02/22/02 ¹⁵	99.67	89.16	10.51	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	99.67	86.61	13.06	0.00	0.00	62,000	1,100	14,000	1,300	9,600	<200	--	--
08/29/02 ¹⁵	99.67	86.11	13.56	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02	99.67	86.63	13.04	0.00	0.00	57,000	590	11,000	1,200	10,000	<50	--	--
02/28/03	99.67	89.59	10.08	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/03 ¹⁷	99.67	88.67	11.00	0.00	0.00	13,000	100	650	270	2,100	<0.5	--	--
08/22/03 ¹⁵	99.67	86.97	12.70	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/24-25/03 ¹⁷	99.67	86.39	13.28	0.00	0.00	64,000	450	17,000	1,300	9,900	<5	--	--
02/27/04	99.67	89.46	10.21	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/21/04 ¹⁷	99.67	86.87	12.80	0.00	0.00	18,000	140	2,100	540	4,400	<3	--	--
08/26/04	99.67	85.82	13.85	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/04 ¹⁷	99.67	86.22	13.45	0.00	0.00	67,000	250	13,000	1,000	6,800	<10	--	--
02/11/05	99.67	88.75	10.92	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/16/05 ¹⁷	99.67	89.29	10.38	0.00	0.00	15,000	120	920	390	2,500	<1	--	--
08/31/05	99.67	86.91	12.76	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/30/05 ¹⁷	99.67	86.65	13.02	0.00	0.00	32,000	88	5,600	650	4,000	<10	--	--
02/27/06	99.67	89.46	10.21	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30-31/06 ^{17,20}	99.67	89.59	10.08	0.00	0.00	53,000	200	9,800	1,400	6,700	<5	--	--
08/29/06	99.67	87.60	12.07	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
12/13/06 ^{17,18}	99.67	87.46	12.21	0.00	0.00	23,000	54	2,500	680	3,400	<3	--	--
02/28/07	99.67	89.53	10.14	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/07 ^{17,18}	99.67	88.09	11.58	0.00	0.00	16,000	43	870	470	2,400	<1	--	--
08/29/07 ¹⁸	99.67	86.02	13.65	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/21/07	102.02	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
02/20/08	102.02	90.96	11.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-8 (cont)													
05/21/08 ¹⁷	102.02	89.63	12.39	0.00	0.00	3,800 ²²	3	84	150	220	<0.5	--	--
06/24/08 ^{17,20}	102.02	89.44	12.58	0.00	0.00	3,700	4	1,000	190	970	<0.5	--	--
08/22/08	102.02	86.94	15.08	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
MW-9													
10/27/88	--	--	--	--	--	50,000	2,000	9,900	2,000	14,000	--	--	--
01/05/89	--	88.52	12.63	--	--	55,000	670	8,900	3,400	16,000	--	--	--
04/06/89	101.15	88.69	12.46	--	--	--	--	--	--	--	--	--	--
06/28/89	101.15	87.11	14.04	--	--	100,000	510	4,500	2,600	13,000	--	--	--
10/03/89	101.15	86.54	14.61	--	--	130,000	540	8,000	3,200	17,000	--	--	--
01/04/90	101.15	86.56	14.59	--	--	83,000	600	4,600	2,600	14,000	--	--	--
04/03/90	101.15	87.40	13.75	--	--	52,000	1,600	5,400	3,100	16,000	--	--	--
07/03/90	101.15	87.31	13.84	--	--	100,000	520	5,400	3,200	16,000	--	--	--
11/06/90	101.15	85.73	15.42	--	--	--	--	--	--	--	--	--	--
01/04/91	101.15	85.78	15.37	--	--	59,000	1,100	5,600	2,500	13,000	--	--	--
04/03/91	101.15	88.88	12.27	--	--	--	--	--	--	--	--	--	--
07/02/91	101.15	86.98	14.17	--	--	130,000	1,900	7,600	3,600	20,000	--	--	--
10/02/91	101.15	85.47	15.68	--	--	--	--	--	--	--	--	--	--
01/02/92	101.15	85.50	15.65	--	--	100,000	3,300	8,200	2,800	14,000	--	--	--
04/07/92	101.15	87.31	13.84	--	--	--	--	--	--	--	--	--	--
08/13/92	101.15	85.65	15.50	--	--	45,000	1,300	3,000	1,500	7,100	--	--	--
12/03/92	101.15	84.49	16.66	--	--	--	--	--	--	--	--	--	--
03/25/93	101.15	89.67	11.48	--	--	220,000	540	3,200	2,100	18,000	--	--	--
06/23/93	101.15	88.32	12.83	--	--	--	--	--	--	--	--	--	--
09/21/93	101.15	86.84	14.31	--	--	54,000	1,900	3,400	1,700	9,100	--	--	--
12/02/93	101.15	86.46	14.70	0.01	--	--	--	--	--	--	--	--	--
03/08/94	101.15	88.52	12.63	--	--	49,000	800	780	390	3,600	--	--	--
06/13/94	101.15	87.50	13.65	--	--	--	--	--	--	--	--	--	--
10/04/94	101.15	85.95	15.20	--	--	180,000	2,600	5,400	1,700	11,000	--	--	--
11/14/94	101.15	86.90	14.25	--	--	--	--	--	--	--	--	--	--
05/15/95	101.15	90.51	10.64	--	--	--	--	--	--	--	--	--	--
08/04/95	101.15	89.26	11.89	--	--	42,000	1,400	2,700	1,700	9,000	--	--	--
11/28/95	101.15	87.23	13.92	--	--	SAMPLED SEMI-ANNUALLY			--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-9 (cont)													
02/20/96	101.15	90.54	10.61	Sheen	--	41,000	1,600	1,700	750	6,500	<100	--	--
05/29/96	101.15	90.34	10.81	--	--	--	--	--	--	--	--	--	--
08/27/96	101.15	88.25	12.90	Sheen	--	71,000	2,700	3,600	920	5,900	290	--	--
11/22/96	101.15	88.27	12.88	--	--	--	--	--	--	--	--	--	--
02/18/97	101.15	91.49	9.66	0.01	--	78,000	1,800	3,800	2,300	13,000	510	--	--
05/23/97	101.15	88.62	12.53	--	--	--	--	--	--	--	--	--	--
08/04/97	101.15	88.15	13.00	--	--	73,000	2,600	2,200	440	9,600	370	--	--
11/25/97	101.15	84.03	17.12	--	--	--	--	--	--	--	--	--	--
02/25/98	101.15	88.46	12.69	--	--	34,000	150	510	1,300	6,400	<250	--	--
05/21/98	101.15	91.01	10.14	--	--	--	--	--	--	--	--	--	--
08/19/98	101.15	86.05	15.10	--	--	42,000	<50	330	890	4,200	<250	--	--
11/19/98	101.15	85.18	15.97	--	--	--	--	--	--	--	--	--	--
02/12/99	101.15	89.90	11.25	--	--	13,000	<100	200	560	2,200	<500	--	--
05/10/99	101.15	88.81	12.34	--	--	16,900	<50	112	506	1,850	<500/<20 ⁷	--	--
09/02/99	101.15	89.81	11.34	--	--	7,200	<25	<25	185	493	<250	--	--
02/03/00	101.15	88.93	12.22	--	--	11,000	68	22	380	1,000	66	--	--
05/09/00 ¹⁵	101.15	89.55	11.60	0.00	0.00	--	--	--	--	--	--	--	--
08/02/00 ¹⁵	101.15	88.10	13.05	0.00	0.00	3,400 ⁸	41	10	<5.0	360	77	--	--
11/09-10/00 ¹⁵	101.15	87.51	13.64	0.00	0.00	--	--	--	--	--	--	--	--
02/08/01 ¹⁵	101.15	87.09	14.06	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	101.15	86.20	14.95	0.00	0.00	--	--	--	--	--	--	--	--
08/28/01 ¹⁵	101.15	85.03	16.12	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER					--	--	--
11/26/01 ¹⁵	101.15	86.49	14.66	0.00	0.00	--	--	--	--	--	--	--	--
02/22/02 ¹⁵	101.15	90.20	10.95	0.00	0.00	5,300	<10	4.5	79	190	<20	--	--
05/24/02 ¹⁵	101.15	87.52	13.63	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/29/02 ¹⁵	101.15	86.75	14.40	0.00	0.00	4,200	<5.0	2.7	80	37	<2.5	--	--
11/29/02	101.15	87.27	13.88	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
02/28/03	101.15	90.68	10.47	0.00	0.00	6,300	<100	11	130	210	<100	--	--
05/30/03	101.15	89.54	11.61	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/22/03 ¹⁷	101.15	87.64	13.51	0.00	0.00	5,500	1	5	150	38	<0.5	--	--
11/24-25/03	101.15	87.21	13.94	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
02/27/04 ¹⁷	101.15	90.60	10.55	0.00	0.00	6,300	0.7	6	160	39	<0.5	--	--
06/21/04	101.15	87.48	13.67	0.00	0.00	SAMPLED SEMI-ANNUALLY					--	--	--
08/26/04 ¹⁷	101.15	86.37	14.78	0.00	0.00	2,400	<0.5	1	19	4	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-9 (cont)													
11/29/04	101.15	86.74	14.41	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/11/05 ¹⁷	101.15	89.44	11.71	0.00	0.00	6,200	<1	5	84	35	<1	--	--
06/16/05	101.15	89.74	11.41	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/31/05	101.15	INACCESSIBLE - VEHICLE PARKED OVER WELL						--	--	--	--	--	--
11/30/05	101.15	90.20	10.95	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/27/06 ¹⁷	101.15	90.20	10.95	0.00	0.00	20,000	<1	23	360	1,000	<1	--	--
05/30-31/06 ²⁰	101.15	90.56	10.59	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/06 ¹⁷	101.15	88.37	12.78	0.00	0	7,800	<0.5	6	150	98	<0.5	--	--
12/13/06	101.15	INACCESSIBLE - VEHICLE PARKED OVER WELL						--	--	--	--	--	--
02/28/07 ¹⁷	101.15	90.42	10.73	0.00	0.00	8,500	<0.5	11	210	530	<0.5	--	--
05/30/07 ¹⁸	101.15	89.12	12.03	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/07 ^{17,18}	101.15	87.00	14.15	0.00	0.00	7,200	<0.5	4	120	49	<0.5	--	--
11/21/07	103.57	89.29	14.28	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/20/08 ¹⁷	103.57	91.44	12.13	0.00	0.00	4300	<0.5	2	88	25	<0.5	--	--
05/21/08	103.57	90.83	12.74	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/24/08 ²⁰	103.57	90.14	13.43	0.00	0.00	--	--	--	--	--	--	--	--
08/22/08 ¹⁷	103.57	88.27	15.30	0.00	0.00	3,500 ²²	<0.5	1	54	10	<0.5	--	--
MW-10													
10/27/88	--	--	--	--	--	<500	26	13	<5.0	<5.0	--	--	--
01/05/89	--	89.72	12.64	--	--	<1,000	<0.3	<0.3	<0.3	<0.3	--	--	--
04/06/89	102.36	90.98	11.38	--	--	--	--	--	--	--	--	--	--
06/28/89	102.36	88.72	13.64	--	--	<500	<0.5	<0.5	<0.5	<0.5	--	--	--
10/03/89	102.36	88.51	13.85	--	--	<500	<0.5	<0.5	<0.5	<0.5	--	--	--
01/04/90	102.36	88.61	13.75	--	--	<50	0.5	1.1	<0.5	1.7	--	--	--
04/03/90	102.36	89.50	12.86	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
07/03/90	102.36	88.93	13.43	--	--	--	--	--	--	--	--	--	--
11/06/90	102.36	87.54	14.82	--	--	--	--	--	--	--	--	--	--
01/04/91	102.36	88.38	13.98	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/03/91	102.36	92.57	9.79	--	--	--	--	--	--	--	--	--	--
07/02/91	102.36	90.08	12.28	--	--	--	--	--	--	--	--	--	--
10/02/91	102.36	87.83	14.53	--	--	--	--	--	--	--	--	--	--
01/02/92	102.36	88.76	13.60	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-10 (cont)													
04/07/92	102.36	90.53	11.83	--	--	--	--	--	--	--	--	--	--
08/13/92	102.36	88.41	13.95	--	--	--	--	--	--	--	--	--	--
12/03/92	102.36	88.40	13.96	--	--	--	--	--	--	--	--	--	--
03/25/93	102.36	93.91	8.45	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--	--
06/23/93	102.36	91.03	11.60	--	--	--	--	--	--	--	--	--	--
09/21/93	102.36	89.31	13.32	--	--	--	--	--	--	--	--	--	--
12/02/93	102.36	89.36	13.27	--	--	--	--	--	--	--	--	--	--
03/08/94	102.36	91.51	10.85	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/13/94	102.36	--	--	--	--	--	--	--	--	--	--	--	--
10/04/94	102.36	88.46	13.90	--	--	--	--	--	--	--	--	--	--
11/14/94	102.36	90.56	11.80	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
05/15/95	102.36	93.38	8.98	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	102.36	91.92	10.44	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/28/95	102.36	88.81	13.55	--	--	<50	1.6	0.81	<0.5	<0.5	<0.6	--	--
02/20/96	102.36	93.84	8.52	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	102.36	93.16	9.20	--	--	<50	<0.5	<0.5	<0.5	0.9	<5.0	--	--
08/27/96	102.36	90.35	12.01	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	102.36	90.84	11.52	--	--	<50	<0.5	<0.5	<0.5	1.0	<5.0	--	--
02/18/97	102.36	93.87	8.49	--	--	<50	0.7	<0.5	<0.5	<0.5	<5.0	--	--
05/23/97	102.36	91.48	10.88	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/04/97	102.36	89.07	13.29	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/25/97	102.36	89.06	13.30	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	102.36	94.54	7.82	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/21/98	102.36	96.22	6.14	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
08/19/98	102.36	90.62	11.74	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	102.36	88.96	13.40	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	102.36	93.94	8.42	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/10/99	102.36	92.14	10.22	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0/<2.0 ⁷	--	--
09/02/99	102.36	93.13	9.23	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	102.36	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--
05/09/00	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
08/02/00	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
11/09-10/00	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
02/08/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-10 (cont)													
05/02/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
08/28/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
11/26/01	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
02/22/02	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
05/24/02	102.36	UNABLE TO LOCATE - OVERGROWN VEGETATION/LANDSCAPING						--	--	--	--	--	--
08/29/02	102.36	88.90	13.46	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
11/29/02	102.36	89.30	13.06	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	102.36	92.79	9.57	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03 ¹⁷	102.36	92.37	9.99	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ^{15,17}	102.36	90.54	11.82	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03 ¹⁷	102.36	89.42	12.94	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	102.36	94.32	8.04	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/21/04 ¹⁷	102.36	91.65	10.71	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/26/04 ¹⁷	102.36	88.56	13.80	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/29/04 ¹⁷	102.36	89.30	13.06	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/11/05 ¹⁷	102.36	92.49	9.87	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/16/05 ¹⁷	102.36	93.08	9.28	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/31/05 ¹⁷	102.36	90.09	12.27	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/30/05 ¹⁷	102.36	89.44	12.92	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/06 ¹⁷	102.36	93.54	8.82	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30-31/06 ¹⁷	102.36	94.09	8.27	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/06 ¹⁷	102.36	90.55	11.81	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
12/13/06 ¹⁷	102.36	86.42	15.94	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/28/07 ¹⁷	102.36	94.14	8.22	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30/07	102.36	91.87	10.49	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/07 ¹⁷	102.36	92.21	10.15	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/21/07	104.74	94.38	10.36	0.00	0.00	--	--	--	--	--	--	--	--
02/20/08	104.74	95.47	9.27	0.00	0.00	--	--	--	--	--	--	--	--
05/21/08	104.74	94.38	10.36	0.00	0.00	--	--	--	--	--	--	--	--
06/24/08	104.74	93.46	11.28	0.00	0.00	--	--	--	--	--	--	--	--
08/22/08	104.74	91.47	13.27	0.00	0.00	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-11													
06/28/89	--	85.64	14.33	--	--	60,000	36,000	13,000	2,500	12,000	--	--	--
10/03/89	--	85.36	14.61	--	--	14,000	4,200	1,400	240	1,300	--	--	--
01/04/90	99.97	85.42	14.55	--	--	82,000	33,000	11,000	2,000	10,000	--	--	--
04/03/90	99.97	86.15	13.82	--	--	78,000	35,000	12,000	2,300	12,000	--	--	--
07/03/90	99.97	85.97	14.00	--	--	140,000	32,000	12,000	2,100	10,000	--	--	--
11/06/90	99.97	84.41	15.56	--	--	--	--	--	--	--	--	--	--
01/04/91	99.97	85.09	14.88	0.30	--	--	--	--	--	--	--	--	--
04/03/91	99.97	89.22	10.75	0.21	--	340,000	29,000	14,000	3,700	24,000	--	--	--
07/02/91	99.97	86.00	13.97	0.02	--	130,000	27,000	14,000	2,200	12,000	--	--	--
10/02/91	99.97	84.37	15.60	--	--	--	--	--	--	--	--	--	--
01/02/92	99.97	85.46	14.51	--	--	77,000	18,000	14,000	1,900	10,000	--	--	--
04/07/92	99.97	86.84	13.13	--	--	--	--	--	--	--	--	--	--
08/13/92	99.97	82.53	17.04	--	--	--	--	--	--	--	--	--	--
12/03/92	99.57	83.98	15.59	--	--	--	--	--	--	--	--	--	--
03/25/93	99.57	89.51	10.06	--	--	110,000	13,000	2,100	5,900	9,800	--	--	--
03/08/94	99.57	87.87	11.70	--	--	--	--	--	--	--	--	--	--
06/13/94	99.57	87.41	12.16	--	--	--	--	--	--	--	--	--	--
10/04/94	99.57	INACCESSIBLE ³	--	--	--	--	--	--	--	--	--	--	--
11/14/94	99.57	INACCESSIBLE ³	--	--	--	--	--	--	--	--	--	--	--
05/15/95	99.57	89.55	10.02	--	--	--	--	--	--	--	--	--	--
08/04/95	99.57	87.75	11.82	--	--	33,000	9,400	3,000	1,800	6,100	--	--	--
11/28/95	99.57	82.85	16.72	--	--	SAMPLED SEMI-ANNUALLY							
02/20/96	99.57	89.57	10.00	--	--	22,000	4,500	2,200	560	3,500	<120	--	--
05/29/96	99.57	88.43	11.14	--	--	--	--	--	--	--	--	--	--
08/27/96	99.57	86.44	13.13	--	--	85,000	10,000	6,600	1,500	6,500	260	--	--
11/22/96	99.57	87.47	12.10	--	--	--	--	--	--	--	--	--	--
02/18/97	99.57	90.34	9.23	--	--	42,000	7,100	3,100	830	4,200	510	--	--
05/23/97	99.57	87.29	12.28	--	--	--	--	--	--	--	--	--	--
08/04/97	99.57	86.72	12.85	--	--	79,000	14,000	8,400	2,300	9,900	6,900	--	--
11/25/97	99.57	85.71	13.86	--	--	--	--	--	--	--	--	--	--
02/25/98	99.57	82.55	17.02	--	--	34,000	5,200	2,200	1,200	4,400	5,000/5,300 ⁷	--	--
05/21/98	99.57	88.40	11.17	--	--	--	--	--	--	--	--	--	--
08/19/98	99.57	80.79	18.78	--	--	--	--	--	--	--	--	--	--
11/19/98	99.57	81.22	18.35	--	--	16,000	1,200	<100	690	1,200	540	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-11 (cont)													
02/12/99	99.57	88.15	11.42	--	--	4,200	580	41	220	470	<50	--	--
05/10/99	99.57	87.01	12.56	--	--	--	--	--	--	--	--	--	--
09/02/99	99.57	84.83	14.74	--	--	5,150	496	43.6	150	405	<250	--	--
02/03/00	99.57	87.23	12.34	--	--	14,000	3,400	150	860	1,500	<250	--	--
05/09/00 ¹⁵	99.57	87.24	12.33	0.00	0.00	--	--	--	--	--	--	--	--
08/02/00 ¹⁵	99.57	85.52	14.05	0.00	0.00	7,100 ⁸	2,900	61	<20	1,200	<100	--	--
11/09-10/00 ¹⁵	99.57	84.85	14.72	0.00	0.00	--	--	--	--	--	--	--	--
02/08/01 ¹⁵	99.57	84.68	14.89	0.00	0.00	18,100 ¹¹	4,300	146	743	819	<250	--	--
05/02/01 ¹⁵	99.57	83.82	15.75	0.00	0.00	--	--	--	--	--	--	--	--
08/28/01 ¹⁵	99.57	82.55	17.02	0.00	0.00	2,900 ¹³	600	35	120	91	100	--	--
11/26/01 ¹⁵	99.57	84.90	14.67	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/22/02 ¹⁵	99.57	88.00	11.57	0.00	0.00	7,700	710	61	370	500	<20	--	--
05/24/02 ¹⁵	99.57	84.81	14.76	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/02 ¹⁵	99.57	84.41	15.16	0.00	0.00	14,000	1,300	82	630	910	<20	--	--
11/29/02 ¹⁵	99.57	84.82	14.75	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/28/03	99.57	87.97	11.60	0.00	0.00	5,100	600	95	150	390	<50	--	--
05/30/03	99.57	87.17	12.40	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/22/03 ¹⁷	99.57	85.14	14.43	0.00	0.00	25,000	3,000	980	1,200	2,000	7	--	--
11/24-25/03	99.57	84.52	15.05	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/27/04 ¹⁷	99.57	89.79	9.78	0.00	0.00	10,000	970	570	430	1,100	1	--	--
06/21/04	99.57	85.51	14.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/26/04 ¹⁷	99.57	84.44	15.13	0.00	0.00	22,000	1,500	790	1,000	2,200	4	--	--
11/29/04	99.57	84.75	14.82	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/11/05 ¹⁷	99.57	87.59	11.98	0.00	0.00	18,000	830	310	680	1,500	1	--	--
06/16/05	99.57	87.86	11.71	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/31/05 ¹⁷	99.57	85.99	13.58	0.00	0.00	20,000	1,200	740	1,100	1,800	4	--	--
11/30/05	99.57	85.51	14.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/27/06 ¹⁷	99.57	88.27	11.30	0.00	0.00	18,000	700	340	770	1,300	8	--	--
05/30-31/06 ^{17,19}	99.57	89.12	10.45	0.00	0.00	13,000	620	270	700	1,000	7	--	--
08/29/06 ¹⁷	99.57	86.78	12.79	0.00	0.00	12,000	540	210	600	560	14	--	--
12/13/06 ¹⁷	99.57	87.50	12.07	0.00	0.00	13,000	1,100	180	710	490	22	--	--
02/28/07	DISCONTINUED FROM MONITORING/SAMPLING											--	--
05/30/07 ^{17,18}	99.57	87.52	12.05	0.00	0.00	15,000	720	180	1,100	910	12	--	--
08/29/07 ¹⁷	99.57	-- ²¹	-- ²¹	--	--	13,000	500	370	640	960	22	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-11 (cont)													
11/21/07 ^{17,18}	101.90	88.60	13.30	0.00	0.00	9,700	380	110	410	830	43	--	--
02/20/08	101.90	CONNECTED TO REMEDIATION SYSTEM				--	--	--	--	--	--	--	--
05/21/08 ^{15,17,18}	101.90	89.52	12.38	0.00	0.00	4,400 ²²	94	44	150	200	4	--	--
06/24/08 ^{15,17,18}	NP	101.90	89.14	12.76	0.00	4,500	140	30	280	250	9	--	--
08/22/08 ^{15,17,18}	NP	101.90	78.00	23.90	0.00	3,900 ²²	230	42	33	260	36	--	--
MW-12													
06/28/89	--	85.54	14.10	--	--	55,000	30,000	21,000	2,900	19,000	--	--	--
10/03/89	--	85.34	14.30	--	--	170,000	30,000	23,000	2,700	15,000	--	--	--
01/04/90	99.64	85.29	14.35	--	--	110,000	24,000	19,000	2,300	12,000	--	--	--
04/03/90	99.64	86.05	13.59	--	--	89,000	41,000	28,000	3,300	17,000	--	--	--
07/03/90	99.64	85.87	13.77	--	--	170,000	27,000	20,000	2,200	12,000	--	--	--
11/06/90	99.64	84.45	15.19	0.06	--	110,000	28,000	21,000	2,400	14,000	--	--	--
01/04/91	99.64	--	14.52	--	--	--	--	--	--	--	--	--	--
04/03/91	99.64	--	10.91	--	--	--	--	--	--	--	--	--	--
04/09/91	99.64	--	--	--	--	170,000	39,000	17,000	2,400	14,000	--	--	--
07/02/91	99.64	--	13.51	--	--	--	--	--	--	--	--	--	--
10/02/91	99.64	--	14.93	--	--	170,000	27,000	15,000	2,600	17,000	--	--	--
01/02/92	99.64	85.19	14.45	--	--	--	--	--	--	--	--	--	--
04/07/92	99.64	86.59	13.05	--	--	--	--	--	--	--	--	--	--
08/13/92	99.22	81.83	17.39	--	--	--	--	--	--	--	--	--	--
12/03/92	99.22	83.88	15.34	--	--	2,400,000	19,000	21,000	14,000	110,000	--	--	--
03/25/93	99.22	88.85	10.37	--	--	--	--	--	--	--	--	--	--
06/23/93	99.22	87.01	12.21	--	--	110,000	30,000	19,000	2,000	12,000	--	--	--
03/08/94	99.22	87.27	11.95	--	--	--	--	--	--	--	--	--	--
06/13/94	99.22	86.87	12.35	--	--	62,000	6,600	6,900	2,400	9,900	--	--	--
10/04/94	99.22	INACCESSIBLE ³		--	--	--	--	--	--	--	--	--	--
11/14/94	99.22	INACCESSIBLE ³		--	--	--	--	--	--	--	--	--	--
05/15/95	99.22	89.16	10.06	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.22	87.62	11.60	--	--	--	--	--	--	--	--	--	--
11/28/95	99.22	82.59	16.63	--	--	110,000	26,000	22,000	2,300	12,000	1,100	--	--
02/20/96	99.22	88.12	11.10	--	--	SAMPLED SEMI-ANNUALLY				--	--	--	--
05/29/96	99.22	87.74	11.48	--	--	120,000	18,000	18,000	2,000	11,000	710	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-12 (cont)													
08/27/96	99.22	86.72	12.50	--	--	--	--	--	--	--	--	--	--
11/22/96	99.22	86.30	12.92	--	--	160,000	24,000	22,000	1,900	11,000	980	--	--
02/18/97	99.22	90.02	9.20	--	--	--	--	--	--	--	--	--	--
05/23/97 ⁶	99.22	87.22	12.00	--	--	130,000	27,000	22,000	2,700	15,000	6,200	--	--
08/04/97	99.22	86.64	12.58	--	--	130,000	23,000	28,000	2,700	13,000	11,000	--	--
11/25/97	99.22	85.30	13.92	--	--	290,000 ⁵	53,000	31,000	6,400	30,000	35,000	--	--
02/25/98	99.22	81.01	18.21	--	--	--	--	--	--	--	--	--	--
05/21/98	99.22	88.04	11.18	--	--	150,000	14,000	16,000	1,800	250	66,000/69,000 ⁷	--	--
08/19/98	99.22	80.82	18.40	--	--	--	--	--	--	--	--	--	--
11/19/98	99.22	81.24	17.98	--	--	68,000	15,000	10,000	2,000	8,800	14,000	--	--
02/12/99	99.22	84.27	14.95	--	--	--	--	--	--	--	--	--	--
05/10/99	99.22	86.75	12.47	--	--	72,600	9,920	8,100	1,600	7,480	25,800/32,500 ⁷	--	--
09/02/99	99.22	85.37	13.85	--	--	--	--	--	--	--	--	--	--
2/3/000	99.22	86.77	12.45	--	--	--	--	--	--	--	--	--	--
05/09/00 ¹⁵	99.22	86.96	12.26	0.00	0.00	27,000 ⁸	7,800	4,000	<100	6,600	6,100	--	--
08/02/00 ¹⁵	99.22	85.37	13.85	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/09-10/00 ¹⁵	99.22	84.73	14.49	0.00	0.00	46,400	9,550	5,470	1,240	7,660	5,150	--	--
02/08/01 ¹⁵	99.22	84.43	14.79	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01 ¹⁵	99.22	83.49	15.73	0.00	0.00	94,000	8,720	3,630	<2,500	8,800	3,410	--	--
08/28/01 ¹⁵	99.22	82.16	17.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/26/01 ¹⁵	99.22	84.27	14.95	0.00	0.00	5,000	770	72	150	470	230	--	--
02/22/02 ¹⁵	99.22	87.43	11.79	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/24/02 ¹⁵	99.22	84.42	14.80	0.00	0.00	52,000	5,200	4,500	1,800	8,300	990	--	--
08/29/02 ¹⁵	99.22	84.24	14.98	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/02	99.22	84.69	14.53	0.00	0.00	40,000	4,900	3,800	1,100	7,000	1,000	--	--
02/28/03	99.22	87.81	11.41	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30/03 ¹⁷	99.22	86.97	12.25	0.00	0.00	46,000	4,300	3,100	1,400	7,500	670	--	--
08/22/03	99.22	85.16	14.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/24-25/03 ¹⁷	99.22	84.62	14.60	0.00	0.00	45,000	5,200	3,100	1,400	8,400	480	--	--
02/27/04	99.22	88.16	11.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/21/04 ¹⁷	99.22	85.39	13.83	0.00	0.00	53,000	6,100	5,400	1,800	11,000	370	--	--
08/26/04	99.22	85.30	13.92	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/29/04 ¹⁷	99.22	85.70	13.52	0.00	0.00	62,000	7,300	5,700	1,600	12,000	370	--	--
02/11/05	99.22	88.35	10.87	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-12 (cont)													
06/16/05 ¹⁷	99.22	88.20	11.02	0.00	0.00	49,000	3,400	4,100	1,600	7,900	180	--	--
08/31/05	99.22	86.76	12.46	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
11/30/05	99.22	UNABLE TO LOCATE		--	--	--	--	--	--	--	--	--	--
02/27/06	99.22	88.26	10.96	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
05/30-31/06 ^{17,19}	99.22	89.05	10.17	0.00	0.00	54,000	3,800	4,900	1,900	6,400	230	--	--
08/29/06 ¹⁷	99.22	86.83	12.39	0.00	0.00	63,000	3,300	4,900	1,400	5,900	210	--	--
12/13/06 ¹⁷	99.22	87.27	11.95	0.00	0.00	70,000	6,200	10,000	1,900	8,600	230	--	--
02/28/07	DISCONTINUED FROM MONITORING/SAMPLING											--	--
05/30/07 ^{17,18}	99.22	87.42	11.80	0.00	0.00	71,000	3,500	6,700	1,500	5,900	150	--	--
08/29/07 ¹⁷	99.22	-- ²¹	-- ²¹	--	--	58,000	5,200	8,800	1,500	7,400	120	--	--
11/21/07 ^{17,18}	101.65	88.32	13.33	0.00	0.00	30,000	5,000	4,400	720	4,200	45	--	--
02/20/08	101.65	CONNECTED TO REMEDIATION SYSTEM				--	--	--	--	--	--	--	--
05/21/08 ^{15,17,18}	101.65	89.47	12.18	0.00	0.00	37,000 ²²	5,300	6,100	1,100	6,700	36	--	--
06/24/08 ^{15,17,18}	NP	101.65	89.11	12.54	0.00	24,000	6,700	7,600	1,300	6,900	80	--	--
08/22/08 ^{15,17,18}	NP	101.65	77.41	24.24	0.00	29,000 ²²	3,200	5,100	360	5,700	38	--	--
MW-13													
06/28/89	--	85.25	13.22	--	--	54,000	12,000	10,000	1,900	15,000	--	--	--
10/03/89	--	84.93	13.54	--	--	120,000	10,000	10,000	2,300	15,000	--	--	--
01/04/90	98.47	84.83	13.64	--	--	87,000	6,800	10,000	2,000	12,000	--	--	--
04/03/90	98.47	85.52	12.95	--	--	53,000	12,000	14,000	2,900	17,000	--	--	--
07/03/90	98.47	85.42	13.05	--	--	90,000	8,400	11,000	2,000	11,000	--	--	--
11/06/90	98.47	84.35	14.12	--	--	--	--	--	--	--	--	--	--
01/04/91	98.47	84.42	14.05	--	--	72,000	5,500	12,000	2,300	12,000	--	--	--
04/03/91	98.47	87.06	11.41	--	--	--	--	--	--	--	--	--	--
07/02/91	98.47	85.30	13.17	--	--	120,000	12,000	13,000	2,500	14,000	--	--	--
10/02/91	98.47	84.23	14.24	--	--	--	--	--	--	--	--	--	--
01/02/92	98.47	84.34	14.13	0.03	--	--	--	--	--	--	--	--	--
04/07/92	98.47	85.41	13.06	--	--	--	--	--	--	--	--	--	--
08/13/92	98.47	84.21	14.26	--	--	84,000	7,400	11,000	2,600	13,000	--	--	--
12/03/92	98.47	83.65	14.82	--	--	--	--	--	--	--	--	--	--
03/25/93	98.47	87.74	10.73	--	--	97,000	5,200	2,500	7,200	12,000	--	--	--
06/23/93	98.47	86.50	11.97	--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-13 (cont)													
09/21/93	98.47	85.39	13.08	--	--	80,000	7,600	9,000	2,900	14,000	--	--	--
12/02/93	98.47	85.02	13.45	--	--	--	--	--	--	--	--	--	--
03/08/94	98.47	86.72	11.75	--	--	78,000	5,300	7,600	2,600	10,000	--	--	--
06/13/94	98.47	86.17	12.30	--	--	--	--	--	--	--	--	--	--
10/04/94	98.47	84.29	14.18	--	--	39,000	2,300	2,700	850	4,600	--	--	--
11/14/94	98.47	85.85	12.62	--	--	--	--	--	--	--	--	--	--
05/15/95	98.47	88.54	9.93	--	--	--	--	--	--	--	--	--	--
08/04/95	98.47	87.39	11.08	--	--	47,000	7,700	10,000	2,900	10,000	--	--	--
11/28/95	98.47	85.52	12.95	--	--	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/20/96	98.47	88.61	9.86	--	--	59,000	5,500	5,500	2,900	8,800	<120	--	--
05/29/96	98.47	88.17	10.30	--	--	--	--	--	--	--	--	--	--
08/27/96	98.47	86.50	11.97	--	--	65,000	3,500	2,800	2,200	6,900	200	--	--
11/22/96	98.47	86.76	11.71	--	--	--	--	--	--	--	--	--	--
02/18/97	98.47	89.31	9.16	--	--	69,000	4,500	4,100	2,500	7,900	310	--	--
05/23/97	98.47	86.91	11.56	--	--	--	--	--	--	--	--	--	--
08/04/97	98.47	86.32	12.15	--	--	61,000	5,700	5,100	3,600	9,200	230	--	--
11/25/97	98.47	85.35	13.12	--	--	--	--	--	--	--	--	--	--
02/25/98	98.47	87.96	10.51	--	--	42,000	3,800	1,000	2,000	5,000	<250	--	--
05/21/98	98.47	89.12	9.35	--	--	--	--	--	--	--	--	--	--
08/19/98	98.47	84.47	14.00	--	--	57,000	1,600	440	1,900	4,500	<250	--	--
11/19/98	98.47	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--
02/12/99	98.47	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--
03/26/99	98.47	89.17	9.30	--	--	30,800	473	101	1,430	2,800	106	--	--
05/10/99	98.47	87.74	10.73	--	--	--	--	--	--	--	--	--	--
09/02/99	98.47	87.48	10.99	--	--	87,000	2,610	19,100	1,510	12,000	<2,500	--	--
02/03/00	98.47	88.02	10.45	--	--	2,900	200	16	200	340	68	--	--
05/09/00	98.47	87.95	10.52	0.00	0.00	--	--	--	--	--	--	--	--
08/02/00	98.47	86.69	11.78	0.00	0.00	1,600 ⁸	15	4.1	7.3	160	<13	--	--
11/09-10/00	98.47	86.18	12.29	0.00	0.00	--	--	--	--	--	--	--	--
02/08/01	98.47	85.76	12.71	0.00	0.00	--	--	--	--	--	--	--	--
05/02/01	98.47	84.98	13.49	0.00	0.00	--	--	--	--	--	--	--	--
08/28/01	98.47	DRY		--	--	--	--	--	--	--	--	--	--
11/26/01	98.47	DRY		--	--	--	--	--	--	--	--	--	--
02/22/02	98.47	INACCESSIBLE - CAR PARKED OVER WELL				--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-13 (cont)													
05/24/02	98.47	86.06	12.41	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/02	98.47	85.57	12.90	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER			--	--	--	--	--
11/29/02	98.47	85.86	12.61	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/28/03	98.47	88.48	9.99	0.00	0.00	340	<5.0	0.94	0.52	5.0	<10	--	--
05/30/03	98.47	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
08/22/03 ^{17,18}	98.47	86.47	12.00	0.00	0.00	770	10	2	8	2	<0.5	--	--
11/24-25/03	98.47	85.85	12.62	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/27/04 ¹⁷	98.47	87.94	10.53	0.00	0.00	2,300	27	7	14	10	<0.5	--	--
06/21/04	98.47	86.24	12.23	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/26/04	98.47	85.25	13.22	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER			--	--	--	--	--
11/29/04	98.47	DRY AT 13.50 FEET		--	--	--	--	--	--	--	--	--	--
02/11/05	98.47	85.63	12.84	0.00	0.00	NOT SAMPLED DUE TO INSUFFICIENT WATER			--	--	--	--	--
06/16/05	98.47	88.28	10.19	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/31/05	98.47	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
11/30/05	98.47	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
02/27/06	98.47	INACCESSIBLE - UNABLE TO LOCATE					--	--	--	--	--	--	--
05/30-31/06	98.47	UNABLE TO LOCATE		--	--	--	--	--	--	--	--	--	--
08/29/06	98.47	UNABLE TO LOCATE		--	--	--	--	--	--	--	--	--	--
12/13/06	98.47	86.66	11.81	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/28/07 ¹⁷	98.47	88.36	10.11	0.00	0.00	14,000	31	100	720	1,100	<3	--	--
05/30/07	98.47	86.83	11.64	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/07 ¹⁷	98.47	85.49	12.98	0.00	0.00	14,000	41	380	810	1,300	<1	--	--
11/21/07	98.47	85.40	13.07	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/20/08 ¹⁷	98.47	88.12	10.35	0.00	0.00	2,800	4	8	95	130	<0.5	--	--
05/21/08	98.47	86.21	12.26	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/24/08	98.47	86.09	12.38	0.00	0.00	--	--	--	--	--	--	--	--
08/22/08 ¹⁷	98.47	84.27	14.20	0.00	0.00	7,500 ²⁴	5	26	380	400	<0.5	--	--
MW-14													
08/29/90	--	78.29	21.39	--	--	970	4.0	2.0	0.7	2.0	--	--	1.0
11/06/90	--	78.06	21.62	--	--	920	10	10	4.0	9.0	--	--	--
01/04/91	99.68	77.99	21.69	--	--	1,000	<0.5	4.0	2.6	4.2	--	--	--
04/03/91	99.68	80.15	19.53	--	--	1,200	380	6.0	7.0	18	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-14 (cont)													
07/02/91	99.68	78.75	20.93	--	--	460	27	1.0	1.2	1.0	--	--	--
10/02/91	99.68	78.16	21.52	--	--	480	6.7	0.8	1.4	1.8	--	--	--
01/02/92	99.68	78.25	21.43	--	--	1,100	2.4	1.5	6.2	18	--	--	--
04/07/92	99.68	78.32	21.36	--	--	290	<0.5	1.4	<0.5	1.2	--	--	--
08/13/92	99.68	78.61	21.07	--	--	370	10	1.2	<0.5	0.9	--	--	--
12/03/92	99.68	78.01	21.67	--	--	230	1.3	<0.5	<0.5	<0.5	--	--	--
03/25/93	99.68	80.65	19.03	--	--	390	57	2.1	1.3	1.7	--	--	--
06/23/93	99.68	79.74	19.94	--	--	4,400	460	220	16	62	--	--	--
09/21/93	99.68	79.03	20.65	--	--	680	8.7	1.7	3.2	12	--	--	--
12/02/93	99.68	78.63	21.05	--	--	900	0.8	7.0	3.0	7.0	--	--	--
03/08/94	99.68	79.63	20.05	--	--	1,700	2.4	7.7	5.6	14	--	--	--
06/13/94	99.68	79.47	20.21	--	--	750	0.8	8.0	3.2	5.7	--	--	--
10/04/94	99.68	78.98	20.70	--	--	130	3.4	5.4	<0.5	2.0	--	--	--
11/14/94	99.68	79.68	20.00	--	--	9,900	620	1,600	120	920	--	--	--
05/15/95	99.68	81.19	18.49	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	99.68	80.30	19.38	--	--	1,000	170	58	6.6	20	--	--	--
11/28/95	99.68	79.35	20.33	--	--	1,500	300	72	65	190	<6.0	--	--
02/20/96	99.68	82.72	16.96	--	--	70	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	99.68	81.10	18.58	--	--	1,600	170	39	5.0	21	6.3	--	--
08/27/96	99.68	79.89	19.79	--	--	80	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	99.68	80.13	19.55	--	--	620	49	13	7.2	22	210	--	--
02/18/97	99.68	82.37	17.31	--	--	190	14	9.6	3.1	15	<5.0	--	--
05/23/97	99.68	80.12	19.56	--	--	130	18	16	3.4	17	<5.0	--	--
08/04/97	99.68	79.80	19.88	--	--	200	8.3	7.9	4.1	10	<5.0	--	--
11/25/97	99.68	79.91	19.77	--	--	530	42	62	10	37	<5.0	--	--
02/25/98	99.68	85.40	14.28	--	--	220	26	10	7.0	22	23	--	--
05/21/98	99.68	81.90	17.78	--	--	8,300	1,400	48	29	59	<50	--	--
08/19/98	99.68	80.35	19.33	--	--	7,900	610	390	51	300	<250	--	--
11/19/98	99.68	79.40	20.28	--	--	87	1.0	<0.5	<0.5	<0.5	27	--	--
02/12/99	99.68	81.36	18.32	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/10/99	99.68	80.57	19.11	--	--	1,930	254	41.2	6.71	23	76.4/<5.0 ⁷	--	--
09/02/99	99.68	79.57	20.11	--	--	647	38.1	1.45	<0.5	1.32	10.8	--	--
02/03/00	99.68	80.80	18.88	--	--	UNABLE TO SAMPLE			--	--	--	--	--
05/09/00	99.68	80.99	18.69	0.00	0.00	370 ⁹	9.7	2.2	1.3	1.5	13	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-14 (cont)													
08/02/00	99.68	79.99	19.69	0.00	0.00	80 ¹⁰	1.2	1.8	0.85	1.2	3.1	--	--
11/09-10/00	99.68	79.49	20.19	0.00	0.00	92.3	<0.500	0.921	<0.500	<0.500	<2.50	--	--
02/08/01	99.68	79.01	20.67	0.00	0.00	728 ¹¹	33.7	<5.00	<5.00	<5.00	<25.0	--	--
05/02/01	99.68	79.68	20.00	0.00	0.00	338	3.28	<5.00	<5.00	<5.00	1.35	--	--
08/28/01	99.68	79.06	20.62	0.00	0.00	83 ¹⁴	1.7	0.64	<0.50	<0.50	2.6	--	--
11/26/01	99.68	79.13	20.55	0.00	0.00	240	2.8	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	99.68	80.41	19.27	0.00	0.00	4,000	460	140	55	51	<20	--	--
05/24/02	99.68	79.98	19.70	0.00	0.00	5,800	580	360	61	340	<20	--	--
08/29/02	99.68	79.16	20.52	0.00	0.00	360	14	0.98	<0.50	2.3	<2.5	--	--
11/29/02	99.68	78.98	20.70	0.00	0.00	1,400	32	1.8	0.62	2.6	<2.5	--	--
02/28/03	99.68	80.41	19.27	0.00	0.00	320	<5.0	0.64	<0.50	<1.5	<10	--	--
05/30/03 ¹⁷	99.68	80.58	19.10	0.00	0.00	560	150	7	4	8	<0.5	--	--
08/22/03 ¹⁷	99.68	79.96	19.72	0.00	0.00	690	<0.5	<0.5	<0.5	0.6	<0.5	--	--
11/24-25/03 ¹⁷	99.68	79.10	20.58	0.00	0.00	52	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	99.68	80.48	19.20	0.00	0.00	330	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/21/04 ¹⁷	99.68	79.66	20.02	0.00	0.00	<50	1	<0.5	<0.5	1	<0.5	--	--
08/26/04 ¹⁷	99.68	79.08	20.60	0.00	0.00	160	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/29/04 ¹⁷	99.68	79.16	20.52	0.00	0.00	57	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/11/05 ¹⁷	99.68	80.10	19.58	0.00	0.00	160	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/16/05 ¹⁷	99.68	80.94	18.74	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/31/05 ¹⁷	99.68	80.05	19.63	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/30/05	99.68	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
02/27/06	99.68	INACCESSIBLE - WELL BOX FLOODED					--	--	--	--	--	--	--
05/30-31/06 ¹⁷	99.68	81.57	18.11	0.00	0.00	630	41	17	9	21	<0.5	--	--
08/29/06 ¹⁷	99.68	80.34	19.34	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
12/13/06 ¹⁷	99.68	80.50	19.18	0.00	0.00	97	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/28/07 ¹⁷	99.68	81.30	18.38	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30/07 ¹⁷	99.68	79.77	19.91	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/07 ¹⁷	99.68	79.39	20.29	0.00	0.00	<50	<0.5	<0.5	0.8	1	<0.5	--	--
11/21/07 ¹⁷	101.99	81.51	20.48	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/20/08 ¹⁷	101.99	83.35	18.64	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/21/08 ¹⁷	101.99	82.23	19.76	0.00	0.00	52 ²²	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/24/08 ¹⁷	101.99	82.02	19.97	0.00	0.00	<50	<0.5	3	0.7	4	<0.5	--	--
08/22/08 ¹⁷	101.99	81.68	20.31	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-15													
08/29/90	--	79.48	16.58	--	--	2,000	26	2.0	72	110	--	--	--
11/06/90	--	78.63	17.43	--	--	1,300	40	5.0	45	63	--	--	--
01/04/91	96.06	79.69	16.37	--	--	1,700	46	2.8	58	86	--	--	--
04/03/91	96.06	83.60	12.46	--	--	2,100	74	0.8	44	85	--	--	--
07/02/91	96.06	79.53	16.53	--	--	1,700	39	<0.5	35	46	--	--	--
10/02/91	96.06	78.73	17.33	--	--	1,100	50	<0.5	40	33	--	--	--
01/02/92	96.06	79.60	16.46	--	--	1,300	51	<0.5	30	30	--	--	--
04/07/92	96.06	81.36	14.70	--	--	2,600	98	<5.0	64	36	--	--	--
08/13/92	96.06	79.34	16.72	--	--	510	55	<0.5	35	2.8	--	--	--
12/03/92	96.06	78.63	17.43	--	--	1,000	64	0.9	22	4.4	--	--	--
03/25/93	96.06	82.73	13.33	--	--	1,300	86	52	0.7	7.7	--	--	--
06/23/93	96.06	80.83	15.23	--	--	7,300	34	<0.5	85	160	--	--	--
09/21/93	96.06	79.74	16.32	--	--	1,500	39	<0.5	32	33	--	--	--
12/02/93	96.06	79.49	16.57	--	--	990	28	4.0	8.0	10	--	--	--
03/08/94	96.06	81.45	14.61	--	--	3,400	44	4.0	28	53	--	--	--
10/04/94	96.06	79.58	16.48	--	--	310	11	10	2.2	12	--	--	--
11/14/94	96.06	81.86	14.20	--	--	450	27	2.4	2.2	4.2	--	--	--
05/15/95	96.06	82.68	13.38	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	96.06	81.15	14.91	--	--	<50	0.6	<0.5	<0.5	0.8	--	--	--
11/28/95	96.06	79.94	16.12	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.60	--	--
02/20/96	96.06	85.08	10.98	--	--	1,600	25	0.5	20	38	16	--	--
05/29/96 ⁴	96.06	--	--	--	--	--	--	--	--	--	--	--	--
08/27/96	96.06	80.62	15.44	--	--	80	<0.5	<0.5	<0.5	0.7	<5.0	--	--
11/22/96	96.06	81.57	14.49	--	--	1,500	14	<0.5	6.1	12	7.2	--	--
02/18/97	96.06	83.89	12.17	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/23/97	96.06	81.03	15.03	--	--	130	20	9.7	0.9	1.5	<5.0	--	--
08/04/97	96.06	80.58	15.48	--	--	60	1.3	<0.5	<0.5	1.1	<5.0	--	--
11/25/97	96.06	80.67	15.39	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	96.06	89.53	6.53	--	--	4,300	27	<10	37	46	<50	--	--
05/21/98	96.06	83.09	12.97	--	--	430	25	<0.5	2.3	1.2	<2.5	--	--
08/19/98	96.06	81.16	14.90	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	96.06	80.01	16.05	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	96.06	INACCESSIBLE		--	--	--	--	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-15 (cont)													
05/10/99	96.06	81.67	14.39	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0/<2.0 ⁷	--	--
09/02/99	96.06	80.53	15.53	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	96.06	83.82	12.24	--	--	480	2.5	<1.0	2.6	1.4	<5.0	--	--
05/09/00	96.06	82.41	13.65	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
08/02/00	96.06	81.04	15.02	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/09-10/00	96.06	80.54	15.52	0.00	0.00	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--
02/08/01	96.06	80.36	15.70	0.00	0.00	92.6 ¹¹	0.894	<0.500	<0.500	<0.500	<2.50	--	--
05/02/01	96.06	81.44	14.62	0.00	0.00	<50.0 ¹²	0.830	<5.00	<5.00	5.94	<0.500	--	--
08/28/01	96.06	80.15	15.91	0.00	0.00	<50	<0.50	0.71	<0.50	<0.50	<2.5	--	--
11/26/01	96.06	80.65	15.41	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	96.06	82.51	13.55	0.00	0.00	99	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/24/02	96.06	81.45	14.61	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
08/29/02	96.06	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
11/29/02	96.06	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
02/28/03	96.06	81.80	14.26	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03 ¹⁷	96.06	81.86	14.20	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ¹⁷	96.06	81.00	15.06	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03	96.06	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
02/27/04 ¹⁷	96.06	85.59	10.47	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/21/04 ¹⁷	96.06	80.88	15.18	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/26/04 ¹⁷	96.06	80.74	15.32	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/29/04 ¹⁷	96.06	80.58	15.48	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/11/05 ¹⁷	96.06	82.17	13.89	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/16/05 ¹⁷	96.06	82.11	13.95	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/31/05	96.06	INACCESSIBLE - VEHICLE PARKED OVER WELL					--	--	--	--	--	--	--
11/30/05 ¹⁷	96.06	80.34	15.72	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/06 ¹⁷	96.06	82.57	13.49	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30-31/06 ¹⁷	96.06	83.08	12.98	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/06 ¹⁷	96.06	81.51	14.55	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
12/13/06 ¹⁷	96.06	82.38	13.68	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/28/07 ¹⁷	96.06	83.98	12.08	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30/07 ¹⁷	96.06	80.82	15.24	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/07 ¹⁷	96.06	80.35	15.71	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/21/07 ¹⁷	98.28	82.49	15.79	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-15 (cont)													
02/20/08 ¹⁷	98.28	85.03	13.25	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/21/08 ¹⁷	98.28	82.93	15.35	0.00	0.00	<50 ²²	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/24/08 ¹⁷	98.28	82.68	15.60	0.00	0.00	<50	<0.5	6	2	10	<0.5	--	--
08/22/08 ¹⁷	98.28	82.17	16.11	0.00	0.00	<50 ²²	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
MW-16													
08/29/90	--	77.26	20.89	--	--	11,000	6,000	51	1,100	20	--	--	--
11/06/90	--	76.88	21.27	--	--	15,000	6,300	340	1,300	540	--	--	--
01/04/91	98.15	76.52	21.63	--	--	16,000	6,800	820	1,300	1,500	--	--	--
04/03/91	98.15	78.83	19.32	--	--	45,000	7,300	2,200	1,800	4,900	--	--	--
07/02/91	98.15	77.47	20.68	--	--	30,000	6,400	530	1,500	1,800	--	--	--
10/02/91	98.15	76.97	21.18	--	--	24,000	4,600	450	1,400	1,600	--	--	--
01/02/92	98.15	76.85	21.30	--	--	20,000	4,700	240	1,200	1,100	--	--	--
04/07/92	98.15	77.96	20.19	--	--	40,000	5,000	980	1,100	2,100	--	--	--
08/13/92	98.15	77.38	20.77	--	--	17,000	4,500	240	860	530	--	--	--
12/03/92	98.15	76.71	21.44	--	--	39,000	4,600	410	1,100	2,200	--	--	--
03/25/93	98.15	79.32	18.83	--	--	39,000	5,500	1,400	690	2,000	--	--	--
06/23/93	98.15	78.43	19.72	--	--	29,000	6,600	1,200	1,400	3,700	--	--	--
09/21/93	98.15	77.77	20.38	--	--	36,000	6,300	340	1,200	1,800	--	--	--
12/02/93	98.15	77.31	20.84	--	--	28,000	5,600	230	900	820	--	--	--
03/08/94	98.15	77.88	20.27	--	--	35,000	6,500	760	1,000	1,300	--	--	--
10/04/94	98.15	77.57	20.58	--	--	39,000	9,700	680	1,300	3,300	--	--	--
11/14/94	98.15	78.03	20.12	--	--	26,000	5,500	640	690	1,800	--	--	--
05/15/95	98.15	79.99	18.16	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	98.15	78.85	19.30	--	--	23,000	6,200	1,900	1,500	4,500	--	--	--
11/28/95	98.15	77.73	20.42	--	--	38,000	6,200	1,700	1,800	5,700	<120	--	--
02/20/96	98.15	81.75	16.40	--	--	46,000	6,600	2,200	2,400	7,300	<250	--	--
05/29/96	98.15	79.61	18.54	--	--	54,000	6,300	1,600	2,200	7,900	<250	--	--
08/27/96	98.15	78.73	19.42	--	--	45,000	4,100	260	1,600	2,800	<250	--	--
11/22/96	98.15	78.79	19.36	--	--	36,000	3,500	120	1,400	1,500	260	--	--
02/18/97	98.15	80.93	17.22	--	--	62,000	5,800	1,300	2,200	8,900	160	--	--
05/23/97	98.15	78.67	19.48	--	--	32,000	4,000	370	1,900	2,900	<250	--	--
08/04/97	98.15	78.43	19.72	--	--	26,000	3,300	280	2,100	1,500	200	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-16 (cont)													
11/25/97	98.15	78.42	19.73	--	--	38,000	3,900	370	2,400	3,000	250	--	--
02/25/98	98.15	84.13	14.02	--	--	60,000	6,400	1,400	2,200	13,000	<1,000	--	--
05/21/98	98.15	80.24	17.91	--	--	71,000	5,100	1,200	2,300	8,200	560	--	--
08/19/98	98.15	78.90	19.25	--	--	40,000	2,300	740	1,700	2,700	<250	--	--
11/19/98	98.15	77.85	20.30	--	--	51,000	2,900	<200	2,200	6,300	<1,000	--	--
02/12/99	98.15	80.24	17.91	--	--	11,000	1,100	81	810	470	130	--	--
05/10/99	98.15	79.02	19.13	--	--	52,300	4,100	587	2,430	8,800	708/<66.7 ⁷	--	--
09/02/99	98.15	78.16	19.99	--	--	26,600	1,400	1,540	1,480	2,940	<500	--	--
02/03/00	98.15	79.50	18.65	--	--	47,000	5,600	620	3,000	14,000	450	--	--
05/09/00	99.15	80.58	18.57	0.00	0.00	15,000 ⁸	990	100	800	2,000	410	--	--
08/02/00	99.15	79.57	19.58	0.00	0.00	10,000 ⁸	1,100	95	1,000	2,300	<130	--	--
11/09-10/00	99.15	79.13	20.02	0.00	0.00	5,580	334	49.3	530	256	33.6	--	--
02/08/01	99.15	78.56	20.59	0.00	0.00	25,400 ¹¹	1,340	99.9	1,380	2,700	350	--	--
05/02/01	99.15	79.44	19.71	0.00	0.00	45,600	2,130	83.6	<2,500	7,460	13.3	--	--
08/28/01	99.15	INACCESSIBLE - PAVED OVER			--	--	--	--	--	--	--	--	--
11/26/01	99.15	INACCESSIBLE - PAVED OVER			--	--	--	--	--	--	--	--	--
02/22/02	99.15	80.05	19.10	0.00	0.00	32,000	1,300	110	1,800	6,100	<50	--	--
05/24/02	99.15	79.65	19.50	0.00	0.00	13,000	590	29	830	1,000	<20	--	--
08/29/02	99.15	78.94	20.21	0.00	0.00	9,800	500	28	670	430	<10	--	--
11/29/02	99.15	78.66	20.49	0.00	0.00	23,000	1,600	110	1,200	3,400	<10	--	--
02/28/03	99.15	79.97	19.18	0.00	0.00	20,000	1,300	90	1,000	3,300	<100	--	--
05/30/03 ¹⁷	99.15	80.34	18.81	0.00	0.00	47,000	2,100	160	2,000	8,100	<3	--	--
08/22/03 ¹⁷	99.15	79.59	19.56	0.00	0.00	25,000	1,300	94	1,200	3,200	2	--	--
11/24-25/03 ¹⁷	99.15	78.77	20.38	0.00	0.00	13,000	660	47	800	950	4	--	--
02/27/04 ¹⁷	99.15	82.32	16.83	0.00	0.00	20,000	1,000	70	1,000	3,100	3	--	--
06/21/04 ¹⁷	99.15	82.93	16.22	0.00	0.00	11,000	780	23	680	530	7	--	--
08/26/04 ¹⁷	99.15	78.90	20.25	0.00	0.00	7,600	540	16	450	100	8	--	--
11/29/04 ¹⁷	99.15	78.83	20.32	0.00	0.00	7,600	370	15	370	310	6	--	--
02/11/05 ¹⁷	99.15	79.77	19.38	0.00	0.00	42,000	1,800	120	1,800	6,900	3	--	--
06/16/05 ¹⁷	99.15	80.52	18.63	0.00	0.00	2,000	170	13	170	250	4	--	--
08/31/05 ¹⁷	99.15	79.72	19.43	0.00	0.00	30,000	1,800	100	1,800	5,700	3	--	--
11/30/05 ¹⁷	99.15	78.88	20.27	0.00	0.00	8,600	370	27	400	620	8	--	--
02/27/06 ¹⁷	99.15	80.22	18.93	0.00	0.00	4,600	110	9	120	220	7	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-16 (cont)													
05/30-31/06 ¹⁷	99.15	81.03	18.12	0.00	0.00	13,000	590	<1	860	1,400	3	--	--
08/29/06 ¹⁷	99.15	80.04	19.11	0.00	0.00	14,000	470	38	480	1,300	2	--	--
12/13/06 ¹⁷	99.15	80.08	19.07	0.00	0.00	17,000	590	43	860	1,600	5	--	--
02/28/07 ¹⁷	99.15	81.09	18.06	0.00	0.00	15,000	510	42	560	1,600	5	--	--
05/30/07 ¹⁷	99.15	79.51	19.64	0.00	0.00	11,000	440	25	470	510	7	--	--
08/29/07 ¹⁷	99.15	79.33	19.82	0.00	0.00	6,200	320	14	250	120	6.00	--	--
11/21/07 ¹⁷	100.56	80.45	20.11	0.00	0.00	5,900	410	17	260	35	13	--	--
02/20/08 ¹⁷	100.56	82.00	18.56	0.00	0.00	27,000	1,200	91	1,500	4,700	4	--	--
05/21/08 ¹⁷	100.56	81.11	19.45	0.00	0.00	17,000 ²²	920	58	1,200	2,800	7	--	--
06/24/08 ¹⁷	100.56	80.98	19.58	0.00	0.00	6,500	360	21	380	510	10	--	--
08/22/08 ¹⁷	100.56	80.61	19.95	0.00	0.00	12,000 ²⁵	260	10	320	330	10	--	--
MW-18													
08/04/97	--	--	16.60	--	--	66,000	8,600	6,100	2,800	12,000	190	--	--
11/25/97	--	--	16.22	--	--	90,000	8,500	6,000	3,400	14,000	1,200	--	--
02/25/98	--	--	12.75	--	--	60,000	6,600	4,000	2,300	11,000	<120	--	--
05/21/98	--	--	15.24	--	--	70,000	4,700	1,800	1,700	9,600	880	--	--
08/19/98	--	--	16.34	--	--	93,000	4,900	1,700	2,100	9,000	<250	--	--
11/19/98	--	--	17.15	--	--	62,000	5,600	2,300	2,700	12,000	1,800	--	--
02/12/99	--	--	16.08	--	--	48,000	3,700	2,400	1,900	8,800	1,900	--	--
05/10/99	--	--	14.98	--	--	54,700	3,250	1,770	1,900	7,570	1,270/<66.7 ⁷	--	--
09/02/99	--	--	15.86	--	--	34,400	2,120	1,230	1,420	5,460	<500	--	--
02/03/00	--	--	15.91	--	--	46,000	2,500	1,100	1,900	8,800	<1,000	--	--
05/09/00	--	--	13.93	0.00	0.00	30,000 ⁸	1,400	410	440	4,700	1,300	--	--
08/02/00	--	--	15.25	0.00	0.00	22,000 ⁸	1,200	480	1,400	5,800	<130	--	--
11/09-10/00	--	--	15.85	0.00	0.00	29,500	1,130	474	2,020	6,270	333	--	--
02/08/01	--	--	16.27	0.00	0.00	61,600 ¹¹	1,700	<500	2,690	8,110	<2,500	--	--
05/02/01	--	--	16.15	0.00	0.00	57,800	1,040	104	<2,500	6,670	20.1	--	--
08/28/01	--	--	17.03	0.00	0.00	32,000 ¹³	1,200	370	2,100	5,600	790	--	--
11/26/01	--	--	16.64	0.00	0.00	41,000	780	320	1,800	5,600	<200	--	--
02/22/02	--	--	14.93	0.00	0.00	44,000	950	270	1,300	3,900	<100	--	--
05/24/02	--	--	15.92	0.00	0.00	36,000	1,200	460	1,600	4,800	<50	--	--
08/29/02	--	--	16.56	0.00	0.00	37,000	970	520	1,900	4,800	<50	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-18 (cont)													
11/29/02	--	--	16.51	0.00	0.00	36,000	710	350	1,900	5,300	<20	--	--
02/28/03	--	--	14.53	0.00	0.00	19,000	350	130	270	2,500	<200	--	--
05/30/03 ¹⁷	--	--	14.56	0.00	0.00	29,000	390	110	890	2,700	<3	--	--
08/22/03 ¹⁷	--	--	14.70	0.00	0.00	17,000	270	67	600	1,700	<1	--	--
11/24-25/03 ¹⁷	--	--	16.39	0.00	0.00	23,000	320	39	980	2,100	<1	--	--
02/27/04 ¹⁷	--	--	13.77	0.00	0.00	18,000	200	29	310	1,400	<1	--	--
06/21/04 ¹⁷	--	--	15.55	0.00	0.00	30,000	380	40	1,700	2,800	<3	--	--
08/26/04 ¹⁷	--	--	16.69	0.00	0.00	25,000	360	27	1,100	1,800	<3	--	--
11/29/04 ¹⁷	--	--	16.45	0.00	0.00	27,000	380	30	1,200	1,900	<2	--	--
02/11/05 ¹⁷	--	--	14.48	0.00	0.00	26,000	450	44	1,600	2,500	<1	--	--
06/16/05	--	--	14.06	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/31/05 ¹⁷	--	--	15.08	0.00	0.00	27,000	440	57	1,900	2,400	<3	--	--
11/30/05	--	--	16.01	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/27/06 ¹⁷	--	--	13.63	0.00	0.00	31,000	440	81	1,500	1,900	<1	--	--
05/30-31/06	--	--	12.96	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/06 ¹⁷	--	--	14.85	0.00	0.00	28,000	270	49	1,600	1,500	<3	--	--
12/13/06	--	--	15.11	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/28/07 ¹⁷	--	--	13.37	0.00	0.00	27,000	280	61	1,400	1,400	<3	--	--
05/30/07	--	--	15.13	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
08/29/07 ¹⁷	--	--	16.14	0.00	0.00	26,000	200	42	1,700	1,600	<5	--	--
11/21/07	--	--	16.13	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
02/20/08 ¹⁷	--	--	12.83	0.00	0.00	24,000	190	44	1,700	1,700	<2	--	--
05/21/08	--	--	14.61	0.00	0.00	SAMPLED SEMI-ANNUALLY			--	--	--	--	--
06/24/08	--	--	15.55	0.00	0.00	--	--	--	--	--	--	--	--
08/22/08 ¹⁷	--	--	16.78	0.00	0.00	23,000	180	55	1,600	1,700	<1	--	--
MW-19													
05/30-31/06 ^{17,19}	--	--	10.68	0.00	0.00	3,100	94	170	59	310	100	--	--
08/29/06 ¹⁷	--	--	12.62	0.00	0.00	13,000	1,900	480	150	870	120	--	--
12/13/06 ¹⁷	--	--	12.26	0.00	0.00	8,800	1,600	100	18	360	88	--	--
02/28/07 ¹⁷	--	--	10.24	0.00	0.00	3,100	480	17	3	170	83	--	--
05/30/07	--	--	12.71	0.00	0.00	25,000	7,800	160	31	450	63	--	--
08/29/07 ¹⁷	--	--	14.02	0.00	0.00	25,000	8,900	170	34	390	56	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-19(cont)													
11/21/07 ¹⁷	--	--	13.81	0.00	0.00	13,000	6,100	120	21	270	60	--	--
02/20/08 ¹⁷	--	--	11.62	0.00	0.00	66	3	<0.5	<0.5	<0.5	29	--	--
05/21/08 ¹⁷	--	--	13.02	0.00	0.00	130 ²²	40	0.5	2	0.8	29	--	--
06/24/08 ¹⁷	--	--	13.40	0.00	0.00	700	730	12	39	7	31	--	--
08/22/08 ¹⁷	--	--	15.07	0.00	0.00	310	16	<0.5	1	0.7	11	--	--
P-1													
08/13/92	--	76.41	10.02	--	--	--	--	--	--	--	--	--	--
12/03/92	--	75.63	10.80	--	--	--	--	--	--	--	--	--	--
03/25/93	86.43	77.48	8.95	--	--	--	--	--	--	--	--	--	--
02/11/05 ¹⁹	86.43	77.23	9.20	0.00	0.00	110	4	0.6	<0.5	0.5	10	--	--
06/16/05 ¹⁷	86.43	78.06	8.37	0.00	0.00	53	<0.5	<0.5	<0.5	<0.5	7	--	--
08/31/05 ¹⁷	NP	86.43	77.48	8.95	0.00	<50	<0.5	<0.5	<0.5	<0.5	9	--	--
11/30/05 ¹⁷	86.43	76.57	9.86	0.00	0.00	60	<0.5	<0.5	<0.5	<0.5	13	--	--
02/27/06 ¹⁷	86.43	77.48	8.95	0.00	0.00	310	31	0.9	1	1	7	--	--
05/30-31/06 ¹⁷	NP	86.43	78.23	8.20	0.00	84	3	0.6	<0.5	0.7	4	--	--
08/29/06	86.43	INACCESSIBLE - UNABLE TO GET ACCESS				--	--	--	--	--	--	--	--
12/13/06 ¹⁷	86.43	77.30	9.13	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	5	--	--
02/28/07 ¹⁷	86.43	77.82	8.61	0.00	0.00	160	8	<0.5	<0.5	<0.5	8	--	--
05/30/07 ¹⁷	NP	86.43	77.23	9.20	0.00	<50	<0.5	0.6	<0.5	<0.5	6	--	--
08/29/07 ¹⁷	86.43	77.25	9.18	0.00	0.00	<50	<0.5	0.6	<0.5	<0.5	8	--	--
11/21/07	88.63	INACCESSIBLE - UNABLE TO ACCESS WELL				--	--	--	--	--	--	--	--
02/20/08 ¹⁷	88.63	80.10	8.53	0.00	0.00	53	<0.5	<0.5	<0.5	<0.5	8	--	--
05/21/08 ¹⁷	88.63	79.62	9.01	0.00	0.00	<50 ²²	<0.5	0.9	<0.5	<0.5	7	--	--
06/24/08 ¹⁷	88.63	79.55	9.08	0.00	0.00	<50	<0.5	0.6	<0.5	<0.5	8	--	--
08/22/08 ¹⁷	88.63	79.39	9.24	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	7	--	--
DVE-9													
05/30-31/06 ^{17,19}	--	--	11.09	0.00	0.00	54,000	2,700	9,100	1,800	7,700	190	--	--
08/29/06 ¹⁷	--	--	13.51	0.00	0.00	65,000	2,200	8,600	1,400	5,900	190	--	--
12/13/06 ¹⁷	--	--	12.60	0.00	0.00	73,000	3,400	12,000	2,100	8,700	140	--	--
02/28/07	DISCONTINUED FROM MONITORING/SAMPLING												--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
DVE-9 cont)													
05/30/07 ^{17,18}	--	--	12.21	0.00	0.00	80,000	2,100	14,000	2,300	9,800	51	--	--
08/29/07 ¹⁷	--	-- ²¹	-- ²¹	--	--	57,000	2,400	12,000	1,500	7,200	96	--	--
11/21/07 ^{17,18}	102.60	88.87	13.73	0.00	0.00	60,000	2,700	15,000	1,200	7,500	44	--	--
02/20/08 ²²	102.60	--	--	--	--	--	--	--	--	--	--	--	--
05/21/08 ^{15,17,18}	102.60	89.80	12.80	0.00	0.00	43,000 ²²	1,300	12,000	1,200	6,900	60	--	--
06/24/08 ^{15,17,18}	NP 102.60	89.38	13.22	0.00	0.00	15,000	1,200	13,000	1,300	7,100	44	--	--
08/22/08 ^{15,17,18}	NP 102.60	78.63	23.97	0.00	0.00	57,000	1,400	15,000	1,300	7,700	130	--	--
DVE-12													
05/30-31/06 ^{17,19}	--	--	9.93	0.00	0.00	110,000	5,900	20,000	2,100	11,000	210	--	--
08/29/06 ¹⁷	--	--	12.16	0.00	0.00	100,000	5,300	25,000	2,200	11,000	110	--	--
12/13/06 ¹⁷	--	--	12.11	0.00	0.00	120,000	4,400	28,000	1,800	9,300	140	--	--
02/28/07	DISCONTINUED FROM MONITORING/SAMPLING											--	--
05/30/07 ^{17,18}	--	--	12.41	0.00	0.00	120,000	4,600	29,000	2,300	12,000	95	--	--
08/29/07 ¹⁷	--	-- ²¹	-- ²¹	--	--	86,000	38,000	21,000	1,500	8,300	79	--	--
11/21/07 ^{17,18}	101.77	88.74	13.03	0.00	0.00	52,000	3,100	11,000	800	5,800	11	--	--
02/20/08 ²²	101.77	--	--	--	--	--	--	--	--	--	--	--	--
05/21/08 ^{15,17,18}	101.77	89.76	12.01	0.00	0.00	56,000 ²²	3,600	18,000	1,100	8,600	29	--	--
06/24/08 ^{15,17,18}	NP 101.77	89.11	12.66	0.00	0.00	52,000	3,900	20,000	1,200	9,000	36	--	--
08/22/08 ^{15,17,18}	NP 101.77	78.10	23.67	0.00	0.00	60,000	2,900	16,000	910	8,900	24	--	--
DVE-20													
05/30-31/06 ^{17,19}	--	--	10.30	0.00	0.00	64,000	1,500	6,000	1,600	7,700	6	--	--
08/29/06 ¹⁷	--	--	12.73	0.00	0.00	37,000	840	1,800	1,800	6,400	7	--	--
12/13/06 ¹⁷	--	--	12.34	0.00	0.00	43,000	540	1,800	1,800	9,700	<5	--	--
02/28/07	DISCONTINUED FROM MONITORING/SAMPLING											--	--
05/30/07 ^{17,18}	--	--	12.19	0.00	0.00	53,000	590	4,000	1,900	10,000	<5	--	--
08/29/07 ¹⁷	--	-- ²¹	-- ²¹	--	--	42,000	490	3,800	1,800	9,100	<10	--	--
11/21/07 ^{17,18}	102.64	89.00	13.64	0.00	0.00	27,000	92	530	790	5,600	<3	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
DVE-20 (cont)													
02/20/08 ²²	102.64	--	--	--	--	--	--	--	--	--	--	--	--
05/21/08 ^{15,17,18}	102.64	89.67	12.97	0.00	0.00	20,000 ²²	78	540	910	5,400	2	--	--
06/24/08 ^{15,17,18}	NP 102.64	89.67	12.97	0.00	0.00	12,000	61	540	1,000	5,900	1	--	--
08/22/08 ^{15,17,18}	NP 102.64	79.53	23.11	0.00	0.00	23,000	220	1,600	510	5,800	19	--	--
MW-17													
08/13/92	--	82.70	23.30	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/03/92	--	81.26	24.74	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/25/93	106.00	83.86	22.14	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--	--
06/23/93	106.00	82.98	23.02	--	--	<50	<0.5	<0.5	<0.5	1.0	--	--	--
09/21/93	106.00	82.91	23.09	--	--	<50	<0.5	<0.5	<0.5	<0.8	--	--	--
12/02/93	106.00	82.63	23.37	--	--	--	--	--	--	--	--	--	--
03/08/94	106.00	83.17	22.83	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
06/13/94	106.00	83.38	22.62	--	--	<50	1.2	1.1	<0.5	0.9	--	--	--
10/04/94	106.00	83.00	23.00	--	--	62	8.0	2.9	0.7	3.1	--	--	--
11/14/94	106.00	82.97	23.03	--	--	550	22	120	8.9	84	--	--	--
05/15/95	106.00	84.28	21.72	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	106.00	83.63	22.37	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/28/95	106.00	83.03	22.97	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.6	--	--
02/20/96	106.00	84.22	21.78	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	106.00	84.28	21.72	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/27/96	106.00	83.57	22.43	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	106.00	83.18	22.82	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/18/97	106.00	84.69	21.31	--	--	140	34	11	1.6	7.7	71	--	--
05/23/97	106.00	83.75	22.25	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/04/97	106.00	83.47	22.53	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/25/97	106.00	83.09	22.91	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	106.00	86.37	19.63	--	--	<50	3.8	3.3	1.3	4.2	3.5	--	--
05/21/98	106.00	95.39	10.61	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
08/19/98	106.00	84.26	21.74	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	106.00	83.64	22.36	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	106.00	84.16	21.84	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/10/99	106.00	84.55	21.45	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0/<2.0 ⁷	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (fl.)	GWE (msl)	DTW (fl.)	SPHT (fl.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
MW-17 (cont)													
09/02/99	106.00	83.54	22.46	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	106.00	83.81	22.19	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/09/00	106.00	84.21	21.79	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
08/02/00	106.00	83.76	22.24	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/09-10/00	106.00	83.43	22.57	0.00	0.00	<1,000	<10.0	<10.0	<10.0	<10.0	<50.0	--	--
02/08/01	106.00	83.18	22.82	0.00	0.00	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--
05/02/01	106.00	83.52	22.48	0.00	0.00	55.8	<0.500	<5.00	<5.00	<5.00	<0.500	--	--
08/28/01	106.00	83.05	22.95	0.00	0.00	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/26/01	106.00	82.92	23.08	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	106.00	83.97	22.03	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/24/02	106.00	83.84	22.16	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
08/29/02	106.00	82.27	23.73	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
11/29/02	106.00	83.02	22.98	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	106.00	84.02	21.98	0.00	0.00	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03 ¹⁷	106.00	84.15	21.85	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ¹⁷	106.00	83.52	22.48	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03 ¹⁷	106.00	83.16	22.84	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	106.00	84.07	21.93	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/21/04 ¹⁷	106.00	83.68	22.32	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/26/04 ¹⁷	106.00	82.91	23.09	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/29/04 ¹⁷	106.00	83.21	22.79	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/11/05 ¹⁷	106.00	84.03	21.97	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	1	--	--
06/16/05 ¹⁷	106.00	84.72	21.28	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/31/05 ¹⁷	106.00	83.95	22.05	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	0.7	--	--
11/30/05 ¹⁷	106.00	83.45	22.55	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	0.6	--	--
02/27/06 ¹⁷	106.00	84.44	21.56	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30-31/06 ¹⁷	106.00	85.26	20.74	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	1	--	--
08/29/06 ¹⁷	106.00	84.18	21.82	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
12/13/06 ¹⁷	106.00	83.36	22.64	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/28/07 ¹⁷	106.00	83.63	22.37	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30/07 ¹⁷	106.00	83.34	22.66	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/07 ¹⁷	106.00	82.99	23.01	0.00	0.00	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
DISCONTINUED MONITORING / SAMPLING													

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
EQUIPMENT BLANK													
01/05/89	--	--	--	--	--	<1,000	<0.3	<0.3	<0.3	<0.3	--	--	--
03/08/94	--	--	--	--	--	<50	1.0	1.4	<0.5	1.5	--	--	--
TRIP BLANK													
01/05/89	--	--	--	--	--	<1,000	<0.3	<0.3	<0.3	<0.3	--	--	--
10/03/89	--	--	--	--	--	<500	<0.5	<0.5	<0.5	<0.5	--	--	--
01/04/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/03/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
07/03/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/06/90	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
01/04/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/03/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
07/02/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
10/02/91	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
01/02/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
04/07/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/13/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
12/03/92	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/25/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<1.5	--	--	--
06/23/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
09/21/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.8	--	--	--
12/02/93	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
03/08/94	--	--	--	--	--	<50	0.6	0.8	<0.5	0.6	--	--	--
06/13/94	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
10/04/94	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/14/94	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
05/15/95	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
08/04/95	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--	--	--
11/28/95	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.60	--	--
02/20/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/29/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/27/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/22/96	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
TRIP BLANK (cont)													
02/18/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
05/23/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
08/04/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
11/25/97	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/25/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/21/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
08/19/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
11/19/98	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
02/12/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
03/26/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.0	--	--
05/10/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
09/02/99	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0	--	--
02/03/00	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5	--	--
05/09/00	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
08/02/00	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
11/09-10/00	--	--	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--
02/08/01	--	--	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<2.50	--	--
05/02/01	--	--	--	--	--	<50.0	<0.500	<5.00	<5.00	<5.00	<0.500	--	--
08/28/01	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5	--	--
QA													
11/26/01	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/22/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/24/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
08/29/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
11/29/02	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
02/28/03	--	--	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5	--	--
05/30/03 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/03 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/24-25/03 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/04 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/21/04 ¹⁷	--	--	--	--	--	<50	<0.5	1	<0.5	0.9	<0.5	--	--
08/26/04 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/29/04 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/11/05 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

WELL ID/ DATE	TOC* (ft.)	GWE (msl)	DTW (ft.)	SPHT (ft.)	SPH REMOVED (gallons)	TPH-G (µg/L)	B (µg/L)	T (µg/L)	E (µg/L)	X (µg/L)	MTBE (µg/L)	EDB (µg/L)	DCE (µg/L)
QA (cont)													
06/16/05 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/31/05 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/30/05 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/27/06 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30-31/06 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/06 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
12/13/06 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/28/07 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/30/07 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/29/07 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
11/21/07 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
02/20/08 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
05/21/08 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
06/24/08 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--
08/22/08 ¹⁷	--	--	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<0.5	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

EXPLANATIONS:

Groundwater monitoring data and laboratory analytical results prior to May 9, 2000, were compiled from reports prepared by Blaine Tech Services, Inc.

TOC = Top of Casing	TPH-G = Total Petroleum Hydrocarbons as Gasoline	
(ft.) = Feet	B = Benzene	DCE = 1,2-Dichloroethane
GWE = Groundwater Elevation	T = Toluene	(mg/L) = milligrams per liter
(msl) = Mean sea level	E = Ethyl benzene	(µg/L) = Micrograms per liters
DTW = Depth to Water	X = Xylenes	-- = Not Measured/Not Analyzed
SPHT = Separate Phase Hydrocarbons Thickness	MTBE = Methyl Tertiary Butyl Ether	NP = No Purge
SPH = Separate Phase Hydrocarbons	EDB = Ethylene Dibromide/ 1,2-Dibromoethane	QA = Quality Assurance/Trip Blank

* TOC data surveyed on October 17, 2007 by Morrow Surveying. Vertical datum is NAVD 88.

** GWE has been corrected for the presence of SPH; correction factor: $[(TOC - DTW) + (SPHT \times 0.80)]$.

1 Repeat analysis.

2 Estimated thickness.

3 Well inaccessible due to downhole equipment.

4 The TPH as Gasoline value was 99,000 ppb when MTBE is not included in the calculation.

5 Laboratory report indicates results were taken from both a low level and a diluted analysis.

6 The TPH as Gasoline value was 125,000 ppb when MTBE is not included in the calculation.

7 Confirmation run.

8 Laboratory report indicates gasoline C6-C12.

9 Laboratory report indicates gasoline C6-C12 + unidentified hydrocarbons <C6.

10 Laboratory report indicates gasoline C6-C12 + unidentified hydrocarbons C6-C12.

11 Laboratory report indicates weathered gasoline C6-C12.

12 Laboratory report indicates analyte was initially analyzed within hold time; however, due to instrument carryover, the sample was reanalyzed outside the method specified hold time to confirm the carryover.

13 Laboratory report indicates gasoline C6-C10.

14 Laboratory report indicates unidentified hydrocarbons C6-C10.

15 Connected to remediation system.

16 TOC was altered during removal of extraction system; unable to determine GWE.

17 BTEX and MTBE by EPA Method 8260.

18 Hose/tube or pump in well.

19 Well development performed.

20 Extraction stinger in well.

21 Unable to measure DTW due to pump in well, grab sample taken.

22 Laboratory report indicates the sample was analyzed 1 day outside the method hold time.

23 Laboratory report indicates that the surrogate recovery is outside the lower statistical limit (63-135) at 58%. The recovery is high enough to ensure no adverse effect of the data.

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0260
21995 Foothill Boulevard
Hayward, California

EXPLANATIONS:

- ²⁴ Laboratory report indicates that this sample was analyzed 1 day outside of the method hold time. The surrogate recovery is outside the upper QC limit (63-135) 137%.
The value for the TPH-GRO is estimated because the value is outside the calibration range of the system. The system is calibrated to 5500 ug/l.
- ²⁵ Laboratory report indicates that the value for the TPH-GRO is estimated because the value is over the calibration range of the system. The system is calibrated to 5500 ug/l.
The surrogate recovery is outside the upper QC limit. A reanalysis was not performed because the hold time had expired.

STANDARD OPERATING PROCEDURE - GROUNDWATER SAMPLING

Gettler-Ryan Inc. field personnel adhere to the following procedures for the collection and handling of groundwater samples prior to analysis by the analytical laboratory. Prior to sample collection, the type of analysis to be performed is determined. Loss prevention of volatile compounds is controlled and sample preservation for subsequent analysis is maintained.

Prior to sampling, the presence or absence of free-phase hydrocarbons is determined using an interface probe. Product thickness, if present, is measured to the nearest 0.01 foot and is noted in the field notes. In addition, all depth to water level measurements are collected with a static water level indicator and are also recorded in the field notes, prior to purging and sampling any wells.

After water levels are collected and prior to sampling, if purging is to occur, each well is purged a minimum of three well casing volumes of water using pre-cleaned pumps (stack, suction, Grundfos), or disposable bailers. Temperature, pH and electrical conductivity are measured a minimum of three times during the purging. Purging continues until these parameters stabilize.

Groundwater samples are collected using disposable bailers. The water samples are transferred from the bailer into appropriate containers. Pre-preserved containers, supplied by analytical laboratories, are used when possible. When pre-preserved containers are not available, the laboratory is instructed to preserve the sample as appropriate. Duplicate samples are collected for the laboratory to use in maintaining quality assurance/quality control standards. The samples are labeled to include the job number, sample identification, collection date and time, analysis, preservation (if any), and the sample collector's initials. The water samples are placed in a cooler, maintained at 4°C for transport to the laboratory. Once collected in the field, all samples are maintained under chain of custody until delivered to the laboratory.

The chain of custody document includes the job number, type of preservation, if any, analysis requested, sample identification, date and time collected, and the sample collector's name. The chain of custody is signed and dated (including time of transfer) by each person who receives or surrenders the samples, beginning with the field personnel and ending with the laboratory personnel.

A laboratory supplied trip blank accompanies each sampling set. For sampling sets greater than 20 samples, 5% trip blanks are included. The trip blank is analyzed for some or all of the same compounds as the groundwater samples.

As requested by Chevron Environmental Management Company, the purge water and decontamination water generated during sampling activities is transported by IWM to Chemical Waste Management located in Kettleman Hills, California.



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260**

Job Number: **385110**

Site Address: **21995 Foothill Blvd.**

Event Date: **8-22-08** (inclusive)

City: **Hayward, CA**

Sampler: **AW**

Well ID

mw 4

Date Monitored: **8-22-08**

Well Diameter **1 1/2** in.

Total Depth **24.80** ft.

Depth to Water **18.82** ft.

☐ Check if water column is less than 0.50 ft.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: **5.98** xVF _____ = _____ x3 case volume = Estimated Purge Volume: _____ gal.

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbant Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): _____

Weather Conditions: _____

Sample Time/Date: _____ / _____

Water Color: _____

Odor: **Y / N**

Approx. Flow Rate: _____ gpm.

Sediment Description: _____

Did well de-water? _____ If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: _____

Time
(2400 hr.)

Volume (gal.)

pH

Conductivity
(µmhos/cm - µS)

Temperature
(C / F)

D.O.
(mg/L)

ORP
(mV)

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
	x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS: **m/o**

Add/Replaced Lock: _____

Add/Replaced Plug: _____

Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
Site Address: 21995 Foothill Blvd. Event Date: 8-22-08 (inclusive)
City: Hayward, CA Sampler: AW

Well ID: MW-5 Date Monitored: 8-22-08
Well Diameter: 1 1/2 in.
Total Depth: 26.67 ft.
Depth to Water: 24.62 ft. Check if water column is less than 0.50 ft.
2.05 xVF 6.6 = 1.35 x3 case volume = Estimated Purge Volume: 4.5 gal.
Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: system running

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: system valve

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: 24.60 ft
Depth to Water: _____ ft
Hydrocarbon Thickness: 0 ft
Visual Confirmation/Description: _____
Skimmer / Absorbant Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): 1120 Weather Conditions: Sunny
Sample Time/Date: 1127 / 8-22-08 Water Color: Clear Odor: YN
Approx. Flow Rate: N/A gpm. Sediment Description: Clear
Did well de-water? N If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: N/A

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-5</u>	<u>6</u> x vva vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTX+MTBE(8260)</u>

COMMENTS:

Pump in well, hooked to system, system running, NO
purge taken. * New well depth taken *

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260Job Number: 385110Site Address: 21995 Foothill Blvd.Event Date: 8-22-08 (inclusive)City: Hayward, CASampler: AWWell ID: MW-6Date Monitored: 8-22-08Well Diameter: 1 1/2 in.Total Depth: 14.75 ft.

Depth to Water: _____ ft.

☐ Check if water column is less than 0.50 ft.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF _____ = _____ x3 case volume = Estimated Purge Volume: _____ gal.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): _____

Weather Conditions: _____

Sample Time/Date: _____ / _____

Water Color: _____ Odor: Y / N

Approx. Flow Rate: _____ gpm.

Sediment Description: _____

Did well de-water? _____ If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: _____

Time
(2400 hr.)

Volume (gal.)

pH

Conductivity
(µmhos/cm - µS)Temperature
(C / F)D.O.
(mg/L)ORP
(mV)**LABORATORY INFORMATION**

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
	x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS: Dry @ 14.70 ft.

Add/Replaced Lock: _____

Add/Replaced Plug: _____

Add/Replaced Bolt: _____



GETTLER - RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260**Job Number: **385110**Site Address: **21995 Foothill Blvd.**Event Date: **8-22-08** (inclusive)City: **Hayward, CA**Sampler: **AW**Well ID: **MW-7**Date Monitored: **8-22-08**Well Diameter: **1 1/2 (4)** in.Total Depth: **16.62** ft.Depth to Water: **Dry** ft.☐ Check if water column is less than 0.50 ft.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

xVF _____ = _____ x3 case volume = Estimated Purge Volume: _____ gal.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): _____

Weather Conditions: _____

Sample Time/Date: _____ / _____

Water Color: _____ Odor: **Y / N**

Approx. Flow Rate: _____ gpm.

Sediment Description: _____

Did well de-water? _____ If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: _____

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - µS)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
	x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS: **M/O Dry @ 16.62ft**

Add/Replaced Lock: _____

Add/Replaced Plug: _____

Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260**Job Number: **385110**Site Address: **21995 Foothill Blvd.**Event Date: **8-22-08** (inclusive)City: **Hayward, CA**Sampler: **AW**Well ID: **MW-8**Date Monitored: **8-22-08**Well Diameter: **1 1/2 (4)** in.Total Depth: **17.43** ft.Depth to Water: **15.08** ft.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

☐ Check if water column is less than 0.50 ft.xVF **2.35** = **36.1** x3 case volume = Estimated Purge Volume: **108.3** gal.Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: **3.08****Purge Equipment:**

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbant Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): _____

Weather Conditions: _____

Sample Time/Date: **8/22/08**Water Color: _____ Odor: **Y / N**

Approx. Flow Rate: _____ gpm.

Sediment Description: _____

Did well de-water? _____ If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: _____

Time
(2400 hr.)

Volume (gal.)

pH

Conductivity
(µmhos/cm - µS)Temperature
(C / F)D.O.
(mg/L)ORP
(mV)**LABORATORY INFORMATION**

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
	x vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS: **M/O**

Add/Replaced Lock: _____

Add/Replaced Plug: _____

Add/Replaced Bolt: _____



GETTLER - RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
Site Address: 21995 Foothill Blvd. Event Date: 8-22-08 (inclusive)
City: Hayward, CA Sampler: AW

Well ID: MW-9 Date Monitored: 8-22-08
Well Diameter: 1 1/2 (14) in.
Total Depth: 17.36 ft.
Depth to Water: 15.30 ft.

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

Depth to Water 2.06 x VF .66 = 1.36 ☐ Check if water column is less than 0.50 ft.
x3 case volume = Estimated Purge Volume: 4.5 gal.
Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 15.71

Purge Equipment:

Disposable Bailer ☒
Stainless Steel Bailer ☐
Stack Pump ☐
Suction Pump ☐
Grundfos ☐
Peristaltic Pump ☐
QED Bladder Pump ☐
Other: ☐

Sampling Equipment:

Disposable Bailer ☒
Pressure Bailer ☐
Discrete Bailer ☐
Peristaltic Pump ☐
QED Bladder Pump ☐
Other: ☐

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): 1200 Weather Conditions: Sunny
Sample Time/Date: 1230 / 8-22-08 Water Color: Cloudy Odor: Y 10
Approx. Flow Rate: — gpm. Sediment Description: Heavy Black stuff
Did well de-water? N If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 15.71

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm µS)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
<u>1205</u>	<u>1.5</u>	<u>6.74</u>	<u>907</u>	<u>21.4</u>		
<u>1210</u>	<u>3.0</u>	<u>6.84</u>	<u>944</u>	<u>21.6</u>		
<u>1215</u>	<u>4.5</u>	<u>6.93</u>	<u>953</u>	<u>21.6</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-9</u>	<u>6</u> x vva vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTX+MTBE(8260)</u>

COMMENTS: _____

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260**Job Number: **385110**Site Address: **21995 Foothill Blvd.**Event Date: **8/22/08** (inclusive)City: **Hayward, CA**Sampler: **314**Well ID: **MW-10**Date Monitored: **8/22/08**Well Diameter: **1 1/2 (4)** in.Total Depth: **26.59** ft.Depth to Water: **13.27** ft.

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

☐ Check if water column is less than 0.50 ft.

xVF _____ = _____ x3 case volume = Estimated Purge Volume: _____ gal.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbant Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): _____

Weather Conditions: _____

Sample Time/Date: _____ / _____

Water Color: _____ Odor: **Y / N**

Approx. Flow Rate: _____ gpm.

Sediment Description: _____

Did well de-water? _____ If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: _____

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - µS)	Temperature (C / F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
	x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS: _____

Add/Replaced Lock: _____

Add/Replaced Plug: _____

Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
Site Address: 21995 Foothill Blvd. Event Date: 8-22-08 (inclusive)
City: Hayward, CA Sampler: AW

Well ID: MW-11 Date Monitored: 8-22-08
Well Diameter: 1 1/2 (4) in.
Total Depth: 27.42 ft.
Depth to Water: 23.40 ft. ☐ Check if water column is less than 0.50 ft.
3.52 xVF .66 = 2.32 x3 case volume = Estimated Purge Volume: 7.0 gal.
Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: System running

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: System valve

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): 1045 Weather Conditions: Sunny
Sample Time/Date: 1050 / 8-22-08 Water Color: Clear Odor: DN
Approx. Flow Rate: N/A gpm. Sediment Description: Clear
Did well de-water? N/A If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: N/A

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - DS)	Temperature (° / F)	D.O. (mg/L)	ORP (mV)
--------------------	---------------	----	---------------------------------	------------------------	----------------	-------------

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-11</u>	<u>6</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS: Pump in well & hooked to system, system running, no-purge sample taken.

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
Site Address: 21995 Foothill Blvd. Event Date: 8-22-08 (inclusive)
City: Hayward, CA Sampler: AN

Well ID: MW-12
Well Diameter: 1 1/2 in.
Total Depth: 27.57 ft.
Depth to Water: 24.24 ft.
3.33 xVF = 2.19

Date Monitored: 8-22-08

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

☐ Check if water column is less than 0.50 ft.

x3 case volume = Estimated Purge Volume: 7.0 gal.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 24.90

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: System running

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: System valve

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): 11:35 Weather Conditions: Sunny
Sample Time/Date: 11:45 / 8-22-08 Water Color: Clear Odor: None
Approx. Flow Rate: N/A gpm. Sediment Description: Clear
Did well de-water? N If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: N/A

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-12</u>	<u>6</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS: Pump in well, hooked to system, system running,
no purge sample taken
* New total depth taken *

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260** Job Number: **385110**
 Site Address: **21995 Foothill Blvd.** Event Date: **8-22-08** (inclusive)
 City: **Hayward, CA** Sampler: **AW**

Well ID: **MW-13** Date Monitored: **8-22-08**
 Well Diameter: **1 1/2 (4) in.**
 Total Depth: **17.72 ft.**
 Depth to Water: **14.20 ft.** ☐ Check if water column is less than 0.50 ft.
3.52 xVF **66** = **2.32** x3 case volume = Estimated Purge Volume: **7.0** gal.
 Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: **14.90**

Purge Equipment:

Disposable Bailer ☒
 Stainless Steel Bailer ☐
 Stack Pump ☐
 Suction Pump ☐
 Grundfos ☐
 Peristaltic Pump ☐
 QED Bladder Pump ☐
 Other: ☐

Sampling Equipment:

Disposable Bailer ☒
 Pressure Bailer ☐
 Discrete Bailer ☐
 Peristaltic Pump ☐
 QED Bladder Pump ☐
 Other: ☐

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): **1240** Weather Conditions: **Sunny**
 Sample Time/Date: **1310 / 8-22-08** Water Color: **Clear** Odor: **Y (N)**
 Approx. Flow Rate: _____ gpm. Sediment Description: **Clear**
 Did well de-water? **N** If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: **14.88**

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - µS)	Temperature (°F)	D.O. (mg/L)	ORP (mV)
1245	2.0	6.78	884	21.5		
1250	4.0	6.65	913	21.2		
1255	7.0	6.94	936	21.2		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-13	6 x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS:

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
 Site Address: 21995 Foothill Blvd. Event Date: 8/22/08 (inclusive)
 City: Hayward, CA Sampler: SH

Well ID: MW-14 Date Monitored: _____
 Well Diameter: 1 1/2 in. Volume 3/4"= 0.02 1"= 0.04 2"= 0.17 3"= 0.38
 Total Depth: 40.96 ft. Factor (VF) 4"= 0.66 5"= 1.02 6"= 1.50 12"= 5.80
 Depth to Water: 20.31 ft. ☐ Check if water column is less than 0.50 ft.
20.65 xVF .17 = 3.51 x3 case volume = Estimated Purge Volume: 10.53 gal.
 Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 24.44

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump X
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer X
 Pressure Bailer _____
 Discrete Bailer _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): 0915 Weather Conditions: Clear
 Sample Time/Date: 0935 18/22/08 Water Color: Cloudy Odor: Y10
 Approx. Flow Rate: 1 gpm. Sediment Description: 1.5 lbs
 Did well de-water? No If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 22.07

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - µS)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
<u>0919</u>	<u>4</u>	<u>7.22</u>	<u>612</u>	<u>22.4</u>		
<u>0923</u>	<u>8</u>	<u>7.09</u>	<u>641</u>	<u>22.1</u>		
<u>0926</u>	<u>11</u>	<u>7.02</u>	<u>683</u>	<u>22.0</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-14</u>	<u>6</u> x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTX+MTBE(8260)

COMMENTS:

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
 Site Address: 21995 Foothill Blvd. Event Date: 8/22/08 (inclusive)
 City: Hayward, CA Sampler: SH

Well ID: MW-15
 Well Diameter: 1 1/2 in.
 Total Depth: 22.06 ft.
 Depth to Water: 16.11 ft.
5.95 xVF .17 = 1.01

Date Monitored: 8/22/08

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

☐ Check if water column is less than 0.50 ft.

x3 case volume = Estimated Purge Volume: 3.03 gal.

Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 17.30

Purge Equipment:

Disposable Bailer X
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer X
 Pressure Bailer _____
 Discrete Bailer _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbent Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): 1005 Weather Conditions: Clear
 Sample Time/Date: 1035 / 8/22/08 Water Color: cloudy Odor: Y 100
 Approx. Flow Rate: _____ gpm. Sediment Description: 1.5H
 Did well de-water? No If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 17.12

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - µS)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
<u>1008</u>	<u>1</u>	<u>7.32</u>	<u>743</u>	<u>22.4</u>		
<u>1012</u>	<u>2</u>	<u>7.30</u>	<u>736</u>	<u>22.1</u>		
<u>1016</u>	<u>3</u>	<u>7.26</u>	<u>731</u>	<u>22.0</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-15</u>	<u>6</u> x vov vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS:

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
 Site Address: 21995 Foothill Blvd. Event Date: 8/22/08 (inclusive)
 City: Hayward, CA Sampler: JH

Well ID: MW-16 Date Monitored: 8/22/08
 Well Diameter: 1 1/2 in.
 Total Depth: 37.62 ft.
 Depth to Water: 19.95 ft.
 Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 23.48

Volume 3/4"= 0.02 1"= 0.04 2"= 0.17 3"= 0.38
 Factor (VF) 4"= 0.66 5"= 1.02 6"= 1.50 12"= 5.80

☐ Check if water column is less than 0.50 ft.
 xVF .17 = 3.00 x3 case volume = Estimated Purge Volume: 9.01 gal.

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump X
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer X
 Pressure Bailer _____
 Discrete Bailer _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbent Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): 1100 Weather Conditions: clean
 Sample Time/Date: 1135 / 8/22/08 Water Color: clear Odor: (Y) N
 Approx. Flow Rate: 1 gpm. Sediment Description: light
 Did well de-water? no If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 23.17

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - (S))	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
<u>1103</u>	<u>3</u>	<u>6.81</u>	<u>596</u>	<u>22.5</u>		
<u>1106</u>	<u>6</u>	<u>6.94</u>	<u>573</u>	<u>22.2</u>		
<u>1110</u>	<u>9</u>	<u>6.79</u>	<u>570</u>	<u>22.1</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-16</u>	<u>6</u> x vov vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
 Site Address: 21995 Foothill Blvd. Event Date: 8/22/08 (inclusive)
 City: Hayward, CA Sampler: SH

Well ID: MW-18 Date Monitored: 8/22/08
 Well Diameter: 1 1/2 in. Volume 3/4"= 0.02 1"= 0.04 2"= 0.17 3"= 0.38
 Total Depth: 23.26 ft. Factor (VF) 4"= 0.66 5"= 1.02 6"= 1.50 12"= 5.80
 Depth to Water: 16.78 ft. ☐ Check if water column is less than 0.50 ft.
6.48 xVF 1.17 = 1.10 x3 case volume = Estimated Purge Volume: 3.30 gal.
 Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 18.07

Purge Equipment:

Disposable Bailer X
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment:

Disposable Bailer X
 Pressure Bailer _____
 Discrete Bailer _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbent Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): 1225 Weather Conditions: Clear
 Sample Time/Date: 1300 / 8/22/08 Water Color: clear Odor: Y/N
 Approx. Flow Rate: _____ gpm. Sediment Description: 1.5H
 Did well de-water? No If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: 17.55

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - µS)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
<u>1229</u>	<u>1</u>	<u>7.34</u>	<u>712</u>	<u>22.7</u>		
<u>1233</u>	<u>2</u>	<u>7.29</u>	<u>743</u>	<u>22.6</u>		
<u>1237</u>	<u>3</u>	<u>7.22</u>	<u>760</u>	<u>22.0</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-18</u>	<u>6</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS:

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260** Job Number: **385110**
Site Address: **21995 Foothill Blvd.** Event Date: **8-22-08** (inclusive)
City: **Hayward, CA** Sampler: **AW**

Well ID: **MW-19** Date Monitored: **8-22-08**
Well Diameter: **1 2/4** in.
Total Depth: **44-93** ft.
Depth to Water: **15.07** ft. ☐ Check if water column is less than 0.50 ft.
29.86 xVF **1.7** = **5.07** x3 case volume = Estimated Purge Volume: **16.0** gal.
Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: **21.04**

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump ☒ _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Sampling Equipment:

Disposable Bailer ☒ _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: _____

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): **0930** Weather Conditions: **Sunny**
Sample Time/Date: **1000 / 8-22-08** Water Color: **Clear** Odor: **Oil / N**
Approx. Flow Rate: **2.0** gpm. Sediment Description: **Clear**
Did well de-water? **N** If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: **19.98**

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - 25°C)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
0933	5.0	7.42	947	21.7		
0940	10.0	7.52	1166	20.9		
0945	16.0	7.57	1301	20.7		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
MW-19	6 x voa vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS:

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260** Job Number: **385110**
 Site Address: **21995 Foothill Blvd.** Event Date: **8/22/08** (inclusive)
 City: **Hayward, CA** Sampler: **JH**

Well ID: **P-1** Date Monitored: **8/22/08**
 Well Diameter: **1 1/2** in.
 Total Depth: **19.62** ft.
 Depth to Water: **9.24** ft.
☐ Check if water column is less than 0.50 ft.
10.38 xVF **.04** = **.41** x3 case volume = Estimated Purge Volume: **1.24** gal.
 Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: **11.31**

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment: **Pur Bailer**
 Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Sampling Equipment: **Pur Bailer**
 Disposable Bailer _____
 Pressure Bailer _____
 Discrete Bailer _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbent Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): **0830** Weather Conditions: **clear**
 Sample Time/Date: **0900 / 8/22/08** Water Color: **cloudy** Odor: **6/ N**
 Approx. Flow Rate: _____ gpm. Sediment Description: **light**
 Did well de-water? **no** If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: **11.06**

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - 6S)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
0834	.4	7.34	1035	22.1		
0839	.8	7.20	1078	22.4		
0846	1.25	7.13	1094	22.5		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
P-1	6 x vov vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS: _____

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
Site Address: 21995 Foothill Blvd. Event Date: 8-22-08 (inclusive)
City: Hayward, CA Sampler: AW

Well ID: DVE-9 Date Monitored: 8-22-08
Well Diameter: 1 1/2 in.
Total Depth: 27.22 ft. ☐ Check if water column is less than 0.50 ft.
Depth to Water: 23.97 ft. 3.25 xVF 0.66 = 2.145 x3 case volume = Estimated Purge Volume: 6.5 gal.
Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: _____

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment:

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: System running

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: System valve

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbent Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): 1015 Weather Conditions: Sunny
Sample Time/Date: 1025 / 8-22-08 Water Color: Clear Odor: GIN Slight
Approx. Flow Rate: N/A gpm. Sediment Description: Clear
Did well de-water? N If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: N/A

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm @ 25°C)	Temperature (°C / °F)	D.O. (mg/L)	ORP (mV)
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
DVE-9	6 x vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS:

Pump in well, hooked to system (running), no purge sample taken.

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: **Chevron #9-0260**Job Number: **385110**Site Address: **21995 Foothill Blvd.**Event Date: **8-22-08** (inclusive)City: **Hayward, CA**Sampler: **AW**Well ID: **DVE-12**Date Monitored: **8-22-08**Well Diameter: **1 1/2 in.**Total Depth: **27.67 ft.**Depth to Water: **23.67 ft.**

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

☐ Check if water column is less than 0.50 ft.Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: **4.00** xVF **0.66** = **2.64** x3 case volume = Estimated Purge Volume: **8.0** gal.**Purge Equipment:**

Disposable Bailer _____
Stainless Steel Bailer _____
Stack Pump _____
Suction Pump _____
Grundfos _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: **System running**

Sampling Equipment:

Disposable Bailer _____
Pressure Bailer _____
Discrete Bailer _____
Peristaltic Pump _____
QED Bladder Pump _____
Other: **System valve**

Time Started: _____ (2400 hrs)
Time Completed: _____ (2400 hrs)
Depth to Product: _____ ft
Depth to Water: _____ ft
Hydrocarbon Thickness: _____ ft
Visual Confirmation/Description: _____
Skimmer / Absorbant Sock (circle one)
Amt Removed from Skimmer: _____ gal
Amt Removed from Well: _____ gal
Water Removed: _____
Product Transferred to: _____

Start Time (purge): **1100**Weather Conditions: **Sunny**Sample Time/Date: **1108 / 8-22-08**Water Color: **Clear**Odor: **DN**Approx. Flow Rate: **N/A** gpm.Sediment Description: **Clear**Did well de-water? **N/A** If yes, Time: _____ Volume: _____ gal. DTW @ Sampling: **N/A**Time
(2400 hr.)

Volume (gal.)

pH

Conductivity
(µmhos/cm - (°S))Temperature
(°C / °F)D.O.
(mg/L)ORP
(mV)**LABORATORY INFORMATION**

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
DVE-12	6 x vov vial	YES	HCL	LANCASTER	TPH-G(8015)/BTEX+MTBE(8260)

COMMENTS:

Pump in well, hooked to system, system running, no
purge taken.

Add/Replaced Lock: _____

Add/Replaced Plug: _____

Add/Replaced Bolt: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility#: Chevron #9-0260 Job Number: 385110
 Site Address: 21995 Foothill Blvd. Event Date: 8-22-08 (inclusive)
 City: Hayward, CA Sampler: AW

Well ID: DVE-20 Date Monitored: 8-22-08
 Well Diameter: 1 1/2 in.
 Total Depth: 27.70 ft.
 Depth to Water: 23.11 ft. ☐ Check if water column is less than 0.50 ft.
4.59 xVF .66 = 3.03 x3 case volume = Estimated Purge Volume: 9.0 gal.
 Depth to Water w/ 80% Recharge [(Height of Water Column x 0.20) + DTW]: 24.30

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment:

Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: System running

Sampling Equipment:

Disposable Bailer _____
 Pressure Bailer _____
 Discrete Bailer _____
 Peristaltic Pump _____
 QED Bladder Pump _____
 Other: System valve

Time Started: _____ (2400 hrs)
 Time Completed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Water Removed: _____
 Product Transferred to: _____

Start Time (purge): 1028 Weather Conditions: Sunny
 Sample Time/Date: 1035 / 8-22-08 Water Color: Clear Odor: Q / N /
 Approx. Flow Rate: N/A gpm. Sediment Description: Clear
 Did well de-water? N/A If yes, Time: N/A Volume: 0 gal. DTW @ Sampling: N/A

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (µmhos/cm - <u>°C</u>)	Temperature (<u>°C</u> / <u>°F</u>)	D.O. (mg/L)	ORP (mV)

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>DVE-20</u>	<u>6</u> x vov vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8260)</u>

COMMENTS: Pump in well hooked to system, system running, no
purge sample taken

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Add/Replaced Bolt: _____

Ø825Ø8-Ø3 P.10F2

Acct. #: 10904 Sample # 5450358-72 Group #: 003838

Lancaster Laboratories, Inc., 2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 (717) 656-2300
Copies: White and yellow should accompany samples to Lancaster Laboratories. The pink copy should be retained by the client.

**Lancaster
Laboratories**

Ø825 Ø8-Ø3 P.20F2

Acct. #: 10904

Sample # 5450358-72

Group #: 003839

[illegible]



2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-856-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Analysis Report

ANALYTICAL RESULTS

Prepared for:

Chevron
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

925-842-8582

Prepared by:

Lancaster Laboratories
2425 New Holland Pike
Lancaster, PA 17605-2425

RECEIVED

SEP 17 2008

GETTLER-RYAN INC.
GENERAL CONTRACTORS

SAMPLE GROUP

The sample group for this submittal is 1107021. Samples arrived at the laboratory on Tuesday, August 26, 2008. The PO# for this group is 0015025028 and the release number is COSTA.

Client Description

QA-T-080822 NA Water
MW-5-W-080822 Grab Water
MW-9-W-080822 Grab Water
MW-11-W-080822 Grab Water
MW-12-W-080822 Grab Water
MW-13-W-080822 Grab Water
MW-14-W-080822 Grab Water
MW-15-W-080822 Grab Water
MW-16-W-080822 Grab Water
MW-18-W-080822 Grab Water
MW-19-W-080822 Grab Water
P-1-W-080822 Grab Water
DVE-9-W-080822 Grab Water
DVE-12-W-080822 Grab Water
DVE-20-W-080822 Grab Water

Lancaster Labs Number

5450358
5450359
5450360
5450361
5450362
5450363
5450364
5450365
5450366
5450367
5450368
5450369
5450370
5450371
5450372

ELECTRONIC COPY TO CRA c/o Gettler-Ryan

Attn: Cheryl Hansen



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Questions? Contact your Client Services Representative
Jill M Parker at (717) 656-2300

Respectfully Submitted,

A handwritten signature in cursive script that reads "Dorothy M. Love".

Dorothy M. Love
Group Leader



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450358

Group No. 1107021

QA-T-080822 NA Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 QA

Collected: 08/22/2008

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

0260Q

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Dilution Factor
				Method Detection Limit	Units	
01728	TPH-GRO - Waters	n.a.	N.D.	50	ug/l	1
The surrogate recovery is outside the lower statistical limit (63-135) at 58%. This recovery is high enough to ensure no adverse effect on the data.						
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008 14:04	Tyler O Griffin	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 09:51	Ginelle L Feister	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008 14:04	Tyler O Griffin	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 09:51	Ginelle L Feister	1



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450359

Group No. 1107021

MW-5-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-5

Collected: 08/22/2008 11:27 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

02605

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Units	Dilution Factor
				Method	Detection Limit		
01728	TPH-GRO - Waters	n.a.	65,000		2,500	ug/l	50
06054	BTEX+MTBE by 8260B						
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	10.		ug/l	20
05401	Benzene	71-43-2	1,400.	10.		ug/l	20
05407	Toluene	108-88-3	18,000.	100.		ug/l	200
05415	Ethylbenzene	100-41-4	1,600.	10.		ug/l	20
06310	Xylene (Total)	1330-20-7	8,800.	10.		ug/l	20

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date	Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008	23:29	Tyler O Griffin	50
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008	10:15	Ginelle L Feister	20
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008	10:39	Ginelle L Feister	200
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008	23:29	Tyler O Griffin	50
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008	10:15	Ginelle L Feister	20
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/28/2008	10:39	Ginelle L Feister	200



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450360

Group No. 1107021

MW-9-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-9

Collected: 08/22/2008 12:30 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

02609

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method	Units	Dilution Factor
				Detection Limit		
01728	TPH-GRO - Waters	n.a.	3,500	50	ug/l	1
The sample was analyzed 1 day outside the method hold time.						
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	1.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	54.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	10.	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis	Analyst	Dilution Factor
				Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/06/2008 00:00	Tyler O Griffin	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 11:03	Ginelle L Feister	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/06/2008 00:00	Tyler O Griffin	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 11:03	Ginelle L Feister	1



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450361

Group No. 1107021

MW-11-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-11

Collected: 08/22/2008 10:50 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26011

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method	Units	Dilution Factor
				Detection Limit		
01728	TPH-GRO - Waters	n.a.	3,900	50	ug/l	1
This sample was analyzed 1 day outside the method hold time.						
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	36.	0.5	ug/l	1
05401	Benzene	71-43-2	230.	5.	ug/l	10
05407	Toluene	108-88-3	42.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	33.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	260.	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis	Analyst	Dilution Factor
				Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/06/2008 00:31	Tyler O Griffin	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 11:28	Ginelle L Feister	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/29/2008 18:44	Michael A Ziegler	10
01146	GC VOA Water Prep	SW-846 5030B	1	09/06/2008 00:31	Tyler O Griffin	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 11:28	Ginelle L Feister	1
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/29/2008 18:44	Michael A Ziegler	10



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450362

Group No. 1107021

MW-12-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-12

Collected: 08/22/2008 11:45 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26012

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Dilution Factor
				Method	Units	
01728	TPH-GRO - Waters	n.a.	29,000	Detection Limit	ug/l	10
This sample was analyzed 1 day outside the method hold time.						
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	38.	3.	ug/l	5
05401	Benzene	71-43-2	3,200.	25.	ug/l	50
05407	Toluene	108-88-3	5,100.	25.	ug/l	50
05415	Ethylbenzene	100-41-4	360.	3.	ug/l	5
06310	Xylene (Total)	1330-20-7	5,700.	25.	ug/l	50

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date	Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/06/2008	01:01	Tyler O Griffin	10
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008	11:52	Ginelle L Feister	5
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008	12:16	Ginelle L Feister	50
01146	GC VOA Water Prep	SW-846 5030B	1	09/06/2008	01:01	Tyler O Griffin	10
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008	11:52	Ginelle L Feister	5
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/28/2008	12:16	Ginelle L Feister	50



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450363

Group No. 1107021

MW-13-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-13

Collected: 08/22/2008 13:10 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26013

CAT No.	Analysis Name	CAS Number	As Received Result	As Received	Units	Dilution Factor
				Method Detection Limit		
01728	TPH-GRO - Waters	n.a.	7,500	50	ug/l	1
	This sample was analyzed 1 day outside of the method hold time. The surrogate recovery is outside the upper QC limit (63-135) at 137%. The value for the TPH GRO is estimated because the value is outside the calibration range of the system. The system is calibrated to 5500 ug/l.					
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	5.	0.5	ug/l	1
05407	Toluene	108-88-3	26.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	380.	3.	ug/l	5
06310	Xylene (Total)	1330-20-7	400.	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis	Analyst	Dilution Factor
				Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/06/2008 01:32	Tyler O Griffin	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 12:40	Ginelle L Feister	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 13:04	Ginelle L Feister	5
01146	GC VOA Water Prep	SW-846 5030B	1	09/06/2008 01:32	Tyler O Griffin	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 12:40	Ginelle L Feister	1
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/28/2008 13:04	Ginelle L Feister	5



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450364

Group No. 1107021

MW-14-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-14

Collected: 08/22/2008 09:35 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26014

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method		Dilution Factor
				Detection Limit	Units	
01728	TPH-GRO - Waters	n.a.	N.D.	50	ug/l	1
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date and Time			
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008 14:35		Tyler O Griffin	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 13:29		Ginelle L Feister	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008 14:35		Tyler O Griffin	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 13:29		Ginelle L Feister	1



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450365

Group No. 1107021

MW-15-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-15

Collected: 08/22/2008 10:35 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26015

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method		Dilution Factor
				Detection Limit	Units	
01728	TPH-GRO - Waters	n.a.	N.D.	50	ug/l	1
The sample was analyzed 1 day outside the method hold time.						
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/06/2008 02:32	Tyler O Griffin	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 14:42	Ginelle L Feister	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/06/2008 02:32	Tyler O Griffin	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 14:42	Ginelle L Feister	1



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450366

Group No. 1107021

MW-16-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-16

Collected: 08/22/2008 11:35 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26016

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Units	Dilution Factor
				Method	Detection Limit		
01728	TPH-GRO - Waters	n.a.	12,000		50	ug/l	1
	The value for TPH GRO is estimated because the value is over the calibration range of the system. The system is calibrated to 5500 ug/l. The surrogate recovery is outside the upper QC limit. A reanalysis was not performed because the hold time had expired.						
06054	BTEX+MTBE by 8260B						
02010	Methyl Tertiary Butyl Ether	1634-04-4	10.	0.5		ug/l	1
05401	Benzene	71-43-2	260.	3.		ug/l	5
05407	Toluene	108-88-3	10.	0.5		ug/l	1
05415	Ethylbenzene	100-41-4	320.	3.		ug/l	5
06310	Xylene (Total)	1330-20-7	330.	0.5		ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date	Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008	11:34	Carrie E Youtzy	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008	15:07	Ginelle L Feister	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008	15:31	Ginelle L Feister	5
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008	11:34	Carrie E Youtzy	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008	15:07	Ginelle L Feister	1
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/28/2008	15:31	Ginelle L Feister	5



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450367

Group No. 1107021

MW-18-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-18

Collected: 08/22/2008 13:00 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26018

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method		Dilution Factor
				Detection Limit	Units	
01728	TPH-GRO - Waters	n.a.	23,000	250	ug/l	5
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	N.D.	1.	ug/l	2
05401	Benzene	71-43-2	180.	1.	ug/l	2
05407	Toluene	108-88-3	55.	1.	ug/l	2
05415	Ethylbenzene	100-41-4	1,600.	10.	ug/l	20
06310	Xylene (Total)	1330-20-7	1,700.	10.	ug/l	20

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008 11:56	Carrie E Youtzy	5
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 15:56	Ginelle L Feister	2
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 16:20	Ginelle L Feister	20
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008 11:56	Carrie E Youtzy	5
01146	GC VOA Water Prep	SW-846 5030B	2	09/05/2008 11:56	Carrie E Youtzy	5
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 15:56	Ginelle L Feister	2
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/28/2008 16:20	Ginelle L Feister	20



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450368

Group No. 1107021

MW-19-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 MW-19

Collected: 08/22/2008 10:00 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

26019

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Dilution Factor
				Method Detection Limit	Units	
01728	TPH-GRO - Waters	n.a.	310	50	ug/l	1
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	11.	0.5	ug/l	1
05401	Benzene	71-43-2	16.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	1.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	0.7	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008 12:18	Carrie E Youtzy	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 16:44	Ginelle L Feister	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008 12:18	Carrie E Youtzy	1
01146	GC VOA Water Prep	SW-846 5030B	2	09/05/2008 12:18	Carrie E Youtzy	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 16:44	Ginelle L Feister	1



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450369

Group No. 1107021

P-1-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 P-1

Collected: 08/22/2008 09:00 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

260P1

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Dilution Factor
				Method	Units	
01728	TPH-GRO - Waters	n.a.	N.D.	Detection Limit 50	ug/l	1
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	7.	0.5	ug/l	1
05401	Benzene	71-43-2	N.D.	0.5	ug/l	1
05407	Toluene	108-88-3	N.D.	0.5	ug/l	1
05415	Ethylbenzene	100-41-4	N.D.	0.5	ug/l	1
06310	Xylene (Total)	1330-20-7	N.D.	0.5	ug/l	1

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008 12:40	Carrie E Youtzy	1
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/28/2008 17:08	Ginelle L Feister	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008 12:40	Carrie E Youtzy	1
01146	GC VOA Water Prep	SW-846 5030B	2	09/05/2008 12:40	Carrie E Youtzy	1
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/28/2008 17:08	Ginelle L Feister	1



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450370

Group No. 1107021

DVE-9-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 DVE-9

Collected: 08/22/2008 10:25 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

260V9

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Dilution Factor
				Method Detection Limit	Units	
01728	TPH-GRO - Waters	n.a.	57,000	2,500	ug/l	50
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	130.	5.	ug/l	10
05401	Benzene	71-43-2	1,400.	5.	ug/l	10
05407	Toluene	108-88-3	15,000.	50.	ug/l	100
05415	Ethylbenzene	100-41-4	1,300.	5.	ug/l	10
06310	Xylene (Total)	1330-20-7	7,700.	50.	ug/l	100

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008 13:01	Carrie E Youtzy	50
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/29/2008 03:45	Michael A Ziegler	10
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/29/2008 04:09	Michael A Ziegler	100
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008 13:01	Carrie E Youtzy	50
01146	GC VOA Water Prep	SW-846 5030B	2	09/05/2008 13:01	Carrie E Youtzy	50
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/29/2008 03:45	Michael A Ziegler	10
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/29/2008 04:09	Michael A Ziegler	100



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450371

Group No. 1107021

DVE-12-W-080822 Grab Water
Facility# 90260 Job# 385110 GRD
21995 Foothill - Hayward T0600100315 DVE-12
Collected: 08/22/2008 11:08 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05
Reported: 09/17/2008 at 10:21
Discard: 10/18/2008

Chevron
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

60V12

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Dilution Factor
				Method	Units	
01728	TPH-GRO - Waters	n.a.	60,000	Detection Limit 2,500	ug/l	50
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	24.	5.	ug/l	10
05401	Benzene	71-43-2	2,900.	50.	ug/l	100
05407	Toluene	108-88-3	16,000.	50.	ug/l	100
05415	Ethylbenzene	100-41-4	910.	5.	ug/l	10
06310	Xylene (Total)	1330-20-7	8,900.	50.	ug/l	100

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date	Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008	13:23	Carrie E Youtzy	50
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/29/2008	04:33	Michael A Ziegler	10
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/29/2008	04:58	Michael A Ziegler	100
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008	13:23	Carrie E Youtzy	50
01146	GC VOA Water Prep	SW-846 5030B	2	09/05/2008	13:23	Carrie E Youtzy	50
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/29/2008	04:33	Michael A Ziegler	10
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/29/2008	04:58	Michael A Ziegler	100



Analysis Report

2425 New Holland Pike, PO Box 12425, Lancaster, PA 17605-2425 • 717-656-2300 Fax: 717-656-2681 • www.lancasterlabs.com

Page 1 of 1

Lancaster Laboratories Sample No. WW5450372

Group No. 1107021

DVE-20-W-080822 Grab Water

Facility# 90260 Job# 385110 GRD

21995 Foothill - Hayward T0600100315 DVE-20

Collected: 08/22/2008 10:35 by JH

Account Number: 10904

Submitted: 08/26/2008 09:05

Reported: 09/17/2008 at 10:21

Discard: 10/18/2008

Chevron

6001 Bollinger Canyon Rd L4310

San Ramon CA 94583

60V20

CAT No.	Analysis Name	CAS Number	As Received Result	As Received		Dilution Factor
				Method	Units	
01728	TPH-GRO - Waters	n.a.	23,000	Detection Limit	ug/l	10
06054	BTEX+MTBE by 8260B					
02010	Methyl Tertiary Butyl Ether	1634-04-4	19.	3.	ug/l	5
05401	Benzene	71-43-2	220.	3.	ug/l	5
05407	Toluene	108-88-3	1,600.	25.	ug/l	50
05415	Ethylbenzene	100-41-4	510.	3.	ug/l	5
06310	Xylene (Total)	1330-20-7	5,800.	25.	ug/l	50

State of California Lab Certification No. 2116

All QC is compliant unless otherwise noted. Please refer to the Quality Control Summary for overall QC performance data and associated samples.

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date	Time		
01728	TPH-GRO - Waters	SW-846 8015B modified	1	09/05/2008	13:45	Carrie E Youtzy	10
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/29/2008	05:24	Michael A Ziegler	5
06054	BTEX+MTBE by 8260B	SW-846 8260B	1	08/29/2008	05:48	Michael A Ziegler	50
01146	GC VOA Water Prep	SW-846 5030B	1	09/05/2008	13:45	Carrie E Youtzy	10
01146	GC VOA Water Prep	SW-846 5030B	2	09/05/2008	13:45	Carrie E Youtzy	10
01163	GC/MS VOA Water Prep	SW-846 5030B	1	08/29/2008	05:24	Michael A Ziegler	5
01163	GC/MS VOA Water Prep	SW-846 5030B	2	08/29/2008	05:48	Michael A Ziegler	50

Quality Control Summary

Client Name: Chevron

Group Number: 1107021

Reported: 09/17/08 at 10:21 AM

Matrix QC may not be reported if site-specific QC samples were not submitted. In these situations, to demonstrate precision and accuracy at a batch level, a LCS/LCSD was performed, unless otherwise specified in the method.

Laboratory Compliance Quality Control

<u>Analysis Name</u>	<u>Blank Result</u>	<u>Blank MDL</u>	<u>Report Units</u>	<u>LCS %REC</u>	<u>LCSD %REC</u>	<u>LCS/LCSD Limits</u>	<u>RPD</u>	<u>RPD Max</u>
Batch number: 08249A08A TPH-GRO - Waters	Sample number(s): 5450358-5450365 N.D.	50.	ug/l	102	93	75-135	8	30
Batch number: 08249B20A TPH-GRO - Waters	Sample number(s): 5450366-5450372 N.D.	50.	ug/l	98	101	75-135	2	30
Batch number: D082424AA Benzene	Sample number(s): 5450361 N.D.	0.5	ug/l	94		78-119		
Batch number: Z082412AA Methyl Tertiary Butyl Ether	Sample number(s): 5450358-5450369 N.D.	0.5	ug/l	91		73-119		
Benzene	N.D.	0.5	ug/l	94		78-119		
Toluene	N.D.	0.5	ug/l	98		85-115		
Ethylbenzene	N.D.	0.5	ug/l	99		82-119		
Xylene (Total)	N.D.	0.5	ug/l	103		83-113		
Batch number: Z082414AA Methyl Tertiary Butyl Ether	Sample number(s): 5450370-5450372 N.D.	0.5	ug/l	86		73-119		
Benzene	N.D.	0.5	ug/l	88		78-119		
Toluene	N.D.	0.5	ug/l	91		85-115		
Ethylbenzene	N.D.	0.5	ug/l	91		82-119		
Xylene (Total)	N.D.	0.5	ug/l	95		83-113		

Sample Matrix Quality Control

Unspiked (UNSPK) = the sample used in conjunction with the matrix spike
Background (BKG) = the sample used in conjunction with the duplicate

<u>Analysis Name</u>	<u>MS %REC</u>	<u>MSD %REC</u>	<u>MS/MSD Limits</u>	<u>RPD</u>	<u>RPD MAX</u>	<u>BKG Conc</u>	<u>DUP Conc</u>	<u>DUP RPD</u>	<u>Dup RPD Max</u>
Batch number: 08249B20A TPH-GRO - Waters	Sample number(s): 5450366-5450372 102		63-154	UNSPK: P450374					
Batch number: D082424AA Benzene	Sample number(s): 5450361 107	103	83-128	4	30	UNSPK: P451714			
Batch number: Z082412AA Methyl Tertiary Butyl Ether	Sample number(s): 5450358-5450369 94	95	69-127	1	30	UNSPK: 5450364			
Benzene	100	100	83-128	0	30				
Toluene	104	104	83-127	0	30				
Ethylbenzene	105	105	82-129	0	30				
Xylene (Total)	107	108	82-130	1	30				

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.

Quality Control Summary

Client Name: Chevron

Group Number: 1107021

Reported: 09/17/08 at 10:21 AM

Sample Matrix Quality Control

Unspiked (UNSPK) = the sample used in conjunction with the matrix spike

Background (BKG) = the sample used in conjunction with the duplicate

Analysis Name	MS %REC	MSD %REC	MS/MSD Limits	RPD	RPD MAX	BKG Conc	DUP Conc	DUP RPD	Dup RPD Max
Batch number: Z082414AA	Sample number(s): 5450370-5450372 UNSPK: P450650								
Methyl Tertiary Butyl Ether	93	96	69-127	2	30				
Benzene	95	92	83-128	3	30				
Toluene	99	96	83-127	3	30				
Ethylbenzene	100	97	82-129	3	30				
Xylene (Total)	104	100	82-130	3	30				

Surrogate Quality Control

Surrogate recoveries which are outside of the QC window are confirmed unless attributed to dilution or otherwise noted on the Analysis Report.

Analysis Name: TPH-GRO - Waters

Batch number: 08249A08A

Trifluorotoluene-F

5450358	58*
5450359	77
5450360	115
5450361	110
5450362	81
5450363	137*
5450364	63
5450365	67
Blank	64
LCS	63
LCSD	66

Limits: 63-135

Analysis Name: TPH-GRO - Waters

Batch number: 08249B20A

Trifluorotoluene-F

5450366	199*
5450367	126
5450368	100
5450369	97
5450370	98
5450371	99
5450372	106
Blank	97
LCS	120
LCSD	119
MS	99

Limits: 63-135

Analysis Name: 8260 Master Scan (water)

Batch number: D082424AA

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.

Quality Control Summary

Client Name: Chevron
Reported: 09/17/08 at 10:21 AM

Group Number: 1107021

Surrogate Quality Control

	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
Blank	85	83	83	92
LCS	85	86	83	92
MS	85	86	83	92
MSD	83	83	81	90
Limits:	80-116	77-113	80-113	78-113

Analysis Name: BTEX+MTBE by 8260B
Batch number: Z082412AA

	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
5450358	89	84	92	89
5450359	89	84	92	90
5450360	89	84	92	90
5450361	88	83	93	91
5450362	87	82	97	90
5450363	87	84	92	93
5450364	89	84	91	89
5450365	89	83	92	89
5450366	87	83	92	90
5450367	87	83	96	91
5450368	89	85	91	89
5450369	89	84	91	88
Blank	90	83	91	88
LCS	90	86	92	91
MS	90	86	92	90
MSD	90	86	92	90
Limits:	80-116	77-113	80-113	78-113

Analysis Name: BTEX+MTBE by 8260B
Batch number: Z082414AA

	Dibromofluoromethane	1,2-Dichloroethane-d4	Toluene-d8	4-Bromofluorobenzene
5450370	89	84	87	90
5450371	88	83	87	90
5450372	88	84	91	90
Blank	90	84	91	88
LCS	90	86	92	90
MS	90	86	92	90
MSD	90	85	92	90
Limits:	80-116	77-113	80-113	78-113

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The unspiked result was more than four times the spike added.

Lancaster Laboratories Explanation of Symbols and Abbreviations

The following defines common symbols and abbreviations used in reporting technical data:

N.D.	none detected	BMQL	Below Minimum Quantitation Level
TNTC	Too Numerous To Count	MPN	Most Probable Number
IU	International Units	CP Units	cobalt-chloroplatinate units
umhos/cm	micromhos/cm	NTU	nephelometric turbidity units
C	degrees Celsius	F	degrees Fahrenheit
Cal	(diet) calories	lb.	pound(s)
meq	milliequivalents	kg	kilogram(s)
g	gram(s)	mg	milligram(s)
ug	microgram(s)	l	liter(s)
ml	milliliter(s)	ul	microliter(s)
m3	cubic meter(s)	fib >5 um/ml	fibers greater than 5 microns in length per ml
<	less than – The number following the sign is the <u>limit of quantitation</u> , the smallest amount of analyte which can be reliably determined using this specific test.		
>	greater than		
ppm	parts per million – One ppm is equivalent to one milligram per kilogram (mg/kg), or one gram per million grams. For aqueous liquids, ppm is usually taken to be equivalent to milligrams per liter (mg/l), because one liter of water has a weight very close to a kilogram. For gases or vapors, one ppm is equivalent to one microliter of gas per liter of gas.		
ppb	parts per billion		
Dry weight basis	Results printed under this heading have been adjusted for moisture content. This increases the analyte weight concentration to approximate the value present in a similar sample without moisture.		

U.S. EPA data qualifiers:

Organic Qualifiers

A	TIC is a possible aldol-condensation product
B	Analyte was also detected in the blank
C	Pesticide result confirmed by GC/MS
D	Compound quantitated on a diluted sample
E	Concentration exceeds the calibration range of the instrument
J	Estimated value
N	Presumptive evidence of a compound (TICs only)
P	Concentration difference between primary and confirmation columns >25%
U	Compound was not detected
X,Y,Z	Defined in case narrative

Inorganic Qualifiers

B	Value is <CRDL, but ≥IDL
E	Estimated due to interference
M	Duplicate injection precision not met
N	Spike amount not within control limits
S	Method of standard additions (MSA) used for calculation
U	Compound was not detected
W	Post digestion spike out of control limits
*	Duplicate analysis not within control limits
+	Correlation coefficient for MSA <0.995

Analytical test results for methods listed on the laboratories' accreditation scope meet all requirements of NELAC unless otherwise noted under the individual analysis.

Tests results relate only to the sample tested. Clients should be aware that a critical step in a chemical or microbiological analysis is the collection of the sample. Unless the sample analyzed is truly representative of the bulk of material involved, the test results will be meaningless. If you have questions regarding the proper techniques of collecting samples, please contact us. We cannot be held responsible for sample integrity, however, unless sampling has been performed by a member of our staff. This report shall not be reproduced except in full, without the written approval of the laboratory.

WARRANTY AND LIMITS OF LIABILITY – In accepting analytical work, we warrant the accuracy of test results for the sample as submitted. THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. WE DISCLAIM ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING A WARRANTY OF FITNESS FOR PARTICULAR PURPOSE AND WARRANTY OF MERCHANTABILITY. IN NO EVENT SHALL LANCASTER LABORATORIES BE LIABLE FOR INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFIT OR GOODWILL REGARDLESS OF (A) THE NEGLIGENCE (EITHER SOLE OR CONCURRENT) OF LANCASTER LABORATORIES AND (B) WHETHER LANCASTER LABORATORIES HAS BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. We accept no legal responsibility for the purposes for which the client uses the test results. No purchase order or other order for work shall be accepted by Lancaster Laboratories which includes any conditions that vary from the Standard Terms and Conditions of Lancaster Laboratories and we hereby object to any conflicting terms contained in any acceptance or order submitted by client.