



**CONESTOGA-ROVERS
& ASSOCIATES**

5900 Hollis Street, Suite A
Emeryville, California 94608
Telephone: (510) 420-0700 Fax: (510) 420-9170
www.CRAworld.com

TRANSMITTAL

DATE: May 18, 2009 REFERENCE NO.: 240897
PROJECT NAME: 4411 Foothill Boulevard., Oakland
TO: Jerry Wickham
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

RECEIVED

1:02 pm, May 20, 2009

Alameda County
Environmental Health

Please find enclosed: Draft Final
 Originals Other
 Prints


Sent via: Mail Same Day Courier
 Overnight Courier Other GeoTracker and Alameda County FTP

QUANTITY	DESCRIPTION
1	Groundwater Monitoring Report - First Quarter 2009

As Requested For Review and Comment
 For Your Use _____

COMMENTS:
If you have any questions regarding the contents of this document, please call Peter Schaefer at (510) 420-3319.

Copy to: Denis Brown, Shell Oil Products US, 20945 S. Wilmington Avenue Carson, CA 90810
Bill Phua, Foothill Blvd. LLC, P.O. Box 10664, Oakland, CA 94610

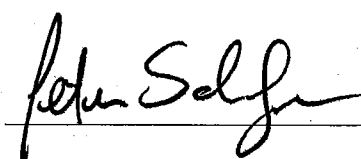Completed by: Peter Schaefer Signed: 
Filing: Correspondence File



Jerry Wickham
Alameda County Health Care Services Agency
1131 Harbor Bay Parkway, Suite 250
Alameda, California 94502-6577

Denis L. Brown
Shell Oil Products US
HSE - Environmental Services
20945 S. Wilmington Ave.
Carson, CA 90810-1039
Tel (707) 865 0251
Fax (707) 865 2542
Email denis.l.brown@shell.com

Re: Former Shell Service Station
4411 Foothill Boulevard
Oakland, California
SAP Code 135686
Incident No. 98995746
Agency Site No. RO0000415

Dear Mr. Wickham:

The attached document is provided for your review and comment. Upon information and belief, I declare, under penalty of perjury, that the information contained in the attached document is true and correct.

If you have any questions or concerns, please call me at (707) 865-0251.

Sincerely,

A handwritten signature in black ink, appearing to read "Denis L. Brown", is written over a horizontal line.

Denis L. Brown
Project Manager



GROUNDWATER MONITORING REPORT - FIRST QUARTER 2009

**FORMER SHELL SERVICE STATION
4411 FOOTHILL BOULEVARD
OAKLAND, CALIFORNIA**

**SAP CODE 135686
INCIDENT NO. 98995746
AGENCY NO. RO0000415**

MAY 18, 2009

REF. NO. 240897 (5)

This report is printed on recycled paper.

**Prepared by:
Conestoga-Rovers
& Associates**

5900 Hollis Street, Suite A
Emeryville, California
U.S.A. 94608

Office: (510) 420-0700
Fax: (510) 420-9170

web: <http://www.CRAworld.com>

TABLE OF CONTENTS

	<u>Page</u>
1.0 INTRODUCTION.....	1
1.1 SITE INFORMATION	1
2.0 SITE ACTIVITIES, FINDINGS, AND DISCUSSION.....	2
2.1 CURRENT QUARTER'S ACTIVITIES.....	2
2.2 CURRENT QUARTER'S FINDINGS	2
2.3 PROPOSED ACTIVITIES FOR NEXT QUARTER	2

LIST OF FIGURES
(Following Text)

FIGURE 1 VICINITY MAP

FIGURE 2 GROUNDWATER CONTOUR AND CHEMICAL CONCENTRATION MAP

LIST OF APPENDICES

APPENDIX A BLAINE TECH SERVICES, INC. - GROUNDWATER MONITORING
REPORT

1.0 INTRODUCTION

Conestoga-Rovers & Associates (CRA) prepared this report on behalf of Equilon Enterprises LLC dba Shell Oil Products US (Shell) in accordance with the quarterly reporting requirements of 23 CCR 2652d.

1.1 SITE INFORMATION

Site Address	4411 Foothill Boulevard, Oakland
Site Use	Strip Mall
Shell Project Manager	Denis Brown
CRA Project Manager	Peter Schaefer
Lead Agency and Contact	ACHCSA, Jerry Wickham
Agency Case No.	RO0000415
Shell SAP Code	135686
Shell Incident No.	98995746

Date of most recent agency correspondence was March 10, 2009.

2.0 SITE ACTIVITIES, FINDINGS, AND DISCUSSION

2.1 CURRENT QUARTER'S ACTIVITIES

Blaine Tech Services, Inc. (Blaine) gauged and sampled the wells according to the established monitoring program for this site.

CRA prepared a vicinity map (Figure 1) and a groundwater contour and chemical concentration map (Figure 2). Blaine's report, presenting the analytical data, is included in Appendix A.

Alameda County Health Care Services Agency's (ACHCSA's) March 10, 2009 letter approved CRA's February 25, 2009 *Sub-Slab Soil Vapor Probe Installation and Soil Vapor Sampling Work Plan*.

2.2 CURRENT QUARTER'S FINDINGS

Groundwater Flow Direction	Southwesterly
Hydraulic Gradient	0.006
Depth to Water	8.75 to 9.30 feet below top of well casing

2.3 PROPOSED ACTIVITIES FOR NEXT QUARTER

Blaine will gauge and sample wells according to the established monitoring program for this site.


As requested in ACHCSA's March 10, 2009 letter, CRA will implement the work plan for installing and sampling sub-slab soil vapor probes within the current laundromat building to assess the potential for soil vapor intrusion into indoor air, sample soil vapor probes V-1 through V-6, and provide a report detailing these activities to ACHCSA by June 29, 2009.

Off-site wells S-10, S-11, and S-12 and soil vapor probe V-12 will be installed on the adjacent off-site property (4340 Bond St.). Construction of a parking lot on the site has been completed. CRA has contacted the owner (Mi Puebla Food Center), who is cooperative, but we have not yet received a signed access agreement. CRA will schedule the installation of the wells and vapor probe following receipt of a completed access

agreement from the property owner and appropriate drilling permits from Alameda County Public Works Agency.

Due to reluctance of the property owner at 4320 Bond Street to allow access to their property to install wells, an access request was sent to the owners of 1724/1726/1728 High Street on May 20, 2008. As of this date, the property owners of 1724/1726/1728 High Street have not responded. Based on current soil vapor and groundwater monitoring results from soil vapor probes V-8 through V-10 and groundwater monitoring well S-9, installation of proposed well S-13 on the 1724/1726/1728 High Street property is not currently warranted and our efforts to obtain an access agreement have been suspended.


All of Which is Respectfully Submitted,
CONESTOGA-ROVERS & ASSOCIATES




Peter Schaefer, CHG, CEG



Aubrey K. Cool, PG



FIGURES

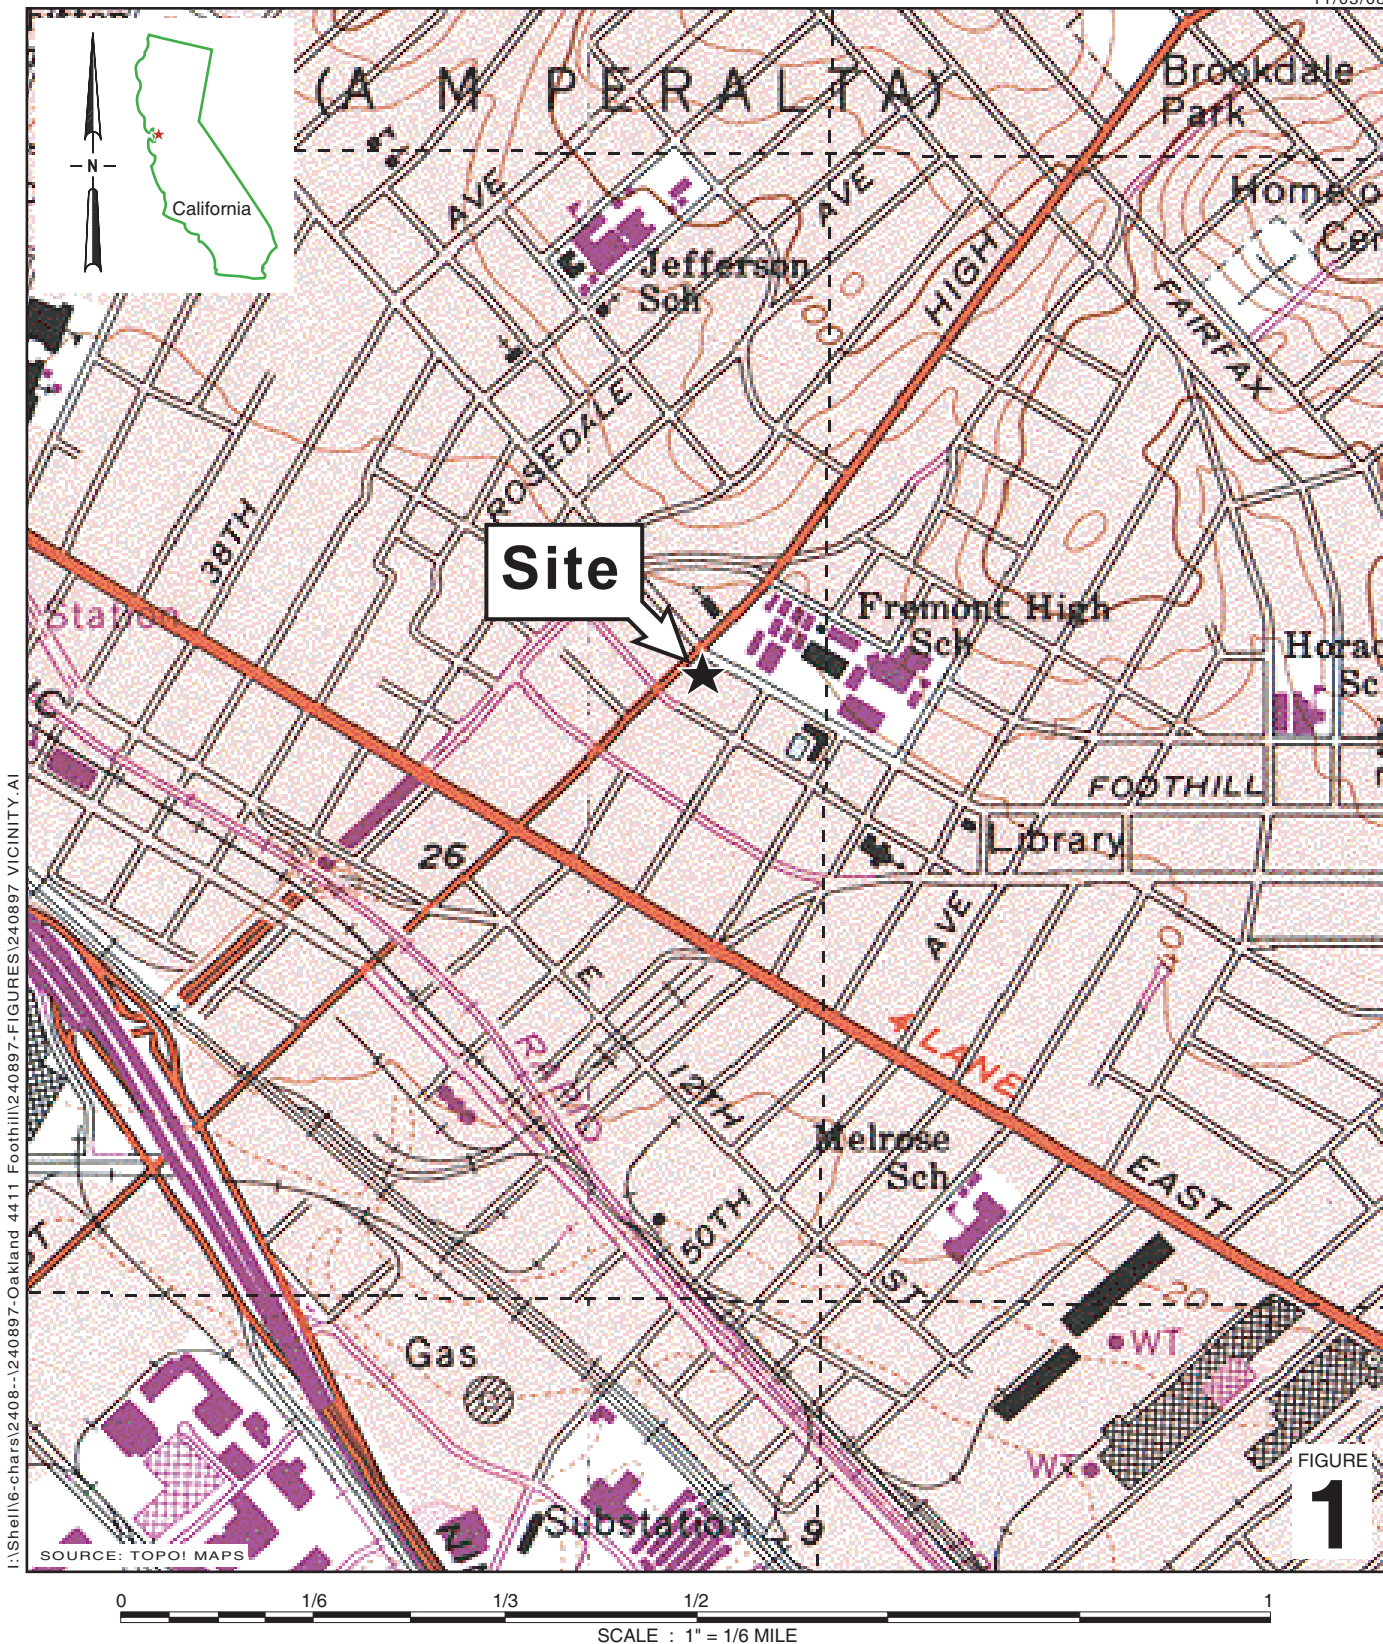


Former Shell Service Station
 4411 Foothill Boulevard
 Oakland, California



**CONESTOGA-ROVERS
 & ASSOCIATES**

Vicinity Map

I:\Shell\G-chars\24089-1240897-Oakland 4411 Foothill\240897-REPORTS\240897-RPT5-1009\240897 10M09-GW.DWG

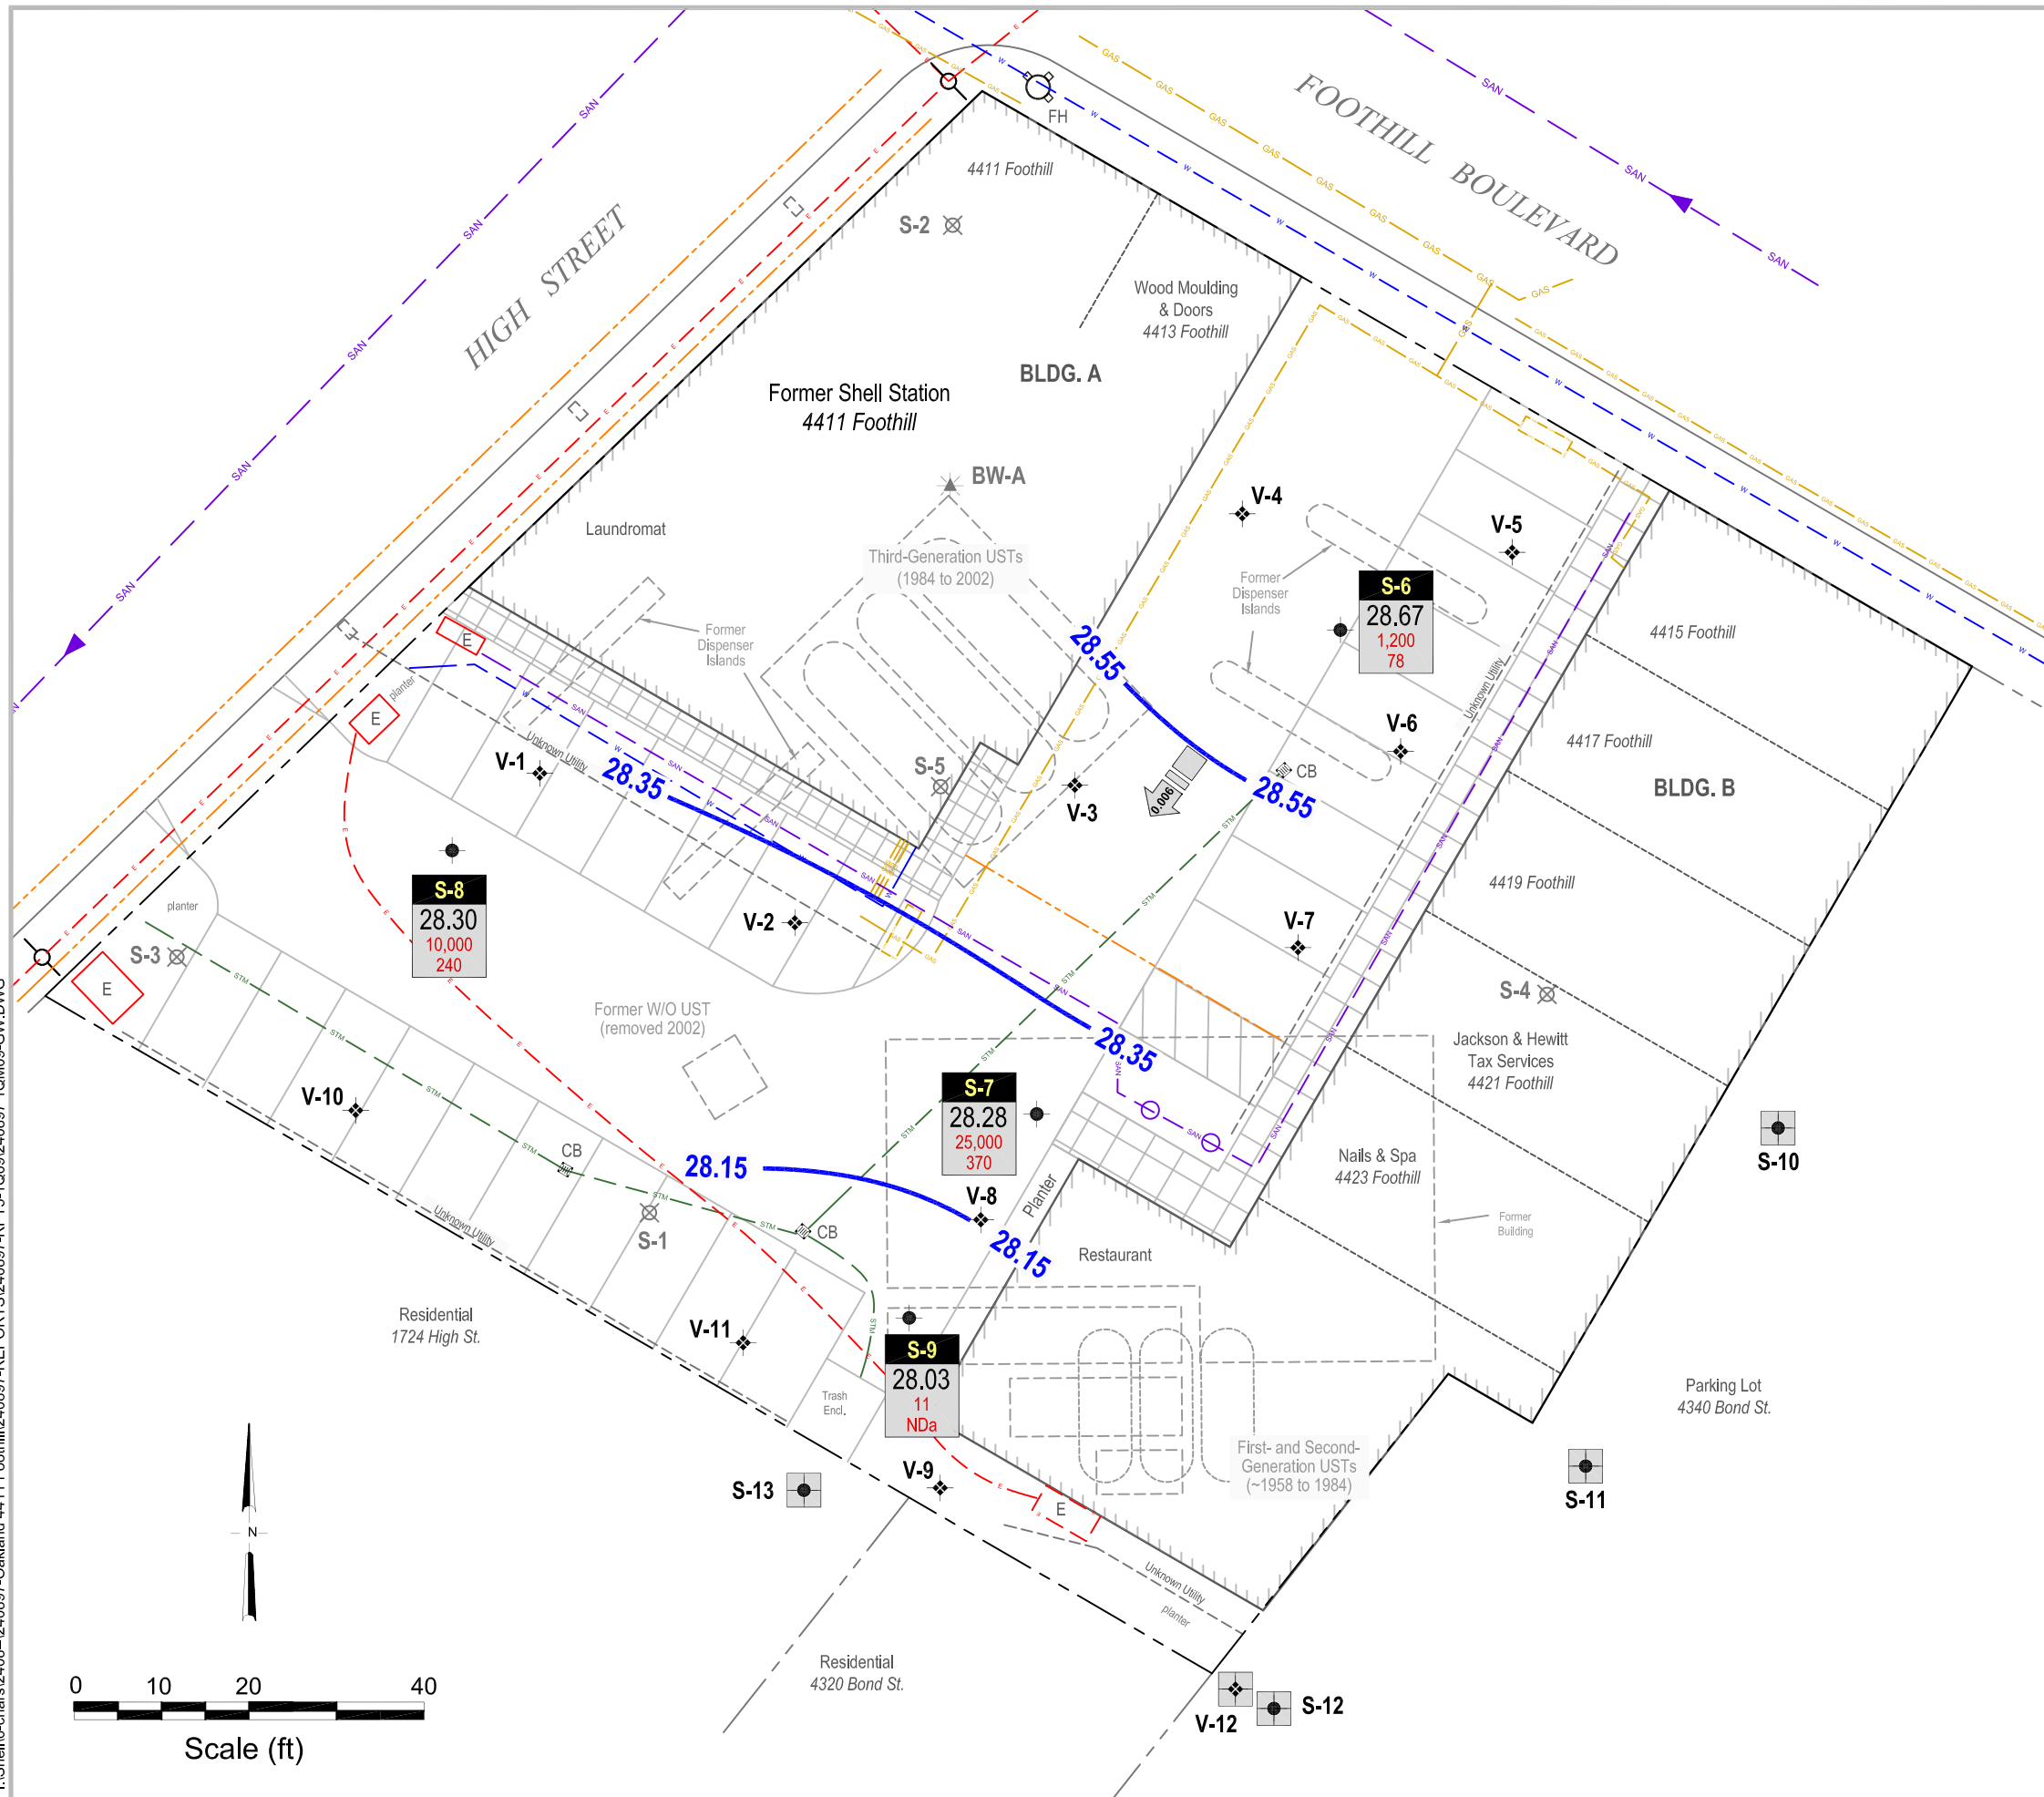

EXPLANATION

- V-12 Proposed soil vapor probe
- S-10 Proposed monitoring well location
- S-6 Monitoring well location
- V-1 Soil vapor probe location
- S-1 Destroyed monitoring well location
- BW-A Destroyed tank backfill well location
- Electrical line (E)
- Telecommunications line (T)
- Gas line (GAS)
- Water line (W)
- Sanitary Sewer line (SAN)
- Storm drain line (STM)
- FH Fire hydrant
- CB Catch basin
- Manhole
- Power pole
- Flow direction
- Groundwater flow direction and gradient
- Groundwater elevation contour, in feet above mean sea level (msl)
- Well** Well designation
- ELEV.** Groundwater elevation, in feet above msl
- Benzene** Benzene and MTBE concentrations are in parts per micrograms per liter
- MTBE**

Notes:
NDa = Elevated reporting limit; see laboratory report for details

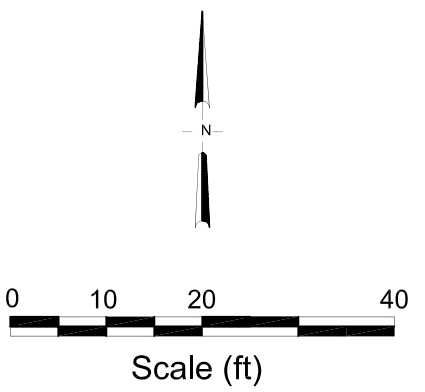


FIGURE 2

APPENDIX A

BLAINE TECH SERVICES, INC. -
GROUNDWATER MONITORING REPORT

BLAINE
TECH SERVICES INC.

GROUNDWATER SAMPLING SPECIALISTS
SINCE 1985

February 26, 2009

Denis Brown
Shell Oil Products US
20945 South Wilmington Avenue
Carson, CA 90810

First Quarter 2009 Groundwater Monitoring at
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Monitoring performed on February 5, 2009

Groundwater Monitoring Report **090205-JP-1**

This report covers the routine monitoring of groundwater wells at this former Shell-branded facility. In accordance with standard procedures that conform to Regional Water Quality Control Board requirements, routine field data collection includes depth to water, total well depth, thickness of any separate immiscible layer, water column volume, calculated purge volume (if applicable), elapsed evacuation time (if applicable), total volume of water removed (if applicable), and standard water parameter instrument readings. Sample material is collected, contained, stored, and transported to the laboratory in conformance with EPA standards. Purge water (if applicable) is, likewise, collected and transported to the Martinez Refining Company.

Basic field information is presented alongside analytical values excerpted from the laboratory report in the cumulative table of **WELL CONCENTRATIONS**. The full analytical report for the most recent samples and the field data sheets are attached to this report.

At a minimum, Blaine Tech Services, Inc. field personnel are certified on completion of a forty-hour Hazardous Materials and Emergency Response training course per 29 CFR 1910.120. Field personnel are also enrolled in annual eight-hour refresher courses.

SAN JOSE

SACRAMENTO

LOS ANGELES

SAN DIEGO

SEATTLE

1680 ROGERS AVENUE SAN JOSE, CA (408) 573-0555 FAX (408) 573-7771 LIC. 746684 www.blainetech.com

Blaine Tech Services, Inc. conducts sampling and documentation assignments of this type as an independent third party. Our activities at this site consisted of objective data and sample collection only. No interpretation of analytical results, defining of hydrological conditions or formulation of recommendations was performed.

Please call if you have any questions.

Yours truly,

Mike Ninokata
Project Manager

MN/jb

attachments: Cumulative Table of WELL CONCENTRATIONS
Certified Analytical Report
Field Data Sheets

cc: Anni Kreml
Conestoga-Rovers & Associates
5900 Hollis Street, Suite A
Emeryville, CA 94608

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-1	12/18/1992	41,000	NA	3,100	1,100	1,200	8,700	NA	NA	NA	NA	NA	NA	NA	NA	38.31	9.06	NA	NA
S-1	05/26/1993	39,000	6,000	1,300	4,700	1,500	7,800	NA	NA	NA	NA	NA	NA	NA	NA	38.31	NA	NA	NA
S-1	05/28/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.31	12.13	26.18	NA
S-1	06/03/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.31	8.89	29.42	NA
S-1	06/08/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.31	8.80	29.51	NA
S-1	09/21/1993	34,000	5,900	480	5,000	3,800	18,000	NA	NA	NA	NA	NA	NA	NA	NA	38.31	10.40	27.91	NA
S-1	12/14/1993	25,000	13,000	1,100	5,000	2,200	11,000	NA	NA	NA	NA	NA	NA	NA	NA	38.31	9.66	28.65	NA
S-1	03/17/1994	57,000	1,600	1,300	5,400	2,100	11,000	NA	NA	NA	NA	NA	NA	NA	NA	38.31	8.20	30.11	NA
S-1	06/16/1994	57,000	3,000	1,600	6,000	2,000	13,000	NA	NA	NA	NA	NA	NA	NA	NA	38.31	9.41	28.90	NA
S-1	09/22/1994	39,000	ND	1,300	2,100	1,500	7,100	NA	NA	NA	NA	NA	NA	NA	NA	38.31	11.13	27.18	NA
S-1 a	12/15/1994	30,000	3,100	1,100	4,700	1,600	10,000	NA	NA	NA	NA	NA	NA	NA	NA	38.31	7.15	31.16	NA
S-1 a,b	03/30/1995	30,000	3,100	1,400	4,000	1,500	11,000	NA	NA	NA	NA	NA	NA	NA	NA	38.31	6.09	32.22	NA
S-1	06/20/1995	28,000	2,100	1,100	2,300	1,100	8,300	NA	NA	NA	NA	NA	NA	NA	NA	38.31	7.30	31.01	NA
S-1	09/20/1995	40,000	2,600	840	3,600	1,300	8,600	NA	NA	NA	NA	NA	NA	NA	NA	38.31	10.02	28.29	NA
S-1 a	12/06/1995	38,000	6,400	920	3,200	1,500	9,400	NA	NA	NA	NA	NA	NA	NA	NA	38.31	11.64	26.67	NA
S-1	03/21/1996	48,000	NA	700	4,200	1,100	8,600	NA	NA	NA	NA	NA	NA	NA	NA	38.31	6.87	31.44	NA
S-1	09/06/1996	41,000	4,100	830	2,600	2,100	12,000	<250	NA	NA	NA	NA	NA	NA	NA	38.31	10.50	27.81	NA
S-1	12/19/1996	40,000	2,500	540	3,100	1,900	9,800	920	NA	NA	NA	NA	NA	NA	NA	38.31	8.24	30.07	NA
S-1	03/17/1997	42,000	4,700	610	2,700	1,700	11,000	3,500	NA	NA	NA	NA	NA	NA	NA	38.31	7.26	31.05	NA
S-1	06/11/1997	28,000	4,000	540	960	1,300	5,300	220	NA	NA	NA	NA	NA	NA	NA	38.31	10.69	27.62	NA
S-1 (D)	06/11/1997	30,000	3,900	580	1,000	1,400	5,400	<125	NA	NA	NA	NA	NA	NA	NA	38.31	10.69	27.62	NA
S-1	09/17/1997	27,000	4,400	310	1,200	1,900	9,000	170	NA	NA	NA	NA	NA	NA	NA	38.31	10.26	28.05	NA
S-1 (D)	09/17/1997	27,000	4,400	270	1,200	1,900	9,000	170	NA	NA	NA	NA	NA	NA	NA	38.31	10.26	28.05	NA
S-1	12/11/1997	21,000	3,400	350	820	1,500	6,500	<125	NA	NA	NA	NA	NA	NA	NA	38.31	6.96	31.35	NA
S-1	03/16/1998	25,000	2,500	250	820	670	5,000	<125	NA	NA	NA	NA	NA	NA	NA	38.31	6.00	32.31	NA
S-1 (D)	03/16/1998	26,000	NA	250	840	720	5,100	<125	NA	NA	NA	NA	NA	NA	NA	38.31	6.00	32.31	5.3/3.7
S-1	06/23/1998	<1,000	230	280	14	23	15	6,100	7,800	NA	NA	NA	NA	NA	NA	38.31	6.31	32.00	3.8/2.4
S-1	09/01/1998	26,000	2,300	370	620	1,300	33	1,400	120	NA	NA	NA	NA	NA	NA	38.31	9.17	29.14	1.4/2.6
S-1	12/30/1998	29,900	1,970	174	732	1,680	5,740	182	NA	NA	NA	NA	NA	NA	NA	38.31	8.99	29.32	1.6/2.0
S-1	03/30/1999	14,200	1,150	1,360	260	1,070	3,580	<500	90.0	NA	NA	NA	NA	NA	NA	38.31	6.10	32.21	1.2/1.8
S-1	03/31/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.31	7.84	30.47	NA
S-1	06/14/1999	20,200	4,280	135	407	825	5,000	705	NA	NA	NA	NA	NA	NA	NA	38.31	7.94	30.37	1.4/2.1
S-1	09/30/1999	18,300	3,120	189	531	1,250	4,740	322	NA	NA	NA	NA	NA	NA	NA	38.31	10.04	28.27	4.3/2.0
S-1	12/22/1999	2,450	444 a	50.2	97.5	139	458	133	NA	NA	NA	NA	NA	NA	NA	38.31	9.42	28.89	1.8/2.3

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-1	03/09/2000	1,230 d	1,200 a	21.2 d	115 d	116 d	411 d	45.1 d	NA	NA	NA	NA	NA	NA	NA	38.30	6.21	32.09	2.0/2.9
S-1	06/20/2000	755	352 a	26.0	48.4	43.1	230	71.5	NA	NA	NA	NA	NA	NA	NA	38.30	9.18	29.12	2.0/2.4
S-1	09/05/2000	2,980	783 a	43.5	117	168	871	192	NA	NA	NA	NA	NA	NA	NA	38.30	10.14	28.16	0.6/0.3
S-1	12/04/2000	399	238 a	5.34	14.6	36.2	106	24.9	NA	NA	NA	NA	NA	NA	NA	38.30	10.10	28.20	8.6/9.8
S-1	12/12/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.30	9.22	29.08	NA
S-1	03/08/2001	2,940	1,390 a	49.6	52.9	21.8	749	87.6	NA	NA	NA	NA	NA	NA	NA	38.30	5.84	32.46	2.7e
S-1	06/07/2001	10,000	1,400	120	370	680	2,400	150	NA	NA	NA	NA	NA	NA	NA	38.30	8.80	29.50	6.2/2.2
S-1	09/13/2001	240	<200	1.8	8.9	16	53	NA	17	NA	NA	NA	NA	NA	NA	38.30	10.25	28.05	7.8/8.9
S-1	11/19/2001	1,400	<300	14	42	110	260	NA	27	NA	NA	NA	NA	NA	NA	38.30	9.87	28.43	7.7/7.3
S-1	03/18/2002	7,500	<300	40	370	560	2,000	NA	20	NA	NA	NA	NA	NA	NA	38.30	5.08	33.22	5.6/6.1
S-1	06/19/2002	1,000	180	4.7	36	68	250	NA	14	NA	NA	NA	NA	NA	NA	38.30	9.26	29.04	NA
S-1	09/11/2002	2,100	<350	8.1	68	180	820	NA	7.1	NA	NA	NA	NA	NA	NA	38.30	10.54	27.76	6.5
S-1	12/11/2002	4,100	<500	16	93	310	900	NA	<20	NA	NA	NA	NA	NA	NA	38.04	9.97	28.07	8.0
S-1	03/11/2003	14,000	<1,600	71	470	1,000	3,300	NA	<50	NA	NA	NA	NA	NA	NA	38.04	7.31	30.73	5.2
S-1	06/10/2003	1,700	110 a	7.7	44	190	340	NA	4.5	NA	NA	NA	NA	NA	NA	38.04	8.14	29.90	14.0
S-1	09/09/2003	3,200	96 a	11	110	350	1,100	NA	5.8	NA	NA	NA	NA	NA	NA	38.04	9.31	28.73	7.5
S-1	12/09/2003	6,000	1,000 a	20	170	530	1,700	NA	6.1	NA	NA	NA	NA	NA	NA	38.04	7.24	30.80	28.6
S-1	03/09/2004	390	300 a	5.8	30	67	160	NA	5.6	NA	NA	NA	NA	NA	NA	38.04	5.56	32.48	6.4
S-1	06/08/2004	5,600	2,500 a	11	140	660	1,900	NA	5.0	NA	NA	NA	NA	NA	NA	38.04	8.82	29.22	30.0
S-1	09/07/2004	<50	130 i	<0.50	<0.50	<0.50	<1.0	NA	0.75	<2.0	<2.0	<2.0	<5.0	NA	NA	38.04	9.84	28.20	14.4
S-1	12/06/2004	Unable to sample		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.04	9.20	28.84	NA
S-1	12/15/2004	560	120 i	2.2	26	67	220	NA	1.4	NA	NA	NA	NA	NA	NA	38.04	5.39	32.65	31.7
S-1	03/07/2005	12,000	460 i	12	310	830	2,600	NA	<5.0	NA	NA	NA	NA	NA	NA	38.04	5.77	32.27	16.1
S-1	06/10/2005	13,000	1,200 i	25	310	1,200	3,300	NA	<10	NA	NA	NA	NA	NA	NA	38.04	5.39	32.65	0.17
S-2	05/28/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.51	29.28	NA
S-2	06/03/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.51	29.28	NA
S-2	06/08/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.57	29.22	NA
S-2	06/29/1993	1,300	NA	290	35	38	130	NA	NA	NA	NA	NA	NA	NA	NA	38.79	NA	NA	NA
S-2	09/21/1993	3,300	NA	870	24	190	120	NA	NA	NA	NA	NA	NA	NA	NA	38.79	10.54	28.25	NA
S-2	12/14/1993	1,300	NA	400	16	36	27	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.76	29.03	NA
S-2	03/17/1994	4,500	NA	610	27	92	110	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.92	28.87	NA
S-2 (D)	03/17/1994	4,000	NA	610	26	93	120	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.92	28.87	NA
S-2	06/16/1994	2,800	NA	690	45	97	140	NA	NA	NA	NA	NA	NA	NA	NA	38.79	10.11	28.68	NA

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-2	09/22/1994	4,000	NA	630	94	64	230	NA	NA	NA	NA	NA	NA	NA	NA	38.79	10.51	28.28	NA
S-2	12/15/1994	1,600	NA	450	300	67	130	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.12	29.67	NA
S-2 b	03/30/1995	8,200	NA	2,800	190	240	700	NA	NA	NA	NA	NA	NA	NA	NA	38.79	7.86	30.93	NA
S-2	06/20/1995	9,600	NA	2,600	160	170	500	NA	NA	NA	NA	NA	NA	NA	NA	38.79	9.51	29.28	NA
S-2	09/20/1995	4,200	NA	920	45	98	140	NA	NA	NA	NA	NA	NA	NA	NA	38.79	10.06	28.73	NA
S-2	12/06/1995	<5,000	NA	790	67	64	130	NA	NA	NA	NA	NA	NA	NA	NA	38.79	10.52	28.27	NA
S-2	03/21/1996	3,700	NA	850	45	96	170	NA	NA	NA	NA	NA	NA	NA	NA	38.79	8.60	30.19	NA
S-2	09/06/1996	2,400	NA	500	33	39	84	490	NA	NA	NA	NA	NA	NA	NA	38.79	10.50	28.29	NA
S-2	12/19/1996	1,200	NA	330	15	24	31	430	NA	NA	NA	NA	NA	NA	NA	38.79	9.40	29.39	NA
S-2	03/17/1997	4,100	NA	780	42	110	120	2,200	NA	NA	NA	NA	NA	NA	NA	38.79	9.82	28.97	NA
S-2	06/11/1997	760	NA	120	<5.0	7.0	7.6	900	NA	NA	NA	NA	NA	NA	NA	38.79	10.18	28.61	NA
S-2	09/17/1997	1,500	NA	230	8.6	40	27	480	NA	NA	NA	NA	NA	NA	NA	38.79	9.90	28.89	NA
S-2	12/11/1997	1,300	NA	240	15	33	57	280	NA	NA	NA	NA	NA	NA	NA	38.79	8.27	30.52	NA
S-2	03/16/1998	1,100	NA	830	48	<10	<10	4,700	4,800	NA	NA	NA	NA	NA	NA	38.79	7.97	30.82	7.0/4.3
S-2	06/23/1998	720	NA	46	6.8	50	68	50	8.8	NA	NA	NA	NA	NA	NA	38.79	8.20	30.59	4.2/3.8
S-2 (D)	06/23/1998	810	NA	49	7.1	50	70	49	8.8	NA	NA	NA	NA	NA	NA	38.79	8.20	30.59	4.2/3.8
S-2	09/01/1998	<2,000	NA	170	<20	<20	<20	9,300	12,000	NA	NA	NA	NA	NA	NA	38.79	9.85	28.94	1.9/1.6
S-2	12/30/1998	<5,000	NA	369	<50	<50	<50	14,300	NA	NA	NA	NA	NA	NA	NA	38.79	9.84	28.95	2.0/1.8
S-2	03/30/1999	<2,000	NA	234	<20.0	27.4	36.9	49,200	53,000	NA	NA	NA	NA	NA	NA	38.79	8.41	30.38	2.1/1.8
S-2	03/31/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.79	8.67	30.12	NA
S-2	06/14/1999	<1,000	NA	175	<10.0	<10.0	11.1	67,500	NA	NA	NA	NA	NA	NA	NA	38.79	9.80	28.99	NA
S-2	09/30/1999	678	177 a	135	8.22	14.9	25.8	17,100	17,000 c	NA	NA	NA	NA	NA	NA	38.79	10.58	28.21	5.1/4.8
S-2	12/22/1999	316	142 a	55.8	10.1	5.26	10.4	9,410	8,810	NA	NA	NA	NA	NA	NA	38.79	10.13	28.66	9.6/5.2
S-2	03/09/2000	2,670	630 a	1,190 d	62.7	84.1	125	29,200 d	31,400 c	NA	NA	NA	NA	NA	NA	38.78	7.88	30.90	7.6/5.0
S-2	06/20/2000	<5,000	401 a	348	<50.0	50.4	127	35,800	33,900 c	NA	NA	NA	NA	NA	NA	38.78	10.27	28.51	1.9/2.2
S-2	09/05/2000	<5,000	373 a	106	<50.0	<50.0	<50.0	25,800	37,100 c	NA	NA	NA	NA	NA	NA	38.78	10.19	28.59	0.5/1.6
S-2	12/04/2000	<250	1,730 a	4.37	<2.50	<2.50	<2.50	4,500	5,130 c	NA	NA	NA	NA	NA	NA	38.78	10.30	28.48	10.6/9.4
S-2	12/12/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	38.78	9.66	29.12	NA
S-2	03/08/2001	<2,500	<51.3	318	45.7	53.5	88.5	15,500	17,500	NA	NA	NA	NA	NA	NA	38.78	8.57	30.21	2.7e
S-2	06/07/2001	18,000	11,000	450	170	390	2,200	13,000	18,000	NA	NA	NA	NA	NA	NA	38.78	9.39	29.39	1.1/2.0
S-2	09/13/2001	13,000	<5,000	140	110	350	1,400	NA	9,200	NA	NA	NA	NA	NA	NA	38.78	10.34	28.44	11.0/4.5
S-2	11/19/2001	15,000	8,700	71	27	86	330	NA	7,500	NA	NA	NA	NA	NA	NA	38.78	9.90	28.88	5.0/3.1
S-2	03/18/2002	3,700	14,000	93	<20	35	100	NA	7,500	NA	NA	NA	NA	NA	NA	38.78	9.91	28.87	0.9/4.2
S-2	06/19/2002	2,100	<2,000	92	<10	24	50	NA	4,700	NA	NA	NA	NA	NA	NA	38.78	9.98	28.80	NA

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-2	09/11/2002	2,100	<450	54	<5.0	19	55	NA	1,900	NA	NA	NA	NA	NA	NA	38.78	10.25	28.53	3.5
S-2	12/11/2002	570	1,900	9.4	<2.5	7.2	14	NA	1,100	NA	NA	NA	NA	NA	NA	38.47	9.99	28.48	2.0
S-2	03/11/2003	2,900	<1,800	150	5.5	54	84	NA	870	NA	NA	NA	NA	NA	NA	38.47	9.25	29.22	2.4
S-2	06/10/2003	2,200	840 a	83	<5.0	22	52	NA	970	NA	NA	NA	NA	NA	NA	38.47	9.20	29.27	5.0
S-2	09/09/2003	1,200	270 a	57	<2.5	11	33	NA	740	NA	NA	NA	NA	NA	NA	38.47	9.70	28.77	3.7
S-2	12/09/2003	3,100	1,900 a	84	<5.0	45	90	NA	660	NA	NA	NA	NA	NA	NA	38.47	9.31	29.16	24.21
S-2	03/09/2004	1,600	990 a	140	<5.0	31	49	NA	610	NA	NA	NA	NA	NA	NA	38.47	8.24	30.23	2.6
S-2	06/08/2004	640	400 a	40	<2.5	4.2	6.6	NA	460	NA	NA	NA	NA	NA	NA	38.47	9.40	29.07	8.2
S-2	09/07/2004	<100	240 i	6.6	<1.0	1.3	2.3	NA	140	<4.0	<4.0	<4.0	450	NA	NA	38.47	9.78	28.69	2.4
S-2	12/06/2004	260	140 a	26	<1.0	2.0	<2.0	NA	270	NA	NA	NA	NA	NA	NA	38.47	9.45	29.02	8.5
S-2	03/07/2005	2,300	450 i	100	<5.0	11	<10	NA	570	NA	NA	NA	NA	NA	NA	38.47	7.82	30.65	16.7
S-2	06/10/2005	<2,500	550 a	200	<25	<25	<50	NA	630	NA	NA	NA	NA	NA	NA	38.47	8.37	30.10	0.70

S-3	05/28/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.33	8.45	28.88	NA
S-3	06/03/1993	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.33	8.36	28.97	NA
S-3	01/19/1900	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.33	8.41	28.92	NA
S-3	06/29/1993	29,000	NA	1,500	1,800	950	6,200	NA	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3	09/21/1993	15,000	NA	900	2,200	2,600	11,000	NA	NA	NA	NA	NA	NA	NA	NA	37.33	10.08	27.25	NA
S-3	12/94/1993	20,000	NA	1,100	2,400	1,800	8,500	NA	NA	NA	NA	NA	NA	NA	NA	37.33	8.80	28.53	NA
S-3	03/17/1994	14,000	NA	580	190	750	1,700	NA	NA	NA	NA	NA	NA	NA	NA	37.33	8.34	28.99	NA
S-3	06/16/1994	20,000	NA	700	690	1,400	4,100	NA	NA	NA	NA	NA	NA	NA	NA	37.33	9.12	28.21	NA
S-3 (D)	06/16/1994	19,000	NA	680	560	1,300	3,700	NA	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3	09/22/1994	24,000	NA	630	1,100	1,400	5,700	NA	NA	NA	NA	NA	NA	NA	NA	37.33	10.27	27.06	NA
S-3 (D)	09/22/1994	25,000	NA	720	1,100	1,500	6,100	NA	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3	12/15/1994	18,000	NA	520	800	1,100	4,200	NA	NA	NA	NA	NA	NA	NA	NA	37.33	7.81	29.52	NA
S-3 (D)	12/15/1994	23,000	NA	1,000	1,900	2,000	8,600	NA	NA	NA	NA	NA	NA	NA	NA	37.33	7.06	30.27	NA
S-3 b	03/30/1995	8,800	NA	360	730	700	3,700	NA	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3 (D)	03/30/1995	7,600	NA	330	570	600	2,600	NA	NA	NA	NA	NA	NA	NA	NA	37.33	8.15	29.18	NA
S-3	06/20/1995	9,600	NA	510	170	960	1,700	NA	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3 (D)	06/20/1995	9,800	NA	500	170	950	1,700	NA	NA	NA	NA	NA	NA	NA	NA	37.33	9.32	28.01	NA
S-3	09/20/1995	21,000	NA	400	560	1,300	4,600	NA	NA	NA	NA	NA	NA	NA	NA	37.33	10.53	26.80	NA
S-3	12/06/1995	24,000	NA	630	1,400	1,400	6,000	NA	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3 (D)	12/06/1995	22,000	NA	630	1,200	1,400	5,500	NA	NA	NA	NA	NA	NA	NA	NA	37.33	7.32	30.01	NA
S-3	03/21/1996	9,100	NA	290	110	490	1,600	NA	NA	NA	NA	NA	NA	NA	NA	37.33	7.32	30.01	NA

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-3 (D)	03/21/1996	11,000	NA	310	250	540	2,100	NA	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3	09/06/1996	15,000	NA	440	300	1,100	3,000	500	NA	NA	NA	NA	NA	NA	NA	37.33	10.10	27.23	NA
S-3 (D)	09/06/1996	11,000	NA	490	170	820	1,500	700	NA	NA	NA	NA	NA	NA	NA	37.33	NA	NA	NA
S-3	12/19/1996	12,000	NA	600	380	850	2,500	380	NA	NA	NA	NA	NA	NA	NA	37.33	8.36	28.97	NA
S-3 (D)	12/19/1996	12,000	NA	590	380	830	2,500	540	NA	NA	NA	NA	NA	NA	NA	37.33	8.36	28.97	NA
S-3	03/17/1997	12,000	NA	520	140	740	1,400	320	NA	NA	NA	NA	NA	NA	NA	37.33	8.57	28.76	NA
S-3 (D)	03/17/1997	9,600	NA	500	100	680	1,100	<250	NA	NA	NA	NA	NA	NA	NA	37.33	8.57	28.76	NA
S-3	06/11/1997	9,600	NA	510	94	740	1,100	410	NA	NA	NA	NA	NA	NA	NA	37.33	9.26	28.07	NA
S-3	09/17/1997	21,000	NA	140	560	1,800	7,200	130	NA	NA	NA	NA	NA	NA	NA	37.33	9.62	27.71	NA
S-3	12/11/1997	24,000	NA	530	970	1,600	6,900	950	NA	NA	NA	NA	NA	NA	NA	37.33	7.34	29.99	NA
S-3 (D)	12/11/1997	29,000	NA	520	1,000	1,600	7,300	970	NA	NA	NA	NA	NA	NA	NA	37.33	7.34	29.99	NA
S-3	03/16/1998	29,000	NA	840	810	1,700	6,000	<250	NA	NA	NA	NA	NA	NA	NA	37.33	5.75	31.58	3.0/3.4
S-3	06/23/1998	3,800	NA	90	220	240	1,400	<50	NA	NA	NA	NA	NA	NA	NA	37.33	5.98	31.35	4.2/2.0
S-3	09/01/1998	9,600	NA	480	120	870	1,800	490	<50	NA	NA	NA	NA	NA	NA	37.33	8.98	28.35	1.9/2.8
S-3 (D)	09/01/1998	9,200	NA	420	110	800	1,700	110	<50	NA	NA	NA	NA	NA	NA	37.33	8.98	28.35	1.9/2.8
S-3	12/30/1998	7,660	NA	240	103	410	834	64.9	NA	NA	NA	NA	NA	NA	NA	37.33	9.11	28.22	1.8/1.6
S-3	03/30/1999	2,070	NA	195	10.0	<5.00	48.6	354	64.6	NA	NA	NA	NA	NA	NA	37.33	6.95	30.38	1.3/1.5
S-3	03/31/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.33	7.48	29.85	NA
S-3	06/14/1999	1,250	NA	37.4	17.4	110	109	118	NA	NA	NA	NA	NA	NA	NA	37.33	8.85	28.48	NA
S-3	09/30/1999	8,270	2,020 a	226	113	686	1,440	184	NA	NA	NA	NA	NA	NA	NA	37.33	9.66	27.67	3.5/2.8
S-3	12/22/1999	9,530	2,270 a	207	132	603	1,450	616	NA	NA	NA	NA	NA	NA	NA	37.33	9.50	27.83	0.98/0.8
S-3	03/09/2000	2,290 d	1,600 a	84.5d	17.0 d	104 d	105 d	29.3 d	NA	NA	NA	NA	NA	NA	NA	37.30	6.25	31.05	1.0/1.4
S-3	06/20/2000	5,570	2,900 a	117	41.6	395	393	354	NA	NA	NA	NA	NA	NA	NA	37.30	9.67	27.63	1.8/2.0
S-3	09/05/2000	6,930	1,600 a	127	85.5	354	535	509	NA	NA	NA	NA	NA	NA	NA	37.30	9.49	27.81	1.1/1.9
S-3	12/04/2000	8,390	1,460 a	217	82.4	471	952	436	NA	NA	NA	NA	NA	NA	NA	37.30	9.23	28.07	1.1/1.5
S-3	12/12/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.30	9.23	28.07	NA
S-3	03/08/2001	19,400	1,720 a	465	772	1,230	3,830	160	NA	NA	NA	NA	NA	NA	NA	37.30	8.17	29.13	1.1f
S-3	06/07/2001	12,000	1,400	230	110	900	1,100	120	NA	NA	NA	NA	NA	NA	NA	37.30	8.78	28.52	0.8/0.9
S-3	09/13/2001	32,000	<2,000	400	880	2,000	7,000	NA	<100	NA	NA	NA	NA	NA	NA	37.30	9.93	27.37	3.7/2.9
S-3	11/19/2001	26,000	<2,000	160	210	990	4,100	NA	<50	NA	NA	NA	NA	NA	NA	37.30	9.33	27.97	2.9/1.9
S-3	03/18/2002	3,800	810	61	120	130	620	NA	5.0	NA	NA	NA	NA	NA	NA	37.30	7.03	30.27	1.1/4.7
S-3	06/19/2002	3,200	<500	48	81	160	360	NA	9.4	NA	NA	NA	NA	NA	NA	37.30	8.92	28.38	NA
S-3	09/11/2002	16,000	<1,100	230	570	980	3,900	NA	<50	NA	NA	NA	NA	NA	NA	37.30	9.54	27.76	3.0
S-3	12/11/2002	16,000	<1,500	130	270	770	3,000	NA	<50	NA	NA	NA	NA	NA	NA	36.85	9.23	27.62	1.6

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-3	03/11/2003	8,100	<1,500	29	110	190	1,700	NA	<20	NA	NA	NA	NA	NA	NA	36.85	7.32	29.53	3.9
S-3	06/10/2003	Well inaccessible		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	36.85	NA	NA	NA
S-3	09/09/2003	5,900	640 a	44	140	130	1,500	NA	4.4	NA	NA	NA	NA	NA	NA	36.85	8.99	27.86	2.2
S-3	12/09/2003	27,000	1,500 a	130	460	550	4,900	NA	<20	NA	NA	NA	NA	NA	NA	36.85	7.67	29.18	1.6
S-3	03/09/2004	11,000	1,700 a	24	100	230	3,200	NA	<5.0	NA	NA	NA	NA	NA	NA	36.85	6.35	30.50	2.1
S-3	06/08/2004	1,700	1,100 a	11	34	29	420	NA	<2.5	NA	NA	NA	NA	NA	NA	36.85	8.25	28.60	0.1
S-3	09/07/2004	850	310 i	13	0.99	23	17	NA	7.0	<2.0	<2.0	<2.0	<5.0	NA	NA	36.85	9.05	27.80	0.1
S-3	12/06/2004	Unable to sample		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	36.85	7.70	29.15	NA
S-3	12/15/2004	620	270 i	1.9	7.8	10	180	NA	<0.50	NA	NA	NA	NA	NA	NA	36.85	5.83	31.02	2.4
S-3	03/07/2005	4,500	400 i	<0.50	7.7	30	350	NA	<0.50	NA	NA	NA	NA	NA	NA	36.85	4.58	32.27	4.4
S-3	06/10/2005	850	130 a	<0.50	1.3	7.4	53	NA	<0.50	NA	NA	NA	NA	NA	NA	36.85	5.40	31.45	0.17
S-4	03/29/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.06	8.37	30.69	NA
S-4	03/31/2000	20,900	5,780 a	4,570	272	595	997	4,490	4,450 c	NA	NA	NA	NA	NA	NA	39.06	8.92	30.14	1.8/1.2
S-4	06/20/2000	19,500	244a	4,590	309	723	1,290	3,740	NA	NA	NA	NA	NA	NA	NA	39.06	8.77	30.29	2.7/2.9
S-4	09/05/2000	5,760	1,670 a	841	54.2	162	115	1,040	NA	NA	NA	NA	NA	NA	NA	39.06	10.57	28.49	1.3/0.3
S-4	12/04/2000	3,990	1,050 a	949	<10.0	118	48.3	1,120	NA	NA	NA	NA	NA	NA	NA	39.06	10.67	28.39	1.1/1.0
S-4	12/12/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.06	10.64	28.42	NA
S-4	03/08/2001	20,100	5,840 a	5,210	105	381	281	2,520	NA	NA	NA	NA	NA	NA	NA	39.06	8.44	30.62	1.0/0.9
S-4	06/07/2001	11,000	3,500	2,500	86	370	170	2,000	NA	NA	NA	NA	NA	NA	NA	39.06	10.57	28.49	0.7/0.6
S-4	09/13/2001	4,200	<800	790	14	110	48	NA	690	NA	NA	NA	NA	NA	NA	39.06	11.27	27.79	3.8/3.9
S-4	11/19/2001	2,300	<600	230	4.1	21	22	NA	590	NA	NA	NA	NA	NA	NA	39.06	10.83	28.23	3.6/1.6
S-4	03/18/2002	Unable to sample		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	39.06	8.75	30.31	NA
S-4	03/29/2002	14,000	NA	1,700	30	280	250	NA	960	NA	NA	NA	NA	NA	NA	39.06	8.85 g	30.21	3.0/3.1
S-4	06/19/2002	4,700	<1,500	620	9.5	84	37	NA	490	NA	NA	NA	NA	NA	NA	NA	10.37 h	NA	NA
S-4	09/11/2002	2,700	280	280	4.6	23	13	NA	410	NA	NA	NA	NA	NA	NA	NA	11.14	NA	0.6
S-4	12/11/2002	3,300	<900	320	5.7	24	15	NA	420	NA	NA	NA	NA	NA	NA	38.69	10.78	27.91	2.2
S-4	03/11/2003	12,000	<5,600	1,900	63	360	280	NA	930	NA	NA	NA	NA	NA	NA	38.69	9.31	29.38	1.5
S-4	06/10/2003	13,000	3,100 a	2,400	86	650	380	NA	1,100	NA	NA	NA	NA	NA	NA	38.69	10.78	27.91	0.9
S-4	09/09/2003	3,700	1,700 a	510	12	43	43	NA	650	NA	NA	NA	NA	NA	NA	38.69	10.20	28.49	0.1
S-4	12/09/2003	3,900	390 a	150	4.2	7.5	13	NA	510	NA	NA	NA	NA	NA	NA	38.69	7.67	31.02	0.7
S-4	03/09/2004	13,000	3,100 a	2,500	110	810	1,100	NA	1,100	NA	NA	NA	NA	NA	NA	38.69	10.27	28.42	0.3
S-4	06/08/2004	6,100	1,400 a	870	30	120	150	NA	420	NA	NA	NA	NA	NA	NA	38.69	10.91	27.78	0.1
S-4	09/07/2004	3,100	890 i	290	6.4	18	14	NA	250	<10	<10	<10	140	NA	NA	38.69	10.91	27.78	0.1

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-4	12/06/2004	4,900	670 i	520	9.9	38	24	NA	290	NA	NA	NA	NA	NA	NA	38.69	10.03	28.66	0.2
S-4	03/07/2005	28,000	2,900 i	2,300	130	690	770	NA	770	NA	NA	NA	NA	NA	NA	38.69	6.20	32.49	0.2
S-4	06/10/2005	13,000	2,700 i	1,900	81	380	460	NA	890	NA	NA	NA	NA	NA	NA	38.69	8.90	29.79	0.15
S-5	05/31/2002	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	9.54	NA	NA
S-5	06/19/2002	16,000	<2,000	2,600	320	180	1,600	NA	5,300	NA	NA	NA	NA	NA	NA	NA	9.87	NA	NA
S-5	09/11/2002	8,800	<1,200	1,500	64	89	120	NA	5,600	NA	NA	NA	NA	NA	NA	NA	10.28	NA	0.9
S-5	12/11/2002	4,400	<1,000	280	61	130	130	NA	4,000	NA	NA	NA	NA	NA	NA	NA	9.87	NA	2.9
S-5	03/11/2003	2,300	<900	28	5.6	59	15	NA	2,400	NA	NA	NA	NA	NA	NA	38.05	8.26	29.79	1.6
S-5	06/10/2003	2,400	620 a	11	7.2	56	38	NA	1,100	NA	NA	NA	NA	NA	NA	38.05	8.51	29.54	0.1
S-5	09/09/2003	3,700	660 a	23	14	44	150	NA	440	NA	NA	NA	NA	NA	NA	38.05	9.44	28.61	0.1
S-5	12/09/2003	12,000	600 a	200	80	41	320	NA	580	NA	NA	NA	NA	NA	NA	38.05	9.50	28.55	0.4
S-5	03/09/2004	2,300	550 a	130	3.5	6.9	13	NA	250	NA	NA	NA	NA	NA	NA	38.05	7.04	31.01	0.2
S-5	06/08/2004	2,900	490 a	11	<2.5	8.9	18	NA	120	NA	NA	NA	NA	NA	NA	38.05	8.87	29.18	0.2
S-5	09/07/2004	3,600	650 i	17	11	12	30	NA	120	<10	<10	<10	3,700	NA	NA	38.05	9.45	28.60	0.1
S-5	12/06/2004	4,700	460 i	99	28	14	69	NA	180	NA	NA	NA	NA	NA	NA	38.05	8.75	29.30	0.1
S-5	03/07/2005	4,700	360 i	440	<2.5	<2.5	<5.0	NA	200	NA	NA	NA	NA	NA	NA	38.05	7.28	30.77	0.1
S-5	06/10/2005	1,200	240 i	1.3	<0.50	<0.50	1.2	NA	80	NA	NA	NA	NA	NA	NA	38.05	7.26	30.79	0.25
S-6	02/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.86	8.18	29.68	NA
S-6	03/02/2007	5,100 k	1,700 j	630 k	23	200	110	NA	140	NA	NA	NA	280	13	<0.50	37.86	7.73	30.13	NA
S-6	05/23/2007	5,600 l	2,600 j	510	16	11	144	NA	72	NA	NA	NA	66	<2.5	<5.0	37.86	8.13	29.73	NA
S-6	08/28/2007	13,000 l	6,100 j,m	650	32	480	242	NA	78	6.1	<10	<10	320	<2.5	<5.0	37.86	8.44	29.42	NA
S-6	11/13/2007	19,000 l	6,400 j,m	760	47	500	602	NA	68	NA	NA	NA	340	<5.0	<10	37.86	8.78	29.08	NA
S-6	02/08/2008	6,800 l	2,200 j,m	380	14	130	87.0	NA	75	NA	NA	NA	200	<2.5	<5.0	37.86	7.06	30.80	NA
S-6	05/20/2008	12,000 l	2,900 j,m	590	21	270	60	NA	54	NA	NA	NA	240	<2.5	<5.0	37.86	8.60	29.26	NA
S-6	08/12/2008	22,000	7,100 j,m	890	75	450	1,170	NA	71	<20	<20	<20	200	<5.0	<10	37.86	9.21	28.65	NA
S-6	12/02/2008	26,000	4,600 j,m	1,500	170	670	1,500	NA	87	NA	NA	NA	260	<5.0	<10	37.86	8.72	29.14	NA
S-6	02/05/2009	29,000	5,200 j,m	1,200	210	910	3,400	NA	78	NA	NA	NA	230	<5.0	<10	37.86	9.19	28.67	NA
S-7	02/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.58	7.39	30.19	NA
S-7	03/02/2007	100,000 k	2,500 j	32,000 k	9,700 k	2,900 k	14,000 k	NA	310 k	NA	NA	NA	480	150	<0.50	37.58	7.42	30.16	NA
S-7	05/23/2007	82,000 l,m	3,700 j	24,000	8,100	2,800	13,000	NA	190	NA	NA	NA	<200	<10	<20	37.58	8.38	29.20	NA
S-7	08/28/2007	96,000 l	4,500 j,m	23,000	7,000	2,900	12,200	NA	190 n	<400	<400	<400	<2,000	<100	<200	37.58	9.32	28.26	NA

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
S-7	11/13/2007	100,000 l	25,000 j,m	22,000	6,500	3,000	12,400	NA	<200	NA	NA	NA	<2,000	<100	<200	37.58	9.60	27.98	NA
S-7	02/08/2008	74,000 l	4,000 j,m	29,000	9,300	3,100	13,700	NA	500	NA	NA	NA	<2,000	<100	<200	37.58	6.57	31.01	NA
S-7	05/20/2008	69,000 l	1,600 j,m	20,000	5,500	2,500	9,800	NA	260	NA	NA	NA	<2,000	<100	<200	37.58	9.00	28.58	NA
S-7	08/12/2008	120,000	4,900 j,m	25,000	8,400	2,800	11,700	NA	<200	<400	<400	<400	<2,000	<100	<200	37.58	9.81	27.77	NA
S-7	12/02/2008	120,000	4,300 j,m	24,000	8,400	3,600	15,000	NA	320	NA	NA	NA	<2,000	<100	<200	37.58	9.91	27.67	NA
S-7	02/05/2009	99,000	3,800 j,m	25,000	7,600	2,500	12,000	NA	370	NA	NA	NA	<2,000	<100	<200	37.58	9.30	28.28	NA
S-8	02/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.05	6.65	30.40	NA
S-8	03/02/2007	72,000 k	2,300 j	12,000 k	5,600 k	2,900 k	15,000 k	NA	120	NA	NA	NA	230	150	<2.5	37.05	6.60	30.45	NA
S-8	05/23/2007	69,000 l,m	5,800 j	12,000	6,700	3,100	19,500	NA	160	NA	NA	NA	280	<10	<20	37.05	7.91	29.14	NA
S-8	08/28/2007	69,000 l	6,700 j,m	11,000	4,800	3,100	16,800	NA	170	<200	<200	<200	<1,000	<50	<100	37.05	8.79	28.26	NA
S-8	11/13/2007	84,000 l	21,000 j,m	10,000	5,000	3,300	18,300	NA	290	NA	NA	NA	<1,000	<50	<100	37.05	8.93	28.12	NA
S-8	02/08/2008	54,000 l	4,500 j,m	11,000	5,500	3,500	18,200	NA	200	NA	NA	NA	<1,000	<50	<100	37.05	6.26	30.79	NA
S-8	05/20/2008	67,000 l	2,200 j,m	10,000	5,400	3,900	19,600	NA	160	NA	NA	NA	<1,000	<50	<100	37.05	7.40	29.65	NA
S-8	08/12/2008	77,000	5,200 j,m	9,300	3,200	2,500	14,300	NA	210	<200	<200	<200	<1,000	<50	<100	37.05	9.10	27.95	NA
S-8	12/02/2008	70,000	3,600 j,m	9,500	2,700	2,500	12,300	NA	290	NA	NA	NA	1,200	<50	<100	37.05	9.39	27.66	NA
S-8	02/05/2009	74,000	3,500 j,m	10,000	3,500	2,600	15,000	NA	240	NA	NA	NA	<1,000	<50	<100	37.05	8.75	28.30	NA
S-9	02/22/2007	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	37.52	7.59	29.93	NA
S-9	03/02/2007	12,000	1,400 j	150	200	1,200	2,500	NA	5.8	NA	NA	NA	<50	<5.0	<5.0	37.52	7.30	30.22	NA
S-9	05/23/2007	8,200 l	2,300 j	13	38	2.5 n	1,453	NA	5.2 n	NA	NA	NA	<100	<5.0	<10	37.52	8.43	29.09	NA
S-9	08/28/2007	9,500 l	2,800 j,m	21	49	540	789	NA	<10	<20	<20	<20	<100	<5.0	<10	37.52	9.59	27.93	NA
S-9	11/13/2007	12,000 l	2,100 j,m	19	35	450	499	NA	<10	NA	NA	NA	<100	<5.0	<10	37.52	9.91	27.61	NA
S-9	02/08/2008	10,000 l	1,900 j,m	18	67	1,100	1,451	NA	<10	NA	NA	NA	<100	<5.0	<10	37.52	6.40	31.12	NA
S-9	05/20/2008	11,000 l	1,500 j,m	150	770	13,000	17,460	NA	<100	NA	NA	NA	<1,000	<50	<100	37.52	8.79	28.73	NA
S-9	08/12/2008	9,400	2,000 j,m	16	59	700	834	NA	<10	<20	<20	<20	<100	<5.0	<10	37.52	10.00	27.52	NA
S-9	12/02/2008	14,000	1,300 j,m	10	62	980	1,139	NA	<10	NA	NA	NA	<100	<5.0	<10	37.52	10.22	27.30	NA
S-9	02/05/2009	6,300	1,400 j,m	11	33	480	600	NA	<10	NA	NA	NA	<100	<5.0	<10	37.52	9.49	28.03	NA
BW-A	09/30/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	10.55	NA	2.3
BW-A	12/22/1999	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	9.52	NA	2.2
BW-A	03/09/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	3.99	NA	1.5
BW-A	06/20/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	9.69	NA	2.4
BW-A	09/05/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	9.43	NA	1.0

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
BW-A	12/04/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	8.96	NA	1.3
BW-A	12/12/2000	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	8.71	NA	NA
BW-A	03/08/2001	<2,500	1,370 a	46.6	<25.0	<25.0	<25.0	10,600	11,700	NA	NA	NA	NA	NA	NA	NA	6.38	NA	0.9/1.4
BW-A	06/07/2001	1,100	960	<10	<10	<10	17	7,200	NA	NA	NA	NA	NA	NA	NA	NA	9.82	NA	3.6/0.8
BW-A	09/13/2001	<2,000	460	<20	<20	<20	<50	NA	13,000	NA	NA	NA	NA	NA	NA	NA	10.49	NA	3.3/1.7
BW-A	11/19/2001	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	9.89	NA	NA

Abbreviations:

TPPH = Total petroleum hydrocarbons as gasoline by EPA Method 8260B; prior to September 13, 2001, analyzed by EPA Method 8015.

TEPH = Total petroleum hydrocarbons as diesel by modified EPA Method 8015.

BTEX = Benzene, toluene, ethylbenzene, xylenes by EPA Method 8260B; prior to September 13, 2001, analyzed by EPA Method 8020.

MTBE = Methyl tertiary butyl ether

DIPE = Di-isopropyl ether, analyzed by EPA Method 8260B

ETBE = Ethyl tertiary butyl ether, analyzed by EPA Method 8260B

TAME = Tertiary amyl methyl ether, analyzed by EPA Method 8260B

TBA = Tertiary butyl alcohol, analyzed by EPA Method 8260B

1,2-DCA = 1,2-Dichloroethane, analyzed by EPA Method 8260B

EDB = Ethylene Dibromide, analyzed by EPA Method 8260B

TOB = Top of Box Elevation

TOC = Top of Casing Elevation

GW = Groundwater

DO = Dissolved Oxygen

ug/L = Parts per billion

ppm = Parts per million

MSL = Mean sea level

ft. = Feet

<n = Below detection limit

(D) = Duplicate sample

n/n = Pre-purge/Post-purge


NA = Not applicable

WELL CONCENTRATIONS
Former Shell Service Station
4411 Foothill Boulevard
Oakland, CA

Well ID	Date	TPPH (ug/L)	TEPH (ug/L)	B (ug/L)	T (ug/L)	E (ug/L)	X (ug/L)	MTBE 8020 (ug/L)	MTBE 8260 (ug/L)	DIPE (ug/L)	ETBE (ug/L)	TAME (ug/L)	TBA (ug/L)	1,2- DCA (ug/L)	EDB (ug/L)	TOC (MSL)	Depth to Water (ft.)	GW Elevation (MSL)	DO Reading (ppm)
---------	------	----------------	----------------	-------------	-------------	-------------	-------------	------------------------	------------------------	----------------	----------------	----------------	---------------	-----------------------	---------------	--------------	----------------------------	--------------------------	------------------------

Notes:

- a = Chromatogram pattern indicates an unidentified hydrocarbon/Hydrocarbon does not match pattern of laboratory's standard.
 - b = National Environmental Testing, Inc. (NET), analyzed within hold time but further dilutions were required and analyzed out of hold time.
NET suggests that these should be considered minimum concentrations.
 - c = Sample analyzed outside the EPA recommended holding times.
 - d = Result reported was generated out of hold time.
 - e = Post-purge DO reading.
 - f = Pre-purge DO reading.
 - g = Estimated depth to water from top of box; TOB determined by using the survey data from February 3, 2000 for the difference between TOB and TOC.
 - h = Estimated depth to water from TOB. Wellbox was destroyed. No new survey.
 - i = Hydrocarbon reported is in the early Diesel range and does not match the laboratory's standard.
 - j = Diesel with Silica gel clean-up.
 - k = Initial analysis within holding time. Reanalysis for the required dilution or confirmation was past holding time.
 - l = Analyzed by EPA Method 8015B (M).
 - m = The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.
 - n = Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
- Wells S-1 through S-4 surveyed February 3, 2000 by Virgil Chavez Land Surveying of Vallejo, CA.
Wells S-1 through S-4 surveyed March 5, 2002 by Virgil Chavez Land Surveying of Vallejo, CA.
Beginning December 12, 2002, depth to water referenced to Top of Casing elevation.
Well S-5 surveyed May 29, 2003 by Virgil Chavez Land Surveying of Vallejo, CA.
Wells S-6 through S-9 surveyed February 21, 2007 by Virgil Chavez Land Surveying of Vallejo, CA.

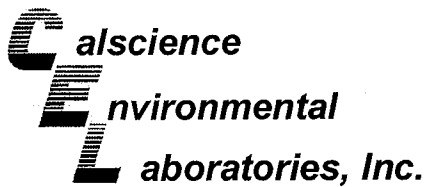

February 24, 2009

Michael Ninokata
Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Subject: **Calscience Work Order No.: 09-02-0819**
Client Reference: **4411 Foothill Blvd., Oakland, CA**

Dear Client:

Enclosed is an analytical report for the above-referenced project. The samples included in this report were received 2/7/2009 and analyzed in accordance with the attached chain-of-custody.


Unless otherwise noted, all analytical testing was accomplished in accordance with the guidelines established in our Quality Systems Manual, applicable standard operating procedures, and other related documentation. The original report of subcontracted analysis, if any, is provided herein, and follows the standard Calscience data package. The results in this analytical report are limited to the samples tested and any reproduction thereof must be made in its entirety.

If you have any questions regarding this report, please do not hesitate to contact the undersigned.

Sincerely,

A handwritten signature in cursive script that reads "Phillip Samelle for".

Calscience Environmental
Laboratories, Inc.
Jessie Kim
Project Manager

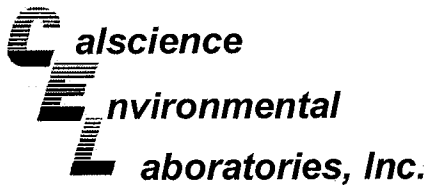

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/07/09
Work Order No: 09-02-0819
Preparation: EPA 3510C
Method: EPA 8015B

Project: 4411 Foothill Blvd., Oakland, CA

Page 1 of 2

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-6	09-02-0819-1-D	02/05/09 15:50	Aqueous	GC 27	02/11/09	02/14/09 12:05	090211B20

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.
-The sample extract was subjected to Silica Gel treatment prior to analysis.

Parameter	Result	RL	DF	Qual	Units
Diesel Range Organics	5200	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
Decachlorobiphenyl	90	68-140			

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-7	09-02-0819-2-D	02/05/09 16:20	Aqueous	GC 27	02/11/09	02/14/09 12:23	090211B20

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.
-The sample extract was subjected to Silica Gel treatment prior to analysis.


Parameter	Result	RL	DF	Qual	Units
Diesel Range Organics	3800	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
Decachlorobiphenyl	92	68-140			

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-8	09-02-0819-3-D	02/05/09 16:05	Aqueous	GC 27	02/11/09	02/14/09 12:41	090211B20

Comment(s): -The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.
-The sample extract was subjected to Silica Gel treatment prior to analysis.

Parameter	Result	RL	DF	Qual	Units
Diesel Range Organics	3500	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
Decachlorobiphenyl	88	68-140			

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

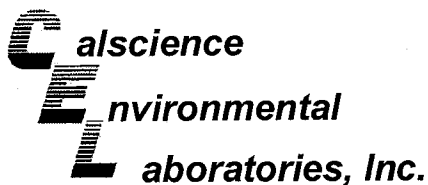

Analytical Report



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: 02/07/09
Work Order No: 09-02-0819
Preparation: EPA 3510C
Method: EPA 8015B

Project: 4411 Foothill Blvd., Oakland, CA

Page 2 of 2

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-9	09-02-0819-4-D	02/05/09 16:25	Aqueous	GC 27	02/11/09	02/14/09 12:59	090211B20

Comment(s):
-The sample chromatographic pattern for TPH does not match the chromatographic pattern of the specified standard. Quantitation of the unknown hydrocarbon(s) in the sample was based upon the specified standard.
-The sample extract was subjected to Silica Gel treatment prior to analysis.

Parameter	Result	RL	DF	Qual	Units
Diesel Range Organics	1400	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
Decachlorobiphenyl	90	68-140			

Method Blank	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
Method Blank	099-12-211-961	N/A	Aqueous	GC 27	02/11/09	02/13/09 11:12	090211B20

Parameter	Result	RL	DF	Qual	Units
Diesel Range Organics	ND	50	1		ug/L
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	
Decachlorobiphenyl	84	68-140			

RL - Reporting Limit, DF - Dilution Factor, Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 02/07/09
 Work Order No: 09-02-0819
 Preparation: EPA 5030B
 Method: LUFT GC/MS / EPA 8260B
 Units: ug/L

Project: 4411 Foothill Blvd., Oakland, CA

Page 1 of 2

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-6	09-02-0819-1-A	02/05/09 15:50	Aqueous	GC/MS LL	02/16/09	02/16/09 21:56	090216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	1200	5.0	10		Xylenes (total)	3400	10	10	
1,2-Dibromoethane	ND	10	10		Methyl-t-Butyl Ether (MTBE)	78	10	10	
1,2-Dichloroethane	ND	5.0	10		Tert-Butyl Alcohol (TBA)	230	100	10	
Ethylbenzene	910	10	10		TPPH	29000	500	10	
Toluene	210	10	10						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	100	74-140			1,2-Dichloroethane-d4	99	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	101	88-112		
1,4-Bromofluorobenzene	100	74-110							

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-7	09-02-0819-2-A	02/05/09 16:20	Aqueous	GC/MS LL	02/16/09	02/16/09 22:23	090216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	25000	100	200		Xylenes (total)	12000	200	200	
1,2-Dibromoethane	ND	200	200		Methyl-t-Butyl Ether (MTBE)	370	200	200	
1,2-Dichloroethane	ND	100	200		Tert-Butyl Alcohol (TBA)	ND	2000	200	
Ethylbenzene	2500	200	200		TPPH	99000	10000	200	
Toluene	7600	200	200						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	101	74-140			1,2-Dichloroethane-d4	101	74-146		
Toluene-d8	98	88-112			Toluene-d8-TPPH	98	88-112		
1,4-Bromofluorobenzene	98	74-110							

Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-8	09-02-0819-3-A	02/05/09 16:05	Aqueous	GC/MS LL	02/16/09	02/16/09 22:50	090216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	10000	50	100		Xylenes (total)	15000	100	100	
1,2-Dibromoethane	ND	100	100		Methyl-t-Butyl Ether (MTBE)	240	100	100	
1,2-Dichloroethane	ND	50	100		Tert-Butyl Alcohol (TBA)	ND	1000	100	
Ethylbenzene	2600	100	100		TPPH	74000	5000	100	
Toluene	3500	100	100						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	99	74-140			1,2-Dichloroethane-d4	97	74-146		
Toluene-d8	100	88-112			Toluene-d8-TPPH	100	88-112		
1,4-Bromofluorobenzene	100	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

Analytical Report



Blaine Tech Services, Inc.
 1680 Rogers Avenue
 San Jose, CA 95112-1105

Date Received: 02/07/09
 Work Order No: 09-02-0819
 Preparation: EPA 5030B
 Method: LUFT GC/MS / EPA 8260B
 Units: ug/L

Project: 4411 Foothill Blvd., Oakland, CA

Page 2 of 2


Client Sample Number	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
S-9	09-02-0819-4-A	02/05/09 16:25	Aqueous	GC/MS-LL	02/16/09	02/16/09 23:18	090216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	11	5.0	10		Xylenes (total)	600	10	10	
1,2-Dibromoethane	ND	10	10		Methyl-t-Butyl Ether (MTBE)	ND	10	10	
1,2-Dichloroethane	ND	5.0	10		Tert-Butyl Alcohol (TBA)	ND	100	10	
Ethylbenzene	480	10	10		TPPH	6300	500	10	
Toluene	33	10	10						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	99	74-140			1,2-Dichloroethane-d4	97	74-146		
Toluene-d8	101	88-112			Toluene-d8-TPPH	101	88-112		
1,4-Bromofluorobenzene	98	74-110							

Method Blank	Lab Sample Number	Date/Time Collected	Matrix	Instrument	Date Prepared	Date/Time Analyzed	QC Batch ID
Method Blank	099-12-767-1-126	N/A	Aqueous	GC/MS-LL	02/16/09	02/16/09 15:09	090216L01

Parameter	Result	RL	DF	Qual	Parameter	Result	RL	DF	Qual
Benzene	ND	0.50	1		Xylenes (total)	ND	1.0	1	
1,2-Dibromoethane	ND	1.0	1		Methyl-t-Butyl Ether (MTBE)	ND	1.0	1	
1,2-Dichloroethane	ND	0.50	1		Tert-Butyl Alcohol (TBA)	ND	10	1	
Ethylbenzene	ND	1.0	1		TPPH	ND	50	1	
Toluene	ND	1.0	1						
<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>	<u>Surrogates:</u>	<u>REC (%)</u>	<u>Control Limits</u>		<u>Qual</u>
Dibromofluoromethane	98	74-140			1,2-Dichloroethane-d4	95	74-146		
Toluene-d8	99	88-112			Toluene-d8-TPPH	99	88-112		
1,4-Bromofluorobenzene	97	74-110							

RL - Reporting Limit , DF - Dilution Factor , Qual - Qualifiers

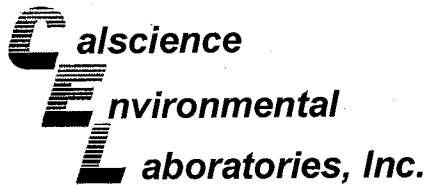

Quality Control - Spike/Spike Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: 02/07/09
Work Order No: 09-02-0819
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA
8260B

Project 4411 Foothill Blvd., Oakland, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	MS/MSD Batch Number
09-02-0782-5	Aqueous	GC/MS LL	02/16/09	02/16/09	090216S01

Parameter	MS %REC	MSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Benzene	88	88	88-118	0	0-7	
Carbon Tetrachloride	90	89	67-145	1	0-11	
Chlorobenzene	92	91	88-118	1	0-7	
1,2-Dibromoethane	94	93	70-130	1	0-30	
1,2-Dichlorobenzene	94	95	86-116	1	0-8	
1,1-Dichloroethene	84	83	70-130	1	0-25	
Ethylbenzene	91	90	70-130	2	0-30	
Toluene	90	90	87-123	0	0-8	
Trichloroethene	87	86	79-127	0	0-10	
Vinyl Chloride	79	80	69-129	2	0-13	
Methyl-t-Butyl Ether (MTBE)	97	97	71-131	1	0-13	
Tert-Butyl Alcohol (TBA)	95	97	36-168	3	0-45	
Diisopropyl Ether (DIPE)	93	93	81-123	0	0-9	
Ethyl-t-Butyl Ether (ETBE)	98	99	72-126	1	0-12	
Tert-Amyl-Methyl Ether (TAME)	100	100	72-126	0	0-12	
Ethanol	116	115	53-149	0	0-31	

RPD - Relative Percent Difference, CL - Control Limit

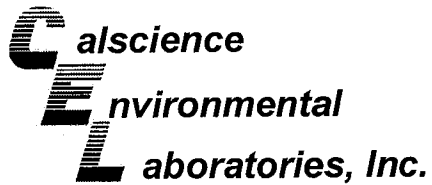

Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105


Date Received: N/A
Work Order No: 09-02-0819
Preparation: EPA 3510C
Method: EPA 8015B

Project: 4411 Foothill Blvd., Oakland, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number
099-12-211-961	Aqueous	GC 27	02/11/09	02/13/09	090211B20

Parameter	LCS %REC	LCSD %REC	%REC CL	RPD	RPD CL	Qualifiers
Diesel Range Organics	104	107	75-117	3	0-13	

RPD - Relative Percent Difference, CL - Control Limit

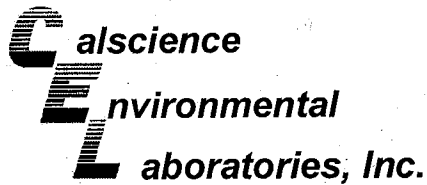

Quality Control - LCS/LCS Duplicate



Blaine Tech Services, Inc.
1680 Rogers Avenue
San Jose, CA 95112-1105

Date Received: N/A
Work Order No: 09-02-0819
Preparation: EPA 5030B
Method: LUFT GC/MS / EPA 8260B

Project: 4411 Foothill Blvd., Oakland, CA

Quality Control Sample ID	Matrix	Instrument	Date Prepared	Date Analyzed	LCS/LCSD Batch Number		
099-12-767-1,126	Aqueous	GC/MS LL	02/16/09	02/16/09	090216L01		
Parameter	LCS %REC	LCSD %REC	%REC CL	ME CL	RPD	RPD CL	Qualifiers
Benzene	91	94	84-120	78-126	3	0-8	
Carbon Tetrachloride	95	100	63-147	49-161	6	0-10	
Chlorobenzene	96	97	89-119	84-124	2	0-7	
1,2-Dibromoethane	100	103	80-120	73-127	3	0-20	
1,2-Dichlorobenzene	98	100	89-119	84-124	2	0-9	
1,1-Dichloroethene	82	94	77-125	69-133	14	0-16	
Ethylbenzene	95	98	80-120	73-127	4	0-20	
Toluene	94	97	83-125	76-132	2	0-9	
Trichloroethene	94	99	89-119	84-124	5	0-8	
Vinyl Chloride	81	90	63-135	51-147	10	0-13	
Methyl-t-Butyl Ether (MTBE)	102	106	82-118	76-124	4	0-13	
Tert-Butyl Alcohol (TBA)	99	103	46-154	28-172	3	0-32	
Diisopropyl Ether (DIPE)	97	100	81-123	74-130	3	0-11	
Ethyl-t-Butyl Ether (ETBE)	105	107	74-122	66-130	2	0-12	
Tert-Amyl-Methyl Ether (TAME)	108	108	76-124	68-132	1	0-10	
Ethanol	113	112	60-138	47-151	1	0-32	
TPPH	97	90	65-135	53-147	7	0-30	

Total number of LCS compounds : 17

Total number of ME compounds : 0

Total number of ME compounds allowed : 1

LCS ME CL validation result : Pass

RPD - Relative Percent Difference, CL - Control Limit

Work Order Number: 09-02-0819

<u>Qualifier</u>	<u>Definition</u>
*	See applicable analysis comment.
1	Surrogate compound recovery was out of control due to a required sample dilution, therefore, the sample data was reported without further clarification.
2	Surrogate compound recovery was out of control due to matrix interference. The associated method blank surrogate spike compound was in control and, therefore, the sample data was reported without further clarification.
3	Recovery of the Matrix Spike (MS) or Matrix Spike Duplicate (MSD) compound was out of control due to matrix interference. The associated LCS and/or LCSD was in control and, therefore, the sample data was reported without further clarification.
4	The MS/MSD RPD was out of control due to matrix interference. The LCS/LCSD RPD was in control and, therefore, the sample data was reported without further clarification.
5	The PDS/PDSD associated with this batch of samples was out of control due to a matrix interference effect. The associated batch LCS/LCSD was in control and, hence, the associated sample data was reported with no further corrective action required.
A	Result is the average of all dilutions, as defined by the method.
B	Analyte was present in the associated method blank.
C	Analyte presence was not confirmed on primary column.
E	Concentration exceeds the calibration range.
H	Sample received and/or analyzed past the recommended holding time.
J	Analyte was detected at a concentration below the reporting limit and above the laboratory method detection limit. Reported value is estimated.
ME	LCS Recovery Percentage is within LCS ME Control Limit range.
N	Nontarget Analyte.
ND	Parameter not detected at the indicated reporting limit.
Q	Spike recovery and RPD control limits do not apply resulting from the parameter concentration in the sample exceeding the spike concentration by a factor of four or greater.
U	Undetected at the laboratory method detection limit.
X	% Recovery and/or RPD out-of-range.
Z	Analyte presence was not confirmed by second column or GC/MS analysis.

LAB (LOCATION)

- CALSCIENCE ()
- SPL ()
- XENCO ()
- TEST AMERICA ()
- OTHER ()



Shell Oil Products Chain Of Custody Record

Please Check Appropriate Box:

<input checked="" type="checkbox"/> ENV. SERVICES	<input type="checkbox"/> MOTIVA RETAIL	<input type="checkbox"/> SHELL RETAIL
<input type="checkbox"/> MOTIVA SD&CM	<input type="checkbox"/> CONSULTANT	<input type="checkbox"/> LUBES
<input type="checkbox"/> SHELL PIPELINE	<input type="checkbox"/> OTHER _____	

Print Bill To Contact Name: **Denis Brown**

INCIDENT # (ENV SERVICES): 9 8 9 9 5 7 4 6

PO # _____ SAP # _____

DATE: 2/5/09

PAGE: 1 of 1

SAMPLING COMPANY: **Blaine Tech Services**

LOG CODE: **BTSS**

SITE ADDRESS: Street and City: **4411 Foothill Blvd., Oakland**

State: **CA** GLOBAL ID NO: **T0600101065**

ADDRESS: **1680 Rogers Ave, San Jose, CA 95112**

EDF DELIVERABLE TO (Name, Company, Office Location): **Ann Kream, CRA, Emeryville**

PHONE NO.: **(510) 420-3335**

E-MAIL: **Shelledt@craworld.com**

CONSULTANT PROJECT NO: **BTS # 090205-JPI**

PROJECT CONTACT (Hardcopy or PDF Report to): **Michael Ninokata**

SAMPLER NAME(S) (Print): **J. PARKER**

LAB USE ONLY: **09-02-08A**

TELEPHONE: **(408)573-0555** FAX: **(408)573-7771** E-MAIL: **mninokata@blainetech.com**

TURNAROUND TIME (CALENDAR DAYS):

STANDARD (14 DAY) 5 DAYS 3 DAYS 2 DAYS 24 HOURS.

RESULTS NEEDED ON WEEKEND

REQUESTED ANALYSIS

LA - RWQCB REPORT FORMAT UST AGENCY:

SPECIAL INSTRUCTIONS OR NOTES :

SHELL CONTRACT RATE APPLIES

STATE REIMBURSEMENT RATE APPLIES

EDD NOT NEEDED


RECEIPT VERIFICATION REQUESTED

Run TPH-d w/Silica Gel Clean Up

LAB USE ONLY	Field Sample Identification	SAMPLING		MATRIX	PRESERVATIVE					NO. OF CONT.	REQUESTED ANALYSIS											TEMPERATURE ON RECEIPT °C	Container PID Readings or Laboratory Notes			
		DATE	TIME		HCL	HNO3	H2SO4	NONE	OTHER		TPH - Purgeable (8260B)	TPH - Extractable (8015M)	BTEX (8260B)	5 Oxygenates (8260B)	MTBE (8260B)	TBA (8260B)	DIPE (8260B)	TAME (8260B)	ETBE (8260B)	1,2 DCA (8260B)	EDB (8260B)			Ethanol (8260B)	Methanol (8015M)	
	1 S-6	2/5	1550	W	X			X		5	X	X	X		X	X		X	X							
	2 S-7	↓	1620	↓	X			X		↓	X	X	X		X	X		X	X							
	3 S-8	↓	1605	↓	X			X		↓	X	X	X		X	X		X	X							
	4 S-9	↓	1625	↓	X			X		↓	X	X	X		X	X		X	X							

Relinquished by: (Signature) <i>[Signature]</i>	Received by: (Signature) <i>[Signature]</i> (SAMPLE CUSTODIAN)	Date: 2/5/09	Time: 1135
Relinquished by: (Signature) <i>[Signature]</i>	Received by: (Signature) <i>[Signature]</i> CEL	Date: 2-6-09	Time: 1130
Relinquished by: (Signature) <i>[Signature]</i> 2-6-09 1730	Received by: (Signature) <i>[Signature]</i> Wobath CA	Date: 2/7/09	Time: 1000

650511236792

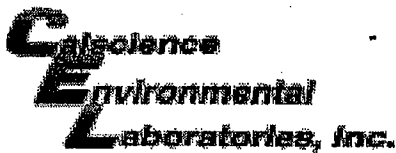

WORK ORDER #: 09-02-0819

SAMPLE RECEIPT FORM

Cooler 1 of 1

CLIENT: BT5

DATE: 2/7/09

TEMPERATURE: (Criteria: 0.0°C – 6.0°C, not frozen)

Temperature 1.8 °C - 0.2°C (CF) = 1.6 °C Blank Sample

Sample(s) outside temperature criteria (PM/APM contacted by: _____).

Sample(s) outside temperature criteria but received on ice/chilled on same day of sampling.

Received at ambient temperature, placed on ice for transport by Courier.

Ambient Temperature: Air Filter Metals Only PCBs Only Initial: WB

CUSTODY SEALS INTACT:

Cooler _____ No (Not Intact) Not Present N/A Initial: WB

Sample _____ No (Not Intact) Not Present Initial: WB

SAMPLE CONDITION:

	Yes	No	N/A
Chain-Of-Custody (COC) document(s) received with samples.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
COC document(s) received complete.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sampler's name indicated on COC.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sample container label(s) consistent with COC.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sample container(s) intact and good condition.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Correct containers and volume for analyses requested.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Analyses received within holding time.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Proper preservation noted on COC or sample container.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Volatile analysis container(s) free of headspace.....	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Tedlar bag(s) free of condensation.....	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

CONTAINER TYPE:

Solid: 4ozCGJ 8ozCGJ 16ozCGJ Sleeve EnCores® TerraCores® _____

Water: VOA VOA⁽³⁾h VOAna₂ 125AGB 125AGBh 125AGBpo₄ 1AGB 1AGBna₂

1AGBs 500AGB 500AGBs⁽²⁾ 250CGB 250CGBs 1PB 500PB 500PBna 250PB

250PBn 125PB 125PBz_{nna} 100PBsterile 100PBna₂ _____ _____ _____

Air: Tedlar® Summa® _____

Container: C:Clear A:Amber P:Poly/Plastic G:Glass J:Jar. B:Bottle

Preservative: h:HCL n:HNO₃ na₂:Na₂S₂O₃ na:NaOH po₄:H₃PO₄ s:H₂SO₄ z_{nna}:ZnAc₂+NaOH

Checked/Labeled by: WB

Reviewed by: WB

Scanned by: WB

WELL GAUGING DATA

Project # 090205-JPI

Date 2/5/09

Client SHELL

Site 4411 FOOTHILL BLVD, OAKLAND, CA

Well ID	Time	Well Size (in.)	Sheen / Odor	Depth to Immiscible Liquid (ft.)	Thickness of Immiscible Liquid (ft.)	Volume of Immiscibles Removed (ml)	Depth to water (ft.)	Depth to well bottom (ft.)	Survey Point: TOB or TOC	Notes
S-6 S-6	0808	4	NO				9.19	19.31	↓	
S-7 S-7	0813	4	NO			9.30	19.42			
S-8 S-8	0818	4	NO			8.75	19.60			
S-9 S-9	0823	4	NO			9.49	19.43	↓		

SHELL WELL MONITORING DATA SHEET

BTS #: 090205-JP1	Site: 4111 FOOTHILL BLVD, OAKLAND, CA
Sampler: JP	Date: 2/5/09
Well I.D.: HW-6 S-6	Well Diameter: 2 3 <u>4</u> 6 8 _____
Total Well Depth (TD): 19.31	Depth to Water (DTW): 9.19
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: 11.21	

Purge Method: Bailer Disposable Bailer Positive Air Displacement <input checked="" type="checkbox"/> Electric Submersible	Waterra Peristaltic Extraction Pump Other _____	Sampling Method: <input checked="" type="checkbox"/> Bailer Disposable Bailer Extraction Port Dedicated Tubing Other: _____
------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------

7.0 (Gals.) X 3 = 21.0 Gals. 1 Case Volume Specified Volumes Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
0850	64.9	6.93	1557	23	7.0	
0851	65.0	6.86	1519	96	14.0	
0852	65.1	6.86	1554	87	21.0	

Did well dewater? Yes No Gallons actually evacuated: 21.0

Sampling Date: 2/5/09 Sampling Time: 1550 Depth to Water: 11.28

Sample I.D.: ~~HW-6~~ S-6 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE COL

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHEL WELL MONITORING DATA SHEET

BTS #: <u>090205-JP1</u>	Site: <u>4411 FOOTHILL BLVD, OAKLAND, CA</u>
Sampler: <u>JP</u>	Date: <u>2/5/09</u>
Well I.D.: <u>MW-7 S-7</u>	Well Diameter: 2 3 <u>4</u> 6 8
Total Well Depth (TD): <u>19.42</u>	Depth to Water (DTW): <u>9.30</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.32</u>	

Purge Method: Bailer	Waterra	Sampling Method: <input checked="" type="checkbox"/> Bailer
Disposable Bailer	Peristaltic	Disposable Bailer
Positive Air Displacement	Extraction Pump	Extraction Port
<input checked="" type="checkbox"/> Electric Submersible	Other _____	Dedicated Tubing
Other: _____		

$\frac{7.0 \text{ (Gals.)} \times 3}{1 \text{ Case Volume Specified Volumes}} = \frac{21.0 \text{ Gals.}}{\text{Calculated Volume}}$	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
0913	64.3	6.94	1731	67	7.0	ODOR
0914	65.0	6.80	1699	170	14.0	"
0915	64.9	6.78	1703	122	21.0	"

Did well dewater? Yes No Gallons actually evacuated: 21.0

Sampling Date: 2/5/09 Sampling Time: 1620 Depth to Water: 1003

Sample I.D.: MW-7 S-7 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE COC

EB I.D. (if applicable): @ _____ Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHEL WELL MONITORING DATA SHEET

BTS #: <u>090205-JP1</u>	Site: <u>4411 FOOTHILL BLVD, OAKLAND CA</u>
Sampler: <u>JP</u>	Date: <u>2/5/09</u>
Well I.D.: MW-8 <u>S-8</u>	Well Diameter: 2 3 <u>4</u> 6 8 _____
Total Well Depth (TD): <u>19.60</u>	Depth to Water (DTW): <u>8.75</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: PVC Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>10.92</u>	

Purge Method: Bailer Waterra Sampling Method: Bailer
 Disposable Bailer Peristaltic Disposable Bailer
 Positive Air Displacement Extraction Pump Extraction Port
 Electric Submersible Other _____ Dedicated Tubing

Other: _____

7.5 (Gals.) X 3 = 22.5 Gals.
 I Case Volume Specified Volumes Calculated Volume

Well Diameter	Multiplier	Well Diameter	Multiplier
1"	0.04	4"	0.65
2"	0.16	6"	1.47
3"	0.37	Other	radius ² * 0.163

Time	Temp (°F)	pH	Cond. (mS or <u>μS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
0901	<u>66.3</u>	<u>6.88</u>	<u>1382</u>	<u>15</u>	<u>7.5</u>	<u>ODOR</u>
0902	<u>66.6</u>	<u>6.81</u>	<u>1401</u>	<u>80</u>	<u>15.0</u>	
0903	<u>66.8</u>	<u>6.79</u>	<u>1399</u>	<u>86</u>	<u>22.5</u>	

Did well dewater? Yes No Gallons actually evacuated: 22.5

Sampling Date: 2/5/09 Sampling Time: 1605 Depth to Water: 9.31

Sample I.D.: ~~MW-8~~ S-8 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE LOC

EB I.D. (if applicable): _____ @ _____ Time Duplicate I.D. (if applicable): _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: _____

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

SHELL WELL MONITORING DATA SHEET

BTS #: <u>090205-JP1</u>	Site: <u>411 FORTALL BLD, OAKLAND, CA</u>
Sampler: <u>JP</u>	Date: <u>2/5/09</u>
Well I.D.: MW-9 <u>S-9</u>	Well Diameter: 2 3 <u>4</u> 6 8 _____
Total Well Depth (TD): <u>19.43</u>	Depth to Water (DTW): <u>9.49</u>
Depth to Free Product:	Thickness of Free Product (feet):
Referenced to: <u>PVC</u> Grade	D.O. Meter (if req'd): YSI HACH
DTW with 80% Recharge [(Height of Water Column x 0.20) + DTW]: <u>11.48</u>	

Purge Method: Bailer	Waterra	Sampling Method: <input checked="" type="checkbox"/> Bailer
Disposable Bailer	Peristaltic	Disposable Bailer
Positive Air Displacement	Extraction Pump	Extraction Port
<input checked="" type="checkbox"/> Electric Submersible	Other _____	Dedicated Tubing
		Other: _____

<u>6.5</u> (Gals.) X <u>3</u> = <u>19.5</u> Gals. I Case Volume Specified Volumes Calculated Volume	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Well Diameter</th> <th>Multiplier</th> <th>Well Diameter</th> <th>Multiplier</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.04</td> <td>4"</td> <td>0.65</td> </tr> <tr> <td>2"</td> <td>0.16</td> <td>6"</td> <td>1.47</td> </tr> <tr> <td>3"</td> <td>0.37</td> <td>Other</td> <td>radius² * 0.163</td> </tr> </tbody> </table>	Well Diameter	Multiplier	Well Diameter	Multiplier	1"	0.04	4"	0.65	2"	0.16	6"	1.47	3"	0.37	Other	radius ² * 0.163
Well Diameter	Multiplier	Well Diameter	Multiplier														
1"	0.04	4"	0.65														
2"	0.16	6"	1.47														
3"	0.37	Other	radius ² * 0.163														

Time	Temp (°F)	pH	Cond. (mS or <u>µS</u>)	Turbidity (NTUs)	Gals. Removed	Observations
0840	63.4	6.75	796.7	11	6.5	OPOR
0841	63.9	6.74	835.1	17	13.0	"
0842	63.8	6.77	832.2	22	19.5	"

Did well dewater? Yes No Gallons actually evacuated: 19.5

Sampling Date: 2/5/09 Sampling Time: 1625 Depth to Water: 1413

Sample I.D.: ~~MW-9~~ S-9 Laboratory: CalScience Columbia Other _____

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other: SEE COC

EB I.D. (if applicable): @ Time Duplicate I.D. (if applicable):

Analyzed for: TPH-G BTEX MTBE TPH-D Oxygenates (5) Other:

D.O. (if req'd):	Pre-purge:	mg/L	Post-purge:	mg/L
O.R.P. (if req'd):	Pre-purge:	mV	Post-purge:	mV

①

SHELL WELLHEAD INSPECTION FORM

(FOR SAMPLE TECHNICIAN)

Site Address 4411 FOOTHILL BLVD OAKLAND, CA Date 2/5/09

Job Number 090205-JPI Technician J. PARKER Page 1 of 1

Well ID	Well Inspected - No Corrective Action Required	Well Box Meets Compliance Requirements *See Below	Water Bailed From Wellbox	Cap Replaced	Lock Replaced	Well Not Inspected (explain in notes)	New Deficiency Identified	Previously Identified Deficiency Persists	Notes
S-6 S-6								X	NO TAG
S-7 S-7								↓	NO TAG
S-8 S-8								↓	NO TAG
S-9 S-9							X	↓	NO TAG / BOLTS WENT FULLY THROUGH

*Well box must meet all three criteria to be compliant: 1) WELL IS SECURABLE BY DESIGN (12" or less) 2) WELL IS MARKED WITH THE WORDS "MONITORING WELL" (12" or less) 3) WELL TAG IS PRESENT, SECURE, AND CORRECT

Notes: _____