



GETTLER-RYAN INC.

TRANSMITTAL

Alameda County November 12, 2002

G-R #385242

DEC 04 2002

TO: Mr. James Brownell
Delta Environmental Consultants, Inc.
3164 Gold Camp Drive, Suite 200
Rancho Cordova, California 95670

Environmental Health
CC: Ms. Hales
Chevron Products Company
P.O. Box 6004
San Ramon, California 94583

FROM: Deanna L. Harding
Project Coordinator
Gettler-Ryan Inc.
6747 Sierra Court, Suite J
Dublin, California 94568

RE: **Chevron Service Station
#9-0917
5280 Hopyard Road
Pleasanton, California**

WE HAVE ENCLOSED THE FOLLOWING:

COPIES	DATED	DESCRIPTION
1	October 30, 2002	Groundwater Monitoring and Sampling Report Third Quarter - Event of September 20, 2002

COMMENTS:

Please provide any comments/changes and propose any groundwater monitoring modifications for the next event prior to **November 26, 2002**, at which time the final report will be distributed to the following:

- cc: Mr. Scott Seery, Alameda County Health Care Services, Dept. of Environmental Health, 1131 Harbor Bay Parkway, Suite 250, Alameda, CA 94502-6577
- Mr. Greg Gurs, Gettler-Ryan Inc., 3140 Gold Camp Drive, Suite 170, Rancho Cordova, CA 95670
- Mr. Eddie So, RWQCB - San Francisco Bay Region, 1515 Clay Street, Suite 1400, Oakland, CA 94612
- Mr. Dan Christopoulos, Christopoulos Properties, 43 Panoramic Way, Walnut Creek, CA 94595-1605
- Lamorinda Development and Investment, 89 Davis Road, Suite 260, Orinda, CA 94563
- Ms. Shannon Duchow, Motel 6 Operating L.P., 14651 Dallas Parkway, Suite 418, Dallas, TX 75240

Enclosures



GETTLER-RYAN INC.

October 30, 2002
G-R Job #385242

Ms. Karen Streich
Chevron Products Company
P.O. Box 6004
San Ramon, CA 94583

RE: Third Quarter Event of September 20, 2002
Groundwater Monitoring & Sampling Report
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

Dear Ms. Streich:

This report documents the most recent groundwater monitoring and sampling event performed by Gettler-Ryan Inc. (G-R) at the referenced site. All field work was conducted in accordance with G-R Standard Operating Procedure - Groundwater Sampling (attached).

Static groundwater levels were measured and the wells were checked for the presence of separate-phase hydrocarbons. Static water level data, groundwater elevations, and separate-phase hydrocarbon thickness (if any) are presented in the attached Table 1. A Potentiometric Map is included as Figure 1.

Groundwater samples were collected from the monitoring wells and submitted to a state certified laboratory for analyses. The field data sheets for this event are attached. Analytical results are presented in the table(s) listed below. The chain of custody document and laboratory analytical report are also attached.

Please call if you have any questions or comments regarding this report. Thank you.


Sincerely,

Deanna L. Harding
FOR


Deanna L. Harding
Project Coordinator

Stephen J. Carter

Stephen J. Carter
Senior Geologist, R.G. No. 5577



- Figure 1: Potentiometric Map
- Table 1: Groundwater Monitoring Data and Analytical Results
- Table 2: Groundwater Analytical Results - Oxygenate Compounds
- Table 3: Dissolved Oxygen Concentrations
- Attachments: Standard Operating Procedure - Groundwater Sampling
Field Data Sheets
Chain of Custody Document and Laboratory Analytical Reports

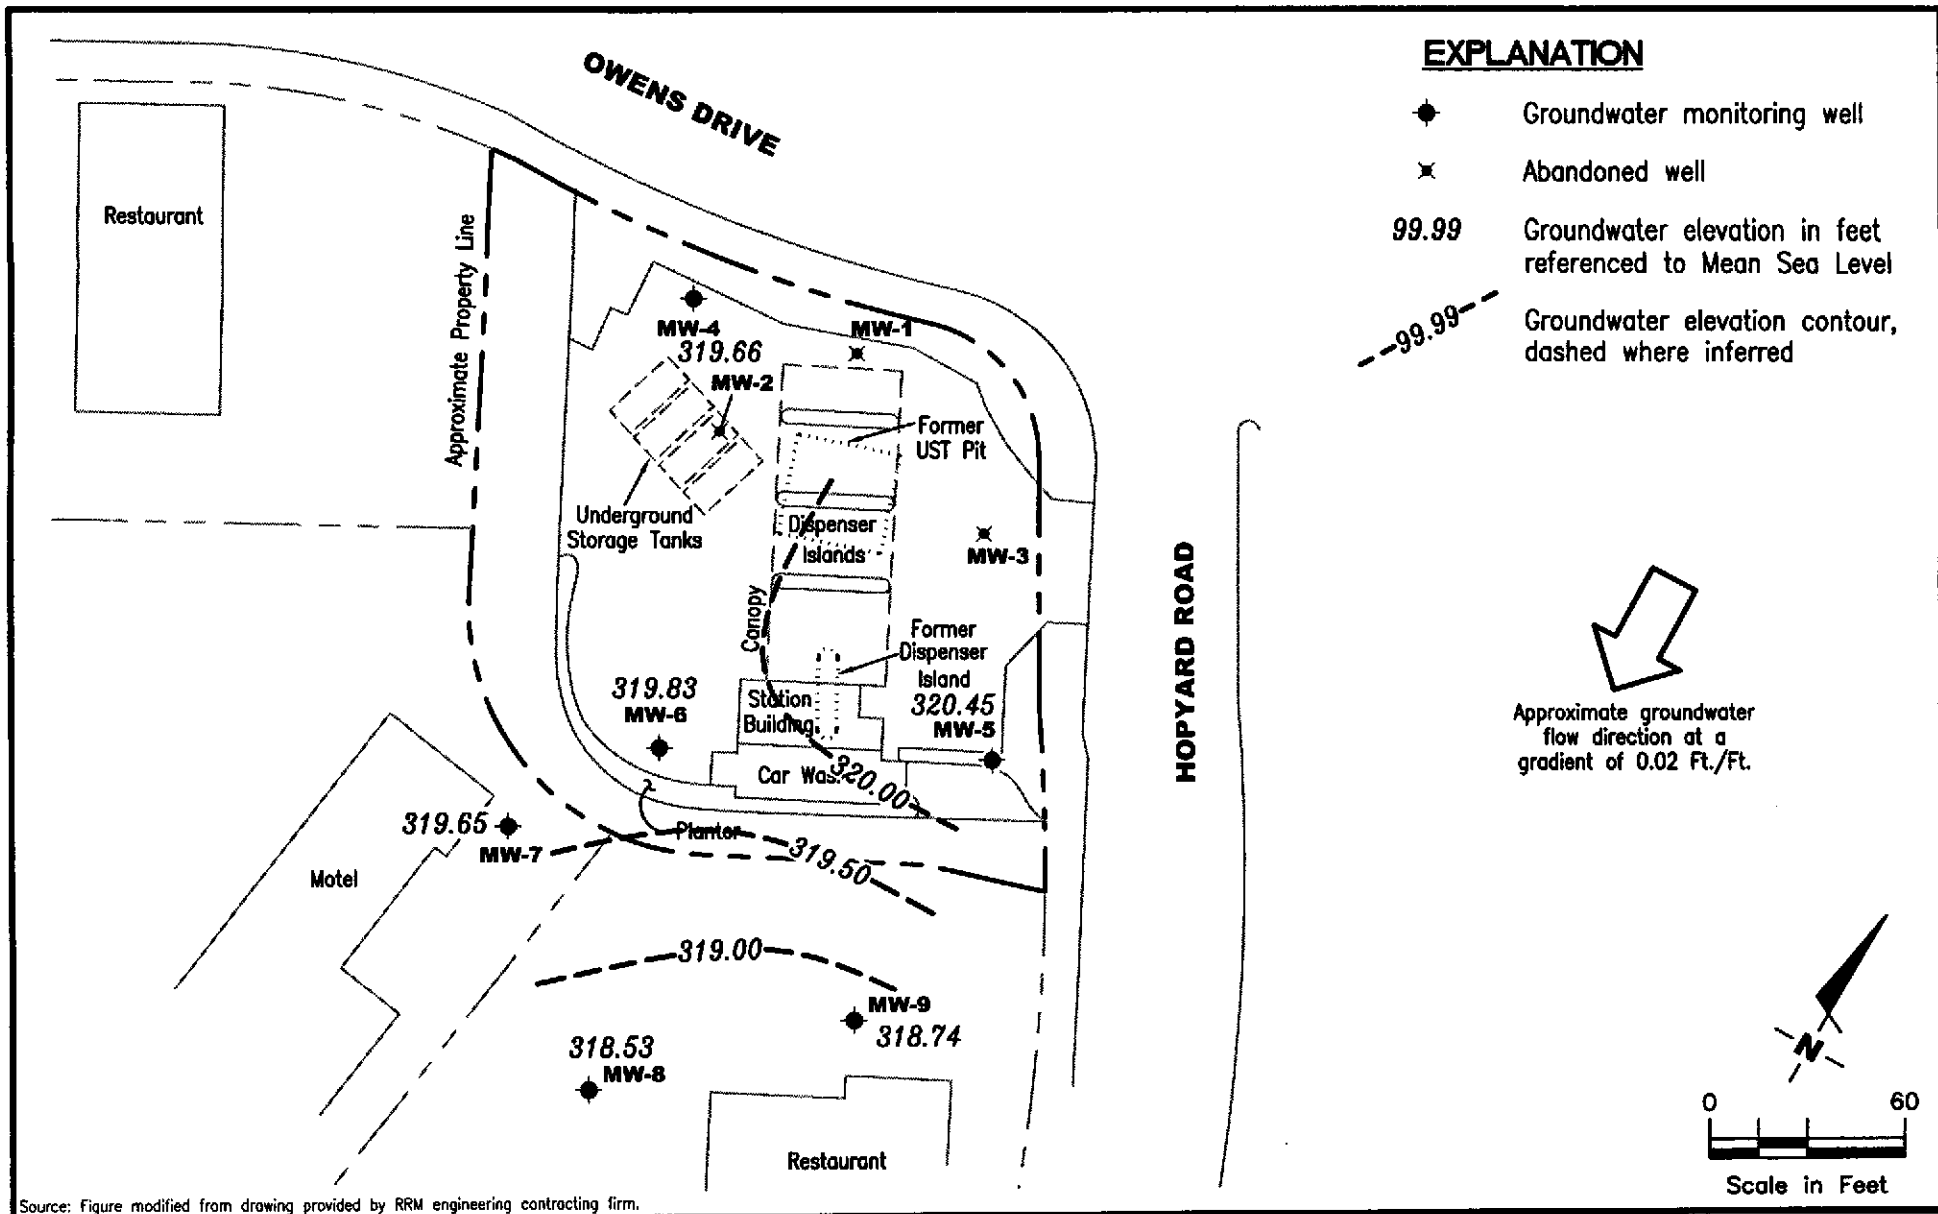

Source: Figure modified from drawing provided by RRM engineering contracting firm.

GETTLER - RYAN INC.
 6747 Sierra Ct., Suite J
 Dublin, CA 94568 (925) 551-7555

POTENTIOMETRIC MAP
 Chevron Service Station #9-0917
 5280 Hopyard Road
 Pleasanton, California

FIGURE

1

PROJECT NUMBER
 385242

REVIEWED BY

DATE
 September 20, 2002

REVISED DATE

FILE NAME: P:\ENVIRO\CHEVRON\9-0917\002-9-0917.DWG | Layout Tab: Pot3

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-1									
07/12/89	326.48	--	--	100	<0.5	<0.5	6.0	<0.5	--
08/02/89	326.48	318.38	8.10	--	--	--	--	--	--
10/24/89	326.48	318.97	7.51	<50	1.0	<0.5	13	<0.5	--
03/12/90	326.48	318.07	8.41	140	0.8	<0.5	1.0	<0.5	--
03/26/90	326.48	318.34	8.14	--	--	--	--	--	--
06/22/90	326.48	318.17	8.31	<50	<0.5	<0.5	<0.5	<0.5	--
09/11/90	326.48	318.35	8.14	<50	<0.5	<0.5	<0.5	<0.5	--
04/18/91	326.48	318.34	8.02	77	<0.5	<0.5	<0.5	<0.5	--
ABANDONED									
MW-2									
07/17/89	327.53	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
08/02/89	327.53	318.48	9.05	--	--	--	--	--	--
10/24/89	327.53	318.29	9.24	<50	<0.5	<0.5	<0.5	<0.5	--
03/12/90	327.53	317.46	10.07	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/90	327.53	317.48	10.05	--	--	--	--	--	--
06/22/90	327.53	317.48	10.05	<50	<0.5	<0.5	<0.5	<0.5	--
09/11/90	327.53	317.85	9.68	<50	<0.5	<0.5	<0.5	<0.5	--
04/18/91	327.53	318.30	9.23	<50	<0.5	<0.5	<0.5	<0.5	--
ABANDONED									
MW-3									
07/17/89	326.47	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
08/02/89	326.47	318.32	8.15	--	--	--	--	--	--
10/24/89	326.47	318.88	7.59	<50	<0.5	<0.5	<0.5	<0.5	--
03/12/90	326.47	318.00	8.47	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/90	326.47	317.64	8.83	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-3 (cont)									
06/22/90	326.47	317.64	8.83	<50	0.4	<0.5	0.8	<0.5	--
09/11/90	326.47	318.06	8.41	<50	<0.5	<0.5	<0.5	<0.5	--
04/18/91	326.47	318.49	7.98	<50	<0.5	<0.5	<0.5	<0.5	--
ABANDONED									
MW-4									
09/16/91	327.28	317.69	9.59	<50	<0.5	<0.5	<0.5	<0.5	--
01/22/92	327.28	317.79	9.49	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/92	327.28	318.39	8.89	<50	<0.5	<0.5	<0.5	<0.5	--
06/05/92	327.28	318.06	9.22	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/92	327.28	317.93	9.35	<50	<0.5	<0.5	<0.5	<0.5	--
12/30/92	327.28	319.00	8.28	<50	<0.5	<0.5	<0.5	<0.5	--
03/22/93	327.28	319.03	8.25	<50	<0.5	<0.5	<0.5	<0.5	--
06/14/93	327.28	318.12	9.16	--	--	--	--	--	--
07/25/93	327.28	318.18	9.10	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/93	327.28	318.58	8.70	<50	<0.5	<0.5	<0.5	<0.5	--
12/28/93	327.28	317.38	9.90	<50	<0.5	<0.5	<0.5	0.5	--
03/21/94	327.28	318.03	9.25	<50	1.0	2.0	0.5	1.9	--
06/07/94	327.28	318.23	9.05	<50	<0.5	<0.5	<0.5	<0.5	--
10/07/94	327.28	318.31	8.97	<50	<0.5	<0.5	<0.5	<0.5	--
12/29/94	327.28	318.06	9.22	<50	<0.5	1.1	0.8	2.7	--
03/06/95	327.28	318.26	9.02	<50	<0.5	<0.5	<0.5	<0.5	--
06/14/95	327.28	318.47	8.81	170	<0.5	<0.5	<0.5	<0.5	--
09/14/95	327.28	318.00	9.28	<50	1.0	<0.5	1.6	<0.5	--
12/16/95	327.28	319.42	7.86	<50	<0.5	<0.5	<0.5	<0.5	150
03/28/96	327.28	318.94	8.34	<50	<0.5	<0.5	<0.5	<0.5	53
06/28/96	327.28	318.79	8.49	70	<0.5	<0.5	<0.5	<0.5	92
09/26/96	327.28	318.84	8.44	--	--	--	--	--	--
12/30/96	327.28	319.10	8.18	<50	<0.5	<0.5	<0.5	<0.5	100
03/13/97	327.28	318.43	8.85	--	--	--	--	--	--
06/30/97	327.28	318.79	8.49	260	<0.5	<0.5	<0.5	<0.5	330

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-4 (cont)									
09/30/97	326.93	318.32	8.61	--	--	--	--	--	--
12/31/97	326.93	318.40	8.53	<50	<0.5	<0.5	<0.5	<0.5	170
04/02/98	326.93	317.98	8.95	--	--	--	--	--	--
06/29/98	326.93	318.21	8.72	<50	<0.5	<0.5	<0.5	<0.5	150
09/16/98	326.93	317.59	9.34	--	--	--	--	--	--
12/23/98	326.93	318.18	8.75	<50	<0.5	<0.5	<0.5	<0.5	210
03/26/99	326.93	317.79	9.14	<100	<1.0	<1.0	<1.0	<1.0	303
06/25/99	326.93	317.72	9.21	<50	<0.5	<0.5	<0.5	<0.5	228/237 ¹
09/16/99	326.93	317.01	9.92	--	--	--	--	--	--
12/15/99	326.93	318.32	8.61	<50	<0.5	<0.5	<0.5	<0.5	310
03/07/00	326.93	318.59	8.34	--	--	--	--	--	--
06/19/00	326.93	318.84	8.09	<50	<0.50	<0.50	<0.50	<0.50	370
09/18/00	326.93	318.21	8.72	<50.0	<0.500	<0.500	<0.500	<0.500	326
12/01/00	326.93	318.03	8.90	<50.0	<0.500	<0.500	<0.500	<0.500	478
03/13/01	326.93	318.96	7.97	<50.0	<0.500	<0.500	<0.500	<0.500	9.53
06/01/01	326.93	318.62	8.31	<50	<0.50	<0.50	<0.50	<0.50	<2.5/<2.0 ⁷
09/07/01	326.94	318.49	8.45	<50	<0.50	<0.50	<0.50	<1.5	400
12/05/01	326.94	319.44	7.50	<50	<0.50	<0.50	<0.50	<1.5	350
03/26/02	326.94	318.96	7.98	<50	<0.50	<0.50	<0.50	<1.5	340
06/14/02	326.94	319.10	7.84	<50	<0.50	<0.50	<0.50	<1.5	290
09/20/02	326.94	319.66	7.28	<50	<0.50	<0.50	<0.50	<1.5	420
MW-5									
09/16/91	327.82	317.76	10.06	12,000	4,000	29	1,600	92	--
01/22/92	327.82	317.24	10.58	44,000	2,000	320	5,700	2,400	--
03/26/92	327.82	318.64	9.18	39,000	3,200	210	5,700	2,400	--
06/05/92	327.82	317.92	9.90	28,000	3,800	140	4,000	2,000	--
09/23/92	327.82	317.85	9.97	40,000	2,000	290	2,900	1,800	--
12/30/92	327.82	319.02	8.80	44,000	9,000	190	3,100	1,600	--
03/22/93	327.82	318.49	9.33	43,000	6,500	170	2,400	2,400	--
06/14/93	327.82	318.04	9.78	--	--	--	--	--	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-5 (cont)									
07/25/93	327.82	318.10	9.72	43,000	550	45	2,700	1,100	--
09/23/93	327.82	318.40	9.42	44,000	14,000	640	3,700	1,800	--
12/28/93	327.82	318.15	9.67	56,000	12,000	590	4,100	1,600	--
03/21/94	327.82	318.11	9.71	48,000	12,000	600	4,700	1,600	--
06/07/94	327.82	318.10	9.72	42,000	13,000	480	3,700	1,200	--
10/07/94	327.82	318.27	9.55	15,000	1,100	41	950	34	--
12/29/94	327.82	317.90	9.92	45,000	12,000	460	3,600	1,400	--
03/06/95	327.82	318.50	9.32	40,000	9,700	210	3,500	700	--
06/14/95	327.82	318.41	9.41	42,000	8,000	170	3,700	640	--
09/14/95	327.82	317.30	10.52	26,000	4,100	85	2,000	270	--
12/16/95	327.82	319.48	8.34	35,000	7,300	<0.5	2,900	420	<500
03/28/96	327.82	318.09	9.73	30,000	5,200	160	3,500	600	<250
06/28/96	327.82	318.37	9.45	26,000	4,300	60	2,100	200	680
09/26/96	327.82	317.95	9.87	15,000	2,700	59	1,300	140	400
12/30/96	327.82	318.82	9.00	34,000	4,600	120	2,800	660	310
03/13/97	327.82	318.33	9.49	13,000	1,900	34	1,300	220	76
06/30/97	327.82	318.19	9.63	11,000	1,800	19	84	94	160
10/01/97	327.82	318.08	9.74	27,000	4,700	120	3,700	330	310
12/31/97	327.82	318.34	9.48	34,000	8,000	130	3,400	3,900	<500
04/02/98	327.82	317.44	10.38	27,000	4,600	65	3,400	270	270
06/29/98	327.82	317.79	10.03	16,000	3,000	<50	1,800	220	290
09/16/98	327.82	318.84	8.98	9,700	2,700	52	1,400	210	<250
12/23/98	327.82	318.00	9.82	5,100	1,600	18	570	39	130
03/26/99 ²	327.82	318.26	9.56	25,800	4,410	58.4	2,550	57.2	137
06/25/99	327.82	INACCESSIBLE	--	--	--	--	--	--	--
09/16/99	327.82	317.51	10.31	8,850	1,310	20.3	802	120	155
12/15/99	327.82	317.52	10.30	10,000	2,800	33	1,600	160	250
03/07/00	327.82	318.29	9.53	18,700	3,830	95.6	1,900	305	309
06/19/00 ³	327.82	318.90	8.92	1,000 ⁴	290	3.4	<1.0	14	52
09/18/00 ^{3,6}	327.82	318.18	9.64	924 ⁵	205	<5.00	<5.00	<5.00	83.1
12/01/00 ³	327.82	318.05	9.77	<50.0	0.878	<0.500	<0.500	<0.500	<5.00
03/13/01 ³	327.82	318.67	9.15	333	55.0	0.803	21.8	1.44	2.07

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-5 (cont)									
06/01/01 ³	327.82	317.71	10.11	130 ⁴	36	<0.50	<0.50	<0.50	7.8/<2.0 ⁷
09/07/01 ⁸	327.82	318.43	9.39	2,600	330	<10	200	12	14
12/05/01	327.82	319.57	8.25	25,000	730	36	2,900	650	<25
03/26/02	327.82	319.44	8.38	25,000	1,500	31	2,100	400	<100
06/14/02	327.82	320.18	7.64	27,000	900	52	2,400	320	<50
09/20/02	327.82	320.45	7.37	26,000	450	50	2,400	1,100	<100
MW-6									
09/16/91	328.48	317.87	10.61	6,200	1,300	3.9	550	78	--
01/22/92	328.48	318.18	10.30	18,000	2,800	48	2,000	440	--
03/26/92	328.48	318.98	9.50	21,000	3,300	17	2,100	300	--
06/05/92	328.48	318.14	10.34	14,000	2,800	9.2	1,800	270	--
09/23/92	328.48	317.92	10.56	19,000	1,000	40	1,200	230	--
12/30/92	328.48	318.71	9.75	15,000	1,100	<5.0	1,000	77	--
03/22/93	328.48	319.21	9.27	15,000	1,300	10	770	220	--
06/14/93	328.48	318.33	10.15	--	--	--	--	--	--
07/25/93	328.48	318.23	10.25	6,400	630	<2.5	440	6.0	--
09/23/93	328.48	318.31	10.17	9,500	1,000	23	690	110	--
12/28/93	328.48	317.96	10.52	11,000	890	31	730	48	--
03/21/94	328.48	318.20	10.28	5,700	380	10	270	22	--
06/07/94	328.48	318.20	10.28	5,300	600	4.4	370	26	--
10/07/94	328.48	318.06	10.42	2,600	270	<5.0	110	<5.0	--
12/29/94	328.48	318.23	10.25	4,500	560	6.2	360	<5.0	--
03/06/95	328.48	319.12	9.36	4,100	480	15	290	20	--
06/14/95	328.48	318.37	10.11	2,800	180	6.9	110	6.6	--
09/14/95	328.48	318.21	10.27	3,100	370	<0.5	250	<0.5	--
12/16/95	328.48	319.21	9.27	1,900	210	<0.5	76	<0.5	<13
03/28/96	328.48	319.13	9.35	1,000	120	<0.5	64	<0.5	<5.0
06/28/96	328.48	318.70	9.78	950	110	0.8	44	<0.5	22
09/26/96	328.48	319.02	9.46	1,100	120	1.6	48	<0.5	17
12/30/96	328.48	319.45	9.03	3,200	260	2.3	120	<0.5	23

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (mst)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-6 (cont)									
03/13/97	328.48	318.76	9.72	2,000	250	<0.5	110	<0.5	<5.0
06/30/97	328.48	318.81	9.67	470	<0.5	1.2	<0.5	<0.5	<5.0
10/01/97	327.82	318.53	9.29	1,500	120	3.4	27	<0.5	20
12/31/97	327.82	317.61	10.21	1,500	79	<2.5	28	<2.5	<12
04/02/98	327.82	318.86	8.96	760	48	2.3	9.9	<1.0	15
06/29/98	327.82	318.45	9.37	340	29	<2.5	7.1	<2.5	18
09/16/98	327.82	318.60	9.22	340	18	1.4	5.6	<1.0	18
12/23/98	327.82	317.51	10.31	390	5.4	1.2	0.58	1.2	15
03/26/99 ²	327.82	317.91	9.91	1,310	132	18.5	38.5	1.88	19.1
06/25/99	327.82	317.50	10.32	856	37.4	5.2	10.7	<0.5	<2.0/<5.0 ¹
09/16/99	327.82	317.28	10.54	<50	1.19	<0.5	<0.5	<0.5	<5.0
12/15/99	327.82	319.33	8.49	1,400	110	<5.0	35	<5.0	37
03/07/00	327.82	318.60	9.22	1,200	97.9	2.16	44.8	<1.25	26
06/19/00 ³	327.82	318.42	9.40	160 ¹	1.4	0.73	5.4	2.4	7.9
09/18/00 ^{3,6}	327.82	317.74	10.08	234 ⁵	<0.500	1.72	<0.500	<0.500	<5.00
12/01/00 ³	327.82	317.56	10.26	79.5 ⁵	1.74	<0.500	<0.500	<0.500	<5.00
03/13/01 ³	327.82	318.53	9.29	180	<0.500	<0.500	<0.500	<0.500	<0.500
06/01/01 ³	327.82	317.24	10.58	280 ⁴	4.1	0.62	<0.50	<0.50	25/<2.0 ⁷
09/07/01 ⁸	327.83	317.92	9.91	1,200	70	<0.50	42	1.9	<2.5
12/05/01	327.83	319.02	8.81	1,600	45	<2.0	26	<1.5	<2.5
03/26/02	327.83	318.90	8.93	590	6.0	<0.50	<0.50	<1.5	<2.5
06/14/02	327.83	318.97	8.86	740	15	<0.50	<0.50	<1.5	<2.5
09/20/02	327.83	319.83	8.00	770	9.8	1.9	0.71	<1.5	<2.5
MW-7									
06/17/97	326.37	318.32	8.05	ND	ND	ND	ND	ND	ND
09/30/97	326.37	318.78	7.59	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	326.37	318.49	7.88	<50	<0.5	<0.5	<0.5	<0.5	<2.5
04/02/98	326.37	319.06	7.31	<50	2.6	<0.5	<0.5	<0.5	<2.5
06/29/98	326.37	318.39	7.98	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	326.37	318.55	7.82	<50	<0.5	<0.5	<0.5	<0.5	<2.5

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-7 (cont)									
12/23/98	326.37	318.37	8.00	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	326.37	318.43	7.94	<50	<0.5	<0.5	<0.5	<0.5	<2.0
06/25/99	326.37	318.65	7.72	<50	<0.5	<0.5	<0.5	<0.5	<2.0
09/16/99	326.37	317.61	8.76	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/15/99	326.37	318.42	7.95	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/07/00	326.37	319.38	6.99	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	326.37	318.64	7.73	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/18/00 ⁶	326.37	318.21	8.16	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	326.37	317.06	9.31	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	326.37	318.65	7.72	<50.0	<0.500	<0.500	<0.500	<0.500	1.10
06/01/01	326.37	318.40	7.97	<50	<0.50	<0.50	<0.50	<0.50	<2.5/ ^{2.0} 7
09/07/01	326.37	318.61	7.76	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/05/01	326.37	318.99	7.38	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/26/02	326.37	318.96	7.41	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	326.37	318.85	7.52	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	326.37	319.65	6.72	<50	<0.50	<0.50	<0.50	<1.5	<2.5
MW-8									
06/17/97	325.89	318.15	7.74	ND	ND	ND	ND	ND	ND
09/30/97	325.89	318.16	7.73	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	325.89	318.27	7.62	<50	<0.5	<0.5	<0.5	<0.5	<2.5
04/02/98	325.89	318.48	7.41	<50	<0.5	1.3	0.67	3.5	<2.5
06/29/98	325.89	317.98	7.91	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	325.89	318.42	7.47	<50	<0.5	<0.5	<0.5	<0.5	<2.5
12/23/98	325.89	318.28	7.61	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	325.89	316.81	9.08	<50	<0.5	<0.5	<0.5	<0.5	5.01
06/25/99	325.89	315.94	9.95	<50	<0.5	<0.5	<0.5	<0.5	<2.0
09/16/99	325.89	316.00	9.89	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/15/99	325.89	317.14	8.75	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/07/00	325.89	317.11	8.78	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	325.89	318.34	7.55	<50	<0.50	<0.50	<0.50	<0.50	<2.5

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-8 (cont)									
09/18/00	325.89	317.64	8.25	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	325.89	317.45	8.44	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	325.89	318.32	7.57	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
06/01/01	325.89	317.97	7.92	<50	<0.50	<0.50	<0.50	<0.50	<0.500
09/07/01	325.89	318.11	7.78	<50	<0.50	<0.50	<0.50	<0.50	<2.5/<2.0 ⁷
12/05/01	325.89	318.57	7.32	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/26/02	325.89	318.18	7.71	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	325.89	318.24	7.65	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	325.89	318.53	7.36	<50	<0.50	<0.50	<0.50	<1.5	<2.5
MW-9									
06/20/97	325.73	317.88	7.85	ND	ND	ND	ND	ND	ND
10/01/97	325.73	318.10	7.63	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	325.73	318.53	7.20	<50	<0.5	<0.5	<0.5	<0.5	<2.5
04/02/98	325.73	318.52	7.21	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/29/98	325.73	315.31	10.42	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	325.73	315.99	9.74	<50	<0.5	<0.5	<0.5	<0.5	<2.5
12/23/98	325.73	317.59	8.14	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	325.73	317.62	8.11	<50	<0.5	<0.5	<0.5	<0.5	<2.0
06/25/99	325.73	318.28	7.45	<50	<0.5	<0.5	<0.5	<0.5	<2.0
09/16/99	325.73	316.87	8.86	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/15/99	325.73	317.93	7.80	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/07/00	325.73	318.37	7.36	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	325.73	318.39	7.34	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/18/00	325.73	317.61	8.12	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	325.73	317.46	8.27	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	325.73	318.34	7.39	<50.0	<0.500	<0.500	<0.500	<0.500	<0.500
06/01/01	325.73	317.92	7.81	<50	<0.50	<0.50	<0.50	<0.50	<2.5/<2.0 ⁷
09/07/01	325.73	317.55	8.18	<50	<0.50	<0.50	<0.50	<1.5	<2.5
12/05/01	325.73	318.58	7.15	<50	<0.50	<0.50	<0.50	<1.5	<2.5

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
MW-9 (cont)									
03/26/02	325.73	318.47	7.26	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	325.73	318.62	7.11	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	325.73	318.74	6.99	<50	<0.50	<0.50	<0.50	<1.5	<2.5
BAILER BLANK									
03/22/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
07/25/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/28/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/21/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
TRIP BLANK									
06/22/90	--	--	--	<50	<0.3	<0.3	<0.3	<0.6	--
09/16/91	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
01/22/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/26/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
06/05/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/30/92	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/22/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
07/25/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/23/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/28/93	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/21/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
06/07/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
10/07/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
12/29/94	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
03/06/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
06/14/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--
09/14/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	--

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID/ DATE	TOC (ft.)	GWE (msl)	DTW (ft.)	TPH-G (ppb)	B (ppb)	T (ppb)	E (ppb)	X (ppb)	MTBE (ppb)
TRIP BLANK (cont)									
12/16/95	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/28/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
06/28/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
09/26/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/30/96	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
03/13/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
06/30/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
10/01/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
12/31/97	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
04/02/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/29/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
12/23/98	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
03/26/99	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
09/16/99	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.0
12/15/99	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<5.0
03/07/00	--	--	--	<50	<0.5	<0.5	<0.5	<0.5	<2.5
06/19/00	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/18/00	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
12/01/00	--	--	--	<50.0	<0.500	<0.500	<0.500	<0.500	<5.00
03/13/01	--	--	--	<50.0	<0.500	1.61	<0.500	0.593	<0.500
06/01/01	--	--	--	<50	<0.50	<0.50	<0.50	<0.50	<2.5
09/07/01	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
QA									
12/05/01	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
03/26/02	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
06/14/02	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5
09/20/02	--	--	--	<50	<0.50	<0.50	<0.50	<1.5	<2.5

Table 1
Groundwater Monitoring Data and Analytical Results
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

EXPLANATIONS:

Groundwater monitoring data and laboratory analytical results prior to June 19, 2000, were compiled by reports prepared by Blaine Tech Services, Inc.

TOC = Top of Casing
(ft.) = Feet

GWE = Groundwater Elevation
(msl) = Mean sea level

DTW = Depth to Water

TPH-G = Total Petroleum Hydrocarbons as Gasoline

B = Benzene

T = Toluene

E = Ethylbenzene

X = Xylenes

MTBE = Methyl tertiary butyl ether

(ppb) = Parts per billion

-- = Not Measured/Not Analyzed

QA = Quality Assurance

¹ Confirmation run.

² ORC installed.

³ ORC present in well.

⁴ Laboratory report indicates gasoline C6-C12.

⁵ Laboratory report indicates unidentified hydrocarbons C6-C12.

⁶ Laboratory report indicates insufficient preservative to reduce sample pH to less than 2. Sample was analyzed within 14 days, but beyond the seventh day recommended for Benzene, Toluene, Xylenes, and Ethylbenzene.

⁷ MTBE by EPA Method 8260.

⁸ Removed ORC from well.

Table 2
Groundwater Analytical Results - Oxygenate Compounds
 Chevron Service Station #9-0917
 5280 Hopyard Road
 Pleasanton, California

WELL ID	DATE	TBA (ppb)	MTBE (ppb)	DIPE (ppb)	ETBE (ppb)	TAME (ppb)	1,2-DCA (ppb)	EDB (ppb)
MW-4	06/01/01	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
MW-5	06/01/01	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
MW-6	06/01/01	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
MW-7	06/01/01	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
MW-8	06/01/01	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
MW-9	06/01/01	<20	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0

EXPLANATIONS:

TBA = Tertiary butyl alcohol
 MTBE = Methyl tertiary butyl ether
 DIPE = Di-isopropyl ether
 ETBE = Ethyl tertiary butyl ether
 TAME = Tertiary amyl methyl ether
 1,2-DCA = 1,2-Dichloroethane
 EDB = Ethylene dibromide
 (ppb) = Parts per billion

ANALYTICAL METHOD:

EPA Method 8260 for Oxygenate Compounds

Table 3
Dissolved Oxygen Concentrations
Chevron Service Station #9-0917
5280 Hopyard Road
Pleasanton, California

WELL ID	DATE	Before Purging (mg/L)	After Purging (mg/L)
MW-4	09/07/01	1.96	--
	12/05/01	1.96	--
	03/26/02	2.10	--
	06/14/02	3.10	--
	09/20/02	2.30	--
MW-5	06/19/00	9.65	--
	09/18/00	3.59	--
	12/01/00	3.76	--
	03/13/01	3.59	--
	06/01/01	3.36	--
	09/07/01	4.02	--
	12/05/01	1.04	--
	03/26/02	1.00	--
	06/14/02	0.90	--
09/20/02	1.00	--	
MW-6	06/19/00	5.88	--
	09/18/00	4.81	--
	12/01/00	4.27	--
	03/13/01	4.12	--
	06/01/01	3.84	--
	09/07/01	4.26	--
	12/05/01	1.26	--
	03/26/02	1.30	--
	06/14/02	1.40	--
09/20/02	1.30	--	
MW-7	09/07/01	2.04	--
	12/05/01	1.84	--
	03/26/02	2.00	--
	06/14/02	2.00	--
	09/20/02	2.10	--
MW-8	09/07/01	2.17	--
	12/05/01	2.10	--
	03/26/02	2.10	--
	06/14/02	2.00	--
	09/20/02	2.10	--

Table 3
Dissolved Oxygen Concentrations
 Chevron Service Station #9-0917
 5280 Hopyard Road
 Pleasanton, California

WELL ID	DATE	Before Purging (mg/L)	After Purging (mg/L)
MW-9	09/07/01	1.72	--
	12/05/01	2.21	--
	03/26/02	2.20	--
	06/14/02	1.90	--
	09/20/02	2.00	--

EXPLANATIONS:

(mg/L) = Milligrams per liter

-- = Not Measured

STANDARD OPERATING PROCEDURE - GROUNDWATER SAMPLING

Gettler-Ryan Inc. field personnel adhere to the following procedures for the collection and handling of groundwater samples prior to analysis by the analytical laboratory. Prior to sample collection, the type of analysis to be performed is determined. Loss prevention of volatile compounds is controlled and sample preservation for subsequent analysis is maintained.

Prior to sampling, the presence or absence of free-phase hydrocarbons is determined using an interface probe. Product thickness, if present, is measured to the nearest 0.01 foot and is noted in the field notes. In addition, all depth to water level measurements are collected with a static water level indicator and are also recorded in the field notes, prior to purging and sampling any wells.

After water levels are collected and prior to sampling, each well is purged a minimum of three well casing volumes of water using pre-cleaned pumps (stack, suction, Grundfos), or disposable bailers. Temperature, pH and electrical conductivity are measured a minimum of three times during the purging. Purging continues until these parameters stabilize.

Groundwater samples are collected using disposable bailers. The water samples are transferred from the bailer into appropriate containers. Pre-preserved containers, supplied by analytical laboratories, are used when possible. When pre-preserved containers are not available, the laboratory is instructed to preserve the sample as appropriate. Duplicate samples are collected for the laboratory to use in maintaining quality assurance/quality control standards. The samples are labeled to include the job number, sample identification, collection date and time, analysis, preservation (if any), and the sample collector's initials. The water samples are placed in a cooler, maintained at 4°C for transport to the laboratory. Once collected in the field, all samples are maintained under chain of custody until delivered to the laboratory.

The chain of custody document includes the job number, type of preservation, if any, analysis requested, sample identification, date and time collected, and the sample collector's name. The chain of custody is signed and dated (including time of transfer) by each person who receives or surrenders the samples, beginning with the field personnel and ending with the laboratory personnel.

A laboratory supplied trip blank accompanies each sampling set. For sampling sets greater than 20 samples, 5% trip blanks are included. The trip blank is analyzed for some or all of the same compounds as the groundwater samples.

As requested by Chevron Products Company, the purge water and decontamination water generated during sampling activities is transported by IWM to McKittrick Waste Management located in McKittrick, California.



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242
 Site Address: 5280 Hopyard Road Event Date: 9/20/07
 City: Pleasanton, CA Sampler: G. Rogers

Well ID: MW-4 Well Condition: OK
 Well Diameter: 2 in.
 Total Depth: 24.75 ft.
 Depth to Water: 7.28 ft.
 $17.47 \times VF \ 0.17 = 2.97 \times 3 \text{ (case volume)} = \text{Estimated Purge Volume: } \underline{9} \text{ gal.}$

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

Purge Equipment:
 Disposable Bailer _____
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Other: _____

Sampling Equipment:
 Disposable Bailer _____
 Pressure Bailer _____
 Discrete Bailer _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Bailed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Product Transferred to: _____

Start Time (purge): 0800 Weather Conditions: Clear
 Sample Time/Date: 0840 9/20/07 Water Color: Clear Odor: NO
 Purging Flow Rate: ~1.5 gpm. Sediment Description: _____
 Did well de-water? NO If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>0815</u>	<u>3</u>	<u>7.77</u>	<u>396</u>	<u>29.6</u>	<u>2.3</u>	
<u>0819</u>	<u>6</u>	<u>7.74</u>	<u>385</u>	<u>29.6</u>		
<u>0823</u>	<u>9</u>	<u>7.71</u>	<u>382</u>	<u>29.5</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-4</u>	<u>3</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8021)</u>

COMMENTS: _____

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242
 Site Address: 5280 Hopyard Road Event Date: 9/20/02
 City: Pleasanton, CA Sampler: G. Rogers

Well ID: MW-5 Well Condition: OK
 Well Diameter: 2 in.
 Total Depth: 23.74 ft.
 Depth to Water: 7.37 ft.
 Volume Factor (VF) table:

3/4" = 0.02	1" = 0.04	<u>2" = 0.17</u>	3" = 0.38
4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

 $16.37 \times VF \ 0.17 = 2.78 \times 3 \text{ (case volume)} = \text{Estimated Purge Volume: } 8.5 \text{ gal.}$

Purge Equipment:
 Disposable Bailer
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Other: _____

Sampling Equipment:
 Disposable Bailer
 Pressure Bailer _____
 Discrete Bailer _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Bailed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Product Transferred to: _____

Start Time (purge): 1000 Weather Conditions: Clear
 Sample Time/Date: 1040 9/20/02 Water Color: Clear Odor: Yes
 Purging Flow Rate: _____ gpm. Sediment Description: _____
 Did well de-water? No If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>1010</u>	<u>3</u>	<u>8.44</u>	<u>697</u>	<u>30.1</u>	<u>1.0</u>	
<u>1015</u>	<u>6</u>	<u>8.41</u>	<u>693</u>	<u>30.0</u>		
<u>1025</u>	<u>8.5</u>	<u>8.40</u>	<u>690</u>	<u>30.0</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-5</u>	<u>3 x voa vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8021)</u>

COMMENTS: _____

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242
 Site Address: 5280 Hopyard Road Event Date: 9/20/02
 City: Pleasanton, CA Sampler: G. Rogers

Well ID: MW-6 Well Condition: OK
 Well Diameter: 2 in.
 Total Depth: 25.20 ft.
 Depth to Water: 8.00 ft.
 Volume Factor (VF) table:

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

 $17.2 \times VF_{0.17} = 2.92 \times 3 = \text{Estimated Purge Volume: } 9 \text{ gal.}$

Purge Equipment:
 Disposable Bailer
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Other: _____

Sampling Equipment:
 Disposable Bailer
 Pressure Bailer _____
 Discrete Bailer _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Bailed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Product Transferred to: _____

Start Time (purge): 0900 Weather Conditions: Clear
 Sample Time/Date: 0940 9/20/02 Water Color: Clear Odor: yes
 Purging Flow Rate: — gpm. Sediment Description: _____
 Did well de-water? No If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (u mhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>0910</u>	<u>3</u>	<u>7.59</u>	<u>397</u>	<u>30.3</u>	<u>1.3</u>	
<u>0920</u>	<u>6</u>	<u>7.53</u>	<u>392</u>	<u>30.3</u>		
<u>0930</u>	<u>9</u>	<u>7.51</u>	<u>390</u>	<u>30.7</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-6</u>	<u>3 x voa vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8021)</u>

COMMENTS: _____

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242
 Site Address: 5280 Hopyard Road Event Date: 9/20/02
 City: Pleasanton, CA Sampler: G. B...

Well ID: MW-7 Well Condition: OK
 Well Diameter: 2 in.
 Total Depth: 20.05 ft.
 Depth to Water: 6.72 ft.
 Volume Factor (VF) table:

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

 $13.33 \times VF 0.17 = 2.27 \times 3 \text{ (case volume)} = \text{Estimated Purge Volume: } 7 \text{ gal.}$

Purge Equipment:
 Disposable Bailer
 Stainless Steel Bailer
 Stack Pump
 Suction Pump
 Grundfos
 Other:

Sampling Equipment:
 Disposable Bailer
 Pressure Bailer
 Discrete Bailer
 Other:

Time Started: _____ (2400 hrs)
 Time Bailed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Product Transferred to: _____

Start Time (purge): 0710 Weather Conditions: Clear
 Sample Time/Date: 0745 9/20/02 Water Color: Clear Odor: NO
 Purging Flow Rate: — gpm. Sediment Description: _____
 Did well de-water? NO If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>0720</u>	<u>2</u>	<u>7.44</u>	<u>815</u>	<u>30.4</u>	<u>2.1</u>	
<u>0725</u>	<u>4</u>	<u>7.46</u>	<u>810</u>	<u>30.4</u>		
<u>0730</u>	<u>7</u>	<u>7.38</u>	<u>807</u>	<u>30.3</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-7</u>	<u>3 x vva vial</u>	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8021)</u>

COMMENTS: _____

Add/Replaced Lock: _____

Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242
 Site Address: 5280 Hopyard Road Event Date: 9/20/02
 City: Pleasanton, CA Sampler: G. Rogers

Well ID: MW-8 Well Condition: OK
 Well Diameter: 2 in.
 Total Depth: 2251 ft.
 Depth to Water: 7.36 ft.
 Volume Factor (VF) table:

Volume	3/4"= 0.02	1"= 0.04	2"= 0.17	3"= 0.38
Factor (VF)	4"= 0.66	5"= 1.02	6"= 1.50	12"= 5.80

 $1515 \times VF \ 0.17 = 257 \times 3 \text{ (case volume)} = \text{Estimated Purge Volume: } 7.5 \text{ gal.}$

Purge Equipment:
 Disposable Bailer
 Stainless Steel Bailer _____
 Stack Pump _____
 Suction Pump _____
 Grundfos _____
 Other: _____

Sampling Equipment:
 Disposable Bailer
 Pressure Bailer _____
 Discrete Bailer _____
 Other: _____

Time Started: _____ (2400 hrs)
 Time Bailed: _____ (2400 hrs)
 Depth to Product: _____ ft
 Depth to Water: _____ ft
 Hydrocarbon Thickness: _____ ft
 Visual Confirmation/Description: _____
 Skimmer / Absorbant Sock (circle one)
 Amt Removed from Skimmer: _____ gal
 Amt Removed from Well: _____ gal
 Product Transferred to: _____

Start Time (purge): 0625 Weather Conditions: Clear
 Sample Time/Date: 0655 9/20/02 Water Color: Clear Odor: No
 Purging Flow Rate: — gpm. Sediment Description: _____
 Did well de-water? No If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>0635</u>	<u>2.5</u>	<u>7.51</u>	<u>798</u>	<u>30.4</u>	<u>2.1</u>	
<u>0640</u>	<u>5</u>	<u>7.42</u>	<u>791</u>	<u>30.4</u>		
<u>0645</u>	<u>7.5</u>	<u>7.40</u>	<u>789</u>	<u>30.3</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-8</u>	<u>3</u> x vov vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8021)</u>

COMMENTS: _____

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Size: _____



GETTLER-RYAN INC.

WELL MONITORING/SAMPLING FIELD DATA SHEET

Client/Facility #: ChevronTexaco #9-0917 Job Number: 385242
 Site Address: 5280 Hopyard Road Event Date: 9/20/02
 City: Pleasanton, CA Sampler: G. P.

Well ID: MW-9 Well Condition: OK
 Well Diameter: 2 in.
 Total Depth: 19.71 ft.
 Depth to Water: 10.99 ft.
 Volume Factor (VF) table:

Volume	3/4" = 0.02	1" = 0.04	2" = 0.17	3" = 0.38
Factor (VF)	4" = 0.66	5" = 1.02	6" = 1.50	12" = 5.80

 Calculation: 12.72 x VF 0.17 = 2.16 x3 (case volume) = Estimated Purge Volume: 6.5 gal.

Purge Equipment:	Sampling Equipment:	Time Started: _____ (2400 hrs) Time Bailed: _____ (2400 hrs) Depth to Product: _____ ft Depth to Water: _____ ft Hydrocarbon Thickness: _____ ft Visual Confirmation/Description: _____ Skimmer / Absorbant Sock (circle one) Amt Removed from Skimmer: _____ gal Amt Removed from Well: _____ gal Product Transferred to: _____
Disposable Bailer <input checked="" type="checkbox"/>	Disposable Bailer <input checked="" type="checkbox"/>	
Stainless Steel Bailer _____	Pressure Bailer _____	
Stack Pump _____	Discrete Bailer _____	
Suction Pump _____	Other: _____	
Grundfos _____		
Other: _____		

Start Time (purge): 0540 Weather Conditions: Clear
 Sample Time/Date: 0615 19/20/02 Water Color: Clear Odor: NO
 Purging Flow Rate: _____ gpm. Sediment Description: _____
 Did well de-water? NO If yes, Time: _____ Volume: _____ gal.

Time (2400 hr.)	Volume (gal.)	pH	Conductivity (umhos/cm)	Temperature (C/F)	D.O. (mg/L)	ORP (mV)
<u>0550</u>	<u>2</u>	<u>7.55</u>	<u>827</u>	<u>30.5</u>	<u>2.0</u>	
<u>0555</u>	<u>4</u>	<u>7.51</u>	<u>821</u>	<u>30.4</u>		
<u>0600</u>	<u>6.5</u>	<u>7.49</u>	<u>819</u>	<u>30.4</u>		

LABORATORY INFORMATION

SAMPLE ID	(#) CONTAINER	REFRIG.	PRESERV. TYPE	LABORATORY	ANALYSES
<u>MW-9</u>	<u>3</u> x voa vial	<u>YES</u>	<u>HCL</u>	<u>LANCASTER</u>	<u>TPH-G(8015)/BTEX+MTBE(8021)</u>

COMMENTS: _____

Add/Replaced Lock: _____ Add/Replaced Plug: _____ Size: _____



RECEIVED

SEP 3 2002

GETTLER-RYAN, INC.
GENERAL CHEMISTRY LAB

ANALYTICAL RESULTS

Prepared for:

ChevronTexaco
6001 Bollinger Canyon Rd L4310
San Ramon CA 94583

925-842-8582

Prepared by:

Lancaster Laboratories
2425 New Holland Pike
Lancaster, PA 17605-2425

SAMPLE GROUP

The sample group for this submittal is 823828. Samples arrived at the laboratory on Saturday, September 21, 2002. The PO# for this group is 99011184 and the release number is STREICH.

<u>Client Description</u>			<u>Lancaster Labs Number</u>
QA-T-020920	NA	Water	3904073
MW-4-W-020920	Grab	Water	3904074
MW-5-W-020920	Grab	Water	3904075
MW-6-W-020920	Grab	Water	3904076
MW-7-W-020920	Grab	Water	3904077
MW-8-W-020920	Grab	Water	3904078
MW-9-W-020920	Grab	Water	3904079

1 COPY TO Delta C/O Gettler-Ryan

Attn: Deanna L. Harding

Questions? Contact your Client Services Representative
Teresa M Lis at (717) 656-2300.

Respectfully Submitted,

Steven A. Skiles
Steven A. Skiles
Sr. Chemist





Lancaster Laboratories Sample No. WW 3904073

Collected: 09/20/2002 00:00

Account Number: 10905

Submitted: 09/21/2002 09:45
 Reported: 10/01/2002 at 15:21
 Discard: 11/01/2002

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

QA-T-020920 NA Water GRD
 Facility# 90917 Job# 385242
 5280 Hopyard-Pleasanton T0600100345 QA

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01729	TPH-GRO - Waters					
01730	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
08214	BTEX, MTBE (8021)					
00776	Benzene	71-43-2	N.D.	0.50	ug/l	1
00777	Toluene	108-88-3	N.D.	0.50	ug/l	1
00778	Ethylbenzene	100-41-4	N.D.	0.50	ug/l	1
00779	Total Xylenes	1330-20-7	N.D.	1.5	ug/l	1
00780	Methyl tert-Butyl Ether	1634-04-4	N.D.	2.5	ug/l	1
A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01729	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	09/25/2002 00:21	Melissa D Mann	1
08214	BTEX, MTBE (8021)	SW-846 8021B	1	09/25/2002 00:21	Melissa D Mann	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/25/2002 00:21	Melissa D Mann	n.a.

#=Laboratory Method Detection Limit exceeded target detection limit
 N.D.=Not detected or above the Reporting Limit



Lancaster, PA 17605-2425
 717-656-2300 Fax: 717-656-2681



Lancaster Laboratories Sample No. WW 3904074

Collected: 09/20/2002 08:40 by GR

Account Number: 10905

Submitted: 09/21/2002 09:45
 Reported: 10/01/2002 at 15:21
 Discard: 11/01/2002

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

MW-4-W-020920 Grab Water
 Facility# 90917 Job# 385242 GRD
 5280 Hopyard-Pleasanton T0600100345 MW-4

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01729	TPH-GRO - Waters					
01730	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
08214	BTEX, MTBE (8021)					
00776	Benzene	71-43-2	N.D.	0.50	ug/l	1
00777	Toluene	108-88-3	N.D.	0.50	ug/l	1
00778	Ethylbenzene	100-41-4	N.D.	0.50	ug/l	1
00779	Total Xylenes	1330-20-7	N.D.	1.5	ug/l	1
00780	Methyl tert-Butyl Ether	1634-04-4	420.	2.5	ug/l	1
A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date and Time			
01729	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	09/26/2002 09:13		Melissa D Mann	1
08214	BTEX, MTBE (8021)	SW-846 8021B	1	09/26/2002 09:13		Melissa D Mann	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/26/2002 09:13		Melissa D Mann	n.a.

#=Laboratory Method Detection Limit exceeded target detection limit
 N.D.=Not detected in Laboratory Reporting Limit



Lancaster, PA 17605-2425
 717-656-2300 Fax: 717-656-2681



Lancaster Laboratories Sample No. WW 3904075

Collected: 09/20/2002 10:40 by GR

Account Number: 10905

Submitted: 09/21/2002 09:45
 Reported: 10/01/2002 at 15:21
 Discard: 11/01/2002

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

MW-5-W-020920 Grab Water
 Facility# 90917 Job# 385242 GRD
 5280 Hopyard-Pleasanton T0600100345 MW-5

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01729	TPH-GRO - Waters					
01730	TPH-GRO - Waters	n.a.	26,000.	500.	ug/l	10
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
08214	BTEX, MTBE (8021)					
00776	Benzene	71-43-2	450.	2.0	ug/l	10
00777	Toluene	108-88-3	50.	2.0	ug/l	10
00778	Ethylbenzene	100-41-4	2,400.	2.0	ug/l	10
00779	Total Xylenes	1330-20-7	1,100.	6.0	ug/l	10
00780	Methyl tert-Butyl Ether	1634-04-4	N.D. #	100.	ug/l	10
A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						

Due to the presence of an interferent near its retention time, the normal reporting limit was not attained for MTBE. The presence or concentration of this compound cannot be determined due to the presence of this interferent.

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Analysis		Analyst	Dilution Factor
			Trial#	Date and Time		
01729	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	09/25/2002 10:42	Anastasia Papadoplos	10
08214	BTEX, MTBE (8021)	SW-846 8021B	1	09/25/2002 10:42	Anastasia Papadoplos	10
01146	GC VOA Water Prep	SW-846 5030B	1	09/25/2002 10:42	Anastasia Papadoplos	n.a.

#=Laboratory Method Detection Limit exceeded target detection limit
 N.D.=Not detected or above the Reporting Limit



Lancaster, PA 17605-2425
 717-656-2300 Fax: 717-656-2681



Lancaster Laboratories Sample No. WW 3904076

Collected: 09/20/2002 09:40 by GR

Account Number: 10905

Submitted: 09/21/2002 09:45
 Reported: 10/01/2002 at 15:21
 Discard: 11/01/2002

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

MW-6-W-020920 Grab Water
 Facility# 90917 Job# 385242 GRD
 5280 Hopyard-Pleasanton T0600100345 MW-6

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01729	TPH-GRO - Waters					
01730	TPH-GRO - Waters	n.a.	770.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
08214	BTEX, MTBE (8021)					
00776	Benzene	71-43-2	9.8	0.50	ug/l	1
00777	Toluene	108-88-3	1.9	0.50	ug/l	1
00778	Ethylbenzene	100-41-4	0.71	0.50	ug/l	1
00779	Total Xylenes	1330-20-7	N.D.	1.5	ug/l	1
00780	Methyl tert-Butyl Ether	1634-04-4	N.D.	2.5	ug/l	1
A site-specific MSD sample was not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Diluti Facto
01729	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	09/25/2002 11:15	Anastasia Papadoplos	1
08214	BTEX, MTBE (8021)	SW-846 8021B	1	09/25/2002 11:15	Anastasia Papadoplos	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/25/2002 11:15	Anastasia Papadoplos	n.a.

#=Laboratory Method Detection Limit exceeded target detection limit
 N.D.=Not detected above the Reporting Limit



Lancaster Laboratories, Inc.
 2425 New Holland Pike
 Lancaster, PA 17605-2425
 717-656-2300 Fax: 717-656-2681



Lancaster Laboratories Sample No. WW 3904077

Collected: 09/20/2002 07:45 by GR

Account Number: 10905

Submitted: 09/21/2002 09:45
 Reported: 10/01/2002 at 15:22
 Discard: 11/01/2002

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

MW-7-W-020920 Grab Water
 Facility# 90917 Job# 385242 GRD
 5280 Hopyard-Pleasanton T0600100345 MW-7

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01729	TPH-GRO - Waters					
01730	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. Site-specific MS/MSD samples were not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
08214	BTEX, MTBE (8021)					
00776	Benzene	71-43-2	N.D.	0.50	ug/l	1
00777	Toluene	108-88-3	N.D.	0.50	ug/l	1
00778	Ethylbenzene	100-41-4	N.D.	0.50	ug/l	1
00779	Total Xylenes	1330-20-7	N.D.	1.5	ug/l	1
00780	Methyl tert-Butyl Ether	1634-04-4	N.D.	2.5	ug/l	1
Site-specific MS/MSD samples were not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01729	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	09/25/2002 06:06	Linda C Pape	1
08214	BTEX, MTBE (8021)	SW-846 8021B	1	09/25/2002 06:06	Linda C Pape	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/25/2002 06:06	Linda C Pape	n.a.

#=Laboratory Method Detection Limit exceeded target detection limit
 N.D.=Not detected or above the Reporting Limit





Lancaster Laboratories Sample No. WW 3904078

Collected: 09/20/2002 06:55 by GR

Account Number: 10905

Submitted: 09/21/2002 09:45
 Reported: 10/01/2002 at 15:22
 Discard: 11/01/2002

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

MW-8-W-020920 Grab Water
 Facility# 90917 Job# 385242 GRD
 5280 Hopyard-Pleasanton T0600100345 MW-8


CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01729	TPH-GRO - Waters					
01730	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. Site-specific MS/MSD samples were not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
08214	BTEX, MTBE (8021)					
00776	Benzene	71-43-2	N.D.	0.50	ug/l	1
00777	Toluene	108-88-3	N.D.	0.50	ug/l	1
00778	Ethylbenzene	100-41-4	N.D.	0.50	ug/l	1
00779	Total Xylenes	1330-20-7	N.D.	1.5	ug/l	1
00780	Methyl tert-Butyl Ether	1634-04-4	N.D.	2.5	ug/l	1
Site-specific MS/MSD samples were not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis Date and Time	Analyst	Dilution Factor
01729	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	09/25/2002 06:38	Linda C Pape	1
08214	BTEX, MTBE (8021)	SW-846 8021B	1	09/25/2002 06:38	Linda C Pape	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/25/2002 06:38	Linda C Pape	n.a.

#=Laboratory Method Detection Limit exceeded target detection limit
 N.D.=Not detected above the Reporting Limit





Lancaster Laboratories Sample No. WW 3904079

Collected: 09/20/2002 06:15 by GR

Account Number: 10905

Submitted: 09/21/2002 09:45
 Reported: 10/01/2002 at 15:22
 Discard: 11/01/2002

ChevronTexaco
 6001 Bollinger Canyon Rd L4310
 San Ramon CA 94583

MW-9-W-020920 Grab Water
 Facility# 90917 Job# 385242 GRD
 5280 Hopyard-Pleasanton T0600100345 MW-9

CAT No.	Analysis Name	CAS Number	As Received Result	As Received Method Detection Limit	Units	Dilution Factor
01729	TPH-GRO - Waters					
01730	TPH-GRO - Waters	n.a.	N.D.	50.	ug/l	1
The reported concentration of TPH-GRO does not include MTBE or other gasoline constituents eluting prior to the C6 (n-hexane) TPH-GRO range start time. Site-specific MS/MSD samples were not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						
08214	BTEX, MTBE (8021)					
00776	Benzene	71-43-2	N.D.	0.50	ug/l	1
00777	Toluene	108-88-3	N.D.	0.50	ug/l	1
00778	Ethylbenzene	100-41-4	N.D.	0.50	ug/l	1
00779	Total Xylenes	1330-20-7	N.D.	1.5	ug/l	1
00780	Methyl tert-Butyl Ether	1634-04-4	N.D.	2.5	ug/l	1
Site-specific MS/MSD samples were not submitted for the project. A LCS/LCSD was performed to demonstrate precision and accuracy at a batch level.						

State of California Lab Certification No. 2116

Laboratory Chronicle

CAT No.	Analysis Name	Method	Trial#	Analysis		Analyst	Dilution Factor
				Date and Time			
01729	TPH-GRO - Waters	N. CA LUFT Gasoline Method	1	09/25/2002 07:10		Linda C Pape	1
08214	BTEX, MTBE (8021)	SW-846 8021B	1	09/25/2002 07:10		Linda C Pape	1
01146	GC VOA Water Prep	SW-846 5030B	1	09/25/2002 07:10		Linda C Pape	n.a.

#=Laboratory Method Detection Limit exceeded target detection limit
 N.D.=Not detected or above the Reporting Limit



Lancaster Laboratories, Inc.
 2425 New Holland Pike
 Lancaster, PA 17605-2425
 717-656-2300 Fax: 717-656-2681



Quality Control Summary

Client Name: ChevronTexaco
 Reported: 10/01/02 at 03:22 PM

Group Number: 823828

Laboratory Compliance Quality Control

<u>Analysis Name</u>	<u>Blank Result</u>	<u>Blank MDL</u>	<u>Report Units</u>	<u>LCS %REC</u>	<u>LCSD %REC</u>	<u>LCS/LCSD Limits</u>	<u>RPD</u>	<u>RPD Max</u>
Batch number: 02267A17B Sample number(s): 3904077-3904079								
Benzene	N.D.	.2	ug/l	93	96	80-118	3	30
Toluene	N.D.	.2	ug/l	97	101	82-119	4	30
Ethylbenzene	N.D.	.2	ug/l	97	101	81-119	4	30
Total Xylenes	N.D.	.6	ug/l	100	104	82-120	4	30
Methyl tert-Butyl Ether	N.D.	.3	ug/l	92	95	79-127	3	30
TPH-GRO - Waters	N.D.	50.	ug/l	85	85	74-116	0	30
Batch number: 02267A51A Sample number(s): 3904073								
Benzene	N.D.	.2	ug/l	115	109	80-118	5	30
Toluene	N.D.	.2	ug/l	113	108	82-119	5	30
Ethylbenzene	N.D.	.2	ug/l	109	104	81-119	5	30
Total Xylenes	N.D.	.6	ug/l	112	107	82-120	4	30
Methyl tert-Butyl Ether	N.D.	.3	ug/l	105	102	79-127	3	30
TPH-GRO - Waters	N.D.	50.	ug/l	103	93	74-116	10	30
Batch number: 02267A51B Sample number(s): 3904075-3904076								
Benzene	N.D.	.2	ug/l	115	109	80-118	5	30
Toluene	N.D.	.2	ug/l	113	108	82-119	5	30
Ethylbenzene	N.D.	.2	ug/l	109	104	81-119	5	30
Total Xylenes	N.D.	.6	ug/l	112	107	82-120	4	30
Methyl tert-Butyl Ether	N.D.	.3	ug/l	105	102	79-127	3	30
TPH-GRO - Waters	N.D.	50.	ug/l	103	93	74-116	10	30
Batch number: 02267A51C Sample number(s): 3904074								
Benzene	N.D.	.2	ug/l	115	109	80-118	5	30
Toluene	N.D.	.2	ug/l	113	108	82-119	5	30
Ethylbenzene	N.D.	.2	ug/l	109	104	81-119	5	30
Total Xylenes	N.D.	.6	ug/l	112	107	82-120	4	30
Methyl tert-Butyl Ether	N.D.	.3	ug/l	105	102	79-127	3	30
TPH-GRO - Waters	N.D.	50.	ug/l	103	93	74-116	10	30

Sample Matrix Quality Control

<u>Analysis Name</u>	<u>MS %REC</u>	<u>MSD %REC</u>	<u>MS/MSD Limits</u>	<u>RPD</u>	<u>BKG MAX</u>	<u>DUP Conc</u>	<u>DUP RPD</u>	<u>Dup RPD Max</u>
Batch number: 02267A51A Sample number(s): 3904073								
Benzene	113		83-130					
Toluene	110		87-129					
Ethylbenzene	113		86-133					
Total Xylenes	113		86-132					
Methyl tert-Butyl Ether	100		66-140					
TPH-GRO - Waters	93		74-132					
Batch number: 02267A51B Sample number(s): 3904075-3904076								
Benzene	113		83-130					
Toluene	110		87-129					
Ethylbenzene	113		86-133					
Total Xylenes	113		86-132					
Methyl tert-Butyl Ether	100		66-140					
TPH-GRO - Waters	93		74-132					

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The background result was more than four times the spike added.



Lancaster Laboratories, Inc.
 2425 New Holland Pike
 PO Box 12425
 Lancaster, PA 17605-2425
 717-656-2300 Fax: 717-656-2681



Quality Control Summary

Client Name: ChevronTexaco
 Reported: 10/01/02 at 03:22 PM

Group Number: 823828

Sample Matrix Quality Control

Analysis Name	MS	MSD	MS/MSD	RPD	BKG	DUP	DUP	Dup
	<u>%REC</u>	<u>%REC</u>	<u>Limits</u>	<u>RPD</u>	<u>MAX</u>	<u>Conc</u>	<u>Conc</u>	<u>RPD</u>
								<u>RPD</u>
								<u>Max</u>
Batch number: 02267A51C	Sample number(s): 3904074							
Benzene	113		83-130					
Toluene	110		87-129					
Ethylbenzene	113		86-133					
Total Xylenes	113		86-132					
Methyl tert-Butyl Ether	100		66-140					
TPH-GRO - Waters	93		74-132					

Surrogate Quality Control

Analysis Name: BTEX, MTBE (8021)
 Batch number: 02267A17B

	Trifluorotoluene-F	Trifluorotoluene-P
3904077	100	96
3904078	97	96
3904079	99	96
Blank	99	96
LCS	110	96
LCSD	112	97
Limits:	57-146	71-130

Analysis Name: BTEX, MTBE (8021)
 Batch number: 02267A51A

	Trifluorotoluene-F	Trifluorotoluene-P
3904073	87	94
Blank	86	94
LCS	97	94
LCSD	97	94
MS	97	89
Limits:	57-146	71-130

Analysis Name: BTEX, MTBE (8021)
 Batch number: 02267A51B

	Trifluorotoluene-F	Trifluorotoluene-P
3904075	101	118
3904076	98	99
Blank	88	92
LCS	97	94
LCSD	97	94
MS	97	89
Limits:	57-146	71-130

Analysis Name: BTEX, MTBE (8021)
 Batch number: 02267A51C

- *- Outside of specification
- (1) The result for one or both determinations was less than five times the LOQ.
 - (2) The background result was more than four times the spike added.



Lancaster Laboratories

Where quality is a science.

Page 3 of 3

Quality Control Summary

Client Name: ChevronTexaco
Reported: 10/01/02 at 03:22 PM

Group Number: 823828

Surrogate Quality Control

	Trifluorotoluene-F	Trifluorotoluene-P
3904074	90	96
Blank	89	95
LCS	97	94
LCSD	97	94
MS	97	89
Limits:	57-146	71-130

*- Outside of specification

- (1) The result for one or both determinations was less than five times the LOQ.
- (2) The background result was more than four times the spike added.



Lancaster Laboratories, Inc.
2425 New Holland Pike
PO Box 12425
Lancaster, PA 17605-2425
717-656-2300 Fax: 717-656-2681