



91 JAN 11 PM 12:33

January 4, 1991

Alameda County Health Agency
Department of Environmental Health
80 Swan Way, Room 200
Oakland, California 94621

Attention: Ms. Katherine Chesick

Reference: ARCO Service Station No. 2112
1260 Park Street
Alameda, California

Ms. Chesick:

As requested by ARCO Products Company, we are forwarding a copy of the Work Plan prepared for the above referenced location.

If you should have any questions or comments, please call.

Sincerely,

Keith E. Bullock

KEB/me

enclosures

cc: K. Christie, ARCO Products Company
H. C. Winsor, ARCO Products Company
T. Callaghan, Regional Water Quality Control Board



GeoStrategies Inc.

WORK PLAN

ARCO Service Station No. 2112
1260 Park Street
Alameda, California

792002-2

January 2, 1991



GeoStrategies Inc.

2140 WEST WINTON AVENUE
HAYWARD, CALIFORNIA 94545

(415) 352-4800

January 2, 1991

Gettler-Ryan Inc.
2150 West Winton Avenue
Hayward, California 94545

Attn: Mr. Keith Bullock

Re: WORK PLAN
ARCO Service Station No. 2112
1260 Park Street
Alameda, California

Gentlemen:

This Work Plan has been prepared for the ARCO Service Station at the above referenced location (Plate 1). GeoStrategies Inc. (GSI) proposes three vapor extraction wells will be installed to address the locations of known soil contamination. In addition, GSI proposes that five monitoring wells be installed to evaluate ground-water quality conditions, hydraulic gradient, and flow direction beneath the site. The proposed well locations are shown on Plate 2.

BACKGROUND

In January, 1990 Applied Geosystems (AGS) drilled six exploratory soil borings (B-1 through B-6) to assess soil conditions in the area of the present and former underground storage tank (UGST) complexes. Five borings were drilled in the vicinity of the present UGST complex. Analytical results of soil samples from the present tank complex indicated detectable levels of benzene up to 210 parts per million (ppm) petroleum hydrocarbons. One boring was drilled in the area of the present UGST complex. Soil samples from the future tank complex were reported as none detected for petroleum hydrocarbons. First encountered groundwater was reported to be at approximately 12 feet below ground surface. Results of this investigation were presented in the AGS report dated February 20, 1990.

GeoStrategies Inc.

Gettler-Ryan Inc.
January 2, 1991
Page 2

In July, 1990 Gettler-Ryan (G-R) removed the five existing steel UGST's and associated tank to dispenser underground piping (Plate 2). These included one 10,000 gallon, two 6,000 gallon, and two 4,000 gallon UGSTs that contained gasoline products. Approximately 2700 yards of soil were excavated from these activities at the site.

In August, 1990, G-R installed four double-walled fiberglass UGSTs and new product lines (Plate 2). The site is presently occupied by an operating ARCO Service Station.

HYDROGEOLOGIC SETTING

The project site is situated on Alameda Island. Alameda is bordered by the San Francisco Bay to the southwest, San Leandro Bay to the southeast, and Oakland Inner Harbor to the east. The closest marine water is approximately 2/3 mile south of the site. Previous investigations (Hickerbottom and Muir 1988; Applied Geosystems, February 1990; GeoStrategies Inc., October 1990) depict the site as being within the East Bay Plain in the north central portion of the Berkeley Alluvial Plain. AGS boring logs indicate the site is underlain by poorly-graded sands with some clay content to approximately 5 feet below ground surface and clayey sand to the lower limit of the soil boreholes. First encountered groundwater was approximately 12 feet below ground surface. Potentiometric data has not been collected and so groundwater flow direction and hydraulic gradient have not been determined.

TECHNICAL RATIONALE

Since concentrations of TPH-Gasoline, and benzene were detected in the previous soil investigation phase, potential soil and ground-water impacts need to be ascertained. GSI proposes the installation of three vapor extraction wells to address the locations of known soil contamination. We also propose the installation of five on-site ground-water monitoring wells, to provide groundwater-quality and potentiometric data for evaluating shallow ground-water flow direction and gradient. The proposed three vapor extraction wells and five monitoring wells are based on soil analytical data obtained during the UGST replacement effort. The locations are as follows:

GeoStrategies Inc.

Gettler-Ryan Inc.
January 2, 1991
Page 3

- o The three proposed vapor extraction wells will be installed outside the northern and southern extent of the former UGST excavations. The third vapor extraction well will be installed in the vicinity of the former vapor pots along Encinal Avenue. These wells will be used for in-situ remediation of known soil contamination.
- o One monitoring well will be installed within the former UGST complex. This well will provide data to evaluate soil and ground-water contamination in and below the former UGST complex.
- o One monitoring well will be installed adjacent to the former vapor pots along Encinal Avenue. This will provide data to evaluate soil and ground water contamination adjacent to a possible source area.
- o One monitoring well will be installed adjacent to and in the inferred downgradient direction of the western-most service island near Park Street. This well will assist in evaluating soil and groundwater conditions adjacent to an area where hydrocarbons in the soil were detected during pipe removal.
- o One monitoring well will be installed along the southern property boundary in the inferred downgradient direction of the former UGST complex. The purpose of this well is for further definition of hydrocarbons in the soil and groundwater near the site boundary.
- o One monitoring well will be installed in the southeastern corner of the site in the inferred upgradient direction. This well will provide needed background soil and groundwater analytical data.

GeoStrategies Inc.

Gettler-Ryan Inc.
January 2, 1991
Page 4

SCOPE OF WORK

The following tasks are proposed:

TASK 1: Three vapor extraction wells will be installed in 12-inch borings. The borings will be drilled by conventional hollow-stem auger techniques to a total depth of approximately 10.5 feet. The vapor extraction wells will be constructed using 4-inch-diameter, precleaned Schedule 40 PVC well casing and continuously-wrapped well screens. The well screens will be placed from 5.0 to 10.0 feet below ground surface. The annular sand pack will extend from the total depth to 1-foot above the well screen. A 1-foot bentonite seal, followed by a bentonite/cement grout to the ground surface, will be installed above the sandpack.

TASK 2. Five 8-inch-diameter exploratory borings will be drilled to an anticipated depth of approximately 30 feet below ground surface. Conventional hollow-stem auger techniques will be used to advance the borings. One boring will be continuously sampled to its total anticipated depth (approximately 30 feet). If a clay aquitard of five feet or more is encountered before a depth of 30 feet, the boring advancement will stop. Samples of the clay aquitard will then be collected for permeability testing. Five feet of aquitard material will be verified, then the borehole backfilled with bentonite to the upper surface of the clay stratum prior to construction of the well.

GeoStrategies Inc.

Gettler-Ryan Inc.
January 2, 1991
Page 5

TASK 3. The monitoring wells will be constructed using 3-inch-diameter, precleaned Schedule 40 PVC well casing with 0.02-inch machine slotted well screen. The well installed in the tank excavation will be constructed using a 6-inch-diameter, precleaned Schedule 40 PVC well casing with 0.02-inch machine slotted well screen. This well will be used for subsequent aquifer tests. The monitoring wells will be constructed according to the appended procedures (Appendix A). The well screens will extend a minimum of 5 feet above the first encountered water-level. The annular sandpack will extend from total depth to a minimum of 1-foot above the well screen. A minimum 1-foot bentonite seal, followed by a cement grout seal to ground surface, will be placed above the sandpack. The well screens will be placed so that well designs are compatible with subsurface geologic conditions. No well screens will be installed that potentially may permit cross-contamination of adjacent aquifers.

TASK 4. Soil samples will be collected from the three proposed exploratory boreholes for analysis of specific chemical parameters discussed in Task 6 (described below). Collected soil samples will be field screened for visual evidence of contamination (i.e. product saturation, discoloration, etc.) and for organic vapors using an Organic Vapor Monitor (OVM) photoionization detector.

These field procedures are performed and recorded solely as reconnaissance data, and GSI does not consider field screening techniques as verification of contamination. Therefore, non-detectable field screened samples may also be selected for laboratory analysis as potential "false-negative" soil samples for quality control (QC) purposes. The selection of soil samples for chemical analysis will be based upon site-specific geologic conditions as they relate to potential contamination migration pathways and confining layers (aquitards).

GeoStrategies Inc.

Gettler-Ryan Inc.
January 2, 1991
Page 6


- TASK 5. The monitoring wells will be properly developed prior to collecting ground-water samples. A G-R Field Technician will perform the well development and evaluate completeness based on visual inspection of discharge water. Following well development, the wells will be sampled for parameters listed in Task 6.
- TASK 6. Soil and ground-water samples will be analyzed for TPH-Gasoline using EPA Method 8015 (Modified); and Benzene, Toluene, Ethylbenzene, Xylenes (BTEX) using EPA Method 8020/602.
- TASK 7. A report of the well installation will be prepared documenting field procedures, description of the subsurface geology (boring logs), well construction details, chemical analytical results, and a brief discussion of results.
- TASK 8. A vapor extraction pilot study will be conducted upon receipt of a permit from the Bay Area Air Quality Management District (BAAQMD). Data collected from this study will be used to design the vapor extraction system.

GeoStrategies Inc.


Gettler-Ryan Inc.
January 2, 1991
Page 7

If you have any questions, please call.


GeoStrategies Inc. by,

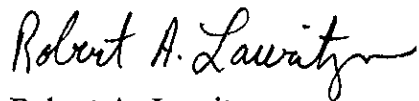

Robert A. Lauritzen
Geologist



David H. Peterson
Senior Geologist
C.E.G. 1186



RAL/DHP/mlg

Plate 1. Vicinity Map
Plate 2. Site Plan

Appendix A: Field Methods and Procedures

GeoStrategies Inc.

References Cited

Applied Geosystems, 1990, Soil Boring Report, AGS Job 69048-1, dated February, 1990.

GeoStrategies Inc., 1990, Soil Boring Report, Report No. 7667-1, dated July 5, 1990.

Hickenbottom, K. and Muir, K., 1988, Geohydrology and Ground-water-quality overview of the East Bay Plain Area, Alameda County, California, Alameda County 205 (j) Report.

GeoStrategies Inc.

ILLUSTRATIONS



Base Map: USGS Topographic Map



GeoStrategies Inc.

Vicinity Map
 ARCO Service Station #2112
 1260 Park Street
 Alameda, California

PLATE

1

JOB NUMBER
7920


REVIEWED BY RG/CEG

DATE
3/90

REVISED DATE

REVISED DATE



PARK STREET

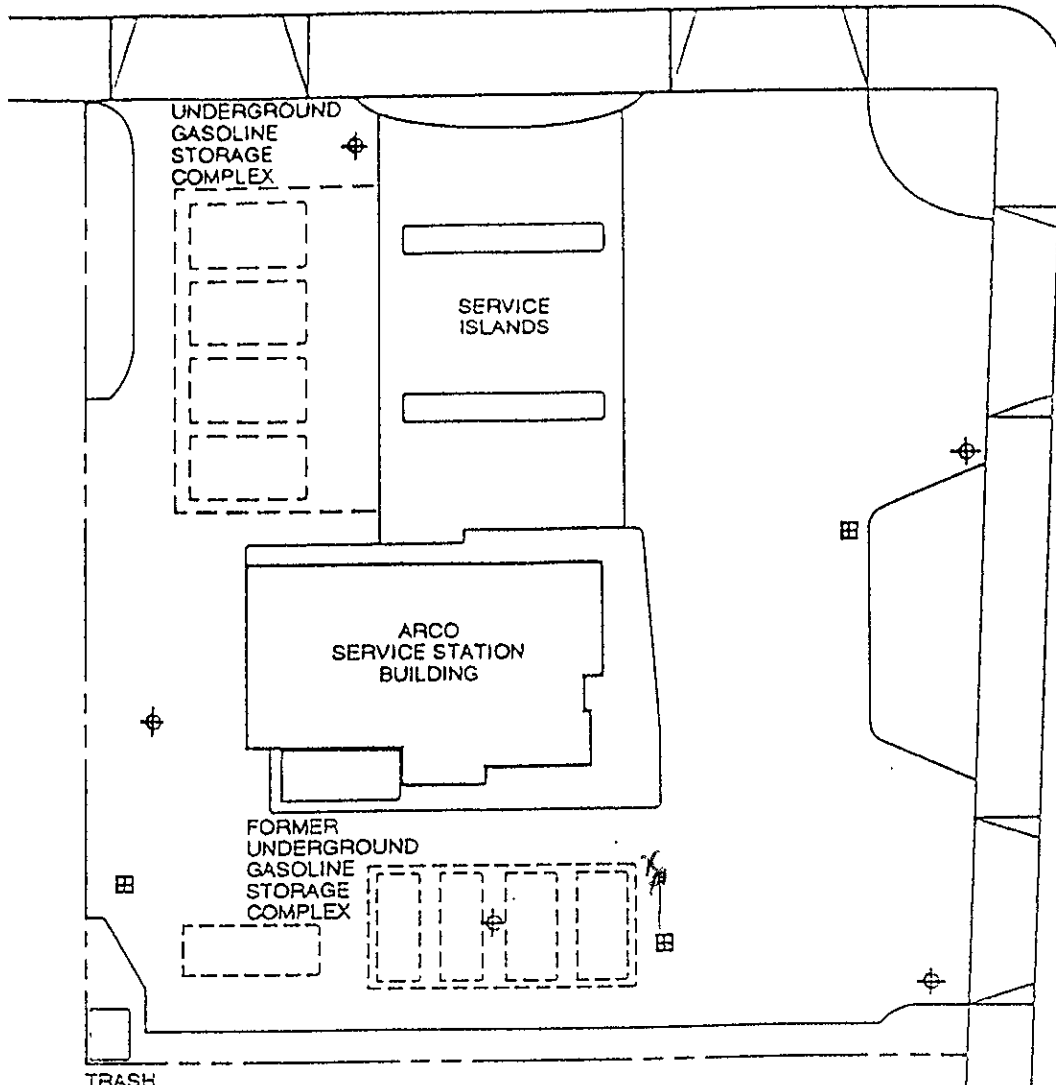

ENCINAL AVENUE

EXPLANATION

- ⊕ Proposed ground-water monitoring well location
- BB Proposed vapor extraction well location



GeoStrategies Inc.

Site Plan
 ARCO Service Station #2112
 1260 Park Street
 Alameda, California

PLATE

2

GeoStrategies Inc.

APPENDIX A
FIELD METHODS AND PROCEDURES

FIELD METHODS AND PROCEDURES

EXPLORATION DRILLING

Mobilization

Prior to any drilling activities, GeoStrategies Inc. (GSI) will verify that necessary drilling permits have been secured.

Utility locations will be located and drilling will be conducted so as not to disrupt activities at a project site. GSI will obtain and review available public data on subsurface geology and if warranted, the location of wells within a half-mile of the project site will be identified. Drillers will be notified in advance so that drilling equipment can be inspected prior to performing work.

Drilling

The subsurface investigations are typically performed to assess the lateral and vertical extent of petroleum hydrocarbons present in soils and groundwater. Drilling methods will be selected to optimize field data requirements as well as be compatible with known or suspected subsurface geologic conditions.

Monitoring wells are installed using a truck-mounted hollow-stem auger drill rig or mud-rotary drill rig. Typically, the hollow-stem rig is used for wells up to 100 feet, if subsurface conditions are favorable. Wells greater than 100-feet deep are typically drilled using mud-rotary techniques. When mud rotary drilling is used, an electric log will be performed for additional lithological information. Also during mud rotary drilling, precautions will be taken to prevent mud from circulating contaminants by using a conductor casing to seal off contaminated zones. Samples will be collected for lithologic logging by continuous chip, and where needed by drive sample or core as specified by the supervising geologist.

Soil Sampling

Shallow soil borings will be drilled using a truck-mounted hollow-stem auger drilling rig, unless site conditions favor a different drilling method. Drilling and sampling methods will be consistent with ASTM Method D-1452-80. The auger size will be a minimum 6-inch nominal outside-diameter (O.D). No drilling fluids will be used during this drilling method. The augers and other tools used in the bore hole will be steam cleaned before use and between borings to minimize the possibilities of cross-contamination between borings.

Soil samples are typically collected at 5-foot intervals as a minimum from ground surface to total depth of boring. Additional soil samples will be collected based on significant lithologic changes and/or potential chemical content. Soil samples from each sampling interval will be lithologically described by a GSI geologist (Figure 1). Soil colors will be described using the Munsell Color Chart. Rock units will be logged using appropriate lithologic terms, and colors described by the G.S.A. Rock Color Chart.

Head-space analyses will be performed to check for the evidence of volatile organic compounds. Head-space analyses will be performed using an organic vapor analyzer; either an OVA, HNU, or OVM. Organic vapor concentrations will be recorded on the GSI field log of boring (Figure 1). The selection of soil samples for chemical analysis are typically based on the following criteria:

- 1) Soil discoloration
- 2) Soil odors
- 3) Visual confirmation of chemical in soil
- 4) Depth with respect to underground tanks (or existing grade)
- 5) Depth with respect to ground water
- 6) OVA reading

Soil samples (full brass liners) selected for chemical analysis are immediately covered with aluminum foil and the liner ends are capped to prevent volatilization. The samples are labeled and entered onto a Chain-of-Custody form, and placed in a cooler on blue ice for transport to a State-certified analytical laboratory.

Soil cuttings are stockpiled on-site. Soils are sampled and analyzed for site-specific chemical parameters. Disposition of soils is dependent of chemical analytical results of the samples.

Soil Sampling - cont.

Soil borings not converted to monitoring wells will be backfilled (sealed) to ground surface using either a neat cement or cement-bentonite grout mixture. Backfilling will be tremied by continuously pumping grout from the bottom to the top of the boring where depth exceeds 20' or as required by local permit requirements.

All field and office work, including exploratory boring logs, are prepared under the direction of a registered geologist.

Monitoring Well Installation

Monitoring well casing and screen will be constructed of Schedule 40, flush-joint threaded polyvinylchloride (PVC). The well screen will be factory mill-slotted unless additional open area is required (eg. conversion to an extraction well in a low-yield aquifer). The screen length will be placed adjacent to the aquifer material to a minimum of 2-feet above encountered water. No screen shall be placed in a borehole that potentially creates hydraulic interconnection of two or more aquifer units. Screen slot size and well sand pack will be compatible with encountered aquifer materials, as confirmed by sieve analysis.

Monitoring wells will be completed below grade (Figure 2) unless special conditions exist that require above-grade completion design. In the event a monitoring well is required in an aquifer unit beneath an existing aquifer, the upper aquifer will be sealed off by installing a steel conductor casing with an annular neat cement or cement-bentonite grout seal. This seal will be continuously tremie pumped from the bottom of the annulus to ground surface.

The monitoring well sand pack will be placed adjacent to the entire screened interval and will extend a recommended minimum distance of 2-feet above the top of the screen. No sand pack will be placed that interconnects two or more aquifer units. A minimum 2-foot bentonite pellet or bentonite slurry seal will be placed above the sand pack. Sand pack, bentonite, and cement seal levels will be confirmed by sounding the annulus with a calibrated weighted tape. The remaining annular space above the bentonite seal will be grouted with a bentonite-cement mixture and will be tremie-pumped from the bottom of the annular space to the ground surface. The bentonite content of the grout will not exceed 5 percent by weight. A field log of boring and a field well completion form will be prepared by GSI for each well installed.

Decontamination of drilling equipment before drilling and between wells will consist of steam cleaning, and/or Alconox wash.

Well Development

All newly installed wells will be properly developed within 48 hours of completion. No well will be developed until the well seal has set a minimum of 12 hours. Development procedures will include one or more of the methods described below:

Bailing

Bailing will be used to remove suspended sediments and drilling fluids from the well, where applicable. The bailer will be raised and lowered through the column of water in the well so as to create a gentle surging action in the screened interval. This technique may be used in conjunction with other techniques, such as pumping, and may be used alone if the well is of low yield.

Pumping

Pumping will be used in conjunction with bailing or surging. The pump will be operated in such a manner as to gently surge the entire screened interval of the well. This may involve operating the pump with a packer type mechanism attached and slowly raising and lowering the pump, or by cycling the pump off and on to allow water to move in and out of the screened interval. Care will be used not to overpump a well.

Surging

Surging will be performed on wells that are screened in known or suspected high yield formations and/or on larger diameter (recovery) wells. A surge block will be raised and lowered through the entire screened interval, forcing water in and out of the well screen and sand pack. Pumping or air lifting will be used in conjunction with this method of development to remove any sediment brought into the well during surging.

Air Lifting

Air lifting will be used to remove sediment from wells as an alternative to pumping under certain conditions. When appropriate, a surge block designed for use with air lifting will be used to agitate the entire screened interval and water will be lifted out of the well using forced air. When air lifting is performed, the air source will be either nitrogen or filtered air and the procedure will be performed gently to prevent any damage to the well screen or casing and to insure that discharged water is contained.

Well Development - cont.

All well developing equipment will be thoroughly decontaminated prior to development using a steam cleaner and/or Alconox detergent wash and clean water rinse. During development procedures, field parameters (temperature, specific conductance and pH) will be monitored and recorded on well development forms (Figure 3). Equilibration requirements consist of a minimum of three readings with the following accuracy standards:

pH	± 0.1 pH units
Specific Conductance	$\pm 10\%$ of full scale reading
Temperature	± 0.5 degrees Celsius

The wells will be developed until water is visibly clear and free of sediment, and well purging parameters stabilized. A minimum of 8 to 10 well volumes will be purged from each well, if feasible. If well purging parameters have not stabilized before 10 casing volumes have been removed, well development will continue until purging parameters have stabilized and formation water is being drawn into the well. The adequacy of well development will be judged by the field technician performing the well development and based on known formation conditions.

Well Surveying

Monitoring wells will be surveyed to obtain top of box elevations to the nearest ± 0.01 foot. Water level measurements will be recorded to the nearest ± 0.01 foot and referenced to Mean Sea Level (MSL). If additional wells are required, then existing and newly installed wells are surveyed relative to MSL.

GROUND-WATER SAMPLING AND ANALYSIS

Quality Assurance/Quality Control Objectives

The sampling and analysis procedures employed by Gettler-Ryan Inc. (G-R) for ground-water sampling and monitoring follow specific Quality Assurance/Quality Control (QA/QC) guidelines. Quality Assurance objectives have been established by G-R to develop and implement procedures for obtaining and evaluating water quality and field data in an accurate, precise, and complete manner so that sampling procedures and field measurements provide information that is comparable and representative of actual field conditions. Quality Control (QC) is maintained by G-R by using specific field protocols and requiring the analytical laboratory to perform internal and external QC checks. It is the goal of G-R to provide data that are accurate, precise, complete, comparable, and representative. The definitions for accuracy, precision, completeness, comparability, and representativeness are as follows:

- Accuracy - the degree of agreement of a measurement with an accepted referenced or true value.
- Precision - a measure of agreement among individual measurements under similar conditions. Usually expressed in terms of the standard deviation.
- Completeness - the amount of valid data obtained from a measurement system compared to the amount that was expected to meet the project data goals.
- Comparability - expresses the confidence with which one data set can be compared to another.
- Representativeness - a sample or group of samples that reflects the characteristics of the media at the sampling point. It also includes how well the sampling point represents the actual parameter variations which are under study.

As part of the G-R QA/QC program, applicable federal, state, and local reference guidance documents are followed. The procedures outlined in these regulations, manuals, handbooks, guidance documents, and journals are incorporated into the G-R sampling procedures to assure that; (1) ground-water samples are properly collected, (2) ground-water samples are identified, preserved, and transported in a manner such that they are representative of field conditions, and (3) chemical analysis of samples are accurate and reproducible.

Guidance and Reference Documents Used to Collect Groundwater Samples

These documents are used to verify G-R sampling procedures and are consistent with current regulatory guidance. If site specific work and sampling plans are required, those plans will be developed from these documents, and newly received applicable documents.

U.S.E.P.A. - 330/9-51-002	NEIC Manual for Groundwater/Subsurface Investigation at Hazardous Waste Sites
U.S.E.P.A. - 530/SW611	Procedures Manual for Groundwater Monitoring at Solid Waste Disposal Facilities (August, 1977)
U.S.E.P.A. - 600/4-79-020	Methods for Chemical Analysis of Water and Wastes (1983)
U.S.E.P.A. - 600/4-82-029	Handbook for Sampling and Sample Preservation of Water and Wastewater (1982)
U.S.E.P.A. - 600/4-82-057	Test Methods for Organic Chemical Analysis of Municipal and Industrial Wastewater (July, 1982)
U.S.E.P.A. - SW-846#, 3rd Edition	Test Methods for Evaluating Solid Waste - Physical/Chemical Methods (November, 1986)
40 CFR 136.3e, Table II (Code of Federal Regulations)	Required Containers, Preservation Techniques, and Holding Times
Resources Conservation and Recover Act (OSWER 9950.1)	Groundwater Monitoring Technical Enforcement Guidance Document (September, 1986)
California Regional Water Quality Control Board (Central Valley Region)	A Compilation of Water Quality Goals (September, 1988); Updates (October, 1988)
California Regional Water Quality Control Board (North Coast, San Francisco Bay, and Central Valley)	Regional Board Staff Recommendations for Initial Evaluations and Investigation of Underground Tanks: Tri-Regional Recommendations (June, 1988)

Guidance and Reference Documents Used to Collect Groundwater Samples (cont.)

Regional Water Quality Control Board (Central Valley Region)	Memorandum: Disposal, Treatment, and Refuse of Soils Contaminated with Petroleum Fractions (August, 1986)
State of California Department of Health Services	Hazardous Waste Testing Laboratory Certification List (March, 1987)
State of California Water Resources Control Board	Leaking Underground Fuel Tank (LUFT) Field Manual (May, 1988), and LUFT Field Manual Revision (April, 1989)
State of California Water Resources Control Board	Title 23, (Register #85.#33-8-17-85), Subchapter 16: Underground Tank Regulations; Article 3, Sections 2632 and 2634; Article 4, Sections 2645, 2646, 2647, and 2648; Article 7, Sections 2670, 2671, and 2672 (October, 1986: including 1988 Amendments)
Alameda County Water District	Groundwater Protection Program: Guidelines for Groundwater and Soil Investigations at Leaking Underground Fuel Tank Sites (November, 1988)
American Public Health Association	Standard Methods for the Examination of Water and Wastewaters, 16th Edition
Analytical Chemistry (journal)	Principles of Environmental Analysis, Volume 55, Pages 2212-2218 (December, 1983)
Napa County	Napa County Underground Storage Tank Program: Guidelines for Site Investigations; February 1989.
Santa Clara Valley Water District	Guidelines for Preparing or Reviewing Sampling Plans for Soil and Groundwater Investigation of Fuel Contamination Sites (January, 1989)

Guidance and Reference Documents Used to Collect Groundwater Samples (cont.)

Santa Clara Valley Water District	Investigation and Remediation at Fuel Leak sites: Guidelines for Investigation and Technical Report Preparation (March 1989)
Santa Clara Valley Water District	Revised Well Standards for Santa Clara County (July 18, 1989)
American Petroleum Institute	Groundwater Monitoring & Sample Bias; API Publication 4367, Environmental Affairs Department, June 1983
American Petroleum Institute	A Guide to the Assessment and Remediation of Underground Petroleum Releases; API Publication 1628, February 1989
American Petroleum Institute	Literature Summary: Hydrocarbon Solubilities and Attenuations Mechanisms, API Publication 4414, August 1985
Site Specific (as needed)	General and specific regulatory documents as required.

Because ground-water samples collected by G-R are analyzed to the parts per billion (ppb) range for many compounds, extreme care is exercised to prevent contamination of samples. When volatile or semi-volatile organic compounds are included for analysis, G-R sampling crew members will adhere to the following precautions in the field:

1. A clean pair of new, disposable gloves are worn for each well being sampled.
2. When possible, samples are collected from known or suspected wells that are least contaminated (i.e. background) followed by wells in increasing order of contamination.
3. Ambient conditions are continually monitored to maintain sample integrity.

When known or potential organic compounds are being sampled for, the following additional precautions are taken:

1. All sample bottles and equipment are kept away from fuels and solvents. When possible, gasoline (used in generators) is stored away from bailers, sample bottles, purging pumps, etc.
2. Bailers are made of Teflon or Stainless Steel. Other materials such as plastic may contaminate samples with phthalate esters which interfere with many Gas Chromatography (GC) analyses.
3. Volatile organic ground-water samples are collected so that air passage through the sample does not occur or is minimal (to prevent volatiles from being stripped from the samples): sample bottles are filled by slowly running the sample down the side of the bottle until there is a positive convex meniscus over the neck of the bottle; the Teflon side of the septum (in cap) is positioned against the meniscus, and the cap screwed on tightly; the sample is inverted and the bottle lightly tapped. The absence of an air bubble indicates a successful seal; if a bubble is evident, the cap is removed, more sample is added, and the bottle is resealed.
4. Extra Teflon seals are brought into the field in case seals are difficult to handle and/or are dropped. Dropped seals are considered contaminated and are not used. When replacing seals or if seals become flipped, care is taken to assure that the Teflon seal faces down.

Sample analysis methods, containers, preservatives and holding times are shown on Table 1.

Laboratory and field handling procedures of samples are monitored by including QC samples for analysis with every submitted sample lot from a project site. QC samples may include any combination of the following:

- A. Trip Blank: Used for purgeable organic compounds only; QC samples are collected in 40 milliliter (ml) sample vials filled in the analytical laboratory with organic-free water. Trip blanks are sent to the project site, and travel with project site samples. Trip blanks are not opened, and are returned from a project site with the project site samples for analysis.
- B. Field Blank: Prepared in the field using organic-free water. These QC samples accompany project site samples to the laboratory and are analyzed for specific chemical parameters unique to the project site where they were prepared.
- C. Duplicates: Duplicated samples are collected "second samples" from a selected well and project site. They are collected as either split samples or second-run samples collected from the same well.
- D. Equipment Blank: Periodic QC sample collected from field equipment rinsate to verify decontamination procedures.

The number and types of QC samples are determined as follows:

- A. Up to 2 wells - Trip Blank Only
- B. 2 to 5 Wells - 1 Field Blank and 1 Trip Blank
- C. 5 to 10 Wells - 1 Field blank, 1 Trip Blank, and 1 Duplicate
- D. More than 10 Wells - 1 Field Blank, 1 Trip Blank, and 1 Duplicate per each 12 wells
- E. If sampling extends beyond one day, quality control samples will be collected for each day.

Additional QC is performed through ongoing and random reviews of duplicate samples to evaluate the precision of the field sampling procedures and analytical laboratory. Precision of QC data is accomplished by calculating the Relative Percent Difference (RPD). The RPD is evaluated to assess whether values are within an acceptable range (typically $\pm 20\%$ of duplicate sample).

SAMPLE COLLECTION

This section describes the routine procedures followed by G-R while collecting ground-water samples for chemical analysis. These procedures include decontamination, water-level measurements, well purging, physical parameter measurements, sample collection, sample preservation, sample handling, and sample documentation. Critical sampling objectives for G-R are to:

1. Collect ground-water samples that are representative of the sampled matrix and,
2. Maintain sample integrity from the time of sample collection to receipt by the analytical laboratory.

Sample analyses methods, containers, preservation, and holding times are presented in Table 1.

Decontamination Procedures

All physical parameter measuring and sampling equipment are decontaminated prior to sample collection using Alconox or equivalent detergent followed by steam cleaning with deionized water. Any sampling equipment surfaces or parts that might absorb specific contaminants, such as plastic pump valves, impellers, etc., are cleaned in the same manner.

Sample bottles, bottle caps, and septa used for sampling volatile organics are thoroughly cleaned and prepared in the laboratory. Sample bottles, bottle caps, and septa are protected from all potential chemical contact before actual usage at a sample location.

During field sampling, equipment placed in a well are decontaminated before purging or sampling the next well. The equipment are decontaminated by cleaning with Alconox or equivalent detergent followed by steam cleaning with deionized water.

Water-Level Measurements

Prior to purging and sampling a well, the static-water levels are measured in all wells at a project site using an electric sounder and/or calibrated portable oil-water interface probe (Figure 4). Both static water-level and separate-phase product thickness are measured to the nearest ± 0.01 foot. The presence of separate-phase product is confirmed using a clean, acrylic or polyvinylchloride (PVC) bailer, measured to the nearest ± 0.01 foot with a decimal scale tape.

Water-Level Measurements (continued)

The monofilament line used to lower the bailer is replaced between wells with new line to preclude the possibility of cross-contamination. Field observations (e.g. well integrity, product color, turbidity, water color, odors, etc.) are noted on the G-R Well Sampling Field Data Sheet shown in Figure 4. Before and after each use, the electric sounder, interface probe and bailer are decontaminated by washing with Alconox or equivalent detergent followed by rinsing with deionized water to prevent cross-contamination.

As mentioned previously, water-levels are measured in wells with known or suspected lowest dissolved chemical concentrations to the highest dissolved concentrations.

Well Purging

Before sampling occurs, well casing storage water and interstitial water in the artificial sand pack will be purged using (1) a positive displacement bladder pump constructed of inert, non-wetting, Teflon and stainless steel, (2) a pneumatic-airlift pumping system, (3) a centrifugal pumping system, or (4) a Teflon or Stainless steel bailer (Figure 5). Methods of purging will be assessed based on well size, location, accessibility, and known chemical conditions. Individual well purge volumes are calculated from borehole volumes which take into account the sand packed interval in the well annular space. As a general rule, a minimum of 3 and a maximum of 10 borehole volumes will be purged. Wells which dewater or demonstrate slow recharge periods (i.e. low-yield wells) during purging activities may be sampled after fewer purging cycles. If a low-yield (low recovery) well is to be sampled, sampling will not take place until at least 80 percent of the previously measured water column has been replaced by recharge, or as per local requirements. Physical parameter measurements (temperature, pH, and specific conductance) are closely monitored throughout the well purging process and are used by the G-R sampling crew as indicators for assessing sufficient purging. Purging is continued until all three physical parameters have stabilized. Specific conductance (conductivity) meters are read to the nearest ± 10 umhos/cm, and are calibrated daily. pH meters are read to the nearest ± 0.1 pH units and are calibrated daily. Temperature is read to the nearest 0.1 degree F. Calibration of physical parameter meters will follow manufacturers specifications. Monitoring wells will be purged according to the protocol presented in Figure 5. Collected field data during purging activities will be entered on the G-R Well Sampling Field Data Sheet shown in Figure 4. Copies of the G-R Field Data Sheets will be reviewed by the G-R Sampling Manager for accuracy and completeness.

DOCUMENTATION

Sample Container Labels

Each sample container will be labeled by an adhesive label, noted in permanent ink immediately after the sample is collected. Label information will include:

Sample point designation (i.e. well number or code)

Sampler's identification

Project number

Date and time of collection

Type of preservation used

Well Sampling Data Forms

In the field, the G-R sampling crew will record the following information on the Well Sampling Data Sheet for each sample collected:

Project number

Client

Location

Source (i.e. well number)

Time and date

Well accessibility and integrity

Pertinent well data (e.g. depth, product thickness, static water-level, pH, specific conductance, temperature)

Calculated and actual purge volumes

Chain-of-Custody

A Chain-of-Custody record (Figure 6) shall be completed and accompany every sample and every shipment of samples to the analytical laboratory in order to establish the documentation necessary to trace sample possession from time of collections. The record will contain the following information:

- Sample or station number or sample identification (ID)
- Signature of collector, sampler, or recorder
- Date and time of collection
- Place of collection
- Sample type
- Signatures of persons involved in chain of possession
- Inclusive dates of possession

Samples shall always be accompanied by a Chain-of-Custody record. When transferring the samples, the individual relinquishing and receiving the samples will sign, date, and note the time on the Chain-of-Custody record. G-R will be responsible for notifying the laboratory coordinator when and how many samples will be sent to the laboratory for analysis, and what types of analyses shall be performed.


TABLE 1

SAMPLE ANALYSIS METHODS, CONTAINERS, PRESERVATIONS, AND HOLDING TIMES

Parameter	Analytical Method	Reporting Units	Container	Preservation	Maximum Holding Time
Total Petroleum Hydrocarbons (Gasoline)	EPA 8015 (modified)	mg/l ug/l	40 ml. vial glass, Teflon	cool, 4 C HCl to pH<2	14 days (maximum)
Benzene	EPA 8020	mg/l	50 ml. vial	cool, 4 C	7 days (w/o preservative)
Toluene		ug/l	glass, Teflon	HCl to pH<2	14 days (w preservative)
Ethylbenzene			lined septum		
Xylenes (BTEX)					
Oil & Grease	SM 503E	mg/l ug/l	1 l glass, Teflon lined septum	H2SO4 or HCl to pH<2	28 days (maximum)
Total Petroleum Hydrocarbons (Diesel)	EPA 8015 (modified)	mg/l ug/l	40 ml. vial glass, Teflon lined septum	cool, 4 C	14 days (maximum)
Halogenated Volatile Organics (chlorinated solvents)	8010	mg/l ug/l	40 ml. vial glass, Teflon lined septum	cool, 4 C	14 days (maximum)
Non chlorinated solvents	8020	mg/l ug/l	40 ml. vial glass, Teflon lined septum	cool, 4 C HCl to pH<2	14 days (maximum)
Volatile Organics	8240	mg/l ug/l	40 ml. vial glass, Teflon lined septum	cool, 4 C HCl to pH<2	14 days (maximum)
Semi-Volatile Organics	8270	mg/l ug/l	1 l amber glass, Teflon lined septum	cool, 4 C	7 days extract 40 days (maximum to analyze)
Specific Conductance (Field test)		umhos/cm			
pH (Field test)		pH units			
Temperature (Field test)		Deg F			

WELL CONSTRUCTION DETAIL

FIGURE 2

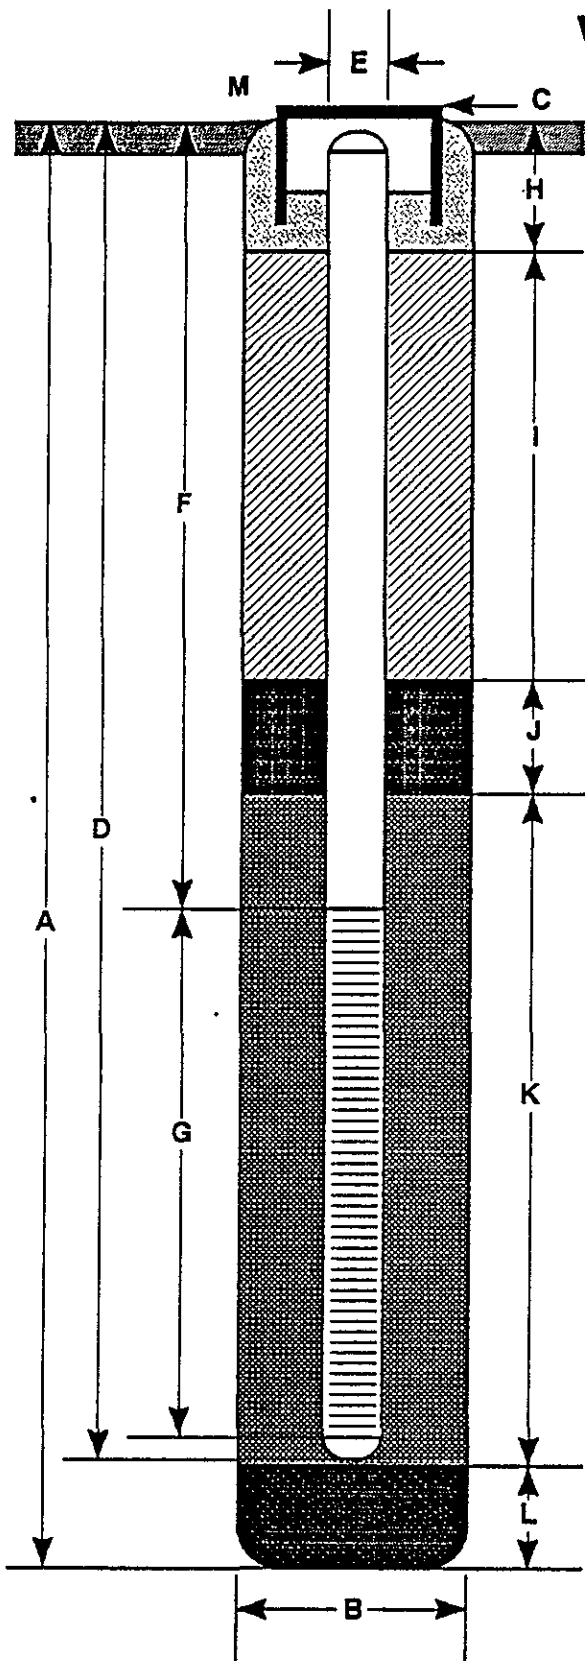

- A Total Depth of Boring _____ ft.
- B Diameter of Boring _____ in.
Drilling Method _____
- C Top of Box Elevation _____ ft.
 Referenced to Mean Sea Level
 Referenced to Project Datum
- D Casing Length _____ ft.
Material _____
- E Casing Diameter _____ in.
- F Depth to Top Perforations _____ ft.
- G Perforated Length _____ ft.
Perforated Interval from _____ to _____ ft.
Perforation Type _____
Perforation Size _____ in.
- H Surface Seal from _____ to _____ ft.
Seal Material _____
- I Backfill from _____ to _____ ft.
Backfill Material _____
- J Seal from _____ to _____ ft.
Seal Material _____
- K Gravel Pack from _____ to _____ ft.
Pack Material _____
- L Bottom Seal _____ ft.
Seal Material _____
- M _____

Note: Depths measured from initial ground surface



GeoStrategies Inc.

Well Construction Detail

WELL NO. _____

JOB NUMBER _____

REVIEWED BY RG/CEG

DATE _____

REVISED DATE _____

REVISED DATE _____

WELL DEVELOPMENT FORM

FIGURE 3

Page _____ of _____

(to be filled out in office)

Client _____ SS# _____ Job# _____

Name _____ Location _____

Well# _____ Screened Interval _____ Depth _____

Aquifer Material _____ Installation Date _____

Drilling Method _____ Borehole Diameter _____

Comments regarding well installation: _____

(to be filled out in the field) Name _____

Date _____ Development Method _____

Total Depth _____ - Depth to liquid _____ = Water Column _____

Product thickness _____

Water Column x Diameter (in.) x #Vol x 0.0408 = _____ gals

Purge Start _____ Stop _____ Rate _____ gpm

Table with 6 columns: Gallons, Time, Clarity, Temp., pH, Conductivity. Includes a row with '0' under Gallons and multiple empty rows for data entry.

Total gallons removed _____ Development stop time _____

Depth to liquid _____ at _____ (time)

Odor of water _____ Water discharged to _____

Comments _____

GETTLER-RYAN INC.

General and Environmental Contractors

WELL SAMPLING FIELD DATA SHEET

FIGURE 4

COMPANY _____ JOB # _____
LOCATION _____ DATE _____
CITY _____ TIME _____

Well ID. _____ Well Condition _____

Well Diameter _____ in. Hydrocarbon Thickness _____ ft.

Total Depth _____ ft.

Depth to Liquid- _____ ft.

Volume Factor (VF)	2" = 0.17	6" = 1.50	12" = 5.80
	3" = 0.38	8" = 2.60	
	4" = 0.66	10" = 4.10	

(# of casing volumes) _____ x _____ x(VF) _____ = (Estimated Purge Volume) _____ gal.

Purging Equipment _____

Sampling Equipment _____

Starting Time _____ Purging Flow Rate _____ gpm.

(Estimated Purge Volume) _____ gal. / (Purging Flow Rate) _____ gpm. = (Anticipated Purging Time) _____ min.

Time	pH	Conductivity	Temperature	Volume
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____

Did well dewater? _____ If yes, time _____ Volume _____

Sampling Time _____ Weather Conditions _____


Analysis _____ Bottles Used _____

Chain of Custody Number _____

COMMENTS _____

FOREMAN _____ ASSISTANT _____

Monitoring Well Sampling Protocol Schematic

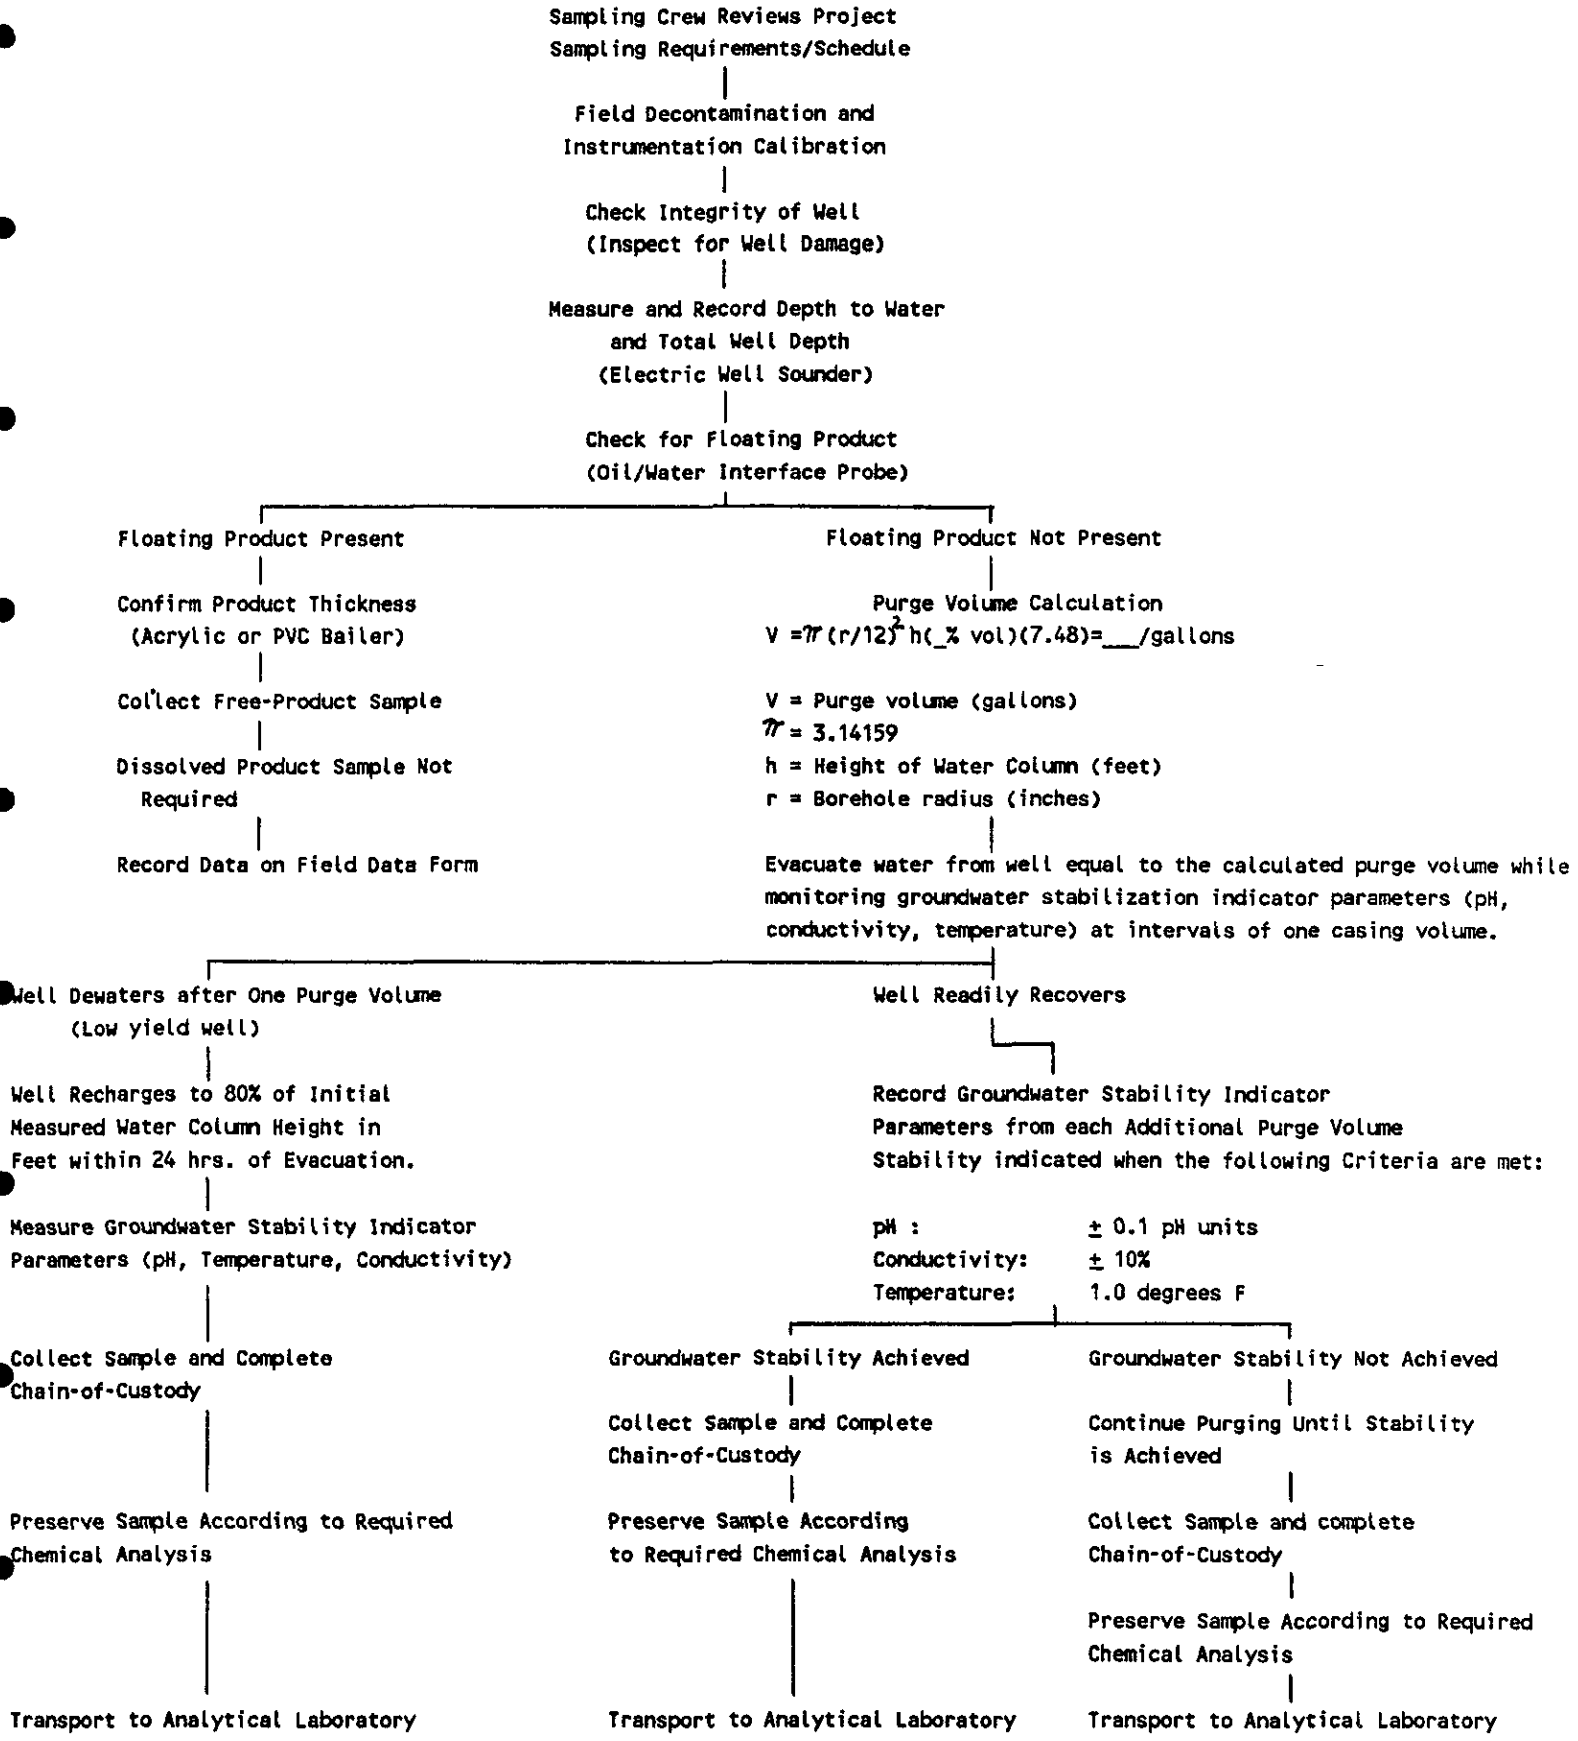

COMPANY _____ JOB NO. _____

JOB LOCATION _____

CITY _____ PHONE NO. _____

AUTHORIZED _____ DATE _____ P.O. NO. _____

SAMPLE ID	NO. OF CONTAINERS	SAMPLE MATRIX	DATE/TIME SAMPLED	ANALYSIS REQUIRED	SAMPLE CONDITION LAB ID

RELINQUISHED BY: _____

RECEIVED BY: _____

RELINQUISHED BY: _____

RECEIVED BY: _____

RELINQUISHED BY: _____

RECEIVED BY LAB: _____

DESIGNATED LABORATORY: _____ DHS #: _____

REMARKS: _____

DATE COMPLETED _____ FOREMAN _____