AUGUST 5, 1994

ALAMEDA COUNTY DEPT. OF ENVIRONMENTAL HEALTH 80 SWAN WAY ROOM 200 94621 OAKLAND, CA

ATTENTION:

SCOTT SEERY

REGARDING:

3495 CASTRO VALLEY BLVD. CASTRO VALLEY

DEAR MR. SEERY,

PLEASE FIND ENCLOSED, THE QUARTERLY REPORT FOR THE ABOVE LOCATION. THIS REPORT IS FOR THE 2ND QUARTER OF 1994. IF YOU HAVE ANY QUESTIONS FEEL FREE TO CONTACT ME.

SINCERELY,

ENCLOSURES

P & D ENVIRONMENTAL

4020 Panama Court Oakland, CA 94611 Telephone (510) 658-6916

> July 26, 1994 Report No. 0014.R10

Mr. Ted Simas Mr. Keith Simas XTRA OIL Company 2307 Pacific Ave. Alameda, CA 94501

SUBJECT: QUARTERLY GROUNDWATER MONITORING AND SAMPLING REPORT

XTRA OIL Company

3495 Castro Valley Blvd.

Castro Valley, CA

Gentlemen:

P&D Environmental (P&D) is pleased to present this report documenting the results of the most recent quarterly monitoring and sampling of the wells at the subject site. This work was performed in accordance with P&D's proposal 042994.P1 dated April 29, 1994. The reporting period is for March through May, 1994. A Site Location Map (Figure 1) and Site Plan (Figure 2) are attached with this report.

BACKGROUND

The site is currently used as a gasoline station. Four 12,000 gallon underground fuel storage tanks are present at the site. Three of the tanks contain gasoline and the fourth tank contains diesel fuel. A 550 gallon waste oil tank was removed from the site in November, 1988. The fuel tanks were replaced during August, 1992.

Three monitoring wells, designated as MW1, MW2 and MW3 were installed at the site on February 14 and 15, 1990 by Western Geo-Engineers. The subsurface materials encountered in the boreholes consisted primarily of silt and clay. The locations of the monitoring wells are shown in Figure 2. Soil samples collected during drilling of the boreholes for the monitoring wells revealed the presence of total petroleum hydrocarbons as gasoline (TPH-G) and total petroleum hydrocarbons as diesel (TPH-D). TPH-G was encountered in borehole MW1 at depths of 5 and 10 feet below grade at concentrations of 40 and 1,400 ppm, respectively; in borehole MW2 at depths of 10 and 15 feet below grade at concentrations of 230 and 95 ppm, respectively; and in borehole MW3 at depths of 5, 10 and 15 feet at concentrations of 140, 250 and 25 ppm, respectively. In addition, 120 ppm TPH-D was detected in borehole MW3 at a depth of 5 feet. Soil samples collected at a depth of 20 feet in borehole MW1 and at a depth of 18 feet in boreholes in MW2 and MW3 did not show any detectable concentrations of TPH-G or TPH-D. Groundwater was encountered in the boreholes at depths of approximately 15 to 16 feet below grade.

On February 15, 1990 Western Geo-Engineers drilled three exploratory boreholes at the site designated as SB1, SB2 and SB3. The subsurface materials encountered in the boreholes consisted primarily of silt and clay. The approximate locations of the boreholes are shown on Figure 2. It is P&D's understanding that soil samples were collected from the exploratory boreholes at depths of 10 and 12 feet and evaluated in the field using a photo ionization detector. In borehole SB1, TPH-G was detected at the depths of 10 and 12 feet at concentrations of 1,700 and 450 ppm, respectively. In boreholes SB2 and SB3, TPH-G was detected at the depths of 10 and 12 feet in both boreholes at concentrations of 800 ppm and greater than 2,000 ppm, respectively. A groundwater monitoring and sampling program was initiated at the site on February 20, 1990.

It is P&D's understanding that during fuel tank replacement activities in August, 1992 soil surrounding the tank pit was removed and disposed of offsite. An extraction well, designated as EW1, was designed and constructed in one corner of the new tank pit by K&B Environmental at the time of installation of the new tanks. The location of EW1 is shown on Figure 2.

FIELD ACTIVITIES

On May 19, 1994 all of the monitoring wells at the site were monitored and sampled by P&D personnel. Extraction well EW1 was not monitored or sampled during the quarter. The wells were monitored for depth to water and the presence of free product or sheen. Depth to water was measured to the nearest 0.01 foot using an electric water level indicator. The presence of free product or sheen was evaluated using a transparent bailer. Sheen was observed in all of the monitoring wells, however, free product was not observed in any of the wells. Depth to water level measurements are presented in Table 1.

Prior to sampling, the monitoring wells were purged of a minimum of three casing volumes of water, or until the wells had been purged dry. During purging operations, the field parameters of electrical conductivity, temperature and pH were monitored. Once the field parameters were observed to stabilize, and a minimum of three casing volumes had been purged or the wells had been purged dry and partially recovered, water samples were collected using a clean Teflon bailer.

The water samples were transferred to 40-milliliter glass Volatile Organic Analysis (VOA) vials and 1-liter amber glass bottles which were sealed with Teflon-lined screw caps. The VOA vials were overturned and tapped to assure that no air bubbles were present.

The VOA vials and bottles were then transferred to a cooler with ice, until they were transported to McCampbell Analytical, Inc. in Pacheco, California. McCampbell Analytical, Inc. is a State-certified hazardous waste testing laboratory. Chain of custody documentation accompanied the samples to the laboratory. Records of the field parameters measured during well purging are attached with this report.

HYDROGEOLOGY

Water levels were measured in the monitoring wells once during the quarter. The measured depth to water at the site on May 19, 1994 ranged from 7.15 to 8.05 feet. Groundwater levels have decreased in wells MW1, MW2 and MW3 by 0.61, 0.71 and 0.47 feet, respectively, since the previous monitoring on February 28, 1994. The calculated groundwater flow direction on May 19, 1994 was to the east with a gradient of 0.012. The groundwater gradient has increased and the flow direction has not changed from the direction calculated during the previous monitoring of February 28, 1994.

Groundwater level data collected during the quarter are presented in Table 1. It is P&D's understanding that XTRA OIL Company made arrangements with the consultant for the BP station located on the east side of Redwood Road for the monitoring of water levels in the wells at the two sites to occur on the same day of this quarter. The groundwater flow direction at the XTRA OIL Company site on May 19, 1994 is shown on Figure 2.

LABORATORY RESULTS

All of the groundwater samples collected from the monitoring wells were analyzed for TPH-G using EPA Method 5030 and Modified EPA Method 8015; benzene, toluene, ethylbenzene and total xylenes (BTEX) using EPA Method 8020; and for TPH-D using EPA Method 3510 in conjunction with Modified EPA Method 8015.

The laboratory analytical results for the groundwater samples from MW1, MW2 and MW3 show TPH-G concentrations of 100, 62 and 150 ppm, respectively; benzene concentrations of 12, 9.2 and 38 ppm, respectively; and TPH-D concentrations of 30, 5.8 and 30 ppm, respectively. Since the previous quarter, TPH-G concentrations have increased in wells MW1 and MW3, and decreased in well MW2. Benzene concentrations have increased in wells MW1 and MW3, and decreased in well MW2 since the previous quarter. TPH-D concentrations have decreased in all of the wells since the previous quarter. The laboratory analytical results of the groundwater samples are summarized in Table 2. Copies of the laboratory analytical results and chain of custody documentation are attached with this report.

DISCUSSION AND RECOMMENDATIONS

The apparent groundwater flow direction has remained relatively unchanged and the apparent groundwater gradient has increased since the previous quarter. Based on the absence of free product in well MW3, it appears that the free product recovery efforts have been successful in reducing the free product to a sheen in this well. P&D recommends that use of an absorbent sock in well MW3 for the recovery of free product be discontinued for one quarter, and the well then evaluated for the presence of free product.

Based on the laboratory analytical results of the water samples collected from the monitoring wells, P&D recommends that the quarterly groundwater monitoring and sampling program be continued. In addition, P&D recommends that future monitoring and sampling efforts continue to be coordinated with other sites in the vicinity of the subject site which are presently being monitored and sampled.

DISTRIBUTION

Copies of this report should be sent to Mr. Richard Hiett at the Regional Water Quality Control Board, San Francisco Bay Region, and to Mr. Scott Seery at the Alameda County Department of Environmental Health. Copies of the report should be accompanied by a transmittal letter signed by the principal executive officer of the XTRA OIL Company.

LIMITATIONS

This report was prepared solely for the use of XTRA OIL. The content and conclusions provided by P&D in this assessment are based on information collected during our investigation, which may include, but not be limited to, visual site inspections; interviews with the site owner, regulatory agencies and other pertinent individuals; review of available public documents; subsurface exploration and our professional judgement based on said information at the time of preparation of this document. Any subsurface sample results and observations presented herein are considered to be representative of the area of investigation; however, geological conditions may vary between borings and may not necessarily apply to the general site as a whole. If future subsurface or other conditions are revealed which vary from these findings, the newly-revealed conditions must be evaluated and may invalidate the findings of this report.

This report is issued with the understanding that it is the responsibility of the owner, or his representative, to ensure that the information contained herein is brought to the attention of the appropriate regulatory agencies, where required by law. Additionally, it is the sole responsibility of the owner to properly dispose of any hazardous materials or hazardous wastes left onsite, in accordance with existing laws and regulations.

This report has been prepared in accordance with generally accepted practices using standards of care and diligence normally practiced by recognized

TABLE 1 WELL MONITORING DATA

Well No.	Date Monitored	Top of Casing Elev. (ft.)	Depth to Water (ft.)	Water Table Elev. (ft.)
MW1	5/19/94 2/28/94 11/24/93 8/30/93 5/18/93 2/23/93 11/13/92 5/29/92 1/14/92 12/23/91 11/25/91 10/10/91 9/17/91 8/19/91	177.43* 200.00** 175.73	8.05 7.44 8.74 8.78 8.12 7.34 9.13 8.59 8.57 9.65 9.41 9.70 9.50 9.31	169.38 169.99 168.69 168.65 169.31 170.09 190.87 167.14 167.16 166.08 166.32 166.33
MW2	5/19/94 2/28/94 11/24/93 8/30/93 5/18/93 2/23/93 11/13/92 5/29/92 1/14/92 12/23/91 11/25/91 10/10/91 9/17/91 8/19/91	176.04* 198.61** 175.45	7.70 6.99 8.47 8.64 7.73 6.39 8.70 9.31 8.97 10.39 9.81 10.39 10.23	168.34 169.05 167.57 167.40 168.31 169.65 189.91 166.14 166.48 165.06 165.64 165.06
MW3	5/19/94 2/24/94 11/24/93 8/30/93 5/18/93 2/23/93 11/13/92 5/29/92 1/14/92 12/23/91 11/25/91 10/10/91 9/17/91 8/19/91	176.41* 190.97** 175.00	7.15 6.68 7.55 7.64 7.12 8.01 7.86 8.45 8.24 9.37 9.19 9.43 9.20 8.95	169.26 169.73 168.86 168.77 169.29 168.40 191.12 166.55 166.55 165.63 165.81 165.57

NOTES:
* = Surveyed on March 24, 1993
** = Surveyed on December 5, 1992

TABLE 2 SUMMARY OF LABORATORY ANALYTICAL RESULTS

	50	MELAKI OF LAI	SURATURI ANALI	IIICAD RESUD.	. D						
Well No.	TPH-D	TPH-G	Benzene	Toluene	Ethyl- benzene	Total Xylenes					
Samples Collected on May 19, 1994											
MW1	30	100	12	14	3.5	17					
MW2	5.8	62	9.2	13	1.3	8.4					
MW3	30	150	38	25	2.4	14					
EW1	Not Sampl	led.									
Samples Collected on February 28, 1994											
MW1	110	90	11	9.6	2.1	9.9					
MW2	13	91	13	16	1.5	9.0					
мw 3	210	110	36	21	1.9	11					
EW1	Not Sampl	Led.									
		Sa on 1	mples Collect November 24,	ed 1993							
MW1	8.2	66	8.3	8.9	2.0	11					
MW2	79	12	13	17	2.5	17					
MW3	24	160	48	26	2.2	12					
EW1	Not Samp	led.									
			umples Collect August 30, 1								
MWl	9.4	77	6.4	11	2.2	12					
MW2	110	110	11	14	1.8	11					
MW3	32	130	36	21	1.9	8.2					
EW1	Not Samp	led.									

TPH-G = Total Petroleum Hydrocarbons as Gasoline.

TPH-D = Total Petroleum Hydrocarbons as Diesel.

Results in parts par mellion (ppm), unless otherwise indicated.

TABLE 2
SUMMARY OF LABORATORY ANALYTICAL RESULTS (Continued)

Well No.	TPH-D	TPH-G	Benzene	Toluene	Ethyl- benzene	Total Xylenes					
Samples Collected on May 18, 1993											
MW1	30	92	4.0	11	2.5	15					
MW2	44	67	9.2	12	1.4	9.3					
MW3	7.2	130	. 36	21	2.1	12					
ew1	Not Sampled	l.									
Samples Collected on February 23, 1993											
MW1	14	100	4.5	11	2.1	12					
MW2	7.0	76	12	17	1.6	9.6					
MW3	8.1	110	31	18	1.9	11					
EW1	9.6	66	14	8.5	1.4	9.8					
		Sampi on Nov	les Collecte ember 13, 19	i 92							
MW1	4.4	120	5.8	10	2.1	13					
MW2	8.2	79	10	13	1.4	8.6					
MM3	4.7	140	38	24	2.0	12					
EW1	13	62	11	9.2	1.1	9.6					
			les Collecte May 27, 1992	ā.							
MW1	11	120	8.8	16	2.3	15					
MW2	130	89	18	19	1.7	14					
MW3	27	370	91	57	3.0	21					

TPH-G = Total Petroleum Hydrocarbons as Gasoline.
TPH-D = Total Petroleum Hydrocarbons as Diesel.
Results in parts per million (ppm), unless otherwise indicated.

TABLE 2 SUMMARY OF LABORATORY ANALYTICAL RESULTS (Continued)

Well No.	TPH-D	TPH-G	Benzene	Toluene	Ethyl- benzene	Total Xylenes						
		Sa	umples Collect	ed		_						
			January 14, 1									
MW1	19	39	7.3	8.7	1.3	8.9						
MW2	1600	59	17	14	1.8	15						
MW3	270	130	76	30	3.4	21						
Samples Collected On December 23, 1991												
MW1	34	78	9.3	7.3	0.54	13						
MW2	700	2100	36	130	79	560						
MW3	540	740	30	61	31	180						
			amples Collect November 25,									
MW1	36	170	5.5	5.6	1.6	8.4						
MW2	130	230	11	9.7	1.4	9.7						
MW3	74	150	65	31	3.4	18						
			amples Collect October 10, 1									
MW1	19	28	4.1	4.7	1.0	4.8						
MW2	360	85	21	25	2.1	14						
MW3	39	140	57	31	2.2	14						
			amples Collect September 17,									
MW1	19	39	4.9	4.1	1.2	5.9						
MW2	56	74	10	11	1.4	8.1						
MW3	140	180	47	25	2.6	15						

TPH-G = Total Petroleum Hydrocarbons as Gasoline. TPH-D = Total Petroleum Hydrocarbons as Diesel.

Results in parts per million (ppm), unless otherwise indicated.

TABLE 2 SUMMARY OF LABORATORY ANALYTICAL RESULTS (Continued)

i i			(
Well No.	TPH-D	TPH-G	Benzene	Toluene	Ethyl- benzene	Total Xylenes
			mples Collect August 19, 19			
MW1	47	48	13	8.4	0.99	29
MW2	19	69	26	22	2.1	18
MW3	150	170	82	31	4.4	22
			mples Collect July 20, 199			
MW1	49	100	11	14	2.3	17
MW2	100	51	9.9	7.7	1.2	7.5
MW3	270	450	46	29	3.5	21
			mples Collect 1 June 20, 19			
MW1	42	76	4.7	7.1	1.5	9.8
MW2	69	87	8.1	8.4	1.1	8.9
MW3	210	920	39	49	13	69
		Sa O	mples Collect n May 17, 199	ed 1		
MW1	26	72	7.7	9.9	ND	11
MW2	33	62	5.9	6.3	1.2	9.0
MW3	70	170	32	22	2.2	18
			mples Collect April 15, 19			
MWl	NA	56	6.5	8.5	0.41	9.9
MW2	NA	82	5.3	7.4	1.0	9.4
MW3	NA	110	31	15	0.88	7.4

TPH-G = Total Petroleum Hydrocarbons as Gasoline. TPH-D = Total Petroleum Hydrocarbons as Diesel.

ND = Not Detected.

NA = Not Analyzed.

Results in parts per million (ppm), unless otherwise indicated.

TABLE 2 SUMMARY OF LABORATORY ANALYTICAL RESULTS (Continued)

Well No.	TPH-D	TPH-G	Benzene	Toluene	Ethyl- benzene	Total Xylenes
			amples Collect n March 21, 19			
MW1	NA	36	4.5	5.7	0.087	7.3
MW2	МA	62	9.3	11	0.35	9.7
MW3	NA	87	30	14	0.69	5.4
			amples Collect February 15,			
MW1	NA	120	7.4	6.6	ND	13
MW2	NA	200	12	12	1.7	14
MW3	NA	230	44	40	ND	31
			amples Collect January 14, 1			
MWl	NA	33	3.9	2.9	0.21	5.3
MW2	NA	78	11	8.7	0.58	8.0
MW3	АИ	160	48	25	1.0	16
			amples Collect September 27,			
MW1	NA	28	3.7	3.5	0.01	6.5
MW2	NA	59	8.4	12	0.88	9.0
MW3	NA	25	7.2	6.4	0.42	3.4
			amples Collect August 23, 1			
MW1	NA	40	5.1	4.9	0.35	6.0
MW2	NA	96	8.1	8.4	1.5	8.6
MW3	NA	220	67	46	27	18

 $\mbox{TPH-G} = \mbox{Total Petroleum Hydrocarbons as Gasoline}.$ $\mbox{TPH-D} = \mbox{Total Petroleum Hydrocarbons as Diesel}.$


ND = Not Detected.

NA = Not Analyzed.

Results in parts per million (ppm), unless otherwise indicated.

P & D ENVIRONMENTAL

4020 Panama Court Oakland, CA 94611 Telephone (510) 658-6916

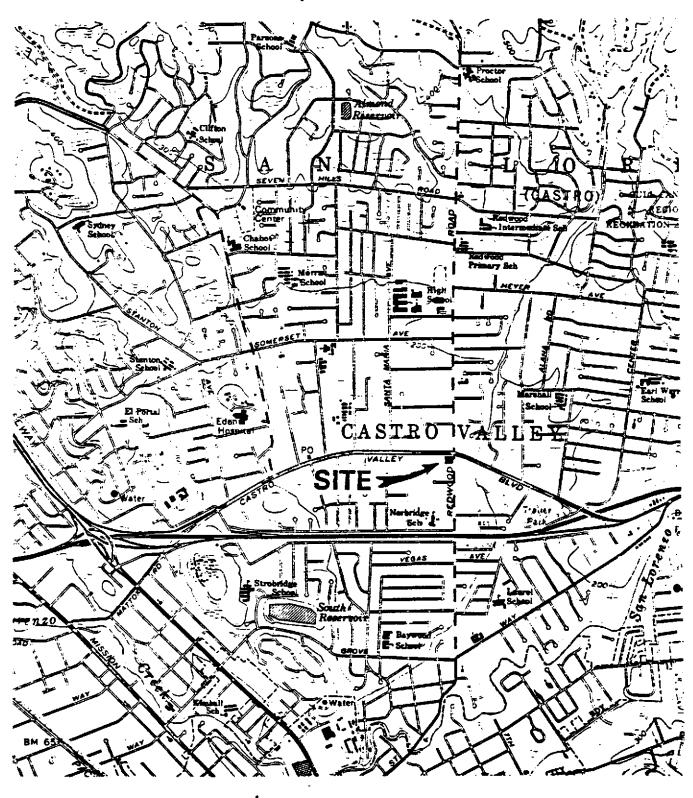

Base Map from: U.S. Geological Survey Hayward, Calif. 7.5 Minute Quadrangle Photorevised 1980





Figure 1
SITE LOCATION MAP
XTRA OIL Company
3495 Castro Valley Blvd.
Alameda, California

P & D Environmental

4020 Panama Court Oakland, CA 94611 Telephone (510) 658-6916

Castro Valley Blvd.

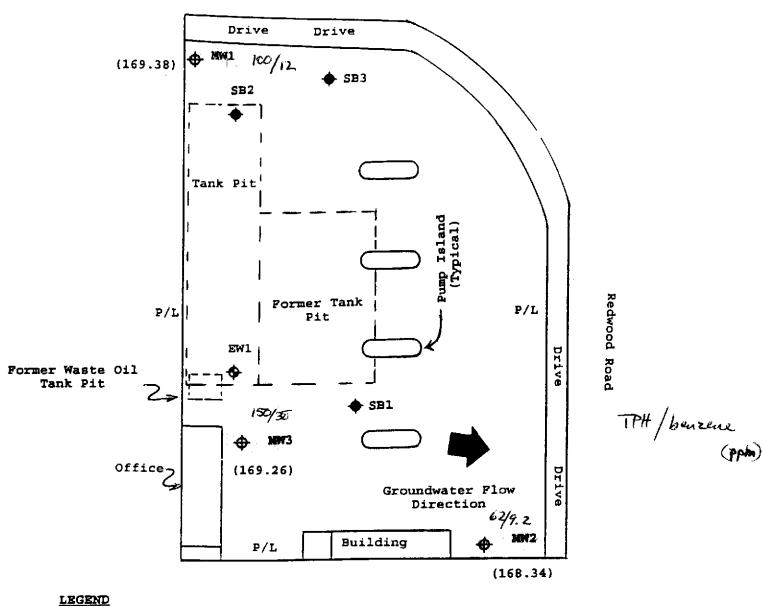

- Extraction Well Location
- Monitoring Well Location
- Soil Boring Location
- Groundwater Flow Direction
- () Groundwater Surface Elevation on May 19, 1994
- P/L Property Line

Base Map From XTRA OIL Company

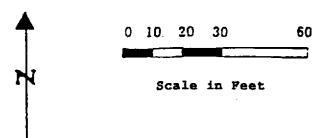


Figure 2 SITE PLAN XTRA OIL Company 3459 Castro Valley Blvd. Castro Valley, CA

P&D ENVIRONMENTAL GROUNDWATER MONITORING/WELL PURGING DATA SHEET

site Name XTRAGIL Costro Will	e	Well No	mw I
Job No. 0014	<u>.</u>	Date	5/19/94
TOC to Water (ft.) 8.05	_	Sheen	some
Well Depth (ft.) 20.15		Free Produc	t Thickness None
Well Diameter 4	_	Sample Coll	ection Method
Gal./Casing Vol T. Sto C	29	Teffen Bo	iler
TIME GAL. PURGED	_ нд	TEMPERATURE (°F)	CONDUCTIVITY (NOTION)
9:05 4	4.77	<u>63.6</u>	1.05 X1000
9:10 8	670	644	1, =5
9:15 12	6.69	65.2	1,08
9:20 16	6.68	65.9	1.08
9:25 20	6.68	66.1	1.69
9:30 24	CA67	66.3	1.10
		Saughel	A 9:40 am
		The same of the sa	
			`
		<u> </u>	
			
			
		····	
	•		The state of the s
NOTES . A			
NOTES: AOG		1 2	
Well projed using 1to	Mda prim	p & Pout va	me.
PURGE10.92	ļ	1	

P&D ENVIRONMENTAL GROUNDWATER MONITORING/WELL PURGING DATA SHEET

Job No	Site Name XTAA oi	well No. WW L
Well Depth (ft.) / 8 35 Well Diameter 4" Gal./Casing Vol. 27 TIME GAL. PURGED PH TEMPERATURE (7) (1:20 3.5 7.01 65.7 7.43 (1:27 7.0 7.01 65.3 1.42 (1:32 7.0 6.76 65.3 1.42 (1:36 7.5 6.68 6). 9 1.5 6 (1:40 21.0 6.17 6.1 1.5 8 Sample Collection Method Tellan Rayler ELECTRICAL CONDUCTIVITY (W)/W (1:30 7.01 65.7 7.43 (1:32 7.40 6.76 65.3 1.42 (1:36 7.5 6.68 6). 9 1.5 6 (1:40 21.0 6.67 66.1 1.5 8 Sample Collection Method Tellan Rayler Tomarian Sample Collection Method Tellan Rayler Sample Collection Method Tellan Rayler Tomarian Tomarian Sample Collection Method Tellan Rayler Tomarian Tomarian Sample Collection Method Tellan Rayler Tomarian Sample Collection Tomarian Sa	Job No. 0014	Date 5/19/94
Well Diameter	TOC to Water (ft.) 7.776	Sheen
Well Diameter	Well Depth (ft.) /8-35	Free Product Thickness
TIME GAL. PURGED DH TEMPERATURE (F) CONDUCTIVITY (W/W) (1:10		Sample Collection Method
11:20 3.5 7.61 65.4 2.17 11:24 7.0 7.01 65.7 1.43 11:27 10.5 6.12 65.3 1.42 11:32 14.6 6.18 65.8 1.56 11:40 21.0 6.67 66.1 1.58 Sampled at 11:45 av	~~	Teflon Bailer
NOTES: ADL	TIME GAL. PURGED 11:20 3.5 11:24 7.0 11:32 14.0 11:30 17.5 11:40 21.0	7.01 65.4 2.17 7.01 65.7 1.43 6.78 65.3 1.42 6.78 65.8 1.54 6.67 66.1 1.58
Well projed using Handa promp & fout valve.		Handa promp & fout valve

P&D ENVIRONMENTAL GROUNDWATER MONITORING/WELL PURGING DATA SHEET

site Name XTRA oil CosmoValley	Well No. MW3
Job No. 0014	Date 5/19/94
TOC to Water (ft.) 7.15	Sheen Some
Well Depth (ft.) 18.35	Free Product Thickness
Well Diameter 4"	Sample Collection Method
Gal./Casing Vol. 7.2 \(\frac{7}{2}\)	Toflon Bailer
TIME GAL. PURGED pH	TEMPERATURE CONDUCTIVITY ()
10:10 3.64 6.53	64,2 2.21 X1000
10:14 7.28 6:47	64.5 2.48
10:18 10.96 6.42	6511 2.52
10:23 14.56 6.39	05.3 2,59
10:27 18:20 638	65.4 2.54
10:30 21.84 6.58	05.5 2.56
	1-A-A-0000
Sample	led al 10:35 am
	<u> </u>
	
NOTES: A A /	
ROG	2 0 1 1
Well purged using Honde	ning & footvalve
DIDGE 10 92	

P & D Environmental			oject ID:#0	014; Xtra o	Date Sampled: 05/19/94					
4020 Panama	Ct.	Valley				Date Received: 05/19/94				
Oakland, CA	94611	Client Co	ntact: Paul K	ing		Date Extract	ed:			
		Client P.C):			Date Analyz	ed:05/19/94			
EPA methods 50	Gasoline Ran	ge (C6-C1 8020 or 602	2) Volatile H ; California RW	ydrocarbon QCB (SF Bay	is as Gasol Region) met	ine*, with B'	TEX* 30)			
Lab ID	Client ID	Matrix	TPH(g) ⁺	Benzene	Toluene	Ethylben- zene	Xylenes	% Rec. Surrogate		
35661	MWl	W	100,000,a,h	12,000	14,000	3500	17,000	105		
35662	MW2	w	62,000,a,h	9200	13,000	1300	8400	107		
35663	MW3	w	150,000,a,h	38,000	25,000	2400	14,000	100		
	-									
	imit unless other-	w	50 ug/L	0.5	0.5	0.5	0.5			
wise stated; ND means Not Detected		S	1.0 mg/kg	0.005	0.005	0.005	0.005			

Edward Hamilton, Lab Director

^{*}water samples are reported in ug/L, soil samples in mg/kg, and all TCLP extracts in mg/L

[#]cluttered chromatogram; sample peak co-elutes with surrogate peak

⁺ The following descriptions of the TPH chromatogram are cursory in nature and McCampbell Analytical is not responsible for their interpretation: a) unmodified or weakly modified gasoline is significant; b) heavier gasoline range compounds are significant (aged gasoline?); c) lighter gasoline range compounds (the most mobile fraction) are significant; d) gasoline range compounds are significant; no recognizable pattern; e) TPH pattern that does not appear to be derived from gasoline (?); f) one to a few isolated peaks present; g) strongly aged gasoline or diesel range compounds are significant; h) lighter than water immiscible sheen is present.

QC REPORT FOR HYDROCARBON ANALYSES

Date: 05/19/94

Matrix: Water

	Concent	ration	(ug/L)		% Reco	RPD		
Analyte	Sample	MS	KSD	Amount Spiked	MS	MSD	RPU	
TPH (gas)	0.0	86.5	84.6	100	86.5	84.6	2.2	
Benzene	0	9.4	9.7	10	94.0	97.0	3.1	
Toluene	0	9.9	10.1	10	99.0	101.0	2.0	
Ethyl Benzene	0	10.3	10.5	10	103.0	105.0	1.9	
Xylenes	0	31.6	32.2	30	105.3	107.3	1.9	
TPH (diesel)	0	176	168	150	117	112	4.6	
TRPH (oil & grease)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

% Rec. = (MS - Sample) / amount spiked x 100

RPD = (MS - MSD) / (MS + MSD) \times 2 \times 100

P & D Environmental

4020 Panama Court Oakland, CA 94611 Telephone (510) 658-6916

CHAIN OF CUSTODY RECORD

											$-\infty$	<u> </u>	AYV	15	JL UI	 _
PROJECT NUMBER:		P	ROJECT	NAME:					:i/ i)	7.7	7	\neg	7.7	T		
(30)			8777	K 650	1 - Castra	3 Vall-11		ANAL TSICK					/ /	/ بخ		
1		SIGNAT	LIBER	1		- 10/11/2	P N	ě	#\^{\	ž/	/	/	//.	£ /		
Absorption (Carlos)	Lon	JIGHA		ad ob	2. LIK			1	1 3/7	4 /	/ /	/ /	/ / À	· /	REMARKS	
SAMPLED BY: (PRI Armod Gran	ACOUL-	a	your	repres	moor-		₩. 1914	₹/	\$ 2	/ /			/ 3	' /		•
SAMPLE NUMBER	DATE		TYPE		SAMPLE LOCA	TION	NUMBER OF CONTAINERS				/	/	PRESERVI	/		
155.401	5-19-44		wester			 	4	X	/	1			YZE	المالات	ar i Tana An	. }
J	7 17-14	 	11	ł	·			╁	 	-			11	11	12 1 (1 ACK 7 Y)	C AILE
YILO C			1	1			11		 	1			31	41	yt 11	
101195	<u>v</u>	ļ. <u></u>	ļ_ <u>'</u> '	 			4-		싀	-			,,			en el seu l'
			<u> </u>	<u> </u>			. 	.							35661	
						1										
															35668	
	 			 						1						
<u></u>	 		ļ	<u> </u>				 - 	-	+					35668	
			<u> </u>					<u> </u>		_					14-117	
i	<u> </u>			<u> </u>				<u> </u>								11550A.
			 	<u> </u>			 			+	_					
		 	<u> </u>	1400 Mah	The material region (e.g., in some special section)				├─├							
			ļ	1.00	us deciment	OTHER							ļ			
ICF/T"_				ያ ጎዘየፎ _ራ	-1											
	NOTION_		APPROP		4				l							
HEAD SP	ACE ADSENT	-1	CONTAI	LERS												
RELINGUISHED BY:	1 1	_	DATE		RECEIVED BY:	(CICHATIDE)	L	TOTA	L NO. OF	SAMPL	E\$	٠,٢	ļ	L		
RELINGUISHED BY:	O C	1		إناس <i>ا</i> إذا زي	MECEIVED BI:	(SIGNA TURE)		L9	THE SH	<u>MEHT)</u>				ORATORY:		
Thwall	and DV		12/1	1-1:4	lave la		 .	Î	L NO. OF THIS 2017	110(1)	- FA-3	12	- M	(Comp	hell Analy	Mar 1
RELINQUISHED BY:	(SIGNATURE	E)	ĎATE	TIME	RECEIVED BY:	(SIGNATURE)		LA	BORAT	ORY	CON	ITAC	T: LAB	ORATORY	PHONE NUMI	BER:
								Ì	<u>-</u> []	blen	ωH	ارخا	(27)	0)79	8-1686	
RELINQUISHED BY:	(SIGNATURE	:)	DATE	TIME	RECEIVED FOR	LABORATORY	BY:	∤						EQUEST S		
	,	-•			(SIGNATURE)				•					5 (人)NO		
				<u> </u>				1								
•					REMARKS:	VOAS PE	45.6) ²	ل ه 🗸	50.	1-1	< 9	<i>)</i> ,	11 FK	e Giele	ļ	
]											